

EXPLODED VIEW

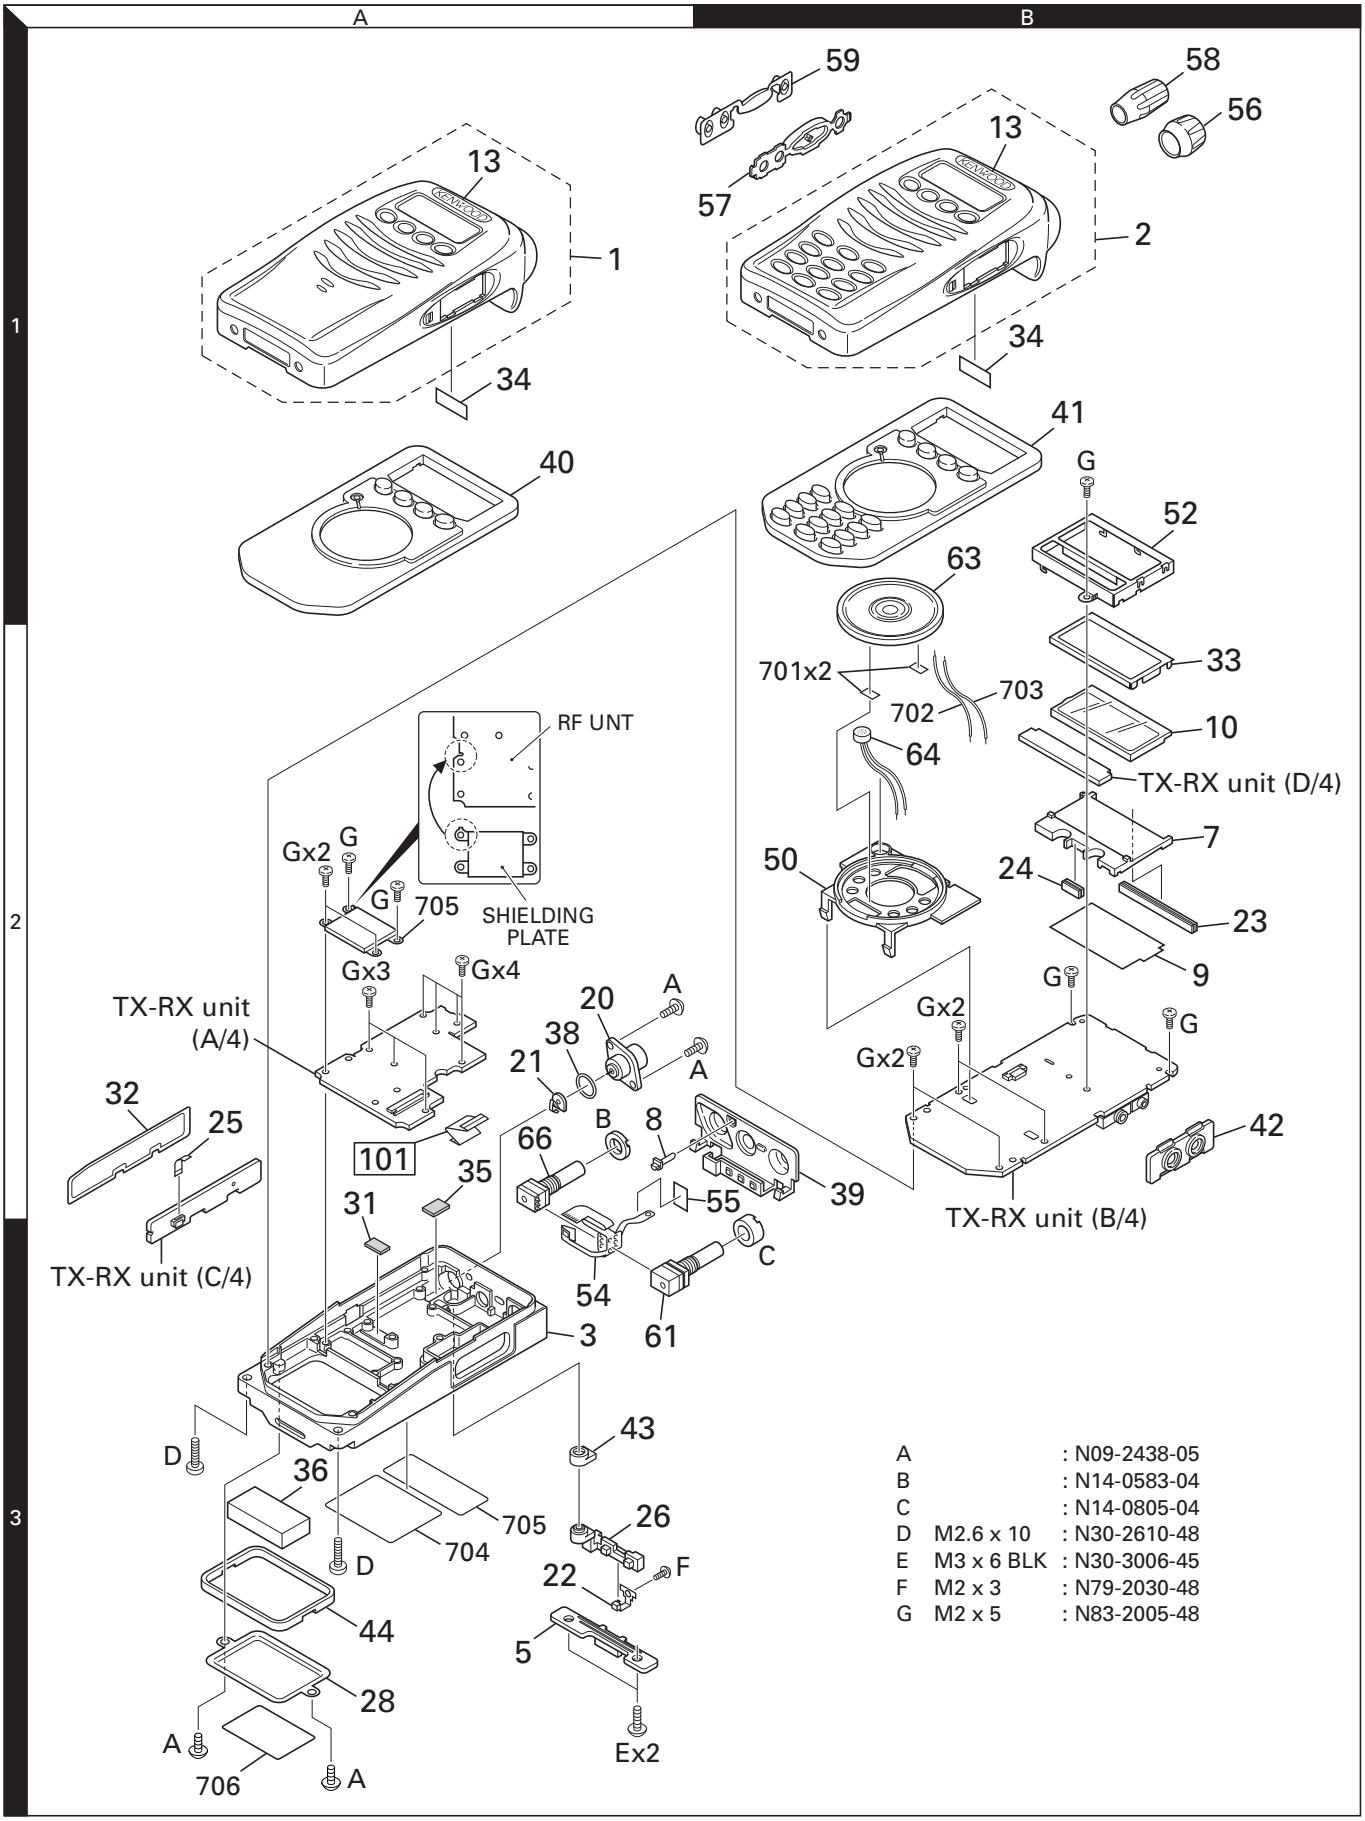

A		: N09-2438-05
B		: N14-0583-04
C		: N14-0805-04
D	M2.6 x 10	: N30-2610-48
E	M3 x 6 BLK	: N30-3006-45
F	M2 x 3	: N79-2030-48
G	M2 x 5	: N83-2005-48

Parts with the exploded numbers larger than 700 are not supplied.

PACKING

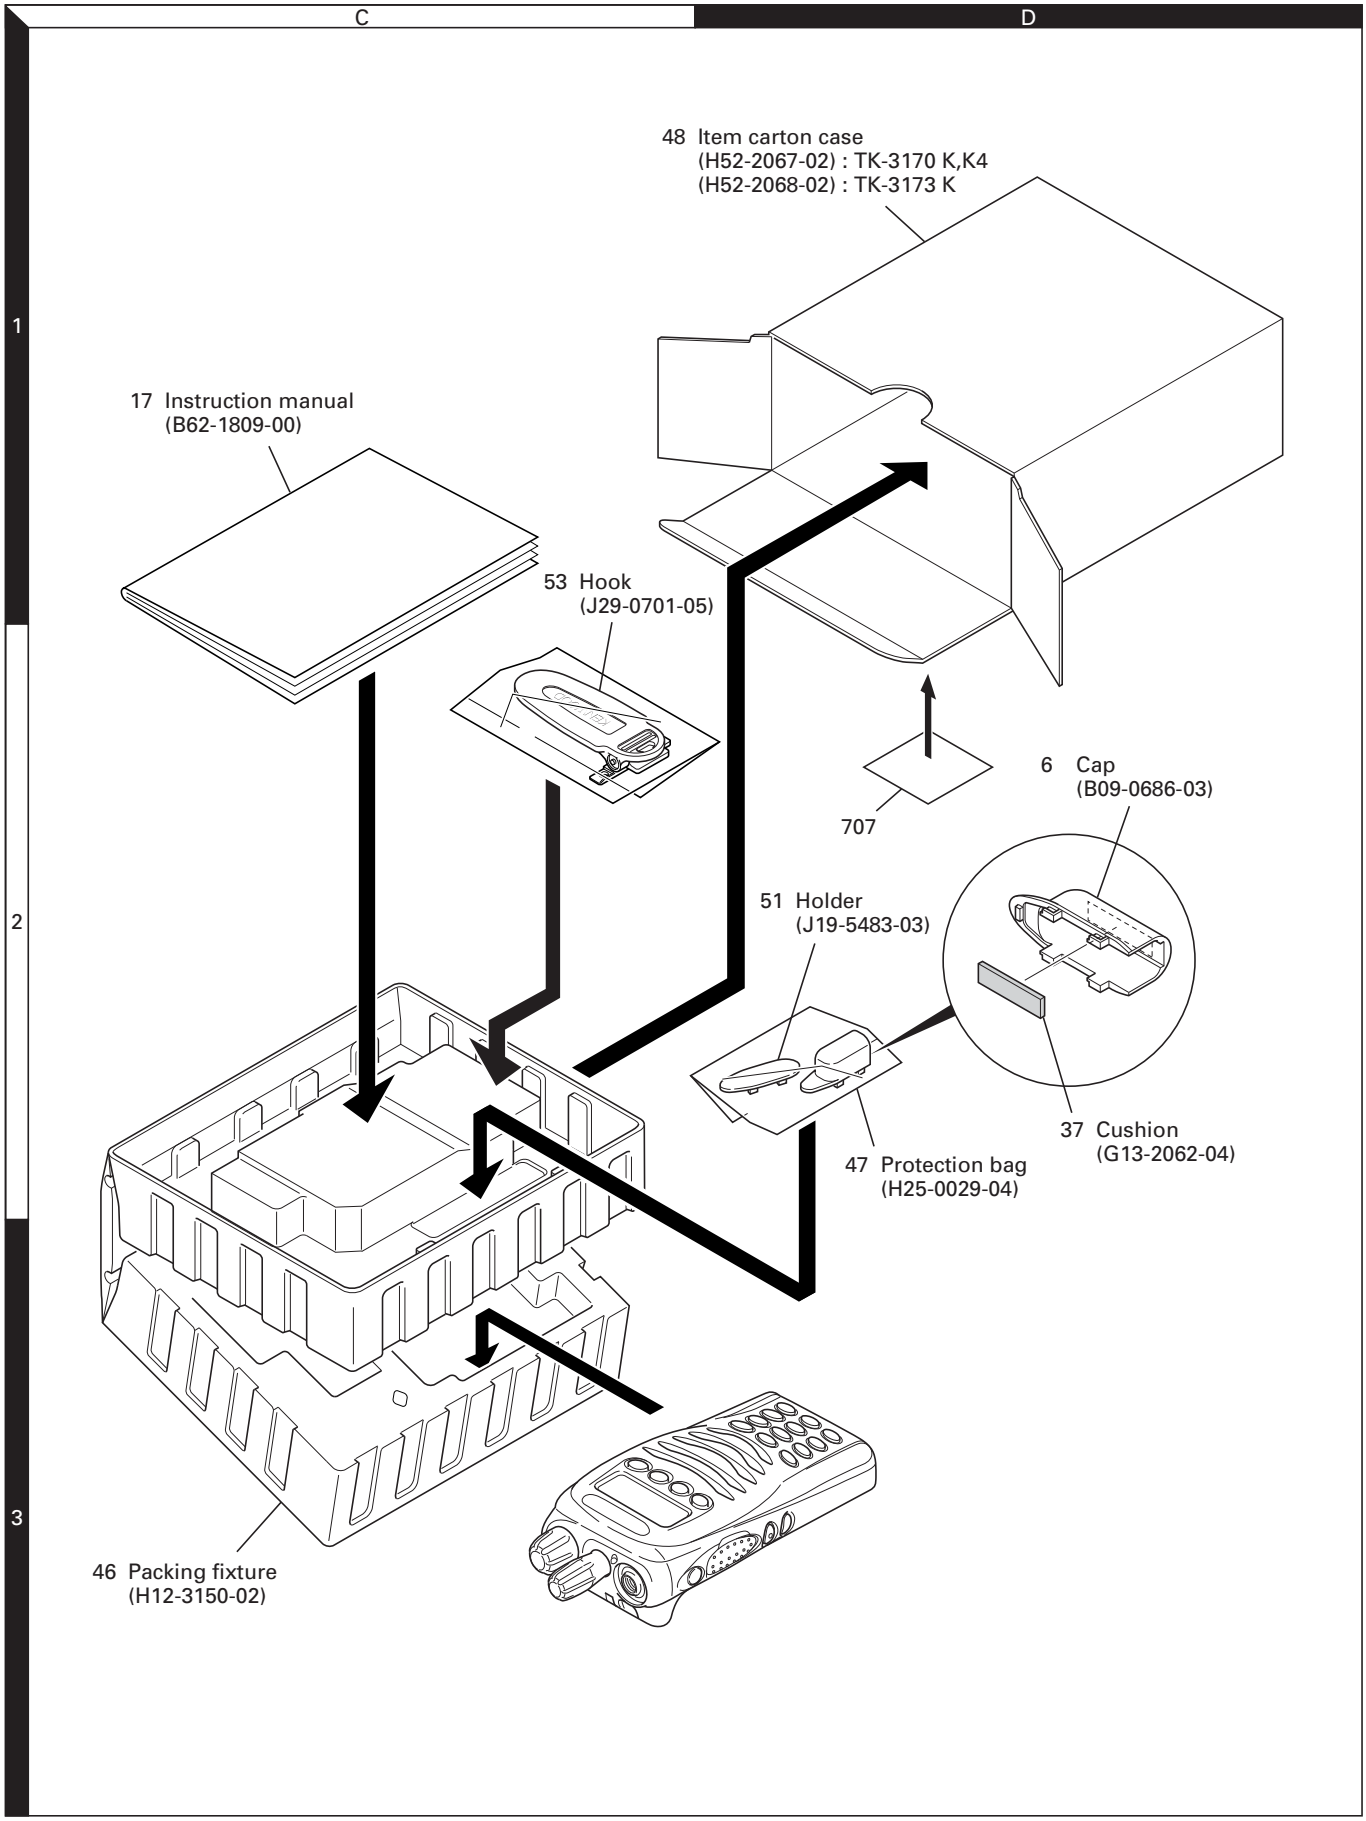

Parts with the exploded numbers larger than 700 are not supplied.

PARTS LIST

✻ New Parts. ⚠ indicates safety critical components.
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

L : Scandinavia **K** : USA **P** : Canada
Y : PX (Far East, Hawaii) **T** : England **E** : Europe
Y : AAFES (Europe) **X** : Australia **M** : Other Areas

TK-2170 (Y50-5860-XX)
TX-RX UNIT (X57-7010-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination
TK-3170/3173					
1	1A	✻	A02-3890-03	PLASTIC CABINET ASSY	K,3173
2	1B	✻	A02-3891-03	PLASTIC CABINET ASSY	K4
3	3A	✻	A10-4088-01	CHASSIS	
5	3A		B01-0694-03	ESCUTCHEON	
6	2D	✻	B09-0686-03	CAP ACCESSORY	
7	2B	✻	B11-1826-03	ILLUMINATION GUIDE	
8	2A	✻	B11-1827-04	ILLUMINATION GUIDE	
9	2B	✻	B11-1828-04	FILTER	
10	2B	✻	B38-0901-05	LCD	
13	1A,1B	✻	B43-1178-04	BADGE	
17	1C	✻	B62-1809-00	INSTRUCTION MANUAL	
20	2A		E04-0436-05	RF COAXIAL RECEPTACLE (SMA)	
21	2A		E23-1188-04	TERMINAL	
22	3A		E23-1189-04	TERMINAL	
23	2B	✻	E29-1204-04	INTER CONNECTOR (LCD)	
24	2B	✻	E29-1211-04	INTER CONNECTOR (4-KEY)	
25	2A	✻	E37-1142-05	FLAT CABLE	
26	3A	✻	E72-0421-03	TERMINAL BLOCK	
28	3A	✻	F07-1890-04	COVER	
-	-		G10-1333-04	FIBROUS SHEET (CABINET ASSY)	
31	3A	✻	G11-4315-04	SHEET	
32	2A	✻	G11-4316-04	SHEET	
33	2B	✻	G11-4335-04	SHEET	
34	1A,1B	✻	G11-4352-04	SHEET	
35	2A		G13-1885-04	CUSHION	
36	3A		G13-2001-04	CUSHION	
37	2D	✻	G13-2062-04	CUSHION ACCESSORY	
38	2A		G53-1603-04	PACKING	
39	2B	✻	G53-1650-02	PACKING	
40	1A	✻	G53-1651-01	PACKING	K,3173
41	1B	✻	G53-1652-01	PACKING	K4
42	2B	✻	G53-1653-03	PACKING	
43	3A	✻	G53-1654-04	PACKING	
44	3A	✻	G53-1655-04	PACKING	
46	3C		H12-3150-02	PACKING FIXTURE	
47	2D		H25-0029-04	PROTECTION BAG (60/110/0.07)	
48	1D	✻	H52-2067-02	ITEM CARTON CASE	K,K4
48	1D	✻	H52-2068-02	ITEM CARTON CASE	3173
50	2B	✻	J19-5481-03	HOLDER	
51	2D	✻	J19-5483-03	HOLDER ACCESSORY	
52	1B	✻	J21-8488-03	MOUNTING HARDWARE	
53	2C		J29-0701-05	HOOK ACCESSORY	
54	3A	✻	J82-0106-05	FPC	
55	2A	✻	J99-0399-04	DOUBLE-SIDED TAPE (4 x 7mm)	
56	1B		K29-9278-13	KNOB (VOLUME)	
57	1B	✻	K29-9339-03	KNOB (PTT)	
58	1B	✻	K29-9340-03	KNOB (SELECTOR)	
59	1B	✻	K29-9341-03	KEY TOP (SIDE)	
A	2A,3A	✻	N09-2438-05	BINDING HEAD SCREW	
B	2A		N14-0583-04	CIRCULAR NUT	
C	3B		N14-0805-04	CIRCULAR NUT	
D	3A	✻	N30-2610-48	PAN HEAD MACHINE SCREW	
E	3A		N30-3006-45	PAN HEAD MACHINE SCREW	
F	3A	✻	N79-2030-48	PAN HEAD TAPTITE SCREW	
G	2A,2B		N83-2005-48	PAN HEAD TAPTITE SCREW	
61	3A	✻	R31-0655-05	VARIABLE RESISTOR	
63	1B		T07-0369-05	SPEAKER	
64	2B	✻	T91-0650-05	MIC ELEMENT	
66	2A		W02-3684-05	SELECTOR	

Ref. No.	Address	New parts	Parts No.	Description	Destination
TX-RX UNIT (X57-7010-XX) -10 : TK-3170 K -11 : TK-3170 K4 -14 : TK-3173 K					
D2			B30-2278-05	LED (RED/YELLOW)	
D5			B30-2210-05	LED (TLY)	
D7			B30-2210-05	LED (TLY)	
D8,9			B30-2050-05	LED	K4
D12,13			B30-2050-05	LED	K4
C2			CK73HB1H471K	CHIP C 470PF K	
C3			CK73FB1A475K	CHIP C 4.7UF K	
C4			CK73GB1E105K	CHIP C 1.0UF K	
C5,6			CK73HB1H471K	CHIP C 470PF K	
C7			CK73HB1A104K	CHIP C 0.10UF K	
C9			CK73GB1E105K	CHIP C 1.0UF K	
C11			CK73FB1A225K	CHIP C 2.2UF K	
C13			CK73HB1H471K	CHIP C 470PF K	
C14,15			CK73HB1E472K	CHIP C 4700PF K	
C16,17			CK73HB1H471K	CHIP C 470PF K	
C18			CK73HB1A104K	CHIP C 0.10UF K	
C19			CK73HB1H471K	CHIP C 470PF K	
C20			CK73HB1E472K	CHIP C 4700PF K	
C21			CK73HB1H471K	CHIP C 470PF K	
C22			CK73HB1E472K	CHIP C 4700PF K	
C23,24			CK73GB1E105K	CHIP C 1.0UF K	
C25			CK73HB1E472K	CHIP C 4700PF K	
C26			CK73HB1H471K	CHIP C 470PF K	
C27			C92-0712-05	CHIP-TAN 22UF 6.3WV	
C28-31			CK73HB1H471K	CHIP C 470PF K	
C32,33			CK73HB1A104K	CHIP C 0.10UF K	
C34			CK73HB1H471K	CHIP C 470PF K	
C35			CK73HB1A104K	CHIP C 0.10UF K	
C37			CK73FB1A475K	CHIP C 4.7UF K	
C38,39			CK73HB1A473K	CHIP C 0.047UF K	
C40			CK73HB1H471K	CHIP C 470PF K	
C42			CK73HB1H681K	CHIP C 680PF K	
C43,44			CK73HB1C103K	CHIP C 0.010UF K	
C45			C92-0712-05	CHIP-TAN 22UF 6.3WV	
C46			CK73HB1H471K	CHIP C 470PF K	
C47			CK73GB1E105K	CHIP C 1.0UF K	
C48-51			CK73HB1H471K	CHIP C 470PF K	

PARTS LIST

TX-RX UNIT (X57-7010-XX)

Ref. No.	Address	New parts	Parts No.	Description			Destination
C52			CK73HB1A104K	CHIP C	0.10UF	K	
C53			CK73HB1H471K	CHIP C	470PF	K	
C55			CK73GB1E105K	CHIP C	1.0UF	K	
C56			CK73HB1A104K	CHIP C	0.10UF	K	
C57			C92-0662-05	CHIP-TAN	15UF	6.3WV	
C58			CK73HB1H471K	CHIP C	470PF	K	
C59			CC73HCH1H220J	CHIP C	22PF	J	
C60			CC73HCH1H120J	CHIP C	12PF	J	
C61			CK73HB1A104K	CHIP C	0.10UF	K	
C62			CC73HCH1H010C	CHIP C	1.0PF	C	
C63			CC73HCH1H120J	CHIP C	12PF	J	
C65			CK73HB1A104K	CHIP C	0.10UF	K	
C66			CK73HB1C103K	CHIP C	0.010UF	K	
C67			C92-0514-05	CHIP-TAN	2.2UF	10WV	
C68			CK73HB1H471K	CHIP C	470PF	K	
C69			C92-0560-05	CHIP-TAN	10UF	6.3WV	
C70			CK73HB1E682K	CHIP C	6800PF	K	
C71			CK73HB1H392K	CHIP C	3900PF	K	
C72			CK73HB1H122K	CHIP C	1200PF	K	
C73			CC73HCH1H470J	CHIP C	47PF	J	
C74			CK73HB1H122K	CHIP C	1200PF	K	
C75			CK73HB1C153K	CHIP C	0.015UF	K	
C76			CK73HB1H332K	CHIP C	3300PF	K	
C77			CK73HB1C153K	CHIP C	0.015UF	K	
C78			CK73HB1A104K	CHIP C	0.10UF	K	
C79			CK73HB1H222K	CHIP C	2200PF	K	
C81			CK73HB1A104K	CHIP C	0.10UF	K	
C82			CC73HCH1H101J	CHIP C	100PF	J	
C84			CK73HB1H471K	CHIP C	470PF	K	
C85			CK73HB1C123K	CHIP C	0.012UF	K	
C87			CK73HB1A104K	CHIP C	0.10UF	K	
C88,89			CC73HCH1H010B	CHIP C	1.0PF	B	
C90,91			CK73GB1E104K	CHIP C	0.10UF	K	
C93			CK73GB1E105K	CHIP C	1.0UF	K	
C95		✻	CK73HB1A224K	CHIP C	0.22UF	K	
C96			CK73GB1E105K	CHIP C	1.0UF	K	
C97			CC73HCH1H151J	CHIP C	150PF	J	
C98			CK73HB1A683K	CHIP C	0.068UF	K	
C99,100			CK73FB1A475K	CHIP C	4.7UF	K	
C102			CK73HB1C103K	CHIP C	0.010UF	K	
C103			CK73FB1A475K	CHIP C	4.7UF	K	
C104			CK73GB1E104K	CHIP C	0.10UF	K	
C106			CK73HB1H471K	CHIP C	470PF	K	
C107			CK73HB1A104K	CHIP C	0.10UF	K	
C108			CK73GB1E105K	CHIP C	1.0UF	K	
C109			CC73HCH1H100D	CHIP C	10PF	D	
C110			CK73HB1H471K	CHIP C	470PF	K	
C111			CK73HB1C103K	CHIP C	0.010UF	K	
C112			CC73HCH1H680J	CHIP C	68PF	J	
C113-115			CK73HB1A104K	CHIP C	0.10UF	K	
C116			CC73HCH1H220J	CHIP C	22PF	J	
C117			CK73GB1E105K	CHIP C	1.0UF	K	
C118			CK73HB1A104K	CHIP C	0.10UF	K	
C119			CK73HB1C103K	CHIP C	0.010UF	K	
C120			CK73FB1A225K	CHIP C	2.2UF	K	
C121			CK73HB1A393K	CHIP C	0.039UF	K	
C122			CK73HB1H471K	CHIP C	470PF	K	
C123			CC73HCH1H680J	CHIP C	68PF	J	
C125			CK73HB1A104K	CHIP C	0.10UF	K	
C126			CC73HCH1H470J	CHIP C	47PF	J	

Ref. No.	Address	New parts	Parts No.	Description			Destination
C127			CC73HCH1H181J	CHIP C	180PF	J	
C128			CK73HB1H471K	CHIP C	470PF	K	
C129			CK73GB1E105K	CHIP C	1.0UF	K	
C130			CK73HB1A104K	CHIP C	0.10UF	K	
C131			CK73HB1H821K	CHIP C	820PF	K	
C132			CK73HB1A104K	CHIP C	0.10UF	K	
C133			CK73GB1E105K	CHIP C	1.0UF	K	
C134			CK73HB1A473K	CHIP C	0.047UF	K	
C135			CK73GB1E105K	CHIP C	1.0UF	K	
C136			CK73HB1H561K	CHIP C	560PF	K	
C137			CK73HB1H471K	CHIP C	470PF	K	
C138			CK73HB1A104K	CHIP C	0.10UF	K	
C139			CK73GB1E105K	CHIP C	1.0UF	K	
C140			CK73HB1A104K	CHIP C	0.10UF	K	
C142,143			CK73GB1E105K	CHIP C	1.0UF	K	
C145-148			CK73HB1H471K	CHIP C	470PF	K	
C149			CK73HB1H221K	CHIP C	220PF	K	
C150,151			CK73FB1A225K	CHIP C	2.2UF	K	
C153			CK73GB1E105K	CHIP C	1.0UF	K	
C154,155			CK73HB1H471K	CHIP C	470PF	K	
C157			CK73GB1A224K	CHIP C	0.22UF	K	
C158			CK73HB1A104K	CHIP C	0.10UF	K	
C159			CC73HCH1H101J	CHIP C	100PF	J	
C161			CC73HCH1H101J	CHIP C	100PF	J	
C162			C92-0560-05	CHIP-TAN	10UF	6.3WV	
C166			CK73HB1H471K	CHIP C	470PF	K	
C168,169			CK73HB1A393K	CHIP C	0.039UF	K	
C170			CK73HB1H471K	CHIP C	470PF	K	
C171			C92-0560-05	CHIP-TAN	10UF	6.3WV	
C172			C92-0665-05	TANTAL	100UF	6.3WV	
C173			CK73HB1H221K	CHIP C	220PF	K	
C174			CK73HB1H471K	CHIP C	470PF	K	
C175			CK73HB1C103K	CHIP C	0.010UF	K	
C176		✻	CK73HB1A224K	CHIP C	0.22UF	K	
C177			CK73HB1A104K	CHIP C	0.10UF	K	
C178			CK73GB1E105K	CHIP C	1.0UF	K	
C181			CK73GB0J475K	CHIP C	4.7UF	K	
C182			CK73HB1H681K	CHIP C	680PF	K	
C183			CK73HB1H471K	CHIP C	470PF	K	
C184			CK73HB1H222K	CHIP C	2200PF	K	
C185			CK73HB1C103K	CHIP C	0.010UF	K	
C186			CC73HCH1H270J	CHIP C	27PF	J	
C187			CK73HB1C103K	CHIP C	0.010UF	K	
C188			CC73HCH1H270J	CHIP C	27PF	J	
C189			CK73GB1E104K	CHIP C	0.10UF	K	
C190,191			CK73HB1H471K	CHIP C	470PF	K	
C192			CK73HB1H102K	CHIP C	1000PF	K	
C197,198			CK73HB1H471K	CHIP C	470PF	K	
C199,200			CK73HB1A104K	CHIP C	0.10UF	K	
C201		✻	CK73HB1A224K	CHIP C	0.22UF	K	
C423			CK73FB1A475K	CHIP C	4.7UF	K	
C501			CK73HB1C103K	CHIP C	0.010UF	K	
C502			CC73HCH1H470J	CHIP C	47PF	J	
C503			CC73HCH1H101J	CHIP C	100PF	J	
C504			CC73HCH1H100D	CHIP C	10PF	D	
C505			CC73HCH1H101J	CHIP C	100PF	J	
C506			CK73HB1C103K	CHIP C	0.010UF	K	
C507,508			CC73HCH1H101J	CHIP C	100PF	J	
C509			CC73HCH1H100D	CHIP C	10PF	D	
C512			CK73HB1C103K	CHIP C	0.010UF	K	

PARTS LIST

TX-RX UNIT (X57-7010-XX)

Ref. No.	Address	New parts	Parts No.	Description			Destination
C513			CK73HB1H471K	CHIP C	470PF	K	
C514			CC73HCH1H101J	CHIP C	100PF	J	
C515			CK73HB1H471K	CHIP C	470PF	K	
C520			CK73GB1E105K	CHIP C	1.0UF	K	
C522			CC73HCH1H050C	CHIP C	5.0PF	C	
C523			C92-0002-05	CHIP-TAN	0.22UF	35WV	
C524			CC73HCH1H101J	CHIP C	100PF	J	
C525			C92-0514-05	CHIP-TAN	2.2UF	10WV	
C526			C92-0002-05	CHIP-TAN	0.22UF	35WV	
C527			CC73HCH1H050C	CHIP C	5.0PF	C	
C529			CC73HCH1H030C	CHIP C	3.0PF	C	
C530			CC73HCH1H101J	CHIP C	100PF	J	
C533			CC73HCH1H1R5C	CHIP C	1.5PF	C	
C534			CK73HB1H471K	CHIP C	470PF	K	
C536			CC73HCH1H030C	CHIP C	3.0PF	C	
C537			CC73HCH1H050C	CHIP C	5.0PF	C	
C538			CC73HCH1H101J	CHIP C	100PF	J	
C539			CC73HCH1H1R5B	CHIP C	1.5PF	B	
C540			CC73HCH1H020B	CHIP C	2.0PF	B	
C541			CC73HCH1H220J	CHIP C	22PF	J	
C542			CC73HCH1H1R5C	CHIP C	1.5PF	C	
C544			CC73HCH1H1R5C	CHIP C	1.5PF	C	
C545			CC73HCH1H090D	CHIP C	9.0PF	D	
C546			CC73HCH1H1R5C	CHIP C	1.5PF	C	
C548			CC73HCH1H470J	CHIP C	47PF	J	
C549			CC73HCH1H080B	CHIP C	8.0PF	B	
C551			CC73HCH1H0R5B	CHIP C	0.5PF	B	
C552			CC73HCH1H101J	CHIP C	100PF	J	
C553			CC73HCH1H050B	CHIP C	5.0PF	B	
C554-556			CC73HCH1H040B	CHIP C	4.0PF	B	
C558			CC73HCH1H060B	CHIP C	6.0PF	B	
C559			CC73HCH1H090B	CHIP C	9.0PF	B	
C560			CC73HCH1H101J	CHIP C	100PF	J	
C562,563			CK73HB1H471K	CHIP C	470PF	K	
C564,565			CK73HB1A104K	CHIP C	0.10UF	K	
C566,567			CC73HCH1H0R5B	CHIP C	0.5PF	B	
C568			CK73HB1C103K	CHIP C	0.010UF	K	
C569			CK73HB1H471K	CHIP C	470PF	K	
C570			CK73HB1C103K	CHIP C	0.010UF	K	
C571			CK73HB1A104K	CHIP C	0.10UF	K	
C572			C92-0628-05	CHIP-TAN	10UF	10WV	
C573			CK73HB1H471K	CHIP C	470PF	K	
C574			CC73HCH1H101J	CHIP C	100PF	J	
C575			CC73HCH1H020B	CHIP C	2.0PF	B	
C576			CC73HCH1H010B	CHIP C	1.0PF	B	
C577,578			CK73HB1H471K	CHIP C	470PF	K	
C579			CC73HCH1H040B	CHIP C	4.0PF	B	
C580,581			CK73HB1H471K	CHIP C	470PF	K	
C582			CC73HCH1H020B	CHIP C	2.0PF	B	
C583			CK73HB1A104K	CHIP C	0.10UF	K	
C601			CK73HB1H471K	CHIP C	470PF	K	
C604		*	CK73HB1A224K	CHIP C	0.22UF	K	
C606			CK73HB1H471K	CHIP C	470PF	K	
C608			CK73HB1H471K	CHIP C	470PF	K	
C609			CC73HCH1H050C	CHIP C	5.0PF	C	
C611-613			CK73HB1H471K	CHIP C	470PF	K	
C615			CK73HB1H471K	CHIP C	470PF	K	
C617			CC73HCH1H150J	CHIP C	15PF	J	
C619			CC73HCH1H150J	CHIP C	15PF	J	
C622			CK73HB1H471K	CHIP C	470PF	K	

Ref. No.	Address	New parts	Parts No.	Description			Destination
C625			CC73HCH1H070D	CHIP C	7.0PF	D	
C626			CK73HB1H471K	CHIP C	470PF	K	
C627			CC73HCH1H390J	CHIP C	39PF	J	
C629			CC73HCH1H150J	CHIP C	15PF	J	
C631			CC73HCH1H180J	CHIP C	18PF	J	
C632			C92-0514-05	CHIP-TAN	2.2UF	10WV	
C633			CK73HB1H471K	CHIP C	470PF	K	
C635			CK73HB1H471K	CHIP C	470PF	K	
C636			CC73HCH1H220J	CHIP C	22PF	J	
C638,639			CK73HB1H471K	CHIP C	470PF	K	
C641			CC73HCH1H101J	CHIP C	100PF	J	
C643			CK73HB1C103K	CHIP C	0.010UF	K	
C645			CC73GCH1H270J	CHIP C	27PF	J	
C646			CK73HB1H471K	CHIP C	470PF	K	
C648			CK73HB1H471K	CHIP C	470PF	K	
C651			CK73HB1A104K	CHIP C	0.10UF	K	
C652			CC73GCH1H220J	CHIP C	22PF	J	
C658			CK73HB1H471K	CHIP C	470PF	K	
C660			CC73GCH1H220J	CHIP C	22PF	J	
C665			CK73HB1A104K	CHIP C	0.10UF	K	
C669			CC73GCH1H070B	CHIP C	7.0PF	B	
C670			CC73GCH1H820J	CHIP C	82PF	J	
C671			CC73GCH1H030B	CHIP C	3.0PF	B	
C673			CK73HB1H471K	CHIP C	470PF	K	
C675			CC73GCH1H020B	CHIP C	2.0PF	B	
C676			CC73GCH1H101J	CHIP C	100PF	J	
C677			CC73GCH1H050B	CHIP C	5.0PF	B	
C678			CC73GCH1H030B	CHIP C	3.0PF	B	
C679			CC73GCH1H1R5B	CHIP C	1.5PF	B	
C680			CC73GCH1H040B	CHIP C	4.0PF	B	
C681			CC73GCH1H020B	CHIP C	2.0PF	B	
C682			CC73GCH1H050B	CHIP C	5.0PF	B	
C683			CC73GCH1H020B	CHIP C	2.0PF	B	
C684			CC73GCH1H1R5B	CHIP C	1.5PF	B	
C701,702			CK73HB1A104K	CHIP C	0.10UF	K	
C703			CC73HCH1H330J	CHIP C	33PF	J	
C704			CK73HB1C103K	CHIP C	0.010UF	K	
C705			CC73HCH1H220J	CHIP C	22PF	J	
C706			CC73HCH1H820J	CHIP C	82PF	J	
C707			CK73HB1H331K	CHIP C	330PF	K	
C708,709			CK73HB1A104K	CHIP C	0.10UF	K	
C710			CC73HCH1H390J	CHIP C	39PF	J	
C711			CC73HCH1H820J	CHIP C	82PF	J	
C712			CK73HB1H331K	CHIP C	330PF	K	
C713			CK73HB1A104K	CHIP C	0.10UF	K	
C714			CC73HCH1H390J	CHIP C	39PF	J	
C715			CK73HB1H471K	CHIP C	470PF	K	
C716			CK73HB1H182K	CHIP C	1800PF	K	
C717			CK73GB1E105K	CHIP C	1.0UF	K	
C718			C92-0712-05	CHIP-TAN	22UF	6.3WV	
C719			CC73HCH1H820J	CHIP C	82PF	J	
C720			CK73HB1C103K	CHIP C	0.010UF	K	
C721			CK73HB1H471K	CHIP C	470PF	K	
C722			CK73HB1A104K	CHIP C	0.10UF	K	
C723			CK73HB1A333K	CHIP C	0.033UF	K	
C724			CC73HCH1H330J	CHIP C	33PF	J	
C725			CK73HB1A104K	CHIP C	0.10UF	K	
C726			CK73HB1C103K	CHIP C	0.010UF	K	
C727			CK73HB1H471K	CHIP C	470PF	K	
C728			CK73HB1C103K	CHIP C	0.010UF	K	

PARTS LIST

TX-RX UNIT (X57-7010-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination
C730			CC73HCH1H080B	CHIP C 8.0PF B	
C732,733			CK73HB1C103K	CHIP C 0.010UF K	
C734,735			CK73HB1H471K	CHIP C 470PF K	
C736			CK73HB1C103K	CHIP C 0.010UF K	
C737			CC73HCH1H060B	CHIP C 6.0PF B	
C738			CC73HCH1H120J	CHIP C 12PF J	
C739			CC73HCH1H020B	CHIP C 2.0PF B	
C740			CC73HCH1H100D	CHIP C 10PF D	
C741			CK73HB1C103K	CHIP C 0.010UF K	
C743			CC73HCH1H010B	CHIP C 1.0PF B	
C744,745			CK73HB1H471K	CHIP C 470PF K	
C746			CC73HCH1H040B	CHIP C 4.0PF B	
C747,748			CK73HB1H471K	CHIP C 470PF K	
C749			CC73HCH1H3R5B	CHIP C 3.5PF B	
C750			CC73HCH1H330J	CHIP C 33PF J	
C752			CC73HCH1H020B	CHIP C 2.0PF B	
C754			CC73HCH1H020B	CHIP C 2.0PF B	
C755			CC73HCH1H330J	CHIP C 33PF J	
C756			CC73HCH1H050B	CHIP C 5.0PF B	
C757			CC73HCH1H1R5B	CHIP C 1.5PF B	
C758			CK73HB1H471K	CHIP C 470PF K	
C759			CC73HCH1H020B	CHIP C 2.0PF B	
C760			CK73HB1H471K	CHIP C 470PF K	
C761			CC73HCH1H330J	CHIP C 33PF J	
C762			CC73HCH1H050B	CHIP C 5.0PF B	
C763			CK73HB1H471K	CHIP C 470PF K	
C765			CK73HB1H471K	CHIP C 470PF K	
C767			CK73HB1H471K	CHIP C 470PF K	
C769			CK73HB1H471K	CHIP C 470PF K	
C771			CK73HB1A104K	CHIP C 0.10UF K	
C772			CK73HB1H471K	CHIP C 470PF K	
C773			CC73HCH1H030B	CHIP C 3.0PF B	
C774			CC73HCH1H330J	CHIP C 33PF J	
C776			CC73HCH1H030B	CHIP C 3.0PF B	
C777			CK73HB1H471K	CHIP C 470PF K	
C778			CC73HCH1H030B	CHIP C 3.0PF B	
C779			CC73HCH1H330J	CHIP C 33PF J	
C781			CK73HB1H471K	CHIP C 470PF K	
C782			CC73HCH1H330J	CHIP C 33PF J	
C783			CC73HCH1H060B	CHIP C 6.0PF B	
C784			CC73HCH1H100D	CHIP C 10PF D	
C901			CK73HB1H471K	CHIP C 470PF K	
C904			CK73HB1H471K	CHIP C 470PF K	
C906			CK73HB1C103K	CHIP C 0.010UF K	
C917			CK73HB1A104K	CHIP C 0.10UF K	
C921			CK73HB1C223K	CHIP C 0.022UF K	
C923-926			CK73HB1H471K	CHIP C 470PF K	
TC501,502			C05-0384-05	CERAMIC TRIMMER (10PF)	
101	2A	✻	E37-1141-15	FLAT CABLE	
CN1		✻	E41-2440-05	FLAT CABLE CONNECTOR	
CN8			E40-5915-05	FLAT CABLE CONNECTOR	
CN18			E40-6420-05	FLAT CABLE CONNECTOR	
CN60			E40-5932-05	SOCKET FOR PIN ASSY	
CN71			E40-5915-05	FLAT CABLE CONNECTOR	
CN901		✻	E40-6420-05	FLAT CABLE CONNECTOR	
J1			E11-0457-05	PHONE JACK (2.5/3.5)	
F901			F53-0324-05	FUSE	
CD701			L79-1474-05	TUNING COIL	

Ref. No.	Address	New parts	Parts No.	Description	Destination
CF701		✻	L72-1010-05	CERAMIC FILTER	
CF702		✻	L72-1012-05	CERAMIC FILTER	
L1			L92-0140-05	CHIP FERRITE	
L2-5			L92-0138-05	CHIP FERRITE	
L8			L92-0138-05	CHIP FERRITE	
L10			L92-0140-05	CHIP FERRITE	
L11			L92-0149-05	CHIP FERRITE	
L12,13			L92-0419-15	CHIP FERRITE	
L14,15			L92-0138-05	CHIP FERRITE	
L501			L41-4795-39	SMALL FIXED INDUCTOR (4.7UH)	
L502		✻	L40-3363-57	SMALL FIXED INDUCTOR (3.3NH)	
L503			L92-0138-05	CHIP FERRITE	
L505,506			L40-2285-92	SMALL FIXED INDUCTOR (220NH)	
L507		✻	L40-3363-57	SMALL FIXED INDUCTOR (3.3NH)	
L508,509			L40-8275-92	SMALL FIXED INDUCTOR (82NH)	
L511		✻	L40-1275-57	SMALL FIXED INDUCTOR (12.0NH)	
L512			L40-1875-54	SMALL FIXED INDUCTOR (18NH)	
L513			L41-2278-14	SMALL FIXED INDUCTOR (22NH)	
L514		✻	L41-1585-45	SMALL FIXED INDUCTOR (150NH)	
L515		✻	L41-1885-45	SMALL FIXED INDUCTOR (180NH)	
L517		✻	L41-2785-45	SMALL FIXED INDUCTOR (270NH)	
L518			L40-1585-92	SMALL FIXED INDUCTOR (150NH)	
L519			L92-0138-05	CHIP FERRITE	
L520		✻	L40-6875-57	SMALL FIXED INDUCTOR (68.0NH)	
L521			L40-2775-57	SMALL FIXED INDUCTOR (27.0NH)	
L522,523			L40-4775-57	SMALL FIXED INDUCTOR (47.0NH)	
L601			L40-2775-57	SMALL FIXED INDUCTOR (27.0NH)	
L602			L40-1875-57	SMALL FIXED INDUCTOR (18.0NH)	
L603			L92-0138-05	CHIP FERRITE	
L604			L40-1875-57	SMALL FIXED INDUCTOR (18.0NH)	
L605			L40-6865-57	SMALL FIXED INDUCTOR (6.8NH)	
L606		✻	L41-1575-45	SMALL FIXED INDUCTOR (15NH)	
L607			L92-0149-05	CHIP FERRITE	
L610			L40-2275-92	SMALL FIXED INDUCTOR (22NH)	
L611			L34-4576-05	AIR-CORE COIL	
L612			L92-0149-05	CHIP FERRITE	
L613			L41-5668-14	SMALL FIXED INDUCTOR (5.6NH)	
L614		✻	L41-2285-45	SMALL FIXED INDUCTOR (220NH)	
L615-618			L34-4564-05	AIR-CORE COIL	
L619			L41-1092-44	SMALL FIXED INDUCTOR (1UH)	
L701			L40-1885-92	SMALL FIXED INDUCTOR (180NH)	
L702			L40-1085-57	SMALL FIXED INDUCTOR (100NH)	
L703			L40-1591-86	SMALL FIXED INDUCTOR (1.5UH)	
L704			L92-0138-05	CHIP FERRITE	
L705			L41-5685-39	SMALL FIXED INDUCTOR (0.56UH)	
L706			L40-2785-92	SMALL FIXED INDUCTOR (270NH)	
L707			L40-1875-57	SMALL FIXED INDUCTOR (18.0NH)	
L709			L40-2775-57	SMALL FIXED INDUCTOR (27.0NH)	
L711-713			L41-8268-14	SMALL FIXED INDUCTOR (8.2NH)	
L714			L92-0138-05	CHIP FERRITE	
L715		✻	L41-2785-45	SMALL FIXED INDUCTOR (270NH)	
L717,718			L41-8268-14	SMALL FIXED INDUCTOR (8.2NH)	
L719		✻	L41-4775-45	SMALL FIXED INDUCTOR (47NH)	
L720			L40-6865-57	SMALL FIXED INDUCTOR (6.8NH)	
L901			L92-0149-05	CHIP FERRITE	
X1			L77-1950-05	CRYSTAL RESONATOR (11.0592MHZ)	
X2			L77-1976-05	CRYSTAL RESONATOR (3.6864MHZ)	
X501		✻	L77-1971-05	TCXO (16.8MHZ)	
XF701			L71-0617-25	MCF (49.95MHZ)	

PARTS LIST

TX-RX UNIT (X57-7010-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination
CP1			RK74HB1J473J	CHIP-COM 47K J 1/16W	
CP3,4			RK75HA1J102J	CHIP-COM 1.0K J 1/16W	
CP5			RK74HB1J102J	CHIP-COM 1.0K J 1/16W	
CP7,8			RK75HA1J102J	CHIP-COM 1.0K J 1/16W	
CP10			RK74HB1J102J	CHIP-COM 1.0K J 1/16W	
CP11			RK75HA1J102J	CHIP-COM 1.0K J 1/16W	
CP12,13			RK74HB1J102J	CHIP-COM 1.0K J 1/16W	
CP16			RK74HB1J102J	CHIP-COM 1.0K J 1/16W	
CP18			RK74HB1J102J	CHIP-COM 1.0K J 1/16W	
CP19			RK75HA1J473J	CHIP-COM 47K J 1/16W	
CP22-24			RK74HB1J102J	CHIP-COM 1.0K J 1/16W	
CP28			RK74HB1J102J	CHIP-COM 1.0K J 1/16W	
CP30			RK74HB1J102J	CHIP-COM 1.0K J 1/16W	
CP32			RK74HB1J102J	CHIP-COM 1.0K J 1/16W	
CP34			RK74HB1J102J	CHIP-COM 1.0K J 1/16W	
CP36			RK74HB1J102J	CHIP-COM 1.0K J 1/16W	
CP38			RK74HB1J102J	CHIP-COM 1.0K J 1/16W	
CP40			RK74HB1J102J	CHIP-COM 1.0K J 1/16W	
CP42,43			RK75HA1J102J	CHIP-COM 1.0K J 1/16W	
CP44			RK75HA1J474J	CHIP-COM 470K J 1/16W	
CP45-47			RK75HA1J102J	CHIP-COM 1.0K J 1/16W	
CP48,49			RK74HB1J102J	CHIP-COM 1.0K J 1/16W	
CP50			RK75HA1J102J	CHIP-COM 1.0K J 1/16W	
CP54			RK75HA1J473J	CHIP-COM 47K J 1/16W	
R1			R92-1252-05	CHIP R 0 OHM J 1/16W	
R2			RK73HB1J153J	CHIP R 15K J 1/16W	
R7		✻	RK73HB1J102J	CHIP R 1.0K J 1/16W	
R8			RK73HB1J272J	CHIP R 2.7K J 1/16W	
R9			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R11		✻	RK73HB1J473J	CHIP R 47K J 1/16W	
R12			RK73HB1J334J	CHIP R 330K J 1/16W	
R13			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R14		✻	RK73HB1J102J	CHIP R 1.0K J 1/16W	
R15			RK73HB1J272J	CHIP R 2.7K J 1/16W	
R16			RK73HB1J331J	CHIP R 330 J 1/16W	
R17			RK73HB1J821J	CHIP R 820 J 1/16W	
R18			RK73GB1J100J	CHIP R 10 J 1/16W	
R20			RK73HB1J103J	CHIP R 10K J 1/16W	
R21			RK73HB1J821J	CHIP R 820 J 1/16W	
R22,23			R92-1368-05	CHIP R 0 OHM	
R24			RK73HB1J224J	CHIP R 220K J 1/16W	
R25			RK73HB1J153J	CHIP R 15K J 1/16W	
R26			R92-1368-05	CHIP R 0 OHM	
R27,28			RK73HH1J474D	CHIP R 470K D 1/16W	
R31			RK73HB1J103J	CHIP R 10K J 1/16W	
R36			RK73GB1J433J	CHIP R 43K J 1/16W	
R37			RK73HB1J103J	CHIP R 10K J 1/16W	
R39,40		✻	RK73HB1J473J	CHIP R 47K J 1/16W	
R42-44			RK73HB1J103J	CHIP R 10K J 1/16W	
R45,46		✻	RK73HB1J102J	CHIP R 1.0K J 1/16W	
R48-52		✻	RK73HB1J473J	CHIP R 47K J 1/16W	
R53		✻	RK73HB1J474J	CHIP R 470K J 1/16W	
R54		✻	RK73HB1J102J	CHIP R 1.0K J 1/16W	
R55,56		✻	RK73HB1J474J	CHIP R 470K J 1/16W	
R57			RK73HB1J103J	CHIP R 10K J 1/16W	
R58,59		✻	RK73HB1J473J	CHIP R 47K J 1/16W	
R61			RK73HB1J331J	CHIP R 330 J 1/16W	
R62			RK73HB1J103J	CHIP R 10K J 1/16W	
R63			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R64		✻	RK73HB1J102J	CHIP R 1.0K J 1/16W	

Ref. No.	Address	New parts	Parts No.	Description	Destination
R65,66		✻	RK73HB1J473J	CHIP R 47K J 1/16W	
R67			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R68			RK73GB1J181J	CHIP R 180 J 1/16W	
R69		✻	RK73HB1J102J	CHIP R 1.0K J 1/16W	
R71		✻	RK73HB1J102J	CHIP R 1.0K J 1/16W	
R72			RK73GB1J181J	CHIP R 180 J 1/16W	
R73,74		✻	RK73HB1J474J	CHIP R 470K J 1/16W	
R75			RK73GB1J391J	CHIP R 390 J 1/16W	K4
R76-80		✻	RK73HB1J102J	CHIP R 1.0K J 1/16W	
R82			RK73GB1J391J	CHIP R 390 J 1/16W	K4
R83			R92-1252-05	CHIP R 0 OHM J 1/16W	
R84			RK73HB1J184J	CHIP R 180K J 1/16W	
R89		✻	RK73HB1J102J	CHIP R 1.0K J 1/16W	
R90			RK73HB1J394J	CHIP R 390K J 1/16W	
R91			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R92		✻	RK73HB1J473J	CHIP R 47K J 1/16W	
R93			RK73HB1J393J	CHIP R 39K J 1/16W	
R94			RK73HB1J684J	CHIP R 680K J 1/16W	
R95,96		✻	RK73HB1J102J	CHIP R 1.0K J 1/16W	
R97		✻	RK73HB1J474J	CHIP R 470K J 1/16W	
R98,99		✻	RK73HB1J473J	CHIP R 47K J 1/16W	
R100			RK73HB1J223J	CHIP R 22K J 1/16W	
R101			RK73HB1J103J	CHIP R 10K J 1/16W	
R102		✻	RK73HB1J473J	CHIP R 47K J 1/16W	
R103			RK73HB1J105J	CHIP R 1.0M J 1/16W	
R104			RK73HB1J103J	CHIP R 10K J 1/16W	
R105			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R106		✻	RK73HB1J473J	CHIP R 47K J 1/16W	
R107			RK73HB1J564J	CHIP R 560K J 1/16W	
R108			RK73HB1J334J	CHIP R 330K J 1/16W	
R109			RK73HB1J684J	CHIP R 680K J 1/16W	
R111			RK73HB1J824J	CHIP R 820K J 1/16W	
R112			RK73HB1J334J	CHIP R 330K J 1/16W	
R113			R92-1368-05	CHIP R 0 OHM	
R114			RK73HB1J184J	CHIP R 180K J 1/16W	
R115			RK73GB1J103J	CHIP R 10K J 1/16W	
R116			RK73HB1J393J	CHIP R 39K J 1/16W	
R117			RK73HB1J683J	CHIP R 68K J 1/16W	
R119			RK73HB1J101J	CHIP R 100 J 1/16W	
R121			RK73HB1J184J	CHIP R 180K J 1/16W	
R122			RK73HB1J154J	CHIP R 150K J 1/16W	
R125			RK73GB1J152J	CHIP R 1.5K J 1/16W	
R129			RK73HB1J105J	CHIP R 1.0M J 1/16W	
R130		✻	RK73HB1J474J	CHIP R 470K J 1/16W	
R131,132			R92-1368-05	CHIP R 0 OHM	
R134			RK73HB1J104J	CHIP R 100K J 1/16W	
R135			R92-1368-05	CHIP R 0 OHM	
R137			RK73HB1J223J	CHIP R 22K J 1/16W	
R139			RK73HB1J103J	CHIP R 10K J 1/16W	
R140		✻	RK73HB1J102J	CHIP R 1.0K J 1/16W	
R141			RK73HB1J105J	CHIP R 1.0M J 1/16W	
R142			RK73HB1J223J	CHIP R 22K J 1/16W	
R143		✻	RK73HB1J473J	CHIP R 47K J 1/16W	
R144			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R145			RK73HB1J154J	CHIP R 150K J 1/16W	
R146			RK73HB1J105J	CHIP R 1.0M J 1/16W	
R147			RK73HB1J103J	CHIP R 10K J 1/16W	
R149			RK73HB1J105J	CHIP R 1.0M J 1/16W	
R150			RK73HB1J153J	CHIP R 15K J 1/16W	
R151			RK73HB1J183J	CHIP R 18K J 1/16W	

PARTS LIST

TX-RX UNIT (X57-7010-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination
R152			RK73HB1J105J	CHIP R 1.0M J 1/16W	
R153			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R154			RK73HB1J683J	CHIP R 68K J 1/16W	
R155			RK73HB1J223J	CHIP R 22K J 1/16W	
R156,157		✻	RK73HB1J304J	CHIP R 300K J 1/16W	
R158			RK73HB1J334J	CHIP R 330K J 1/16W	
R159		✻	RK73HB1J474J	CHIP R 470K J 1/16W	
R160			RK73HB1J224J	CHIP R 220K J 1/16W	
R161,162			RK73HB1J124J	CHIP R 120K J 1/16W	
R163			RK73HB1J393J	CHIP R 39K J 1/16W	
R164			RK73HB1J184J	CHIP R 180K J 1/16W	
R165			RK73HB1J154J	CHIP R 150K J 1/16W	
R166			RK73HB1J103J	CHIP R 10K J 1/16W	
R167			R92-1252-05	CHIP R 0 OHM J 1/16W	
R168		✻	RK73HB1J474J	CHIP R 470K J 1/16W	
R169			RK73HB1J223J	CHIP R 22K J 1/16W	
R170			R92-1252-05	CHIP R 0 OHM J 1/16W	
R171			R92-1368-05	CHIP R 0 OHM	
R172			RK73HB1J684J	CHIP R 680K J 1/16W	
R173			RK73HB1J184J	CHIP R 180K J 1/16W	
R174			RK73HB1J123J	CHIP R 12K J 1/16W	
R175			RK73HB1J103J	CHIP R 10K J 1/16W	
R176			RK73HB1J683J	CHIP R 68K J 1/16W	
R177			R92-1368-05	CHIP R 0 OHM	
R178		✻	RK73HB1J102J	CHIP R 1.0K J 1/16W	
R180			RK73HB1J103J	CHIP R 10K J 1/16W	
R181			R92-1368-05	CHIP R 0 OHM	
R183			RK73HB1J103J	CHIP R 10K J 1/16W	
R184			R92-1368-05	CHIP R 0 OHM	
R187			R92-1368-05	CHIP R 0 OHM	
R191			R92-1368-05	CHIP R 0 OHM	
R192,193			RK73HB1J104J	CHIP R 100K J 1/16W	
R194,195		✻	RK73HB1J102J	CHIP R 1.0K J 1/16W	
R196			RK73HB1J151J	CHIP R 150 J 1/16W	
R198			R92-1252-05	CHIP R 0 OHM J 1/16W	
R199			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R200		✻	RK73HB1J473J	CHIP R 47K J 1/16W	
R202		✻	RK73HB1J102J	CHIP R 1.0K J 1/16W	
R203			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R204			RK73HB1J104J	CHIP R 100K J 1/16W	
R206			R92-1368-05	CHIP R 0 OHM	
R207			RK73HB1J154J	CHIP R 150K J 1/16W	
R210			RK73HB1J471J	CHIP R 470 J 1/16W	
R211		✻	RK73HB1J474J	CHIP R 470K J 1/16W	
R212			RK73GB1J101J	CHIP R 100 J 1/16W	
R213			RK73HB1J101J	CHIP R 100 J 1/16W	
R214			RK73HB1J182J	CHIP R 1.8K J 1/16W	
R215			RK73HB1J334J	CHIP R 330K J 1/16W	
R216			RK73HB1J274J	CHIP R 270K J 1/16W	
R217,218			R92-1252-05	CHIP R 0 OHM J 1/16W	
R220			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R221		✻	RK73HB1J473J	CHIP R 47K J 1/16W	
R222,223		✻	RK73HB1J102J	CHIP R 1.0K J 1/16W	
R224			RK73HB1J104J	CHIP R 100K J 1/16W	
R225			RK73HB1J154J	CHIP R 150K J 1/16W	
R226			RK73HB1J184J	CHIP R 180K J 1/16W	
R229		✻	RK73HB1J473J	CHIP R 47K J 1/16W	
R230			RK73HB1J123J	CHIP R 12K J 1/16W	
R232			RK73HB1J823J	CHIP R 82K J 1/16W	
R236			RK73HB1J124J	CHIP R 120K J 1/16W	

Ref. No.	Address	New parts	Parts No.	Description	Destination
R239			RK73HB1J104J	CHIP R 100K J 1/16W	
R240		✻	RK73HB1J474J	CHIP R 470K J 1/16W	
R241		✻	RK73HB1J473J	CHIP R 47K J 1/16W	
R242			RK73HB1J104J	CHIP R 100K J 1/16W	
R243		✻	RK73HB1J474J	CHIP R 470K J 1/16W	
R244		✻	RK73HB1J473J	CHIP R 47K J 1/16W	
R245			RK73HB1J103J	CHIP R 10K J 1/16W	
R246			RK73HB1J223J	CHIP R 22K J 1/16W	
R247			RK73HB1J184J	CHIP R 180K J 1/16W	
R248			R92-1252-05	CHIP R 0 OHM J 1/16W	
R250			R92-1252-05	CHIP R 0 OHM J 1/16W	
R251		✻	RK73HB1J474J	CHIP R 470K J 1/16W	
R254,255		✻	RK73HB1J474J	CHIP R 470K J 1/16W	
R256-258			R92-1252-05	CHIP R 0 OHM J 1/16W	
R259			RK73HB1J103J	CHIP R 10K J 1/16W	
R261			RK73HB1J103J	CHIP R 10K J 1/16W	
R262		✻	RK73HB1J473J	CHIP R 47K J 1/16W	
R501			R92-1368-05	CHIP R 0 OHM	
R502		✻	RK73HB1J102J	CHIP R 1.0K J 1/16W	
R503			RK73HB1J470J	CHIP R 47 J 1/16W	
R504			RK73HB1J103J	CHIP R 10K J 1/16W	
R505		✻	RK73HB1J102J	CHIP R 1.0K J 1/16W	
R506			RK73HB1J154J	CHIP R 150K J 1/16W	
R507			RK73HB1J101J	CHIP R 100 J 1/16W	
R508			RK73HB1J680J	CHIP R 68 J 1/16W	
R509			RK73HB1J272J	CHIP R 2.7K J 1/16W	
R510-512			R92-1368-05	CHIP R 0 OHM	
R513			RK73HB1J470J	CHIP R 47 J 1/16W	
R514		✻	RK73HB1J102J	CHIP R 1.0K J 1/16W	
R515			RK73HB1J561J	CHIP R 560 J 1/16W	
R516			R92-1368-05	CHIP R 0 OHM	
R517			RK73HB1J103J	CHIP R 10K J 1/16W	
R518			RK73HB1J101J	CHIP R 100 J 1/16W	
R519,520			RK73HB1J103J	CHIP R 10K J 1/16W	
R521			RK73HB1J101J	CHIP R 100 J 1/16W	
R522			RK73HB1J220J	CHIP R 22 J 1/16W	
R523		✻	RK73HB1J473J	CHIP R 47K J 1/16W	
R525			RK73HB1J101J	CHIP R 100 J 1/16W	
R527			RK73HB1J224J	CHIP R 220K J 1/16W	
R529			RK73HB1J151J	CHIP R 150 J 1/16W	
R530			RK73HB1J181J	CHIP R 180 J 1/16W	
R531,532			RK73HB1J220J	CHIP R 22 J 1/16W	
R533			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R534			RK73HB1J154J	CHIP R 150K J 1/16W	
R535			RK73HB1J101J	CHIP R 100 J 1/16W	
R541			RK73HB1J154J	CHIP R 150K J 1/16W	
R542			RK73HB1J680J	CHIP R 68 J 1/16W	
R544			RK73HB1J470J	CHIP R 47 J 1/16W	
R545			RK73HH1J333D	CHIP R 33K D 1/16W	
R546			RK73HH1J104D	CHIP R 100K D 1/16W	
R547			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R548			RK73HB1J470J	CHIP R 47 J 1/16W	
R549			RK73HB1J681J	CHIP R 680 J 1/16W	
R550			R92-1252-05	CHIP R 0 OHM J 1/16W	
R601			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R603		✻	RK73HB1J102J	CHIP R 1.0K J 1/16W	
R604			RK73HB1J333J	CHIP R 33K J 1/16W	
R605			RK73HB1J470J	CHIP R 47 J 1/16W	
R607			RK73HB1J220J	CHIP R 22 J 1/16W	
R608			RK73HB1J331J	CHIP R 330 J 1/16W	

PARTS LIST

TX-RX UNIT (X57-7010-XX)

Ref. No.	Address	New parts	Parts No.	Description			Destination
R609			RK73HB1J330J	CHIP R 33	J	1/16W	
R610			RK73HB1J331J	CHIP R 330	J	1/16W	
R611			RK73HB1J823J	CHIP R 82K	J	1/16W	
R612			RK73HB1J221J	CHIP R 220	J	1/16W	
R613			RK73HB1J393J	CHIP R 39K	J	1/16W	
R614			RK73HB1J471J	CHIP R 470	J	1/16W	
R618			R92-1368-05	CHIP R 0 OHM			
R619			RK73HB1J103J	CHIP R 10K	J	1/16W	
R620			R92-1368-05	CHIP R 0 OHM			
R621			RK73EB2ER39K	CHIP R 0.39	K	1/4W	
R622			RK73HB1J220J	CHIP R 22	J	1/16W	
R623			RK73EB2ER39K	CHIP R 0.39	K	1/4W	
R624			RK73HB1J104J	CHIP R 100K	J	1/16W	
R625			RK73HB1J101J	CHIP R 100	J	1/16W	
R626			R92-1252-05	CHIP R 0 OHM	J	1/16W	
R627			RK73HB1J223J	CHIP R 22K	J	1/16W	
R628			RK73HB1J183J	CHIP R 18K	J	1/16W	
R629			RK73EB2ER39K	CHIP R 0.39	K	1/4W	
R630,631			RK73HH1J154D	CHIP R 150K	D	1/16W	
R632,633			RK73HH1J334D	CHIP R 330K	D	1/16W	
R634			RK73HB1J103J	CHIP R 10K	J	1/16W	
R635		✻	RK73HB1J473J	CHIP R 47K	J	1/16W	
R636			R92-1368-05	CHIP R 0 OHM			
R637			RK73HB1J223J	CHIP R 22K	J	1/16W	
R638		✻	RK73HB1J474J	CHIP R 470K	J	1/16W	
R639			RK73HB1J184J	CHIP R 180K	J	1/16W	
R640		✻	RK73HB1J474J	CHIP R 470K	J	1/16W	
R641			R92-1252-05	CHIP R 0 OHM	J	1/16W	
R642			RK73HB1J220J	CHIP R 22	J	1/16W	
R643			RK73HB1J683J	CHIP R 68K	J	1/16W	
R645,646			RK73GB1J271J	CHIP R 270	J	1/16W	
R647			R92-1252-05	CHIP R 0 OHM	J	1/16W	
R648			R92-1368-05	CHIP R 0 OHM			
R701			RK73HB1J103J	CHIP R 10K	J	1/16W	
R702,703			RK73HB1J472J	CHIP R 4.7K	J	1/16W	
R704			RK73HB1J224J	CHIP R 220K	J	1/16W	
R705,706			RK73HB1J472J	CHIP R 4.7K	J	1/16W	
R707			RK73HB1J101J	CHIP R 100	J	1/16W	
R708			RK73HB1J103J	CHIP R 10K	J	1/16W	
R710		✻	RK73HB1J102J	CHIP R 1.0K	J	1/16W	
R711		✻	RK73HB1J474J	CHIP R 470K	J	1/16W	
R713			RK73HB1J334J	CHIP R 330K	J	1/16W	
R715,716			RK73HB1J332J	CHIP R 3.3K	J	1/16W	
R717			RK73HB1J272J	CHIP R 2.7K	J	1/16W	
R718			RK73HB1J100J	CHIP R 10	J	1/16W	
R719			RK73HB1J332J	CHIP R 3.3K	J	1/16W	
R721			RK73HB1J224J	CHIP R 220K	J	1/16W	
R722			RK73HB1J101J	CHIP R 100	J	1/16W	
R726		✻	RK73HB1J474J	CHIP R 470K	J	1/16W	
R727			RK73HB1J681J	CHIP R 680	J	1/16W	
R728			RK73HB1J101J	CHIP R 100	J	1/16W	
R729			RK73HB1J470J	CHIP R 47	J	1/16W	
R730			RK73HB1J472J	CHIP R 4.7K	J	1/16W	
R731			RK73HB1J222J	CHIP R 2.2K	J	1/16W	
R732			RK73HB1J151J	CHIP R 150	J	1/16W	
R733			R92-1368-05	CHIP R 0 OHM			
R734			RK73HB1J104J	CHIP R 100K	J	1/16W	
R735			RK73HB1J563J	CHIP R 56K	J	1/16W	
R736			RK73HB1J104J	CHIP R 100K	J	1/16W	
R737			RK73HB1J563J	CHIP R 56K	J	1/16W	

Ref. No.	Address	New parts	Parts No.	Description			Destination
R738			R92-1368-05	CHIP R 0 OHM			
R739-741			RK73HB1J105J	CHIP R 1.0M	J	1/16W	
R743			RK73HB1J101J	CHIP R 100	J	1/16W	
R744			RK73HB1J221J	CHIP R 220	J	1/16W	
R747			RK73HB1J104J	CHIP R 100K	J	1/16W	
R750			RK73HB1J104J	CHIP R 100K	J	1/16W	
R751			RK73HB1J683J	CHIP R 68K	J	1/16W	
R753			R92-1368-05	CHIP R 0 OHM			
R754,755			RK73HB1J105J	CHIP R 1.0M	J	1/16W	
R756			R92-0670-05	CHIP R 0 OHM			
R757			RK73HB1J105J	CHIP R 1.0M	J	1/16W	
R758			R92-1368-05	CHIP R 0 OHM			
R759			R92-1252-05	CHIP R 0 OHM	J	1/16W	
R760			R92-1368-05	CHIP R 0 OHM			
R903		✻	RK73HB1J102J	CHIP R 1.0K	J	1/16W	
R913-916		✻	RK73HB1J102J	CHIP R 1.0K	J	1/16W	
R923			R92-1252-05	CHIP R 0 OHM	J	1/16W	
S1			S70-0424-05	TACT SWITCH			
S2			S70-0457-05	TACT SWITCH			
S3,4			S70-0424-05	TACT SWITCH			
D1			RB521S-30	DIODE			
D4			MA2S111	DIODE			
D14			MA2S111	DIODE			K,K4
D14-17			MA2S111	DIODE			3173
D16,17			MA2S111	DIODE			K,K4
D24-27			MA2S111	DIODE			
D28-31			RB706F-40	DIODE			
D32			DA221	DIODE			
D501			MA2S077	DIODE			
D502,503			HSC277	DIODE			
D505			1SV325F	VARIABLE CAPACITANCE DIODE			
D507			1SV325F	VARIABLE CAPACITANCE DIODE			
D509			1SV325F	VARIABLE CAPACITANCE DIODE			
D511			1SV325F	VARIABLE CAPACITANCE DIODE			
D513		✻	1SV278F	VARIABLE CAPACITANCE DIODE			
D514-516			HSC277	DIODE			
D517			MA2S077	DIODE			
D601			UDZS4.7B	ZENER DIODE			
D604-606			HVC131	DIODE			
D608			HVC131	DIODE			
D609		✻	02DZ15F-(X,Y)	ZENER DIODE			
D701,702			DAN235E	DIODE			
D703-707			HVC355B	VARIABLE CAPACITANCE DIODE			
D708			HVC350B	VARIABLE CAPACITANCE DIODE			
D901			1SR154-400	DIODE			
IC1		✻	XC61CC5002NR	MOS-IC			
IC2			XC6204B502PR	MOS-IC			
IC3		✻	XC61CN3402NR	MOS-IC			
IC4,5			BU4094BCFV	MOS-IC			
IC6			LC75834W	MOS-IC			
IC7		✻	30625MGP234HU	MICROPROCESSOR IC			
IC8			AT29C040A-90TU	ROM IC			
IC9			CAT24WC64JI	ROM IC			
IC10-12		✻	TK62012F	MOS-IC			
IC13			AQUA-L	MOS-IC			
IC14			TC7W53FK(F)	MOS-IC			
IC15		✻	TK62012F	MOS-IC			
IC16			M62364FP-F	MOS-IC			
IC17		✻	TK62012F	MOS-IC			

PARTS LIST

TX-RX UNIT (X57-7010-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination
IC18			TA7368F	MOS-IC	
IC19			TC75S51FE(F)	MOS-IC	
IC501			ADF4111BCP7	MOS-IC	
IC601			TA75W01FUF	MOS-IC	
IC701			TA31136FNG	MOS-IC	
Q1			UMG3N	TRANSISTOR	
Q4			FP210	TRANSISTOR	
Q5			UPA672T	FET	
Q6			UMG3N	TRANSISTOR	
Q7			UPA672T	FET	
Q8			DTA114EE	DIGITAL TRANSISTOR	
Q9		✻	SSM6J08FU(F)	FET	
Q12			2SC4617(S)	TRANSISTOR	
Q13			2SB1132(Q,R)	TRANSISTOR	
Q14,15		✻	SSM3K15TE(F)	FET	
Q16			2SA1774(S)	TRANSISTOR	
Q17			2SC4649(N,P)	TRANSISTOR	
Q19		✻	SSM3K15TE(F)	FET	
Q21			RN4910(F)	TRANSISTOR	
Q22		✻	SSM3K15TE(F)	FET	
Q23			DTC144EE	DIGITAL TRANSISTOR	
Q24		✻	SSM6J08FU(F)	FET	
Q25			2SK1830F	FET	
Q26			2SJ347F	FET	
Q27			DTC144EE	DIGITAL TRANSISTOR	
Q28		✻	SSM3K01T(F)	FET	
Q29		✻	SSM3K15TE(F)	FET	
Q30			2SJ243	FET	
Q31,32			2SC4649(N,P)	TRANSISTOR	
Q33			2SJ347F	FET	
Q34		✻	SSM3K15TE(F)	FET	
Q35		✻	SSM3K01T(F)	FET	
Q501			2SC5488	TRANSISTOR	
Q502,503			2SK508NV(K52)	FET	
Q504		✻	SSM6P05FU(F)	FET	
Q505			2SC4617(S)	TRANSISTOR	
Q506,507			2SC5488	TRANSISTOR	
Q601			2SC5488	TRANSISTOR	
Q602			2SK3077F	FET	
Q603			RD01MUS1	FET	
Q604			RD07MVS1	FET	
Q605			DTC114EE	DIGITAL TRANSISTOR	
Q606			2SK879(GR)	FET	
Q607			DTC114EE	DIGITAL TRANSISTOR	
Q608			DTA144EE	DIGITAL TRANSISTOR	
Q609		✻	SSM3K15TE(F)	FET	
Q701			2SC4649(N,P)	TRANSISTOR	
Q702			DTA144EE	DIGITAL TRANSISTOR	
Q703			2SC4649(N,P)	TRANSISTOR	
Q704,705			3SK318	FET	
TH501			B57331V2104J	THERMISTOR	
TH701,702			B57331V2104J	THERMISTOR	

Ref. No.	Address	New parts	Parts No.	Description	Destination