
2.2 EXTERIOR(FX-MG8057ZT/UC, MG8057ZT-91/UC, MG8007ZT/UC, MG8007ZT-91/UC)

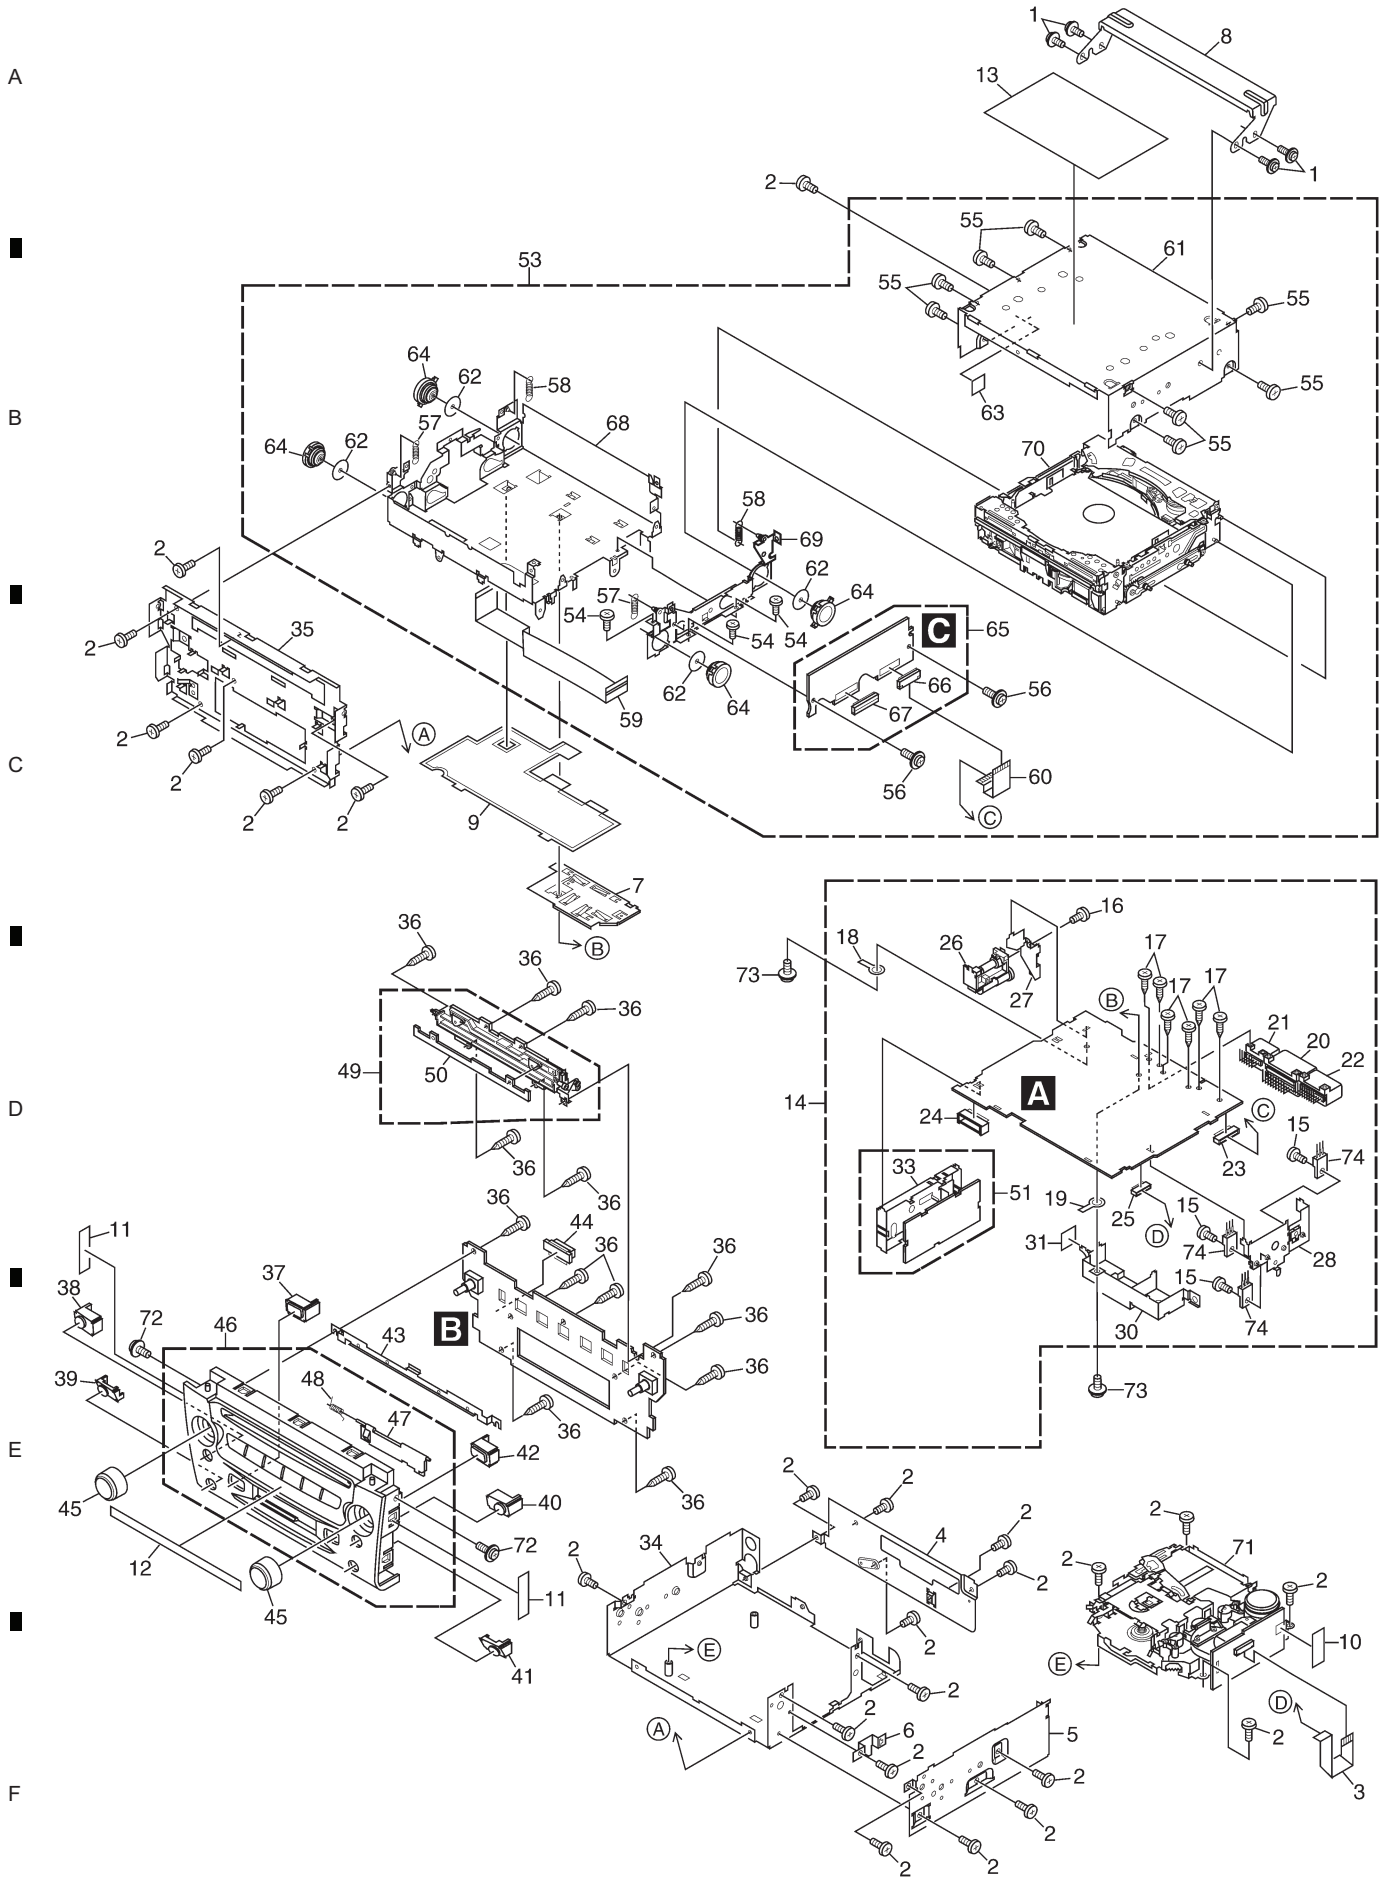

(1) EXTERIOR(FX-MG8057ZT/UC, MG8007ZT/UC, MG8057ZT-91/UC, MG8007ZT-91/UC) SECTION PARTS LIST


Mark	No.	Description	Part No.
	1	Screw	AMZ26P040FTC
	2	Screw	BMZ26P040FTC
	3	Connector	CDE7857
	4	Chassis	CNA2547
	5	Chassis	CNA2610
	6	Cover	CND1987
	7	Shield	CND2396
	8	Bracket	CND2684
	9	Insulator	CNM9315
	10	Seal	CNM9364
	11	Seal	CNM9612
	12	Label	CRW1425
	13	Label	CRW1429
	14	Main Unit	CWM8455
	15	Screw(M2.6x6)	CBA1732
	16	Screw	BMZ30P060FTC
	17	Screw(M3x6)	CBA1393
	18	Terminal(CN502)	CKF1064
	19	Terminal(CN902)	CKF1064
	20	Connector(CN901)	CKM1322
	21	Connector(CN402)	CKM1350
	22	Connector(CN401)	CKM1351
	23	Connector(CN721)	CKS3886
	24	Connector(CN741)	CKS4266
	25	Connector(CN761)	CKS4761
	26	Connector(CN501)	CKX1064
	27	Holder	CNC9701
	28	Holder	CND1154
	29	•••••	
	30	Shield	CND1985
	31	Insulator	CNM9203
	32	•••••	
	33	Holder	CNC8855
	34	Chassis Unit	CXB9312
	35	Frame Unit	CXB9943
	36	Screw	BPZ20P080FTC
	37	Button(TAPE EJECT)	See Contrast table(2)
	38	Button(LEFT UP)	See Contrast table(2)
	39	Button(LEFT DOWN)	See Contrast table(2)
	40	Button(RIGHT UP)	See Contrast table(2)
	41	Button(RIGHT DOWN)	See Contrast table(2)
	42	Button(SCAN)	See Contrast table(2)
	43	Shield	CND1353
	44	Connector(CN991)	CKS4771
	45	Knob Unit	See Contrast table(2)
	46	Grille Unit	See Contrast table(2)
	47	Door	See Contrast table(2)
	48	Spring	CBH1371
	49	Door Unit	CXC4755
	50	Door	CAT2642
	51	FM/AM Tuner Unit	CWE1630
	52	•••••	
	53	CD Mechanism Module(G2T)	CXK7111
	54	Screw	BMZ20P025FTC
	55	Screw	BMZ26P040FTC
	56	Screw(M2x2.5)	CBA1624
	57	Spring	CBH2481
	58	Spring	CBH2482
	59	Connector	CDE7589
	60	Connector	CDE7692
	61	Case	CNB2783
	62	Sheet	CNM5981
	63	Insulator	CNM8979
	64	Damper	CNV6608
	65	Control Unit(G2T)	CWX2920
	66	Connector(CN601)	CKS1956
	67	Connector(CN101)	CKS4512
	68	Chassis Unit	CXB9311
	69	Bracket Unit	CXC1656
	70	Service Mechanism Assy	CXX1900
	71	Cassette Mechanism Module	EXK4297
	72	Screw	IMS26P040FTC
	73	Screw	PMH26P060FTC
	74	Transistor(Q952,971,991)	2SB1185

(2) CONTRAST TABLE

FX-MG8057ZT/UC, FX-MG8007ZT/UC, FX-MG8057ZT-91/UC and FX-MG8007ZT-91/UC are constructed the same except for the following:

Mark	NO	Description	FX-MG8057ZT/UC FX-MG8057ZT-91/UC	FX-MG8007ZT/UC FX-MG8007ZT-91/UC
	37	Button(TAPE EJECT)	CAC8896	CAC9069
	38	Button(LEFT UP)	CAC8898	CAC9071
	39	Button(LEFT DOWN)	CAC8899	CAC9072
	40	Button(RIGHT UP)	CAC8900	CAC9073
	41	Button(RIGHT DOWN)	CAC8901	CAC9074
	42	Button(SCAN)	CAC8897	CAC9070
	45	Knob Unit	CXC3455	CXC4282
	46	Grille Unit	CXC4940	CXC4951
	47	Door	CAT2635	CAT2665


2.3 SERVICE MECHANISM ASSY(1)

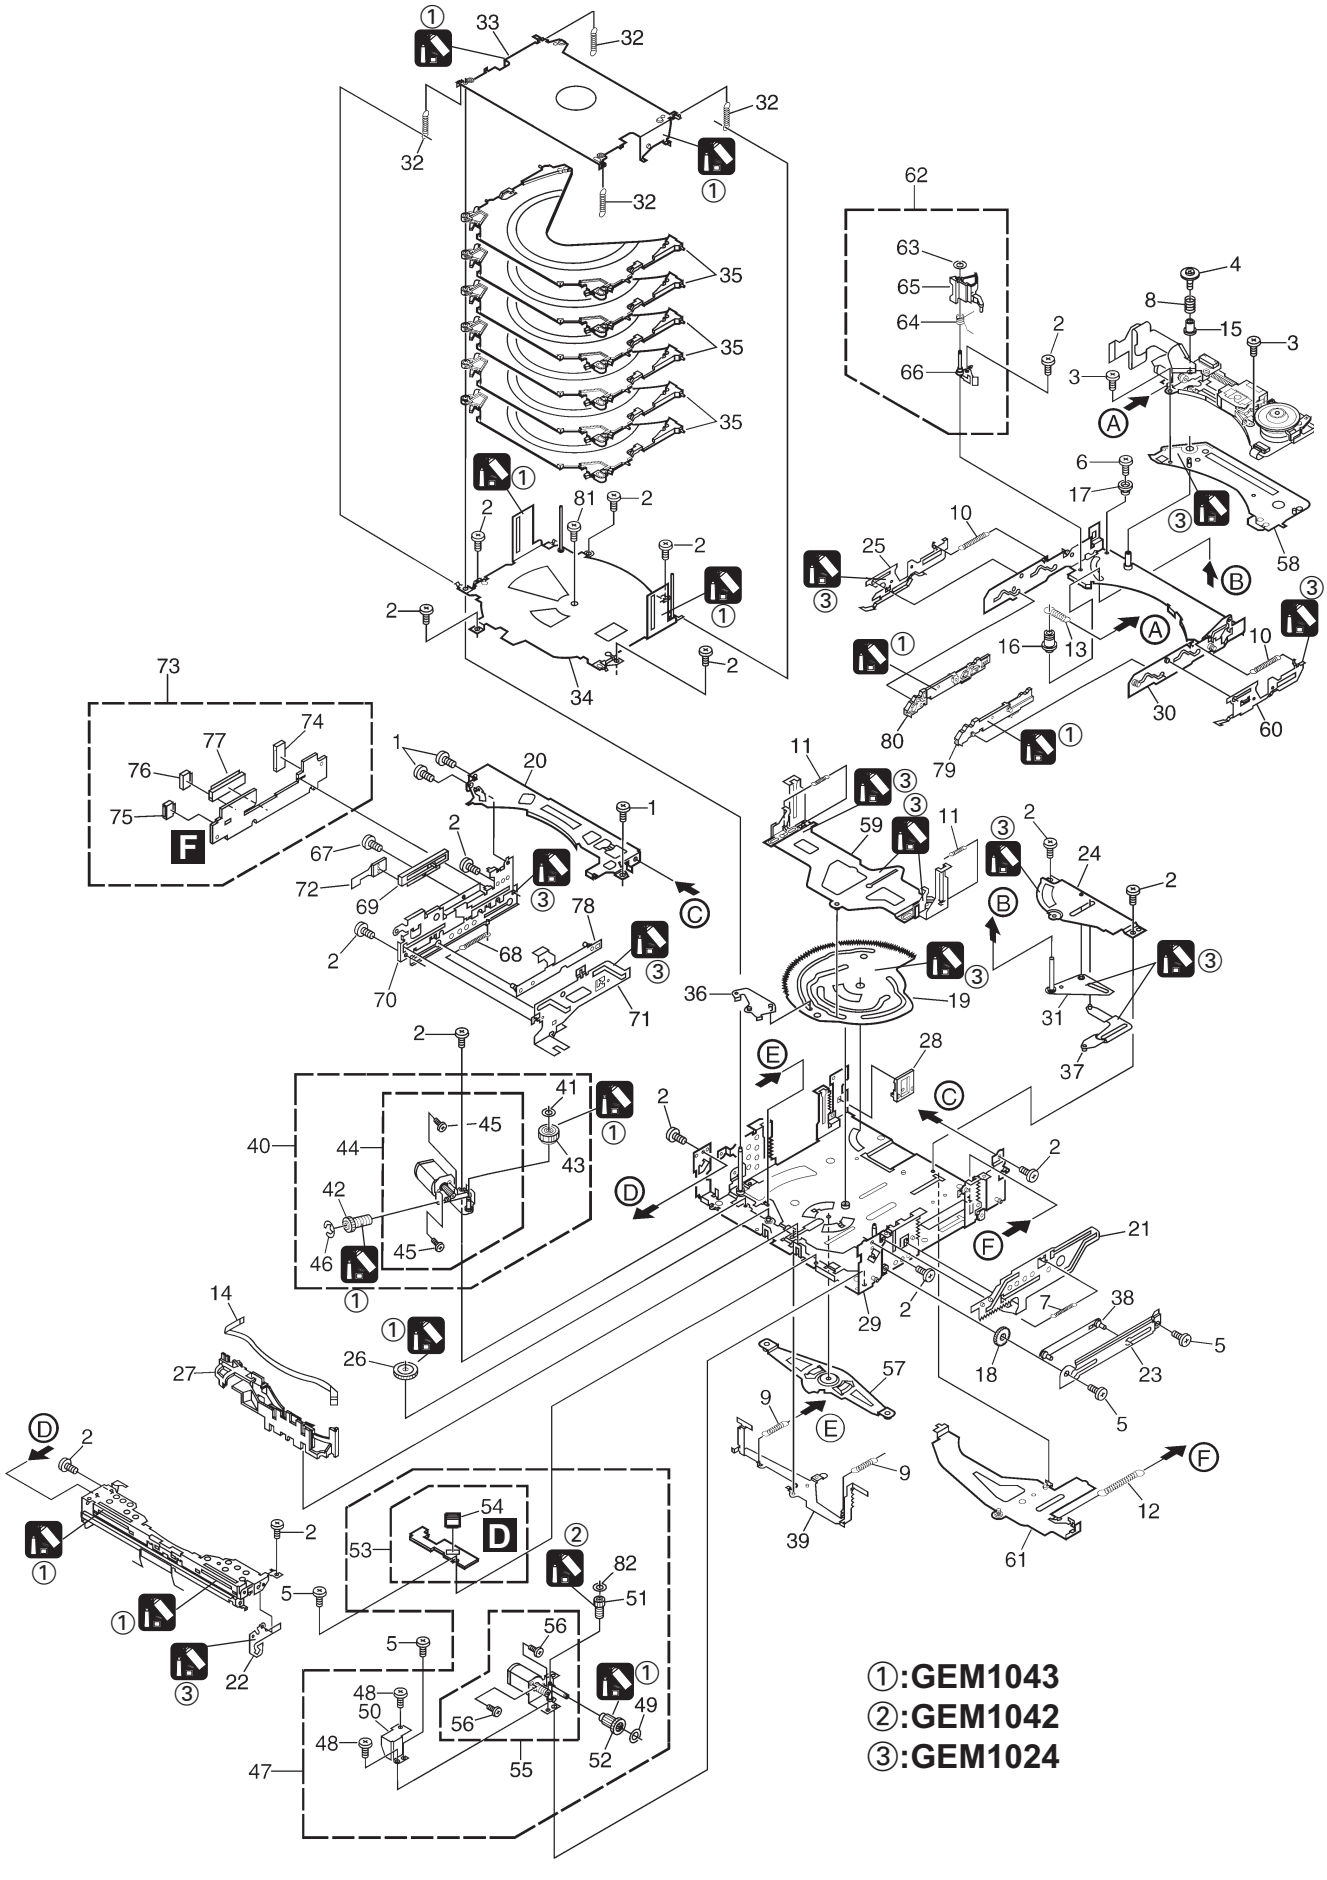

SERVICE MECHANISM ASSY(1) SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Screw	BMZ20P020FTB
	2	Screw	BMZ20P025FTC
	3	Screw(M2x2)	CBA1834
	4	Screw(M2x2.5)	CBA1626
	5	Screw(M2x2.5)	CBA1609
	6	Screw(M2x4.5)	CBA1629
	7	Spring	CBH2460
	8	Spring	CBH2461
	9	Spring	CBH2484
	10	Spring	CBH2694
	11	Spring	CBH2486
	12	Spring	CBH2668
	13	Spring	CBH2500
	14	Connector	CDE6698
	15	Collar	CLA4329
	16	Collar	CLA4330
	17	Collar	CLA4331
	18	Gear	CND1649
*	19	Cam Gear	CND1650
	20	Frame	CND1651
	21	Steer	CND1667
	22	Arm	CND1657
	23	Bracket	CND1658
*	24	Bracket	CND1660
*	25	Lever	CNC9953
	26	Gear	CNV8494
	27	Holder	CNV8499
	28	Holder	CNV8504
*	29	Chassis Unit	CXC1642
*	30	Frame Unit	CXC1643
*	31	Arm Unit	CXC1647
	32	Spring	CBH2670
	33	Holder Unit	CXC1644
	34	Holder Unit	CXC1646
	35	Tray Unit	CXB6930
	36	Lever Unit	CXC1648
*	37	Lever Unit	CXC1649
	38	Lever Unit	CXC1650
*	39	Lever Unit	CXC1651
	40	Cam Motor Assy	CXB7522
	41	Washer	CBF1064
	42	Gear	CNV6610
	43	Gear	CNV6611
	44	Motor Unit(M1)	CXC1144
	45	Screw	JFZ20P020FTC
	46	Washer	YE20FTC
	47	ELV Motor Assy	CXB7523
	48	Screw	BMZ20P025FTC
	49	Washer	CBF1064
	50	Holder	CND1668
	51	Gear	CNV6634
	52	Gear	CNV6635
	53	PCB Unit(LED)	CWX2614
*	54	Connector(CN31)	CKS4523
	55	Motor Unit(M2)	CXC1145
	56	Screw	JFZ20P020FTC
*	57	Arm Unit	CXC1653
*	58	Bracket Unit	CXC4688
*	59	Lever Unit	CXC2159
*	60	Lever Unit	CXC1659
*	61	Lever Unit	CXC1661
*	62	Arm Assy	CXC4766
	63	Washer	CBF1038
	64	Spring	CBH2489
*	65	Arm	CNV8501
	66	Bracket Unit	CXC1652
	67	Screw	BMZ20P025FTC
	68	Spring	CBH2667
	69	Volume(VR1)	CCW1023
	70	Bracket	CND1652
	71	Steer	CND1656
	72	Flexible PCB	CNP6368
	73	PCB Unit(SIDE)	CWX2613
	74	Connector(CN12)	CKS3991
*	75	Connector(CN14)	CKS4404
	76	Connector(CN13)	CKS4525
	77	Connector(CN11)	CKS4572
	78	Lever Unit	CXC1779
*	79	Lever Unit	CXC4689
*	80	Lever Unit	CXC4690
	81	Screw	JFZ20P020FTC
	82	Washer	CBF1037

2.4 SERVICE MECHANISM ASSY(2)

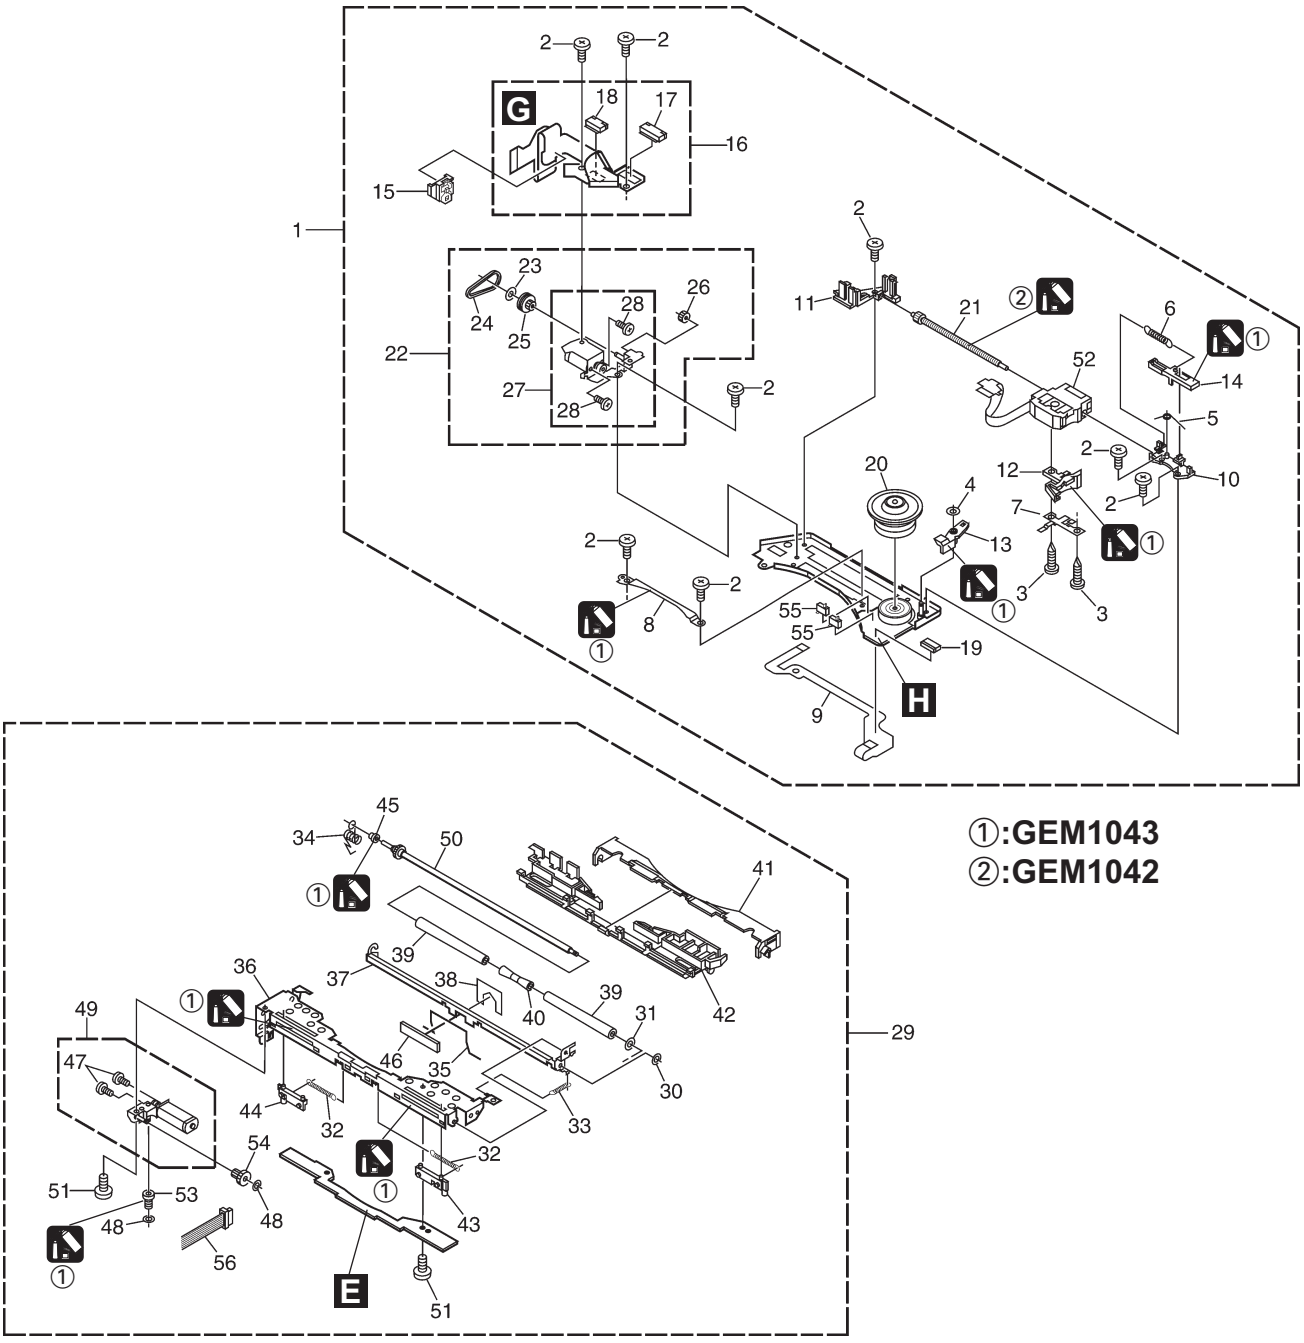


SERVICE MECHANISM ASSY(2) SECTION PARTS LIST

Mark	No.	Description	Part No.
*	1	Carriage Mech. Assy(G2T)	CXC4765
	2	Screw(M2x2)	CBA1834
	3	Screw(M2x6)	CBA1628
	4	Washer	CBF1038
	5	Spring	CBH2453
	6	Spring	CBH2480
	7	Spring	CBL1521
*	8	Guide	CNC9402
	9	Flexible PCB	CNP6217
	10	Holder	CNV8495
	11	Holder	CNV8496
	12	Rack	CNV8497
	13	Arm	CNV8500
	14	Lever	CNV8502
	15	Holder	CNV8503
	16	PCB Unit	CWX2611
	17	Connector(CN41)	CKS3785
	18	Connector(CN42)	CKS4508
	19	Connector(CN1)	CKS4508
	20	Support Wheel Unit	CXC4691
	21	Screw Unit(-B)	CXB7518
	22	Carriage Motor Assy	CXB7521
	23	Washer	CBF1038
	24	Belt	CNT1088
	25	Pulley	CNV6627
	26	Gear	CNV6629
	27	Motor Unit(M3)	CXC4658
	28	Screw	JFZ14P020FTC
	29	Loading Mech. Assy	CXC4362
	30	Washer	CBF1037
*	31	Washer	CBF1075
*	32	Spring	CBH2450
	33	Spring	CBH2672
*	34	Spring	CBH2457
*	35	Spring	CBH2580
*	36	Frame	CND1653
*	37	Arm	CND1654
*	38	Sheet	CNM7295
	39	Roller	CNV6616
	40	Collar	CNV6617
*	41	Guide	CNV6622
*	42	Holder	CNV6636
*	43	Lever	CNV6732
*	44	Lever	CNV6733
	45	Collar	CNV6734
*	46	Holder	CNV7144
	47	Screw	JFZ12P018FTC
	48	Washer	CBF1037
*	49	Motor Unit	CXC4220
	50	Shaft Unit	CXB7528
	51	Screw	JFZ20P020FTC
	52	PU Unit(Service)(PX1)	CXX1569
*	53	Gear	CNV6620
*	54	Gear	CNV6621
	55	Switch(S1,2)	CSN1057
*	56	Connector	CDE6674

2.5 CASSETTE MECHANISM MODULE

For grease application, refer to the service manual for CX-1011 (CRT2406).

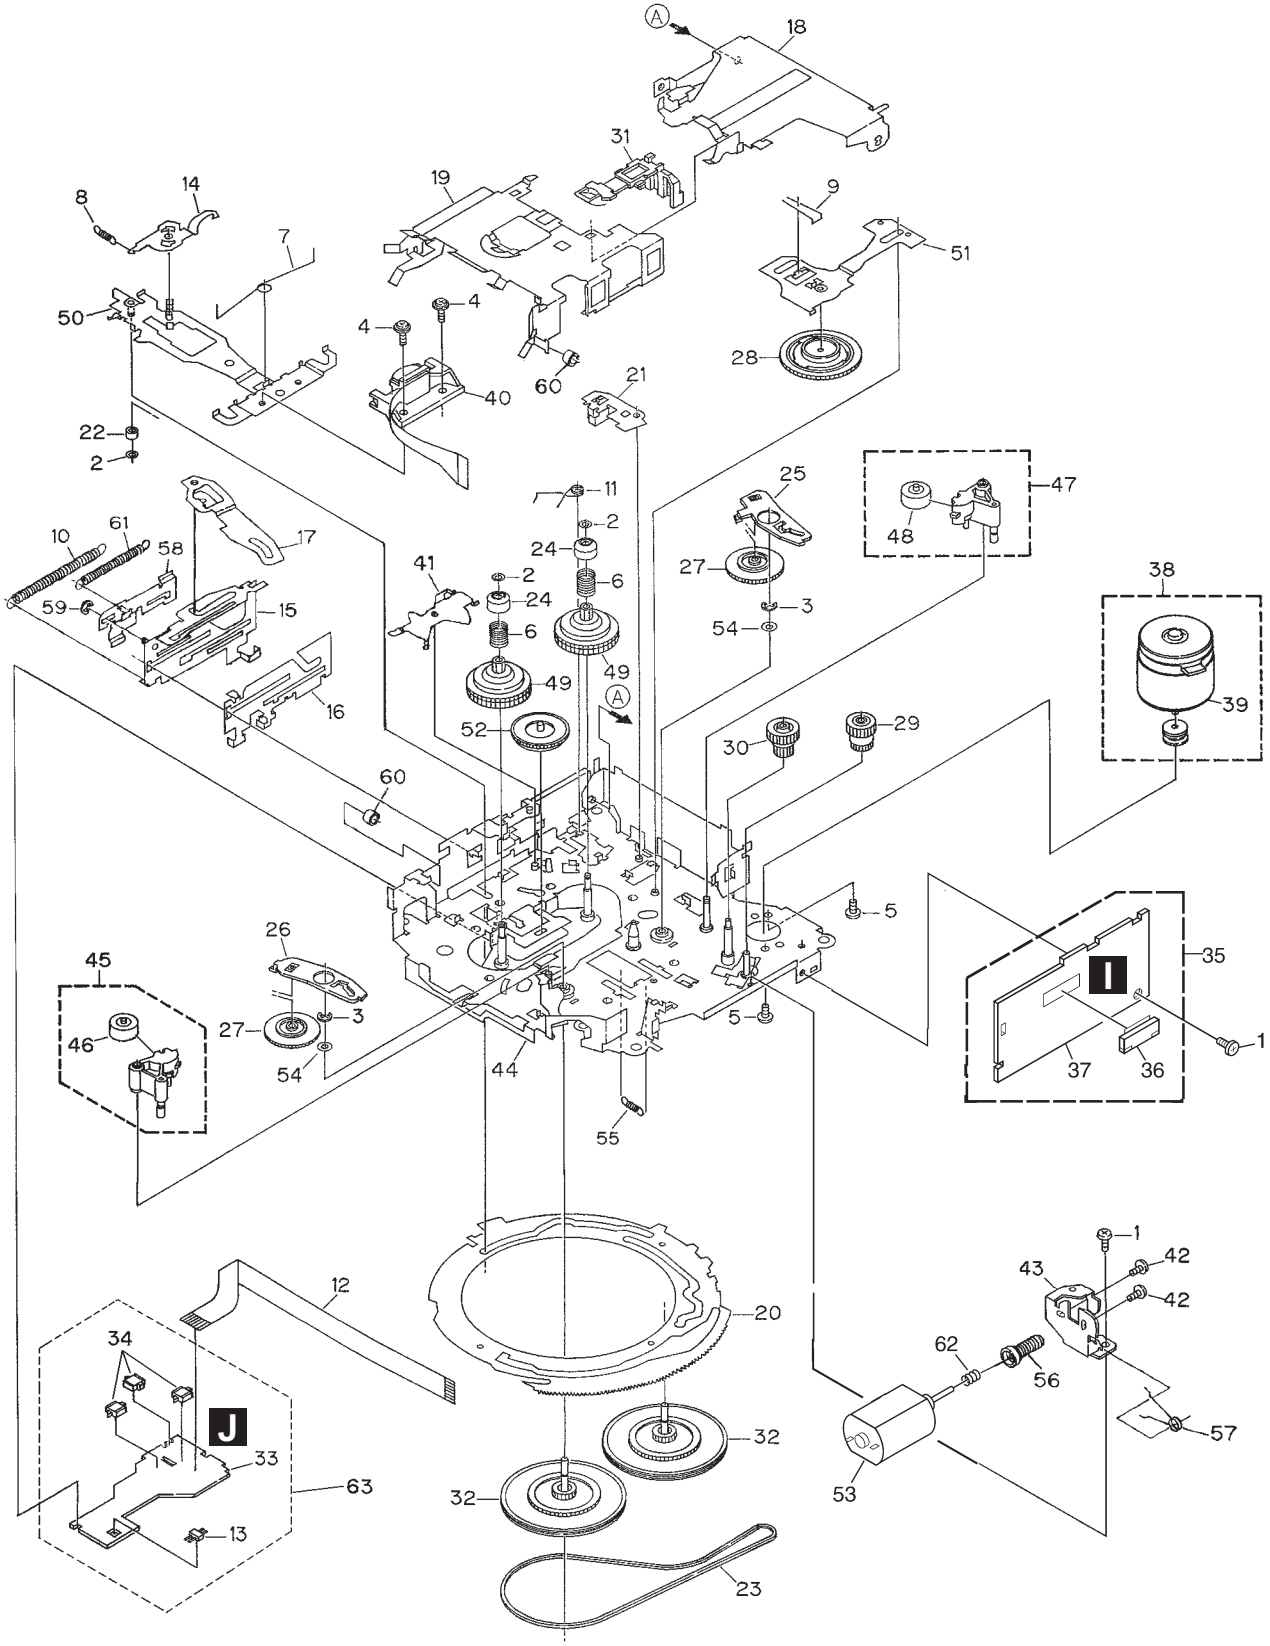

CASSETTE MECHANISM MODULE SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Screw	BSZ20P040FTC
	2	Washer	CBF1037
	3	Washer	CBG1003
	4	Screw	EBA1028
	5	Screw	BMZ20P022FTC
	6	Spring	EBH1653
	7	Spring	EBH1642
	8	Spring	EBH1641
	9	Spring	EBH1626
	10	Spring	EBH1627
	11	Spring	EBH1648
	12	Cord	EDD1024
	13	Photo-reflector(Q101)	EGN1004
	14	Arm	ENC1526
	15	Lever Unit	EXA1610
	16	Lever	ENC1543
	17	Arm	ENC1532
	18	Frame	ENC1533
	19	Holder	ENC1547
	20	Gear	ENC1535
	21	Arm	ENC1550
	22	Roller	ENR1040
	23	Belt	ENT1027
	24	Collar	ENV1508
	25	Arm	ENV1539
	26	Arm	ENV1540
	27	Gear	ENV1569
	28	Gear	ENV1547
	29	Gear	ENR1044
	30	Worm Wheel	ENV1559
	31	Lever	ENV1551
	32	Flywheel	ENV1607
	33	Gathering PCB	ENX1073
	34	Switch(S101,S102,S103)	ESG1007
	35	Deck Unit	EWM1047
	36	Plug(CN251)	EKS1026
	37	Gathering PCB	ENX1080
	38	Motor Unit(M1)	EXA1618
	39	Motor	EXM1035
	40	Head Assy(HD1)	EXA1594
	41	Arm	ENC1537
	42	Screw	EBA1031
	43	Bracket	ENC1559
	44	Chassis Unit	EXA1636
	45	Pinch Holder Unit	EXA1608
	46	Pinch Roller	ENV1518
	47	Pinch Holder Unit	EXA1607
	48	Pinch Roller	ENV1518
	49	Reel Unit	EXA1625
	50	Head Base Unit	EXA1611
	51	Lever Unit	EXA1587
	52	Gear Unit	EXA1632
	53	Motor Unit(M2)	EXA1660
	54	Washer	HBF-179
	55	Spring	EBH1537
	56	Worm Gear	ENV1564
	57	Spring	EBH1672
	58	Lever	ENC1548
	59	Washer	YE15FTC
	60	Tube	ENM1039
	61	Spring	EBH1645
	62	Spring	EBH1545
	63	Sensor Unit	EWM1041

5. ELECTRICAL PARTS LIST

NOTE:

- *Parts whose parts numbers are omitted are subject to being not supplied.*
- *The part numbers shown below indicate chip components.*

Chip Resistor

RS1/◯S◯◯◯J,RS1/◯◯S◯◯◯J

Chip Capacitor (except for CQS.....)

CKS....., CCS....., CSZS.....

- *The ⚠ mark found on some component parts indicatesthe importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*

A

Unit Number:CWM8455

Unit Name:Main Unit

MISCELLANEOUS

Circuit Symbol and No.		Part No.
IC 301	(A,91,111) IC	NJM2068V
IC 331	(A,68,87) IC	TC4052BFT
IC 351	(A,71,95) IC	NJM2068V
IC 355	(A,58,95) IC	NJM2068V
IC 401	(A,50,77) IC	NJM2068V
IC 411	(A,41,85) IC	NJM2068V
IC 421	(A,41,76) IC	NJM2068V
IC 511	(A,145,65) IC	LA1061M
IC 561	(A,147,48) IC	HA12181FP
IC 581	(A,39,36) IC	PM4009A
IC 601	(A,77,37) IC	PD5844A
IC 861	(A,93,23) IC	HA12187FP
IC 951	(A,13,53) IC	S-812C56AUA-C3K
IC 958	(A,60,25) IC	S-80840CNNB-B8Z
Q 341	(A,67,92) Transistor	UMH4N
Q 381	(A,60,76) Transistor	DTA144TUA
Q 521	(A,148,74) Transistor	UMX1N
Q 527	(A,134,101) Transistor	2SC4081
Q 533	(B,167,92) Transistor	2SC4081
Q 561	(A,141,39) Transistor	2SC4081
Q 601	(A,62,45) Transistor	UMH1N
Q 602	(A,68,74) Transistor	UMH4N
Q 822	(B,76,65) Transistor	2SC4081
Q 831	(A,57,111) Transistor	UMT1N
Q 832	(A,55,102) Transistor	DTC114EU
Q 841	(A,79,98) Transistor	2SA1797
Q 842	(A,77,90) Transistor	UMX1N
Q 871	(A,91,93) Transistor	DTA114EU
Q 881	(A,86,76) Transistor	UMT1N
Q 882	(A,86,73) Transistor	DTC144EU
Q 911	(A,99,97) Transistor	2SC4081
Q 921	(A,90,86) Transistor	2SC4081
Q 931	(A,85,79) Transistor	2SC4081
Q 941	(A,14,31) Transistor	DTC114EU
Q 942	(A,14,28) Transistor	2SB1689
Q 951	(A,17,61) Transistor	2SC4081
Q 952	(A,8,59) Transistor	2SB1185
Q 953	(A,17,64) Transistor	2SC4154-11
Q 954	(A,21,57) Transistor	UMD12N
Q 955	(A,17,67) Transistor	2SA1602A
Q 971	(A,10,109) Transistor	2SB1185
Q 972	(A,17,109) Transistor	UMX1N
Q 981	(A,59,7) Transistor	2SA1797
Q 982	(A,55,12) Transistor	2SC4081
Q 991	(A,8,71) Transistor	2SB1185
Q 992	(A,11,79) Transistor	UMX1N
Q 997	(A,131,38) Transistor	UMD3N
Q 998	(A,125,38) Transistor	UMD3N
D 361	(B,58,81) Diode	UDZS4R7(B)
D 381	(A,60,74) Diode	DAP202U
D 382	(A,68,77) Diode	1SS355
D 383	(A,68,70) Diode	1SS355
D 501	(A,145,81) Diode	CPH5512
D 502	(A,150,81) Diode	CPH5512
D 504	(A,136,75) Diode	1SS355
D 511	(B,142,73) Diode	DAP202U
D 512	(B,147,58) Diode	1SS355
D 527	(A,137,99) Diode	1SS355
D 822	(A,83,127) Diode	UDZS18(B)
D 831	(B,56,117) Diode	RR264M-400
D 832	(A,57,115) Diode	RR264M-400
D 842	(B,81,84) Diode	DAN202U
D 843	(A,83,98) Diode	RR264M-400
D 844	(A,83,92) Diode	RR264M-400
D 855	(A,40,54) Diode	1SS355
D 856	(A,37,54) Diode	1SS355
D 865	(B,99,110) Diode	UDZS18(B)
D 866	(B,99,115) Diode	UDZS18(B)
D 871	(A,96,92) Diode	1SS355
D 872	(A,98,89) Diode	UDZS8R2(B)
D 881	(A,81,75) Diode	1SS355
D 882	(A,90,72) Diode	UDZS8R2(B)
D 901	(A,124,140) Diode	S1G-6904G2P
D 902	(A,67,116) Diode	RM4LFJ10
D 903	(A,124,134) Diode	RB051L-40
D 911	(A,104,102) Diode	HZU8R2(B1)
D 921	(A,98,87) Diode	HZU8R2(B1)
D 931	(A,93,80) Diode	HZU8R2(B1)
D 952	(A,18,54) Diode	UDZS16(B)
D 953	(A,25,60) Diode	UDZS9R1(B)
D 954	(A,22,63) Diode	UDZS16(B)
D 972	(A,15,106) Diode	1SS355
D 974	(A,13,106) Diode	HZU8R2(B3)
D 982	(A,53,10) Diode	1SS355

Circuit Symbol and No.		Part No.
D 992	(A,11,74) Diode	1SS355
D 994	(A,6,78) Diode	HZU7R5(B3)
ZNR501	(B,163,111) Surge Protector	RCCA-201Q31UA-PI
ZNR502	(B,163,115) Surge Protector	RCCA-201Q31UA-PI
L 31	(B,158,110) Inductor	LCYB12NJ1608
L 32	(A,160,115) Inductor	LCYB12NJ1608
L 33	(B,154,112) Inductor	LCYB68NJ1608
L 34	(A,157,113) Inductor	LCYB68NJ1608
L 501	(A,157,110) Inductor	LCTAW330J2520
L 504	(A,138,79) Inductor	CTF1409
L 511	(A,138,75) Inductor	CTF1409
L 512	(A,141,75) Inductor	CTF1409
L 513	(A,139,60) Inductor	CTF1473
L 521	(A,151,65) Inductor	LCTAW561J4532
L 531	(B,160,83) Inductor	CTF1473
L 536	(B,164,50) Inductor	CTF1473
L 561	(A,138,37) Inductor	CTF1473
L 581	(A,35,26) Inductor	CTF1473
L 582	(A,42,26) Inductor	LCTAW101J2520
L 662	(B,76,18) Inductor	CTF1473
L 721	(A,14,141) Inductor	CTF1558
L 723	(A,17,139) Inductor	CTF1306
L 724	(A,17,138) Inductor	CTF1306
L 725	(A,17,136) Inductor	CTF1306
L 726	(A,17,135) Inductor	CTF1306
L 727	(B,15,132) Inductor	CTF1306
L 730	(A,17,131) Inductor	CTF1473
L 731	(A,17,130) Inductor	CTF1558
L 732	(B,15,125) Inductor	CTF1461
L 733	(A,17,127) Inductor	CTF1473
L 734	(A,17,125) Inductor	CTF1473
L 735	(B,11,120) Inductor	CTF1473
L 736	(A,17,124) Inductor	CTF1473
L 737	(A,16,122) Inductor	CTF1461
L 738	(A,14,120) Inductor	CTF1461
L 761	(A,18,48) Inductor	CTF1254
L 861	(A,99,25) Inductor	CTF1473
L 901	(A,113,136) Choke Coill 95µH	CTH1301
T 501	(A,146,93) Coil	CTB1112
X 581	(A,48,42) Radiatorr 3.648MHz	CSS1643
X 615	(A,76,25) Radiator 10.0MHz	CSS1577
VR561	(A,138,50) Semi-fixed 10kΩ(B)	CCP1396
⚠FU901	(A,108,143) Fuse 8A	CEK1263
U 501	(A,160,20) FM/AM Tuner Unit	CWE1630

RESISTORS

R 251	(B,164,65)	RS1/16S681J
R 252	(B,164,63)	RS1/16S681J
R 253	(B,167,63)	RS1/16S473J
R 254	(B,164,61)	RS1/16S681J
R 255	(B,167,61)	RS1/16S473J
R 256	(B,164,59)	RS1/16S681J
R 257	(B,167,59)	RS1/16S472J
R 258	(B,164,57)	RS1/16S103J
R 259	(B,164,54)	RS1/16S681J
R 260	(B,167,54)	RS1/16S473J
R 263	(B,156,29)	RS1/16S681J
R 264	(B,156,31)	RS1/16S681J
R 265	(B,158,47)	RS1/16S681J
R 266	(B,164,56)	RS1/16S681J
R 267	(B,155,22)	RS1/16S681J
R 268	(B,155,20)	RS1/16S681J
R 269	(B,151,21)	RS1/16S473J
R 270	(B,155,24)	RS1/16S103J
R 272	(B,164,75)	RS1/16S681J
R 301	(A,93,123)	RS1/16S103J
R 302	(A,88,123)	RS1/16S103J
R 303	(A,96,123)	RS1/16S103J
R 304	(A,91,123)	RS1/16S103J
R 305	(A,94,123)	RS1/16S562J
R 306	(A,87,123)	RS1/16S562J
R 307	(A,97,123)	RS1/16S562J
R 308	(A,90,123)	RS1/16S562J
R 309	(A,93,118)	RS1/16S473J
R 310	(A,88,118)	RS1/16S473J
R 311	(A,94,115)	RS1/16S473J
R 312	(A,90,115)	RS1/16S473J
R 313	(A,92,116)	RS1/16S473J
R 314	(A,87,116)	RS1/16S473J
R 315	(A,94,107)	RS1/16S473J
R 316	(A,89,107)	RS1/16S473J
R 331	(A,74,86)	RS1/16S224J
R 332	(A,58,91)	RS1/16S224J
R 333	(A,74,89)	RS1/16S332J
R 334	(A,60,92)	RS1/16S332J
R 335	(A,66,82)	RS1/16S473J
R 336	(A,68,82)	RS1/16S473J
R 337	(A,69,82)	RS1/16S104J
R 341	(A,70,92)	RS1/16S224J
R 342	(A,64,92)	RS1/16S224J
R 343	(A,76,94)	RS1/16S823J
R 344	(A,66,95)	RS1/16S823J
R 351	(A,71,99)	RS1/16S134J
R 352	(A,66,99)	RS1/16S134J
R 353	(A,64,95)	RS1/16S153J
R 354	(A,64,98)	RS1/16S153J
R 355	(A,61,99)	RS1/16S153J
R 356	(A,56,99)	RS1/16S153J
R 365	(A,67,80)	RS1/16S222J
R 366	(A,64,82)	RS1/16S221J
R 371	(A,71,106)	RS1/16S223J
R 372	(A,67,106)	RS1/16S223J
R 373	(A,64,106)	RS1/16S223J
R 374	(A,61,106)	RS1/16S223J
R 375	(A,65,110)	RS1/10S181J
R 376	(A,63,110)	RS1/10S181J
R 377	(A,61,110)	RS1/10S181J
R 378	(A,59,110)	RS1/10S181J
R 381	(A,64,77)	RS1/16S153J
R 382	(A,64,76)	RS1/16S473J
R 383	(A,64,74)	RS1/16S471J
R 401	(A,51,73)	RS1/16S183J
R 402	(A,48,73)	RS1/16S183J
R 403	(A,51,74)	RS1/16S563J
R 404	(A,48,74)	RS1/16S563J
R 405	(A,51,81)	RS1/16S683J
R 406	(A,48,81)	RS1/16S683J
R 411	(A,39,82)	RS1/16S433J
R 412	(A,39,85)	RS1/16S433J

Circuit Symbol and No.		Part No.
R 413	(A,46,84)	RS1/16S273J
R 414	(A,46,87)	RS1/16S273J
R 421	(A,38,75)	RS1/16S273J
R 422	(A,38,78)	RS1/16S273J
R 423	(A,45,75)	RS1/16S273J
R 424	(A,45,78)	RS1/16S273J
R 501	(A,145,84)	RS1/16S225J
R 502	(A,145,79)	RS1/16S225J
R 503	(A,150,84)	RS1/16S225J
R 504	(A,150,79)	RS1/16S225J
R 506	(B,133,78)	RS1/16S102J
R 507	(B,157,100)	RS1/16S222J
R 511	(A,146,71)	RS1/16S104J
R 512	(A,143,72)	RS1/16S103J
R 513	(A,140,70)	RS1/16S103J
R 514	(A,142,60)	RS1/16S334J
R 515	(A,144,60)	RS1/16S101J
R 516	(A,146,60)	RS1/16S101J
R 517	(A,151,61)	RS1/16S104J
R 518	(A,149,60)	RS1/16S104J
R 519	(B,150,56)	RS1/16S102J
R 521	(A,146,76)	RS1/16S683J
R 522	(A,145,74)	RS1/16S224J
R 523	(A,151,76)	RS1/16S473J
R 524	(A,152,74)	RS1/16S473J
R 525	(A,148,76)	RS1/16S182J
R 526	(A,152,73)	RS1/16S103J
R 528	(A,137,103)	RS1/16S223J
R 529	(A,133,103)	RS1/16S472J
R 531	(B,167,89)	RS1/16S222J
R 535	(B,167,57)	RS1/16S393J
R 536	(B,164,67)	RS1/16S681J
R 538	(B,164,68)	RS1/16S103J
R 539	(B,164,72)	RS1/16S473J
R 541	(A,151,31)	RS1/16S562J
R 542	(A,151,29)	RS1/16S562J
R 549	(A,148,34)	RS1/16S822J
R 550	(A,148,26)	RS1/16S822J
R 557	(A,148,31)	RS1/16S104J
R 558	(A,148,29)	RS1/16S104J
R 561	(B,150,51)	RS1/16S104J
R 562	(A,148,55)	RS1/16S123J
R 564	(A,145,42)	RS1/16S184J
R 565	(A,147,42)	RS1/16S223J
R 566	(A,151,41)	RS1/16S473J
R 567	(A,140,44)	RS1/16S822J
R 568	(A,141,49)	RS1/16S105J
R 569	(A,138,42)	RS1/16S222J
R 570	(A,141,42)	RS1/16S822J
R 575	(A,152,55)	RS1/16S100J
R 586	(B,33,34)	RS1/16S225J
R 587	(B,46,32)	RS1/16S222J
R 588	(B,46,33)	RS1/16S222J
R 589	(B,46,35)	RS1/16S222J
R 590	(A,34,40)	RS1/16S102J
R 592	(B,46,38)	RS1/16S222J
R 600	(A,70,73)	RS1/16S103J
R 601	(A,65,24)	RS1/16S681J
R 602	(A,66,21)	RS1/16S681J
R 603	(A,67,24)	RS1/16S102J

Circuit Symbol and No.		Part No.
R 604	(A,67,21)	RS1/16S102J
R 605	(A,68,24)	RS1/16S102J
R 606	(A,69,21)	RS1/16S102J
R 607	(A,70,24)	RS1/16S102J
R 609	(B,74,29)	RS1/16S223J
R 610	(A,71,21)	RS1/16S102J
R 611	(A,72,24)	RS1/16S102J
R 612	(A,73,21)	RS1/16S102J
R 613	(B,73,25)	RS1/16S681J
R 617	(B,79,33)	RS1/16S103J
R 618	(A,79,21)	RS1/16S102J
R 620	(A,81,21)	RS1/16S102J
R 622	(A,81,24)	RS1/16S102J
R 623	(A,82,21)	RS1/16S102J
R 624	(A,83,24)	RS1/16S102J
R 625	(B,81,21)	RS1/16S473J
R 627	(A,86,21)	RS1/16S102J
R 628	(A,87,24)	RS1/16S102J
R 631	(A,91,27)	RS1/16S102J
R 632	(A,91,28)	RS1/16S100J
R 633	(A,91,30)	RS1/16S102J
R 634	(A,91,32)	RS1/16S102J
R 635	(A,94,33)	RS1/16S102J
R 636	(A,94,31)	RS1/16S102J
R 637	(A,91,34)	RS1/16S102J
R 639	(A,91,36)	RS1/16S102J
R 640	(A,94,37)	RS1/16S102J
R 642	(A,94,27)	RS1/16S103J
R 643	(A,94,29)	RS1/16S473J
R 644	(B,90,11)	RS1/16S473J
R 645	(A,98,36)	RS1/16S473J
R 646	(A,91,41)	RS1/16S681J
R 647	(A,94,41)	RS1/16S681J
R 648	(A,91,42)	RS1/16S102J
R 649	(A,94,43)	RS1/16S102J
R 650	(A,91,44)	RS1/16S102J
R 652	(A,87,49)	RS1/16S471J
R 656	(A,84,52)	RS1/16S103J
R 657	(B,80,53)	RS1/16S473J
R 658	(A,83,49)	RS1/16S102J
R 660	(B,82,45)	RS1/16S102J
R 661	(B,81,42)	RS1/16S473J
R 662	(B,84,50)	RS1/16S473J
R 666	(A,75,53)	RS1/16S681J
R 667	(A,74,50)	RS1/16S102J
R 668	(A,73,53)	RS1/16S102J
R 669	(A,72,50)	RS1/16S102J
R 670	(A,72,53)	RS1/16S102J
R 671	(A,71,50)	RS1/16S102J
R 672	(A,70,53)	RS1/16S102J
R 673	(A,69,50)	RS1/16S223J
R 674	(A,65,53)	RS1/16S102J
R 675	(A,65,51)	RS1/16S102J
R 676	(A,65,50)	RS1/16S102J
R 677	(A,65,48)	RS1/16S102J
R 678	(A,65,47)	RS1/16S102J
R 679	(A,65,45)	RS1/16S102J
R 685	(A,59,40)	RS1/16S681J
R 686	(A,62,40)	RS1/16S681J
R 691	(A,62,36)	RS1/16S102J

Circuit Symbol and No.		Part No.
R 693	(A,62,35)	RS1/16S102J
R 695	(A,62,33)	RS1/16S102J
R 697	(A,62,31)	RS1/16S102J
R 698	(A,65,27)	RS1/16S100J
R 701	(B,70,36)	RS1/16S102J
R 731	(B,14,137)	RS1/16S100J
R 734	(B,34,87)	RS1/16S332J
R 735	(B,35,84)	RS1/16S332J
R 742	(A,144,13)	RS1/16S472J
R 743	(A,147,13)	RS1/16S472J
R 745	(A,152,14)	RS1/16S472J
R 746	(A,152,13)	RS1/16S472J
R 755	(A,160,13)	RS1/16S223J
R 761	(A,23,37)	RS1/16S473J
R 762	(A,24,37)	RS1/16S473J
R 763	(A,24,34)	RS1/16S473J
R 764	(A,23,34)	RS1/16S473J
R 765	(A,23,30)	RS1/16S473J
R 822	(A,83,125)	RS1/10S221J
R 823	(B,79,64)	RS1/16S103J
R 832	(A,57,108)	RS1/16S223J
R 833	(A,55,107)	RS1/16S153J
R 836	(A,57,109)	RS1/16S180J
R 842	(A,81,86)	RS1/16S153J
R 843	(A,78,86)	RS1/16S223J
R 844	(A,81,94)	RS1/16S223J
R 846	(A,79,90)	RS1/16S152J
R 847	(A,76,86)	RS1/16S223J
R 848	(A,79,94)	RS1/16S333J
R 849	(A,80,90)	RS1/16S473J
R 851	(A,91,46)	RS1/16S473J
R 855	(A,42,54)	RS1/16S152J
R 856	(A,38,54)	RS1/16S152J
R 861	(A,88,28)	RS1/16S223J
R 862	(B,81,34)	RS1/16S473J
R 865	(B,96,109)	RS1/4S101J
R 866	(B,96,115)	RS1/4S101J
R 869	(A,97,106)	RS1PMF680J
R 871	(A,93,89)	RS1/16S103J
R 872	(A,93,90)	RS1/16S223J
R 873	(A,90,90)	RS1/16S222J
R 874	(A,99,94)	RS1/16S472J
R 875	(A,99,92)	RS1/16S472J
R 881	(A,83,76)	RS1/16S473J
R 882	(A,83,73)	RS1/16S473J
R 883	(A,90,75)	RS1/16S103J
R 884	(A,91,75)	RS1/16S103J
R 911	(A,101,104)	RS1/16S222J
R 912	(A,99,102)	RS1/16S222J
R 913	(A,100,102)	RS1/16S103J
R 914	(A,102,102)	RS1/16S473J
R 915	(A,102,98)	RS1/16S104J
R 916	(A,102,97)	RS1/16S223J
R 917	(B,32,67)	RS1/8S511J
R 918	(B,32,142)	RS1/8S511J
R 921	(A,100,85)	RS1/16S222J
R 922	(A,98,85)	RS1/16S222J
R 923	(A,97,85)	RS1/16S103J
R 924	(A,95,85)	RS1/16S473J
R 925	(A,92,85)	RS1/16S222J

Circuit Symbol and No.		Part No.
R 926	(A,90,83)	RS1/16S223J
R 931	(A,90,79)	RS1/16S104J
R 932	(A,90,77)	RS1/16S224J
R 933	(A,90,82)	RS1/16S104J
R 934	(A,88,79)	RS1/16S103J
R 941	(A,12,28)	RS1/16S223J
R 942	(A,10,28)	RS1/16S102J
R 951	(A,11,56)	RS1/16S182J
R 952	(B,10,55)	RS1/16S223J
R 953	(A,20,67)	RS1/16S220J
R 954	(A,20,61)	RS1/16S472J
R 955	(A,17,58)	RS1/16S222J
R 956	(A,11,58)	RS1/16S154J
R 957	(A,55,25)	RS1/16S471J
R 958	(A,56,25)	RS1/16S473J
R 959	(A,17,57)	RS1/16S225J
R 971	(B,13,104)	RS1/16S223J
R 972	(A,21,106)	RS1/16S103J
R 973	(A,20,106)	RS1/16S101J
R 974	(A,14,110)	RS1/16S471J
R 975	(A,17,106)	RS1/16S331J
R 976	(A,13,110)	RS1/16S221J
R 981	(A,56,7)	RS1/16S223J
R 982	(A,53,6)	RS1/16S472J
R 983	(A,53,8)	RS1/16S470J
R 984	(A,53,12)	RS1/16S102J
R 991	(B,10,68)	RS1/16S223J
R 992	(A,11,76)	RS1/16S223J
R 993	(A,11,77)	RS1/16S331J
R 994	(A,6,80)	RS1/16S471J
R 995	(A,10,82)	RS1/16S471J
R 996	(A,5,83)	RS1/16S221J

CAPACITORS

C 11	(B,50,125)	CKSRYB223K50
C 12	(B,50,122)	CKSRYB223K50
C 13	(B,68,119)	CKSRYB102K50
C 14	(B,39,131)	CKSRYB102K50
C 15	(B,97,123)	CKSRYB102K50
C 18	(B,30,123)	CKSRYB102K50
C 19	(B,32,123)	CKSRYB102K50
C 31	(B,158,108)	CCSRCH220J50
C 32	(A,160,116)	CCSRCH220J50
C 33	(B,158,112)	CCSRCJ3R0C50
C 34	(A,160,113)	CCSRCJ3R0C50
C 301	(B,92,123)	CCSRCH471J50
C 302	(B,87,123)	CCSRCH471J50
C 303	(B,96,123)	CCSRCH471J50
C 304	(B,90,123)	CCSRCH471J50
C 305	(A,91,118)	CKSRYB105K10
C 306	(A,87,118)	CKSRYB105K10
C 307	(A,94,118)	CKSRYB105K10
C 308	(A,90,118)	CKSRYB105K10
C 309	(A,92,114)	CCSRCH220J50
C 310	(A,87,114)	CCSRCH220J50
C 313	(B,90,112)	CKSRYB104K25
C 315	(A,94,109)	CCSRCH220J50
C 316	(A,89,109)	CCSRCH220J50
C 331	(A,74,91)	CKSRYB105K10

Circuit Symbol and No.		Part No.
C 332	(A,61,92)	CKSRYB105K10
C 333	(B,64,86)	CKSRYB104K25
C 341	(A,71,92)	CKSRYB105K10
C 342	(A,63,92)	CKSRYB105K10
C 351	(A,71,98)	CCSRCH100D50
C 352	(A,66,98)	CCSRCH100D50
C 355	(A,61,98)	CCSRCH470J50
C 356	(A,56,98)	CCSRCH470J50
C 361	(A,70,103) 10µF	CCG1182
C 362	(A,67,103) 10µF	CCG1182
C 363	(A,64,103) 10µF	CCG1182
C 364	(A,60,103) 10µF	CCG1182
C 365	(B,62,81)	CKSRYB105K10
C 366	(B,61,84)	CKSRYB104K25
C 367	(A,59,82) 10µF/16V	CCH1565
C 375	(B,72,129)	CKSRYB103K50
C 376	(B,71,129)	CKSRYB103K50
C 377	(B,73,119)	CKSRYB103K50
C 378	(B,71,119)	CKSRYB103K50
C 381	(B,65,77)	CKSQYB225K10
C 382	(A,58,76)	CKSRYB102K50
C 401	(A,51,80)	CCSRCH221J50
C 402	(A,48,80)	CCSRCH221J50
C 411	(A,44,84)	CCSRCH220J50
C 412	(A,44,87)	CCSRCH220J50
C 413	(B,44,74)	CKSRYB104K25
C 421	(A,43,75)	CCSRCH220J50
C 422	(A,43,78)	CCSRCH220J50
C 475	(B,38,131)	CKSRYB103K50
C 476	(B,34,131)	CKSRYB103K50
C 477	(B,36,131)	CKSRYB103K50
C 478	(B,32,131)	CKSRYB103K50
C 501	(B,167,124)	CCSRCH101J50
C 502	(B,170,124)	CKSRYB103K50
C 503	(B,157,104)	CKSQYB103K50
C 504	(B,157,94)	CKSRYB102K50
C 505	(B,138,78)	CKSRYB472K50
C 506	(B,159,102)	CCSRCH100D50
C 507	(A,144,90)	CKSRYB102K50
C 508	(A,140,99)	CKSRYB102K50
C 511	(A,145,71)	CKSRYB472K50
C 512	(A,148,71)	CKSRYB103K50
C 513	(A,139,65)	CKSYB106K6R3
C 514	(B,139,63)	CKSRYB105K10
C 515	(B,141,60)	CKSRYB102K50
C 516	(B,145,61)	CKSQYB225K10
C 517	(A,149,71)	CKSRYB103K50
C 518	(B,151,62)	CKSRYB102K50
C 521	(A,149,76)	CKSRYB392K50
C 522	(A,152,76)	CKSRYB103K50
C 523	(A,145,76)	CKSRYB103K50
C 532	(B,167,87)	CKSRYB103K50
C 533	(B,163,86)	CKSRYB103K50
C 534	(A,149,88) 33µF/10V	CCH1622
C 535	(B,167,56)	CKSRYB472K50
C 536	(B,162,51)	CKSRYB105K10
C 541	(B,151,32)	CKSRYB183K50
C 542	(B,151,28)	CKSRYB183K50
C 545	(A,151,34)	CKSRYB105K10
C 546	(A,151,26)	CKSRYB105K10

Circuit Symbol and No.		Part No.
C 559	(A,145,34)	CKSRYB105K10
C 560	(A,145,26)	CKSRYB105K10
C 561	(B,150,53)	CKSQYB335K6R3
C 562	(A,151,55)	CKSRYB333K50
C 563	(A,149,55)	CKSRYB105K10
C 565	(A,146,56)	CFHXSP683J16
C 566	(A,140,56)	CFHXS333J16
C 568	(A,142,56)	CFHXS333J16
C 569	(A,144,42)	CKSRYB682K50
C 570	(A,149,43)	CKSRYB392K50
C 571	(A,150,41)	CKSRYB334K10
C 572	(B,167,65)	CKSRYB102K50
C 573	(B,142,37)	CKSRYB224K16
C 574	(A,139,46)	CFHXS333J16
C 575	(A,139,42)	CKSRYB333K50
C 576	(A,142,42)	CKSRYB103K50
C 577	(A,138,39)	CKSRYB224K16
C 583	(B,45,28)	CKSRYB105K10
C 584	(B,43,26)	CKSRYB102K50
C 585	(B,35,26)	CKSQYB225K10
C 586	(B,35,30)	CKSRYB102K50
C 587	(A,34,33)	CCSRCH471J50
C 589	(B,36,37)	CKSRYB104K25
C 590	(B,36,35)	CCSRCH471J50
C 591	(A,45,41)	CCSRCH270J50
C 592	(A,45,44)	CCSRCH270J50
C 593	(B,41,28)	CCSRCH101J50
C 601	(B,68,69)	CKSRYB105K10
C 616	(B,77,29)	CKSRYB104K25
C 624	(B,84,24)	CCSRCH101J50
C 628	(B,86,24)	CCSRCH101J50
C 662	(B,76,20)	CKSRYB105K10
C 663	(B,76,22)	CKSRYB102K50
C 685	(B,60,41)	CKSRYB102K50
C 721	(A,37,82)	CKSRYB105K10
C 722	(A,37,85)	CKSRYB105K10
C 742	(A,146,13)	CKSRYB102K50
C 743	(A,149,13)	CKSRYB102K50
C 745	(B,150,12)	CKSRYB102K50
C 746	(B,154,12)	CKSRYB102K50
C 748	(A,154,13)	CCSRCH101J50
C 749	(A,156,13)	CCSRCH101J50
C 750	(A,157,13)	CCSRCH101J50
C 751	(B,156,9)	CCSRCH101J50
C 754	(B,160,9)	CCSRCH101J50
C 755	(A,163,13)	CKSRYB102K50
C 756	(B,161,9)	CCSRCH101J50
C 761	(A,20,44)	CEVW100M16
C 762	(A,17,36)	CKSQYB225K10
C 781	(A,36,73)	CKSRYB105K10
C 782	(A,36,78)	CKSRYB105K10
C 813	(B,25,124)	CKSRYB102K50
C 815	(A,27,124)	CKSRYB102K50
C 831	(B,58,119)	CKSRYB103K50
C 841	(B,58,130)	CKSRYB103K50
C 842	(A,82,90)	CCSRCH471J50
C 855	(B,36,123)	CKSRYB102K50
C 856	(B,38,123)	CKSRYB102K50
C 865	(B,63,130)	CCSRCH181J50
C 866	(B,63,119)	CCSRCH181J50

Circuit Symbol and No.		Part No.
C 867	(A,99,24)	CKSRYB104K25
C 871	(A,90,89)	CKSRYB105K10
C 872	(A,95,87)	CKSRYB105K10
C 873	(A,99,91)	CKSRYB472K50
C 891	(B,77,53)	CKSRYB103K50
C 901	(A,139,137) 1500µF/16V	CCH1345
C 902	(B,116,141)	CKSRYB473K50
C 903	(B,119,141)	CKSRYB473K50
C 905	(A,128,137) 1500µF/16V	CCH1345
C 911	(A,101,100)	CKSRYB224K16
C 921	(A,94,85)	CKSRYB224K16
C 931	(A,90,80)	CKSRYB103K50
C 941	(B,18,30)	CKSRYB105K10
C 951	(A,25,56)	CKSRYB105K10
C 952	(A,17,55)	CKSRYB104K25
C 953	(A,18,52)	CKSYB225K16
C 954	(A,26,58)	CKSYB475K16
C 955	(A,20,64)	CCSRCH221J50
C 956	(A,20,72) 33µF/10V	CCH1622
C 958	(A,58,25)	CKSRYB105K10
C 972	(A,18,106)	CKSRYB102K50
C 973	(A,20,99) 100µF/16V	CCH1565
C 982	(A,54,15)	CKSRYB104K25
C 984	(B,60,6)	CKSYB104K50
C 991	(B,133,135)	CKSRYB473K50
C 992	(A,12,82)	CKSRYB102K50
C 993	(A,20,79) 100µF/16V	CCH1565
C 994	(B,16,75)	CKSRYB104K25
C 995	(B,129,135)	CKSRYB473K50
C 997	(A,128,38)	CKSRYB104K25
C 998	(A,123,38)	CKSRYB104K25

B

Unit Number:
Unit Name:Keyboard Unit

MISCELLANEOUS

IC 951	(B,27,50) IC	LC75700TS
Q 911	(B,62,50) Transistor	2SA1235A-12
Q 912	(B,52,157) Transistor	2SA1235A-12
Q 913	(B,60,157) Transistor	2SA1235A-12
Q 914	(B,55,52) Transistor	2SA1235A-12
Q 915	(B,68,47) Transistor	2SA1235A-12
Q 916	(B,37,90) Transistor	2SA1235A-12
Q 917	(B,29,90) Transistor	2SA1235A-12
Q 918	(B,29,113) Transistor	2SA1235A-12
Q 919	(B,37,113) Transistor	2SA1235A-12
Q 920	(B,68,37) Transistor	2SA1235A-12
Q 921	(B,51,164) Transistor	2SA1235A-12
Q 923	(B,56,164) Transistor	2SA1235A-12
Q 924	(B,62,164) Transistor	2SA1235A-12
Q 925	(B,68,42) Transistor	2SA1235A-12
Q 926	(B,65,52) Transistor	2SA1235A-12
Q 951	(B,42,47) Transistor	DTC144EU
Q 971	(B,33,31) Transistor	2SC4081
Q 972	(B,25,32) Transistor	UMX1N
Q 991	(B,63,44) Transistor	2SC4081
D 901	(A,62,155) LED	SML-310FC
D 902	(A,65,175) LED	SML-310FC

Circuit Symbol and No.		Part No.
D 903	(A,80,180) LED	SML-310FC
D 904	(A,62,149) LED	SML-310FC
D 905	(A,80,129) LED	SML-310FC
D 906	(A,80,111) LED	SML-310FC
D 907	(A,62,55) LED	SML-310FC
D 908	(A,80,75) LED	SML-310FC
D 909	(A,80,93) LED	SML-310FC
D 910	(A,62,49) LED	SML-310FC
D 911	(A,65,28) LED	SML-310FC
D 912	(A,80,23) LED	SML-310FC
D 913	(A,31,68) LED	SML-310FC
D 914	(A,31,53) LED	SML-310FC
D 915	(A,31,48) LED	SML-310FC
D 916	(A,31,94) LED	SML-310FC
D 917	(A,31,89) LED	SML-310FC
D 918	(A,31,73) LED	SML-310FC
D 919	(A,31,109) LED	SML-310FC
D 920	(A,31,115) LED	SML-310FC
D 921	(A,31,130) LED	SML-310FC
D 922	(A,31,136) LED	SML-310FC
D 923	(A,31,151) LED	SML-310FC
D 924	(A,31,156) LED	SML-310FC
D 925	(A,11,21) LED	SML-310FC
D 926	(A,11,15) LED	SML-310FC
D 927	(A,11,9) LED	SML-310FC
D 928	(A,11,182) LED	SML-310FC
D 929	(A,11,188) LED	SML-310FC
D 930	(A,11,195) LED	SML-310FC
D 931	(A,39,181) LED	SML-310FC
D 932	(A,31,196) LED	SML-310FC
D 933	(A,22,181) LED	SML-310FC
D 934	(A,54,183) LED	SML-310FC
D 935	(A,54,184) LED	SML-310FC
D 936	(A,65,186) LED	SML-310FC
D 941	(A,39,23) LED	SML-310FC
D 942	(A,31,8) LED	SML-310FC
D 943	(A,22,23) LED	SML-310FC
D 944	(A,54,21) LED	SML-310FC
D 945	(A,54,20) LED	SML-310FC
D 946	(A,65,17) LED	SML-310FC
D 951	(A,43,138) Diode	1SS355
D 952	(A,43,107) Diode	1SS355
D 953	(A,43,68) Diode	1SS355
D 954	(A,43,89) Diode	1SS355
D 955	(A,60,37) Diode	1SS355
D 956	(A,23,48) Diode	1SS355
D 957	(A,43,145) Diode	1SS355
D 958	(A,52,151) Diode	1SS355
D 959	(A,52,163) Diode	1SS355
D 960	(A,52,156) Diode	1SS355
D 962	(A,52,38) Diode	1SS355
D 963	(A,76,48) Diode	1SS355
D 964	(B,23,41) Diode	1SS355
D 971	(A,16,38) LED	SML-310DT
D 972	(A,16,166) LED	SML-310DT
D 973	(A,14,38) LED	SML-310FC
D 974	(A,14,166) LED	SML-310FC
D 991	(B,61,48) Diode	UDZS5R1(B)
L 951	(B,38,51) Inductor	CTF1473
S 901	(A,36,133) Switch	CSG1182

Circuit Symbol and No.		Part No.
S 902	(A,36,112) Switch	CSG1182
S 903	(A,36,70) Switch	CSG1182
S 904	(A,36,91) Switch	CSG1182
S 905	(A,66,51) Switch	CSG1182
S 906	(A,35,50) Switch	CSG1182
S 907	(A,35,154) Switch	CSG1182
S 908	(A,66,152) Switch	CSG1182
S 931	(A,54,177) Switch	CSG1172
S 932	(A,76,175) Switch	CSG1172
S 941	(A,54,27) Switch	CSG1172
S 942	(A,76,29) Switch	CSG1172
VR935	(A,38,183) Encoder(TUNE)	CSD1124
VR945	(A,38,15) Encoder(PWR•VOL)	CSD1123

RESISTORS

R 911	(B,61,53)	RS1/16S331J
R 912	(B,52,154)	RS1/16S101J
R 913	(B,60,154)	RS1/16S101J
R 914	(B,58,52)	RS1/16S101J
R 915	(B,70,51)	RS1/16S101J
R 916	(B,37,93)	RS1/16S121J
R 917	(B,29,93)	RS1/16S121J
R 918	(B,29,110)	RS1/16S121J
R 919	(B,37,110)	RS1/16S121J
R 920	(B,66,40)	RS1/16S101J
R 921	(B,51,161)	RS1/16S101J
R 923	(B,56,161)	RS1/16S121J
R 924	(B,62,161)	RS1/16S101J
R 925	(B,67,45)	RS1/16S121J
R 926	(B,69,53)	RS1/16S101J
R 951	(B,38,41)	RS1/16S102J
R 952	(B,33,36)	RS1/16S102J
R 953	(B,38,43)	RS1/16S102J
R 954	(B,38,48)	RS1/16S102J
R 955	(B,35,48)	RS1/16S472J
R 956	(B,34,48)	RS1/16S473J
R 957	(B,34,52)	RS1/16S393J
R 958	(B,20,41)	RS1/16S102J
R 959	(B,22,45)	RS1/16S102J
R 960	(B,20,45)	RS1/16S102J
R 961	(B,24,56)	RS1/16S102J
R 971	(B,39,31)	RS1/16S472J
R 972	(B,36,31)	RS1/16S223J
R 974	(B,25,36)	RS1/16S102J
R 975	(B,30,32)	RS1/16S470J
R 976	(B,30,30)	RS1/16S151J
R 977	(B,37,29)	RS1/16S121J
R 978	(B,30,34)	RS1/16S102J
R 991	(B,63,36)	RS1/16S472J
R 992	(B,65,33)	RS1/16S223J
R 993	(B,63,40)	RS1/16S271J
R 994	(B,64,48)	RS1/16S561J

CAPACITORS

C 911	(B,58,49)	CKSRYB473K50
C 951	(B,38,53)	CKSRYB104K25
C 952	(B,36,52)	CKSQYB105K16
C 957	(B,38,50)	CKSRYB472K50
C 958	(B,33,52)	CKSRYB102K50
C 971	(B,38,31)	CKSRYB472K50
C 991	(B,57,46)	CKSRYB104K25
C 992	(B,59,45)	CKSRYB104K25
C 993	(B,63,33)	CKSRYB472K50

C

Unit Number:CWX2920
Unit Name:Control Unit(G2T)

MISCELLANEOUS

IC 201	(A,14,28) IC	UPD63711GC
IC 301	(B,21,21) IC	BD7962FM
IC 302	(B,30,80) IC	S-L2980A33MC-C6S
IC 303	(B,38,108) IC	BA05SFP
IC 501	(A,14,63) IC	BU9423AKS
IC 502	(A,14,78) IC	HY57V161610ETP-8
IC 504	(B,11,68) IC	TC74VHCT08AFT
IC 505	(A,27,59) IC	TC74VHC541FT
IC 702	(A,13,104) IC	PEG024B
Q 101	(B,30,50) Transistor	2SB1132
Q 601	(B,34,99) Transistor	DTC114EU
Q 602	(B,38,99) Transistor	DTA123JU
Q 603	(B,38,90) Transistor	DTC314TU
Q 604	(B,38,95) Transistor	DTC314TU
Q 702	(A,14,89) Transistor	UMD3N
D 101	(B,31,44) Diode	1SS355
D 301	(B,33,103) Diode	S1G-6904G2P
D 303	(B,40,102) Diode	S1G-6904G2P
D 601	(B,35,95) Diode	MA152WA
L 201	(B,6,38) Inductor	CTF1306
L 601	(A,25,92) Inductor	CTF1295
TH701	(B,12,100) Thermistor	CCX1058
X 201	(A,7,40) Radiator 16.93MHz	CSS1581
X 701	(B,19,103) Radiator 10.00MHz	CSS1428

RESISTORS

R 101	(B,34,50)	RS1/8S120J
R 102	(B,31,55)	RS1/8S100J
R 103	(B,30,41)	RS1/16S222J
R 104	(B,39,52)	RS1/16S102J
R 201	(B,20,35)	RS1/16S104J
R 202	(A,8,54)	RAB4CQ681J
R 205	(A,16,16)	RS1/16S103J
R 206	(A,17,16)	RS1/16S393J
R 207	(A,22,18)	RS1/16S0R0J
R 212	(A,23,18)	RS1/16S562J
R 213	(A,23,16)	RS1/16S153J
R 214	(A,25,16)	RS1/16S123J
R 220	(B,17,45)	RS1/16S471J
R 221	(A,19,48)	RS1/16S681J
R 297	(A,8,44)	RS1/16S181J
R 298	(A,23,47)	RS1/16S681J
R 299	(B,6,41)	RS1/16S470J
R 301	(B,13,24)	RS1/16S103J
R 302	(B,14,24)	RS1/16S153J
R 303	(B,13,26)	RS1/16S103J
R 304	(B,14,26)	RS1/16S103J
R 305	(B,12,18)	RS1/16S272J
R 306	(B,11,18)	RS1/16S272J
R 307	(B,33,25)	RS1/16S182J

Circuit Symbol and No.		Part No.
R 308	(B,30,25)	RS1/16S272J
R 309	(B,14,18)	RS1/16S682J
R 310	(B,9,17)	RS1/16S822J
R 311	(B,20,9)	RS1/16S103J
R 312	(B,31,101)	RS1/16S681J
R 313	(B,20,10)	RS1/16S103J
R 314	(A,4,113)	RS1/16S153J
R 315	(A,30,20)	RS1/16S153J
R 316	(B,23,10)	RS1/16S153J
R 317	(A,27,20)	RS1/16S103J
R 318	(B,23,9)	RS1/16S103J
R 319	(B,29,19)	RS1/16S102J
R 320	(B,31,25)	RS1/16S392J
R 322	(B,11,16)	RS1/16S103J
R 323	(B,11,14)	RS1/16S103J
R 324	(B,10,12)	RS1/16S103J
R 325	(B,10,13)	RS1/16S103J
R 504	(B,8,72)	RS1/16S331J
R 512	(A,9,48)	RS1/16S562J
R 513	(A,9,50)	RS1/16S822J
R 516	(B,7,72)	RS1/16S331J
R 601	(A,30,82)	RS1/16S102J
R 602	(A,28,82)	RS1/16S102J
R 603	(B,41,92)	RS1/16S223J
R 604	(B,41,95)	RS1/16S223J
R 605	(A,22,94)	RS1/16S102J
R 606	(A,28,95)	RS1/16S681J
R 607	(A,28,108)	RS1/16S681J
R 608	(A,28,96)	RS1/16S102J
R 609	(A,33,111)	RAB4CQ681J
R 701	(B,24,109)	RAB4CQ104J
R 702	(B,12,103)	RS1/16S222J
R 703	(B,17,111)	RS1/16S681J
R 704	(A,25,109)	RAB4CQ222J
R 705	(A,24,97)	RAB4CQ681J
R 706	(B,25,112)	RS1/16S473J
R 707	(B,23,102)	RS1/16S473J
R 708	(A,26,103)	RS1/16S222J
R 709	(B,24,105)	RS1/16S222J
R 711	(A,8,88)	RAB4CQ104J
R 712	(A,29,106)	RS1/16S473J
R 713	(B,17,108)	RS1/16S681J
R 714	(B,20,112)	RS1/16S473J
R 715	(A,8,92)	RAB4CQ222J
R 716	(A,23,100)	RS1/16S103J
R 718	(A,26,96)	RS1/16S473J
R 720	(A,22,114)	RS1/16S103J
R 724	(B,4,115)	RS1/16S104J
R 727	(B,17,112)	RS1/16S0R0J
R 734	(B,23,112)	RS1/16S104J
R 736	(A,7,116)	RS1/16S681J
R 739	(A,26,114)	RS1/16S473J
R 741	(A,5,89)	RS1/16S104J
R 742	(A,3,89)	RS1/16S222J
R 743	(A,3,92)	RS1/16S681J
R 758	(B,12,102)	RS1/16S223J
R 759	(B,18,97)	RS1/16S103J
R 760	(B,18,94)	RS1/16S433J
R 767	(B,10,103)	RS1/16S154J
R 775	(A,19,90)	RAB4CQ681J

CAPACITORS

Circuit Symbol and No.			Part No.
C 101	(B,35,45)		CKSRYB103K25
C 102	(B,33,45)		CKSRYB104K25
C 103	(B,23,55)		CEVLW101M10
C 104	(B,23,47)		CEVLW101M6R3
C 105	(B,31,41)		CKSRYB224K16
C 106	(B,35,42)		CKSRYB224K16
C 107	(B,14,29)		CKSRYB224K16
C 201	(B,23,35)		CKSRYB104K25
C 202	(B,21,67)		CEVLW220M16
C 203	(A,18,13)		CKSRYB473K25
C 204	(A,16,13)		CKSRYB182K50
C 205	(A,20,13)		CKSRYB104K25
C 206	(A,20,14)		CKSRYB152K50
C 207	(A,20,18)		CKSRYB224K16
C 208	(A,22,16)		CCSRCH180J50
C 209	(A,25,18)		CCSRCK2R0D50
C 210	(B,23,33)		CCSRCH181J50
C 211	(B,20,32)		CCSRCH510J50
C 212	(A,26,35)		CKSRYB682K50
C 213	(A,16,18)		CKSRYB104K25
C 214	(A,23,36)		CKSRYB104K25
C 215	(A,14,40)		CKSRYB103K25
C 216	(A,10,40)		CKSRYB104K25
C 217	(A,4,35)		CKSRYB104K25
C 218	(A,3,29)		CKSRYB104K25
C 219	(A,6,19)		CKSRYB104K25
C 220	(A,24,28)		CKSRYB104K25
C 222	(A,12,40)		CKSRYB104K25
C 223	(A,20,48)		CKSRYB102K50
C 224	(A,15,40)		CKSRYB104K25
C 225	(A,15,42)		CKSRYB103K25
C 226	(A,7,44)		CCSRCH470J50
C 227	(A,4,29)		CCSRCH470J50
C 228	(B,13,36)		CKSRYB104K25
C 301	(B,23,40)		CEVLW101M10
C 302	(B,30,77)		CKSRYB224K16
C 303	(B,30,107)		CKSRYB224K16
C 305	(B,30,83)		CKSRYB105K10
C 306	(B,34,114)	10µF/10V	CCH1349
C 307	(B,30,110)		CKSRYB224K16
C 309	(B,26,33)		CKSYB475K16
C 502	(B,13,64)		CKSRYB104K25
C 505	(A,4,60)		CKSRYB104K25
C 508	(A,23,54)		CKSRYB104K25
C 509	(A,22,85)		CKSRYB104K25
C 512	(A,6,85)		CKSRYB104K25
C 601	(B,22,73)		CEVLW220M6R3
C 602	(B,22,61)		CEVLW220M6R3
C 701	(B,15,95)		CKSRYB104K25
C 702	(A,17,94)		CKSRYB104K25
C 703	(B,18,96)		CKSRYB103K25
C 704	(B,23,100)		CKSRYB103K25
C 705	(B,7,104)		CKSRYB104K25
C 706	(A,23,103)		CKSRYB104K25
C 707	(B,11,98)		CKSRYB103K25
C 708	(B,14,97)		CKSRYB473K25

Circuit Symbol and No.		Part No.

E
Unit Number:
Unit Name:PCB Unit(Load)

Q 21	Photo-transistor	CPT231SCTU
Q 22	Photo-transistor	CPT231SCTU
L 21	Inductor	LCYBR15J1608
L 22	Inductor	LCYBR15J1608
S 21	Spring Switch(LOAD1)	CSN1051
S 22	Spring Switch(LOAD2)	CSN1052

D
Unit Number:CWX2614
Unit Name:PCB Unit(LED)

D 31	Chip LED	CL205IRXTU
D 32	Chip LED	CL205IRXTU
S 31	Spring Switch(CAMLOAD)	CSN1052
S 32	Spring Switch(CAMEOK)	CSN1052
R 31		RS1/16S0R0J

G
Unit Number:CWX2611
Unit Name:PCB Unit

L 1	Inductor	CTF1389
S 41	Spring Switch(LOAD3)	CSN1051

F
Unit Number:CWX2613
Unit Name:PCB Unit(Side)

MISCELLANEOUS

S 11	Spring Switch(CAMCLMP)	CSN1052
VR11	Semi-fixed 1kΩ(B)	CCP1338

RESISTORS

R 11		RS1/16S562J
R 12		RS1/16S562J
R 13		RS1/10S391J
R 14		RS1/10S391J
R 15		RS1/16S0R0J
R 16		RS1/16S0R0J

CAPACITORS

C 12		CKSRYB104K25

H
Unit Number:
Unit Name:PCB Unit(M2 Unit)

MISCELLANEOUS

IC 1	IC	BA6849FS
S 1	Switch(HOME)	CSN1057
S 2	Switch(CLAMP)	CSN1057

Circuit Symbol and No.		Part No.

RESISTORS

R 1		RS1/16S221J
R 2		RS1/16S221J
R 3		RS1/16S4R7J
R 4		RS1/16S1R0J

CAPACITORS

C 1		CKSRYB104K16

I
Unit Number:EWM1047
Unit Name:Deck Unit

MISCELLANEOUS

IC 251	IC	HA12216F
IC 351	IC	BA6923FP
Q 271	Transistor	2SC4116
VR301	Semi-fixed 33kΩ(B)	CCP1280
VR302	Semi-fixed 33kΩ(B)	CCP1280

RESISTORS

R 255		RS1/16S181J
R 256		RS1/16S181J
R 257		RS1/16S183J
R 258		RS1/16S183J
R 259		RS1/16S133J
R 260		RS1/16S133J
R 261		RS1/16S274J
R 262		RS1/16S274J
R 271		RS1/16S183J
R 272		RS1/8S0R0J
R 273		RS1/16S0R0J
R 275		RS1/16S473J
R 276		RS1/16S104J
R 277		RS1/16S224J
R 278		RS1/16S104J
R 281		RS1/8S0R0J
R 282		RS1/8S0R0J
R 283		RS1/8S0R0J
R 284		RS1/8S0R0J
R 287		RS1/8S0R0J
R 288		RS1/8S0R0J
R 292		RS1/8S0R0J
R 296		RS1/16S0R0J
R 321		RS1/8S0R0J
R 361		RS1/16S0R0J
R 362		RS1/8S301J
R 401		RS1/16S153J
R 402		RS1/16S332J
R 403		RS1/16S911J
R 404		RS1/16S274J

CAPACITORS

C 251		CKSRYB391K50
C 252		CKSRYB391K50
C 253		CKSRYB391K50
C 254		CKSRYB391K50
C 255		CKSRYB103K50

Circuit Symbol and No.	Part No.
C 256	CKSRYB103K50
C 271	CEH1R0M50
C 272	CKSRYB104K25
C 301	CKSRYB104K25
C 302	CKSRYB104K25
C 309	CKSRYB104K25
C 310	CKSRYB104K25
C 351	CKSQYB224K16
C 352	CKSRYB472K50
C 353	CKSRYB103K50
C 354	CKSRYB103K50
C 355	CKSQYB104K50
C 401	CKSRYB392K50
C 402	CKSRYB334K10
C 403	CKSRYB223K25
C 404	CKSRYB103K50
C 405	CKSRYB333K16

J

Unit Number:EWM1041
Unit Name:Sensor Unit

MISCELLANEOUS

L 101	Inductor	CTF1546
L 102	Inductor	CTF1546
S 101	Switch(LOAD)	ESG1007
S 102	Switch(MODE)	ESG1007
S 103	Switch(70μS)	ESG1007
Q 101	Photo-reflector	EGN1004

Miscellaneous Parts List

M 1	Motor Unit(MAIN)	EXA1618
M 2	Motor Unit(SUB)	EXA1660
HD1	Head Assy	EXA1594
M 1	Motor Unit(-A)(CAMGEAR)	CXC1144
M 2	Motor Unit(-B)(ELEVATION)	CXC1145
M 3	Motor Unit(-A)(CRG)	CXC4658
VR1	Variable Resistor 10kΩ	CCW1023
	PU Unit(Service)(PX1)	CXX1569