


9. EXPLODED VIEWS AND PARTS LIST

- NOTES :**
- Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.
 - The  mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
 - Screw adjacent to  mark on the product are used for disassembly.
 - For the applying amount of lubricants or glue, follow the instructions in this manual.
(In the case of no amount instructions, apply as you think it appropriate.)

9.1 PACKING SECTION

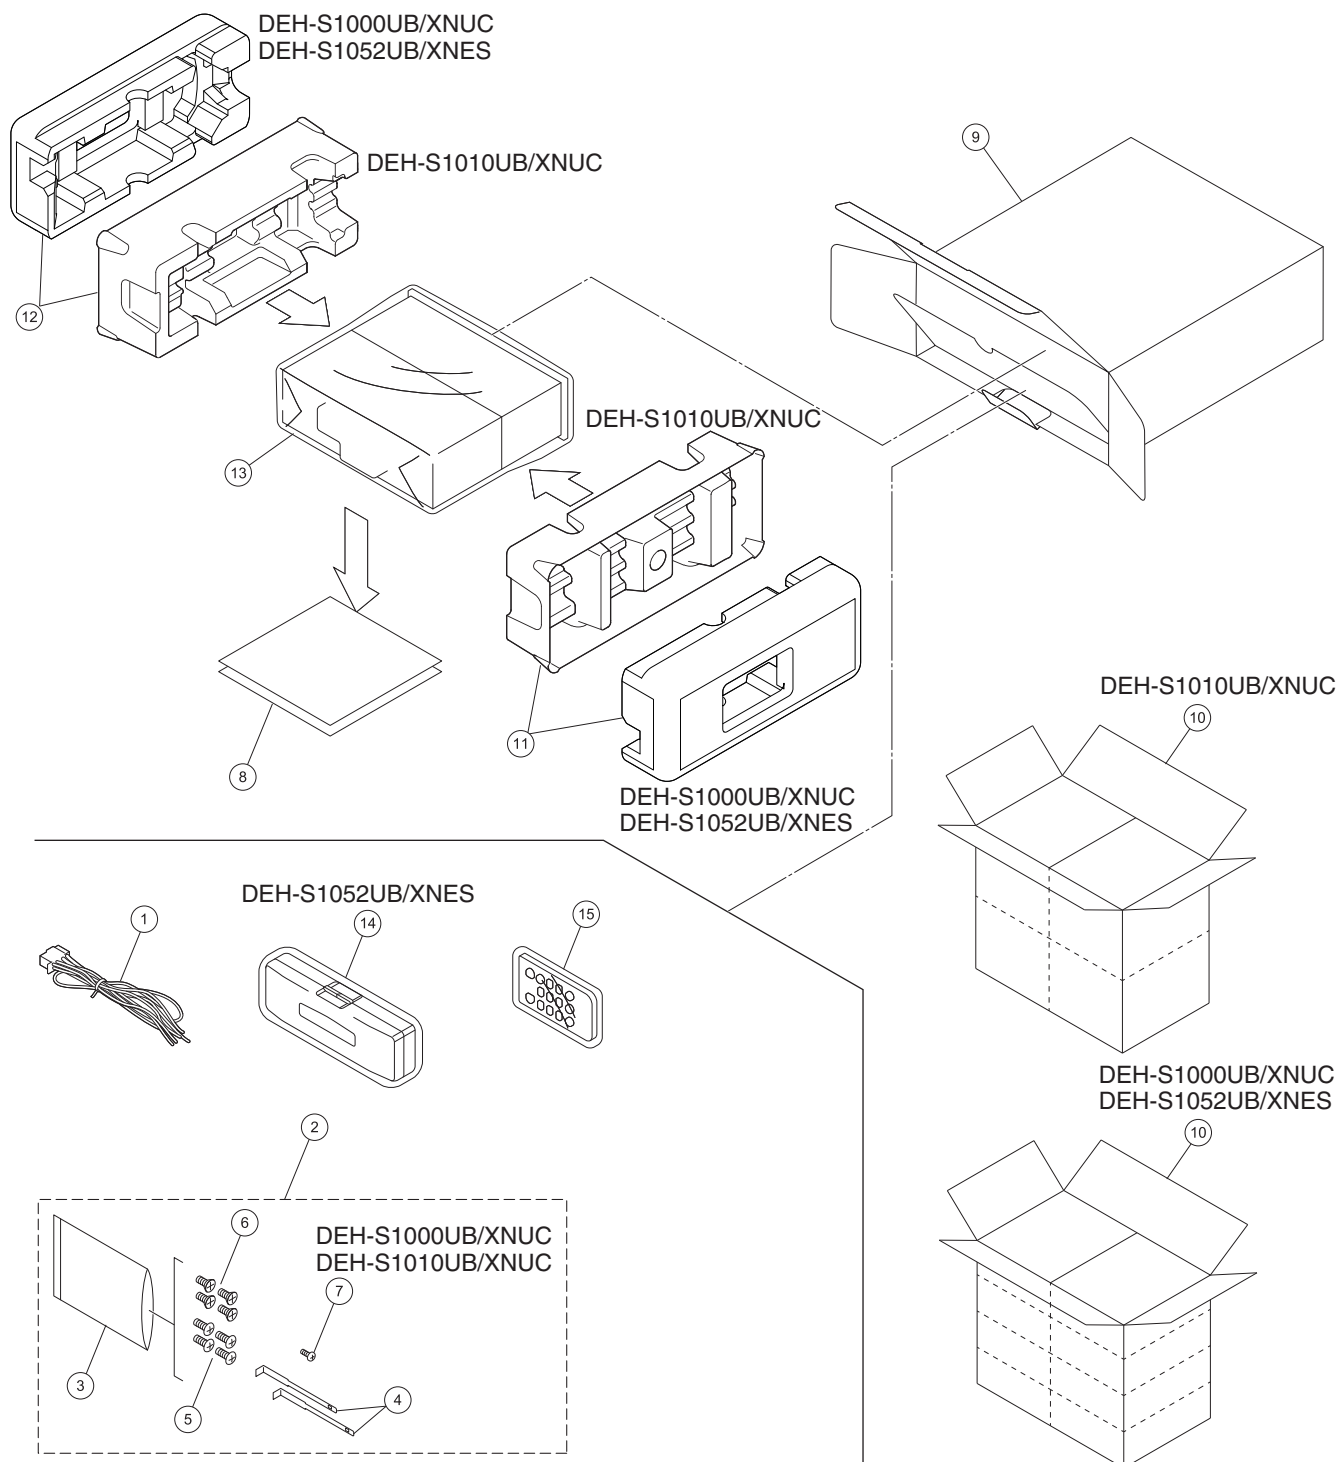

(1) PACKING SECTION PARTS LIST

Mark No.	Description	Part No.	Mark No.	Description	Part No.
1	Cord Assy	CDP1480	10	Contain Box	See Contrast table (2)
2	Accessory Assy	See Contrast table (2)	11	Protector	See Contrast table (2)
3	Polyethylene Bag	CEG1160	12	Protector	See Contrast table (2)
4	Handle	QNC3021	13	Polyethylene Bag	See Contrast table (2)
5	Screw	CBA2384	14	Case Assy	See Contrast table (2)
6	Screw	See Contrast table (2)	15	Card Remote Control Unit	CXE9606
7	Screw	See Contrast table (2)			
8-1	Owner's Manual	See Contrast table (2)			
8-2	Warranty Card	See Contrast table (2)			
9	Unit Box	See Contrast table (2)			

(2) CONTRAST TABLE


DEH-S1000UB/XNUC, DEH-S1010UB/XNUC and DEH-S1052UB/XNES are constructed the same except for the following:

Mark	No.	Symbol and Description	DEH-S1000UB/XNUC	DEH-S1010UB/XNUC	DEH-S1052UB/XNES
	2	Accessory Assy	QEA3337	QEA3337	QEA3338
	6	Screw	CBA2383	CBA2383	Not used
	7	Screw	BPZ20P060FTC	BPZ20P060FTC	Not used
	8-1	Owner's Manual	QRD3501	QRD3501	QRD3503
	8-2	Warranty Card	QRY3001	QRY3001	Not used
	9	Unit Box	QHG4173	QHG4174	QHG4180
	10	Contain Box	QHL4173	QHL4174	QHL4180
	11	Protector	QHP3048	CHP4103	QHP3048
	12	Protector	QHP3048	CHP4104	QHP3048
	13	Polyethylene Bag	CEG1173	CEG1173	QEG3001
	14	Case Assy	Not used	Not used	QXA3129

Owner's Manual, Installation Manual

Part No.	Language
QRD3501	English, French, Spanish(Espanol)
QRD3503	English, Traditional Chinese, Persian, Arabic

9.2 EXTERIOR SECTION

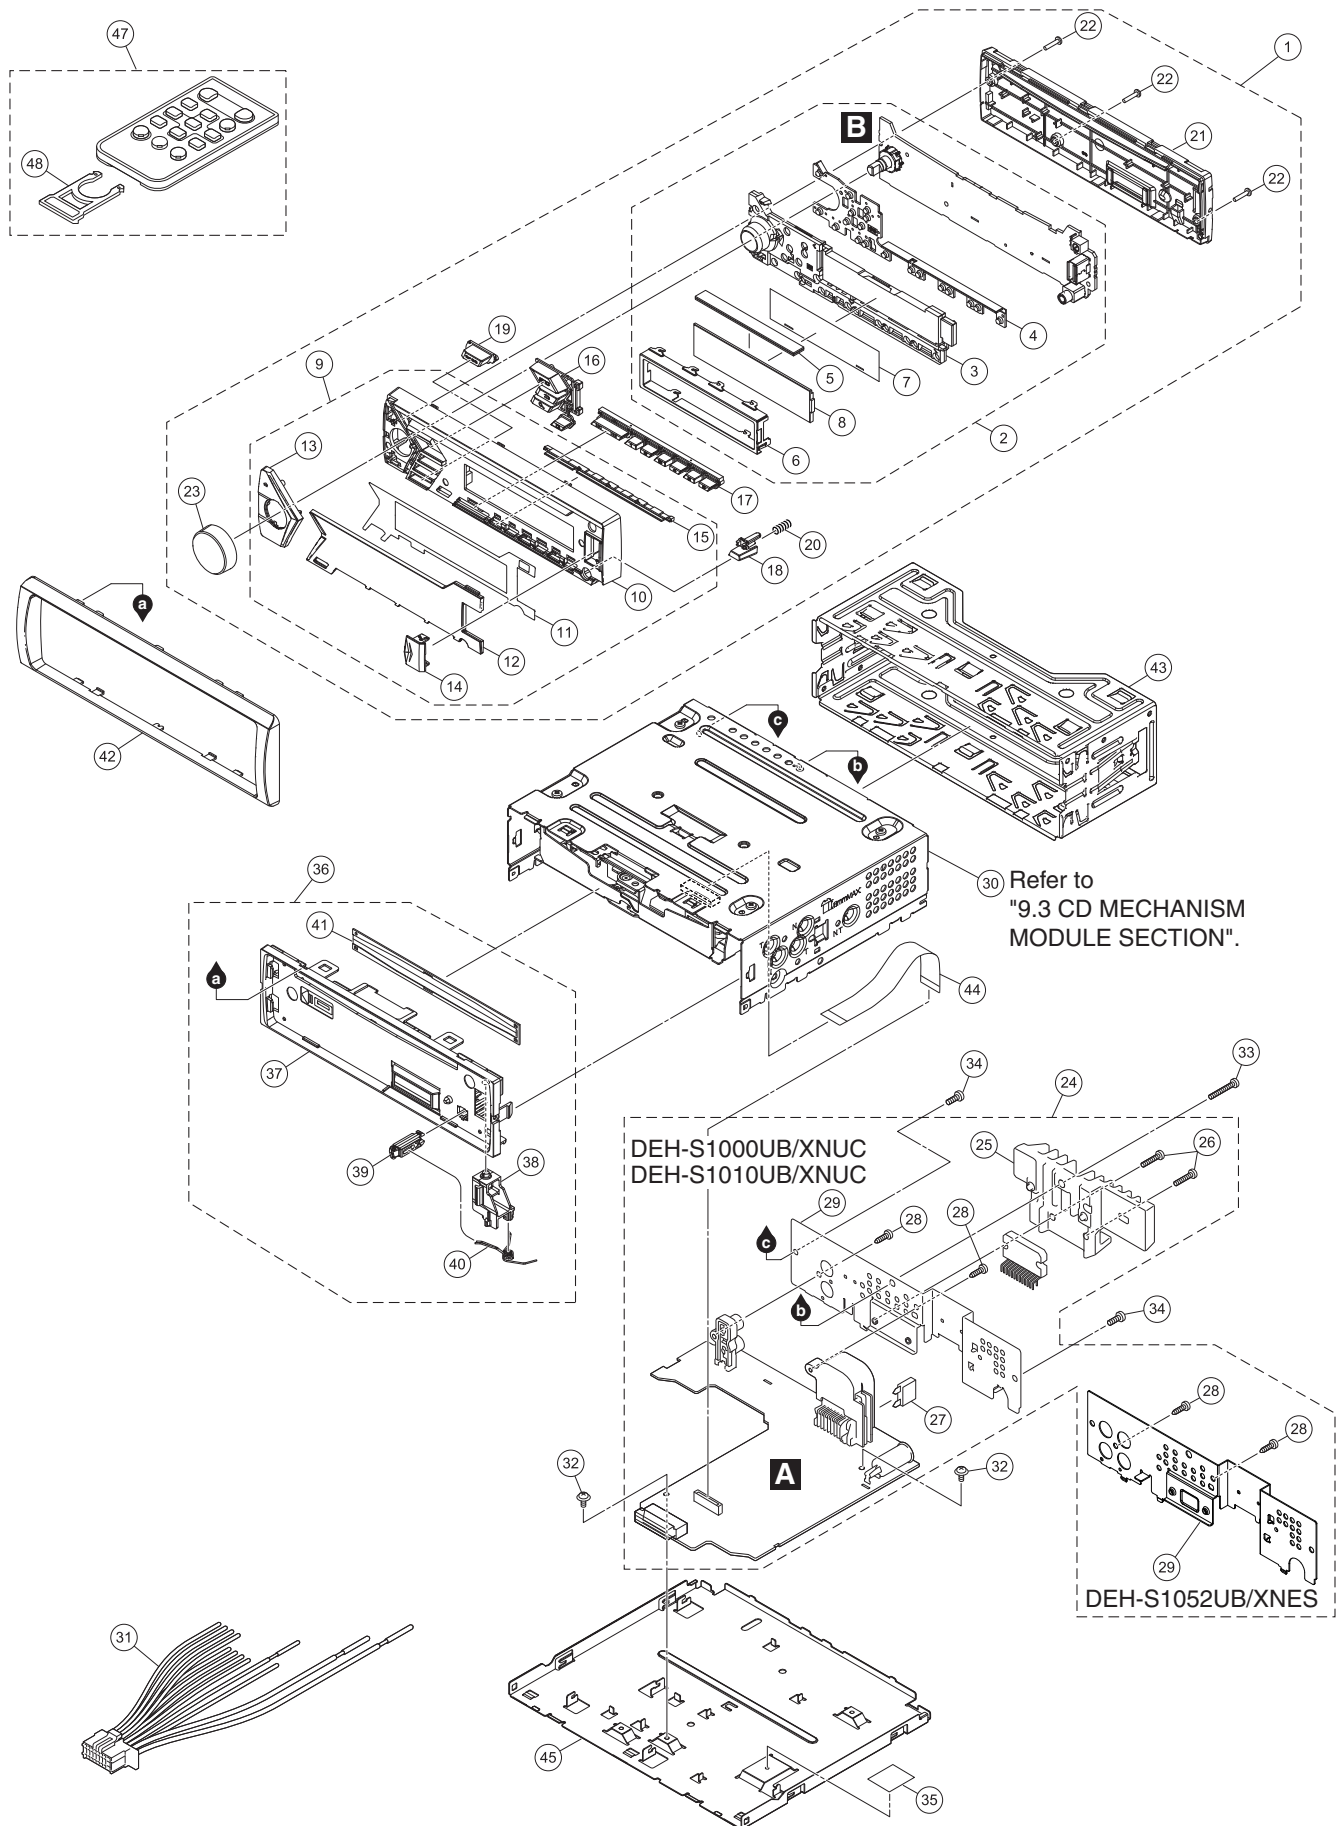

(1) EXTERIOR SECTION PARTS LIST

	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>		<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
A	1	Detach Grille Assy	See Contrast table (2)		26	Screw	BSZ26P120FTC
	2	Keyboard Unit	See Contrast table (2)	⚠	27	Fuse (10 A)	YEK5001
	3	Lighting Conductor	QNV3149		28	Screw	BPZ26P080FTC
	4	Contact Rubber	QNV3144		29	Holder	See Contrast table (2)
	5	Rubber Connector	QNV3129		30	CD Mechanism Module (11.6VA_T07)	CXK5808
	6	Holder	QNC3130			CD Mechanism Module (S11.6_T07)	CXK5807
	7	Sheet	QNM3159	31	Cord Assy	CDP1480	
	8	Segment LCD (V1801)	CAW2056	32	Screw	ASZ26P050FTC	
	9	Grille Unit	See Contrast table (2)	33	Screw	BSZ26P120FTC	
	* 10	Grille	QNS4165	34	Screw	BSZ26P060FTC	
B	* 11	DS Tape	QNM3205	35	Sheet	See Contrast table (2)	
	* 12	Plate	QNS4166	36	Panel Assy	See Contrast table (2)	
	* 13	Button(EJECT)	QAC3275	37	Panel	QNS3126	
	* 14	Door	See Contrast table (2)	38	Arm	QNV3025	
	* 15	Lighting Conductor	QNV3143	39	Button	QNV3026	
	16	Button(SRC)	QAC3278	40	Spring	QBH3001	
	17	Button(TRACK, 1-6)	QAC3279	41	Cover	QNM3029	
	18	Button(DETACH)	QAC3280	42	Panel	QNS3568	
	19	Button(EQ)	QAC3283	43	Holder	QNC3020	
	20	Spring	CBH2210	44	FFC	QDE3029	
C	21	Cover	QNS4167	45	Case	See Contrast table (2)	
	22	Screw	BPZ20P100FTC	46	•••••		
	23	Knob Unit	QXA5051	47	Card Remote Control Unit	CXE9606	
	24	Tuner Amp Unit	See Contrast table (2)	48	Cover	CNU3681	
	25	Heat Sink	See Contrast table (2)				

Notes: For No.30, please refer to "1.3 NOTES ON REPLACING PARTS" for part distinguish.

D


(2) CONTRAST TABLE

DEH-S1000UB/XNUC, DEH-S1010UB/XNUC and DEH-S1052UB/XNES are constructed the same except for the following:

	<u>Mark</u>	<u>No.</u>	<u>Symbol and Description</u>	<u>DEH-S1000UB/XNUC</u>	<u>DEH-S1010UB/XNUC</u>	<u>DEH-S1052UB/XNES</u>
		1	Detach Grille Assy	QXA5075	QXA5076	QXA5082
		2	Keyboard Unit	QWM4733	QWM4733	QWM4664
		9	Grille Unit	QXA5125	QXA5126	QXA5132
	*	14	Door	QAT3028	QAT3028	QAT3029
		24	Tuner Amp Unit	QWM4715	QWM4739	QWM4722
E		25	Heat Sink	QNR3010	QNR3010	QNR3002
		29	Holder	QNC3051	QNC3051	QNC3049
		35	Sheet	QNM3175	QNM3175	QNM3135
		36	Panel Assy	QXA3261	*CXE3802	QXA3261
		45	Case	QNB3043	QNB3043	QNB3033

F

9.3 CD MECHANISM MODULE

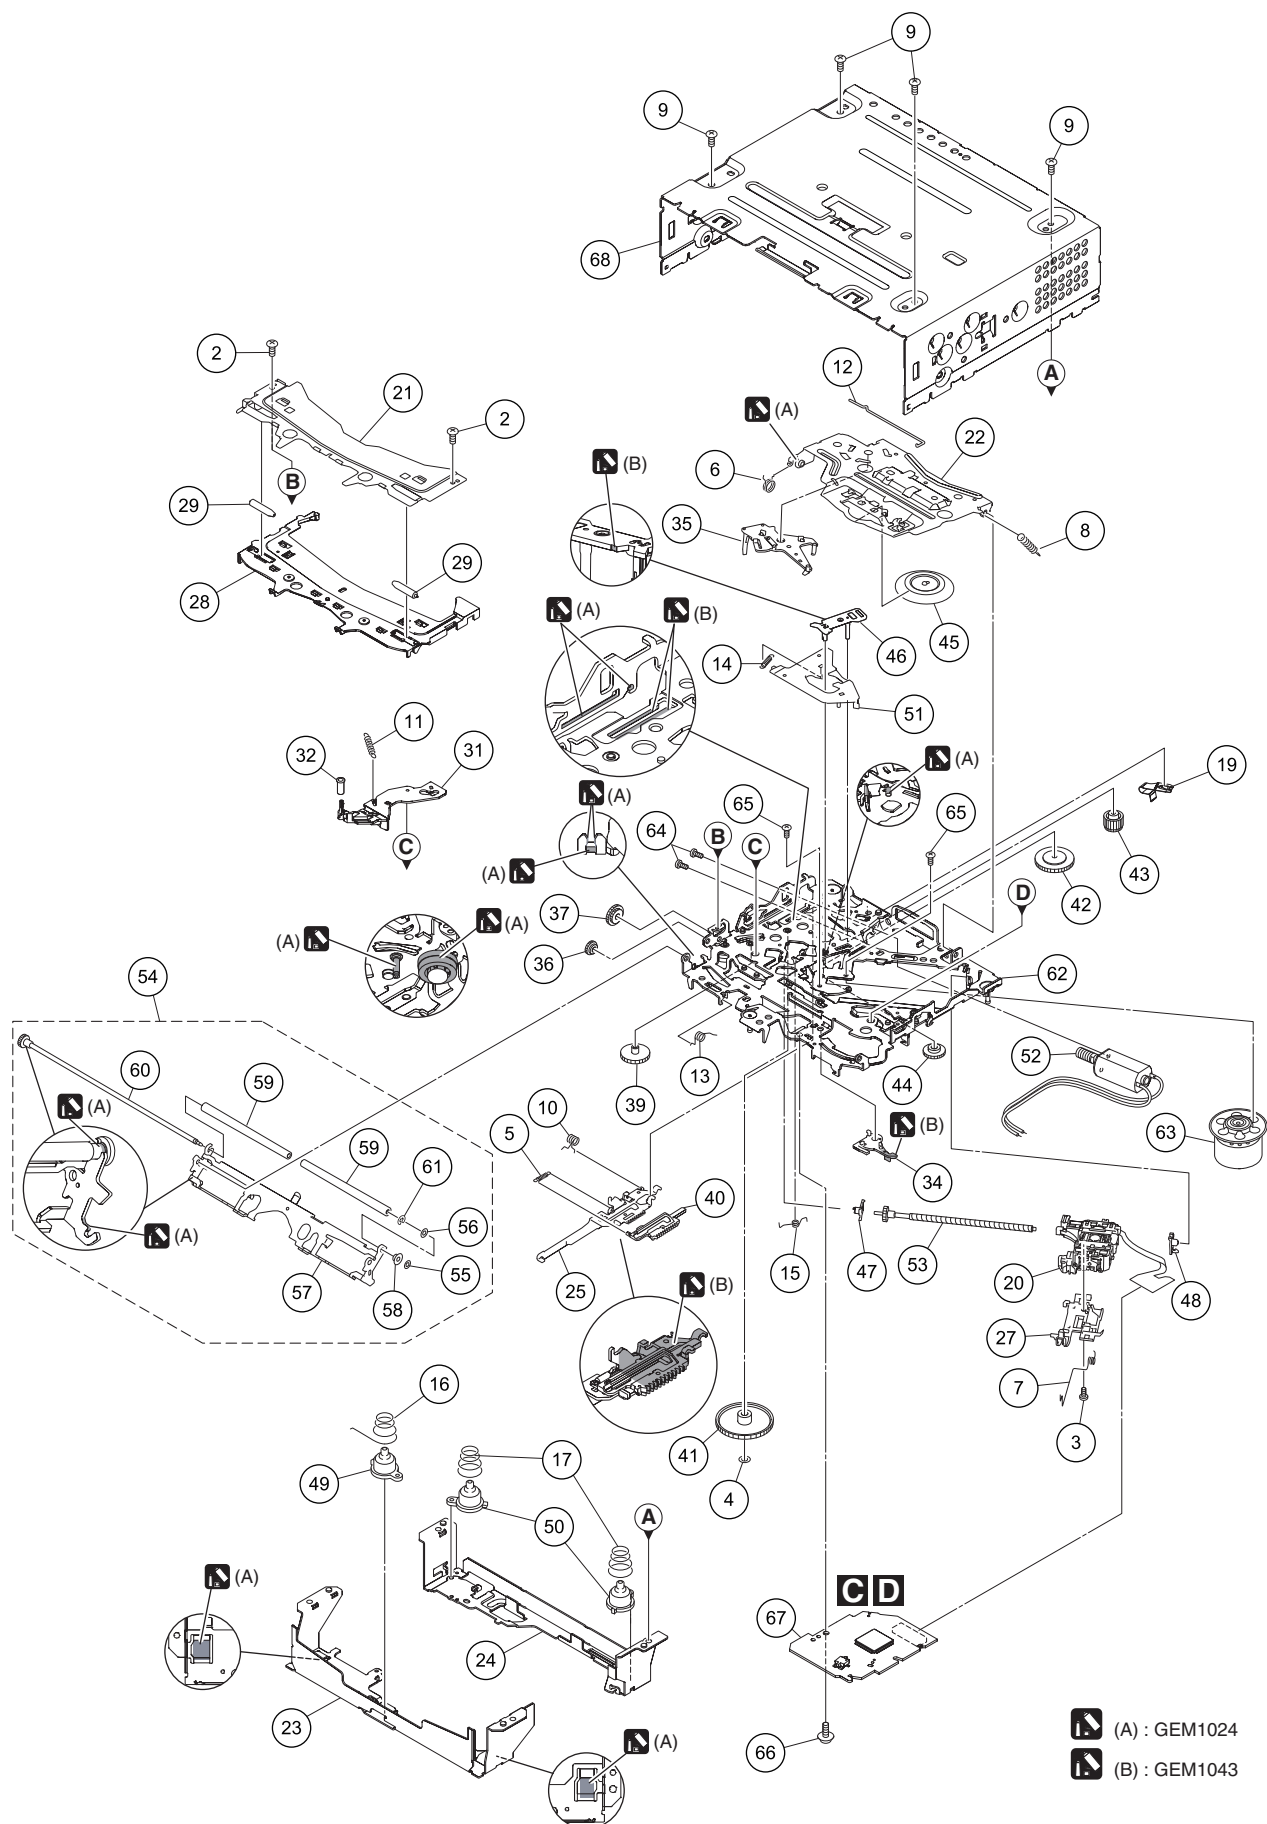

CD MECHANISM MODULE SECTION PARTS LIST

	<u>Mark</u>	<u>No.</u>	<u>Description</u>	<u>Part No.</u>		<u>Mark</u>	<u>No.</u>	<u>Description</u>	<u>Part No.</u>
A		1	•••••						
		2	Screw	BSZ20P040FTC		36	Gear		CNW1180
		3	Screw(M2 x 4)	CBA1835		37	Gear		CNW1181
		4	Washer	CBF1038		38	•••••		
		5	Spring	CBH3010		39	Gear		CNW1183
						40	Rack		CNW1184
		6	Spring	CBH2855					
		7	Spring	CBH2856		41	Gear		CNW1185
		8	•••••			42	Gear		CNW1186
		9	Screw	BSZ26P060FTC		43	Gear		CNW1187
B		10	Spring	CBH3011		44	Gear		CNW2287
						45	Clamper		CNW1190
		11	Coil Spring	CBH3095					
		12	Spring	CBH3014		46	Arm		CNW1192
		13	Spring	CBH3145		47	Holder		CNW1193
		14	Spring	CBH3016		48	Holder		CNW1194
		15	Spring	CBH3017		49	Damper		CNW1197
						50	Damper		CNW1198
		16	Spring	CBH3086					
		17	Spring	CBH3019		51	Arm		CNW1726
C		18	•••••			52	Motor Unit(M2)(LOAD/CRG)		CXC4026
		19	Leaf Spring	CBL1824		53	Screw Unit		CXC8894
		20	Pickup Unit(P11)(Service) for CXK5808 CXX4754			54	Arm Assy		CXE8953
			Pickup Unit(P10.6)(Service) for CXK5807 CXX3556			55	Washer		CBF1037
		21	Bracket	CND4553		56	Washer		CBF1038
		22	Arm	CND7608		57	Arm		CND6242
		23	Bracket	CND6127		58	Collar		CNW2444
		24	Bracket	CND5710		59	Roller		CNW2500
		25	Lever	CND6834		60	Gear Unit		CXE8952
D									
		26	•••••			61	Washer		YE15FTC
		27	Rack	CNV8342		62	Chassis Unit		CXE9531
		28	Guide	CNW3489		63	Motor Unit(M1)(SPDL)		CXE2273
		29	Roller	CNW1172		64	Screw		JFZ20P025FTC
		30	•••••			65	Screw		JGZ17P022FTC
		31	Arm	CNW2241		66	Screw		EBA1028
		32	Roller	CNW1175		67	CD Core Unit (S11.6VA)(for CXK5808) CWX4269		
		33	•••••				CD Core Unit (S11.6STD)(for CXK5807) CWX4023		
E		34	Arm	CNW1177		68	Chassis		CNA3373
		35	Arm	CNW1178					

Notes: For No.20 and 67, please refer to "1.3 NOTES ON REPLACING PARTS" for part distinguish.

5		6		7		8	
Circuit Symbol and No.		Part No.		Circuit Symbol and No.		Part No.	
X 351	Crystal Resonator 12.000000 MHz	CSS1876		R 357		RS1/16SS473J	
X 353	Resonator 16.93 MHz	CSS1794		R 359		RS1/16SS0R0J	
X 601	Crystal Resonator	CSS1868		R 360		RS1/16SS0R0J	A
P 601	Surge Absorber	IMSA-6803-01Y900					
⚠ P753	Fuse 3.0 A	CEK1404		R 363		RS1/16SS221J	
				R 364		RS1/16SS104J	
VA801	SMD Varistor	MLV0402ES012V0010N		R 365		RS1/16SS221J	
VA802	SMD Varistor	MLV0402ES012V0010N		R 366		RS1/16SS221J	
CN701	Connector	VKN1192					
CN801	Connector	CKS6452	R 368			RS1/16SS102J	
JA101	Plug	CKM1624	R 369			RS1/16SS473J	
			R 370			RS1/16SS473J	
JA601	Antenna Jack	CKX1104	R 371			RS1/16SS473J	
JA751	Jack	CKB1115	R 373			RS1/16SS152J	
			R 374			RS1/16SS153J	
RESISTORS			R 375			RS1/16SS153J	B
R 111		RS1/16SS223J	R 376			RS1/16SS473J	
R 112		RS1/16SS473J	R 377			RS1/16SS103J	
R 113		RS1/16SS682J	R 378	(B)		RS1/16SS473J	
R 114		RS1/4SA102J					
R 151		RS1/16SS8202D		(A)		RS1/16SS473J	
			R 379			RS1/16SS103J	
R 156		RS1/16SS102J	R 380			RS1/16SS222J	
R 158		RS1/16SS2403D	R 383			RS1/16SS473J	
R 159		RS1/16SS7502D	R 384			RAB4CQ473J	
R 160		RS1/16SS103J	R 385				
R 161		RS1/16SS4703D					
			R 386			RS1/16SS473J	
R 162		RS1/16SS4303D	R 387			RS1/16SS473J	C
R 163		RS1/16SS3903D	R 388			RS1/16SS473J	
R 164		RS1/16SS6202D	R 389			RS1/16SS473J	
R 165	20 mohm	CCN1401	R 390			RS1/16SS473J	
R 167		RS1/16SS102J					
			R 391			RS1/16SS221J	
R 168		RS1/16SS102J	R 392			RS1/16SS221J	
R 169		RS1/16SS102J	R 393			RS1/16SS221J	
R 172		RS1/16SS393J	R 394			RS1/16SS221J	
R 173		RS1/16SS4703D	R 395			RS1/16SS221J	
R 174		RS1/16SS1503D					
			R 396			RS1/16SS221J	
R 175		RS1/16SS393J	R 397			RS1/16SS473J	
R 176		RS1/16SS103J	R 398			RS1/16SS473J	D
R 177		RS1/16SS472J	R 399			RS1/16SS101J	
R 178		RS1/16SS1003D	R 400			RS1/16SS473J	
R 179		RS1/16SS7503D					
			R 401			RS1/16SS102J	
R 180		RS1/16SS1603D	R 402			RS1/16SS473J	
R 182		RS1/16SS680J	R 403			RS1/16SS473J	
R 184		RS1/16SS4701F	R 404			RS1/16SS473J	
R 185		RS1/16SS102J	R 409			RS1/16SS472J	
R 187		RS1/16SS1203D					
			R 411			RS1/16SS472J	
R 188		RS1/16SS1802D	R 412			RS1/16SS104J	
R 189		RS1/16SS6802D	R 413			RS1/16SS101J	
R 190		RS1/16SS3903D	R 414			RS1/16SS101J	E
R 192		RS1/16SS102J	R 415			RS1/16SS101J	
R 301		RS1/16SS473J					
			R 416			RS1/16SS102J	
R 303		RS1/16SS103J	R 417			RS1/16SS101J	
R 304		RS1/16SS272J	R 418			RS1/16SS102J	
R 305		RS1/16SS473J	R 419			RS1/16SS102J	
R 308		RS1/10SR102J	R 420			RS1/16SS101J	
R 323		RS1/16SS2702F					
			R 421			RS1/16SS473J	
R 325		RS1/16SS103J	R 423			RS1/16SS222J	
R 326		RS1/16SS103J	R 424			RS1/16SS222J	
R 327		RS1/16SS0R0J	R 425			RS1/16SS103J	
R 328		RS1/16SS103J	R 428			RS1/16SS0R0J	F
R 337		RS1/16SS0R0J					
			R 432			RS1/16SS103J	
R 355		RS1/16SS103J	R 509			RS1/16SS473J	

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	R 510	RS1/16SS473J	CAPACITORS	C 101 2 200 uF/16 V	CCH1405
	R 603	RS1/16SS391J			CKSRYB103K50
	R 604	RS1/16SS105J			CEVW221M16
					CCG1393
	R 605	RS1/16SS105J	C 152 1 uF	C 153 10 uF	CCG1236
	R 606	RS1/16SS101J			
	R 607	RS1/16SS101J			
	R 608	RS1/16SS103J			
	R 610	RS1/16SS103J	C 154 1 uF/10 V	C 156	DCH1266
					CEAT102M16
	R 617	RS1/16SS0R0J			CCG1236
	R 620	RS1/16SS0R0J			DCH1246
	R 637	RS1/16SS472J	C 158 1 uF	C 160 10 uF	CCG1236
	R 638	RS1/16SS472J			
	R 651	RS1/16SS0R0J			
B	R 652	RS1/16SS0R0J	C 162	C 163	CCSSCH391J50
	R 653	RS1/10SR0R0J			CEVQW221M6R3
	R 701	RS1/16SS473J			CCSSCH471J50
	R 702	RS1/16SS104J			CCSSCH102J50
	R 704	RS1/16SS104J	C 166 10 uF	C 167 10 uF	CCG1192
	R 706	RS1/16SS221J			CCG1192
	R 707	RS1/16SS221J			CCG1236
	R 708	RS1/16SS101J	C 171 10 uF	C 172 10 uF	CCG1236
	R 709	RS1/16SS221J			CKSRYB105K10
	R 710	RS1/16SS101J			
C	R 711	RS1/16SS102J	C 177 10 uF	C 178	CCG1192
	R 715	RS1/16SS331J			CCSSCH391J50
	R 716	RS1/16SS331J			CKSSYB102K50
	R 717	RS1/16SS331J			CCG1192
	R 718	RS1/16SS221J	C 180 10 uF	C 181	CEVQW221M6R3
	R 719	RS1/16SS104J			
	R 721	RS1/16SS472J			
	R 722	RS1/16SS472J	C 183 4.7 uF	C 185	CCG1212
	R 723	RS1/16SS472J			CEVW221M10
	R 724	RS1/16SS0R0J			CCSSCH331J50
					CCSRCH101J50
D	R 755	RS1/16SS821J	C 186	C 187	CKSRYB105K10
	R 756	RS1/16SS821J			
	R 757	RS1/16SS223J			
	R 758	RS1/16SS223J			
	R 764	RS1/16SS0R0J	C 188	C 192 22 uF	CCG1254
					CCG1382
	R 801	RS1/10SR222J			DCH1246
	R 803	RS1/16SS223J			CKSRYX105K16
	R 804	RS1/16SS223J	C 195 1 uF	C 196 1 uF	CEAT102M16
	R 805	RS1/10SR101J			
	R 806	RS1/10SR101J			
	R 807	RS1/10SR101J	C 199	C 253	CKSSYB122K50
	R 808	RS1/10SR222J			CKSSYB104K10
	R 809	RS1/10SR220J			CCG1205
	R 810	RS1/10SR220J			CCSRCH101J50
E	R 813	RS1/10SR222J	C 302	C 303	CKSSYB104K16
	R 814	RS1/10SR222J			
	R 815	RS1/16SS822J			
	R 816	RS1/10SR222J	C 304	C 321	CKSRYB104K16
	R 817	RS1/10SR222J			CKSSYB104K10
	R 841	RS1/16SS472J			CCG1192
					DCH1201
	R 859	RS1/16SS103J	C 322 10 uF	C 323 10 uF	CKSSYB104K10
	R 872	RS1/10SR0R0J			
	R 901	RS1/16SS103J			
	R 902	RS1/16SS221J			
F	R 903	RS1/16SS223J	C 351	C 352	CKSSYB104K10
					CKSSYB104K10
					CKSSYB104K10
					CKSSYB104K10
	R 914	RS1/10SR0R0J	C 353	C 354	DCH1266
			C 357	C 359 1 uF/10 V	CKSSYB104K10
					CKSSYB104K10
					CKSSYB104K10
					CCSSCH120J50
			C 361	C 362	CCSSCH120J50
			C 363	C 365	CKSSYB102K50
					CKSSYB104K10
					CKSSYB104K10
					CCSSCH120J50
			C 366	C 368	CKSSYB104K10
					CKSSYB104K10
					CCSSCH120J50
			C 369	C 375	

5		6		7		8	
Circuit Symbol and No.		Part No.		Circuit Symbol and No.		Part No.	
C 376		CCSSCH120J50		C 632		CKSRYB104K16	
C 377		CKSRYB105K10		C 633		CKSRYB104K16	
				C 636		CKSSYB102K50	A
C 379		CCSSCJ3R0C50					
C 381		CKSSYB104K10		C 637		CKSSYB104K10	
C 383		CKSSYB104K10		C 639		CCSSCH471J50	
C 384		CCSSCH220J50		C 701		CKSSYB103K16	
C 385		CKSSYB104K10		C 702		CKSSYB103K16	
				C 709		CKSSYB104K10	
C 386		CKSSYB104K10					
C 387		CKSSYB104K10		C 755	10 uF	DCH1201	
C 388		CCSRCH330J50		C 756	10 uF	CCG1192	
C 389		CKSSYB104K10		C 760		CKSSYB104K10	
C 390		CCSSCH100D50		C 801		CCSRCH102J50	
				C 803		CKSRYB105K10	
C 391		CCSSCH220J50					
C 392		CCSSCH220J50		C 806		CKSRYB104K16	B
C 393		CCSSCH220J50		C 807		CKSRYB105K10	
C 394		CKSSYB104K10		C 809		CCSRCH221J50	
C 395		CKSSYB103K16		C 810		CCSRCH221J50	
				C 811		CKSSYB104K10	
C 398	1 uF	DCH1246					
C 399		CKSSYB104K10		C 851		CKSRYB474K10	
C 400		CCSSCH100D50		C 853		CKSRYB474K10	
C 551		CKSRYB105K10		C 855		CKSRYB474K10	
C 553		CKSRYB105K10		C 857		CKSRYB474K10	
				C 863	2.2 uF	CCG1205	
C 554	1 uF	DCH1246					
C 555		CKSRYB105K10		C 864		CKSRYX104K50	C
C 560		CKSRYB105K10		C 866		CKSRYX105K16	
C 561		CKSRYB105K10		C 868	10 uF/16 V	DCH1263	
C 562		CKSRYB105K10		C 901		CKSRYB105K10	
				C 913		CKSRYX104K50	
C 563	10 uF	CCG1192					
C 564		CEVW470M16					
C 565		CKSSYB104K10					
C 568		CKSSYB104K10					
C 569		CKSSYB104K10					
C 570	10 uF	CCG1192					
C 573	1 uF/10 V	DCH1266					
C 575	10 uF	CCG1192					
C 576		CKSSYB104K10					
C 577	10 uF	CCG1192					
C 583	10 uF	CCG1192					
C 584		CKSSYB104K10					
C 585		CKSSYB104K10					
C 586		CKSSYB104K10					
C 587		CKSSYB102K50					
C 589	1 uF/10 V	DCH1266					
C 590		CKSRYB105K10					
C 591		CCSRCH391J50					
C 607		CKSSYB102K50					
C 610		CKSSYB152K50					
C 611		CCSSCH331J50					
C 612		CCSSCH220J50					
C 613		CCSSCH100D50					
C 615		CKSSYB104K10					
C 617		CKSSYB102K50					
C 618		CKSSYB224K6R3					
C 620		CKSSYB104K10					
C 621		CCSSCH390J50					
C 624	2.2 uF	CCG1205					
C 626	10 uF	CCG1192					
C 630	1 uF/10 V	DCH1266					
C 631		CCSSCH391J50					

A

Unit Number: QWM4722(C)

Unit Name : Tuner Amp Unit

MISCELLANEOUS

IC 151	Power supply IC	BD49101AEFS	
IC 351	Blank Flash IC	R5S726A0D216FP	D
IC 361	IC	S-80827CNMC-B8M	
IC 371	IC	QVQ1037	
IC 551	E-VOL System LSI	PM9013A	
IC 601	Tuner IC	TEF6686HN-V102	
IC 801	Logic IC	TC7SET08FUS3	
IC 851	Power Amp IC	PAL014A	
Q 111	Bipolar Transistor	LSCR523UB	
Q 151	Power MOS FET	RRR040P03	
Q 301	Transistor	2SAR502UB	
Q 302	Transistor	2SCR514PGZE	E
Q 303	Transistor	LTC143EUB	
Q 751	Transistor	EMH53	
Q 752	Transistor	EMH53	
Q 781	Bipolar Transistor	EMD53	
Q 782	Bipolar Transistor	EMD53	
Q 783	Bipolar Transistor	EMD53	
Q 784	Bipolar Transistor	EMD53	
Q 901	Transistor	EMD52	
D 101	Diode	D1F60-5053	
D 102	Diode	D1F60-5053	
D 111	Diode	DZ2J068M0	F
D 152	Diode	RR264MM-400TF	
D 153	Schottky Diode	RB162M-40	

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

D 154 Diode RR264MM-400TF
 D 155 Schottky Diode DB2J41100
 D 156 Diode RB056L-40
 D 157 Schottky Diode CMS30I30A
 D 301 Diode DZ2J100M0

R 167
 R 168
 R 169
 R 172
 R 173
 R 174

RS1/16SS102J
 RS1/16SS102J
 RS1/16SS102J
 RS1/16SS393J
 RS1/16SS4703D
 RS1/16SS1503D

D 351 Schottky Diode RB751SM-40
 D 352 Schottky Diode RB751SM-40
 D 802 Diode DZ2S068C
 D 803 Diode DZ2S068C
 D 804 Diode DZ2S068C

R 175
 R 176
 R 177
 R 178
 R 179

RS1/16SS393J
 RS1/16SS103J
 RS1/16SS472J
 RS1/16SS1003D
 RS1/16SS7503D

D 805 Diode DZ2S068C
 D 806 Diode DZ2S068C
 D 807 Diode DZ2S068C
 D 911 Diode RR264MM-400TF
 D 912 Diode RR264MM-400TF

R 180
 R 182
 R 184
 R 185
 R 187

RS1/16SS1603D
 RS1/16SS820J
 RS1/16SS682J
 RS1/16SS102J
 RS1/16SS1203D

L 101 Choke Coil CTH1620
 L 151 SMD SPL Inductor CTH1521
 L 152 SMD SPL Inductor CTH1584
 L 552 Inductor CTF1736
 L 603 Chip Coil LCTAWR27J2520

R 188
 R 189
 R 190
 R 192
 R 193

RS1/16SS1802D
 RS1/16SS6802D
 RS1/16SS3903D
 RS1/16SS102J
 RS1/16SS0R0J

L 604 Chip Coil LCTAW3R3J2520
 L 606 Inductor CTF1786
 L 609 Inductor CTF1786
 L 610 Inductor LCMAR27J1608
 L 611 SMD SPL Inductor LCYAR82J2016

R 194
 R 301
 R 303
 R 304
 R 305

RS1/16SS0R0J
 RS1/16SS473J
 RS1/16SS103J
 RS1/16SS272J
 RS1/16SS473J

L 613 Inductor CTF1786
 L 701 Inductor CTF1389
 L 702 Chip Beads VTL1133
 L 703 Chip Beads VTL1133
 L 704 Chip Beads VTL1133

R 308
 R 329
 R 330
 R 331
 R 332

RS1/10SR102J
 RS1/10SR0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/10SR0R0J

L 801 Common Mode Choke Coil ATH7015
 T 601 Variable Coil CTC1215
 X 351 Crystal Resonator 12.000000 MHz CSS1876
 X 353 Resonator 16.93 MHz CSS1794
 X 601 Crystal Resonator CSS1868

R 334
 R 335
 R 355
 R 357
 R 359

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS103J
 RS1/16SS473J
 RS1/16SS0R0J

P 601 Surge Absorber IMSA-6803-01Y900
 △ P753 Fuse 3.0 A CEK1404
 VA801 SMD Varistor MLV0402ES012V0010N
 VA802 SMD Varistor MLV0402ES012V0010N
 CN701 Connector VKN1192

R 360
 R 363
 R 364
 R 365

RS1/16SS0R0J
 RS1/16SS221J
 RS1/16SS104J
 RS1/16SS221J

CN801 Connector CKS6452
 JA101 Plug CKM1624
 JA601 Antenna Jack CKX1104
 JA751 Jack CKB1109
 JA782 Jack CKS6437

R 366
 R 368
 R 369
 R 370

RS1/16SS221J
 RS1/16SS102J
 RS1/16SS473J
 RS1/16SS473J

RESISTORS

R 111 RS1/16SS223J
 R 112 RS1/16SS473J
 R 113 RS1/16SS682J
 R 114 RS1/4SA102J
 R 151 RS1/16SS8202D

R 371
 R 373
 R 374
 R 375
 R 376

RS1/16SS473J
 RS1/16SS152J
 RS1/16SS153J
 RS1/16SS153J
 RS1/16SS473J

R 156 RS1/16SS102J
 R 158 RS1/16SS2403D
 R 159 RS1/16SS7502D
 R 160 RS1/16SS103J
 R 161 RS1/16SS4703D

R 377
 R 379
 R 380
 R 383
 R 384

RS1/16SS103J
 RS1/16SS473J
 RS1/16SS103J
 RS1/16SS222J
 RS1/16SS473J

R 162 RS1/16SS4303D
 R 163 RS1/16SS3903D
 R 164 RS1/16SS6202D
 R 165 20 mohm CCN1401

R 385
 R 386
 R 387
 R 388
 R 389

RAB4CQ473J
 RS1/16SS473J
 RS1/16SS473J
 RS1/16SS473J
 RS1/16SS473J

5	6	7	8	
<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	
R 390	RS1/16SS473J	R 718	RS1/16SS221J	
R 391	RS1/16SS221J	R 719	RS1/16SS104J	A
R 392	RS1/16SS221J	R 721	RS1/16SS472J	
R 393	RS1/16SS221J	R 722	RS1/16SS472J	
R 394	RS1/16SS221J	R 723	RS1/16SS472J	
		R 751	RS1/16SS821J	
R 395	RS1/16SS221J			
R 396	RS1/16SS221J	R 752	RS1/16SS821J	
R 397	RS1/16SS473J	R 753	RS1/16SS223J	
R 398	RS1/16SS473J	R 754	RS1/16SS223J	
R 399	RS1/16SS101J	R 755	RS1/16SS821J	
		R 756	RS1/16SS821J	
R 400	RS1/16SS473J			
R 401	RS1/16SS102J	R 757	RS1/16SS223J	
R 402	RS1/16SS473J	R 758	RS1/16SS223J	B
R 403	RS1/16SS473J	R 764	RS1/16SS0R0J	
R 404	RS1/16SS473J	R 765	RS1/16SS0R0J	
		R 789	RS1/16SS0R0J	
R 409	RS1/16SS472J			
R 411	RS1/16SS472J	R 795	RS1/16SS681J	
R 412	RS1/16SS104J	R 798	RS1/16SS681J	
R 413	RS1/16SS101J	R 799	RS1/16SS822J	
R 414	RS1/16SS101J	R 800	RS1/16SS822J	
		R 801	RS1/10SR222J	
R 415	RS1/16SS101J			
R 416	RS1/16SS102J	R 803	RS1/16SS223J	
R 418	RS1/16SS102J	R 804	RS1/16SS223J	
R 419	RS1/16SS102J	R 805	RS1/10SR101J	C
R 421	RS1/16SS473J	R 806	RS1/10SR101J	
		R 807	RS1/10SR101J	
R 423	RS1/16SS222J			
R 424	RS1/16SS222J	R 808	RS1/10SR222J	
R 425	RS1/16SS103J	R 809	RS1/10SR220J	
R 428	RS1/16SS0R0J	R 810	RS1/10SR220J	
R 431	RS1/16SS473J	R 813	RS1/10SR222J	
		R 814	RS1/10SR222J	
R 433	RS1/16SS102J			
R 434	RS1/16SS102J	R 815	RS1/16SS822J	
R 509	RS1/16SS473J	R 816	RS1/10SR222J	
R 510	RS1/16SS473J	R 817	RS1/10SR222J	
R 603	RS1/16SS101J	R 841	RS1/16SS472J	D
		R 859	RS1/16SS103J	
R 604	RS1/16SS105J			
R 605	RS1/16SS105J	R 872	RS1/10SR0R0J	
R 606	RS1/16SS101J	R 901	RS1/16SS103J	
R 607	RS1/16SS101J	R 902	RS1/16SS221J	
R 608	RS1/16SS103J	R 903	RS1/16SS223J	
		R 914	RS1/10SR0R0J	
R 610	RS1/16SS103J			
R 617	RS1/16SS0R0J			
R 637	RS1/16SS472J	CAPACITORS		
R 638	RS1/16SS472J	C 101 2 200 uF/16 V	CCH1405	
R 651	RS1/16SS0R0J	C 111	CKSRYB103K50	
		C 151	CEVW221M16	
R 652	RS1/16SS0R0J	C 152 1 uF	CCG1393	E
R 656	RS1/16SS0R0J	C 153 10 uF	CCG1236	
R 701	RS1/16SS473J			
R 702	RS1/16SS104J	C 154 1 uF/10 V	DCH1266	
R 704	RS1/16SS104J	C 156	CEAT102M16	
		C 157 10 uF	CCG1236	
R 706	RS1/16SS221J	C 158 1 uF	DCH1246	
R 707	RS1/16SS221J	C 160 10 uF	CCG1236	
R 708	RS1/16SS101J			
R 709	RS1/16SS221J	C 162	CCSSCH391J50	
R 710	RS1/16SS101J	C 163	CEVQW221M6R3	
		C 164	CCSSCH471J50	
		C 165	CCSSCH102J50	
R 711	RS1/16SS102J	C 166 10 uF	CCG1192	F
R 715	RS1/16SS331J			
R 716	RS1/16SS331J	C 167 10 uF	CCG1192	
R 717	RS1/16SS331J	C 169 10 uF	CCG1192	

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

C 171 10 uF
C 172 10 uF
C 174

CCG1236
CCG1236
CKSRYB105K10

C 555
C 560
C 561
C 562

CKSRYB105K10
CKSRYB105K10
CKSRYB105K10
CKSRYB105K10

C 177 4.7 uF
C 178
C 179
C 180 10 uF
C 181

CCG1222
CCSSCH391J50
CKSSYB102K50
CCG1192
CEVQW221M6R3

C 563 10 uF
C 564
C 565
C 568
C 569

CCG1192
CEVW470M16
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 183 4.7 uF
C 185
C 186
C 187
C 192 22 uF

CCG1212
CEVW221M10
CCSSCH331J50
CCSRCH101J50
CCG1254

C 570 10 uF
C 573 1 uF/10 V
C 574 1 uF/10 V
C 575 10 uF
C 576

CCG1192
DCH1266
DCH1266
CCG1192
CKSSYB104K10

C 194
C 195 1 uF
C 196 1 uF
C 197
C 199

CKSRYB103K50
CCG1382
DCH1246
CKSRYX105K16
CKSSYB122K50

C 577 10 uF
C 583 10 uF
C 584
C 585
C 586

CCG1192
CCG1192
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 253
C 255 2.2 uF
C 302
C 303
C 304

CKSSYB104K10
CCG1205
CCSRCH101J50
CKSSYB104K16
CKSRYB104K16

C 587
C 589 1 uF/10 V
C 590
C 602
C 603

CKSSYB102K50
DCH1266
CKSRYB105K10
CCSSCK2R0C50
CCSSCK1R0C50

C 351
C 352
C 353
C 354
C 357

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 604
C 605
C 607
C 610
C 611

CCSSCK1R0C50
CCSSCH120J50
CKSSYB102K50
CKSSYB152K50
CCSSCH331J50

C 359 1 uF/10 V
C 361
C 362
C 363
C 364

DCH1266
CKSSYB104K10
CCSSCH101J50
CKSSYB102K50
CCSSCH120J50

C 612
C 613
C 615
C 617
C 618

CCSSCH220J50
CCSSCH100D50
CKSSYB104K10
CKSSYB102K50
CKSSYB224K6R3

C 366
C 368
C 369
C 375
C 376

CCSSCH120J50
CKSSYB102K50
CKSSYB104K10
CCSSCH120J50
CCSSCH120J50

C 620 1 uF/10 V
C 621
C 624 2.2 uF
C 626 10 uF
C 627

DCH1266
CCSSCH390J50
CCG1205
CCG1192
CCSSCH330J50

C 377
C 379
C 381
C 383
C 384

CKSRYB105K10
CCSSCJ3R0C50
CKSSYB104K10
CKSSYB104K10
CCSSCH220J50

C 630 1 uF/10 V
C 631
C 632
C 633
C 635

DCH1266
CCSSCH391J50
CKSRYB104K16
CKSRYB104K16
CCSSCH101J50

C 385
C 386
C 387
C 389
C 390

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CCSSCH100D50

C 639
C 701
C 702
C 709
C 751 10 uF

CCSSCH471J50
CKSSYB103K16
CKSSYB103K16
CKSSYB104K10
CCG1192

C 391
C 392
C 393
C 394
C 395

CCSSCH220J50
CCSSCH220J50
CCSSCH220J50
CKSSYB104K10
CKSSYB103K16

C 752 10 uF
C 755 10 uF
C 756 10 uF
C 760
C 787

CCG1192
DCH1201
CCG1192
CKSSYB104K10
CKSRYB104K16

C 398 1 uF
C 399
C 400
C 551
C 553

DCH1246
CKSSYB104K10
CCSSCH100D50
CKSRYB105K10
CKSRYB105K10

C 788
C 801
C 803
C 804
C 806

CKSRYB104K16
CCSRCH102J50
CKSRYB105K10
CKSRYB105K10
CKSRYB104K16

C 554 1 uF

DCH1246

Circuit Symbol and No.**Part No.**

S 901 Lever Switch(HOME)
S 903 Spring Switch(DSCSNS)
CN101 Connector
CN701 Connector

CSN1090
CSN1081
CKS4808
CKS6146

RESISTORS

R 101 RS1/10SR2R4J
R 102 RS1/10SR2R4J
R 103 RS1/10SR2R7J
R 108 RS1/16SS105J
R 109 RS1/16SS152J

R 214 RS1/16SS103J
R 215 RS1/16SS393J
R 216 RS1/16SS102J
R 217 RS1/16SS562J
R 218 RS1/16SS472J

R 229 RS1/16SS471J
R 232 RS1/16SS0R0J
R 237 RS1/16SS221J
R 240 RS1/16SS473J
R 245 RS1/16SS104J

R 254 RS1/16SS104J
R 260 RS1/16SS103J
R 264 RS1/16SS102J
R 281 RS1/16SS560J
R 282 RS1/16SS560J

R 291 RS1/16SS560J
R 294 RS1/16SS471J
R 303 RS1/16SS123J
R 304 RS1/16SS123J
R 305 RS1/16SS102J

R 306 RS1/16SS472J
R 307 RS1/16SS102J
R 308 RS1/16SS472J
R 309 RS1/16SS473J
R 310 RS1/16SS472J

R 311 RS1/16SS472J
R 312 RS1/16SS472J
R 313 RS1/16SS472J
R 701 RS1/16SS101J
R 702 RS1/16SS101J

R 706 RS1/16SS221J

CAPACITORS

C 104 CKSQYB475K6R3
C 110 CKSSYB104K10
C 111 CKSSYB103K16
C 203 CKSSYB104K10
C 205 CKSRYB105K10

C 209 CKSRYB104K16
C 210 CKSSYB104K10
C 211 CKSSYB104K10
C 212 CKSSYB104K10
C 213 CKSSYB332K50

C 214 CKSSYB473K16
C 215 CKSSYB104K10
C 216 CKSSYB152K50
C 217 CCSSCH390J50
C 218 CCSSCH5R0C50

C 219 CKSSYB104K10

Circuit Symbol and No.**Part No.**

C 220 CKSSYB104K10
C 221 CKSSYB104K10
C 222 CKSSYB104K10
C 223 CCSSCH680J50

C 224 CCSSCH470J50
C 225 CKSSYB103K16
C 228 CCSSCH180J50
C 229 CKSSYB104K10
C 233 CKSSYB103K16

C 236 CKSSYB104K10
C 238 CKSRYB104K16
C 299 CKSSYB104K10
C 302 CKSSYB102K50
C 303 CKSSYB102K50

C 304 CKSSYB223K16
C 305 CKSSYB104K10
C 306 CKSSYB104K10
C 307 CKSRYB105K10
C 308 CKSRYB105K10

C 710 CKSSYB102K50

D**Unit Number: CWX4023****Unit Name : CD Core Unit(S11.6STD)****MISCELLANEOUS**

IC 201	IC	PE5791A
IC 301	Driver IC	BD8223EFV
Q 101	Transistor	2SAR502UB
Q 102	Chip Digital Transistor	LTA123JUB
X 201	Ceramic Resonator 16.934 MHz	CSS1603

S 901	Lever Switch(HOME)	CSN1090
S 903	Spring Switch(DSCSNS)	CSN1081
CN101	Connector	CKS4808
CN701	Connector	CKS6146

RESISTORS

R 101 RS1/10SR2R4J
R 102 RS1/10SR2R4J
R 103 RS1/10SR2R7J
R 108 RS1/16SS105J
R 109 RS1/16SS222J

R 214 RS1/16SS103J
R 215 RS1/16SS393J
R 216 RS1/16SS122J
R 217 RS1/16SS562J
R 218 RS1/16SS472J

R 229 RS1/16SS471J
R 232 RS1/16SS0R0J
R 237 RS1/16SS221J
R 240 RS1/16SS473J
R 245 RS1/16SS104J

R 254 RS1/16SS104J
R 260 RS1/16SS103J
R 264 RS1/16SS102J
R 281 RS1/16SS560J
R 282 RS1/16SS560J

R 291 RS1/16SS560J
R 294 RS1/16SS471J
R 303 RS1/16SS123J

<u>Circuit Symbol and No.</u>	<u>Part No.</u>	
R 304	RS1/16SS123J	
R 305	RS1/16SS102J	
R 306	RS1/16SS472J	A
R 307	RS1/16SS102J	
R 308	RS1/16SS472J	
R 309	RS1/16SS473J	
R 310	RS1/16SS472J	
R 311	RS1/16SS472J	■
R 312	RS1/16SS472J	
R 313	RS1/16SS472J	
R 701	RS1/16SS101J	
R 702	RS1/16SS101J	
R 706	RS1/16SS221J	B

CAPACITORS

C 104	CKSQYB475K6R3	
C 203	CKSSYB104K10	
C 209	CKSRYB104K16	
C 210	CKSSYB104K10	
C 211	CKSSYB104K10	■
C 212	CKSSYB104K10	
C 213	CKSSYB332K50	
C 214	CKSSYB473K16	
C 215	CKSSYB104K10	
C 216	CKSSYB182K50	C
C 217	CCSSCH560J50	
C 218	CCSSCH4R0C50	
C 219	CKSSYB104K10	
C 220	CKSSYB104K10	
C 221	CKSSYB104K10	■
C 222	CKSSYB104K10	
C 223	CCSSCH680J50	
C 224	CCSSCH470J50	
C 225	CKSSYB103K16	
C 228	CCSSCH270J50	
C 229	CKSSYB104K10	D
C 233	CKSSYB103K16	
C 236	CKSSYB104K10	
C 238	CKSRYB104K16	
C 299	CKSSYB104K10	■
C 302	CKSSYB102K50	
C 303	CKSSYB102K50	
C 304	CKSSYB223K16	
C 305	CKSSYB104K10	
C 306	CKSSYB104K10	
C 307	CKSRYB105K10	E
C 308	CKSRYB105K10	
C 710	CKSSYB102K50	