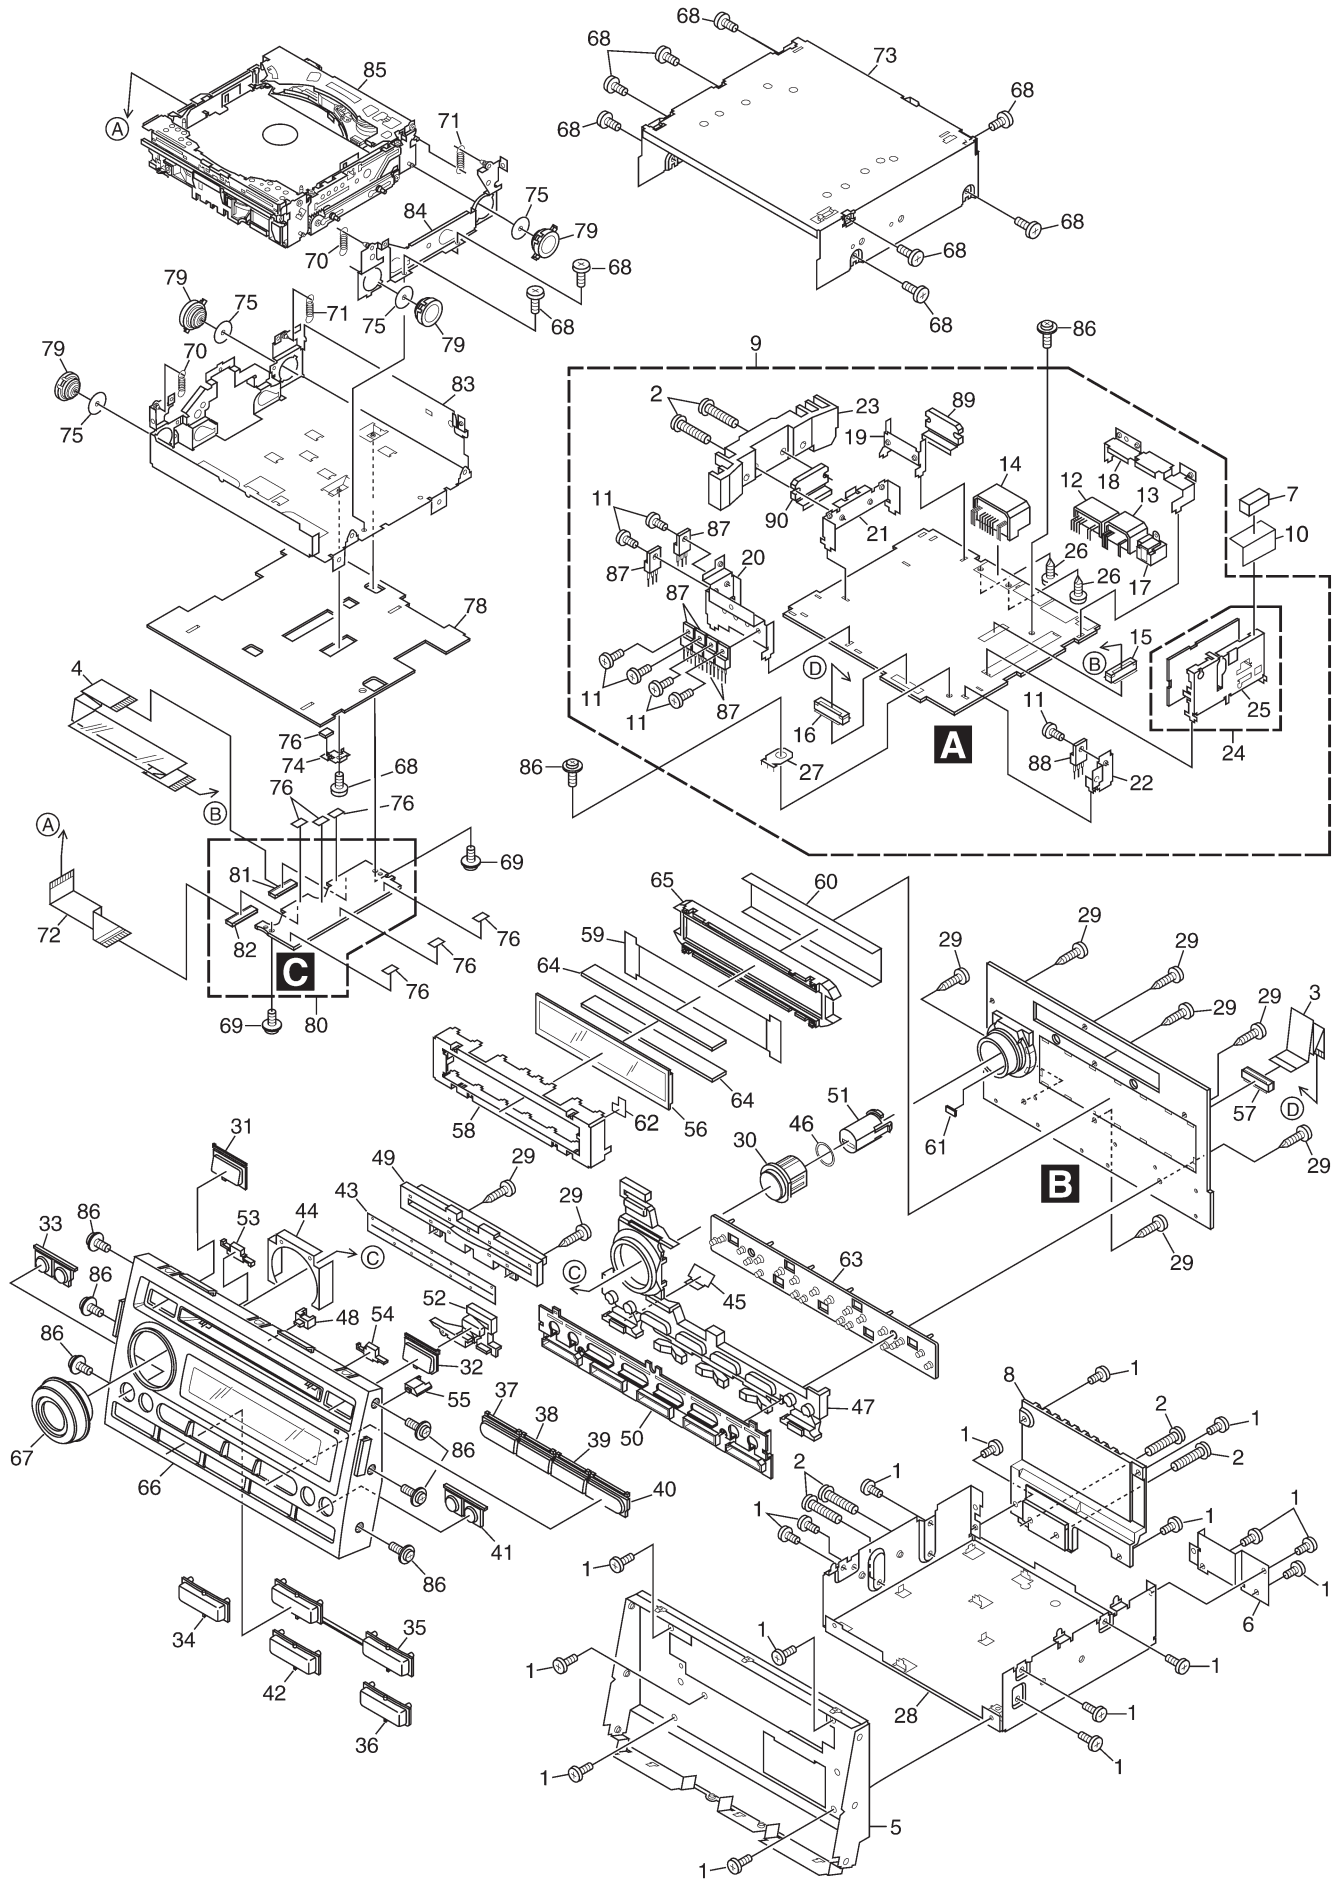
2.2 EXTERIOR


A
B
C
D
E
F
1
2
3
4
85
71
84
75
79
70
68
73
83
78
9
86
2
23
89
19
14
12
18
13
7
10
11
87
90
21
20
26
17
15
25
24
16
27
88
22
4
76
74
72
81
82
69
80
65
60
59
64
58
62
56
29
3
57
61
51
46
30
31
49
43
53
44
33
48
54
52
32
55
37
38
39
50
47
63
45
67
66
40
41
34
35
42
36
8
6
28
5

(1) EXTERIOR SECTION PARTS LIST


Mark	No.	Description	Part No.
	1	Screw	BMZ26P060FTC
	2	Screw	BMZ26P200FTC
	3	Flat Cable	CDE7472
	4	Flat Cable	CDE7753
	5	Holder	CND2065
	6	Holder	CND2395
	7	Cushion	CNM9416
	8	Heat Sink	CNR1737
	9	Tuner Amp Unit	See Contrast table(2)
	10	Insulator	CNM9614
	11	Screw	BMZ30P060FTC
	12	Connector(CN932)	CKM1208
	13	Connector(CN933)	CKM1215
	14	Plug(CN931)	CKM1283
	15	Connector(CN101)	CKS2767
	16	Connector(CN601)	CKS2769
	17	Connector(ANT401)	CKX1072
	18	Holder	CND2057
	19	Holder	CND2058
	20	Holder	CND2059
	21	Holder	CND2060
	22	Holder	CND2193
	23	Heat Sink	CNR1738
	24	FM/AM Tuner Unit	CWE1811
	25	Holder	CND2144
	26	Screw	PRZ30P060FSN
	27	Terminal(CN402)	VNF1084
	28	Chassis Unit	CXC2718
	29	Screw	BPZ26P100FTC
	30	Button(PWR)	CAC8475
	31	Button(LOAD)	See Contrast table(2)
	32	Button(CD EJECT)	See Contrast table(2)
	33	Button(SOUND, SCAN)	See Contrast table(2)
	34	Button(SEEK/SKIP)	See Contrast table(2)
	35	Button(1/2, 5/6)	See Contrast table(2)
	36	Button(TUNE)	See Contrast table(2)
	37	Button(CD/AUX)	See Contrast table(2)
	38	Button(AM/FM)	See Contrast table(2)
	39	Button(XM)	See Contrast table(2)
	40	Button(DISP/MODE)	See Contrast table(2)
	41	Button(RPT, A.SEL/RDM)	See Contrast table(2)
	42	Button(3/4)	See Contrast table(2)
	43	Cover	CNM8679
	44	Sheet	CNM9408
	45	Sheet	CNM9533
	46	Spacer	CNM9535
	47	Lighting Conductor	CNV7989
	48	Lighting Conductor	CNV7990
	49	Guide	CNV7991
	50	Holder	CNV7992
	51	Lighting Conductor	CNV7996
	52	Lighting Conductor	CNV8161
	53	Lighting Conductor	CNV8162
	54	Lighting Conductor	CNV8163
	55	Lighting Conductor	CNV8341
	56	LCD(LCD901)	CAW1830
	57	Connector(CN901)	CKS2769
	58	Holder	CND2055
	59	Plate	CNM8680
	60	Sheet	CNM8691
	61	Spacer	CNM9534
	62	Cushion	CNM9607
	63	Rubber	CNV7999
	64	Connector	CNV8002
	65	Lighting Conductor Unit	CXC4125
	66	Grille Unit	See Contrast table(2)
	67	Knob Unit	CXC3860
	68	Screw	BMZ26P040FTC
	69	Screw(M2x2.5)	CBA1624
	70	Spring(Silver)	CBH2481
	71	Spring(Black)	CBH2482
	72	Flat Cable	CDE7473
	73	Case	CNB2962
	74	Holder	CND2376
	75	Sheet	CNM5981
	76	Cushion	CNM8525
	77	•••••	
	78	Spacer	CNM9117
	79	Damper	CNV6608
	80	Control Unit	CWX2971
	81	Connector(CN601)	CKS2417
	82	Connector(CN101)	CKS4512
	83	Chassis Unit	CXC2722
	84	Bracket Unit	CXC2723
	85	Service Mechanism Assy(G2H)	CXX1898
	86	Screw	IMS26P055FTC
	87	Transistor(Q103, 802, 813-816)	2SB1185
	88	IC(IC401)	BA033T
	89	IC(IC501)	PAL006A
	90	IC(IC511)	TDA7384

(2) CONTRAST TABLE

DEH-MG6347ZH/XU/UC, DEH-MG6447ZH/XU/UC, DEH-MG6547ZH/XU/UC, DEH-MG6647ZH/XU/UC, DEH-MG6747ZH/XU/UC and DEH-MG6847ZH/XU/UC are constructed the same except for the following:

Mark	No.	Description	MG6347ZH	MG6447ZH	MG6547ZH	MG6647ZH	MG6747ZH	MG6847ZH
	9	Tuner Amp Unit	CWM9469	CWM9470	CWM9469	CWM9470	CWM9471	CWM9471
	31	Button(LOAD)	CAC8476	CAC8476	CAC8999	CAC8999	CAC8476	CAC8999
	32	Button(CD EJECT)	CAC8477	CAC8477	CAC9001	CAC9001	CAC8477	CAC9001
	33	Button(SOUND, SCAN)	CAC8478	CAC8478	CAC8492	CAC8492	CAC8478	CAC8492
	34	Button(SEEK/SKIP)	CAC8479	CAC8479	CAC8496	CAC8496	CAC8479	CAC8496
	35	Button(1/2, 5/6)	CAC8480	CAC8480	CAC9002	CAC9002	CAC8480	CAC9002
	36	Button(TUNE)	CAC8481	CAC8481	CAC8497	CAC8497	CAC8481	CAC8497
	37	Button(CD/AUX)	CAC8808	CAC8493(FM)	CAC8813	CAC8494(FM)	CAC9093(CD)	CAC9094(CD)
	38	Button(AM/FM)	CAC8809	CAC8818(AM)	CAC8814	CAC8821(AM)	CAC8809	CAC8814
	39	Button(XM)	CAC8810	CAC8819(CD)	CAC8815	CAC8822(CD)	CAC9034(XM/AUX)	CAC9035(XM/AUX)
	40	Button(DISP/MODE)	CAC8811	CAC8820(AUX)	CAC8816	CAC8823(AUX)	CAC8811	CAC8816
	41	Button(RPT, A.SEL/RDM)	CAC8812	CAC8812	CAC8817	CAC8817	CAC8812	CAC8817
	42	Button(3/4)	CAC9020	CAC9020	CAC9021	CAC9021	CAC9020	CAC9021
	66	Grille Unit	CXC2721	CXC2776	CXC2775	CXC2777	CXC3856	CXC3857


2.3 SERVICE MECHANISM ASSY(G2H) (1)

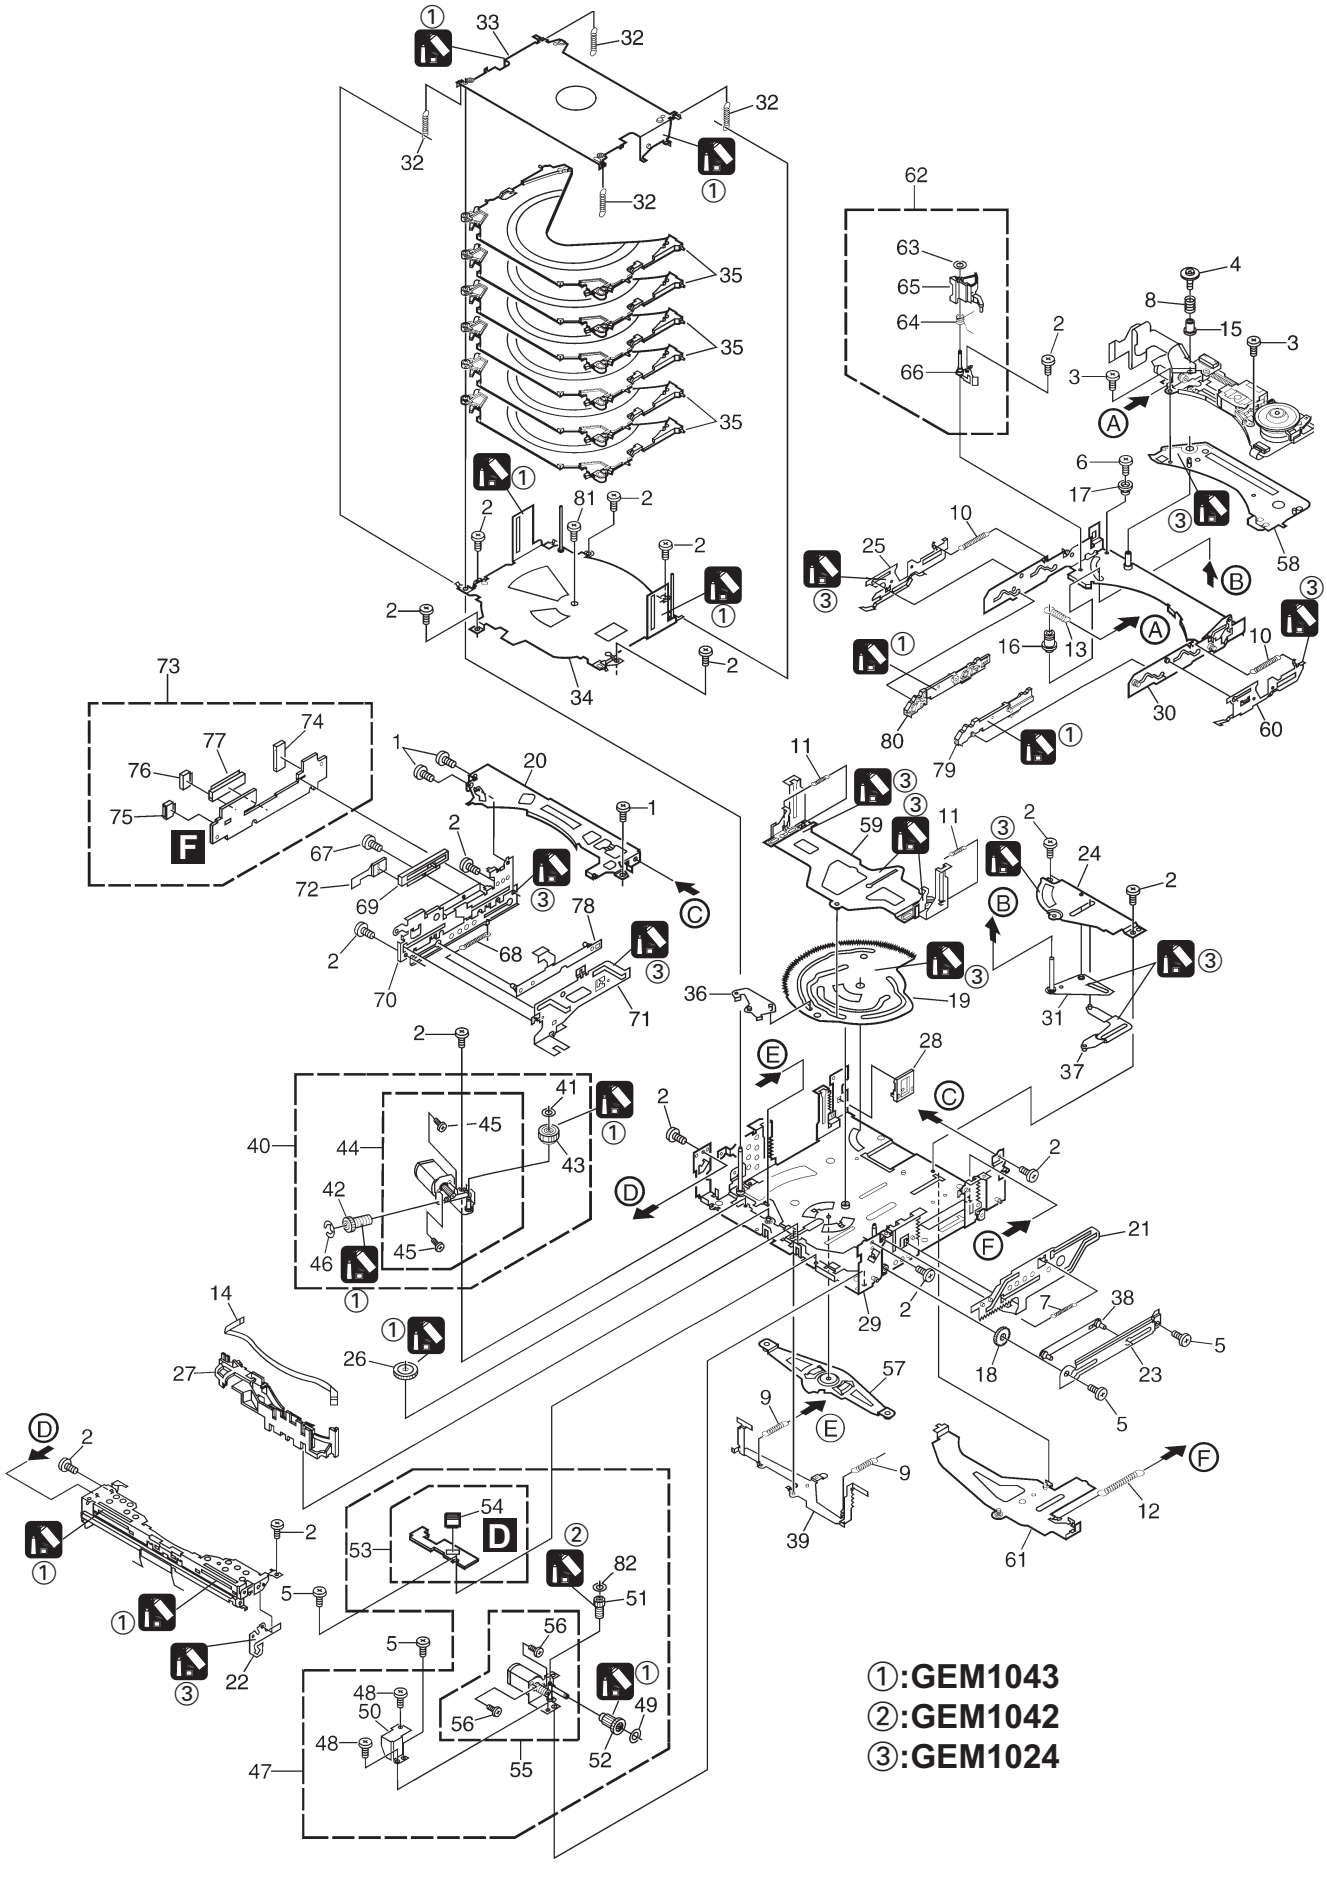

SERVICE MECHANISM ASSY(G2H) (1) SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Screw	BMZ20P020FZB
	2	Screw	BMZ20P025FTC
	3	Screw(M2x2)	CBA1556
	4	Screw(M2x2.5)	CBA1626
	5	Screw(M2x2.5)	CBA1609
	6	Screw(M2x4.5)	CBA1629
	7	Spring	CBH2460
	8	Spring	CBH2461
	9	Spring	CBH2484
	10	Spring	CBH2694
	11	Spring	CBH2486
	12	Spring	CBH2487
	13	Spring	CBH2500
	14	Connector	CDE6698
	15	Collar	CLA4329
	16	Collar	CLA4330
	17	Collar	CLA4331
	18	Gear	CND1649
	19	Cam Gear	CND1650
	20	Frame	CND1651
	21	Steer	CND1655
	22	Arm	CND2353
	23	Bracket	CND1658
	24	Bracket	CND1660
*	25	Lever	CNC9953
	26	Gear	CNV6612
	27	Holder	CNV8194
	28	Holder	CNV6738
*	29	Chassis Unit	CXC1642
*	30	Frame Unit	CXC1643
*	31	Arm Unit	CXC1647
	32	Spring	CBH2488
	33	Holder Unit	CXC1644
	34	Holder Unit	CXC1646
	35	Tray Unit	CXB6930
	36	Lever Unit	CXC1648
*	37	Lever Unit	CXC1649
	38	Lever Unit	CXC1650
*	39	Lever Unit	CXC1651
	40	Cam Motor Assy	CXB7522
	41	Washer	CBF1064
	42	Gear	CNV6610
	43	Gear	CNV6611
	44	Motor Unit(-A)(M1)	CXC1144
	45	Screw	JFZ20P020FTC
	46	Washer	YE20FTC
	47	ELV Motor Assy	CXB7523
	48	Screw	BMZ20P025FTC
	49	Washer	CBF1064
	50	Holder	CND1668
	51	Gear	CNV6634
	52	Gear	CNV6635
	53	PCB Unit(LED)	CWX2614
*	54	Connector(CN31)	CKS4523
	55	Motor Unit(-A)(M2)	CXC1145
	56	Screw	JFZ20P020FTC
*	57	Arm Unit	CXC1653
	58	Bracket Unit	CXC1654
*	59	Lever Unit	CXC1658
*	60	Lever Unit	CXC1659
*	61	Lever Unit	CXC1661
	62	Arm Assy	CXB8822
	63	Washer	CBF1038
	64	Spring	CBH2489
	65	Arm	CNV6735
	66	Bracket Unit	CXC1652
	67	Screw	BMZ20P025FTC
	68	Spring	CBH2459
	69	Variable Resistor(VR1)	CCW1023
	70	Bracket	CND1652
	71	Steer	CND1656
	72	Flexible PCB	CNP6368
	73	PCB Unit(SIDE)	CWX2613
	74	Connector(CN12)	CKS3991
*	75	Connector(CN14)	CKS4404
	76	Connector(CN13)	CKS4525
	77	Connector(CN11)	CKS4572
	78	Lever Unit	CXC1779
*	79	Lever Unit	CXB9121
*	80	Lever Unit	CXB9122
	81	Screw	JFZ20P020FTC
	82	Washer	CBF1037

2.4 SERVICE MECHANISM ASSY(G2H) (2)

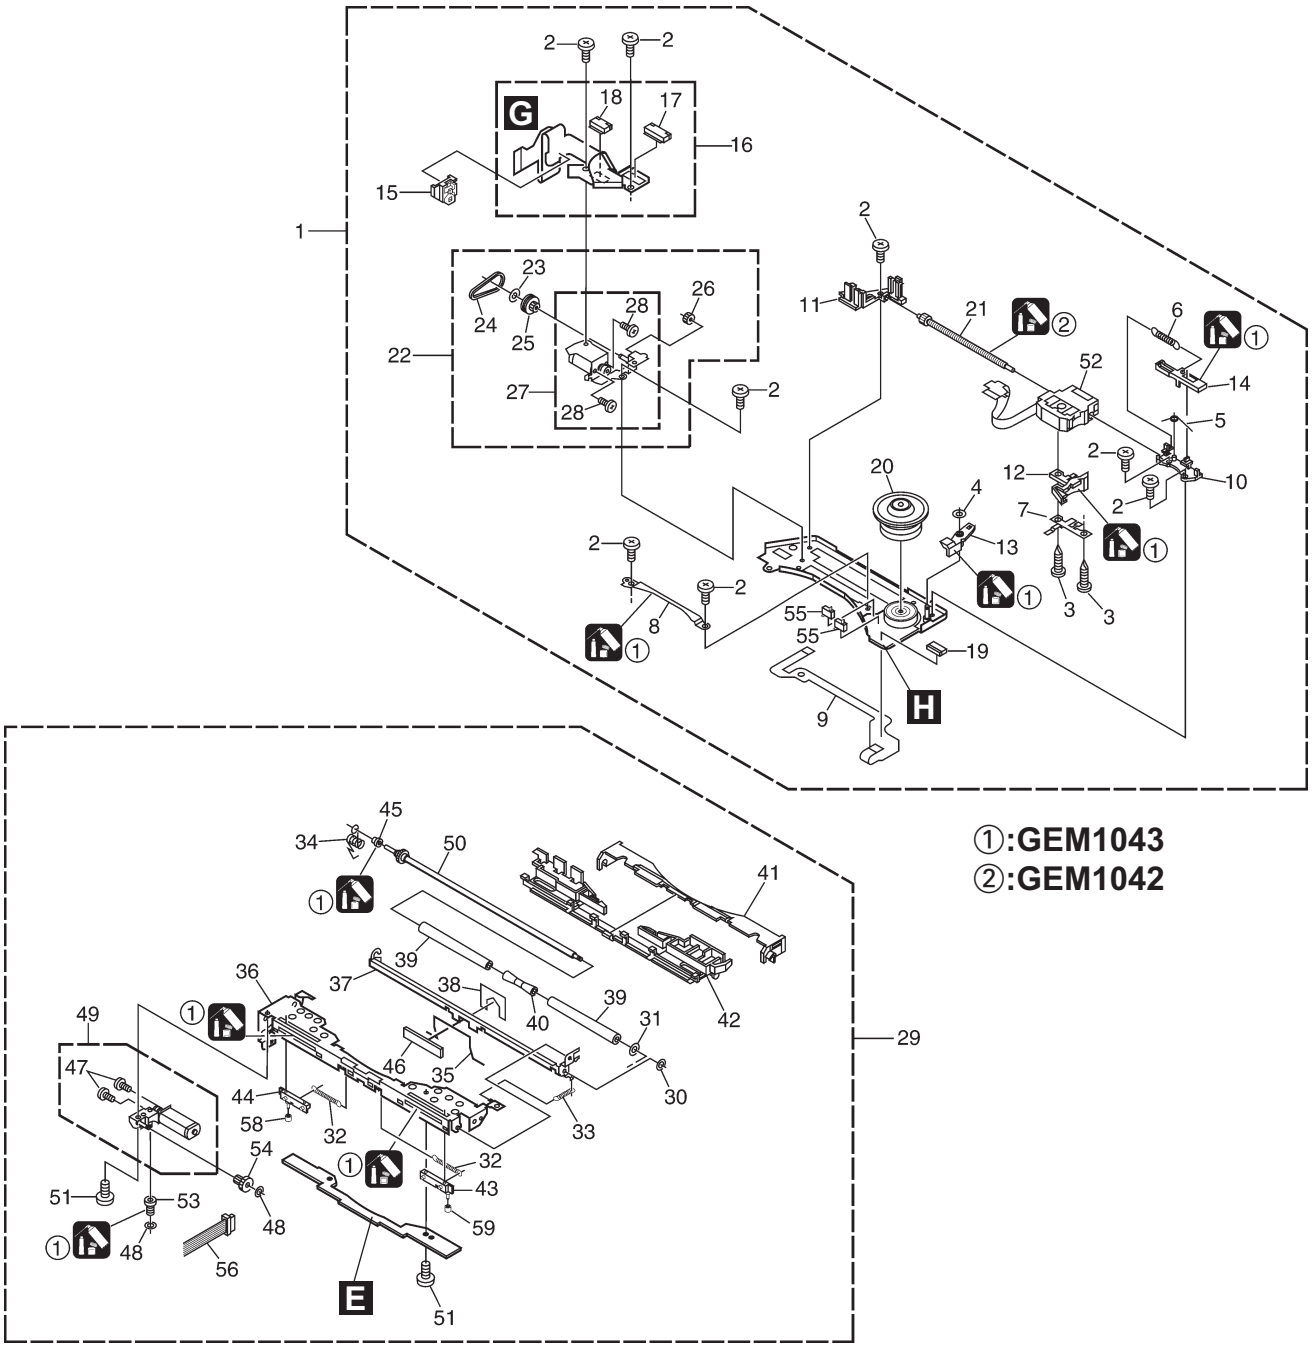

SERVICE MECHANISM ASSY(G2H) (2) SECTION PARTS LIST

Mark	No.	Description	Part No.
*	1	Service CRG Mechanism Assy(G2)	CXX1767
	2	Screw(M2x2)	CBA1556
	3	Screw(M2x6)	CBA1628
	4	Washer	CBF1038
	5	Spring	CBH2453
	6	Spring	CBH2480
	7	Spring	CBL1521
*	8	Guide	CNC9402
	9	Flexible PCB	CNP6217
	10	Holder	CNV6624
	11	Holder	CNV6625
	12	Rack	CNV6642
	13	Arm	CNV6731
	14	Lever	CNV6736
	15	Holder	CNV6737
	16	PCB Unit	CWX2611
	17	Connector(CN41)	CKS3785
	18	Connector(CN42)	CKS4508
	19	Connector(CN1)	CKS4508
	20	Support Wheel Unit	CXC3778
	21	Screw Unit(-B)	CXB7518
	22	Carriage Motor Assy	CXB7521
	23	Washer	CBF1038
	24	Belt	CNT1088
	25	Pulley	CNV6627
	26	Gear	CNV6629
	27	Motor Unit(-A)(M3)	CXC4658
	28	Screw	JFZ14P020FTC
	29	Loading Mech. Assy	CXC4753
	30	Washer	CBF1037
*	31	Washer	CBF1075
*	32	Spring	CBH2450
	33	Spring	CBH2452
*	34	Spring	CBH2457
*	35	Spring	CBH2580
*	36	Frame	CND1653
*	37	Arm	CND1654
*	38	Sheet	CNM7295
	39	Roller	CNV6616
	40	Collar	CNV6617
*	41	Guide	CNV6622
*	42	Holder	CNV6636
	43	Lever Unit	CXC2711
	44	Lever Unit	CXC2710
	45	Collar	CNV6734
*	46	Holder	CNV7144
	47	Screw	JFZ12P018FTC
	48	Washer	CBF1037
*	49	Motor Unit	CXC4220
	50	Shaft Unit	CXB7528
	51	Screw	JFZ20P020FTC
	52	PU Unit(Service)(PX1)	CXX1568
*	53	Gear	CNV6620
*	54	Gear	CNV6621
	55	Switch(S7,8)	CSN1057
*	56	Connector	CDE6674
	57	Roller	CNV7985
	58	Roller	CNV7982

5. ELECTRICAL PARTS LIST

NOTE:

- *Parts whose parts numbers are omitted are subject to being not supplied.*
- *The part numbers shown below indicate chip components.*

  Chip Resistor

  RS1/◯S◯◯◯J,RS1/◯◯S◯◯◯J

  Chip Capacitor (except for CQS.....)

  CKS....., CCS....., CSZS.....
- *The ⚠ mark found on some component parts indicatesthe importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*

A

Unit Number:CWM9469(MG6347,MG6547)
Unit Number:CWM9470(MG6447,MG6647)
Unit Number:CWM9471(MG6747,MG6847)
Unit Name:Tuner Amp Unit

MISCELLANEOUS

Circuit Symbol and No.		Part No.
IC 151	(A,120,79) IC	BA4560F
IC 201	(A,82,69) IC	PM2011A
IC 371	(A,54,87) IC	BA4560F
IC 401	(A,170,37) IC	BA033T
IC 501	(A,20,144) IC	PAL006A
IC 511	(A,22,74) IC	TDA7384
IC 601	(A,112,44) IC	PD5959A
IC 641	(A,105,121) IC	PML001A
IC 661	(A,134,77) IC	S-93C66BD0I-J8
IC 681	(A,122,122) IC	HA12240FP
IC 691	(A,135,66) IC	S-80835CNNB-B8U
IC 771	(A,145,128) IC	PML001A
Q 101	(A,25,26) Transistor	DTA124EU
Q 102	(A,25,29) Transistor	DTC124EU
Q 103	(A,24,12) Transistor	2SB1185
Q 104	(A,26,20) Transistor	IMX1
Q 401	(A,163,47) Transistor	2SA1037K
Q 402	(A,163,52) Transistor	2SA1037K
Q 503	(B,20,102) Transistor	DTC114EU
Q 504	(B,16,114) Transistor	2SC4081
Q 505	(B,16,106) Transistor	DTC114EU
Q 591	(A,88,121) Transistor	2SA1576
Q 592	(A,75,109) Transistor	DTA124EU
Q 601	(A,117,69) Transistor	DTA143EU
Q 602	(A,121,69) Transistor	DTA114EU
Q 603	(A,129,26) Transistor	DTA114EU
Q 604	(A,122,21) Transistor	DTA123EU
Q 605	(A,124,26) Transistor	DTC124EU
Q 681	(A,119,130) Transistor	2SC4081
Q 691	(A,103,106) Transistor	2SC4081
Q 692	(A,106,108) Transistor	2SC4081
Q 731	(A,93,115) Transistor	2SA1576
Q 781	(A,71,111) Transistor	2SC4081
Q 801	(B,23,37) Transistor	2SC2712
Q 802	(A,6,32) Transistor	2SB1185
Q 803	(B,15,36) Transistor	2SC2713
Q 804	(A,40,47) Transistor	2SC2713
Q 805	(A,35,61) Transistor	2SB1236
Q 806	(A,136,121) Transistor	2SD2318F5
Q 807	(A,63,25) Transistor	2SB1242
Q 808	(B,71,28) Transistor	2SC4081
Q 809	(A,66,34) Transistor	2SB1184F5
Q 810	(B,70,33) Transistor	2SC4081
Q 811	(A,52,27) Transistor	2SD1626
Q 812	(A,39,27) Transistor	2SD1626
Q 813	(A,6,21) Transistor	2SB1185
Q 814	(A,36,12) Transistor	2SB1185
Q 815	(A,47,12) Transistor	2SB1185
Q 816	(A,59,12) Transistor	2SB1185
Q 820	(A,52,59) Transistor	2SD1760F5
D 180	(A,118,99) Diode	UDZS4R7(B)
D 401	(A,139,38) Diode	MPG06G-6415G50
D 541	(B,14,119) Diode	HZU9R1(B1)
D 591	(A,84,115) Diode	1SS355
D 592	(A,85,119) Diode	MPG06G-6415G50
D 593	(A,82,119) Diode	MPG06G-6415G50
D 661	(A,132,83) Diode	1SS355
D 662	(A,128,74) Diode	1SS355
D 663	(A,132,70) Diode	1SS355
D 681	(A,110,123) Diode	UDZS18(B)
D 682	(A,116,123) Diode	UDZS18(B)
D 691	(A,101,116) Diode	UDZS7R5(B)
D 692	(A,103,113) Diode	UDZS7R5(B)
D 693	(A,135,61) Diode	1SS355
D 695	(A,105,129) Diode	MPG06G-6415G50
D 696	(A,105,132) Diode	MPG06G-6415G50
D 731	(A,95,119) Diode	MPG06G-6415G50
D 732	(A,93,119) Diode	MPG06G-6415G50
D 733	(A,92,110) Diode	1SS355
D 753	(A,89,112) Diode	UDZS5R6(B)
D 771	(A,163,140) Diode	MPG06G-6415G50
D 772	(A,161,140) Diode	MPG06G-6415G50
D 781	(A,67,113) Diode	UDZS7R5(B)
D 801	(B,28,38) Diode	HZU8R2(B1)
D 802	(A,46,48) Diode	DAN202U
D 803	(B,132,120) Diode	UDZS5R6(B)
D 804	(A,137,135) Diode	MPG06G-6415G50
D 805	(A,128,115) Diode	DAN202U
D 811	(A,49,121) Diode	5KP24A
D 812	(A,101,137) Diode	MPG06G-6415G50
D 813	(A,85,134) Diode	MPG06G-6415G50

Circuit Symbol and No.		Part No.
D 820	(A,56,52) Diode	HZU3R9(B2)
L 101	(A,121,94) Inductor	CTF1295
L 201	(A,85,82) Inductor	CTF1379
L 202	(A,97,86) Inductor	CTF1379
L 203	(A,93,94) Inductor	CTF1379
L 204	(A,83,81) Inductor	CTF1379
L 205	(A,81,81) Inductor	CTF1379
L 206	(A,79,94) Inductor	CTF1379
L 207	(A,78,81) Inductor	CTF1379
L 208	(A,75,84) Inductor	CTF1379
L 209	(A,62,61) Inductor	LCTAW2R2J2520
L 210	(A,62,73) Inductor	LCTAW2R2J2520
L 211	(A,62,69) Inductor	LCTAW2R2J2520
L 212	(A,62,65) Inductor	LCTAW2R2J2520
L 213	(B,66,70) Inductor	CTF1379
L 214	(B,63,61) Inductor	CTF1379
L 215	(B,81,51) Inductor	CTF1379
L 216	(A,77,57) Inductor	CTF1379
L 217	(A,78,57) Inductor	CTF1379
L 218	(A,80,57) Inductor	CTF1379
L 220	(A,81,56) Inductor	CTF1379
L 221	(A,83,56) Inductor	CTF1379
L 222	(A,84,56) Inductor	CTF1379
L 223	(A,89,57) Inductor	CTF1379
L 224	(B,87,54) Inductor	CTF1379
L 225	(A,96,59) Inductor	CTF1379
L 226	(A,97,67) Inductor	CTF1379
L 227	(A,96,61) Inductor	CTF1379
L 228	(A,97,68) Inductor	CTF1379
L 229	(A,96,63) Inductor	CTF1379
L 230	(A,97,70) Inductor	CTF1379
L 233	(A,97,65) Inductor	CTF1379
L 234	(A,97,72) Inductor	CTF1379
L 235	(A,106,70) Inductor	CTF1379
L 237	(A,71,81) Inductor	CTF1379
L 401	(A,150,108) Inductor	LCKAW1R0J2520
L 402	(A,155,74) Inductor	LCKBW1R0M2520
L 403	(A,154,126) Inductor	LCTAW330J2520
L 405	(A,154,88) Inductor	LCKAW1R0J2520
L 601	(A,117,57) Inductor	LCTAW100J2520
L 801	(A,68,122) Toroidal Coil	CTH1327
TC601	(A,111,19) Trimmer	CCL1046
CF501	(A,42,137) Terminal	CKF1062
CF502	(A,42,133) Terminal	CKF1062
X 201	(A,91,84) Radiator 33.8688MHz	CSS1600
X 601	(A,114,24) Radiator 10.00MHz	CSS1599
EF101	(A,123,105) EMI Filter	CCG1163
AR401	(A,167,144) Surge Protector	DSP-201M-S00B
	FM/AM Tuner Unit	CWE1811

RESISTORS

R 101	(B,31,18)	RS1/16S101J
R 102	(B,33,22)	RS1/16S473J
R 103	(A,16,22)	RS1/16S223J
R 104	(A,13,19)	RS1/8S151J
R 105	(B,25,29)	RS1/4S221J
R 106	(B,18,25)	RS1/8S681J
R 107	(B,18,29)	RS1/8S821J
R 151	(B,104,108)	RS1/10S682J
R 152	(B,113,125)	RS1/10S682J
R 153	(B,102,107)	RS1/10S682J
R 154	(B,116,125)	RS1/10S682J
R 155	(B,105,102)	RS1/16S333J
R 156	(A,110,103)	RS1/16S333J
R 161	(A,115,82)	RS1/16S223J
R 162	(A,115,86)	RS1/16S223J
R 163	(A,114,82)	RS1/16S223J
R 164	(A,117,86)	RS1/16S223J
R 165	(A,114,79)	RS1/16S223J
R 166	(A,127,80)	RS1/16S223J
R 167	(A,126,77)	RS1/16S0R0J
R 168	(A,127,77)	RS1/16S0R0J
R 169	(A,118,84)	RS1/16S223J
R 170	(A,120,84)	RS1/16S223J
R 171	(A,106,101)	RS1/16S682J
R 172	(B,112,101)	RS1/16S682J
R 173	(A,106,103)	RS1/16S682J
R 174	(A,110,100)	RS1/16S682J
R 180	(B,111,97)	RS1/16S821J
R 191	(A,30,25)	RS1/16S0R0J
R 201	(A,93,90)	RS1/16S105J
R 202	(A,79,52)	RAB4C471J
R 203	(A,84,52)	RAB4C471J
R 205	(B,104,90)	RS1/16S0R0J
R 206	(B,102,88)	RS1/16S0R0J
R 207	(A,85,85)	RS1/16S271J
R 208	(A,83,84)	RS1/16S271J
R 209	(A,81,84)	RS1/16S271J
R 210	(A,78,84)	RS1/16S271J
R 211	(A,71,83)	RS1/16S271J
R 215	(A,93,51)	RS1/16S0R0J
R 216	(A,98,52)	RS1/16S0R0J
R 217	(B,96,57)	RS1/16S562J
R 218	(B,100,65)	RS1/16S562J
R 219	(B,110,78)	RS1/16S222J
R 220	(B,108,80)	RS1/16S222J
R 311	(A,59,91)	RS1/16S473J
R 313	(A,62,86)	RS1/16S473J
R 319	(A,59,81)	RS1/16S473J
R 333	(A,57,94)	RS1/16S223J
R 349	(A,50,91)	RS1/16S393J
R 350	(A,49,74)	RS1/16S473J
R 351	(A,52,74)	RS1/16S473J
R 353	(A,64,94)	RS1/16S0R0J
R 403	(A,155,101)	RS1/16S681J
R 405	(A,155,108)	RS1/16S331J
R 406	(A,155,105)	RS1/16S331J
R 407	(A,155,104)	RS1/16S331J
R 408	(A,155,102)	RS1/16S331J
R 409	(B,147,65)	RS1/16S471J
R 410	(A,155,84)	RS1/16S331J
R 411	(A,158,51)	RS1/16S0R0J
R 412	(A,158,49)	RS1/16S0R0J
R 415	(B,147,47)	RS1/16S0R0J
R 416	(B,152,52)	RS1/16S0R0J
R 425	(A,150,46)	RS1/16S0R0J
R 426	(A,152,46)	RS1/16S0R0J
R 437	(A,159,45)	RS1/16S0R0J
R 438	(A,159,46)	RS1/16S0R0J
R 439	(A,156,45)	RS1/16S272J

Circuit Symbol and No.		Part No.
R 440	(A,156,46)	RS1/16S272J
R 457	(A,143,39)	RS1/16S0R0J
R 458	(A,142,28)	RS1/16S0R0J
R 501	(B,35,101)	RS1/16S222J
R 502	(B,37,101)	RS1/16S222J
R 503	(A,30,113)	RS1/16S393J
R 504	(A,37,104)	RS1/16S393J
R 505	(B,16,99)	RS1/16S103J
R 506	(B,16,110)	RS1/10S472J
R 507	(B,17,121)	RS1/10S561J
R 508	(B,15,126)	RS1/10S681J
R 509	(B,23,105)	RS1/16S153J
R 510	(B,26,102)	RS1/10S221J
R 511	(B,22,109)	RS1/10S222J
R 512	(B,19,128)	RS1/16S103J
R 513	(B,24,125)	RS1/16S222J
R 521	(A,28,114)	RS1/16S393J
R 551	(A,36,76)	RS1/16S222J
R 552	(A,36,82)	RS1/16S222J
R 553	(B,33,78)	RS1/16S393J
R 554	(B,35,82)	RS1/16S393J
R 566	(B,38,69)	RS1/16S103J
R 575	(B,37,87)	RS1/16S222J
R 592	(B,80,110)	RS1/16S103J
R 593	(A,79,114)	RS1/16S103J
R 594	(B,88,117)	RS1/16S222J
R 595	(A,88,124)	RS1/16S103J
R 596	(A,88,125)	RS1/16S103J
R 597	(A,83,127)	RS1/10S103J
R 601	(A,98,32)	RAB4C471J
R 602	(A,103,30)	RAB4C471J
R 605	(A,115,31)	RS1/16S104J
R 606	(A,117,31)	RS1/16S473J
R 607	(A,130,77)	RS1/16S473J
R 608	(B,123,58)	RS1/16S473J
R 610	(A,123,31)	RS1/16S471J
R 611	(A,131,34)	RAB4C102J
R 612	(A,134,32)	RS1/16S473J
R 613	(A,135,36)	RS1/16S473J
R 614	(A,134,39)	RS1/16S473J
R 615	(A,131,38)	RS1/16S561J
R 616	(B,126,38)	RS1/16S473J
R 618	(A,133,48) (MG6447,MG6647)	RS1/16S473J
R 619	(A,136,49) (MG6747,MG6847)	RS1/16S473J
R 620	(B,118,47)	RS1/16S102J
R 621	(B,116,47)	RS1/16S102J
R 622	(B,128,43)	RS1/16S473J
R 624	(B,129,47)	RS1/16S473J
R 629	(A,126,57)	RAB4C471J
R 630	(A,114,31)	RS1/16S473J
R 632	(A,117,60)	RS1/16S473J
R 634	(A,108,56)	RS1/16S473J
R 635	(B,101,39)	RS1/16S102J
R 636	(B,102,36)	RS1/16S473J
R 641	(B,93,37)	RS1/16S473J
R 642	(A,124,31)	RS1/16S472J
R 644	(A,105,31)	RS1/16S103J
R 645	(A,126,31)	RS1/16S681J
R 649	(A,120,31)	RS1/16S681J
R 654	(A,128,44)	RS1/16S561J

Circuit Symbol and No.		Part No.
R 655	(A,128,46)	RS1/16S102J
R 656	(A,129,56)	RS1/16S104J
R 657	(A,128,49)	RS1/16S102J
R 658	(A,131,58)	RS1/16S473J
R 659	(A,136,47) (MG6347,MG6547)	RS1/16S473J
	(A,136,47) (MG6747,MG6847)	RS1/16S473J
R 660	(B,123,53)	RS1/16S473J
R 661	(B,133,80)	RS1/16S473J
R 662	(B,130,79)	RS1/16S473J
R 663	(A,136,69)	RS1/16S473J
R 664	(A,135,70)	RS1/16S473J
R 665	(A,126,61)	RS1/16S102J
R 671	(A,128,38)	RS1/16S331J
R 672	(A,128,39)	RS1/16S331J
R 673	(A,128,41)	RS1/16S331J
R 674	(A,128,42)	RS1/16S331J
R 675	(A,128,47)	RS1/16S331J
R 676	(B,126,58)	RS1/16S473J
R 677	(A,107,31)	RS1/16S0R0J
R 678	(A,109,31)	RS1/16S102J
R 679	(A,135,63)	RS1/16S473J
R 681	(A,119,127)	RS1/16S682J
R 682	(B,121,136)	RS1/8S121J
R 683	(A,112,128)	RS1/4S101J
R 684	(A,115,128)	RS1/4S101J
R 685	(B,116,138)	RS1/4S680J
R 687	(A,119,118)	RS1/16S473J
R 688	(A,122,58)	RAB4C102J
R 689	(B,123,51)	RS1/16S473J
R 690	(A,122,116)	RS1/16S472J
R 691	(A,103,109)	RS1/16S473J
R 692	(A,102,109)	RS1/16S473J
R 693	(A,106,113)	RS1/16S473J
R 694	(A,105,112)	RS1/16S104J
R 695	(A,106,116)	RS1/16S222J
R 696	(A,101,121)	RS1/16S473J
R 697	(A,105,56)	RS1/16S102J
R 698	(A,131,53) (MG6347,MG6547)	RS1/16S473J
	(A,131,53) (MG6447,MG6647)	RS1/16S473J
R 699	(A,104,56)	RS1/16S102J
R 701	(A,71,44)	RS1/16S272J
R 702	(A,68,45)	RS1/16S183J
R 704	(A,56,44)	RS1/16S683J
R 705	(A,57,44)	RS1/16S683J
R 708	(A,108,111)	RS1/16S473J
R 710	(A,115,111)	RS1/16S473J
R 731	(B,95,116)	RS1/16S472J
R 732	(A,94,111)	RS1/16S472J
R 733	(A,91,116)	RS1/16S102J
R 734	(A,98,120)	RS1/16S102J
R 735	(B,100,120)	RS1/16S473J
R 736	(A,98,109)	RS1/16S102J
R 737	(B,92,128)	RS1/10S820J
R 756	(A,90,109)	RS1/16S103J
R 759	(A,89,115)	RS1/10S103J
R 772	(A,142,129)	RS1/16S473J
R 773	(B,140,128)	RS1/16S222J
R 781	(B,73,111)	RS1/16S473J
R 782	(B,70,113)	RS1/16S473J
R 801	(B,25,40)	RS1/16S471J

Circuit Symbol and No.		Part No.
R 802	(B,26,43)	RS1/16S181J
R 803	(B,20,41)	RS1/16S221J
R 804	(A,12,29)	RS1/16S223J
R 805	(B,18,41)	RS1/16S332J
R 806	(A,39,63)	RS1/16S332J
R 807	(A,36,45)	RS1/8S181J
R 808	(A,40,41)	RS1/8S181J
R 809	(A,46,41)	RS1/8S181J
R 810	(A,46,44)	RS1/8S181J
R 811	(A,43,47)	RS1/16S103J
R 812	(A,49,47)	RS1/16S332J
R 813	(A,46,52)	RS1/16S332J
R 814	(B,127,121)	RS1/16S223J
R 815	(B,127,125)	RS1/4S100J
R 816	(A,127,123)	RS1/16S222J
R 817	(A,128,123)	RS1/16S332J
R 818	(B,19,37)	RS1/16S221J
R 821	(A,52,54)	RS1/16S821J
R 831	(A,91,134)	RS1/8S331J
R 832	(A,91,131)	RS1/8S331J
R 833	(A,95,132)	RS1/8S331J
R 834	(A,70,134)	RS1/8S331J
R 835	(A,74,131)	RS1/8S331J
R 836	(A,75,134)	RS1/8S331J
R 841	(A,21,43)	RS1/4S2R2J
R 842	(A,21,39)	RS1/4S2R2J
R 843	(A,18,30)	RS1/4S2R2J
R 844	(A,18,26)	RS1/4S2R2J
R 851	(A,66,28)	RS1/16S223J
R 852	(A,68,20)	RS1/4S471J
R 853	(B,74,24)	RS1/16S102J
R 854	(B,67,28)	RS1/16S104J
R 855	(A,58,35)	RS1/16S223J
R 856	(B,60,38)	RS1/4S470J
R 857	(B,65,31)	RS1/16S102J
R 858	(B,61,30)	RS1/16S104J
R 859	(A,53,31)	RS1/10S4700F
R 860	(A,54,37)	RS1/10S1001F
R 861	(A,54,35)	RS1/10S1801F
R 862	(A,44,26)	RS1/4S330J
R 863	(A,48,26)	RS1/4S330J
R 864	(A,40,31)	RS1/16S471J
R 865	(A,34,25)	RS1/16S185J
R 866	(A,53,21)	RS1/4S2R2J
R 867	(A,56,21)	RS1/4S2R2J
R 868	(A,46,21)	RS1/4S2R2J
R 869	(A,49,21)	RS1/4S2R2J
R 870	(A,39,21)	RS1/4S2R2J
R 871	(A,42,21)	RS1/4S2R2J
R 872	(B,54,34)	RS1/4S470J
R 873	(B,60,34)	RS1/4S390J
R 874	(A,35,18)	RS1/16S223J
R 881	(A,118,138)	RS1/4S361J
R 882	(A,114,138)	RS1/4S361J

CAPACITORS

C 101	(B,33,20)	CKSRYB473K50
C 102	(B,30,30)	CKSRYB103K50
C 103	(A,32,29)	CEHAR220M16
C 113	(A,82,32)	CKSYB475K16
C 114	(A,77,32)	CKSYB475K16
C 151	(A,112,85)	CEJQ100M16
C 152	(A,108,93)	CEJQ100M16
C 153	(A,107,87)	CEJQ100M16
C 154	(A,112,92)	CEJQ100M16
C 155	(A,115,79)	CCSRCH101J50
C 156	(A,126,80)	CCSRCH101J50
C 180	(A,114,99)	CEJQ470M10
C 201	(A,94,88)	CCSRCH100D50
C 202	(A,90,88)	CCSRCH100D50
C 203	(A,95,79)	CKSRYB103K50
C 204	(A,100,84)	CEJQ220M10
C 205	(B,98,84)	CCSRCH101J50
C 206	(B,86,83)	CKSRYB104K50
C 207	(B,88,93)	CKSRYB104K50
C 208	(A,90,94)	CEJQ220M10
C 209	(B,87,78)	CKSQYB335K6R3
C 210	(B,83,79)	CKSQYB335K6R3
C 211	(B,93,93)	CKSRYB104K50
C 213	(B,81,92)	CKSRYB104K50
C 214	(B,81,80)	CKSQYB335K6R3
C 215	(B,78,80)	CKSQYB335K6R3
C 216	(B,80,75)	CKSRYB104K50
C 217	(B,78,90)	CKSRYB104K50
C 218	(A,76,92)	CEJQ220M10
C 219	(A,75,83)	CKSRYB104K50
C 220	(B,70,87)	CKSRYB104K50
C 221	(A,72,88)	CEJQ220M10
C 222	(A,75,81)	CKSRYB104K50
C 223	(B,75,79)	CKSQYB335K6R3
C 224	(B,68,74)	CKSRYB104K50
C 225	(A,67,81)	CEJQ220M10
C 226	(A,66,58)	CEJQ220M10
C 227	(B,67,61)	CKSRYB104K50
C 228	(A,86,57)	CKSRYB102K50
C 229	(B,86,58)	CKSRYB104K50
C 231	(A,92,58)	CKSRYB222K50
C 232	(B,91,58)	CKSRYB104K50
C 233	(A,96,56)	CKSYB475K16
C 234	(A,99,56)	CKSYB475K16
C 235	(B,97,59)	CKSYB475K16
C 236	(B,96,69)	CKSYB475K16
C 237	(B,95,63)	CKSYB475K16
C 238	(B,95,72)	CKSYB475K16
C 241	(B,95,66)	CKSYB475K16
C 242	(B,96,76)	CKSYB475K16
C 243	(A,98,76)	CKSRYB222K50
C 244	(A,103,69)	CEJQ330M10
C 245	(B,86,71)	CKSRYB223K50
C 246	(A,104,80)	CEJQ330M10
C 247	(A,96,76)	CKSRYB222K50
C 248	(B,88,71)	CCSRCH101J50
C 249	(A,104,72)	CEJQ220M10
C 251	(A,83,92)	CEJQ101M10
C 252	(A,75,51)	CEJQ220M10
C 253	(A,90,54)	CEJQ220M10
C 257	(A,86,97)	CKSRYB682K50
C 258	(A,86,95)	CKSRYB682K50
C 259	(B,83,85)	CKSRYB682K50

Circuit Symbol and No.		Part No.
C 260	(B,77,85)	CKSRYB682K50
C 261	(B,68,87)	CKSRYB682K50
C 307	(A,59,87)	CKSQYB683K25
C 309	(A,59,84)	CKSQYB184K16
C 311	(A,54,82)	CKSQYB103K50
C 325	(A,53,78)	CEJQ2R2M50
C 355	(A,45,87)	CEJQ3R3M50
C 356	(A,45,94)	CEJQ3R3M50
C 357	(A,52,95)	CEJQ470M10
C 361	(A,61,93)	CKSQYB104K16
C 363	(A,57,97)	CKSQYB104K16
C 365	(A,44,67)	CEJQ3R3M50
C 366	(A,44,73)	CEJQ3R3M50
C 377	(A,45,79)	CEJQ3R3M50
C 401	(B,159,66)	CKSRYB562K50
C 402	(B,157,66)	CKSRYB562K50
C 403	(B,165,84)	CKSRYB103K50
C 404	(B,165,79)	CKSRYB103K50
C 405	(B,147,55)	CKSRYB103K50
C 406	(A,146,57)	CEJQ101M10
C 407	(B,156,29)	CCSRCH101J50
C 409	(A,158,38)	CEJQ1R0M50
C 410	(A,136,19)	CEAT102M16(P35)
C 414	(A,145,99)	CKSRYB102K50
C 415	(B,159,98)	CCSRCH470J50
C 427	(B,159,116)	CKSRYB103K50
C 428	(A,155,32)	CEJQ220M10
C 429	(A,145,102)	CEJQ101M10
C 431	(A,153,91)	CEJQ470M6R3
C 432	(A,153,79)	CEJQ470M6R3
C 501	(B,22,131)	CKSRYB474K10
C 502	(B,21,127)	CKSRYB474K10
C 504	(A,48,139)	CKSQYB104K50
C 505	(A,48,136)	CKSQYB225K10
C 506	(A,43,141)	CKSQYB225K10
C 507	(B,73,145)	CKSRYB102K50
C 508	(B,71,145)	CKSRYB102K50
C 509	(B,77,145)	CKSRYB102K50
C 510	(B,75,145)	CKSRYB102K50
C 511	(B,151,146)	CKSRYB102K50
C 512	(B,145,146)	CKSRYB102K50
C 521	(B,22,136)	CKSQYB474K25
C 522	(B,25,136)	CKSQYB474K25
C 525	(B,29,125)	CKSRYB474K10
C 526	(B,26,130)	CKSRYB474K10
C 527	(B,30,128)	CKSQYB474K25
C 528	(B,30,130)	CKSQYB474K25
C 531	(A,32,139)	CEHAR1R0M50
C 532	(A,29,133)	CEHAR100M16
C 533	(B,28,94)	CKSQYB104K50
C 541	(B,30,77)	CKSRYB474K10
C 542	(B,35,84)	CKSRYB474K10
C 543	(B,27,79)	CKSQYB474K25
C 544	(B,30,83)	CKSQYB474K25
C 545	(B,27,88)	CKSRYB103K50
C 546	(B,27,86)	CKSRYB103K50
C 554	(B,30,87)	CKSQYB225K10
C 555	(B,32,87)	CKSQYB225K10
C 556	(A,31,70)	CEHAR1R0M50
C 557	(A,36,71)	CEHAR100M16

Circuit Symbol and No.		Part No.
C 558	(B,81,145)	CKSRYB102K50
C 559	(B,79,145)	CKSRYB102K50
C 560	(B,83,145)	CKSRYB102K50
C 561	(B,85,145)	CKSRYB102K50
C 578	(A,31,102)	CEHAR100M16
C 580	(A,36,92)	CEHAT102M16(P35)
C 591	(A,81,107)	CEJQ1R0M50
C 592	(A,81,112)	CEJQ4R7M35
C 593	(B,81,121)	CKSRYB102K50
C 601	(A,118,61)	CKSRYB104K50
C 602	(A,114,58)	CKSRYB104K50
C 603	(B,110,27)	CCSRCH330J50
C 604	(B,113,27)	CCSRCH8R0D50
C 607	(A,112,58)	CKSRYB105K10
C 661	(A,137,72)	CKSRYB473K50
C 681	(A,113,124)	CKSRYB102K50
C 682	(A,114,124)	CKSRYB102K50
C 683	(A,116,119)	CKSRYB104K50
C 691	(A,130,65)	CEJQ2R2M50
C 692	(A,126,63)	CKSRYB102K50
C 695	(A,101,125)	CKSQYB104K50
C 696	(A,110,133)	CKSQYB473K50
C 703	(A,63,44)	CKSRYB104K50
C 731	(A,98,112)	CEJQ2R2M50
C 732	(B,95,113)	CKSRYB102K50
C 753	(A,90,110)	CKSRYB102K50
C 771	(A,143,133)	CKSQYB102K50
C 772	(A,147,133)	CKSQYB473K50
C 773	(A,151,134)	CEJQ100M25
C 791	(A,94,37)	CKSRYB103K50
C 801	(A,33,36)	CEHAR101M10
C 802	(B,30,38)	CKSRYB102K50
C 803	(B,16,42)	CKSRYB223K50
C 805	(A,139,112)	CEJQ220M10
C 806	(B,133,117)	CKSRYB473K50
C 807	(A,127,130) 4700µF/16V	CCH1362
C 809	(A,58,27)	CEJQ220M16
C 810	(A,35,25)	CKSRYB472K50
C 811	(A,54,137) 4700µF/16V	CCH1328(P45)
C 812	(B,58,132)	CKSQYB104K50
C 820	(B,62,51)	CKSRYB103K50
C 821	(A,60,49)	CEJQ100M16
C 822	(B,56,53)	CKSRYB103K50

B

Unit Number:CWM9308
Unit Name:Keyboard Unit

MISCELLANEOUS

IC 901	(B,63,158) IC	LC75804W
IC 902	(B,65,107) IC	LC75823WHS
Q 901	(B,93,58) Transistor	DTC124EU
Q 902	(B,93,51) Transistor	DTC124EU
Q 903	(B,89,58) Transistor	DTA123EU
Q 904	(B,89,50) Transistor	DTA123EU
Q 905	(B,78,58) Transistor	DTA123EU
Q 906	(B,78,51) Transistor	2SA1576
D 901	(A,12,121) LED	DG1112H
D 902	(A,14,120) LED	CL200DCTU

Circuit Symbol and No.		Part No.
D 905	(A,42,219) Chip LED	CL200HRCTU
D 910	(B,89,54) Diode	DAN202U
L 901	(B,65,82) Inductor	LCTAW100J2520
S 903	(A,69,39) Switch(PWR)	CSG1178
S 908	(A,33,32) Switch(LOAD)	CSG1181
S 921	(A,33,210) Switch(EJECT)	CSG1181
S 922	(A,65,39) Rotary Switch(VOLUME)	CSD1101
IL 901	(A,39,199) Lamp 60mA,8V	CEL1768
IL 902	(A,108,211) Lamp 60mA,8V	CEL1768
IL 904	(A,121,166) Lamp 60mA,8V	CEL1768
IL 905	(A,103,155) Lamp 60mA,8V	CEL1768
IL 906	(A,121,121) Lamp 60mA,8V	CEL1768
IL 907	(A,103,87) Lamp 60mA,8V	CEL1768
IL 908	(A,121,75) Lamp 60mA,8V	CEL1768
IL 910	(A,108,31) Lamp 60mA,8V	CEL1768
IL 911	(A,63,39) Lamp 60mA,8V	CEL1768
IL 912	(A,39,43) Lamp 60mA,8V	CEL1768
IL 913	(A,65,218) Lamp 60mA,8V	CEL1769
IL 915	(A,65,68) Lamp 60mA,8V	CEL1769
IL 916	(A,92,35) Lamp 60mA,8V	CEL1768
LCD901	(A,65,143) LCD	CAW1830

RESISTORS

R 901	(B,38,220)	RS1/16S561J
R 902	(B,58,182)	RS1/16S103J
R 903	(B,58,170)	RS1/16S393J
R 904	(B,61,174)	RS1/16S471J
R 905	(B,93,129)	RS1/16S471J
R 906	(B,90,129)	RS1/16S471J
R 907	(B,88,129)	RS1/16S471J
R 908	(B,50,179)	RS1/16S102J
R 909	(B,56,176)	RS1/16S473J
R 910	(B,58,180)	RS1/16S473J
R 911	(B,55,111)	RS1/16S473J
R 912	(B,53,179)	RAB4C102J
R 913	(B,60,178)	RS1/16S473J
R 920	(B,58,184)	RS1/16S472J
R 921	(B,83,58)	RS1/16S181J
R 922	(B,84,49)	RS1/10S151J
R 923	(B,78,48)	RS1/16S181J
R 924	(B,78,55)	RS1/16S331J
R 925	(B,84,52)	RS1/16S102J
R 926	(B,81,51)	RS1/16S223J
R 930	(B,60,211)	RS1/10S8R2J
R 931	(B,56,211)	RS1/10S100J
R 932	(B,102,204)	RS1/10S8R2J
R 933	(B,102,209)	RS1/10S100J
R 936	(B,115,181)	RS1/10S8R2J
R 937	(B,115,176)	RS1/10S100J
R 938	(B,104,128)	RS1/10S120J
R 939	(B,104,133)	RS1/10S120J
R 940	(B,113,133)	RS1/10S8R2J
R 941	(B,113,128)	RS1/10S100J
R 942	(B,107,97)	RS1/10S120J
R 943	(B,107,92)	RS1/10S120J
R 944	(B,111,59)	RS1/10S8R2J
R 945	(B,116,59)	RS1/10S100J
R 948	(B,102,44)	RS1/10S8R2J

Circuit Symbol and No.		Part No.
R 949	(B,102,40)	RS1/10S100J
R 950	(B,54,47)	RS1/10S8R2J
R 951	(B,58,47)	RS1/10S100J
R 952	(B,39,47)	RS1/10S4R7J
R 953	(B,36,47)	RS1/10S5R6J
R 954	(B,72,212)	RS1/10S8R2J
R 955	(B,68,212)	RS1/10S8R2J
R 958	(B,76,71)	RS1/10S8R2J
R 959	(B,73,71)	RS1/10S8R2J
R 960	(B,98,44)	RS1/10S4R7J
R 961	(B,98,40)	RS1/10S5R6J
R 980	(B,92,69)	RS1/16S103J
R 981	(B,94,69)	RS1/16S103J

CAPACITORS

C 901	(B,54,54)	CKSRYB103K50
C 902	(B,54,57)	CKSRYB103K50
C 905	(B,58,172)	CKSRYB102K50
C 906	(B,58,174)	CKSRYB473K50
C 907	(B,60,176)	CKSRYB473K50
C 908	(B,57,168)	CKSRYB103K50
C 909	(B,63,85)	CSZS4R7M16
C 910	(B,55,112)	CKSRYB102K50
C 911	(B,52,109)	CKSRYB103K50

C
Unit Number:CWX2971
Unit Name:Control Unit

MISCELLANEOUS

IC 201	IC	UPD63711GC
IC 301	IC	BD7962FM
IC 302	IC	S-L2980A33MC-C6S
IC 303	IC	BA05SFP
IC 501	IC	BU9423AKS
IC 502	IC	HY57V161610ETP-8
IC 504	IC	TC74VHCT08AFT
IC 505	IC	TC74VHC541FT
IC 702	IC	PD5972A
Q 101	Transistor	2SB1132
Q 601	Transistor	DTC114EU
Q 602	Transistor	DTA123JU
Q 603	Transistor	DTC314TU
Q 604	Transistor	DTC314TU
Q 702	Transistor	UMD3N
D 101	Diode	1SS355
D 301	Diode	S1G-6904G2P
D 303	Diode	S1G-6904G2P
D 601	Diode	MA152WA
L 201	Inductor	CTF1306
L 601	Inductor	CTF1295
TH701	Thermistor	CCX1058
X 201	Radiator 16.93MHz	CSS1581
X 701	Radiator 10.00MHz	CSS1428

RESISTORS

R 101		RS1/8S120J
R 102		RS1/8S100J
R 103		RS1/16S222J

Circuit Symbol and No.	Part No.
R 104	RS1/16S102J
R 105	RS1/16S0R0J
R 201	RS1/16S104J
R 202	RAB4CQ681J
R 203	RS1/16S0R0J
R 204	RS1/16S0R0J
R 205	RS1/16S103J
R 206	RS1/16S393J
R 207	RS1/16S0R0J
R 209	RS1/16S0R0J
R 210	RS1/16S0R0J
R 211	RS1/16S0R0J
R 212	RS1/16S562J
R 213	RS1/16S153J
R 214	RS1/16S123J
R 216	RS1/16S0R0J
R 220	RS1/16S471J
R 221	RS1/16S681J
R 297	RS1/16S181J
R 298	RS1/16S681J
R 299	RS1/16S470J
R 301	RS1/16S103J
R 302	RS1/16S153J
R 303	RS1/16S103J
R 304	RS1/16S103J
R 305	RS1/16S272J
R 306	RS1/16S272J
R 307	RS1/16S182J
R 308	RS1/16S272J
R 309	RS1/16S682J
R 310	RS1/16S822J
R 311	RS1/16S103J
R 312	RS1/16S681J
R 313	RS1/16S103J
R 314	RS1/16S153J
R 315	RS1/16S153J
R 316	RS1/16S153J
R 317	RS1/16S103J
R 318	RS1/16S103J
R 319	RS1/16S102J
R 320	RS1/16S392J
R 322	RS1/16S103J
R 323	RS1/16S103J
R 324	RS1/16S103J
R 325	RS1/16S103J
R 501	RS1/16S0R0J
R 504	RS1/16S331J
R 508	RS1/16S0R0J
R 511	RS1/16S0R0J
R 512	RS1/16S562J
R 513	RS1/16S822J
R 514	RS1/16S0R0J
R 515	RS1/16S0R0J
R 516	RS1/16S331J
R 601	RS1/16S102J
R 602	RS1/16S102J
R 603	RS1/16S223J
R 604	RS1/16S223J
R 605	RS1/16S102J
R 606	RS1/16S681J
R 607	RS1/16S681J
R 608	RS1/16S102J
R 609	RAB4CQ681J
R 701	RAB4CQ103J
R 702	RS1/16S222J
R 703	RS1/16S681J
R 704	RAB4CQ222J
R 705	RAB4CQ681J
R 706	RS1/16S473J
R 707	RS1/16S473J
R 708	RS1/16S222J
R 709	RS1/16S222J
R 711	RAB4CQ103J
R 712	RS1/16S473J
R 713	RS1/16S681J
R 714	RS1/16S473J
R 715	RAB4CQ222J
R 716	RS1/16S103J
R 718	RS1/16S473J
R 720	RS1/16S103J
R 724	RS1/16S104J
R 727	RS1/16S0R0J
R 734	RS1/16S104J
R 736	RS1/16S681J
R 739	RS1/16S473J
R 741	RS1/16S103J
R 742	RS1/16S222J
R 743	RS1/16S681J
R 758	RS1/16S133J
R 759	RS1/16S103J
R 760	RS1/16S433J
R 767	RS1/16S154J
R 775	RAB4CQ681J

CAPACITORS

C 101	CKSRYB103K25
C 102	CKSRYB104K25
C 103	CEVW101M10
C 104	CEVW470M6R3
C 105	CKSRYB224K16
C 106	CKSRYB224K16
C 107	CKSRYB224K16
C 201	CKSRYB104K25
C 202	CEVW220M6R3
C 203	CKSRYB473K25
C 204	CKSRYB182K50
C 205	CKSRYB104K25
C 206	CKSRYB152K50
C 207	CKSRYB224K16
C 208	CCSRCH180J50
C 209	CCSRCJ2R0D50
C 210	CCSRCH181J50
C 211	CCSRCH510J50
C 212	CKSRYB682K50
C 213	CKSRYB104K25
C 214	CKSRYB104K25
C 215	CKSRYB103K25
C 216	CKSRYB104K25
C 217	CKSRYB104K25

Circuit Symbol and No.		Part No.
C 218		CKSRYB104K25
C 219		CKSRYB104K25
C 220		CKSRYB104K25
C 221		CEVW470M6R3
C 222		CKSRYB104K25
C 223		CKSRYB102K50
C 224		CKSRYB104K25
C 225		CKSRYB103K25
C 226		CCSRCH470J50
C 227		CCSRCH470J50
C 228		CKSRYB104K25
C 301		CEVW101M10
C 302		CKSRYB224K16
C 303		CKSRYB224K16
C 305		CKSRYB105K10
C 306	10µF/10V	CCH1349
C 307		CKSRYB224K16
C 309		CKSYB475K16
C 502		CKSRYB104K25
C 505		CKSRYB104K25
C 508		CKSRYB104K25
C 509		CKSRYB104K25
C 512		CKSRYB104K25
C 601		CEVW220M6R3
C 602		CEVW220M6R3
C 701		CKSRYB104K25
C 702		CKSRYB104K25
C 703		CKSRYB103K25
C 704		CKSRYB103K25
C 705		CKSRYB104K25
C 706		CKSRYB104K25
C 707		CKSRYB103K25
C 708		CKSRYB473K25

E
Unit Number:
Unit Name:PCB Unit(Load)

Q 21	Photo-transistor	CPT231SCTU
Q 22	Photo-transistor	CPT231SCTU
L 21	Inductor	LCYBR15J1608
L 22	Inductor	LCYBR15J1608
S 21	Spring Switch(LOAD1)	CSN1051
S 22	Spring Switch(LOAD2)	CSN1052

D
Unit Number:CWX2614
Unit Name:PCB Unit(LED)

D 31	Chip LED	CL205IRXTU
D 32	Chip LED	CL205IRXTU
S 31	Spring Switch(CAMLOAD)	CSN1052
S 32	Spring Switch(CAMEOK)	CSN1052
R 31		RS1/16S0R0J

G
Unit Number:CWX2611
Unit Name:PCB Unit

Circuit Symbol and No.		Part No.
L 1	Inductor	CTF1389
S 41	Spring Switch(LOAD3)	CSN1051

F
Unit Number:CWX2613
Unit Name:PCB Unit(Side)

MISCELLANEOUS

S 11	Spring Switch(CAMCLMP)	CSN1052
VR11	Semi-fixed 1kΩ(B)	CCP1338

RESISTORS

R 11		RS1/16S562J
R 12		RS1/16S562J
R 13		RS1/10S391J
R 14		RS1/10S391J
R 15		RS1/16S0R0J
R 16		RS1/16S0R0J

CAPACITORS

C 12		CKSRYB104K25

H
Unit Number:
Unit Name:PCB Unit(M2 Unit)

MISCELLANEOUS

IC 1	IC	BA6849FS
S 7	Switch(HOME)	CSN1057
S 8	Switch(CLAMP)	CSN1057

RESISTORS

R 1		RS1/16S221J
R 2		RS1/16S221J
R 3		RS1/16S4R7J
R 4		RS1/16S1R0J

CAPACITORS

C 1		CKSRYB104K16

Miscellaneous Parts List

M 1	Motor Unit(-A)(CAMGEAR)	CXC1144
M 2	Motor Unit(-B)(ELEVATION)	CXC1145
M 3	Motor Unit(-A)(CRG)	CXC1143
VR1	Variable Resistor 10kΩ	CCW1023
	PU Unit(Service)(PX1)	CXX1568