EXPLODED VIEW (UNIT)

Block No.200

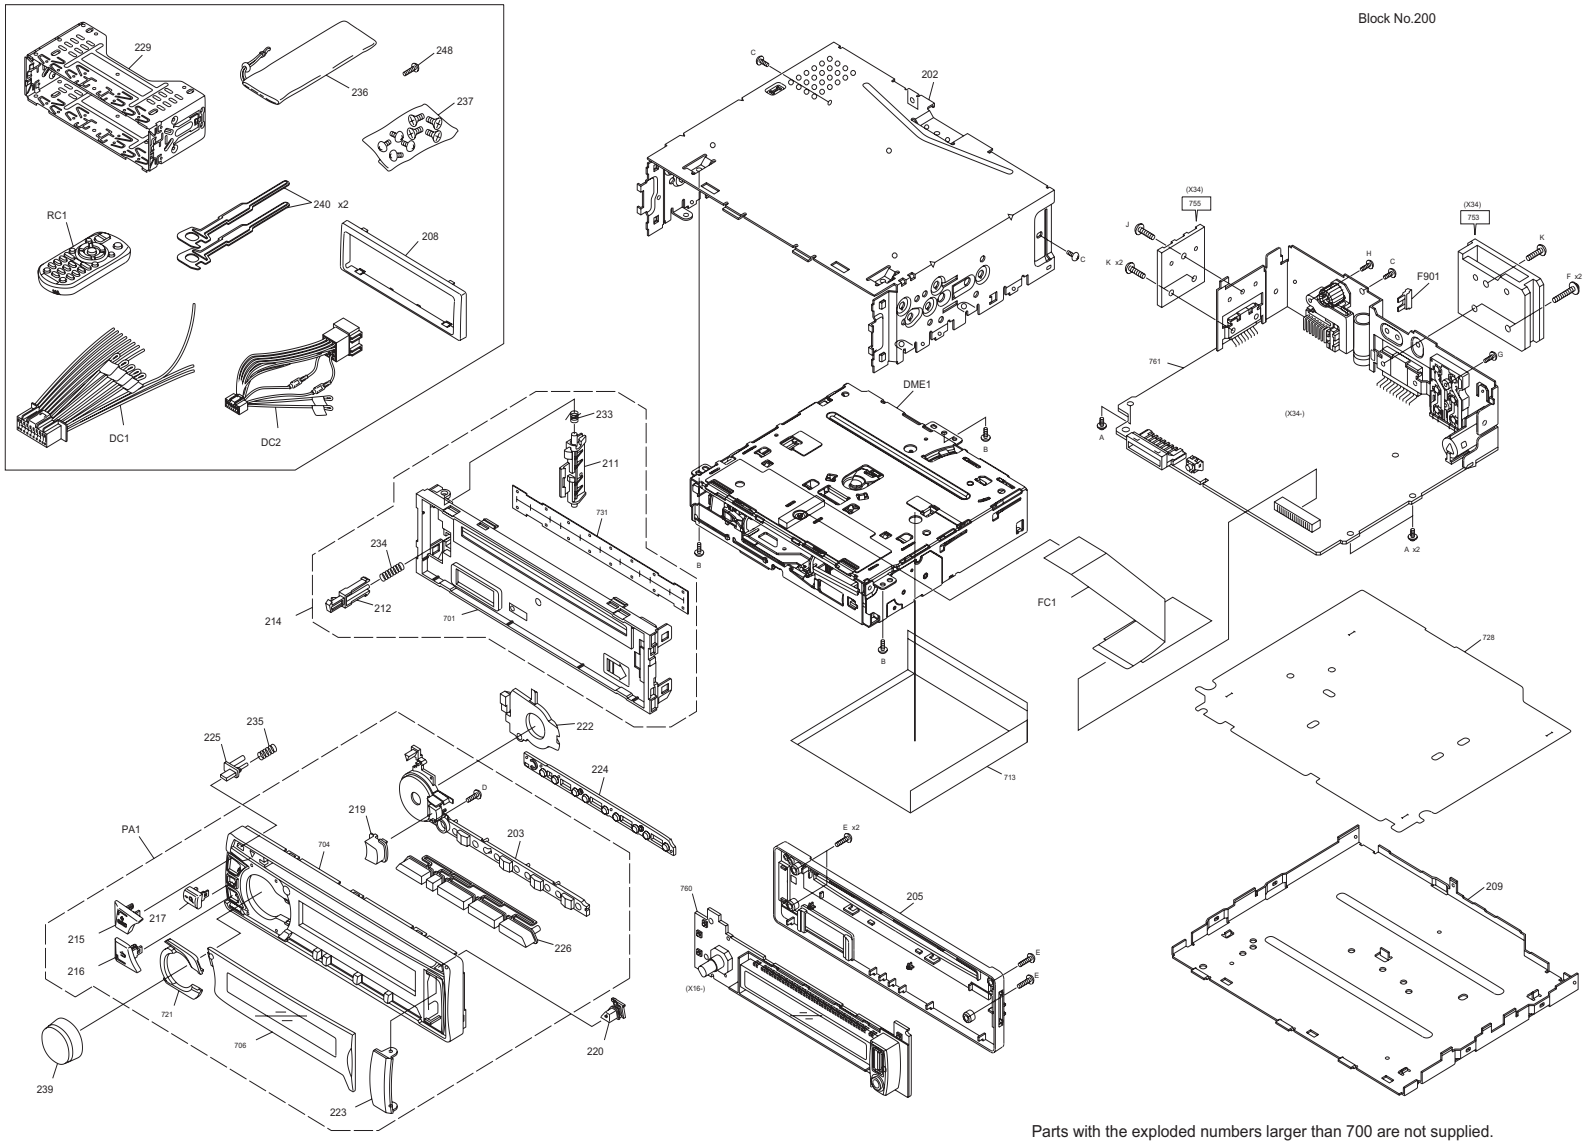


Parts with the exploded numbers larger than 700 are not supplied.

No.WA023

created date:2011-11-24

| MODEL | MARK | MODEL | MARK | MODEL | MARK |
|---|---|---|---|---|---|
| KDC-352U | K0 | KDC-4554U | E1 | KDC-X396 | K1 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| EXPLODED VIEW (UNIT) <200> | | | | | | |
| ⚠ | DC1 | QAM1336-001 | DC CORD | | 1 | K0,K1 |
| ⚠ | DC2 | QAM1339-001 | DC CORD | | 1 | E1 |
| | DME1 | X92-6740-00 | MECHANISM ASSY | HCS-1100W | 1 | |
| ⚠ | F901 | QMFZ064-100-J1 | CARTRIDGE FUSE | 10A | 1 | |
| | FC1 | WJT0277-001A-E | E-CARD WIRE | | 1 | |
| | PA1 | GE20289-008A | F.PANEL ASSY | | 1 | K0 |
| | PA1 | GE20289-010A | F.PANEL ASSY | | 1 | E1 |
| | PA1 | GE20290-011A | F.PANEL ASSY | | 1 | K1 |
| | RC1 | QAL1303-001 | REMOCON UNIT | RC-405 | 1 | K0,K1 |
| | A | GE40377-002A | SCREW | | 3 | |
| | B | QYSDST2604ZA | TAP SCREW | M2.6 x 4mm | 3 | |
| | C | QYSDST2606ZA | TAP SCREW | M2.6 x 6mm | 3 | |
| | D | QYSPSF2006ZA | TAP SCREW | M2 x 6mm | 1 | |
| | E | QYSPSF2008ZA | TAP SCREW | M2 x 8mm | 4 | |
| | F | GE40377-005A | SPECIAL SCREW | | 2 | |
| | G | QYSDSF2608ZA | TAP SCREW | M2.6 x 8mm | 1 | |
| | H | QYSDSG3006ZA | TAP SCREW | M3 x 6mm | 1 | |
| | J | QYSDST2608ZA | TAP SCREW | M2.6 x 8mm | 1 | |
| | K | QYSDST2610ZA | TAP SCREW | M2.6 x 10mm | 3 | |
| | 202 | GE10283-001A | TOP CHASSIS | | 1 | |
| | 203 | GE10309-001A | LIGHT GUIDE | | 1 | |
| | 205 | GE10313-001A | REAR COVER | | 1 | |
| | 208 | GE20300-001A | TRIM PLATE | | 1 | K0,E1 |
| | 208 | GE20291-001A | TRIM PLATE | | 1 | K1 |
| | 209 | GE20296-003A | BOTTOM COVER | | 1 | |
| | 211 | GE34045-001A | LOCK LEVER | | 1 | |
| | 212 | GE34046-001A | RELEASE LEVER | | 1 | |
| | 214 | GE34074-001A | F.CHASSIS ASSY | | 1 | |
| | 215 | GE34291-001A | SRC BUTTON | | 1 | |
| | 216 | GE34292-001A | BACK BUTTON | | 1 | |
| | 217 | GE34293-002A | SEARCH BTN | | 1 | |
| | 219 | GE34496-001A | ACC BTN(iPod) | | 1 | |
| | 220 | GE34497-001A | EJECT BUTTON | | 1 | |
| | 222 | GE34500-001A | LIGHTING LENS | | 1 | |
| | 223 | GE34502-001A | USB DOOR COVER | | 1 | |
| | 224 | GE34504-001A | CONDUCT.RUBBER | | 1 | |
| | 225 | GE34505-001A | DETACH BUTTON | | 1 | |
| | 226 | GE34517-001A | PRESET BTN | | 1 | |
| | 229 | GE34826-001A | M.SLEEVE ASSY | | 1 | |
| | 233 | GE40504-001A | SPRING | | 1 | |
| | 234 | GE40505-001A | SPRING | | 1 | |
| | 235 | GE40505-002A | SPRING | | 1 | |
| | 236 | GE40521-001A | CARRYING CASE | | 1 | K0,E1 |
| | 236 | GE40520-001A | CARRYING CASE | | 1 | K1 |
| | 237 | GE40536-001A | SCREW SET | | 1 | K0,K1 |
| | 239 | GE40562-003A | VOL KNOB | | 1 | |
| | 240 | GE40578-001A | HOOK | | 2 | |
| | 248 | QYSPSF2008MA | TAP SCREW | M2 x 8mm | 1 | K0,K1 |
| | - | GET0743-001A | INST BOOK | ENG FRE SPA | 1 | K0,K1 |
| | - | GET0744-001A | INST BOOK | ENG GER RUS UKR | 1 | E1 |
| | - | GET0744-004A | INST BOOK | FRE DUT ITA SPA POR | 1 | E1 |
| | - | GE34564-001A | INNER CARTON | | 1 | K0 |
| | - | GE34586-001A | INNER CARTON | | 1 | E1 |
| | - | GE34562-001A | INNER CARTON | | 1 | K1 |

# EXPLODED VIEW (CD MECHANISM)

Block No.130

HCS-1100W

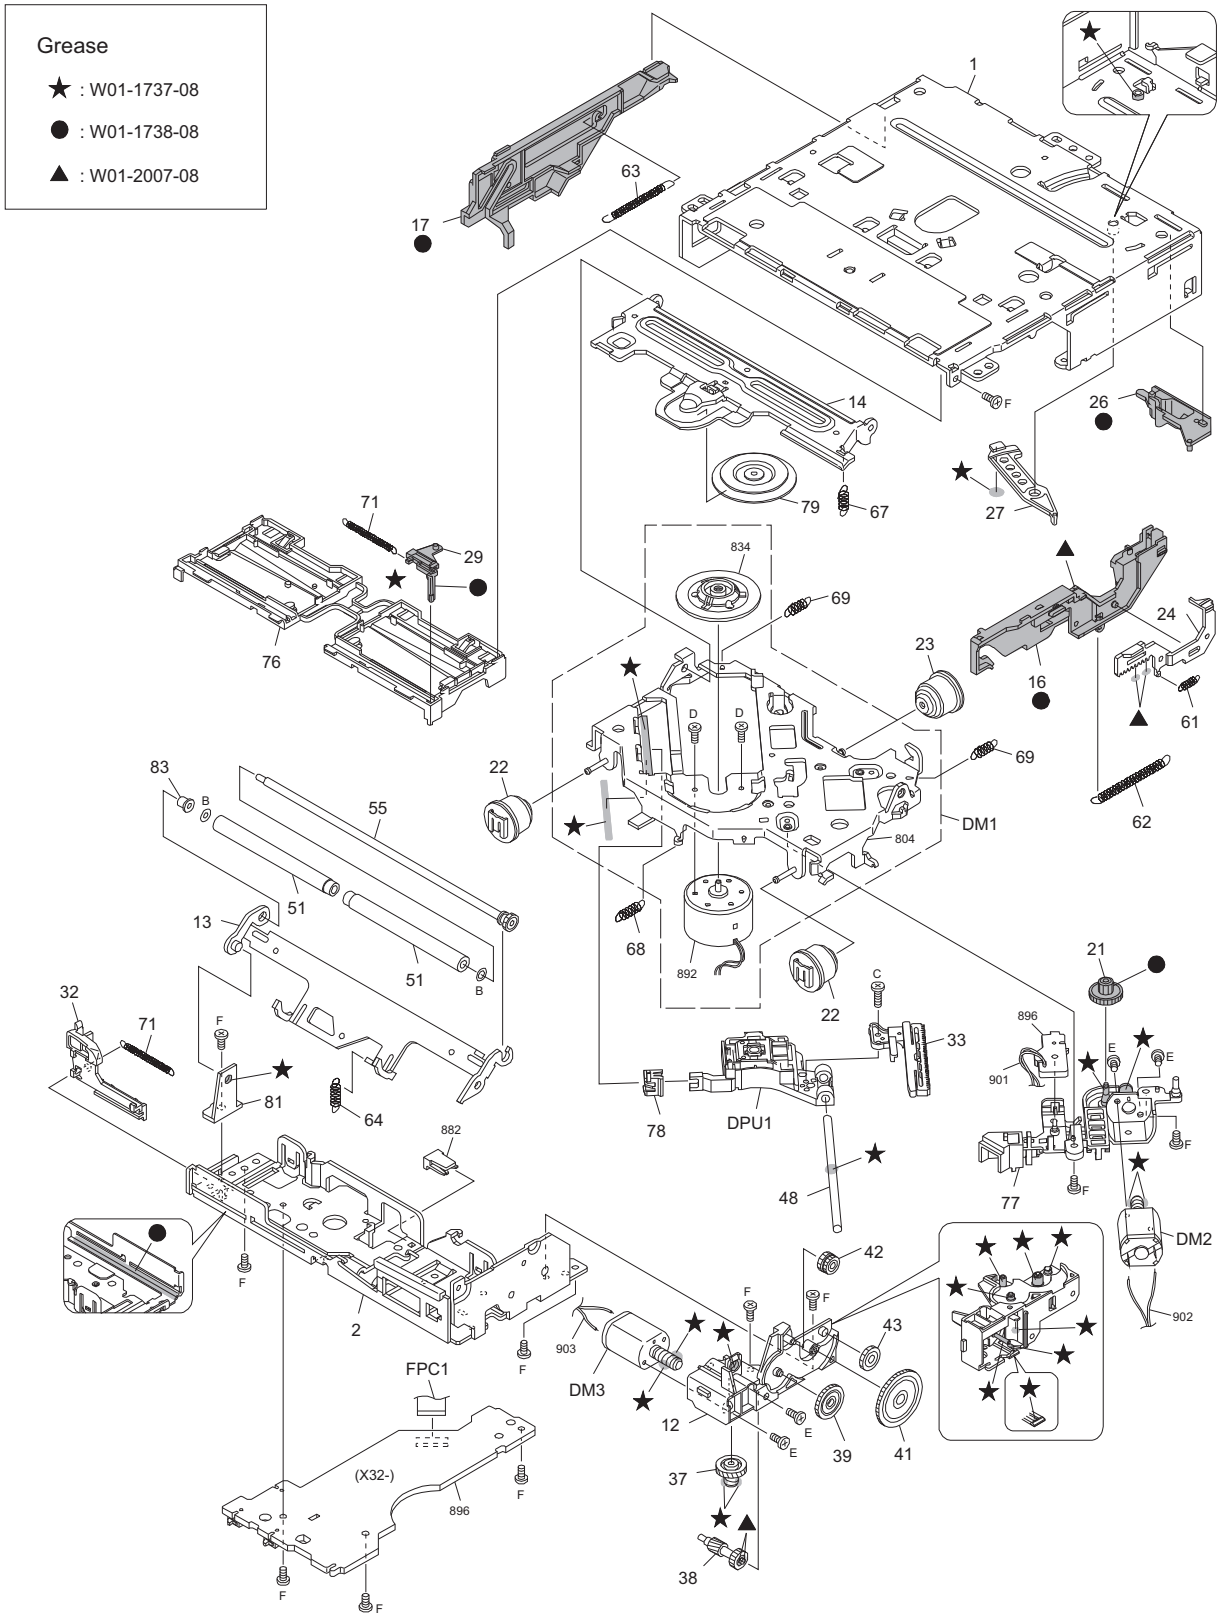


Parts with the exploded numbers larger than 700 are not supplied.

| MODEL | MARK | MODEL | MARK | MODEL | MARK |
|---|---|---|---|---|---|
| KDC-352U | K0 | KDC-4554U | E1 | KDC-X396 | K1 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| **EXPLODED VIEW (CD MECHANISM) <130>** | | | | | | |
| | DM1 | X94-2150-00 | SPINDLE MOTOR ASSY | | 1 | |
| | DM2 | X94-2160-00 | FEED MOTOR ASSY | | 1 | |
| | DM3 | X94-2170-00 | LOADING MOTOR ASSY | | 1 | |
| | DPU1 | QAL1226-001 | PICK UP | | 1 | |
| | FPC1 | QAL0817-003 | FPC | | 1 | |
| | B | LV45449-001A | WASHER | | 2 | |
| | C | QYSPSGT1745ZA | TAP SCREW | M1.7 x 4.5mm | 1 | |
| | D | LV45568-001A | MINI SCREW | | 2 | |
| | E | QYSPSPT2025MA | SCREW | M2 x 2.5mm | 4 | |
| | F | VKZ4539-054 | MINI SCREW | | 11 | |
| | 1 | LV11685-503A | TOP FRAME | | 1 | |
| | 2 | LV11686-501A | BOTTOM FRAME | | 1 | |
| | 12 | LV11688-501A | LOADING BASE | | 1 | |
| | 13 | LV11690-501A | ROLLER ARM | | 1 | |
| | 14 | LV22825-502A | HC CLAMPER BASE | | 1 | |
| | 16 | LV22826-502A | LOAD CAM | | 1 | |
| | 17 | LV22827-501A | FL SLIDER(L) | | 1 | |
| | 21 | LV36815-501A | F WHEEL GEAR | | 1 | |
| | 22 | LV36904-001A | DAMPER | | 2 | |
| | 23 | LV37061-001A | DAMPER | | 1 | |
| | 24 | LV38951-501A | TRIGGER RACK | | 1 | |
| | 26 | LV38952-501A | FL SLIDER(B) | | 1 | |
| | 27 | LV38953-501A | TRIGGER PLATE | | 1 | |
| | 29 | LV38957-501A | SW SLIDER(R) | | 1 | |
| | 32 | LV39496-502A | SW ACTUATOR (2) | | 1 | |
| | 33 | LV38960-501A | FEED RACK | | 1 | |
| | 37 | LV38964-501A | D.WHEEL GEAR | | 1 | |
| | 38 | LV38965-501A | ACT GEAR(1) | | 1 | |
| | 39 | LV38966-501A | ACT GEAR(2) | | 1 | |
| | 41 | LV38967-501A | ACT GEAR(3) | | 1 | |
| | 42 | LV38968-501A | ROLLER ACT GEAR | | 1 | |
| | 43 | LV38969-501A | DRIVE GEAR | | 1 | |
| | 48 | LV44555-001A | MAIN SHAFT | | 1 | |
| | 51 | LV45424-001A | HC ROLLER | | 2 | |
| | 55 | X94-2190-00 | ROLLER SHAFT ASSY | | 1 | |
| | 61 | LV45415-501A | TRIGGER SPRING | | 1 | |
| | 62 | LV45416-501A | LOAD CAM SPRING | | 1 | |
| | 63 | LV45417-501A | FL SLIDER SPRING | | 1 | |
| | 64 | LV45418-501A | R.ARM SPRING | | 1 | |
| | 67 | LV45421-501A | HC CL SPRING | | 1 | |
| | 68 | LV45422-501A | SUS SPRING(F) | | 1 | |
| | 69 | LV45423-501A | SUS SPRING(B) | | 2 | |
| | 71 | LV45505-502A | SW ACT SPRING | | 2 | |
| | 76 | LV11689-501A | DISC GUIDE | | 1 | |
| | 77 | LV22828-501A | FEED BRACKET | | 1 | |
| | 78 | LV36813-501A | SUB GUIDE CAP | | 1 | |
| | 79 | LV36819-502A | CLAMPER | | 1 | |
| | 81 | LV38954-501A | R.ARM GUIDE | | 1 | |
| | 83 | LV45648-501A | RA COLLAR (L) 2 | | 1 | |
| **SWITCH UNIT (X16-722x-xx) <X16>** | | | | | | |
| | IC601 | PCA9633DP1-X | IC(MOS-IC) | | 1 | |
| | IC602 | KSM-2003TN5B | IR SENSOR | | 1 | K0,K1 |
| | IC603 | RT9715EGB-X | IC(MOS-IC) | | 1 | |
| | Q601 | LTA014EUB-X | DIGI TRANSISTOR | | 1 | |
| | Q602 | LTA014EUB-X | DIGI TRANSISTOR | | 1 | |
| | Q603 | LTA014EUB-X | DIGI TRANSISTOR | | 1 | |
| | Q604 | LTA014EUB-X | DIGI TRANSISTOR | | 1 | K0,K1 |
| | Q607 | 2SA2188/F/-X | TRANSISTOR | | 1 | |
| | D601 | RKZ5.1B2KG-X | SB DIODE | | 1 | K0,K1 |
| | D602 | RKZ5.1B2KG-X | SB DIODE | | 1 | |
| | D603 | RKZ5.1B2KG-X | SB DIODE | | 1 | |
| | D604 | RKZ5.1B2KG-X | SB DIODE | | 1 | |
| | D605 | RKZ5.1B2KG-X | SB DIODE | | 1 | |
| | D606 | RKZ5.1B2KG-X | SB DIODE | | 1 | |
| | D607 | RKZ5.1B2KG-X | SB DIODE | | 1 | |
| | D608 | RKZ5.1B2KG-X | SB DIODE | | 1 | |
| | D609 | RKZ5.1B2KG-X | SB DIODE | | 1 | |
| | D610 | RKZ5.1B2KG-X | SB DIODE | | 1 | |
| | D611 | RKZ5.1B2KG-X | SB DIODE | | 1 | |
| | D612 | RKZ5.1B2KG-X | SB DIODE | | 1 | |
| | D613 | RKZ3.3B2KG-X | Z DIODE | | 1 | |
| | D623 | MBRX130-TP-X | SB DIODE | | 1 | |
| | D651 | CL-195SR-CD-X | LED | | 1 | |
| | D652 | SML-D12V8W-X | LED | | 1 | |
| | D658 | SMLE12WBCR1R2X | LED | | 1 | |
| | D659 | SMLE12WBCR1R2X | LED | | 1 | |
| | D660 | SMLE12WBCR1R2X | LED | | 1 | |
| | D661 | SMLE12WBCR1R2X | LED | | 1 | |
| | D662 | SMLE12WBCR1R2X | LED | | 1 | |
| | D671 | LRTBR98G-X | LED | | 1 | |
| | D672 | LRTBR98G-X | LED | | 1 | |
| | D674 | LRTBR98G-X | LED | | 1 | |
| | D676 | LRTBR98G-X | LED | | 1 | |
| | D677 | LRTBR98G-X | LED | | 1 | |
| | D678 | LRTBR98G-X | LED | | 1 | |
| | C601 | NCB31HK-472X | C CAPACITOR | 4700pF 50V K | 1 | |
| | C602 | NCB31HK-472X | C CAPACITOR | 4700pF 50V K | 1 | |
| | C603 | NCJ11EK-106X-R | C CAPACITOR | 10uF 25V | 1 | |
| | C604 | NCJ11EK-106X-R | C CAPACITOR | 10uF 25V | 1 | |
| | C611 | NCB31HK-102X | C CAPACITOR | 1000pF 50V K | 1 | |

| MODEL | MARK | MODEL | MARK | MODEL | MARK |
|---|---|---|---|---|---|
| KDC-352U | K0 | KDC-4554U | E1 | KDC-X396 | K1 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | C612 | NCB31HK-471X | C CAPACITOR | 470pF 50V K | 1 | |
| | C614 | NCB31HK-471X | C CAPACITOR | 470pF 50V K | 1 | |
| | C615 | NCB31HK-102X | C CAPACITOR | 1000pF 50V K | 1 | |
| | C616 | NCB31HK-104X | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C617 | NCB31HK-104X | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C619 | NCB31CK-105X | C CAPACITOR | 1uF 16V K | 1 | |
| | C620 | NCB31CK-105X | C CAPACITOR | 1uF 16V K | 1 | |
| | C631 | NDC31HJ-270X | C CAPACITOR | 27pF 50V J | 1 | |
| | C632 | NDC31HJ-270X | C CAPACITOR | 27pF 50V J | 1 | |
| | C633 | NCJ11EK-106X-R | C CAPACITOR | 10uF 25V | 1 | |
| | C641 | NCB31HK-104X | C CAPACITOR | 0.1uF 50V K | 1 | K0,K1 |
| | R609 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R610 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R611 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R612 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R613 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R614 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R615 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R616 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R617 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R618 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R619 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R620 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R621 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R622 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R623 | NRSA63J-104X | MG RESISTOR | 100kΩ 1/16W J | 1 | |
| | R624 | NRSA63J-4R7X | MG RESISTOR | 4.7Ω 1/16W J | 1 | |
| | R625 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R626 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R627 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R629 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R630 | NRSA63J-272X | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R631 | NRSA63J-272X | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R632 | NRSA63J-272X | MG RESISTOR | 2.7kΩ 1/16W J | 1 | |
| | R633 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R637 | NRS181J-821X | MG RESISTOR | 820Ω 1/8W J | 1 | |
| | R638 | NRSA63J-822X | MG RESISTOR | 8.2kΩ 1/16W J | 1 | |
| | R639 | NRSA63J-332X | MG RESISTOR | 3.3kΩ 1/16W J | 1 | |
| | R640 | NRSA02J-2R0X | MG RESISTOR | 2Ω 1/10W J | 1 | |
| | R641 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R642 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R643 | NRSA02J-2R0X | MG RESISTOR | 2Ω 1/10W J | 1 | |
| | R644 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | K0,K1 |
| | R645 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | K0,K1 |
| | R646 | NRSA02J-2R0X | MG RESISTOR | 2Ω 1/10W J | 1 | |
| | R647 | NRSA02J-2R0X | MG RESISTOR | 2Ω 1/10W J | 1 | |
| | R648 | NRSA02J-2R0X | MG RESISTOR | 2Ω 1/10W J | 1 | |
| | R649 | NRSA02J-2R0X | MG RESISTOR | 2Ω 1/10W J | 1 | |
| | R650 | NRSA02J-1R8X | MG RESISTOR | 1.8Ω 1/10W J | 1 | |
| | R651 | NRSA02J-182X | MG RESISTOR | 1.8kΩ 1/10W J | 1 | |
| | R653 | NRSA02J-152X | MG RESISTOR | 1.5kΩ 1/10W J | 1 | |
| | R654 | NRSA02J-152X | MG RESISTOR | 1.5kΩ 1/10W J | 1 | |
| | R655 | NRSA02J-152X | MG RESISTOR | 1.5kΩ 1/10W J | 1 | |
| | R657 | NRSA02J-152X | MG RESISTOR | 1.5kΩ 1/10W J | 1 | |
| | R662 | NRSA02J-182X | MG RESISTOR | 1.8kΩ 1/10W J | 1 | |
| | R664 | NRSA02J-152X | MG RESISTOR | 1.5kΩ 1/10W J | 1 | |
| | R666 | NRSA02J-152X | MG RESISTOR | 1.5kΩ 1/10W J | 1 | |
| | R669 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R670 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R671 | NRS181J-4R7X | MG RESISTOR | 4.7Ω 1/8W J | 1 | |
| | R672 | NRS181J-751X | MG RESISTOR | 750Ω 1/8W J | 1 | |
| | R673 | NRSA02J-751X | MG RESISTOR | 750Ω 1/10W J | 1 | |
| | R674 | NRSA02J-431X | MG RESISTOR | 430Ω 1/10W J | 1 | |
| | R675 | NRS181J-911X | MG RESISTOR | 910Ω 1/8W J | 1 | |
| | R676 | NRSA02J-122X | MG RESISTOR | 1.2kΩ 1/10W J | 1 | |
| | R677 | NRSA02J-122X | MG RESISTOR | 1.2kΩ 1/10W J | 1 | |
| | R678 | NRS181J-911X | MG RESISTOR | 910Ω 1/8W J | 1 | |
| | R679 | NRSA02J-122X | MG RESISTOR | 1.2kΩ 1/10W J | 1 | |
| | R681 | NRSA02J-751X | MG RESISTOR | 750Ω 1/10W J | 1 | |
| | R682 | NRS181J-751X | MG RESISTOR | 750Ω 1/8W J | 1 | |
| | R683 | NRSA02J-911X | MG RESISTOR | 910Ω 1/10W J | 1 | |
| | R684 | NRSA02J-911X | MG RESISTOR | 910Ω 1/10W J | 1 | |
| | R685 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R686 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R699 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | L601 | NQR0007-002X | FERRITE BEADS | | 1 | |
| | L602 | NQR0007-002X | FERRITE BEADS | | 1 | |
| | L603 | NQR0007-002X | FERRITE BEADS | | 1 | |
| | L604 | NQR0022-005X | FERRITE BEADS | | 1 | |
| | L605 | NQR0499-001X | FERRITE BEADS | | 1 | |
| | CN601 | QGZ1102K2-20X | CONNECTOR | (1-20) | 1 | |
| | CN603 | QNZ1076-001 | USB CONNECTOR | | 1 | |
| | EN601 | QSW1288-001 | ROTARY ENCODER | | 1 | |
| | FL601 | QLF0202-001 | FL TUBE | | 1 | |
| | J602 | QNS0308-001 | 3.5 JACK | | 1 | |
| | LF691 | NQR0682-001X | CHOKE COIL | | 1 | |
| | S611 | NSW0246-001X | TACT SWITCH | | 1 | |
| | S612 | NSW0246-001X | TACT SWITCH | | 1 | |
| | S613 | NSW0246-001X | TACT SWITCH | | 1 | |
| | S614 | NSW0246-001X | TACT SWITCH | | 1 | |
| | S615 | NSW0246-001X | TACT SWITCH | | 1 | |

CD PLAYER UNIT (X32-6530-00) IN CD MECHA <X32>

| MODEL | MARK | MODEL | MARK | MODEL | MARK |
|---|---|---|---|---|---|
| KDC-352U | K0 | KDC-4554U | E1 | KDC-X396 | K1 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | R1 | NRSA63J-131X | MG RESISTOR | 130Ω 1/16W J | 1 | |
| | B1 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | CN101 | QGF1044F2-26X | CONNECTOR | FFC/FPC (1-26) | 1 | |
| | CN102 | QGF0522F3-15W | CONNECTOR | FFC/FPC (1-15) | 1 | |
| | SW1 | NSW0291-001X | DETECT SWITCH | | 1 | |
| | SW2 | NSW0291-001X | DETECT SWITCH | | 1 | |
| | SW3 | NSW0291-001X | DETECT SWITCH | | 1 | |
| | SW4 | NSW0291-001X | DETECT SWITCH | | 1 | |
| ELECTRIC UNIT (X34-714x-xx) <X34> | | | | | | |
| ⚠ | IC1 | TEF6614TV1S4-X | IC | | 1 | K0,K1 |
| ⚠ | IC1 | TEF6614TV1S3-X | IC | | 1 | E1 |
| | IC80 | MFI341S2313-X | MICROPROCESSOR IC | | 1 | |
| | IC161 | TDA7720-X | IC | | 1 | K0,K1 |
| | IC161 | TDA7718B-X | IC | | 1 | E1 |
| ⚠ | IC301 | TB2926CHQ | IC | | 1 | |
| ⚠ | IC501 | LV8281VR-X | IC(MOS-IC) | | 1 | |
| | IC530 | XC6213B332NG-X | IC | | 1 | |
| | IC531 | XC6213B152NG-X | IC | | 1 | |
| | IC532 | XC6213B152NG-X | IC | | 1 | |
| ⚠ | IC540 | JCV8022 | IC(MOS-IC) | | 1 | |
| ⚠ | IC701 | JCV8019-9E5 | IC(MCU) | | 1 | |
| | IC702 | XC6120N282NG-X | IC(MOS-IC) | | 1 | |
| | IC771 | BR24T02FJ-W-X | IC(ROM) | | 1 | |
| ⚠ | IC901 | LV5680P | IC | | 1 | |
| | IC931 | XC6213B332NG-X | IC | | 1 | |
| | IC981 | BD9673EFJ-X | IC(MOS-IC) | | 1 | |
| | Q251 | IMX9-W | PAIR TRANSISTOR | | 1 | K0,K1 |
| | Q321 | IMX9-W | PAIR TRANSISTOR | | 1 | |
| | Q341 | IMX9-W | PAIR TRANSISTOR | | 1 | K0,K1 |
| | Q540 | 2SA2188/F/-X | TRANSISTOR | | 1 | |
| | Q701 | LTA014YUB-X | DIGI TRANSISTOR | | 1 | |
| | Q780 | LTA024EUB-X | DIGI TRANSISTOR | | 1 | |
| | Q782 | LTA024EUB-X | DIGI TRANSISTOR | | 1 | |
| | Q951 | 2SA812A/5-6/-X | TRANSISTOR | | 1 | |
| | D9 | NAF0029-001X | DIODE | | 1 | |
| | D100 | RKZ6.2B2KG-X | Z DIODE | | 1 | |
| | D101 | RKZ6.2B2KG-X | Z DIODE | | 1 | |
| | D110 | RKZ6.2B2KG-X | Z DIODE | | 1 | |
| | D111 | RKZ6.2B2KG-X | Z DIODE | | 1 | |
| | D251 | BAW56-TP-X | SI DIODE | | 1 | K0,K1 |
| | D321 | BAW56-TP-X | SI DIODE | | 1 | |
| | D341 | BAW56-TP-X | SI DIODE | | 1 | K0,K1 |
| | D502 | GS1J-LTP-X | SI DIODE | | 1 | |
| | D540 | RKS801KF-X | SI DIODE | | 1 | |
| | D704 | RKZ6.2B2KG-X | Z DIODE | | 1 | |
| | D780 | BAW56-TP-X | SI DIODE | | 1 | |
| | D781 | BAW56-TP-X | SI DIODE | | 1 | |
| | D782 | RKS801KF-X | SI DIODE | | 1 | |
| | D783 | BAW56-TP-X | SI DIODE | | 1 | |
| | D851 | MBRX130-TP-X | SB DIODE | | 1 | E1 |
| | D852 | MBRX130-TP-X | SB DIODE | | 1 | E1 |
| | D891 | BAW56-TP-X | SI DIODE | | 1 | |
| ⚠ | D901 | 1N5401-BPC04 | SI DIODE | | 1 | |
| | D902 | MBRX130-TP-X | SB DIODE | | 1 | |
| | D941 | MBRX130-TP-X | SB DIODE | | 1 | |
| | D942 | MBRX130-TP-X | SB DIODE | | 1 | |
| | D970 | RKZ6.8B2KG-X | Z DIODE | | 1 | |
| | D971 | RKZ6.8B2KG-X | Z DIODE | | 1 | |
| | D981 | DB22306-X | SB DIODE | | 1 | |
| | C1 | NCB31HK-102X | C CAPACITOR | 1000pF 50V K | 1 | |
| | C2 | NDC31HJ-7R0X | C CAPACITOR | 7pF 50V J | 1 | |
| | C3 | NCB31HK-102X | C CAPACITOR | 1000pF 50V K | 1 | |
| | C4 | NCB31CK-224X | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C5 | NDC31HJ-150X | C CAPACITOR | 15pF 50V J | 1 | |
| | C6 | NDC31HJ-6R0X | C CAPACITOR | 6pF 50V J | 1 | |
| | C7 | NDC31HJ-270X | C CAPACITOR | 27pF 50V J | 1 | |
| | C10 | NCB21CK-105X | C CAPACITOR | 1uF 16V K | 1 | |
| | C11 | NCB31HK-103X | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C12 | NCB31HK-103X | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C13 | NCB21CK-105X | C CAPACITOR | 1uF 16V K | 1 | |
| | C14 | NCB31CK-224X | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C15 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C16 | NCB31HK-103X | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C17 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C18 | NCB31HK-103X | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C19 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C20 | NDC31HJ-120X | C CAPACITOR | 12pF 50V J | 1 | |
| | C21 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C22 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C23 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C24 | QEKJ1CM-107Z | E CAPACITOR | 100uF 16V M | 1 | |
| | C26 | NDC31HJ-471X | C CAPACITOR | 470pF 50V J | 1 | |
| | C27 | NDC31HJ-2R0X | C CAPACITOR | 2pF 50V J | 1 | |
| | C28 | NDC31HJ-100X | C CAPACITOR | 10pF 50V J | 1 | K0,K1 |
| | C80 | NCB31EK-473X | C CAPACITOR | 0.047uF 25V K | 1 | |
| | C101 | NCB31CK-105X | C CAPACITOR | 1uF 16V K | 1 | |
| | C102 | NCB31CK-105X | C CAPACITOR | 1uF 16V K | 1 | |
| | C111 | NCB31CK-105X | C CAPACITOR | 1uF 16V K | 1 | |
| | C112 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C160 | QEKJ1EM-106Z | E CAPACITOR | 10uF 25V M | 1 | |
| | C161 | NCB31AK-105X | C CAPACITOR | 1uF 10V K | 1 | |
| | C162 | QERF1HM-475Z | E CAPACITOR | 4.7uF 50V M | 1 | |

| MODEL | MARK | MODEL | MARK | MODEL | MARK |
|---|---|---|---|---|---|
| KDC-352U | K0 | KDC-4554U | E1 | KDC-X396 | K1 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | C166 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C168 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C169 | NCB31AK-105X | C CAPACITOR | 1uF 10V K | 1 | |
| | C170 | NCB31AK-105X | C CAPACITOR | 1uF 10V K | 1 | |
| | C171 | NCB31AK-105X | C CAPACITOR | 1uF 10V K | 1 | |
| | C172 | QEKJ1CM-107Z | E CAPACITOR | 100uF 16V M | 1 | |
| | C173 | NCB31AK-105X | C CAPACITOR | 1uF 10V K | 1 | |
| | C174 | QERF1HM-475Z | E CAPACITOR | 4.7uF 50V M | 1 | |
| | C178 | NCB31AK-105X | C CAPACITOR | 1uF 10V K | 1 | |
| | C251 | QEKJ1HM-106Z | E CAPACITOR | 10uF 50V M | 1 | K0,K1 |
| | C252 | QEKJ1HM-106Z | E CAPACITOR | 10uF 50V M | 1 | K0,K1 |
| | C253 | NDC31HJ-101X | C CAPACITOR | 100pF 50V J | 1 | K0,K1 |
| | C254 | NDC31HJ-101X | C CAPACITOR | 100pF 50V J | 1 | K0,K1 |
| | C305 | NCB21CK-224X-A | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C306 | NCB21CK-224X-A | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C307 | NCB21CK-224X-A | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C308 | NCB21CK-224X-A | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C309 | QEKJ1CM-226Z | E CAPACITOR | 22uF 16V M | 1 | |
| | C311 | NCB31HK-223X | C CAPACITOR | 0.022uF 50V K | 1 | |
| | C312 | NCB31HK-223X | C CAPACITOR | 0.022uF 50V K | 1 | |
| | C313 | NCB21AK-105X-A | C CAPACITOR | 1uF 10V K | 1 | |
| | C314 | NCB31AK-105X | C CAPACITOR | 1uF 10V K | 1 | |
| | C315 | NCB31AK-105X | C CAPACITOR | 1uF 10V K | 1 | |
| | C320 | QEKJ1HM-106Z | E CAPACITOR | 10uF 50V M | 1 | |
| | C321 | NDC31HJ-101X | C CAPACITOR | 100pF 50V J | 1 | |
| | C330 | QEKJ1HM-106Z | E CAPACITOR | 10uF 50V M | 1 | |
| | C331 | NDC31HJ-101X | C CAPACITOR | 100pF 50V J | 1 | |
| | C340 | QEKJ1HM-106Z | E CAPACITOR | 10uF 50V M | 1 | K0,K1 |
| | C341 | NDC31HJ-101X | C CAPACITOR | 100pF 50V J | 1 | K0,K1 |
| | C350 | QEKJ1HM-106Z | E CAPACITOR | 10uF 50V M | 1 | K0,K1 |
| | C351 | NDC31HJ-101X | C CAPACITOR | 100pF 50V J | 1 | K0,K1 |
| | C368 | NCB31HK-103X | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C501 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C504 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C505 | NCB31HK-473X | C CAPACITOR | 0.047uF 50V K | 1 | |
| | C506 | NCB31CK-224X | C CAPACITOR | 0.22uF 16V K | 1 | |
| | C507 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C513 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C514 | QERF1AM-107Z | E CAPACITOR | 100uF 10V M | 1 | |
| | C530 | NCB31AK-105X | C CAPACITOR | 1uF 10V K | 1 | |
| | C531 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C532 | NCB31AK-105X | C CAPACITOR | 1uF 10V K | 1 | |
| | C533 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C534 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C535 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C540 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C541 | NCB31HK-222X | C CAPACITOR | 2200pF 50V K | 1 | |
| | C542 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C543 | NCB31HK-103X | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C544 | NCB31HK-332X | C CAPACITOR | 3300pF 50V K | 1 | |
| | C545 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C546 | NCB31AK-105X | C CAPACITOR | 1uF 10V K | 1 | |
| | C547 | NCB31HK-153X | C CAPACITOR | 0.015uF 50V K | 1 | |
| | C548 | NDC31HJ-680X | C CAPACITOR | 68pF 50V J | 1 | |
| | C549 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C550 | NCB20JK-106X-R | C CAPACITOR | 10uF 6.3V K | 1 | |
| | C551 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C552 | NCB31HK-333X | C CAPACITOR | 0.033uF 50V K | 1 | |
| | C553 | NCB31HK-472X | C CAPACITOR | 4700pF 50V K | 1 | |
| | C554 | NDC31HJ-331X | C CAPACITOR | 330pF 50V J | 1 | |
| | C555 | NDC31HJ-681X | C CAPACITOR | 680pF 50V J | 1 | |
| | C556 | NCB31CK-683X | C CAPACITOR | 0.068uF 16V K | 1 | |
| | C557 | NCB31HK-333X | C CAPACITOR | 0.033uF 50V K | 1 | |
| | C558 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C559 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C561 | NCB20JK-106X | C CAPACITOR | 10uF 6.3V K | 1 | |
| | C562 | NCB20JK-106X | C CAPACITOR | 10uF 6.3V K | 1 | |
| | C564 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C565 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C566 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C567 | NCB31AK-105X | C CAPACITOR | 1uF 10V K | 1 | |
| | C568 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C569 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C570 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C571 | NDC31HJ-470X | C CAPACITOR | 47pF 50V J | 1 | |
| | C572 | NCB31HK-153X | C CAPACITOR | 0.015uF 50V K | 1 | |
| | C573 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C574 | NCB31HK-103X | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C576 | NCB31HK-152X | C CAPACITOR | 1500pF 50V K | 1 | |
| | C582 | NCB31HK-102X | C CAPACITOR | 1000pF 50V K | 1 | |
| | C583 | NCB31HK-102X | C CAPACITOR | 1000pF 50V K | 1 | |
| | C592 | NDC31HJ-101X | C CAPACITOR | 100pF 50V J | 1 | |
| | C593 | NDC31HJ-101X | C CAPACITOR | 100pF 50V J | 1 | |
| | C701 | NDC31HJ-100X | C CAPACITOR | 10pF 50V J | 1 | |
| | C702 | NDC31HJ-100X | C CAPACITOR | 10pF 50V J | 1 | |
| | C703 | NCB31HK-103X | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C704 | QEKJ1CM-107Z | E CAPACITOR | 100uF 16V M | 1 | |
| | C705 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C706 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C708 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C711 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C712 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C713 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |

| MODEL | MARK | MODEL | MARK | MODEL | MARK |
|---|---|---|---|---|---|
| KDC-352U | K0 | KDC-4554U | E1 | KDC-X396 | K1 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | C714 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C715 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C716 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C717 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C718 | NCB31AK-474X | C CAPACITOR | 0.47uF 10V K | 1 | |
| | C722 | NCB10JK-106X-A | C CAPACITOR | 10uF 6.3V K | 1 | |
| | C723 | NCB31EK-473X | C CAPACITOR | 0.047uF 25V K | 1 | |
| | C724 | NDC31HJ-180X | C CAPACITOR | 18pF 50V J | 1 | |
| | C725 | NDC31HJ-150X | C CAPACITOR | 15pF 50V J | 1 | |
| | C728 | NCB31HK-103X | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C729 | NCJ11EK-106X-R | C CAPACITOR | 10uF 25V | 1 | |
| | C731 | NCB21CK-104X | C CAPACITOR | 0.1uF 16V K | 1 | |
| | C733 | NCB10JK-106X-A | C CAPACITOR | 10uF 6.3V K | 1 | |
| | C788 | NCB31HK-103X | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C794 | NDC31HJ-2R0X | C CAPACITOR | 2pF 50V J | 1 | |
| | C891 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C901 | QEZ0934-338 | E CAPACITOR | 3300uF | 1 | |
| | C902 | NCB31EK-474X | C CAPACITOR | 0.47uF 25V K | 1 | |
| | C903 | QEKJ1CM-476Z | E CAPACITOR | 47uF 16V M | 1 | |
| | C904 | QEKJ1CM-476Z | E CAPACITOR | 47uF 16V M | 1 | |
| | C905 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C906 | QEKJ1CM-107Z | E CAPACITOR | 100uF 16V M | 1 | |
| | C907 | QERF0JM-337Z | E CAPACITOR | 330uF 6.3V M | 1 | |
| | C908 | NCJ11EK-106X-R | C CAPACITOR | 10uF 25V | 1 | E1 |
| | C910 | QEKJ1EM-106Z | E CAPACITOR | 10uF 25V M | 1 | |
| | C912 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C913 | QERF0JM-337Z | E CAPACITOR | 330uF 6.3V M | 1 | |
| | C916 | NDC31HJ-101X | C CAPACITOR | 100pF 50V J | 1 | |
| | C917 | NDC31HJ-101X | C CAPACITOR | 100pF 50V J | 1 | |
| | C931 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C932 | QERF0JM-337Z | E CAPACITOR | 330uF 6.3V M | 1 | |
| | C933 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C941 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C954 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C963 | QERF1AM-107Z | E CAPACITOR | 100uF 10V M | 1 | |
| | C981 | NCB10JK-106X-A | C CAPACITOR | 10uF 6.3V K | 1 | |
| | C983 | NCB31HK-682X | C CAPACITOR | 6800pF 50V K | 1 | |
| | C984 | NCB31CK-104X | C CAPACITOR | 0.1uF 16V | 1 | |
| | C985 | NCJ11EK-106X-R | C CAPACITOR | 10uF 25V | 1 | |
| | C987 | NCB10JK-106X-A | C CAPACITOR | 10uF 6.3V K | 1 | |
| | C989 | NCJ11EK-106X-R | C CAPACITOR | 10uF 25V | 1 | |
| | C990 | NCB31HK-104X | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C991 | NCB31HK-103X | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C993 | NCB31HK-103X | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C994 | NCB31HK-103X | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C995 | NCJ11EK-106X-R | C CAPACITOR | 10uF 25V | 1 | |
| | C996 | NCJ11EK-106X-R | C CAPACITOR | 10uF 25V | 1 | |
| | C997 | NCB31HK-103X | C CAPACITOR | 0.01uF 50V K | 1 | |
| | R1 | NRSA63J-684X | MG RESISTOR | 680kΩ 1/16W J | 1 | |
| | R2 | NRSA63J-684X | MG RESISTOR | 680kΩ 1/16W J | 1 | |
| | R4 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R6 | NRSA63J-221X | MG RESISTOR | 220Ω 1/16W J | 1 | |
| | R7 | NRSA63J-221X | MG RESISTOR | 220Ω 1/16W J | 1 | |
| | R8 | NRS181J-220X | MG RESISTOR | 22Ω 1/8W J | 1 | |
| | R9 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | E1 |
| | R12 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R82 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R101 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R111 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R112 | NRSA63J-471X | MG RESISTOR | 470Ω 1/16W J | 1 | |
| | R161 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R162 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R163 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R165 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R167 | NRS181J-222X | MG RESISTOR | 2.2kΩ 1/8W J | 1 | |
| | R168 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | K0,E1 |
| | R169 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | K1 |
| | R251 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | K0,K1 |
| | R252 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | K0,K1 |
| | R253 | NRSA63J-331X | MG RESISTOR | 330Ω 1/16W J | 1 | K0,K1 |
| | R254 | NRSA63J-331X | MG RESISTOR | 330Ω 1/16W J | 1 | K0,K1 |
| | R255 | NRSA63J-223X | MG RESISTOR | 22kΩ 1/16W J | 1 | K0,K1 |
| | R256 | NRSA63J-223X | MG RESISTOR | 22kΩ 1/16W J | 1 | K0,K1 |
| | R257 | NRSA63J-181X | MG RESISTOR | 180Ω 1/16W J | 1 | K0,K1 |
| | R258 | NRSA63J-181X | MG RESISTOR | 180Ω 1/16W J | 1 | K0,K1 |
| | R302 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R304 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R307 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R310 | NRS181J-100X | MG RESISTOR | 10Ω 1/8W J | 1 | |
| | R320 | NRSA63J-331X | MG RESISTOR | 330Ω 1/16W J | 1 | |
| | R321 | NRSA63J-223X | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R322 | NRSA63J-181X | MG RESISTOR | 180Ω 1/16W J | 1 | |
| | R323 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | E1 |
| | R324 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | K0,K1 |
| | R330 | NRSA63J-331X | MG RESISTOR | 330Ω 1/16W J | 1 | |
| | R331 | NRSA63J-223X | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R332 | NRSA63J-181X | MG RESISTOR | 180Ω 1/16W J | 1 | |
| | R333 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | E1 |
| | R334 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | K0,K1 |
| | R335 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | E1 |
| | R340 | NRSA63J-331X | MG RESISTOR | 330Ω 1/16W J | 1 | K0,K1 |
| | R341 | NRSA63J-223X | MG RESISTOR | 22kΩ 1/16W J | 1 | K0,K1 |

| MODEL | MARK | MODEL | MARK | MODEL | MARK |
|---|---|---|---|---|---|
| KDC-352U | K0 | KDC-4554U | E1 | KDC-X396 | K1 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | R342 | NRSA63J-181X | MG RESISTOR | 180Ω 1/16W J | 1 | K0,K1 |
| | R347 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | K0,K1 |
| | R349 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | K0,K1 |
| | R350 | NRSA63J-331X | MG RESISTOR | 330Ω 1/16W J | 1 | K0,K1 |
| | R351 | NRSA63J-223X | MG RESISTOR | 22kΩ 1/16W J | 1 | K0,K1 |
| | R352 | NRSA63J-181X | MG RESISTOR | 180Ω 1/16W J | 1 | K0,K1 |
| | R357 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R358 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R361 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R362 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R363 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R364 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R400 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R401 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R402 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R403 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R405 | NRSA63J-100X | MG RESISTOR | 10Ω 1/16W J | 1 | |
| | R406 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R407 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R408 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R409 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R410 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R411 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R412 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R413 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R414 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R415 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R416 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R417 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R418 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R419 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R420 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R422 | NRS181J-220X | MG RESISTOR | 22Ω 1/8W J | 1 | |
| | R423 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R424 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R425 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R426 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | K0,K1 |
| | R427 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R428 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R429 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R430 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R431 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R432 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R433 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R434 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R435 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R436 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R437 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R438 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R439 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R440 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R441 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R442 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R443 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R444 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R446 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R447 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R448 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R450 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R451 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R452 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R454 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R455 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R456 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R457 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R458 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R459 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R460 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R461 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R462 | NRSA02J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R463 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R464 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R465 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R467 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R469 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R470 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R471 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R472 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R474 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R477 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R478 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R479 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R481 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R482 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R485 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R488 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R490 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R495 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R496 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R497 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R498 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R501 | NRSA63J-114X | MG RESISTOR | 110kΩ 1/16W J | 1 | |

| MODEL | MARK | MODEL | MARK | MODEL | MARK |
|---|---|---|---|---|---|
| KDC-352U | K0 | KDC-4554U | E1 | KDC-X396 | K1 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | R502 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R503 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R504 | NRSA63J-274X | MG RESISTOR | 270kΩ 1/16W J | 1 | |
| | R505 | NRSA63J-104X | MG RESISTOR | 100kΩ 1/16W J | 1 | |
| | R506 | NRSA63J-303X | MG RESISTOR | 30kΩ 1/16W J | 1 | |
| | R507 | NRSA63J-563X | MG RESISTOR | 56kΩ 1/16W J | 1 | |
| | R508 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R509 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R510 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R511 | NRSA63J-133X | MG RESISTOR | 13kΩ 1/16W J | 1 | |
| | R512 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R513 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R516 | NRSA63J-333X | MG RESISTOR | 33kΩ 1/16W J | 1 | |
| | R518 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R519 | NRSA63J-333X | MG RESISTOR | 33kΩ 1/16W J | 1 | |
| | R530 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R534 | NRS181J-473X | MG RESISTOR | 47kΩ 1/8W J | 1 | |
| | R540 | NRSA63J-221X | MG RESISTOR | 220Ω 1/16W J | 1 | |
| | R545 | NRSA63J-225X | MG RESISTOR | 2.2MΩ 1/16W J | 1 | |
| | R547 | NRSA63J-4R7X | MG RESISTOR | 4.7Ω 1/16W J | 1 | |
| | R548 | NRSA63J-104X | MG RESISTOR | 100kΩ 1/16W J | 1 | |
| | R549 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R550 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R553 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R554 | NRSA02J-4R7X | MG RESISTOR | 4.7Ω 1/10W J | 1 | |
| | R555 | NRSA02J-4R7X | MG RESISTOR | 4.7Ω 1/10W J | 1 | |
| | R556 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R557 | NRSA63J-471X | MG RESISTOR | 470Ω 1/16W J | 1 | |
| | R558 | NRSA63J-105X | MG RESISTOR | 1MΩ 1/16W J | 1 | |
| | R559 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R560 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R561 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R562 | NRS181J-101X | MG RESISTOR | 100Ω 1/8W J | 1 | |
| | R563 | NRS181J-101X | MG RESISTOR | 100Ω 1/8W J | 1 | |
| | R564 | NRS181J-101X | MG RESISTOR | 100Ω 1/8W J | 1 | |
| | R565 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R566 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R567 | NRS181J-101X | MG RESISTOR | 100Ω 1/8W J | 1 | |
| | R568 | NRS181J-101X | MG RESISTOR | 100Ω 1/8W J | 1 | |
| | R569 | NRS181J-101X | MG RESISTOR | 100Ω 1/8W J | 1 | |
| | R570 | NRS181J-101X | MG RESISTOR | 100Ω 1/8W J | 1 | |
| | R571 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R572 | NRSA63J-104X | MG RESISTOR | 100kΩ 1/16W J | 1 | |
| | R573 | NRSA63J-334X | MG RESISTOR | 330kΩ 1/16W J | 1 | |
| | R574 | NRSA63J-153X | MG RESISTOR | 15kΩ 1/16W J | 1 | |
| | R575 | NRS181J-332X | MG RESISTOR | 3.3kΩ 1/8W J | 1 | |
| | R576 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R577 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R595 | NRSA63J-202X | MG RESISTOR | 2kΩ 1/16W J | 1 | |
| | R596 | NRSA63J-202X | MG RESISTOR | 2kΩ 1/16W J | 1 | |
| | R701 | NRS181J-472X | MG RESISTOR | 4.7kΩ 1/8W J | 1 | |
| | R702 | NRSA63J-222X | MG RESISTOR | 2.2kΩ 1/16W J | 1 | |
| | R703 | NRSA63J-911X | MG RESISTOR | 910Ω 1/16W J | 1 | |
| | R704 | NRSA63J-911X | MG RESISTOR | 910Ω 1/16W J | 1 | |
| | R706 | NRSA63J-911X | MG RESISTOR | 910Ω 1/16W J | 1 | |
| | R708 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R709 | NRS181J-911X | MG RESISTOR | 910Ω 1/8W J | 1 | |
| | R712 | NRS181J-911X | MG RESISTOR | 910Ω 1/8W J | 1 | |
| | R713 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R715 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R718 | NRS181J-473X | MG RESISTOR | 47kΩ 1/8W J | 1 | |
| | R720 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R721 | NRSA63J-105X | MG RESISTOR | 1MΩ 1/16W J | 1 | |
| | R722 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R723 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R725 | NRS181J-473X | MG RESISTOR | 47kΩ 1/8W J | 1 | |
| | R726 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R727 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R728 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R730 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R731 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R732 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R733 | NRSA63J-0R0X | MG RESISTOR | 0Ω 1/10W J | 1 | |
| | R735 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R736 | NRS181J-473X | MG RESISTOR | 47kΩ 1/8W J | 1 | |
| | R737 | NRSA63J-911X | MG RESISTOR | 910Ω 1/16W J | 1 | |
| | R738 | NRSA63J-222X | MG RESISTOR | 2.2kΩ 1/16W J | 1 | |
| | R739 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R740 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R741 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R742 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R743 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R744 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R745 | NRSA63J-101X | MG RESISTOR | 100Ω 1/16W J | 1 | |
| | R746 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R747 | NRS181J-243X | MG RESISTOR | 24kΩ 1/8W J | 1 | |
| | R749 | NRSA63J-332X | MG RESISTOR | 3.3kΩ 1/16W J | 1 | |
| | R750 | NRSA63J-332X | MG RESISTOR | 3.3kΩ 1/16W J | 1 | |
| | R751 | NRSA63J-223X | MG RESISTOR | 22kΩ 1/16W J | 1 | |
| | R753 | NRSA63J-332X | MG RESISTOR | 3.3kΩ 1/16W J | 1 | |
| | R754 | NRSA63J-332X | MG RESISTOR | 3.3kΩ 1/16W J | 1 | |
| | R757 | NRSA63J-104X | MG RESISTOR | 100kΩ 1/16W J | 1 | |
| | R758 | NRSA63J-104X | MG RESISTOR | 100kΩ 1/16W J | 1 | |

| MODEL | MARK | MODEL | MARK | MODEL | MARK |
|---|---|---|---|---|---|
| KDC-352U | K0 | KDC-4554U | E1 | KDC-X396 | K1 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | R759 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R763 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R764 | NRSA63J-393X | MG RESISTOR | 39kΩ 1/16W J | 1 | E1 |
| | R765 | NRSA63J-223X | MG RESISTOR | 22kΩ 1/16W J | 1 | K0 |
| | R765 | NRSA63J-273X | MG RESISTOR | 27kΩ 1/16W J | 1 | E1 |
| | R765 | NRSA63J-153X | MG RESISTOR | 15kΩ 1/16W J | 1 | K1 |
| | R766 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | K0,K1 |
| | R766 | NRSA63J-822X | MG RESISTOR | 8.2kΩ 1/16W J | 1 | E1 |
| | R767 | NRSA63J-273X | MG RESISTOR | 27kΩ 1/16W J | 1 | K0 |
| | R767 | NRSA63J-223X | MG RESISTOR | 22kΩ 1/16W J | 1 | E1 |
| | R767 | NRSA63J-333X | MG RESISTOR | 33kΩ 1/16W J | 1 | K1 |
| | R768 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R770 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R771 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R772 | NRS181J-472X | MG RESISTOR | 4.7kΩ 1/8W J | 1 | |
| | R773 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R774 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R775 | NRSA63J-153X | MG RESISTOR | 15kΩ 1/16W J | 1 | |
| | R776 | NRSA63J-153X | MG RESISTOR | 15kΩ 1/16W J | 1 | |
| | R777 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R778 | NRSA63J-271X | MG RESISTOR | 270Ω 1/16W J | 1 | |
| | R779 | NRSA63J-271X | MG RESISTOR | 270Ω 1/16W J | 1 | |
| | R780 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R781 | NRSA63J-331X | MG RESISTOR | 330Ω 1/16W J | 1 | |
| | R782 | NRSA63J-821X | MG RESISTOR | 820Ω 1/16W J | 1 | |
| | R783 | NRSA63J-104X | MG RESISTOR | 100kΩ 1/16W J | 1 | |
| | R784 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R785 | NRSA63J-563X | MG RESISTOR | 56kΩ 1/16W J | 1 | K0,K1 |
| | R785 | NRSA63J-333X | MG RESISTOR | 33kΩ 1/16W J | 1 | E1 |
| | R786 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R789 | NRSA63J-270X | MG RESISTOR | 27Ω 1/16W J | 1 | |
| | R790 | NRSA63J-270X | MG RESISTOR | 27Ω 1/16W J | 1 | |
| | R793 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R794 | NRSA63J-300X | MG RESISTOR | 30Ω 1/16W J | 1 | |
| | R795 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R796 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R851 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | E1 |
| | R891 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R892 | NRSA63J-683X | MG RESISTOR | 68kΩ 1/16W J | 1 | |
| | R893 | NRS181J-123X | MG RESISTOR | 12kΩ 1/8W J | 1 | |
| | R894 | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J | 1 | |
| | R901 | QRE141J-103Y | C RESISTOR | 10kΩ 1/4W J | 1 | |
| | R902 | QRE141J-392Y | C RESISTOR | 3.9kΩ 1/4W J | 1 | |
| | R906 | NRSA63J-562X | MG RESISTOR | 5.6kΩ 1/16W J | 1 | |
| | R907 | NRSA63J-155X | MG RESISTOR | 1.5MΩ 1/16W J | 1 | |
| | R908 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R909 | NRSA63J-273X | MG RESISTOR | 27kΩ 1/16W J | 1 | |
| | R941 | NRS181J-472X | MG RESISTOR | 4.7kΩ 1/8W J | 1 | |
| | R951 | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J | 1 | |
| | R952 | NRSA63J-331X | MG RESISTOR | 330Ω 1/16W J | 1 | |
| | R965 | NRS181J-103X | MG RESISTOR | 10kΩ 1/8W J | 1 | |
| | R970 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R971 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R972 | NRSA63J-103X | MG RESISTOR | 10kΩ 1/16W J | 1 | |
| | R973 | NRSA63J-203X | MG RESISTOR | 20kΩ 1/16W J | 1 | |
| | R974 | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J | 1 | |
| | R975 | NRSA02J-473X | MG RESISTOR | 47kΩ 1/10W J | 1 | |
| | R976 | NRSA02J-683X | MG RESISTOR | 68kΩ 1/10W J | 1 | |
| | R981 | NRSA63D-913X | MG RESISTOR | 91kΩ 1/16W D | 1 | |
| | R982 | NRSA63D-273X | MG RESISTOR | 27kΩ 1/16W D | 1 | |
| | R983 | NRSA63J-472X | MG RESISTOR | 4.7kΩ 1/16W J | 1 | |
| | R986 | NRSA63D-114X | MG RESISTOR | 110kΩ 1/16W D | 1 | |
| | L1 | NQL093K-R47X | PEAKING COIL | 0.47uH K | 1 | |
| | L2 | NQL093K-1R8X | PEAKING COIL | 1.8uH K | 1 | |
| | L3 | NQL093K-R27X | PEAKING COIL | 0.27uH K | 1 | |
| | L4 | QQR1872-001 | RF COIL | | 1 | |
| | L5 | QQL244J-561Z | COIL | 560uH J | 1 | |
| | L6 | QQL244J-561Z | COIL | 560uH J | 1 | |
| | L7 | NQL79GM-4R7X | COIL | 4.7uH M | 1 | |
| | L8 | NQL093K-4R7X | PEAKING COIL | 4.7uH K | 1 | |
| | L9 | NQL093K-R47X | PEAKING COIL | 0.47uH K | 1 | |
| | L10 | NQL103J-10NX | COIL | 10nH J | 1 | K0,K1 |
| | L11 | NQR0251-002X | FERRITE BEADS | | 1 | |
| | L12 | NQR0251-002X | FERRITE BEADS | | 1 | |
| | L161 | NQL553J-27NX | COIL | 27nH J | 1 | |
| | L531 | NQR0251-002X | FERRITE BEADS | | 1 | |
| | L561 | NQR0251-002X | FERRITE BEADS | | 1 | |
| | L562 | NQR0251-002X | FERRITE BEADS | | 1 | |
| | L563 | NQR0502-001X | FERRITE BEADS | | 1 | |
| | L564 | NQR0502-001X | FERRITE BEADS | | 1 | |
| | L565 | NQR0502-001X | FERRITE BEADS | | 1 | |
| | L701 | NQL79GM-4R7X | COIL | 4.7uH M | 1 | |
| | L703 | NQR0502-001X | FERRITE BEADS | | 1 | |
| | L901 | QQR1882-001 | CHOKE COIL | | 1 | |
| | L981 | QQL92AK-220Z | COIL | 22uH K | 1 | |
| | L982 | NQLH25M-4R7X | COIL | 4.7uH M | 1 | |
| | CN502 | QGF1040F1-26 | CONNECTOR | FFC/FPC (1-26) | 1 | |
| | CN701 | QGZ1102J1-20 | CONNECTOR | (1-20) | 1 | |
| | CN901 | QNZ0607-001 | CAR CONNECTOR | | 1 | |
| | J1 | QNB0358-001 | ANT TERMINAL | | 1 | |
| | J321 | QNN0866-001 | PIN JACK | | 1 | K0,K1 |
| | J321 | QNN0874-001 | PIN JACK | | 1 | E1 |

| MODEL | MARK | MODEL | MARK | MODEL | MARK |
|---|---|---|---|---|---|
| KDC-352U | K0 | KDC-4554U | E1 | KDC-X396 | K1 |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | S701 | QSW0648-001Z | TACT SWITCH | | 1 | |
| | X1 | QAX0952-001Z | CRYSTAL | | 1 | |
| | X540 | QAX0929-001Z | C RESONATOR | | 1 | |
| | X701 | QAX0966-001Z | CRYSTAL | | 1 | |
| | X702 | QAX0401-001 | CRYSTAL | 32.768KHz | 1 | |