
EXPLODED VIEW / PARTS LIST


Main section

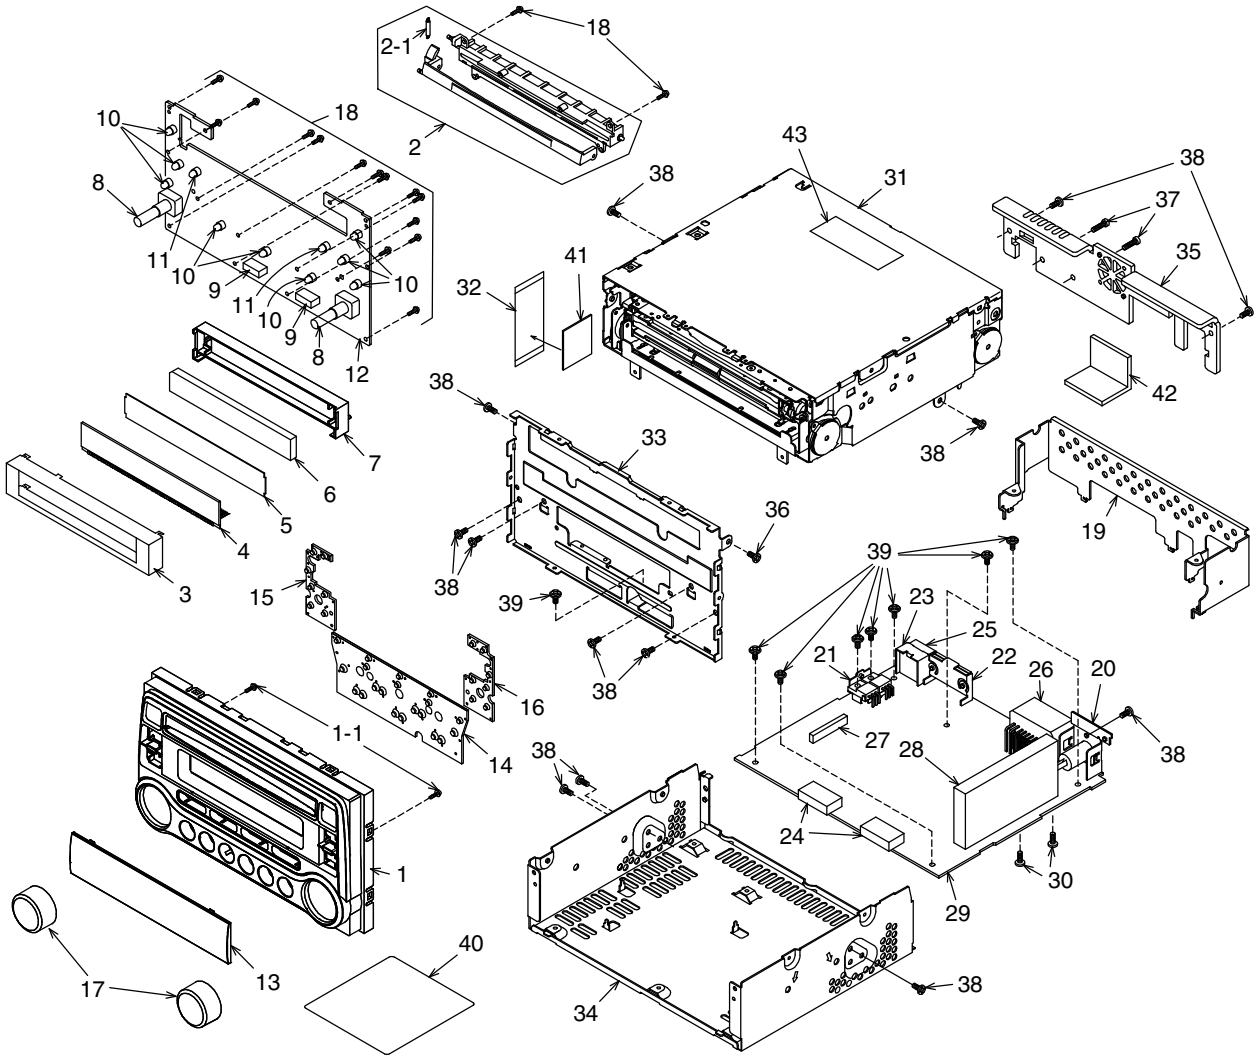

NO.	PART NO.	DESCRIPTION	Q'TY
1	940-8099-01	ESCUTCHEON-ASSY	1
1-1	716-0778-00	WAVE SCREW(2x6)	2
2	947-0567-01	DOOR ASSY	1
2-1	750-6708-00	SPRING	1
3	331-3883-00	LCD-CVR	1
4	379-1335-52	INDICATOR(LCD)	1
5	335-7322-00	COLOR FILTER	1
6	335-7323-10	LCD ILLUMI	1
7	335-7291-00	LCD-HOLDER	1
8	016-0014-14	VR W/SHAFT	2
9	074-3000-62	OUTLET SOCKET	2
10	017-0420-38	PILOTLAMP(14V 40mA)	9
11	017-0429-20	PILOTLAMP(8V 105mA)	2
12	----------	SWITCH PWB	1
13	373-1072-01	DIAL CVR	1
14	345-5550-00	RUBBER SW(A)	1
15	345-5551-00	RUBBER SW(B)	1
16	345-5552-00	RUBBER SW(C)	1
17	380-5634-00	KNOB	2
18	716-0778-00	WAVE SCREW(2x6)	16
19	331-3722-00	MECH BRKT	1
20	331-3444-10	ANT HOLDER	1
21	331-3458-00	TR HOLDER	1

NO.	PART NO.	DESCRIPTION	Q'TY
22	331-3459-00	IC HOLDER	1
23	331-3460-00	CONNECT HOLDER	1
24	076-0648-12	PLUG	2
25	074-1194-00	OUTLET SOCKET(Ce NET)	1
26	074-4007-20	OUTLET SOCKET(20P)	1
27	074-1192-20	OUTLET SOCKET(20P)	1
28	941-0215-72	TUNER PACK	1
29	----------	MAIN PWB	1
30	778-3006-00	TAP SCREW(3x6)	2
31	929-0702-80	CD CHANGER MODULE	1
32	816-4012-50	FLAT WIRE	1
33	309-0795-02	FRONT PLATE	1
34	311-1861-01	LOWER CASE	1
35	313-1856-00	HEAT SINK	1
36	714-2003-89	MACHINE SCREW(M2x3)	1
37	714-2612-81	MACHINE SCREW(M2.6x12)	2
38	714-2606-81	MACHINE SCREW(M2.6x6)	13
39	716-0878-00	IT SCREW(M2.6x5)	8
40	286-6224-14	SETPLATE	1
41	335-7621-00	WIRE SUPPORT	1
42	345-5384-00	CUSHION	1
43	285-1960-00	GUIDE LABEL	1

CD changer module section

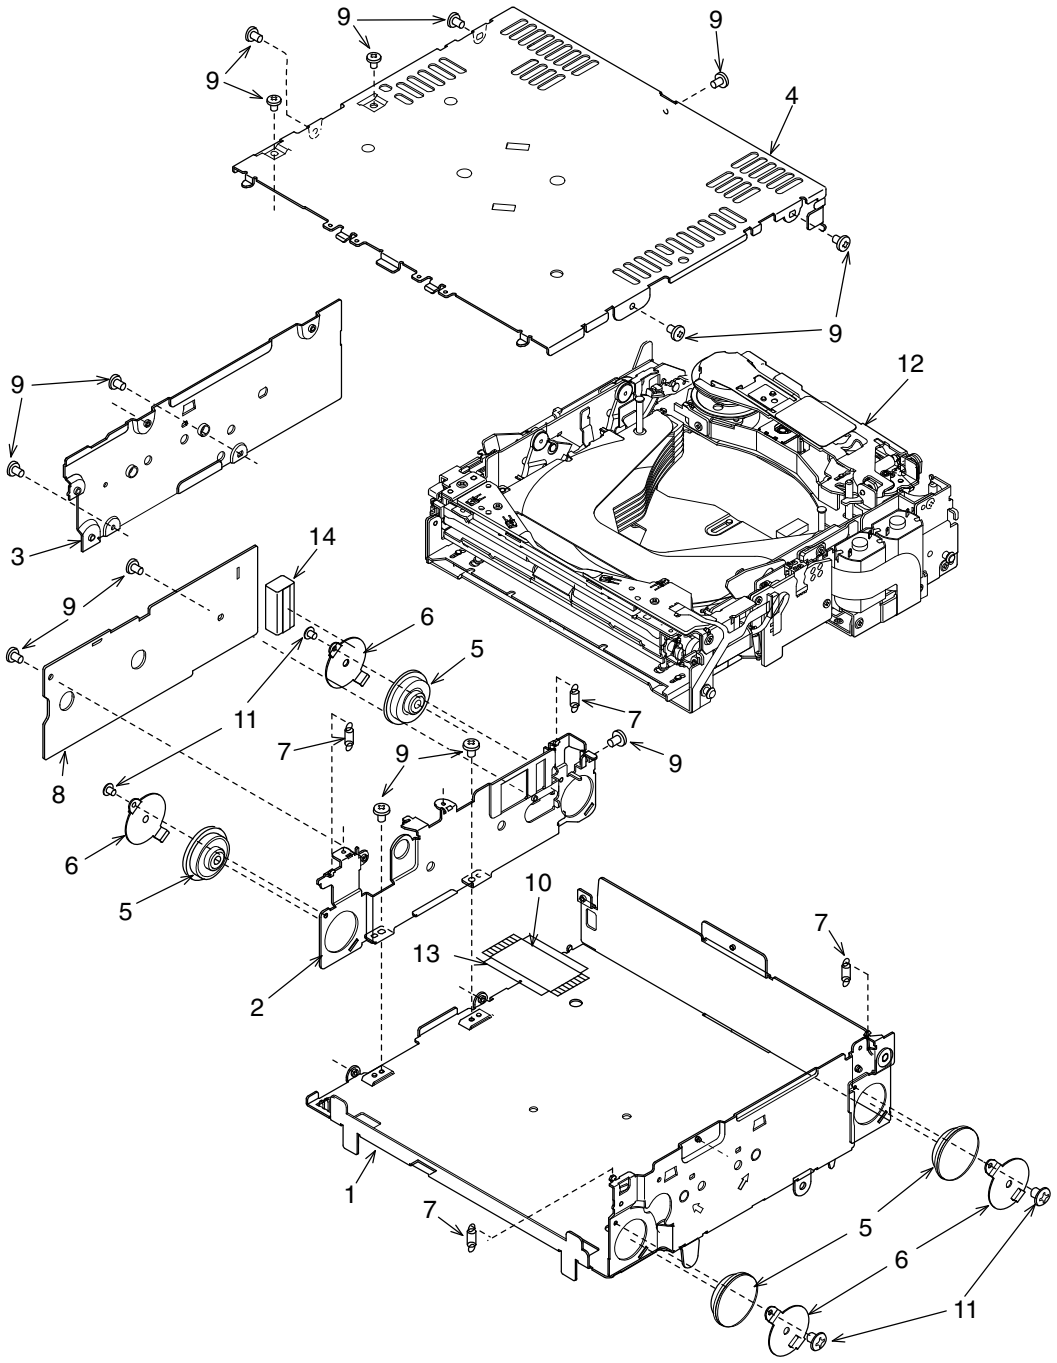


NO.	PART NO.	DESCRIPTION	Q'TY
1	311-1864-24	LOWER CASE	1
2	331-3896-22	PWB-HOLDER	1
3	305-0334-20	SIDE CASE	1
4	310-1741-27	UPPER CASE	1
5	629-0083-01	DAMPER	4
6	620-1086-20	DAMPER-H-PLT	4
7	750-3491-00	FL-SPRING	4


NO.	PART NO.	DESCRIPTION	Q'TY
8	----------	CD PWB	1
9	716-1716-00	SCREW(M2x3)	14
10	HBS-561-100	FPC(45P)	1
11	716-3450-00	SCREW(M1.7x2)	4
12	----------	CD CHANGER MECHANISM	1
13	347-6619-00	INSULATOR	1
14	345-8748-00	GASKET	1

* No. 12: Refer to CD changer mechanism section. (page 10-12)

CD changer mechanism section:Main chassis

(Parts List: page 12)

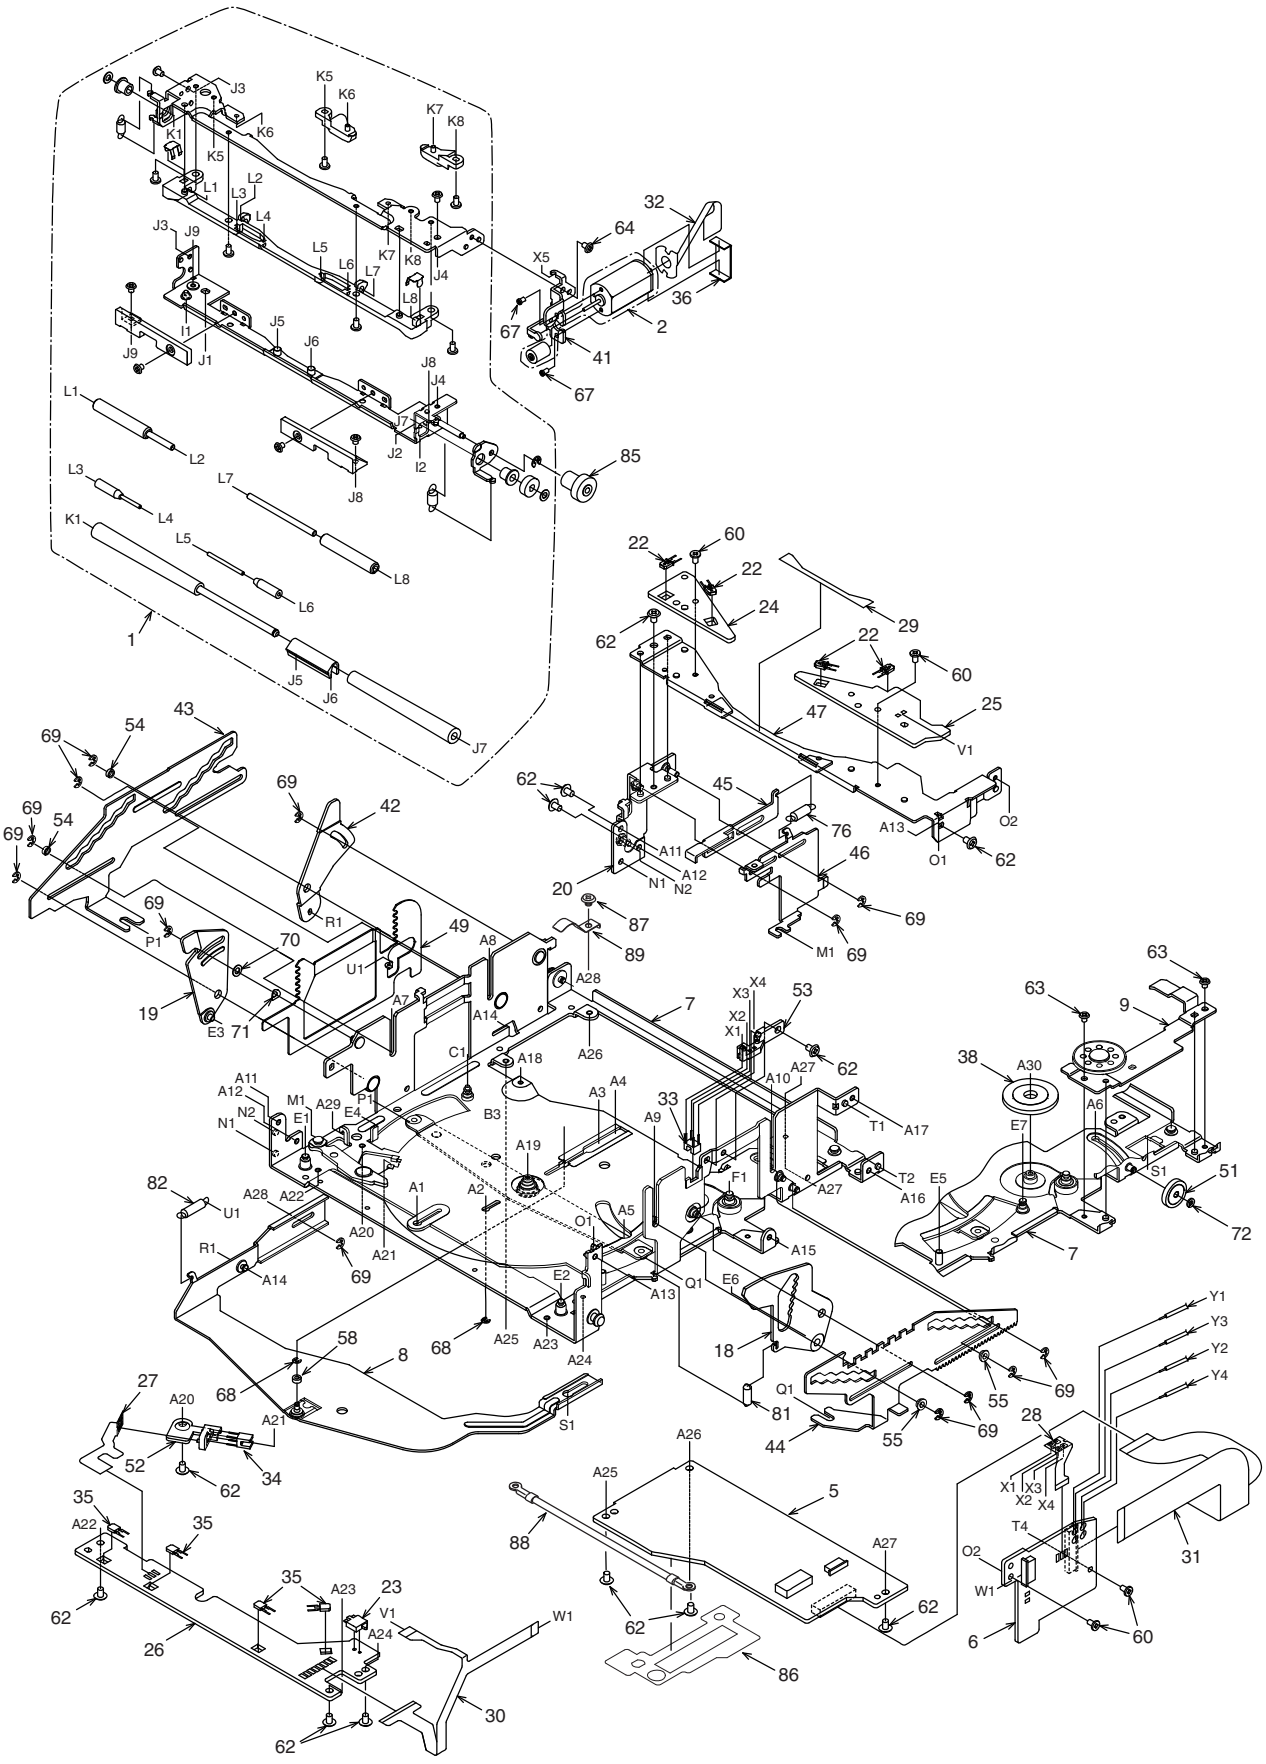

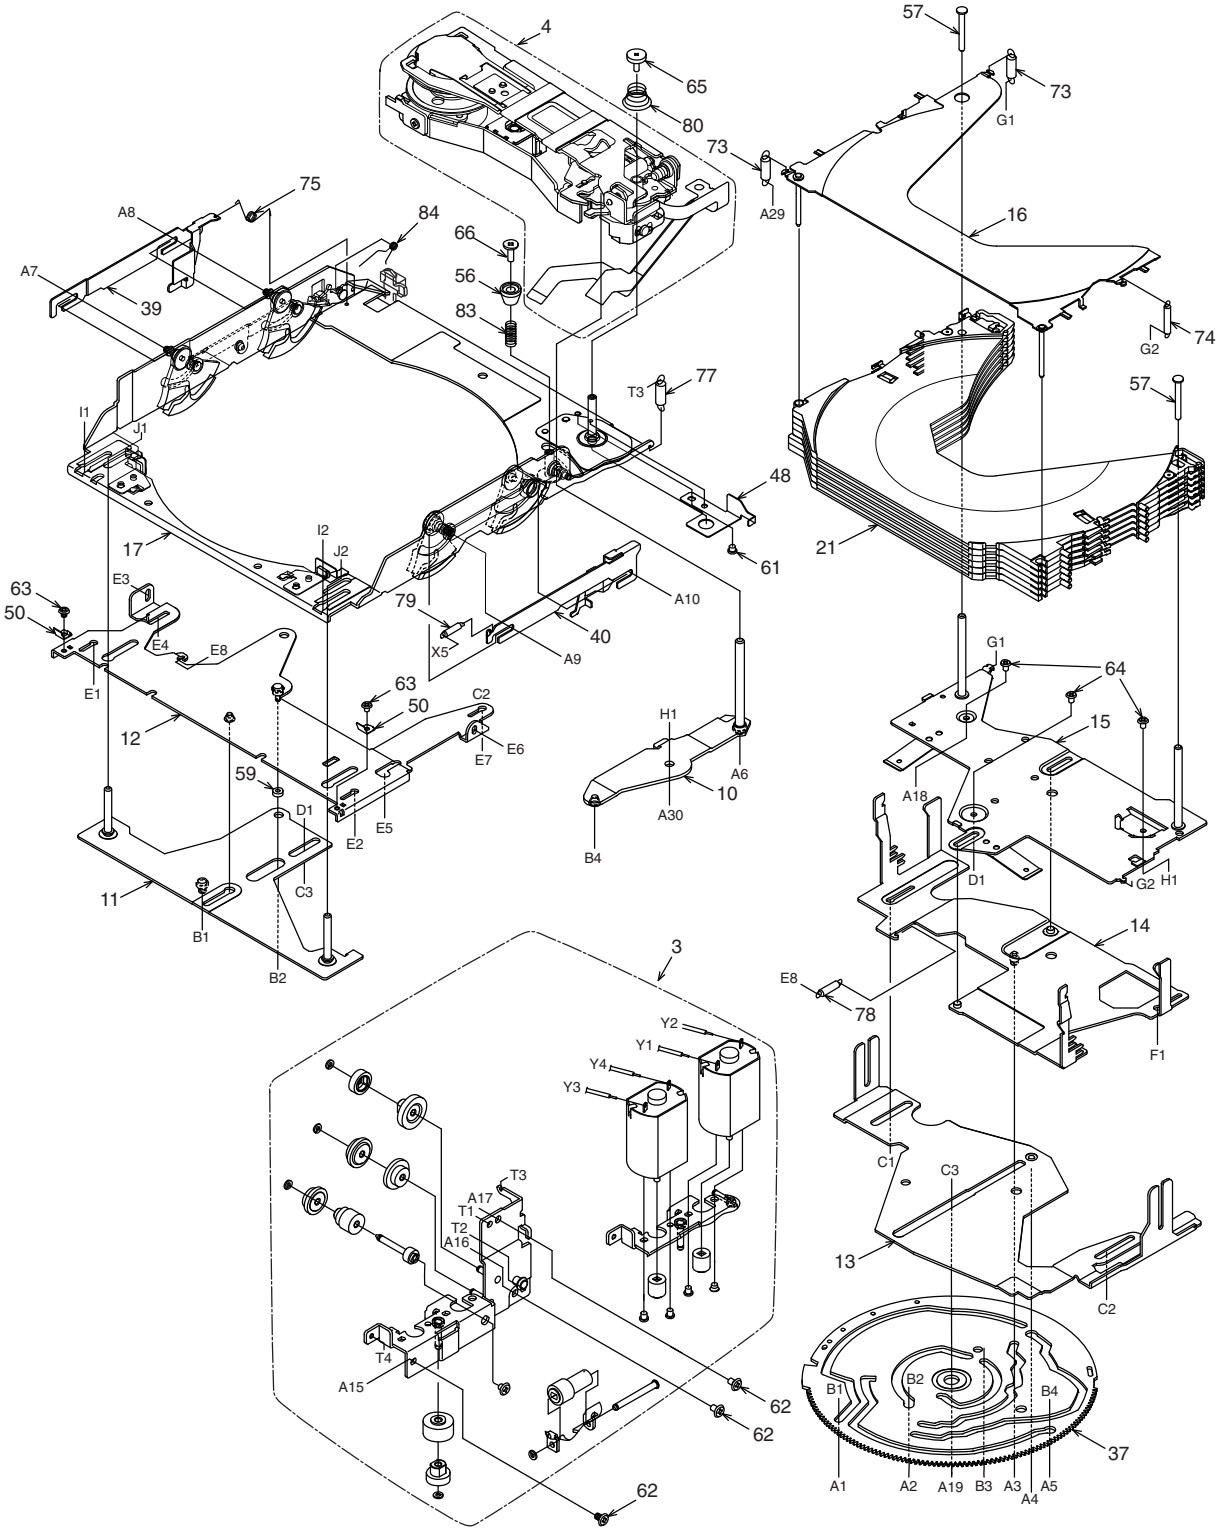
4
65
80
75
A8
84
66
A7
39
56
83
I1
J1
77
T3
48
61
17
I2
J2
63
50
E3
E4
E8
E1
79
X5
A10
40
A9
12
63
50
C2
E6
E7
59
D1
E2
E5
11
B1
C3
B2
H1
A6
A30
10
B4
57
73
G1
A29
16
74
G2
57
21
G1
64
15
A18
D1
G2
H1
14
E8
78
F1
3
Y2
Y1
Y4
Y3
T3
A17
T1
T2
A16
T4
A15
62
62
62
C1
C3
13
C2
B1
B2
B4
37
A1
A2
A19
B3
A3
A4
A5


PS-2759D-A

NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-521-100	LOADING UNIT	1
2	SMA-186-100	LOADING MOTOR ASSY	1
3	HBS-530-100	MOTOR PLATE SUB ASSY	1
4	HBS-531-104	DRIVE UNIT	1
5	----------	DSP PWB	1
6	----------	DRIVER PWB	1
7	966-1751-22	CHASSIS ASSY	1
8	966-0600-23	LOCK-P-RE-ASSY	1
9	966-0601-21	M-GEAR-P-ASSY	1
10	966-0602-24	DR-LINK-ASSY	1
11	966-0603-21	MODE-P-ASSY	1
12	966-0604-26	LOCK-PF-ASSY	1
13	966-0605-20	SHIFT-P-ASSY	1
14	966-0606-23	HLC-PLATE-ASSY	1
15	966-0607-26	COV-OLATE-ASSY	1
16	HBS-535-100	TOP-PLATE-ASSY	1
17	966-0652-22	DR-BASE-P-ASSY	1
18	966-0615-21	LOCK-L-RF-ASSY	1
19	966-0616-20	LOCK-L-LF-ASSY	1
20	966-0618-21	EJECT-B-ASSY	1
21	966-0624-27	DISC-HOL-ASSY	1
22	001-7042-00	DIODE (GL4800)	4
23	013-7414-50	DETECTOR SWITCH	1
24	----------	LED-L-PWB	1
25	----------	LED-R-PWB	1
26	----------	SENSOR PWB	1
27	039-2009-00	PIM-FPC (WITHOUT COMPONENT)	1
28	039-2010-00	PIV-FPC (WITHOUT COMPONENT)	1
29	039-2011-01	LED-FPC	1
30	039-2012-00	SENSOR-FPC	1
31	039-2013-02	MOS-FPC	1
32	039-2014-01	L-MOTOR-FPC (WITHOUT COMPONENT)	1
33	051-5806-01	IC (GPIS93)	1
34	051-5806-02	IC (GPIS95)	1
35	060-0252-01	PHOTO-TR	4
36	347-6657-01	LO-COVER SHEET	1
37	620-1041-26	GEAR PLATE	1
38	620-1042-20	M-GEAR-H	1
39	620-1056-22	HLR-PLATE-L	1
40	620-1580-20	HLR-PLATE-R	1
41	620-1576-20	LO-MOTOR-PLT	1
42	620-1066-20	LOCK LINK-LR	1
43	620-1067-21	SLIDE PLATE-L	1
44	620-1068-22	SLIDE PLATE-R	1
45	620-1071-21	EJECT ARM	1
46	620-1072-20	EJECT PLATE	1
47	620-1577-20	FRONT PLATE	1
48	620-1083-20	FPC-PLATE	1

NO.	PART NO.	DESCRIPTION	Q'TY
49	620-1090-20	GAP PLATE	1
50	620-1568-21	RATTLE PLATE-F	2
51	621-0640-20	V-GEAR-G	1
52	621-0641-21	PI-HOLDER-M	1
53	621-0656-21	PI-HOLDER-V	1
54	622-1622-20	SL-G-ROLLER	2
55	622-1623-00	SL-G-ROLLER-R	2
56	622-1648-23	DU-STP-SLEEVE	1
57	622-1650-23	COV-PLATE PIN-B	2
58	622-1651-00	LOCK-RE-ROLLER	1
59	622-1652-00	LOCK-PF-ROLLER	1
60	716-1866-00	SCREW(M1.7x3)	4
61	716-1873-00	SCREW(M2x1.6)	1
62	716-3449-00	SCREW(M2x3)	15
63	716-3450-00	SCREW(M1.7x2)	4
64	716-3451-00	SCREW(M1.7x2.5)	4
65	716-3459-00	SCREW(M1.7x5)	1
66	716-3466-03	SCREW(M2x6)	1
67	738-1422-11	PRECISION SCREW(M1.4x2.2)	2
68	743-1200-10	E-RING	2
69	743-1500-10	E-RING	13
70	746-0624-00	WASHER	1
71	746-0712-23	WASHER	1
72	746-0761-00	WASHER	1
73	750-3478-01	TOP-P-SP-L	2
74	750-3479-01	TOP-P-SP-R	1
75	750-3480-01	DR-LOCK-SP	1
76	750-3483-00	EJECT-A-SPRING	1
77	750-3484-01	DR-BASE-SPRING	1
78	750-3485-01	TENSION-SP-L	1
79	750-3486-01	LO-TENSION-SP	1
80	750-3489-01	DRIVE-P-SPRING	1
81	750-3496-00	GAP-P-SPRING R	1
82	750-3497-00	GAP-P-SPRING L	1
83	750-6711-01	DU-STP-SPRING	1
84	750-6712-01	DR-LOCK-SP-B	1
85	621-0651-22	LOAD GEAR-A	1
86	347-6974-22	FPC COVER	1
87	716-1850-01	SCREW(M2x2)	1
88	854-4348-01	EXTENSION LEAD	1
89	620-1604-20	DR-PLATE-SCREW	1

* No.4 : Refer to Drive unit section.(page 13)

CD changer mechanism section:Drive unit

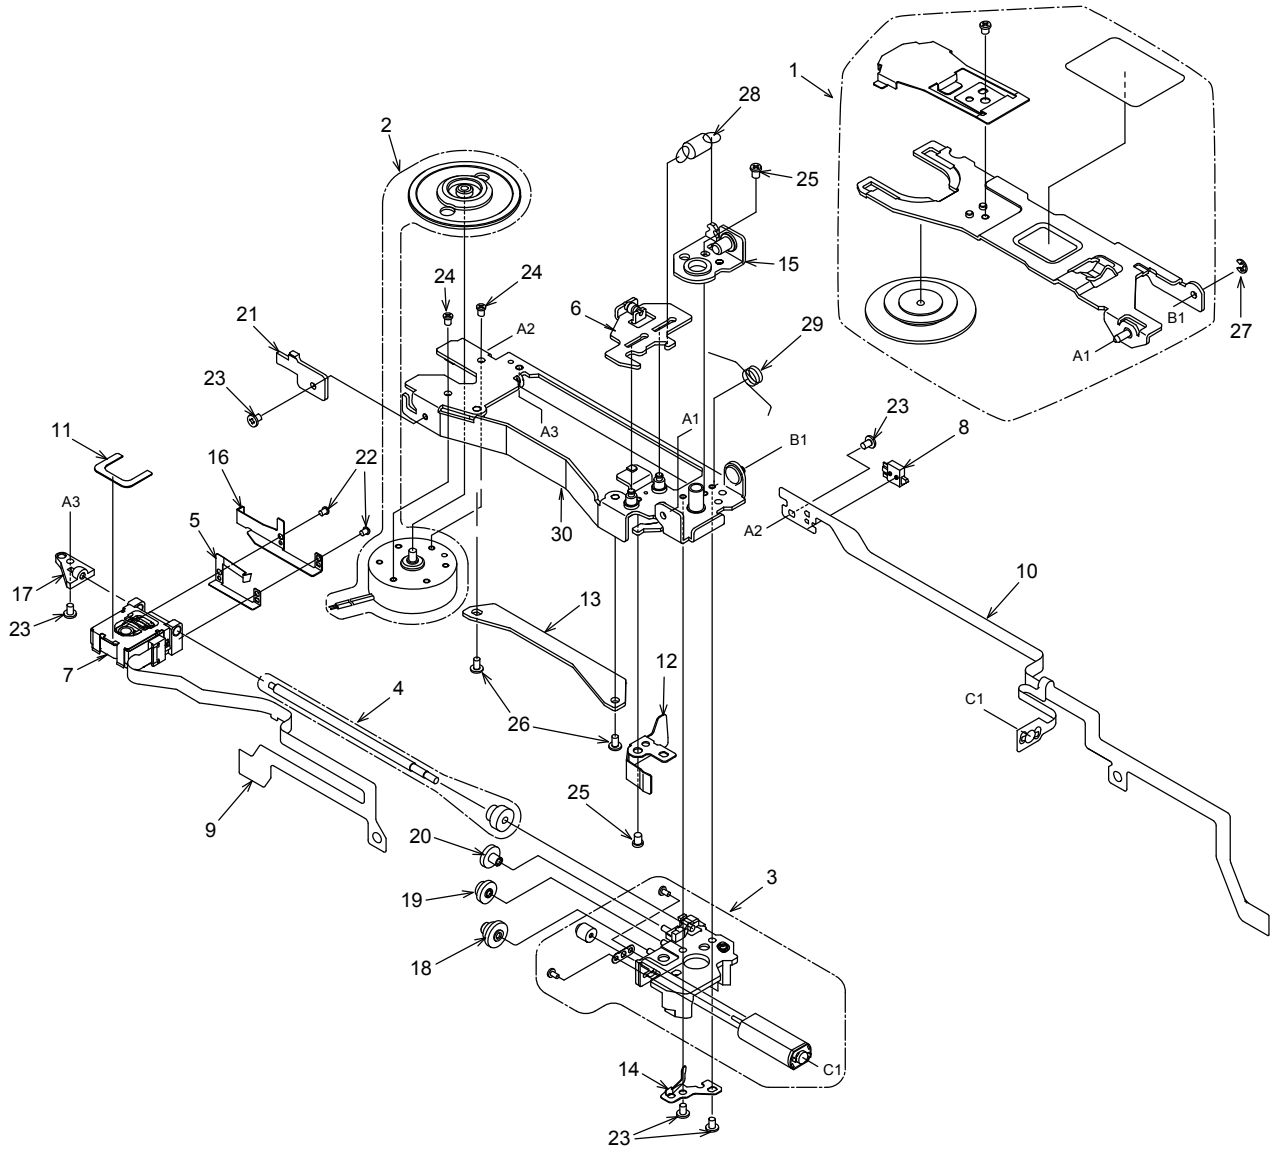

NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-532-101	CLAMPER SUB ASSY	1
2	SMA-193-101	SPINDLE MOTOR ASSY	1
3	SMA-191-100	SLED MOTOR ASSY	1
4	HBS-515-101	LS-ASSY	1
5	620-1587-83	SH-SP-PLT	1
6	HBS-542-101	D-SHIFT-P-ASSY	1
7	969-0011-01	PICK UP-ASSY	1
8	013-7414-50	DETECT SWITCH	1
9	039-2015-01	P/U-FPC	1
10	039-2016-02	M/S-FPC (WITHOUT COMPONENT)	1
11	347-6632-00	PU-SHEET	1
12	620-1078-20	PUSH PLATE	1
13	620-1080-22	PU-GUIDE PLATE	1
14	620-1081-20	SCREW PUSH-PLT	1
15	966-0650-20	SPRING PLT ASSY	1
16	620-1730-81	SCREW-HOL-PLT	1

NO.	PART NO.	DESCRIPTION	Q'TY
17	621-0670-20	LS-HOLDER-L	1
18	621-0673-20	D-GEAR A	1
19	621-0674-20	D-GEAR B	1
20	621-0675-20	D-GEAR C	1
21	621-0683-21	DU-STOPPER	1
22	716-3511-00	SCREW(M1.4x3)	2
23	716-3470-00	SCREW(M1.7x3)	5
24	738-1720-17	PRECISION SCREW(M1.7x2)	2
25	738-2025-17	PRECISION SCREW(M2x2.5)	2
26	716-3474-00	SCREW(M1.7x3)	2
27	743-1500-20	E-RING	1
28	750-3487-00	SHIFT-P-SPRING	1
29	750-3504-00	CLAMP-A-SPRING	1
30	966-0649-02	DRIVE PLT-ASSY	1

ELECTRICAL PARTS LIST

Main PWB(B1) section

Note) Several different parts of the same reference number are alternative parts. One of those parts is used in the set.

REF No.	PART No.	DESCRIPTION
ANT102	092-0702-00	ANT RECEPT
BL101	941-0215-72	TUNER PACK
C107	168-2232-55	0.022uF K
C109	178-4742-78	0.47uF
C113	189-1073-29	10V100uF
C114	168-1042-78	16V 0.1uF
C115	168-1042-78	16V 0.1uF
C116	168-1042-78	16V 0.1uF
C117	166-1801-50	18pF CH
C118	166-1801-50	18pF CH
C119	188-1073-28	10V 100uF
C120	168-2232-55	0.022uF K
C121	166-1011-50	100pF CH
C122	166-1011-50	100pF CH
C123	042-1458-90	50V 1uF LN
C124	168-2232-55	0.022uF K
C125	188-4763-38	16V 47uF
C126	168-1022-55	1000pF K
C127	188-4763-38	16V 47uF
C128	166-1011-50	100pF CH
C129	166-1011-50	100pF CH
C131	168-2232-55	0.022uF K
C132	166-1011-50	100pF CH
C133	166-1011-50	100pF CH
C138	119-0000-05	1/10W 0 ohm JW
C204	168-2232-55	0.022uF K
C205	168-1042-78	16V 0.1uF
C206	189-2273-28	10V220uF
C213	188-1063-38	16V 10uF
C214	188-1073-28	10V 100uF
C215	188-4763-38	16V 47uF
C216	188-4763-18	6.3V 47uF
C217	168-1042-78	16V 0.1uF
C301	168-1032-55	0.01uF K
C302	168-1042-78	16V 0.1uF
C303	188-4763-18	6.3V 47uF
C304	168-1032-55	0.01uF K
C305	168-1032-55	0.01uF K
C306	168-1032-55	0.01uF K
C307	168-1042-78	16V 0.1uF
C309	188-1053-68	50V 1uF
C311	168-1022-55	1000pF K
C312	168-1022-55	1000pF K
C313	168-1042-78	16V 0.1uF
C314	188-2263-38	16V 22uF
C315	168-1042-78	16V 0.1uF
C316	042-0559-00	5.5V 0.1F
C318	188-1073-28	10V 100uF
C319	168-1042-78	16V 0.1uF
C320	188-4763-38	16V 47uF
C401	188-1063-38	16V 10uF
C402	188-1063-38	16V 10uF
C403	188-1063-38	16V 10uF
C404	188-1073-28	10V 100uF
C603	188-2253-67	50V2.2uF
C604	168-1532-55	0.015uF K
C605	168-1532-55	0.015uF K
C606	188-2253-68	50V 2.2uF
C610	168-4712-55	470pF K
C611	168-4712-55	470pF K
C619	188-4763-37	16V 47uF
C620	188-4763-17	6.3V 47uF
C622	178-5642-78	0.56uF
C623	178-5642-78	0.56uF
C626	188-1053-68	50V 1uF
C627	188-1053-68	50V 1uF
C632	168-1042-78	16V 0.1uF
C633	168-1042-78	16V 0.1uF
C634	168-1042-78	16V 0.1uF
C635	168-1042-78	16V 0.1uF
C640	168-1022-55	1000pF K
C641	168-1022-55	1000pF K
C642	168-1022-55	1000pF K
C643	168-1022-55	1000pF K
C644	188-1063-38	16V 10uF
C645	188-1063-38	16V 10uF
C646	168-3332-78	0.033uF K
C647	168-5632-78	16V 0.056uF
C648	168-5632-78	16V 0.056uF
C649	168-4712-55	470pF K
C650	168-4712-55	470pF K
C670	188-1073-28	10V 100uF
C671	168-1042-78	16V 0.1uF
C672	188-1073-28	10V 100uF
C691	178-1052-78	1uF
C692	188-1063-38	16V 10uF
C693	188-1063-38	16V 10uF
C694	188-1063-38	16V 10uF
C695	188-1063-38	16V 10uF
C696	178-1052-78	1uF
C730	168-1042-78	16V 0.1uF
C731	168-1042-78	16V 0.1uF
C732	168-1042-78	16V 0.1uF
C733	168-1042-78	16V 0.1uF
C734	188-1053-68	50V 1uF
C735	188-1063-38	16V 10uF
C738	188-1053-68	50V 1uF
C801	188-1063-38	16V 10uF
C806	188-4763-38	16V 47uF
C807	188-1073-28	10V 100uF
C809	172-1041-15	0.1uF
C810	188-1053-68	50V 1uF
C813	042-1586-00	16V 4700uF
C814	172-1041-15	0.1uF
C851	168-1032-55	0.01uF K
C951	168-1042-78	16V 0.1uF
C952	188-4763-38	16V 47uF
C953	166-2201-50	22pF CH
C954	166-2201-50	22pF CH
C955	166-1007-50	10pF CH
C956	166-1007-50	10pF CH
C957	188-1063-38	16V 10uF
C958	188-1063-38	16V 10uF
C959	188-1063-38	16V 10uF
C960	188-1063-38	16V 10uF
C961	168-1042-78	16V 0.1uF
CCT301	050-0140-54	1/32W 1k ohm x4J
D203	001-4301-33	HZU 5.6B3
D205	001-0347-50	MA4100M
D206	001-0516-90	MA111
D207	001-0516-90	MA111
D301	001-0347-69	MA4180M
D302	001-0454-91	MA700A
D303	001-0454-91	MA700A
D304	001-0347-69	MA4180M
D305	001-4301-32	HZU 5.6B2
D306	001-4301-25	HZU4.7B1
D308	001-0347-69	MA4180M
D310	001-0516-90	MA111
D312	001-0516-90	MA111
D314	001-0466-90	S5688B
D316	001-0504-36	HZS7A1L
D401	001-0504-39	HZS7B2L
D402	001-0347-40	MA4075L
D403	001-0347-43	MA4082L
D803	001-0347-46	MA4091L
D804	001-0516-90	MA111
D805	001-0466-90	S5688B
D806	001-0466-90	S5688B
D807	001-0466-90	S5688B
D808	001-2015-00	RL253
IC102	051-6212-18	LC72191JM-UC
IC301	051-6600-58	HA12187FP
IC302	052-3196-00	M30624MGA-6-30GP
IC303	051-0869-58	NJM2103M
IC304	051-9400-29	BR93L46F-W
IC601	051-5027-10	LC75412WH-UC
IC702	051-2040-00	TA8276H
IC951	051-0350-93	NJM4558M
J202	074-1192-20	SOCKET(20P)
J301	074-1194-00	SOCKET(13P)
J801	074-4007-20	SOCKET(20P)
L101	010-2003-04	30uH(Variable)
L103	010-6009-76	22uH J
L104	010-6009-76	22uH J
L202	010-6009-76	22uH J
L301	010-6009-76	22uH J
L302	010-6009-76	22uH J
P401	076-0648-12	PLUG(12P)
P402	076-0648-12	PLUG(12P)
Q105	192-2712-51	2SC2712 G,L
Q106	192-2712-51	2SC2712 G,L
Q108	191-1240-00	2SB1240
Q109	191-1240-00	2SB1240
Q110	191-1240-00	2SB1240
Q201	190-1428-00	2SA1428
Q202	125-2004-92	RN1402
Q204	193-1858-00	2SD1858
Q205	193-1858-00	2SD1858
Q208	190-1428-00	2SA1428
Q209	192-2712-00	2SC2712
Q210	125-2004-92	RN1402
Q211	192-2712-00	2SC2712
Q214	103-2012-00	2SD2012
Q215	103-2012-00	2SD2012
Q219	125-0002-92	RN2402
Q220	125-2004-92	RN1402
Q301	192-2712-00	2SC2712
Q304	192-2712-00	2SC2712
Q308	192-2712-00	2SC2712
Q309	125-0002-92	RN2402
Q310	192-2712-00	2SC2712
Q311	191-1240-00	2SB1240
Q312	192-2712-00	2SC2712
Q320	193-2118-50	2SD2118F5 R,S
Q401	125-0002-92	RN2402
Q402	125-2004-92	RN1402
Q403	193-1858-00	2SD1858
Q404	125-0002-92	RN2402
Q405	125-2004-92	RN1402
Q407	192-2712-00	2SC2712
Q409	193-2118-00	2SD2118F5 Q,R,S
Q701	125-2004-92	RN1402
Q705	192-2712-00	2SC2712
Q801	190-1428-00	2SA1428
Q802	192-2712-00	2SC2712
Q804	193-2118-00	2SD2118F5 Q,R,S
Q807	125-0002-92	RN2402
Q808	125-2004-92	RN1402
Q809	191-1240-00	2SB1240
Q810	192-2712-00	2SC2712
R107	119-0000-05	1/10W 0 ohm JW
R112	119-2221-15	1/10W 2.2k ohm

REF No.	PART No.	DESCRIPTION
R115	119-2221-15	1/10W 2.2k ohm
R116	119-2231-15	1/10W 22k ohm
R117	111-1001-94	1/4W 10 ohm
R119	119-5631-15	1/10W 56k ohm
R120	119-3321-15	1/10W 3.3k ohm
R121	119-2221-15	1/10W 2.2k ohm
R122	119-4721-15	1/10W 4.7k ohm
R123	119-1021-15	1/10W 1k ohm
R124	119-5121-15	1/10W 5.1k ohm
R125	119-1041-15	1/10W 100k ohm
R126	119-2221-15	1/10W 2.2k ohm
R128	119-1021-15	1/10W 1k ohm
R129	119-1021-15	1/10W 1k ohm
R131	119-1031-15	1/10W 10k ohm
R132	119-1031-15	1/10W 10k ohm
R133	119-2221-15	1/10W 2.2k ohm
R134	119-2221-15	1/10W 2.2k ohm
R135	119-1031-15	1/10W 10k ohm
R136	119-0000-05	1/10W 0 ohm JW
R137	119-3311-15	1/10W 330 ohm
R140	119-1041-15	1/10W 100k ohm
R202	119-5611-15	1/10W 560 ohm
R203	119-2221-15	1/10W 2.2k ohm
R206	116-2291-15	1/4W 2.2 ohm
R207	116-2291-15	1/4W 2.2 ohm
R208	119-0000-05	1/10W 0 ohm JW
R210	119-3611-15	1/10W 360 ohm
R213	119-0000-05	1/10W 0 ohm JW
R216	119-4731-15	1/10W 47k ohm
R218	119-3321-15	1/10W 3.3k ohm
R223	116-4711-15	1/4W 470 ohm
R225	119-4721-15	1/10W 4.7k ohm
R226	116-4711-15	1/4W 470 ohm
R227	119-2231-15	1/10W 22k ohm
R231	116-2291-15	1/4W 2.2 ohm
R232	116-2291-15	1/4W 2.2 ohm
R237	111-1511-81	1/2W 150 ohm
R245	119-4731-15	1/10W 47k ohm
R246	119-4731-15	1/10W 47k ohm
R306	119-1031-15	1/10W 10k ohm
R307	119-4721-15	1/10W 4.7k ohm
R308	119-4721-15	1/10W 4.7k ohm
R309	119-4721-15	1/10W 4.7k ohm
R310	119-4731-15	1/10W 47k ohm
R311	119-4731-15	1/10W 47k ohm
R313	119-4731-15	1/10W 47k ohm
R314	119-4721-15	1/10W 4.7k ohm
R316	032-0140-62	1/10W 1k ohm F
R317	119-0000-05	1/10W 0 ohm JW
R319	119-4721-15	1/10W 4.7k ohm
R320	119-4721-15	1/10W 4.7k ohm
R322	119-0000-05	1/10W 0 ohm JW
R323	119-0000-05	1/10W 0 ohm JW
R325	119-1031-15	1/10W 10k ohm
R328	119-0000-05	1/10W 0 ohm JW
R329	119-0000-05	1/10W 0 ohm JW
R332	119-0000-05	1/10W 0 ohm JW

REF No.	PART No.	DESCRIPTION
R334	119-1031-15	1/10W 10k ohm
R335	119-4731-15	1/10W 47k ohm
R336	119-4731-15	1/10W 47k ohm
R337	119-4731-15	1/10W 47k ohm
R338	119-4731-15	1/10W 47k ohm
R339	117-2231-15	1/8W 22k ohm
R340	111-6801-94	1/4W 68 ohm
R341	117-2231-15	1/8W 22k ohm
R342	119-1031-15	1/10W 10k ohm
R344	117-5621-15	1/8W 5.6k ohm
R345	119-2231-15	1/10W 22k ohm
R346	117-1021-15	1/8W 1k ohm
R347	119-1021-15	1/10W 1k ohm
R348	119-2231-15	1/10W 22k ohm
R349	119-1031-15	1/10W 10k ohm
R350	119-1041-15	1/10W 100k ohm
R351	119-1041-15	1/10W 100k ohm
R352	119-6831-15	1/10W 68k ohm
R354	119-3341-15	1/10W 330k ohm
R355	119-6831-15	1/10W 68k ohm
R356	119-5631-15	1/10W 56k ohm
R357	111-1211-94	1/4W 120 ohm
R358	119-2241-15	1/10W 220k ohm
R359	119-4731-15	1/10W 47k ohm
R360	119-1531-15	1/10W 15k ohm
R361	119-1021-15	1/10W 1k ohm
R363	119-1031-15	1/10W 10k ohm
R364	119-1021-15	1/10W 1k ohm
R365	119-1031-15	1/10W 10k ohm
R366	119-2221-15	1/10W 2.2k ohm
R368	119-0000-05	1/10W 0 ohm JW
R370	116-1001-15	1/4W 10 ohm
R371	119-4721-15	1/10W 4.7k ohm
R372	119-0000-05	1/10W 0 ohm JW
R379	117-6821-15	1/8W 6.8k ohm
R401	119-1221-15	1/10W 1.2k ohm
R402	032-0092-51	1/8W 1k ohm F
R403	032-0092-56	1/8W 22k ohm F
R404	119-1541-15	1/10W 150k ohm
R405	116-1021-15	1/4W 1k ohm
R406	119-2231-15	1/10W 22k ohm
R407	119-2231-15	1/10W 22k ohm
R408	116-1591-15	1/4W 1.5 ohm
R411	060-0108-00	1/6ZP 0 ohm JW
R413	119-0000-05	1/10W 0 ohm JW
R414	119-4721-15	1/10W 4.7k ohm
R415	119-4721-15	1/10W 4.7k ohm
R417	119-4721-15	1/10W 4.7k ohm
R453	119-0000-05	1/10W 0 ohm JW
R603	119-1031-15	1/10W 10k ohm
R605	119-4721-15	1/10W 4.7k ohm
R606	119-1831-15	1/10W 18k ohm
R607	119-1831-15	1/10W 18k ohm
R608	119-4721-15	1/10W 4.7k ohm
R610	119-1031-15	1/10W 10k ohm
R615	119-1221-15	1/10W 1.2k ohm
R616	119-1221-15	1/10W 1.2k ohm

REF No.	PART No.	DESCRIPTION
R620	119-1051-15	1/10W 1M ohm
R651	119-0000-05	1/10W 0 ohm JW
R652	119-0000-05	1/10W 0 ohm JW
R670	116-2291-15	1/4W 2.2 ohm
R671	116-8211-15	1/4W 820 ohm
R672	116-1021-15	1/4W 1k ohm
R691	119-3331-15	1/10W 33k ohm
R692	119-3331-15	1/10W 33k ohm
R693	119-3331-15	1/10W 33k ohm
R694	119-3331-15	1/10W 33k ohm
R729	119-1031-15	1/10W 10k ohm
R733	119-8221-15	1/10W 8.2k ohm
R734	119-2221-15	1/10W 2.2k ohm
R735	119-2221-15	1/10W 2.2k ohm
R736	119-2221-15	1/10W 2.2k ohm
R737	119-2221-15	1/10W 2.2k ohm
R738	119-2221-15	1/10W 2.2k ohm
R739	119-4731-15	1/10W 47k ohm
R740	119-4731-15	1/10W 47k ohm
R801	116-4721-15	1/4W 4.7k ohm
R802	111-1031-94	1/4W 10k ohm
R803	119-1031-15	1/10W 10k ohm
R804	119-1031-15	1/10W 10k ohm
R805	116-2221-15	1/4W 2.2k ohm
R806	116-2221-15	1/4W 2.2k ohm
R815	116-4711-15	1/4W 470 ohm
R816	111-5621-94	1/4W 5.6k ohm
R817	116-2221-15	1/4W 2.2k ohm
R818	117-1031-15	1/8W 10k ohm
R819	116-2221-15	1/4W 2.2k ohm
R820	119-3321-15	1/10W 3.3k ohm
R821	119-1031-15	1/10W 10k ohm
R831	119-0000-05	1/10W 0 ohm JW
R832	119-0000-05	1/10W 0 ohm JW
R851	119-5631-15	1/10W 56k ohm
R852	119-1221-15	1/10W 1.2k ohm
R891	119-0000-05	1/10W 0 ohm JW
R951	119-1031-15	1/10W 10k ohm
R952	119-1031-15	1/10W 10k ohm
R953	119-1031-15	1/10W 10k ohm
R954	119-1031-15	1/10W 10k ohm
R955	119-1031-15	1/10W 10k ohm
R956	119-1031-15	1/10W 10k ohm
R957	119-1031-15	1/10W 10k ohm
R958	119-1031-15	1/10W 10k ohm
R959	119-1021-15	1/10W 1k ohm
SUP101	060-0122-20	DSP-141N-S00B
T801	009-0670-00	180uH
TH801	002-0222-90	PTH61G30BD
TM101	073-0762-90	TERMINAL
TM102	073-0762-90	TERMINAL
TM103	073-0762-90	TERMINAL
TM104	073-0762-90	TERMINAL
X101	061-1066-00	7.2MHz
X301	060-1533-90	10MHz
PWB	039-2696-00	PWB(WITHOUT COMPONENT)

Switch PWB(B2) section

REF No.	PART No.	DESCRIPTION
C901	168-1042-78	16V 0.1uF
C902	168-1042-78	16V 0.1uF
C903	168-1042-78	16V 0.1uF
C904	168-1042-78	16V 0.1uF
C905	168-1042-78	16V 0.1uF
C906	168-2212-55	220pF K
IC901	051-6052-20	LC75817NTRH-8720-UC-E
J901	074-3000-62	SOCKET(12P)
J902	074-3000-62	SOCKET(12P)

REF No.	PART No.	DESCRIPTION
L901	010-3406-66	NLV25 22uH J
LCD901	379-1335-52	INDICATOR(LCD)
PL901	017-0429-20	8V 105mA
PL902	017-0420-38	14V 40mA
PL903	017-0429-20	8V 105mA
PL904	017-0420-38	14V 40mA
PL905	017-0420-38	14V 40mA
PL907	017-0420-38	14V 40mA
PL908	017-0420-38	14V 40mA
PL909	017-0420-38	14V 40mA

REF No.	PART No.	DESCRIPTION
PL910	017-0420-38	14V 40mA
PL911	017-0420-38	14V 40mA
PL912	017-0420-38	14V 40mA
Q901	192-2712-00	2SC2712
R901	119-4731-15	1/10W 47k ohm
R904	119-0000-05	1/10W 0 ohm JW
R905	119-0000-05	1/10W 0 ohm JW
R906	119-0000-05	1/10W 0 ohm JW
R907	119-0000-05	1/10W 0 ohm JW
R911	119-0000-05	1/10W 0 ohm JW

REF No.	PART No.	DESCRIPTION
R913	119-0000-05	1/10W 0 ohm JW
R914	119-0000-05	1/10W 0 ohm JW
R915	119-3331-15	1/10W 33k ohm
R916	119-1021-15	1/10W 1k ohm

REF No.	PART No.	DESCRIPTION
R917	119-1021-15	1/10W 1k ohm
S901	013-7415-50	SPVG110400
TH901	002-0306-90	SC20-3J153
VR901	016-0014-14	VR W/SHAFT

REF No.	PART No.	DESCRIPTION
VR902	016-0014-14	VR W/SHAFT
PWB	039-2697-00	PWB(WITHOUT COMPONENT)

CD PWB(B3) section: CD changer mechanism

REF No.	PART No.	DESCRIPTION
C1	168-4735-56	0.047uF Z
C2	168-4735-56	0.047uF Z
C4	168-1222-55	1200pF K
C5	163-2263-35	16V22uF
C6	168-1222-55	1200pF K
C12	168-1222-55	1200pF K
C15	168-1222-55	1200pF K
C16	163-2263-35	16V22uF
C18	168-1045-56	0.1uF Z
C19	166-1011-50	100pF CH
C21	168-1032-55	0.01uF K
C22	168-1045-56	0.1uF Z
C23	168-1045-56	0.1uF Z
C24	168-1032-55	0.01uF K
C25	163-1073-15	6.3V 100uF
C26	178-1052-78	1uF
C27	168-1045-56	0.1uF Z
C28	042-0671-01	10V 47uF TA
C29	168-1045-56	0.1uF Z
C30	178-3342-78	0.33uF
C31	042-1673-00	10V 220uF
CCT4	050-0140-55	1/32W 2.2k ohmx4J
CCT5	050-0145-54	1/16W 47k ohm x4
CCT6	050-0145-53	1/16W 220k ohmx4 J
D2	001-2610-90	RB480KTL
IC2	051-5445-08	BD5227G-TR
IC3	052-5061-10	M30621MCM-5Z7GP

REF No.	PART No.	DESCRIPTION
IC4	051-9402-78	BR93L56RFVM-W
IC5	051-3332-90	NJU7222U33
IC6	051-3293-90	BA033SFP-E2
J1	074-1189-95	45P
J3	074-1237-70	20P
P1	076-0478-55	PLUG
Q3	190-1162-00	2SA1162
Q4	198-3018-00	2SK3018
Q5	131-1188-50	2SB1188PQR
Q6	198-3018-00	2SK3018
Q7	125-2004-92	RN1402
Q7	125-2020-92	DTC114EKA-T146
Q8	125-2004-92	RN1402
Q8	125-2020-92	DTC114EKA-T146
Q9	125-0002-92	RN2402
Q9	125-0014-92	DTA114EK
Q53	193-0601-00	2SD601A
R2	119-2211-15	1/10W 220 ohm
R4	119-4731-15	1/10W 47k ohm
R8	119-4731-15	1/10W 47k ohm
R10	119-2211-15	1/10W 220 ohm
R13	119-1041-15	1/10W 100k ohm
R14	119-2221-15	1/10W 2.2k ohm
R15	119-1041-15	1/10W 100k ohm
R16	119-1021-15	1/10W 1k ohm
R20	119-4731-15	1/10W 47k ohm
R24	119-4731-15	1/10W 47k ohm

REF No.	PART No.	DESCRIPTION
R25	119-1031-15	1/10W 10k ohm
R26	119-4721-15	1/10W 4.7k ohm
R27	119-1031-15	1/10W 10k ohm
R28	119-1041-15	1/10W 100k ohm
R29	119-1041-15	1/10W 100k ohm
R31	119-4731-15	1/10W 47k ohm
R32	119-0000-05	1/10W 0 ohm JW
R35	119-0000-05	1/10W 0 ohm JW
R36	119-4731-15	1/10W 47k ohm
R37	119-4731-15	1/10W 47k ohm
R38	119-2231-15	1/10W 22k ohm
R39	119-2231-15	1/10W 22k ohm
R40	119-2231-15	1/10W 22k ohm
R41	119-4711-15	1/10W 470 ohm
R42	119-2231-15	1/10W 22k ohm
R43	119-2241-15	1/10W 220k ohm
R60	119-0000-05	1/10W 0 ohm JW
R530	119-4731-15	1/10W 47k ohm
R550	119-4731-15	1/10W 47k ohm
TM1	073-0768-90	TERMINAL
TM2	073-0766-90	TERMINAL
TM4	073-0766-90	TERMINAL
TM5	073-0766-90	TERMINAL
X1	060-1533-90	10MHz
PWB	039-2532-20	PWB(WITHOUT COMPONENT)

DSP PWB(B4) section: CD changer mechanism

REF No.	PART No.	DESCRIPTION
C1	042-0671-01	10V 47uF TA
C2	168-4735-56	0.047uF Z
C3	046-4722-58	4700pF
C4	046-1032-78	0.01uF
C5	168-1045-56	0.1uF Z
C6	042-0671-01	10V 47uF TA
C7	168-1045-56	0.1uF Z
C8	168-1045-56	0.1uF Z
C9	045-1007-50	10pF
C10	168-1045-56	0.1uF Z
C11	045-1007-50	10pF
C12	168-1045-56	0.1uF Z
C13	042-0672-00	25V 47uF TA
C14	168-4735-56	0.047uF Z
C15	168-4735-56	0.047uF Z
C16	168-4735-56	0.047uF Z
C17	178-1052-78	1uF
C18	045-4701-50	47pF
C19	168-1045-56	0.1uF Z
C20	046-4712-58	470pF
C21	046-4712-58	470pF
C22	168-1045-56	0.1uF Z
C23	046-1532-78	0.015uF
C24	168-1045-56	0.1uF Z
C25	046-6822-58	6800pF
C26	046-1032-78	0.01uF
C28	046-1022-58	1000pF
C29	046-3332-78	0.033uF
C32	046-4722-58	4700pF
C33	046-1522-58	1500pF
C34	168-1045-56	0.1uF Z

REF No.	PART No.	DESCRIPTION
C35	046-1532-78	0.015uF
C36	168-1045-56	0.1uF Z
C37	168-1045-56	0.1uF Z
C38	042-0671-01	10V 47uF TA
C39	178-1052-78	1uF
C40	045-6801-50	68pF
C41	168-1045-56	0.1uF Z
C42	178-1052-78	1uF
C43	042-0671-01	10V 47uF TA
C44	046-6812-58	680pF
C45	168-1045-56	0.1uF Z
C46	168-1045-56	0.1uF Z
C47	042-0671-01	10V 47uF TA
C48	168-5632-78	16V 0.056uF
C49	168-1045-56	0.1uF Z
C50	168-1045-56	0.1uF Z
C51	168-1045-56	0.1uF Z
C53	168-1045-56	0.1uF Z
C54	042-0671-01	10V 47uF TA
C56	168-4712-55	470pF K
C57	046-1032-78	0.01uF
C58	168-4712-55	470pF K
C59	168-1045-56	0.1uF Z
C60	168-1045-56	0.1uF Z
C61	046-1032-78	0.01uF
C62	042-0671-01	10V 47uF TA
C63	046-1032-78	0.01uF
C64	168-1045-56	0.1uF Z
C65	045-1201-50	12pF
C66	046-1032-78	0.01uF
C67	046-1032-78	0.01uF

REF No.	PART No.	DESCRIPTION
C68	168-1045-56	0.1uF Z
C69	045-1201-50	12pF
C101	046-1032-78	0.01uF
C102	046-1032-78	0.01uF
CCT1	050-0140-68	1/32W 3.3k ohm x4J
CCT4	050-0140-63	1/32W 47k ohm x4J
D1	001-0367-91	1SS226
D2	001-2610-90	RB480KTL
IC2	051-6399-00	TC94A15F
IC3	051-6060-08	BD7961FM-E2
IC4	051-7518-18	SN74LVC139APWR
IC5	052-5062-03	MBM29DL800BA-90PFTN
IC6	051-7518-18	SN74LVC139APWR
IC7	051-9330-00	K4S641632F-TC60
IC8	051-7203-48	SN74LV74APW
IC9	051-6700-00	TMS320DA140P-GE160
IC10	051-3315-90	TPS76316DBVR
IC11	051-7221-58	SN74AHC1G04-HDCKR
IC12	051-7525-08	SN74AHC1G04-HDCKR
IC13	051-7526-08	SN74AHC1G04-HDCKR
J1	074-1201-65	15P
J2	074-1138-56	6P
J3	074-1059-76	26P
J4	074-1189-95	45P
J5	074-1201-60	10P
L2	010-3104-54	MPZ1608S601AT

REF No.	PART No.	DESCRIPTION
L3	010-3104-54	MPZ1608S601AT
Q1	131-1188-50	2SB1188PQR
Q2	131-1188-50	2SB1188PQR
Q3	125-2004-92	RN1402
Q3	125-2020-92	DTC114EKA-T146
R1	033-1021-15	1/10W 1k ohm
R2	033-1021-15	1/10W 1k ohm
R3	033-3311-15	1/10W 330 ohm
R4	033-2211-15	1/10W 220 ohm
R5	033-2211-15	1/10W 220 ohm
R6	033-1021-15	1/10W 1k ohm
R7	033-1051-15	1/10W 1M ohm
R8	033-0000-05	1/10W 0 ohm
R10	033-5621-15	1/10W 5.6k ohm
R11	033-4731-15	1/10W 47k ohm
R12	119-3341-15	1/10W 330k ohm
R13	033-2231-15	1/10W 22k ohm
R14	033-2231-15	1/10W 22k ohm
R15	117-1001-15	1/8W 10 ohm
R16	033-5631-15	1/10W 56k ohm
R17	033-3331-15	1/10W 33k ohm
R18	033-6831-15	1/10W 68k ohm
R19	033-6831-15	1/10W 68k ohm
R20	033-1011-15	1/10W 100 ohm
R40	033-1011-15	1/10W 100 ohm

REF No.	PART No.	DESCRIPTION
R41	033-1001-15	1/10W 10 ohm
R42	033-1001-15	1/10W 10 ohm
R45	033-1011-15	1/10W 100 ohm
R46	033-4731-15	1/10W 47k ohm
R21	116-4711-15	1/4W 470 ohm
R22	117-1811-15	1/8W 180 ohm
R23	116-4711-15	1/4W 470 ohm
R24	033-2231-15	1/10W 22k ohm
R25	033-2231-15	1/10W 22k ohm
R26	033-2231-15	1/10W 22k ohm
R27	033-1011-15	1/10W 100 ohm
R28	033-4731-15	1/10W 47k ohm
R29	033-2231-15	1/10W 22k ohm
R30	033-4721-15	1/10W 4.7k ohm
R31	033-4721-15	1/10W 4.7k ohm
R32	033-4731-15	1/10W 47k ohm
R33	033-4731-15	1/10W 47k ohm
R35	033-4731-15	1/10W 47k ohm
R36	033-3311-15	1/10W 330 ohm
R37	033-4731-15	1/10W 47k ohm
R38	033-3311-15	1/10W 330 ohm
R39	033-2211-15	1/10W 220 ohm
R47	033-4731-15	1/10W 47k ohm
R48	033-1011-15	1/10W 100 ohm
R49	033-0000-05	1/10W 0 ohm

REF No.	PART No.	DESCRIPTION
R50	033-0000-05	1/10W 0 ohm
R51	033-8231-15	1/10W 82k ohm
R52	033-0000-05	1/10W 0 ohm
R53	033-4731-15	1/10W 47k ohm
R63	033-2231-15	1/10W 22k ohm
R64	033-2231-15	1/10W 22k ohm
R65	033-4731-15	1/10W 47k ohm
R66	033-4731-15	1/10W 47k ohm
R100	033-1011-15	1/10W 100 ohm
R101	033-1011-15	1/10W 100 ohm
R102	033-1011-15	1/10W 100 ohm
R103	033-1011-15	1/10W 100 ohm
R104	033-1011-15	1/10W 100 ohm
R105	033-1011-15	1/10W 100 ohm
R106	033-1011-15	1/10W 100 ohm
R107	033-4731-15	1/10W 47k ohm
R200	033-1051-15	1/10W 1M ohm
R201	033-1021-15	1/10W 1k ohm
R202	033-1021-15	1/10W 1k ohm
R220	033-4731-15	1/10W 47k ohm
R301	119-2231-15	1/10W 22k ohm
R302	119-3911-15	1/10W 390 ohm
X1	061-3534-90	16.932MHz
PWB	039-2531-20	PWB(WITHOUT COMPONENT)

Sensor PWB(B5) section: CD changer mechanism

REF No.	PART No.	DESCRIPTION
PT3	060-0252-01	PT4850F
PT4	060-0252-01	PT4850F
PT5	060-0252-01	PT4850F
PT6	060-0252-01	PT4850F

REF No.	PART No.	DESCRIPTION
S1	013-7414-50	SPVG22
PWB	039-1956-00	PWB(WITHOUT COMPONET)

PIM-FPC PWB(B6) section: CD changer mechanism

REF No.	PART No.	DESCRIPTION
IC5	051-5806-02	GPIS95

Driver PWB(B7) section: CD changer mechanism

REF No.	PART No.	DESCRIPTION
C1	168-1045-56	0.1uF
C2	163-1073-35	16V100uF
D1	001-0529-29	MA8051-M
IC1	051-6044-18	BA6920FP-Y

REF No.	PART No.	DESCRIPTION
J1	074-1239-76	26P
J2	074-1100-59	9P
R1	033-1021-15	1/10W 1k ohm
R2	032-0104-59	1/4W 2.2 ohm

REF No.	PART No.	DESCRIPTION
R3	032-0104-59	1/4W 2.2 ohm
S1	013-7412-50	SPVG21
PWB	039-2242-00	PWB(WITHOUT COMPONET)

PIV-FPC PWB(B8) section: CD changer mechanism

REF No.	PART No.	DESCRIPTION
IC6	051-5806-01	GPIS93

LED-L-PWB(B9) section: CD changer mechanism

REF No.	PART No.	DESCRIPTION
LED3	001-7042-00	GL4800
LED4	001-7042-00	GL4800

REF No.	PART No.	DESCRIPTION
PWB	039-1954-20	PWB(WITHOUT COMPONET)

LED-R-PWB(B10) section: CD changer mechanism

REF No.	PART No.	DESCRIPTION
LED5	001-7042-00	GL4800
LED6	001-7042-00	GL4800

REF No.	PART No.	DESCRIPTION
PWB	039-1955-20	PWB(WITHOUT COMPONET)

L-Motor-FPC (B11) section: CD changer mechanism

REF No.	PART No.	DESCRIPTION
M1	SMA-186-100	LOADING

M/S-FPC (B12) section: CD changer mechanism

REF No.	PART No.	DESCRIPTION
M2	SMA-193-100	SPINDLE

REF No.	PART No.	DESCRIPTION
M3	SMA-191-100	SLED

REF No.	PART No.	DESCRIPTION
S2	013-7414-50	SPVG22