


2. EXPLODED VIEWS AND PARTS LIST

2.1 PACKING

● DEX-P1R/UC, DEX-P1/ES

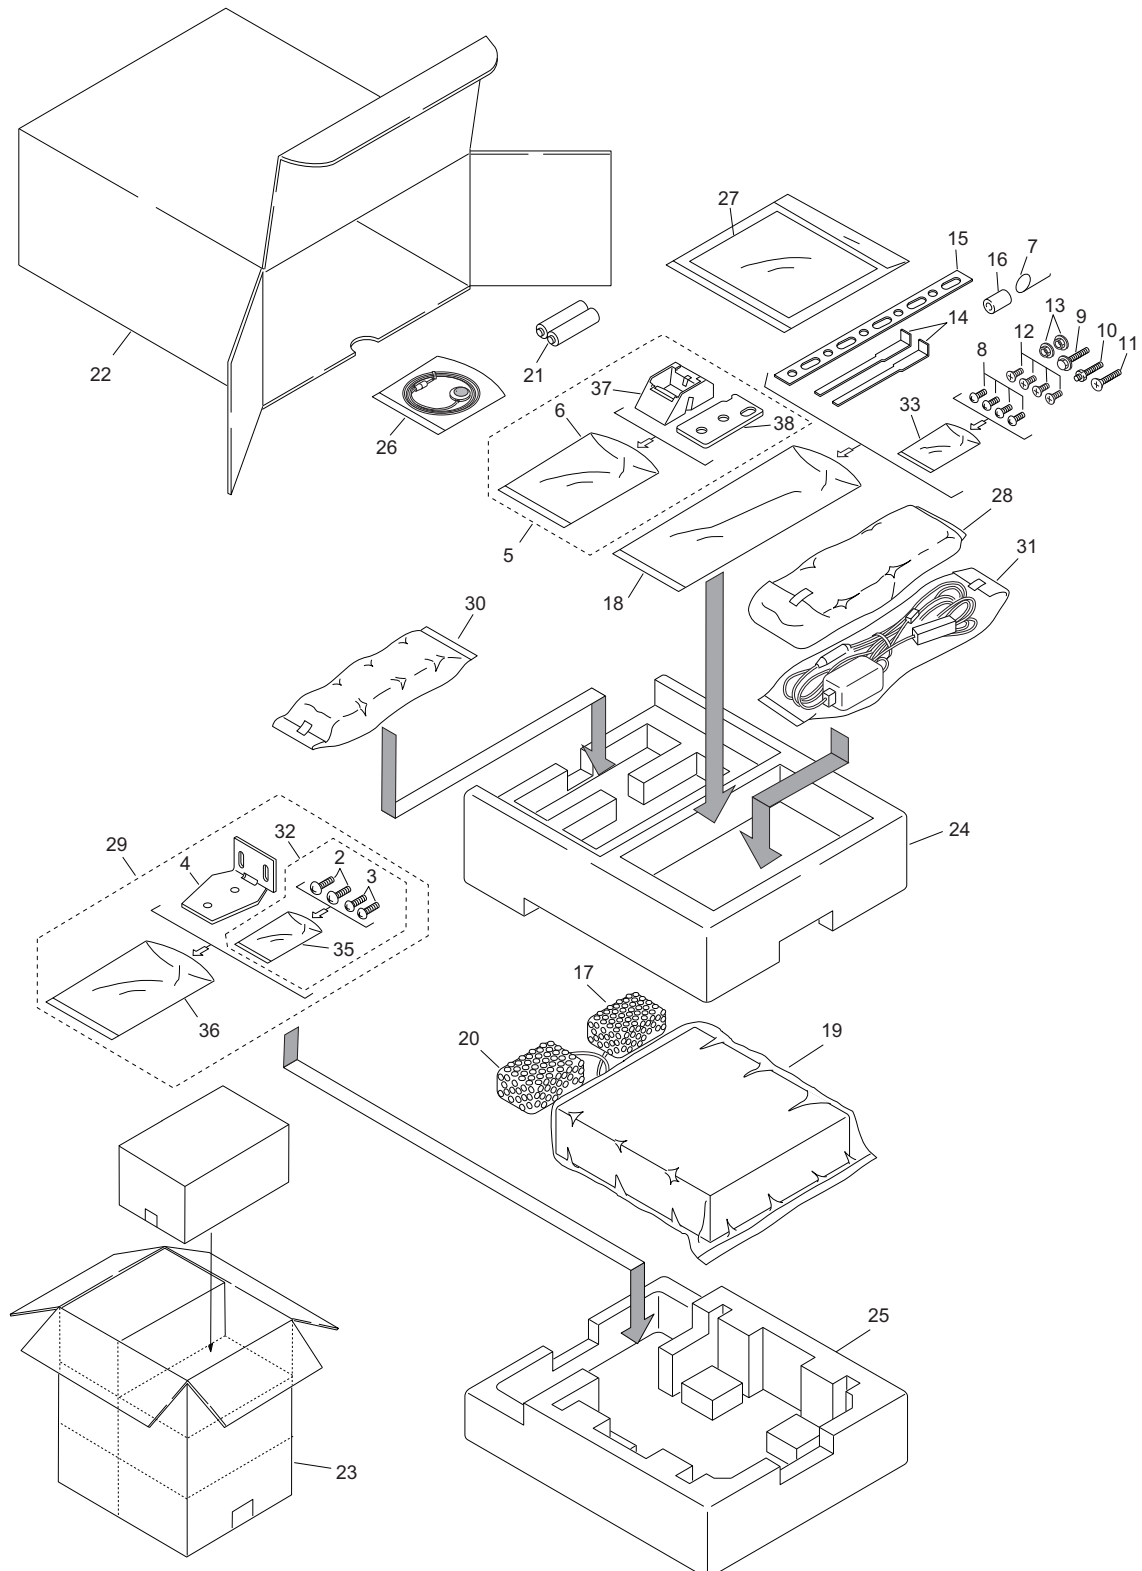

NOTE:

- Parts marked by "*" are generally unavailable because they are not in our Master Spare Parts List.
- Screws adjacent to ∇ mark on the product are used for disassembly.

● PACKING SECTION PARTS LIST

(1) PARTS LIST

Mark No.	Description	Part No.	Mark No.	Description	Part No.
1			26	Microphone Assy	CPM1022
2	Screw	BNC40P120FZK	27-1	Owner's Manual	See Contrast table(2)
3	Screw	BPZ30P100FZK	27-2	Owner's Manual	See Contrast table(2)
4	Bracket	CZN6467	27-3	Installation Manual	See Contrast table(2)
5	Base Assy	CEA2426	27-4	Installation Manual	See Contrast table(2)
6	Polyethylene Bag	CZE3188	* 27-5	Caution Card	See Contrast table(2)
7	Spring	CBH-865	* 27-6	Card	CRP1183
8	Screw	BMZ50P060FMC	27-7	Polyethylene Bag	CEG1116
9	Screw	See Contrast table(2)	* 27-8	Warranty Card	See Contrast table(2)
10	Screw	CBA1002	* 27-9	Card	See Contrast table(2)
11	Screw	CBA1120	* 27-10	Caution Card	See Contrast table(2)
12	Screw	CMZ50P060FMC	28	Case Assy	CXA7194
13	Nut	See Contrast table(2)	29	Bracket Assy	CEA2346
14	Handle	CNC5395	30	Remote Control Assy	See Contrast table(2)
15	Strap	See Contrast table(2)	30-1	Polyethylene Bag	CEG1011
16	Bush	CNV1917	31	Cord Assy	CDE5655
17	Air Cushioned Bag	CEG1080	32	Screw Assy	CZE3198
* 18	Polyethylene Bag	CEG-158	* 33	Polyethylene Bag	CEG-127
19	Polyethylene Bag	See Contrast table(2)	34		
20	Air Cushioned Bag	CEG1192	* 35	Polyethylene Bag	CEG-127
21	Battery	CEX1006	* 36	Polyethylene Bag	CZE3201
22	Carton	See Contrast table(2)	* 37	Base	CNS5031
23	Contain Box	See Contrast table(2)	* 38	Sheet	CZA3371
24	Protector	CHP2032			
25	Protector	CHP2033			

● Owner's Manual

Model	Part No.	Language
DEX-P1R/UC	CRB1514	English
DEX-P1/ES	CRD2730	English, Spanish
	CRD2731	Portuguese, Arabic

● Installation Manual

Model	Part No.	Language
DEX-P1R/UC	CRB1515	English
DEX-P1/ES	CRD2660	English, Spanish
	CRD2661	Portuguese, Arabic


(2) CONTRAST TABLE

DEX-P1R/UC and DEX-P1/ES are constructed same except for the following:

Mark No.	Symbol and Description	Part No.	
		DEX-P1R/UC	DEX-P1/ES
9	Screw	CBA-102	Not used
13	Nut	NF50FMC	Not used
15	Strap	CNF-111	Not used
19	Polyethylene Bag	CEG1185	*CEG1088
22	Carton	CHG3501	CHG3503
23	Contain Box	CHL3501	CHL3503
27-1	Owner's Manual	CRB1514	CRD2730
27-2	Owner's Manual	Not used	CRD2731
27-3	Installation Manual	CRB1515	CRD2660
27-4	Installation Manual	Not used	CRD2661
* 27-5	Caution Card	CRN1049	Not used
* 27-8	Warranty Card	CRY1070	Not used
* 27-9	Card	Not used	CRP1186
*27-10	Caution Card	CRN1049	Not used
30	Remote Control Assy	CXB2758	CXB2764

2.2 EXTERIOR (1)

● DEX-P1R/UC, DEX-P1/ES

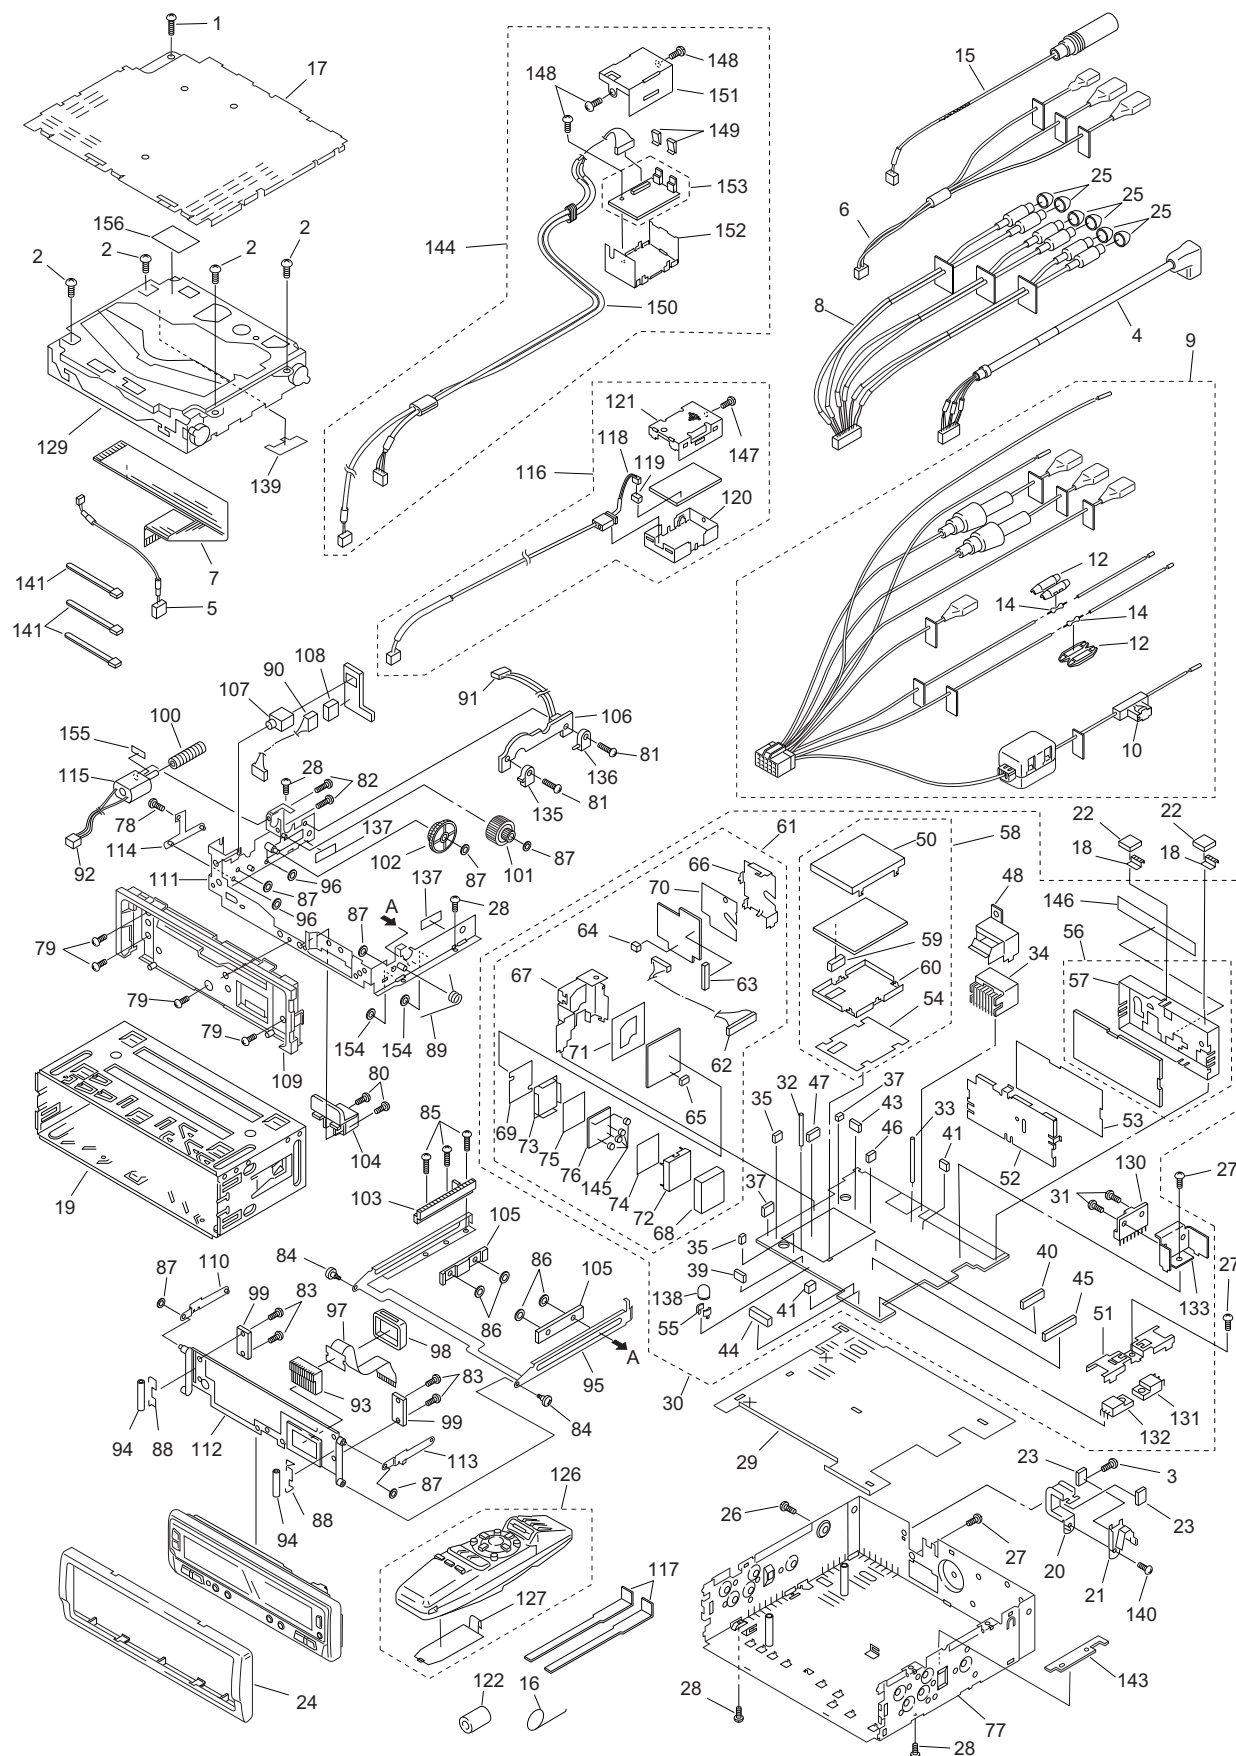

● EXTERIOR (1) SECTION PARTS LIST

(1) PARTS LIST

Mark No.	Description	Part No.	Mark No.	Description	Part No.
1	Screw	BMZ30P040FMC	46	Connector(CN681)	CKS3583
2	Screw	BSZ26P050FMC	47	Connector(CN222)	CKS3781
3	Screw	BSZ30P055FMC	48	Holder	CNC8011
4	Cord Assy	CDE5785	49		
5	Cord	CDE5536	50	Case	CNC8014
6	Cord Assy	See Contrast table(2)	51	Holder	CNC8013
7	Connector	CDE5543	52	Holder	CNC8021
8	Cord Assy	CDE5545	53	Insulator	CNM4684
9	Cord Assy	CDE5655	54	Insulator	CNM5626
10	Fuse	CEK1001	55	Holder	CNV1906
11			56	FM/AM Tuner Unit	See Contrast table(2)
12	Cap	CNS1472	57	Holder	See Contrast table(2)
13			58	DSP Unit	CWX2213
14	Resistor	RS1/2PMF102J	59	Connector(CN3001)	CKS3782
15	Antenna Cable	CDH1115	60	Case	CNC8015
16	Spring	CBH-865	61	High Out Unit	CWX2215
17	Case	CNB2279	62	Cord Assy	CDE5555
18	Earth Terminal	CNC7358	63	Plug(CN4153)	CKS1045
19	Holder	CNC6798	* 64	Plug(CN4152)	CKS1613
20	Holder	CNC7566	65	Plug(CN4051)	CKS1614
21	Holder	CNC7753	66	Holder	CNC8009
22	Spacer	CNM4913	67	Holder	CNC7556
23	Cushion	CNM6062	68	Shield	CNC8010
24	Panel	CNS4553	69	Insulator	CNM4760
25	Cap	CNV2680	70	Insulator	CNM5650
26	Screw	BMZ30P040FMC	71	Insulator	CNM5651
27	Screw	BSZ30P055FMC	72	Shield	CNC6224
28	Screw	CBA1447	73	Shield	CNC6274
29	Insulator	CNM5627	74	Insulator	CNM4610
30	Tuner Amp Unit	See Contrast table(2)	75	Insulator	CNM4814
31	Screw	BSZ30P055FMC	76	D/D Converter Unit	CWM4538
32	Clamper	CEF1008	77	Chassis Unit	CXB2295
33	Clamper	CEF1009	78	Screw	BMZ20P030FMC
34	Plug(CN901)	CKM1278	79	Screw	BMZ20P030FZK
35	Plug(CN221,851)	CKS-783	80	Screw	BPZ20P060FMC
36			81	Screw	CBA1060
37	Plug(CN141,852)	CKS-784	82	Screw	CBA1061
38			83	Screw	CBA1082
39	Plug(CN131)	CKS-786	84	Screw	CBA1430
40	Plug(CN101)	CKS1044	85	Screw	CBA1415
41	Plug(CN451,804)	CKS1222	86	Washer	CBF1038
42			87	Washer	CBF1039
43	Plug(CN803)	CKS1225	88	Spring	CBH2063
44	Connector(CN801)	CKS1564	89	Spring	CBH2086
45	Connector(CN671)	CKS2779	90	Cord	CDE5587

Mark No.	Description	Part No.	Mark No.	Description	Part No.
91	Cord	CDE5596	126	Remote Control Assy	See Contrast table(2)
92	Cord	CDE5597	127	Battery Cover	CNS5032
93	Socket	CKS2497	128		
94	Roller	CLA3458	129	CD Mechanism Module(H1)	CXK5101
95	Frame	CNC7548	130	IC(IC941)	PA2024A
96	Spacer	CNM5808	131	IC(IC871)	NJM78M05FA
97	PCB	CNP5065	132	Transistor(Q992)	2SD2396
98	Cover	CNS4841	133	Holder	CNC8012
99	Holder	CNV2141	134		
100	Gear	CNV5271	135	Switch(S951)	CSN1012
101	Torque Limiter Unit	CNV5272	136	Switch(S952)	CSN1022
102	Gear	CNV5273	137	Spacer	CNM5988
103	Rack	CNV5274	138	Lamp(IL801)	CEL1359
104	Lighting Conductor	CNV5276	139	Spacer	CNM6053
105	Guide	CNV5356	140	Screw	BSZ26P080FMC
106	Gathering PCB	CNX2961	* 141	Lock Tie	CNV-754
107	Mini Jack(CN4602)	CKN1015	142		
108	Plug(CN4601)	CKS-786	143	Guide Unit	CXB3234
109	Panel Unit	CXB2212	144	Inverter Assy	MWM9028
110	Arm Unit	CXB2215	145	Terminal (CN4001,4002,4003,4004)	CKF1023
111	Frame Unit	CXB2216	146	Spacer	CNM5996
112	Holder Unit	CXB2217	147	Screw	BSZ30P055FMC
113	Arm Unit	CXB2218	148	Screw	BSZ26P050FMC
114	Bracket Unit	CXB2598	149	Clip	MBK9001
115	Motor	CXM1085	150	Cord	MDE9018
116	ASL Unit	CWX2216	151	Holder	MNC9008
117	Handle	CNC5395	152	Holder	MNC9009
118	Cord	CDE5763	153	Inverter Unit	MWM9026
119	Plug(CN4501)	CKS-784	154	Spacer	CNM6069
120	Case	CNB2299	155	Spacer	CNM6093
121	Case	CNB2300	156	Cushion	CNM6065
122	Bush	CNV1917			
123					
124					
125					


(2) CONTRAST TABLE

DEX-P1R/UC and DEX-P1/ES are constructed same except for the following:

Mark No.	Description	Part No.	
		DEX-P1R/UC	DEX-P1/ES
6	Cord Assy	CDE5538	CDE5539
30	Tuner Amp Unit	CWM5693	CWM5699
56	FM/AM Tuner Unit	CWE1472	CWE1485
57	Holder	CNC6554	CNC6555
126	Remote Control Assy	CXB2758	CXB2764

2.3 EXTERIOR (2)

● DEX-P1R/UC, DEX-P1/ES

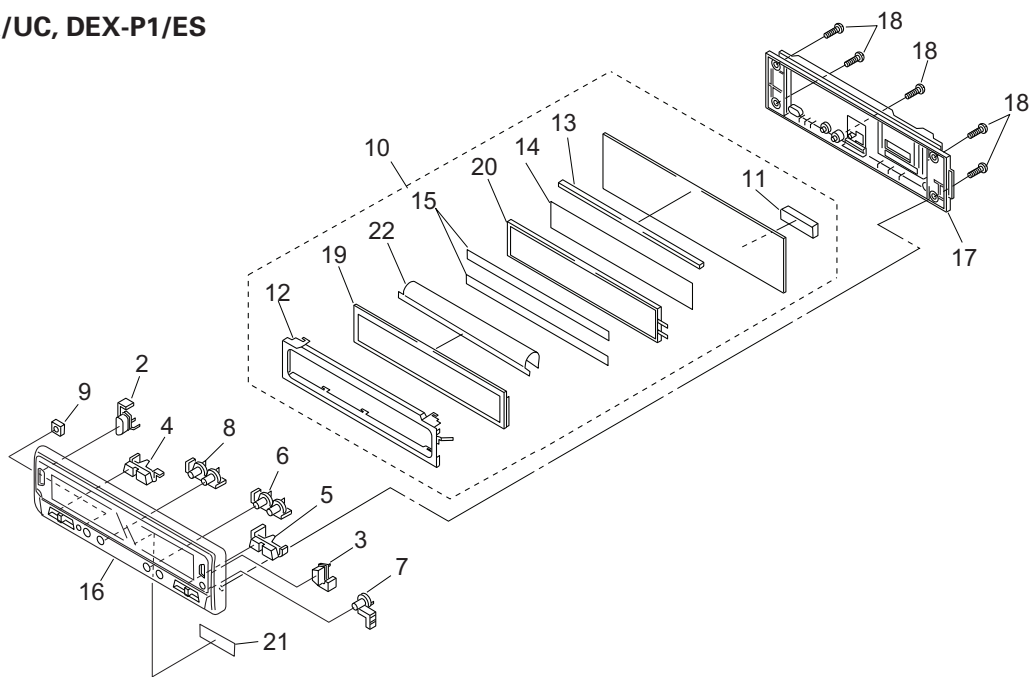

● EXTERIOR (2) SECTION PARTS LIST

(1) PARTS LIST


Mark No.	Description	Part No.	Mark No.	Description	Part No.
1			11	Plug(CN1901)	CKS2496
2	Button(+,-)	CAC5486	12	Holder	CNC7547
3	Button(OPEN/EJECT)	CAC5488	13	Spacer	CNM5622
4	Button(S/A,CLOCK)	CAC5490	14	Spacer	CNM5623
5	Button(TRACK/SEEK)	CAC5494	15	Spacer	CNM5894
6	Button	CAC5499	16	Grille Unit	See Contrast table(2)
7	Button(SOURCE/OFF)	CAC5504	17	Cover Unit	CXB2208
8	Button	See Contrast table(2)	18	Screw	BPZ20P080FZK
9	Spacer	CNM5910	*	19 LCD(LCD1901)	See Contrast table(2)
10	Keyboard Unit	See Contrast table(2)	20	EL(EL1901)	CEL1580
			21	Spacer	CNM6021
			*	22 PCB	CNP5063

(2) CONTRAST TABLE

DEX-P1R/UC and DEX-P1/ES are constructed same except for the following:

Mark No.	Description	Part No.	
		DEX-P1R/UC	DEX-P1/ES
8	Button	CAC5638	CAC5498
10	Keyboard Unit	CWM5686	CWM5689
16	Grille Unit	CXB2201	CXB2206
*	19 LCD(LCD1901)	CAW1470	CAW1471

2.4 CD MECHANISM MODULE

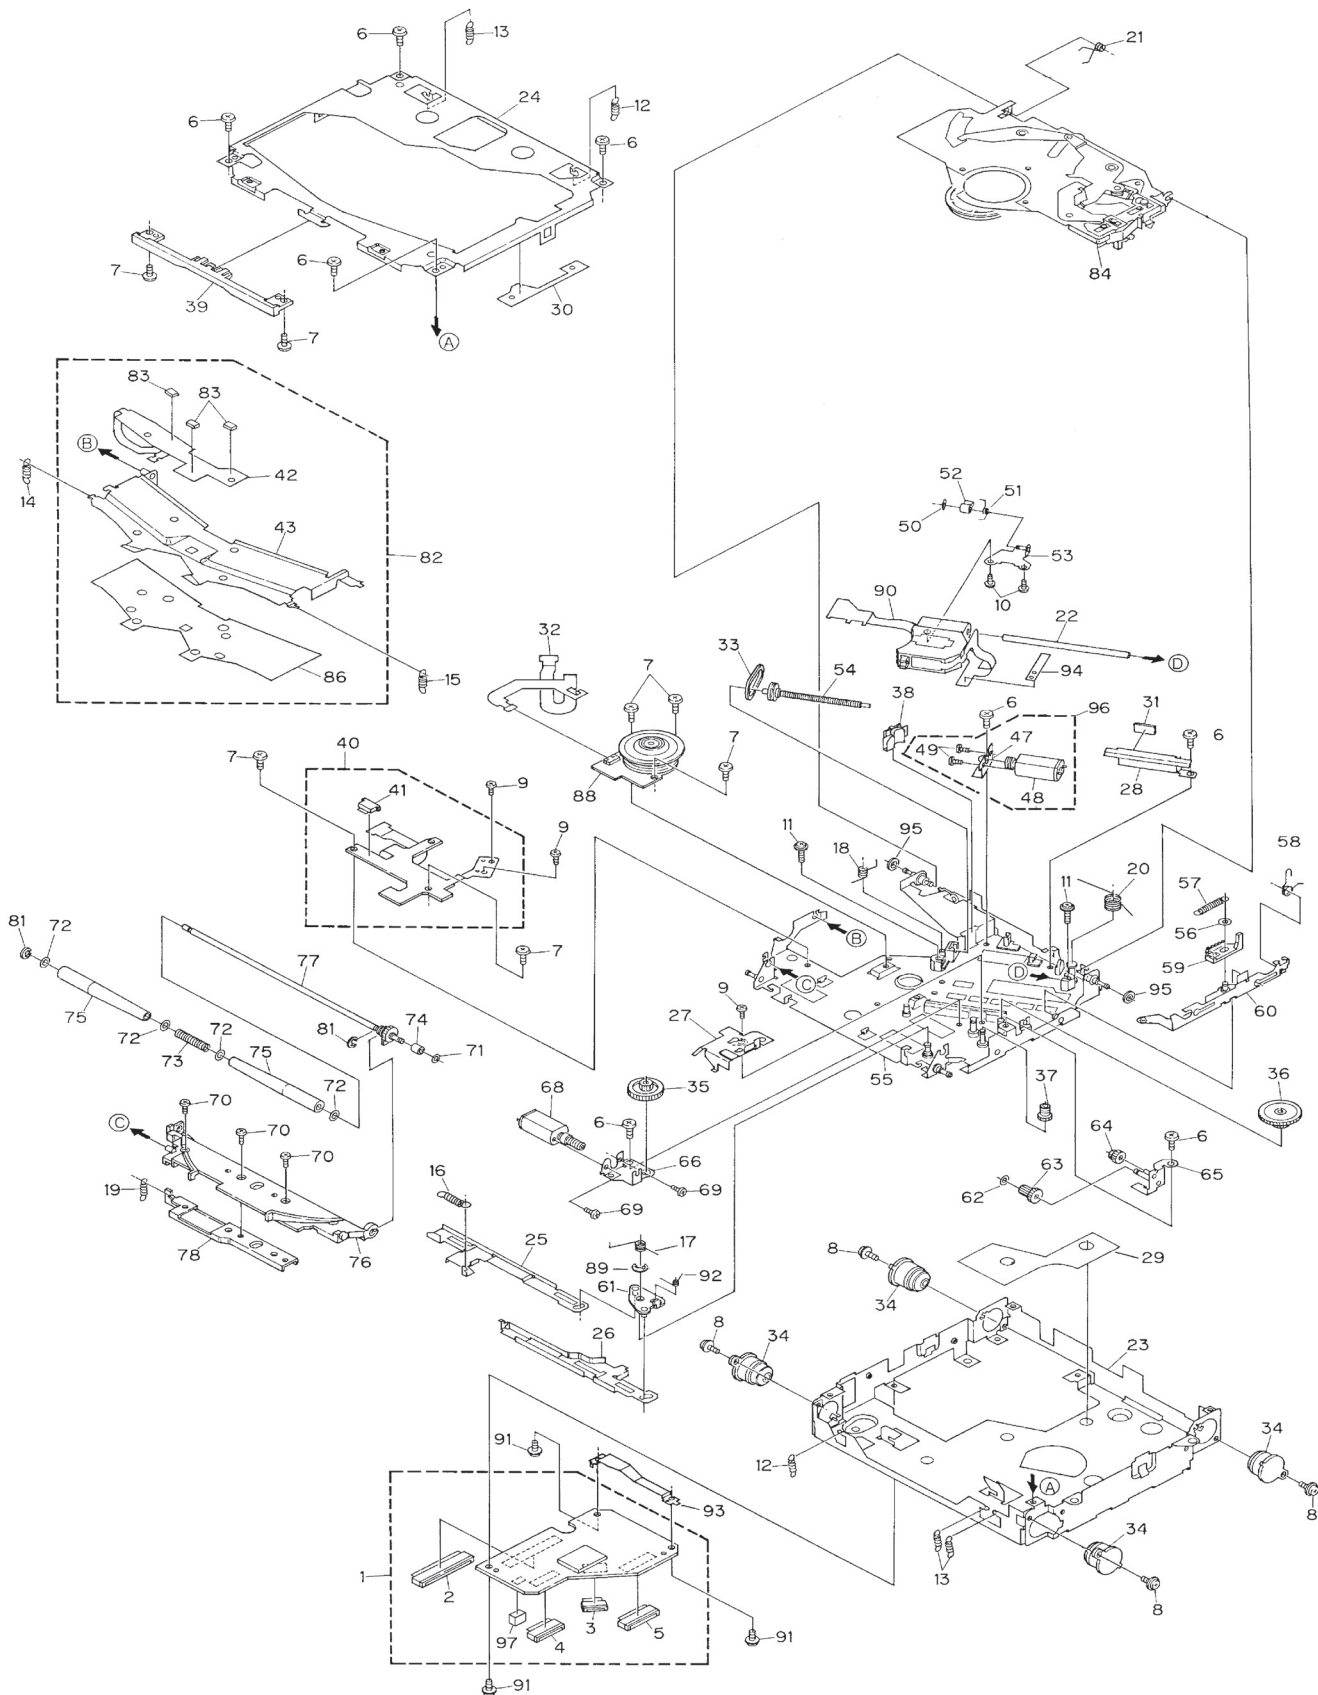

● CD MECHANISM MODULE SECTION PARTS LIST

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
	1	Control Unit	CWX2166		51	Spring	CBH2039
	2	Connector(CN701)	CKS1968		52	Lack	CNV5471
	3	Connector(CN802)	CKS3477		53	Bracket Unit	CXB1674
	4	Connector(CN801)	CKS3481		54	Screw Unit	CXB1676
	5	Connector(CN101)	CKS3486		55	Chassis Unit	CXB3042
	6	Screw	BMZ20P025FMC		56	Washer	CBF1038
	7	Screw	CBA1037		57	Spring	CBH2035
	8	Screw	CBA1296		58	Spring	CBH2036
	9	Screw	CBA1340		59	Lever	CNV5078
	10	Screw	CBA1362		60	Lever Unit	CXB3207
	11	Screw	CBA1440		61	Arm Unit	CXB1680
	12	Spring	CBH2029		62	Washer	CBF1038
	13	Spring	CBH2030		63	Gear	CNV5083
	14	Spring	CBH2031		64	Gear	CNV5084
	15	Spring	CBH2032		65	Bracket Unit	CXB1682
	16	Spring	CBH2033		66	Bracket	CNC7292
	17	Spring	CBH2207		67		
	18	Spring	CBH2040		68	Motor Unit(M2)	CXB1684
	19	Spring	CBH2041		69	Screw	JFZ14P020FNI
	20	Spring	CBH2042		70	Screw	CBA1451
	21	Spring	CBH2052		71	Washer	CBF1037
	22	Shaft	CLA3232		72	Washer	CBF1060
	23	Frame	CNC7285		73	Spring	CBH2170
	24	Frame	CNC7286		74	Roller	CLA3222
	25	Lever	CNC7288		75	Roller	CNV3412
	26	Lever	CNC7289		76	Arm	CNV5075
	27	Cover	CNC7294		77	Gear Unit	CXB1686
	28	Cover	CNC7304		78	Bracket Unit	CXB2627
	29	Sheet	CNM5401		79		
	30	Sheet	CNM5402		80		
	31	Sheet	CNM5814		81	Washer	YE20FUC
	32	PCB	CNP4854		82	Guide Arm Assy	CXB1688
	33	Belt	CNT1082		83	Photo-transistor(P1-3)	CPT-230S-X
	34	Damper	CNV4984		84	Clamp Arm Assy	CXB3137
	35	Gear	CNV5080		85		
	36	Gear	CNV5081	*	86	Sheet	CNM5398
	37	Gear	CNV5082		87		
	38	Holder	CNV5098		88	Motor(M3)	CXM1129
	39	Guide	CNV5352		89	Washer	YE25FUC
	40	Mechanism FPC Unit	CWX2191		90	Pickup Unit(Service)(P8)	CXX1290
	41	Connector	CKS3767		91	Screw	IMS20P035FMC
*	42	PCB	CNP4852		92	Spring	CBH2206
*	43	Arm	CNC7287		93	Bracket	CNC7977
	44				94	Sheet	CNM6039
	45				95	Sheet	CNM6055
	46				96	CRG Motor Assy(M1)	CXB1670
	47	Bracket	CNC7300		97	Connector(CN702)	CKS2191
	48	Motor Unit	CXB1671				
	49	Screw	JFZ14P020FNI				
	50	Washer	CBF1037				

5. ELECTRICAL PARTS LIST

NOTES:

- Parts whose parts numbers are omitted are subject to being not supplied.
- The part numbers shown below indicate chip components.

Chip Resistor

RS1/OS○○○○J,RS1/○○S○○○○J

Chip Capacitor (except for CQS.....)

CKS....., CCS....., CSZS.....

====Circuit Symbol and No.====Part Name	Part No.	====Circuit Symbol and No.====Part Name	Part No.
B Unit Number : CWE1472(DEX-P1R/UC) Unit Number : CWE1485(DEH-P946/ES,DEX-P1/ES) Unit Name : FM/AM Tuner Unit		RESISTORS	
MISCELLANEOUS		R 1	RS1/16S225J
IC 1 IC	PA4023B	R 2	RS1/16S225J
IC 2 IC	PA4024A	R 4	RS1/16S154J
Q 1 Transistor	2SC2412K	R 5	RS1/16S391J
Q 2 Transistor	DTC124EU	R 6	RS1/16S223J
Q 3 FET	3SK263	R 7	RS1/16S123J
Q 31 Transistor	2SC2412K	R 8	RS1/16S332J
Q 201 FET	2SK932	R 9	RS1/16S473J
Q 202 Transistor	2SC2412K	R 10	RS1/16S223J
Q 203 Transistor	DTC124EU	R 11	RS1/16S124J
D 1 Diode	RD39JS	R 13	RS1/16S563J
D 2 Diode	RD39JS	R 15	RS1/16S271J
D 4 Diode	1SV250	R 16	RS1/16S104J
D 5 Diode	KV1410-F1	R 17	RS1/16S332J
D 6 Diode	MA157	R 18	RS1/16S332J
D 7 Diode	KV1410-F1	R 31	RS1/16S470J
D 8 Diode	KV1410-F1	R 32	RS1/16S822J
D 201 Diode	MA157	R 33	RS1/16S822J
D 202 Diode	MA157	R 34	RS1/16S331J
D 231 Diode	SVC253	R 35	RS1/16S331J
L 2 Coil (DEX-P1R/UC)	CTC1126	R 51	RS1/16S271J
L 2 Coil (DEH-P946/ES,DEX-P1/ES)	CTC1108	R 52	RS1/16S560J
L 3 Inductor	LCTB2R2K2125	R 55	RS1/16S102J
L 4 Coil (DEX-P1R/UC)	CTC1126	R 56	RS1/16S823J
L 4 Coil (DEH-P946/ES,DEX-P1/ES)	CTC1108	R 61	RS1/16S392J
L 5 Coil (DEX-P1R/UC)	CTC1125	R 62	RS1/16S273J
L 5 Coil (DEH-P946/ES,DEX-P1/ES)	CTC1107	R 101	RS1/16S272J
L 6 Inductor (DEH-P946/ES,DEX-P1/ES)	LCTBR15K1608	R 102	RS1/16S682J
L 51 Ferri-Inductor	LAU150K	R 103	RS1/16S333J
L 201 Ferri-Inductor	LAU4R7K	R 104	RS1/16S334J
L 202 Ferri-Inductor	LAU330K	R 105	RS1/16S683J
L 203 Inductor	CTF1287	R 107	RS1/16S222J
L 208 Inductor	LAU121K	R 151	RS1/16S222J
L 231 Inductor	LCTA3R3J3225	R 152	RS1/16S393J
T 31 Coil	CTE1117	R 155	RS1/16S273J
T 51 Coil (DEX-P1R/UC)	CTC1159	R 156	RS1/16S243J
T 51 Coil (DEH-P946/ES,DEX-P1/ES)	CTC1136	R 157	RS1/16S203J
CF 51 Ceramic Filter (DEX-P1R/UC)	CTF1292	R 160	RS1/16S222J
CF 51 Ceramic Filter		R 161	RS1/16S563J
(DEH-P946/ES,DEX-P1/ES)	CTF1290	R 162	RS1/16S105J
CF 52 Ceramic Filter (DEX-P1R/UC)	CTF1292	R 163	RS1/16S223J
CF 52 Ceramic Filter		R 202	RS1/16S225J
(DEH-P946/ES,DEX-P1/ES)	CTF1290	R 203	RS1/16S103J
CF 53 Ceramic Filter (DEX-P1R/UC)	CTF1292	R 204	RS1/16S220J
CF 53 Ceramic Filter		R 206	
(DEH-P946/ES,DEX-P1/ES)	CTF1290	R 207	RS1/16S101J
CF 232 Ceramic Filter	CTF1348	R 208	RS1/16S102J
X 151 Resonator 918.5Hz	CSS1365	R 209	RS1/16S471J
X 231 Crystal Resonator 10.26MHz	CSS1111	R 214	RS1/16S822J
VR 154 Semi-fixed 150kΩ(B)	CCP1213	R 215	RS1/16S822J

====Circuit Symbol and No.==Part Name	Part No.	====Circuit Symbol and No.==Part Name	Part No.
R 217	RS1/16S102J	C 161	CKSQYB104K16
R 231	RS1/16S272J	C 162	CEJA3R3M50
R 232	RS1/16S473J	C 163	CKSRYB102K50
R 237	RS1/16S103J	C 170	CCSRCH100D50
R 238	RS1/16S104J	C 201	CCSRCH471J50
R 239	RS1/16S104J	C 202	CCSRCH100D50
R 240	RS1/16S332J	C 203	CKSRYB332K50
R 241	RS1/16S202J	C 204	CKSQYB473K16
R 243	RS1/16S183J	C 205	CKSQYB473K16
R 244	RS1/16S392J	C 206	CKSQYB104K16
R 247	RS1/16S123J	C 207	CCSRCH560J50
CAPACITORS		C 209	CKSQYB104K16
C 1	CCSQCH6R0D50	C 211	CCSRCH101J50
C 2	CCSRCK2R0C50	C 212	CEJA470M6R3
C 4	CCSRCH820J50	C 213	CKSRYB103K25
C 6	CCSRCH820J50	C 216	CCSRCH101J50
C 8	CKSRYB103K25	C 217	CEJA1R5M50
C 9	CKSQYB104K16	C 219	CCSRCH471J50
C 10	CCSRCKR50C50	C 220	CKSRYB103K25
C 11	CEJA1R0M50	C 230	CKSRYB103K25
C 12	CKSRYB222K50	C 231	CCSRCH330J50
C 13	CKSRYB222K50	C 232	CCSRCH150J50
C 14	CCSRCH220J50	C 233	CKSQYB104K16
C 15	CCSRCH6R0D50	C 234	CEJA330M10
C 16	CCSRCH8R0D50	C 235	CKSRYB332K50
C 17	CKSRYB222K50	C 236	CKSQYB473K16
C 18	CKSRYB103K25	C 237	CCSRCH120J50
C 19	CKSRYB222K50	C 239	CKSRYB472K50
C 20	CKSRYB222K50	C 240	CEJAR47M50
C 21	CEJA100M16	C 241	CKSQYB104K16
C 22	CCSRTH9R0D50	C 242	CEJAR47M50
C 23	CCSRTH120J50	C 243	CEJAR33M50
C 24	CCSRCH471J50	C 244	CKSQYB473K16
C 25	CKSRYB103K25	C 245	CKSRYB333K16
C 26 (DEX-P1R/UC)	CCSRCH101J50	C 246	CKSQYB473K16
C 31	CKSRYB103K25	C 250	CCSRCH471J50
C 32	CKSQYB472K50		
C 33	CCSRCH5R0C50		
C 34	CKSQYB104K16		
C 36	CCSRRH201J50		
C 51	CKSRYB223K25		
C 52	CKSRYB103K25		
C 54	CCSRCH470J50		
C 55	CKSQYB223K25		
C 56	CKSQYB104K16		
C 57	CKSRYB472K50		
C 58	CEJA330M10		
C 59	CKSRYB103K25		
C 60 (DEH-P946/ES,DEX-P1/ES)	CKSRYB102K50		
C 61	CCSRCH270J50		
C 62	CKSRYB103K25		
C 63	CEJAR22M50		
C 101	CEJANP100M10		
C 102	CKSRYB182K50		
C 103	CKSRYB682K25		
C 104	CEJA2R2M50		
C 105	CKSRYB103K25		
C 106	CCSRCH151J50		
C 107	CKSRYB103K25		
C 151	CKSRYB472K50		
C 152	CKSQYB104K16		
C 153	CEJA3R3M50		
C 154	CKSQYB104K16		
C 157	CEJA3R3M50		
C 158	CKSYB474K16		
C 159	CEJA220M6R3		
C 160	CKSQYB104K16		
		Unit Number : CWX2166	
		Unit Name : Control Unit	
		MISCELLANEOUS	
		IC 101 IC	UPC2572GS
		IC 201 IC	UPD63702AGF
		IC 301 IC	BA6797FM
		IC 502 IC	LC89170M
		IC 702 IC	BA05SFP
		IC 801 IC	LB1930M
		Q 101 Transistor	2SD1664
		Q 102 Transistor	UMD2N
		D 701 Diode	1SR154-400
		RESISTORS	
		R 101	RS1/8S100J
		R 102	RS1/8S120J
		R 104	RS1/16S822J
		R 105	RS1/16S682J
		R 106	RS1/16S183J
		R 107	RS1/16S822J
		R 108	RS1/16S333J
		R 109	RS1/16S683J
		R 110	RS1/16S134J
		R 111	RS1/16S273J
		R 112	RS1/16S222J
		R 113	RS1/16S103J
		R 114	RS1/16S103J
		R 115	RS1/16S102J
		R 116	RS1/16S163J

====Circuit Symbol and No.===Part Name	Part No.	====Circuit Symbol and No.===Part Name	Part No.
R 117	RS1/16S163J	C 204	CKSRYB471K50
R 120	RS1/16S101J	C 303	CEVL470M16
R 121	RS1/16S101J	C 305	CKSRYB103K25
R 125	RS1/16S102J	C 306	CKSRYB103K25
R 201	RS1/16S104J	C 309	CKSYB475K10
R 202	RS1/16S473J	C 601	CEV101M6R3
R 206	RS1/16S101J	C 602	CKSQYB104K16
R 207	RS1/16S0R0J	C 701	CEV100M25
R 208	RS1/16S0R0J	C 702	CKSQYB334K16
R 301	RS1/16S303J	C 703	CCH1300
R 302	RS1/16S203J	C 704	CEVL101M6R3
R 303	RS1/16S303J	C 901	CKSRYB221K50
R 304	RS1/16S203J	A Unit Number : CWM5693(DEX-P1R/UC) Unit Name : Tuner Amp Unit	
R 305	RS1/16S103J		
R 306	RS1/16S203J		
R 307	RS1/16S103J	MISCELLANEOUS	
R 308	RS1/16S103J		
R 310	RS1/16S102J	IC 101	IC
R 311	RS1/16S102J	IC 102	IC
R 501	RS1/16S0R0J	IC 171	IC
		IC 401	IC
R 503	RS1/16S0R0J	IC 501	IC
R 701	RS1/16S221J		
R 702	RS1/16S221J	IC 551	IC
R 703	RS1/16S221J	IC 581	IC
R 705	RS1/16S102J	IC 601	IC
		IC 651	IC
		IC 671	IC
R 706	RS1/16S681J		
R 707	RS1/16S681J		
R 708	RS1/16S681J	IC 681	IC
R 709	RS1/16S681J	IC 851	IC
R 711	RS1/16S471J	IC 871	IC
		IC 941	IC
		IC 971	IC
R 712	RS1/16S471J		
R 713	RS1/16S471J		
R 714	RS1/16S102J	Q 101	Transistor
R 717	RS1/16S0R0J	Q 102	Transistor
R 718	RS1/16S102J	Q 131	Transistor
		Q 132	Transistor
R 901	RS1/16S302J	Q 171	Transistor
CAPACITORS			
		Q 172	Transistor
C 101	CEVL101M6R3	Q 231	Transistor
C 102	CKSQYB104K16	Q 232	Transistor
C 103	CEVL470M6R3	Q 233	Transistor
C 104	CKSQYB334K16	Q 251	Transistor
C 105	CCSRCH330J50		
		Q 252	Transistor
		Q 253	Transistor
C 106	CKSRYB103K25	Q 261	Transistor
C 107	CEVL4R7M35	Q 302	Transistor
C 108	CKSRYB273K25	Q 401	Transistor
C 109	CCSRCH101J50		
C 110	CKSQYB104K16	Q 601	Transistor
		Q 602	Transistor
C 111	CKSRYB332K50	Q 651	Transistor
C 112	CKSRYB473K16	Q 681	Transistor
C 113	CKSRYB103K25	Q 682	Transistor
C 114	CKSRYB391K50		
C 115	CCSRCH121J50	Q 683	Transistor
		Q 684	Transistor
C 116	CKSRYB682K25	Q 685	Transistor
C 117	CKSRYB333K16	Q 802	Transistor
C 118	CKSQYB334K16	Q 803	Transistor
C 119	CKSQYB334K16		
C 120	CKSQYB334K16	Q 804	Transistor
		Q 805	Transistor
C 121	CKSQYB334K16	Q 806	Transistor
C 122	CKSQYB104K16	Q 807	Transistor
C 123	CKSRYB472K50	Q 808	Transistor
C 124	CKSQYB104K16		
C 125	CCSRCH6R0D50	Q 810	Transistor
		Q 811	Transistor
C 126	CKSRYB153K25	Q 812	Transistor
C 127	CCSRCH102J25	Q 851	Transistor
C 201	CKSQYB334K16	Q 852	Transistor
C 202	CKSQYB104K16		
C 203	CKSQYB104K16		

====Circuit Symbol and No.==Part Name	Part No.	====Circuit Symbol and No.==Part Name	Part No.
Q 853 Transistor	UN2212	TH 651 Thermistor	CCX1037
Q 871 Transistor	2SB1238	X 401 Crystal Resonator 7.200MHz	CSS1379
Q 872 Transistor	DTC123EK	X 501 Crystal Resonator 4.332MHz	CSS1056
Q 911 Transistor	2SD1760F5	X 601 Resonator 12.58291MHz	CSS1402
Q 913 Transistor	IMD2A	X 651 Resonator 4.19MHz	CSS1436
Q 921 Transistor	2SB1243	S 601 Slide Switch(PRO/STD)	CSH1048
Q 922 Transistor	UN2212	IL 801 Lamp 14V40mA	CEL1359
Q 931 Transistor	2SB1243	High Out Unit	CWX2215
Q 932 Transistor	UN2212	DSP Unit	CWX2213
Q 951 Transistor	UN2211	FM/AM Tuner Unit	CWE1472
Q 952 Transistor	IMX1	BZ 601 Buzzer	CPV1012
Q 961 Transistor	2SA1162	FU 801 IC Protector 0.4A	ICP-N10
Q 971 Transistor	2SC2712		
Q 991 Transistor	IMD2A	RESISTORS	
Q 992 Transistor	2SD2396	R 101	RS1/10S620J
D 131 Diode	MA3039(L)	R 102	RS1/10S101J
D 231 Diode	MA152WA	R 103	RS1/10S101J
D 232 Diode	MA152WA	R 104	RS1/10S222J
D 233 Diode	MA152WA	R 105	RS1/10S103J
D 261 Diode	MA152WK		
D 262 Diode	MA152WK	R 106	RS1/10S102J
D 263 Diode	MA152WK	R 107	RS1/10S102J
D 401 Diode	MA152WK	R 108	RS1/10S473J
D 551 Diode	MA3047(M)	R 109	RS1/10S473J
D 681 Diode	ERA15-02VH	R 110	RS1/10S223J
D 682 Diode	ERA15-02VH	R 111	RS1/10S181J
D 803 Diode	MA3062(M)	R 112	RS1/10S102J
D 804 Diode	DA204K	R 113	RS1/10S102J
D 805 Diode	DA204K	R 114	RS1/10S181J
D 806 Diode	DA204K	R 115	RS1/10S223J
D 807 Diode	DA204K	R 116	RS1/10S332J
D 808 Diode	MA3062(M)	R 117	RS1/10S562J
D 809 Diode	DA204K	R 118	RS1/10S472J
D 810 Diode	ERA15-02VH	R 131	RS1/10S103J
D 851 Diode	MA3075(H)	R 132	RS1/10S223J
D 852 Diode	1SS133	R 133	RS1/10S473J
D 853 Diode	1SS133	R 134	RS1/10S104J
D 871 Diode	MA152WK	R 135	RS1/10S222J
D 901 Diode	ERA15-02VH	R 136	RS1/10S561J
D 902 Diode	ERA15-02VH	R 151	RS1/10S162J
D 911 Diode	HZS6L(B1)	R 152	RS1/10S162J
D 912 Diode	ERA15-02VH	R 153	RS1/10S0R0J
D 921 Diode	ERA15-02VH	R 154	RS1/10S0R0J
D 922 Diode	ERA15-02VH	R 171	RS1/10S393J
D 931 Diode	ERA15-02VH	R 172	RS1/10S393J
D 932 Diode	ERA15-02VH	R 173	RS1/10S752J
D 951 Diode	ERA15-02VH	R 174	RS1/10S752J
D 952 Diode	HZS7L(C3)	R 175	RS1/10S222J
D 953 Diode	HZS7L(A1)	R 176	RS1/10S222J
D 961 Diode	MA152WK	R 177	RS1/10S473J
D 971 Diode	MA152WK	R 178	RS1/10S473J
D 991 Diode	HZS9L(B1)	R 179	RS1/10S513J
L 101 Inductor	LAU3R3K	R 180	RS1/10S513J
L 141 Inductor	CTF1420	R 181	RS1/10S563J
L 221 Inductor	CTF1295	R 182	RS1/10S563J
L 222 Inductor	LCTB2R2K2125	R 184	RS1/10S103J
L 223 Ferri-Inductor	LAU1R0M	R 185	RS1/10S224J
L 401 Ferri-Inductor	LAU2R2K	R 186	RS1/10S102J
L 403 Inductor	LAU2R2K	R 187	RS1/10S102J
L 501 High Loss Inductor	CTF1410	R 189	RS1/10S104J
L 551 Inductor	CTF1295	R 190	RS1/10S104J
L 581 High Loss Inductor	CTF1410	R 201	RS1/10S472J
L 601 High Loss Inductor	CTF1410	R 202	RS1/10S472J
L 602 High Loss Inductor	CTF1410	R 203	RS1/10S472J
L 603 High Loss Inductor	CTF1410	R 204	RS1/10S472J
L 651 High Loss Inductor	CTF1410	R 205	RS1/10S223J
L 652 Inductor	CTF1295	R 206	RS1/10S223J
L 671 Inductor	CTF1295	R 207	RS1/10S331J
L 801 High Loss Inductor	CTF1410	R 208	RS1/10S331J
L 961 Ferri-Inductor	LAU2R2K	R 209	RS1/10S331J

DEX-PIR,DEH-P946,DEX-PI

====Circuit Symbol and No.==Part Name			Part No.	====Circuit Symbol and No.==Part Name			Part No.
R	210		RS1/10S331J	R	603		RS1/10S223J
R	227	(RN1/10SE4702D)	GGC1316	R	604		RS1/10S473J
R	228	(RN1/10SE4702D)	GGC1316	R	605		RS1/10S473J
R	229		RS1/16S102J	R	606		RS1/10S473J
R	231		RS1/10S821J	R	607		RS1/10S473J
R	232		RS1/10S821J	R	608		RS1/10S473J
R	233		RS1/10S821J	R	609		RS1/16S473J
R	234		RS1/10S821J	R	610		RS1/10S102J
R	235		RS1/10S821J	R	611		RS1/10S473J
R	236		RS1/10S821J	R	612		RS1/10S473J
R	237		RS1/10S113J	R	613		RS1/10S681J
R	238		RS1/10S113J	R	614		RS1/10S473J
R	239		RS1/10S113J	R	617		RS1/10S221J
R	240		RS1/10S113J	R	618		RS1/10S221J
R	241		RS1/10S113J	R	619		RS1/10S221J
R	242		RS1/10S113J	R	620		RS1/10S221J
R	251		RS1/8S122J	R	621		RS1/10S221J
R	252		RS1/10S122J	R	622		RS1/10S682J
R	261		RS1/10S223J	R	623		RS1/10S682J
R	262		RS1/10S102J	R	624		RS1/10S682J
R	401		RS1/10S102J	R	625		RS1/10S682J
R	402		RS1/10S103J	R	626		RS1/10S473J
R	403		RS1/10S510J	R	627		RS1/10S393J
R	404		RS1/10S152J	R	629		RS1/16S473J
R	405		RS1/10S472J	R	630		RS1/10S473J
R	406		RS1/10S472J	R	631		RS1/10S102J
R	407		RS1/10S102J	R	632		RS1/10S202J
R	409		RS1/10S472J	R	634		RS1/10S473J
R	410		RS1/10S182J	R	635		RS1/10S473J
R	411		RS1/10S103J	R	636		RA3C681J
R	412		RS1/10S0R0J	R	637		RS1/10S473J
R	413		RS1/10S152J	R	638		RS1/10S473J
R	414		RS1/10S392J	R	639		RS1/10S473J
R	415		RS1/10S392J	R	640		RS1/10S473J
R	416		RS1/10S102J	R	641		RS1/10S473J
R	417		RS1/10S0R0J	R	642		RS1/10S102J
R	418		RS1/10S222J	R	644		RS1/10S473J
R	419		RS1/10S472J	R	645		RS1/10S473J
R	420		RS1/10S562J	R	646		RS1/10S473J
R	421		RS1/10S222J	R	647		RS1/10S473J
R	422		RS1/10S102J	R	649		RS1/10S221J
R	424		RS1/10S222J	R	650		RS1/10S682J
R	455		RS1/10S0R0J	R	655		RS1/10S222J
R	501		RS1/10S681J	R	656		RS1/10S222J
R	503		RS1/10S681J	R	657		RS1/10S473J
R	504		RS1/10S105J	R	658		RS1/10S473J
R	505		RS1/10S102J	R	659	(RN1/10SE9102D)	GGC1317
R	506		RS1/16S681J	R	662		RS1/10S222J
R	507		RS1/10S222J	R	663		RS1/10S473J
R	508		RS1/10S473J	R	664		RS1/10S103J
R	509		RS1/10S473J	R	665	(RN1/10SE2402D)	GGC1318
R	510		RS1/10S681J	R	671		RS1/10S681J
R	511		RS1/10S681J	R	672		RS1/10S102J
R	512		RS1/10S681J	R	673		RS1/10S102J
R	513		RS1/10S681J	R	674		RS1/10S102J
R	514		RS1/10S681J	R	675		RS1/10S681J
R	515		RS1/10S473J	R	676		RS1/10S681J
R	516		RS1/10S473J	R	677		RS1/10S681J
R	517		RS1/10S473J	R	678		RS1/10S681J
R	518		RS1/10S473J	R	681		RS1/8S102J
R	519		RS1/10S473J	R	682		RS1/8S102J
R	520		RS1/10S473J	R	683		RS1/8S102J
R	551		RS1/10S471J	R	684		RS1/10S103J
R	553		RS1/10S102J	R	685		RS1/10S103J
R	554		RS1/10S102J	R	686		RS1/10S103J
R	555		RS1/10S102J	R	687		RS1/10S223J
R	565		RS1/10S0R0J	R	688		RS1/10S223J
R	566		RD1/4PU151J	R	689		RS1/10S223J
R	601		RS1/10S473J	R	690		RS1/10S272J
R	602		RS1/10S473J	R	691		RS1/10S223J

====Circuit Symbol and No.==Part Name	Part No.	====Circuit Symbol and No.==Part Name	Part No.
R 692	RS1/10S272J	CAPACITORS	
R 693	RS1/10S223J		
R 694	RS1/10S272J	C 101	CKSQYB104K16
R 695	RS1/10S473J	C 102	CKSQYB104K16
R 696	RS1/10S473J	C 103	CEJA1R0M50
		C 104	CEJA1R0M50
		C 105	CEJA100M16
R 697	RS1/10S473J		
R 698	RS1/8S331J		
R 700	RS1/10S274J	C 106	CEJA100M16
R 801	RD1/4PU102J	C 107	CEJA1R0M50
R 802	RS1/8S103J	C 108	CEJA1R0M50
		C 109	CKSQYB102K50
		C 131	CKSQYB681K50
R 803	RS1/10S224J		
R 804	RS1/10S222J		
R 805	RD1/4PU102J	C 132	CEJA101M10
R 806	RS1/10S104J	C 141	CCSQCH101J50
R 807	RS1/10S222J	C 151	CKSQYB473K50
		C 152	CKSQYB473K50
		C 171	CEJA1R0M50
R 809	RS1/10S1R0J		
R 810	RS1/10S103J		
R 811	RS1/10S104J	C 172	CEJA1R0M50
R 815	RS1/10S222J	C 173	CEV4R7M25
R 816	RS1/8S222J	C 174	CEV4R7M25
		C 175	CCSQCH820J50
		C 176	CCSQCH820J50
R 817	RS1/10S222J		
R 818	RS1/8S222J		
R 819	RS1/8S103J	C 177	CCSQCH390J50
R 820	RS2PMF330J	C 178	CCSQCH390J50
R 821	RS1/8S472J	C 179	CCSQCH390J50
		C 180	CCSQCH390J50
		C 182	CEJA1R0M50
R 830	RS1/10S102J		
R 851	RD1/4PU561J		
R 852	RS1/10S102J	C 183	CEJA220M6R3
R 853	RS1/10S102J	C 184	CEJA101M10
R 854	RS1/10S102J	C 185	CEJA100M16
		C 186	CKSQYB223K50
		C 201	CEJA4R7M35
R 855	RS1/10S102J		
R 856	RS1/10S473J		
R 857	RS1/10S473J	C 202	CEJA4R7M35
R 859	RS1/10S0R0J	C 203	CEJA100M16
R 871	RS1/10S102J	C 204	CEJA100M16
		C 205	CKSQYB104K16
		C 206	CKSQYB104K16
R 872	RD1/4PU102J		
R 873	RS1/10S473J		
R 911	RS1/8S0R0J	C 207	CEJA100M16
R 912	RS1/10S392J	C 208	CEJA100M16
R 913	RS1/10S752J	C 217	CCSQCH221J50
		C 218	CCSQCH101J50
		C 227	CKSQYB103K50
R 921	RS1/10S472J		
R 922	RD1/4PU221J		
R 923	RD1/4PU221J	C 229	CEJANP100M10
R 931	RS1/10S472J	C 230	CKSYB475K10
R 932	RD1/4PU221J	C 231	CEZA4R7M25
		C 232	CEZA4R7M25
		C 233	CEZA4R7M25
R 933	RD1/4PU221J		
R 941	RS1/10S102J		
R 942	RS1/10S102J	C 234	CEZA4R7M25
R 943	RS1/10S472J	C 235	CEZA100M16
R 951	RS1/10S103J	C 236	CEZA100M16
		C 237	CCSQCH221J50
		C 238	CCSQCH221J50
R 952	RS1/10S103J		
R 953	RS1/10S473J		
R 954	RS1/10S472J	C 239	CCSQCH221J50
R 955	RS1/10S473J	C 240	CCSQCH221J50
R 956	RS1/10S103J	C 241	CCSQCH221J50
		C 242	CCSQCH221J50
		C 307	CKSQYB104K16
R 961	RS1/8S153J		
R 962	RS1/10S472J		
R 963	RS1/10S472J	C 308	CCH1125
R 964	RS1/10S102J	C 351	CCSQCH221J50
R 971	RS1/10S822J	C 352	CCSQCH101J50
		C 353	CKSYB475K10
		C 401	CKSQYB103K50
R 973	RS1/10S102J		
R 974	RS1/10S473J		
R 975	RS1/10S472J	C 402	CKSQYB103K50
R 991	RD1/4PU221J	C 403	CKSQYB103K50
R 992	RS1/10S221J	C 404	CKSQYB103K50
		C 405	CEV220M10
R 993	RS1/10S472J	C 406	CKSQYB103K50
R 994	RS1/10S222J		

====Circuit Symbol and No.==Part Name	Part No.	====Circuit Symbol and No.==Part Name	Part No.
C 407	CEV220M10	C 853	CKSQYB102K50
C 408	CKSQYB103K50	C 854	CCSQCH101J50
C 409	CKSQYB103K50	C 855	CCSQCH101J50
C 410	CEV220M6R3	C 856	CKSQYB102K50
C 411	CKSQYB103K50	C 871	470μF/16V CCH1183
C 412	CKSQYB154K16	C 872	CEZA100M16
C 414	CKSQYB103K50	C 873	CKSQYB103K50
C 416	CKLSR473K16	C 874	CKSQYB102K50
C 417	4.7μF/16V CCH1250	C 876	CASA4R7M10
C 418	CKSQYB103K50	C 911	1500μF/16V CCH1312
C 420	CCSQCH150J50	C 912	CKSQYB472K50
C 421	CCSQCH150J50	C 913	CKSQYB103K50
C 422	CKSQYB103K50	C 914	CASA470M10
C 423	CKSQYB103K50	C 921	CKSQYB103K50
C 424	CCSQCH101J50	C 941	CKSQYB102K50
C 425	CKSQYB473K16	C 942	330μF/10V CCH1181
C 426	CEV220M6R3	C 943	CEZA470M25
C 427	CKSQYB103K50	C 944	CEJA1R0M50
C 428	CKSQYB103K50	C 945	CEJA101M10
C 430	CKSQYB103K50	C 946	CEJA470M10
C 433	CKSQYB103K50	C 947	CKSQYB102K50
C 434	CKSQYB223K50	C 951	CKSQYB105K10
C 435	CKSQYB223K50	C 952	CCSQCH101J50
C 501	CEJA100M16	C 971	CEJA2R2M50
C 502	CKSQYB103K50	C 972	CKSQYB102K50
C 503	CCSQCH270J50	C 973	CKSQYB104K16
C 504	CCSQCH270J50	C 991	CKSQYB473K16
C 505	CKSYB475K10	C 992	CKSQYB102K50
C 506	CCSQCH101J50	C 993	CEJA101M10
C 553	CKSQYB102K50		
C 556	CKSQYB472K50		
C 557	CKSQYB104K16		
C 558	CKSQYB105K10		
C 561	CCSQCH101J50		
C 562	CEJA100M16		
C 581	CEJA100M16		
C 582	CKSQYB102K50		
C 601	CCSQCH200J50		
C 602	CCSQCH200J50		
C 603	CCSQCH101J50		
C 604	CEJA101M10		
C 605	CKSQYB103K50		
C 606	CCSQCH101J50		
C 607	CCSQCH101J50		
C 608	CCSQCH101J50		
C 609	CEJA100M16		
C 610	CKSQYB104K16		
C 615	CCSQCH101J50		
C 617	CCSQCH101J50		
C 618	CCSQCH101J50		
C 619	CCSQCH101J50		
C 620	CCSRCH101J50		
C 651	CKSYB475K10		
C 653	CKSQYB102K50		
C 654	CKSQYB104K16		
C 671	CKSQYB103K50		
C 672	CEZA100M16		
C 681	CKSQYB473K16		
C 682	CKSQYB473K16		
C 683	CKSQYB103K50		
C 684	CKSQYB103K50		
C 685	CKSQYB103K50		
C 686	CKSQYB473K16		
C 803	CKSQYB103K50		
C 806	CKSYB475K10		
C 807	CCSQCH101J50		
C 808	CEJA101M16		
C 809	CCSQCH101J50		
C 851	CKSQYB103K50		
C 852	CKSYB475K10		

A Unit Number : CWM5697(DEH-P946/ES)
Unit Name : Tuner Amp Unit

MISCELLANEOUS

IC 101	IC	CA0008AM
IC 102	IC	TA2050S
IC 171	IC	BA3131FS
IC 301	IC	TDA7386
IC 401	IC	PM2006A
IC 601	IC	PD4906A
IC 651	IC	PD4931A
IC 671	IC	PD0236AM
IC 851	IC	BA6288FS
IC 871	IC	NJM78M05FA
IC 941	IC	PA2024A
IC 971	IC	S-80730ANDT
Q 101	Transistor	2SA1162
Q 102	Transistor	UN2212
Q 131	Transistor	2SC2712
Q 132	Transistor	IMD2A
Q 171	Transistor	DTC314TK
Q 172	Transistor	DTC314TK
Q 231	Transistor	FMG13
Q 232	Transistor	FMG13
Q 233	Transistor	FMG13
Q 261	Transistor	IMD2A
Q 301	Transistor	UN2212
Q 302	Transistor	UN2212
Q 401	Transistor	2SC2712
Q 601	Transistor	UN2111
Q 602	Transistor	UN2211
Q 651	Transistor	UN2112
Q 681	Transistor	2SA1162
Q 682	Transistor	UN2212
Q 683	Transistor	2SC2712
Q 684	Transistor	2SC2712
Q 685	Transistor	2SC2712
Q 802	Transistor	2SC2712
Q 803	Transistor	UN2211

====Circuit Symbol and No.==Part Name	Part No.	====Circuit Symbol and No.==Part Name	Part No.
Q 804 Transistor	2SD1760F5	L 652 Inductor	CTF1295
Q 805 Transistor	UN2111	L 671 Inductor	CTF1295
Q 806 Transistor	2SB1238	L 801 High Loss Inductor	CTF1410
Q 807 Transistor	2SB1238	L 961 Ferri-Inductor	LAU2R2K
Q 808 Transistor	DTC143EK	TH 651 Thermistor	CCX1037
Q 810 Transistor	2SC2712	X 401 Crystal Resonator 7.200MHz	CSS1379
Q 811 Transistor	2SC2712	X 601 Resonator 12.58291MHz	CSS1402
Q 812 Transistor	DTA144EK	X 651 Resonator 4.19MHz	CSS1436
Q 851 Transistor	2SD1760F5	S 601 Slide Switch(PRO/STD)	CSH1048
Q 852 Transistor	UN2111	IL 801 Lamp 14V40mA	CEL1359
Q 853 Transistor	UN2212		DSP Unit
Q 871 Transistor	2SB1238		FM/AM Tuner Unit
Q 872 Transistor	DTC123EK	BZ 601 Buzzer	CWV2213
Q 911 Transistor	2SD1760F5	FU 801 IC Protector 0.4A	CWE1485
Q 913 Transistor	IMD2A		CPV1012
			ICP-N10
Q 921 Transistor	2SB1243	RESISTORS	
Q 922 Transistor	UN2212	R 101	RS1/10S620J
Q 931 Transistor	2SB1243	R 102	RS1/10S101J
Q 932 Transistor	UN2212	R 103	RS1/10S101J
Q 951 Transistor	UN2211	R 104	RS1/10S222J
		R 105	RS1/10S103J
Q 952 Transistor	IMX1		
Q 961 Transistor	2SA1162	R 106	RS1/10S102J
Q 971 Transistor	2SC2712	R 107	RS1/10S102J
Q 991 Transistor	IMD2A	R 108	RS1/10S473J
Q 992 Transistor	2SD2396	R 109	RS1/10S473J
		R 110	RS1/10S223J
D 131 Diode	MA3039(L)		
D 231 Diode	MA152WA	R 111	RS1/10S181J
D 232 Diode	MA152WA	R 112	RS1/10S102J
D 233 Diode	MA152WA	R 113	RS1/10S102J
D 261 Diode	MA152WK	R 114	RS1/10S181J
		R 115	RS1/10S223J
D 262 Diode	MA152WK		
D 263 Diode	MA152WK	R 116	RS1/10S332J
D 401 Diode	MA152WK	R 117	RS1/10S562J
D 803 Diode	MA3062(M)	R 118	RS1/10S472J
D 804 Diode	DA204K	R 131	RS1/10S103J
		R 132	RS1/10S223J
D 805 Diode	DA204K		
D 806 Diode	DA204K	R 133	RS1/10S473J
D 807 Diode	DA204K	R 134	RS1/10S104J
D 808 Diode	MA3062(M)	R 135	RS1/10S222J
D 809 Diode	DA204K	R 136	RS1/10S561J
		R 151	RS1/10S162J
D 810 Diode	ERA15-02VH		
D 851 Diode	MA3075(H)	R 152	RS1/10S162J
D 852 Diode	1SS133	R 153	RS1/10S0R0J
D 853 Diode	1SS133	R 154	RS1/10S0R0J
D 871 Diode	MA152WK	R 171	RS1/10S393J
		R 172	RS1/10S393J
D 901 Diode	ERA15-02VH		
D 902 Diode	ERA15-02VH	R 173	RS1/10S752J
D 911 Diode	HZS6L(B1)	R 174	RS1/10S752J
D 912 Diode	ERA15-02VH	R 175	RS1/10S222J
D 921 Diode	ERA15-02VH	R 176	RS1/10S222J
		R 177	RS1/10S473J
D 922 Diode	ERA15-02VH		
D 931 Diode	ERA15-02VH	R 178	RS1/10S473J
D 932 Diode	ERA15-02VH	R 179	RS1/10S513J
D 951 Diode	ERA15-02VH	R 180	RS1/10S513J
D 952 Diode	HZS7L(C3)	R 181	RS1/10S563J
		R 182	RS1/10S563J
D 953 Diode	HZS7L(A1)		
D 961 Diode	MA152WK	R 184	RS1/10S103J
D 971 Diode	MA152WK	R 185	RS1/10S224J
D 991 Diode	HZS9L(B1)	R 186	RS1/10S102J
L 101 Inductor	LAU3R3K	R 187	RS1/10S102J
		R 189	RS1/10S104J
L 141 Inductor	CTF1420		
L 221 Inductor	CTF1295	R 190	RS1/10S104J
L 222 Inductor	LCTB2R2K2125	R 201	RS1/10S472J
L 223 Ferri-Inductor	LAU1R0M	R 202	RS1/10S472J
L 401 Ferri-Inductor	LAU2R2K	R 203	RS1/10S472J
		R 204	RS1/10S472J
L 403 Inductor	LAU2R2K		
L 601 High Loss Inductor	CTF1410	R 205	RS1/10S223J
L 602 High Loss Inductor	CTF1410	R 206	RS1/10S223J
L 603 High Loss Inductor	CTF1410	R 207	RS1/10S331J
L 651 High Loss Inductor	CTF1410	R 208	RS1/10S331J
		R 209	RS1/10S331J

DEX-PIR,DEH-P946,DEX-PI

====Circuit Symbol and No.==Part Name	Part No.	====Circuit Symbol and No.==Part Name	Part No.
R 210	RS1/10S331J	R 635	RS1/10S473J
R 227 (RN1/10SE4702D)	GGC1316	R 636	RA3C681J
R 228 (RN1/10SE4702D)	GGC1316	R 637	RS1/10S473J
R 229	RS1/16S102J	R 638	RS1/10S473J
R 231	RS1/10S821J	R 640	RS1/10S473J
R 232	RS1/10S821J	R 641	RS1/10S473J
R 233	RS1/10S821J	R 642	RS1/10S102J
R 234	RS1/10S821J	R 644	RS1/10S473J
R 235	RS1/10S821J	R 645	RS1/10S473J
R 236	RS1/10S821J	R 646	RS1/10S473J
R 237	RS1/10S223J	R 647	RS1/10S473J
R 238	RS1/10S223J	R 648	RS1/10S473J
R 239	RS1/10S223J	R 649	RS1/10S221J
R 240	RS1/10S223J	R 650	RS1/10S682J
R 241	RS1/10S223J	R 655	RS1/10S222J
R 242	RS1/10S223J	R 656	RS1/10S222J
R 261	RS1/10S223J	R 657	RS1/10S473J
R 262	RS1/10S102J	R 658	RS1/10S473J
R 301	RS1/10S103J	R 659 (RN1/10SE9102D)	GGC1317
R 302	RS1/10S331J	R 662	RS1/10S222J
R 303	RS1/10S103J	R 663	RS1/10S473J
R 304	RS1/10S103J	R 664	RS1/10S103J
R 401	RS1/10S102J	R 665 (RN1/10SE2402D)	GGC1318
R 402	RS1/10S103J	R 671	RS1/10S681J
R 403	RS1/10S510J	R 672	RS1/10S102J
R 404	RS1/10S152J	R 673	RS1/10S102J
R 405	RS1/10S472J	R 674	RS1/10S102J
R 406	RS1/10S472J	R 675	RS1/10S681J
R 407	RS1/10S102J	R 676	RS1/10S681J
R 409	RS1/10S472J	R 677	RS1/10S681J
R 410	RS1/10S182J	R 678	RS1/10S681J
R 411	RS1/10S103J	R 681	RS1/8S102J
R 412	RS1/10S0R0J	R 682	RS1/8S102J
R 413	RS1/10S152J	R 683	RS1/8S102J
R 414	RS1/10S392J	R 685	RS1/10S103J
R 415	RS1/10S392J	R 686	RS1/10S103J
R 416	RS1/10S102J	R 687	RS1/10S223J
R 418	RS1/10S222J	R 688	RS1/10S223J
R 419	RS1/10S222J	R 689	RS1/10S223J
R 420	RS1/10S562J	R 690	RS1/10S272J
R 421	RS1/10S222J	R 691	RS1/10S223J
R 422	RS1/10S102J	R 692	RS1/10S272J
R 424	RS1/10S222J	R 693	RS1/10S223J
R 430	RS1/10S182J	R 694	RS1/10S272J
R 455	RS1/10S0R0J	R 695	RS1/10S473J
R 601	RS1/10S473J	R 696	RS1/10S473J
R 602	RS1/10S473J	R 697	RS1/10S473J
R 603	RS1/10S223J	R 698	RS1/8S331J
R 607	RS1/10S473J	R 700	RS1/10S274J
R 610	RS1/10S102J	R 801	RD1/4PU102J
R 611	RS1/10S473J	R 802	RS1/8S103J
R 612	RS1/10S473J	R 803	RS1/10S224J
R 613	RS1/10S681J	R 804	RS1/10S222J
R 614	RS1/10S473J	R 805	RD1/4PU102J
R 617	RS1/10S221J	R 806	RS1/10S104J
R 618	RS1/10S221J	R 807	RS1/10S222J
R 619	RS1/10S221J	R 809	RS1/10S1R0J
R 620	RS1/10S221J	R 810	RS1/10S103J
R 621	RS1/10S221J	R 811	RS1/10S104J
R 622	RS1/10S682J	R 815	RS1/10S222J
R 623	RS1/10S682J	R 816	RS1/8S222J
R 624	RS1/10S682J	R 817	RS1/10S222J
R 625	RS1/10S682J	R 818	RS1/8S222J
R 626	RS1/10S473J	R 819	RS1/8S103J
R 627	RS1/10S393J	R 820	RS2PMF330J
R 628	RS1/16S473J	R 821	RS1/8S472J
R 630	RS1/10S473J	R 830	RS1/10S102J
R 631	RS1/10S102J	R 851	RD1/4PU561J
R 632	RS1/10S202J	R 852	RS1/10S102J
R 634	RS1/10S473J	R 853	RS1/10S102J

====Circuit Symbol and No.==Part Name	Part No.	====Circuit Symbol and No.==Part Name	Part No.
R 854	RS1/10S102J	C 202	CEJA4R7M35
R 855	RS1/10S102J	C 203	CEJA100M16
R 856	RS1/10S473J	C 204	CEJA100M16
R 857	RS1/10S473J	C 205	CKSQYB104K16
R 859	RS1/10S0R0J	C 206	CKSQYB104K16
R 871	RS1/10S102J	C 207	CEJA100M16
R 872	RD1/4PU102J	C 208	CEJA100M16
R 873	RS1/10S473J	C 217	CCSQCH221J50
R 911	RS1/8S0R0J	C 218	CCSQCH101J50
R 912	RS1/10S392J	C 227	CKSQYB103K50
R 913	RS1/10S752J	C 229	CEJANP100M10
R 921	RS1/10S472J	C 230	CKSYB475K10
R 922	RD1/4PU221J	C 231	CEJA4R7M35
R 923	RD1/4PU221J	C 232	CEJA4R7M35
R 931	RS1/10S472J	C 233	CEJA4R7M35
R 932	RD1/4PU221J	C 234	CEJA4R7M35
R 933	RD1/4PU221J	C 235	CEJA100M16
R 941	RS1/10S102J	C 236	CEJA100M16
R 942	RS1/10S102J	C 237	CCSQCH221J50
R 943	RS1/10S472J	C 238	CCSQCH221J50
R 951	RS1/10S103J	C 239	CCSQCH221J50
R 952	RS1/10S103J	C 240	CCSQCH221J50
R 953	RS1/10S473J	C 241	CCSQCH221J50
R 954	RS1/10S472J	C 242	CCSQCH221J50
R 955	RS1/10S473J	C 301	CKSYB224K16
R 956	RS1/10S103J	C 302	CKSYB224K16
R 961	RS1/8S153J	C 303	CKSYB224K16
R 962	RS1/10S472J	C 304	CKSYB224K16
R 963	RS1/10S472J	C 305	CKSYB105K16
R 964	RS1/10S102J	C 306	CEHAR100M16
R 971	RS1/10S822J	C 308	3300μF/16V CCH1125
R 973	RS1/10S102J	C 309	CEHAR010M50
R 974	RS1/10S473J	C 310	CEHAR330M10
R 975	RS1/10S472J	C 351	CCSQCH221J50
R 991	RD1/4PU221J	C 352	CCSQCH101J50
R 992	RS1/10S221J	C 353	CKSYB475K10
R 993	RS1/10S472J	C 401	CKSQYB103K50
R 994	RS1/10S222J	C 402	CKSQYB103K50
		C 403	CKSQYB103K50
		C 404	CKSQYB103K50
CAPACITORS			
C 101	CKSQYB104K16	C 405	CEV220M10
C 102	CKSQYB104K16	C 406	CKSQYB103K50
C 103	CEJA1R0M50	C 407	CEV220M10
C 104	CEJA1R0M50	C 408	CKSQYB103K50
C 105	CEJA100M16	C 409	CKSQYB103K50
C 106	CEJA100M16	C 410	CEV220M6R3
C 107	CEJA1R0M50	C 411	CKSQYB103K50
C 108	CEJA1R0M50	C 412	CKSQYB154K16
C 109	CKSQYB102K50	C 414	CKSQYB103K50
C 131	CKSQYB681K50	C 416	CKLSR473K16
C 132	CEJA101M10	C 417	4.7μF/16V CCH1250
C 141	CCSQCH101J50	C 418	CKSQYB103K50
C 151	CKSQYB473K50	C 420	CCSQCH150J50
C 152	CKSQYB473K50	C 421	CCSQCH150J50
C 171	CEJA1R0M50	C 422	CKSQYB103K50
C 172	CEJA1R0M50	C 423	CKSQYB103K50
C 173	CEV4R7M25	C 424	CCSQCH101J50
C 174	CEV4R7M25	C 425	CKSQYB473K16
C 175	CCSQCH820J50	C 426	CEV220M6R3
C 176	CCSQCH820J50	C 427	CKSQYB103K50
C 177	CCSQCH390J50	C 428	CKSQYB103K50
C 178	CCSQCH390J50	C 430	CKSQYB103K50
C 179	CCSQCH390J50	C 432	CKSQYB103K50
C 180	CCSQCH390J50	C 433	CKSQYB103K50
C 182	CEJA1R0M50	C 434	CKSQYB223K50
C 183	CEJA220M6R3	C 435	CKSQYB223K50
C 184	CEJA101M10	C 601	CCSQCH200J50
C 185	CEJA100M16	C 602	CCSQCH200J50
C 186	CKSQYB223K50	C 603	CCSQCH101J50
C 201	CEJA4R7M35	C 604	CEJA101M10

DEX-P1R,DEH-P946,DEX-P1

====Circuit Symbol and No.==Part Name			Part No.	====Circuit Symbol and No.==Part Name			Part No.
C	605		CKSQYB103K50	IC	971	IC	S-80730ANDT
C	606		CCSQCH101J50	Q	101	Transistor	2SA1162
C	607		CCSQCH101J50	Q	102	Transistor	UN2212
C	608		CCSQCH101J50	Q	131	Transistor	2SC2712
C	609		CEJA100M16	Q	132	Transistor	IMD2A
C	610		CKSQYB104K16	Q	171	Transistor	DTC314TK
C	615		CCSQCH101J50	Q	172	Transistor	DTC314TK
C	617		CCSQCH101J50	Q	231	Transistor	FMG13
C	618		CCSQCH101J50	Q	232	Transistor	FMG13
C	619		CCSQCH101J50	Q	233	Transistor	FMG13
C	620		CCSRCH101J50	Q	251	Transistor	DTA143EK
C	651		CKSYB475K10	Q	252	Transistor	UN2211
C	653		CKSQYB102K50	Q	253	Transistor	IMD2A
C	654		CKSQYB104K16	Q	261	Transistor	IMD2A
C	671		CKSQYB103K50	Q	401	Transistor	2SC2712
C	672		CEJA100M16	Q	601	Transistor	UN2111
C	683		CKSQYB103K50	Q	602	Transistor	UN2211
C	684		CKSQYB103K50	Q	651	Transistor	UN2112
C	685		CKSQYB103K50	Q	681	Transistor	2SA1162
C	686		CKSQYB473K16	Q	682	Transistor	UN2212
C	803		CKSQYB103K50	Q	683	Transistor	2SC2712
C	806		CKSYB475K10	Q	684	Transistor	2SC2712
C	807		CCSQCH101J50	Q	685	Transistor	2SC2712
C	808		CEJA101M16	Q	802	Transistor	2SC2712
C	809		CCSQCH101J50	Q	803	Transistor	UN2211
C	851		CKSQYB103K50	Q	804	Transistor	2SD1760F5
C	852		CKSYB475K10	Q	805	Transistor	UN2111
C	853		CKSQYB102K50	Q	806	Transistor	2SB1238
C	854		CCSQCH101J50	Q	807	Transistor	2SB1238
C	855		CCSQCH101J50	Q	808	Transistor	DTC143EK
C	856		CKSQYB102K50	Q	810	Transistor	2SC2712
C	871	470μF/16V	CCH1183	Q	811	Transistor	2SC2712
C	872		CEJA100M16	Q	812	Transistor	DTA144EK
C	873		CKSQYB103K50	Q	851	Transistor	2SD1760F5
C	874		CKSQYB102K50	Q	852	Transistor	UN2111
C	876		CASA4R7M10	Q	853	Transistor	UN2212
C	911	1500μF/16V	CCH1312	Q	871	Transistor	2SB1238
C	912		CKSQYB472K50	Q	872	Transistor	DTC123EK
C	913		CKSQYB103K50	Q	911	Transistor	2SD1760F5
C	914		CASA470M10	Q	913	Transistor	IMD2A
C	921		CKSQYB103K50	Q	921	Transistor	2SB1243
C	941		CKSQYB102K50	Q	922	Transistor	UN2212
C	942	330μF/10V	CCH1181	Q	931	Transistor	2SB1243
C	943		CEJA470M10	Q	932	Transistor	UN2212
C	944		CEJA1R0M50	Q	951	Transistor	UN2211
C	945		CEJA101M10	Q	952	Transistor	IMX1
C	946		CEJA470M10	Q	961	Transistor	2SA1162
C	947		CKSQYB102K50	Q	971	Transistor	2SC2712
C	951		CKSQYB105K10	Q	991	Transistor	IMD2A
C	952		CCSQCH101J50	Q	992	Transistor	2SD2396
C	971		CEJA2R2M50	D	131	Diode	MA3039(L)
C	972		CKSQYB102K50	D	231	Diode	MA152WA
C	973		CKSQYB104K16	D	232	Diode	MA152WA
C	991		CKSQYB473K16	D	233	Diode	MA152WA
C	992		CKSQYB102K50	D	261	Diode	MA152WK
C	993		CEJA101M10	D	262	Diode	MA152WK
				D	263	Diode	MA152WK
				D	401	Diode	MA152WK
				D	803	Diode	MA3062(M)
				D	804	Diode	DA204K
				D	805	Diode	DA204K
				D	806	Diode	DA204K
				D	807	Diode	DA204K
				D	808	Diode	MA3062(M)
				D	809	Diode	DA204K
				D	810	Diode	ERA15-02VH
				D	851	Diode	MA3075(H)
				D	852	Diode	1SS133
				D	853	Diode	1SS133
				D	871	Diode	MA152WK

A Unit Number : CWM5699(DEX-P1/ES)
Unit Name : Tuner Amp Unit

MISCELLANEOUS

IC	101	IC	CA0008AM
IC	102	IC	TA2050S
IC	171	IC	BA3131FS
IC	401	IC	PM2006A
IC	601	IC	PD4906A
IC	651	IC	PD4931A
IC	671	IC	PD0236AM
IC	851	IC	BA6288FS
IC	871	IC	NJM78M05FA
IC	941	IC	PA2024A

====Circuit Symbol and No.==Part Name			Part No.	====Circuit Symbol and No.==Part Name			Part No.
D	901	Diode	ERA15-02VH	R	173		RS1/10S752J
D	902	Diode	ERA15-02VH	R	174		RS1/10S752J
D	911	Diode	HZS6L(B1)	R	175		RS1/10S222J
D	912	Diode	ERA15-02VH	R	176		RS1/10S222J
D	921	Diode	ERA15-02VH	R	177		RS1/10S473J
D	922	Diode	ERA15-02VH	R	178		RS1/10S473J
D	931	Diode	ERA15-02VH	R	179		RS1/10S513J
D	932	Diode	ERA15-02VH	R	180		RS1/10S513J
D	951	Diode	ERA15-02VH	R	181		RS1/10S563J
D	952	Diode	HZS7L(C3)	R	182		RS1/10S563J
D	953	Diode	HZS7L(A1)	R	184		RS1/10S103J
D	961	Diode	MA152WK	R	185		RS1/10S224J
D	971	Diode	MA152WK	R	186		RS1/10S102J
D	991	Diode	HZS9L(B1)	R	187		RS1/10S102J
L	101	Inductor	LAU3R3K	R	189		RS1/10S104J
L	141	Inductor	CTF1420	R	190		RS1/10S104J
L	221	Inductor	CTF1295	R	201		RS1/10S472J
L	222	Inductor	LCTB2R2K2125	R	202		RS1/10S472J
L	223	Ferri-Inductor	LAU1R0M	R	203		RS1/10S472J
L	401	Ferri-Inductor	LAU2R2K	R	204		RS1/10S472J
L	403	Inductor	LAU2R2K	R	205		RS1/10S223J
L	601	High Loss Inductor	CTF1410	R	206		RS1/10S223J
L	602	High Loss Inductor	CTF1410	R	207		RS1/10S331J
L	603	High Loss Inductor	CTF1410	R	208		RS1/10S331J
L	651	High Loss Inductor	CTF1410	R	209		RS1/10S331J
L	652	Inductor	CTF1295	R	210		RS1/10S331J
L	671	Inductor	CTF1295	R	227	(RN1/10SE4702D)	GGC1316
L	801	High Loss Inductor	CTF1410	R	228	(RN1/10SE4702D)	GGC1316
L	961	Ferri-Inductor	LAU2R2K	R	229		RS1/16S102J
TH	651	Thermistor	CCX1037	R	231		RS1/10S821J
X	401	Crystal Resonator 7.200MHz	CSS1379	R	232		RS1/10S821J
X	601	Resonator 12.58291MHz	CSS1402	R	233		RS1/10S821J
X	651	Resonator 4.19MHz	CSS1436	R	234		RS1/10S821J
S	601	Slide Switch(PRO/STD)	CSH1048	R	235		RS1/10S821J
IL	801	Lamp 14V40mA	CEL1359	R	236		RS1/10S821J
		High Out Unit	CWX2215	R	237		RS1/10S113J
		DSP Unit	CWX2213	R	238		RS1/10S113J
		FM/AM Tuner Unit	CWE1485	R	239		RS1/10S113J
BZ	601	Buzzer	CPV1012	R	240		RS1/10S113J
FU	801	IC Protector 0.4A	ICP-N10	R	241		RS1/10S113J
RESISTORS				R	242		RS1/10S113J
R	101		RS1/10S620J	R	251		RS1/8S122J
R	102		RS1/10S101J	R	252		RS1/10S122J
R	103		RS1/10S101J	R	261		RS1/10S223J
R	104		RS1/10S222J	R	262		RS1/10S102J
R	105		RS1/10S103J	R	401		RS1/10S102J
R	106		RS1/10S102J	R	402		RS1/10S103J
R	107		RS1/10S102J	R	403		RS1/10S510J
R	108		RS1/10S473J	R	404		RS1/10S152J
R	109		RS1/10S473J	R	405		RS1/10S472J
R	110		RS1/10S223J	R	406		RS1/10S472J
R	111		RS1/10S181J	R	407		RS1/10S102J
R	112		RS1/10S102J	R	409		RS1/10S472J
R	113		RS1/10S102J	R	410		RS1/10S182J
R	114		RS1/10S181J	R	411		RS1/10S103J
R	115		RS1/10S223J	R	412		RS1/10S0R0J
R	116		RS1/10S332J	R	413		RS1/10S152J
R	117		RS1/10S562J	R	414		RS1/10S392J
R	118		RS1/10S472J	R	415		RS1/10S392J
R	131		RS1/10S103J	R	416		RS1/10S102J
R	132		RS1/10S223J	R	418		RS1/10S222J
R	133		RS1/10S473J	R	419		RS1/10S222J
R	134		RS1/10S104J	R	420		RS1/10S562J
R	135		RS1/10S222J	R	421		RS1/10S222J
R	136		RS1/10S561J	R	422		RS1/10S102J
R	151		RS1/10S162J	R	424		RS1/10S222J
R	152		RS1/10S162J	R	430		RS1/10S182J
R	153		RS1/10S0R0J	R	455		RS1/10S0R0J
R	154		RS1/10S0R0J	R	601		RS1/10S473J
R	171		RS1/10S393J	R	602		RS1/10S473J
R	172		RS1/10S393J				

====Circuit Symbol and No.==Part Name	Part No.	====Circuit Symbol and No.==Part Name	Part No.
R 603	RS1/10S223J	R 698	RS1/8S331J
R 607	RS1/10S473J	R 700	RS1/10S274J
R 610	RS1/10S102J	R 801	RD1/4PU102J
R 611	RS1/10S473J	R 802	RS1/8S103J
R 612	RS1/10S473J	R 803	RS1/10S224J
R 613	RS1/10S681J	R 804	RS1/10S222J
R 614	RS1/10S473J	R 805	RD1/4PU102J
R 617	RS1/10S221J	R 806	RS1/10S104J
R 618	RS1/10S221J	R 807	RS1/10S222J
R 619	RS1/10S221J	R 809	RS1/10S1R0J
R 620	RS1/10S221J	R 810	RS1/10S103J
R 621	RS1/10S221J	R 811	RS1/10S104J
R 622	RS1/10S682J	R 815	RS1/10S222J
R 623	RS1/10S682J	R 816	RS1/8S222J
R 624	RS1/10S682J	R 817	RS1/10S222J
R 625	RS1/10S682J	R 818	RS1/8S222J
R 626	RS1/10S473J	R 819	RS1/8S103J
R 627	RS1/10S393J	R 820	RS2PMF330J
R 629	RS1/16S473J	R 821	RS1/8S472J
R 630	RS1/10S473J	R 830	RS1/10S102J
R 631	RS1/10S102J	R 851	RD1/4PU561J
R 632	RS1/10S202J	R 852	RS1/10S102J
R 634	RS1/10S473J	R 853	RS1/10S102J
R 635	RS1/10S473J	R 854	RS1/10S102J
R 636	RA3C681J	R 855	RS1/10S102J
R 637	RS1/10S473J	R 856	RS1/10S473J
R 638	RS1/10S473J	R 857	RS1/10S473J
R 640	RS1/10S473J	R 859	RS1/10S0R0J
R 641	RS1/10S473J	R 871	RS1/10S102J
R 642	RS1/10S102J	R 872	RD1/4PU102J
R 644	RS1/10S473J	R 873	RS1/10S473J
R 645	RS1/10S473J	R 911	RS1/8S0R0J
R 646	RS1/10S473J	R 912	RS1/10S392J
R 647	RS1/10S473J	R 913	RS1/10S752J
R 648	RS1/10S473J	R 921	RS1/10S472J
R 649	RS1/10S221J	R 922	RD1/4PU221J
R 650	RS1/10S682J	R 923	RD1/4PU221J
R 655	RS1/10S222J	R 931	RS1/10S472J
R 656	RS1/10S222J	R 932	RD1/4PU221J
R 657	RS1/10S473J	R 933	RD1/4PU221J
R 658	RS1/10S473J	R 941	RS1/10S102J
R 659 (RN1/10SE9102D)	GGC1317	R 942	RS1/10S102J
R 662	RS1/10S222J	R 943	RS1/10S472J
R 663	RS1/10S473J	R 951	RS1/10S103J
R 664	RS1/10S103J	R 952	RS1/10S103J
R 665 (RN1/10SE2402D)	GGC1318	R 953	RS1/10S473J
R 671	RS1/10S681J	R 954	RS1/10S472J
R 672	RS1/10S102J	R 955	RS1/10S473J
R 673	RS1/10S102J	R 956	RS1/10S103J
R 674	RS1/10S102J	R 961	RS1/8S153J
R 675	RS1/10S681J	R 962	RS1/10S472J
R 676	RS1/10S681J	R 963	RS1/10S472J
R 677	RS1/10S681J	R 964	RS1/10S102J
R 678	RS1/10S681J	R 971	RS1/10S822J
R 681	RS1/8S102J	R 973	RS1/10S102J
R 682	RS1/8S102J	R 974	RS1/10S473J
R 683	RS1/8S102J	R 975	RS1/10S472J
R 685	RS1/10S103J	R 991	RD1/4PU221J
R 686	RS1/10S103J	R 992	RS1/10S221J
R 687	RS1/10S223J	R 993	RS1/10S472J
R 688	RS1/10S223J	R 994	RS1/10S222J
R 689	RS1/10S223J		
R 690	RS1/10S272J		
R 691	RS1/10S223J		
R 692	RS1/10S272J		
R 693	RS1/10S223J		
R 694	RS1/10S272J		
R 695	RS1/10S473J		
R 696	RS1/10S473J		
R 697	RS1/10S473J		

CAPACITORS

C 101	CKSQYB104K16
C 102	CKSQYB104K16
C 103	CEJA1R0M50
C 104	CEJA1R0M50
C 105	CEJA100M16

====Circuit Symbol and No.==Part Name	Part No.	====Circuit Symbol and No.==Part Name	Part No.
C 106	CEJA100M16	C 420	CCSQCH150J50
C 107	CEJA1R0M50	C 421	CCSQCH150J50
C 108	CEJA1R0M50	C 422	CKSQYB103K50
C 109	CKSQYB102K50	C 423	CKSQYB103K50
C 131	CKSQYB681K50	C 424	CCSQCH101J50
C 132	CEJA101M10	C 425	CKSQYB473K16
C 141	CCSQCH101J50	C 426	CEV220M6R3
C 151	CKSQYB473K50	C 427	CKSQYB103K50
C 152	CKSQYB473K50	C 428	CKSQYB103K50
C 171	CEJA1R0M50	C 430	CKSQYB103K50
C 172	CEJA1R0M50	C 432	CKSQYB103K50
C 173	CEV4R7M25	C 433	CKSQYB103K50
C 174	CEV4R7M25	C 434	CKSQYB223K50
C 175	CCSQCH820J50	C 435	CKSQYB223K50
C 176	CCSQCH820J50	C 601	CCSQCH200J50
C 177	CCSQCH390J50	C 602	CCSQCH200J50
C 178	CCSQCH390J50	C 603	CCSQCH101J50
C 179	CCSQCH390J50	C 604	CEJA101M10
C 180	CCSQCH390J50	C 605	CKSQYB103K50
C 182	CEJA1R0M50	C 606	CCSQCH101J50
C 183	CEJA220M6R3	C 607	CCSQCH101J50
C 184	CEJA101M10	C 608	CCSQCH101J50
C 185	CEJA100M16	C 609	CEJA100M16
C 186	CKSQYB223K50	C 610	CKSQYB104K16
C 201	CEJA4R7M35	C 615	CCSQCH101J50
C 202	CEJA4R7M35	C 617	CCSQCH101J50
C 203	CEJA100M16	C 618	CCSQCH101J50
C 204	CEJA100M16	C 619	CCSQCH101J50
C 205	CKSQYB104K16	C 620	CCSRCH101J50
C 206	CKSQYB104K16	C 651	CKSYB475K10
C 207	CEJA100M16	C 653	CKSQYB102K50
C 208	CEJA100M16	C 654	CKSQYB104K16
C 217	CCSQCH221J50	C 671	CKSQYB103K50
C 218	CCSQCH101J50	C 672	CEZA100M16
C 227	CKSQYB103K50	C 683	CKSQYB103K50
C 229	CEJANP100M10	C 684	CKSQYB103K50
C 230	CKSYB475K10	C 685	CKSQYB103K50
C 231	CEZA4R7M25	C 686	CKSQYB473K16
C 232	CEZA4R7M25	C 803	CKSQYB103K50
C 233	CEZA4R7M25	C 806	CKSYB475K10
C 234	CEZA4R7M25	C 807	CCSQCH101J50
C 235	CEZA100M16	C 808	CEJA101M16
C 236	CEZA100M16	C 809	CCSQCH101J50
C 237	CCSQCH221J50	C 851	CKSQYB103K50
C 238	CCSQCH221J50	C 852	CKSYB475K10
C 239	CCSQCH221J50	C 853	CKSQYB102K50
C 240	CCSQCH221J50	C 854	CCSQCH101J50
C 241	CCSQCH221J50	C 855	CCSQCH101J50
C 242	CCSQCH221J50	C 856	CKSQYB102K50
C 307	CKSQYB104K16	C 871	CCH1183
C 308	CCH1125	C 872	CEZA100M16
C 351	CCSQCH221J50	C 873	CKSQYB103K50
C 352	CCSQCH101J50	C 874	CKSQYB102K50
C 353	CKSYB475K10	C 876	CASA4R7M10
C 401	CKSQYB103K50	C 911	CCH1312
C 402	CKSQYB103K50	C 912	CKSQYB472K50
C 403	CKSQYB103K50	C 913	CKSQYB103K50
C 404	CKSQYB103K50	C 914	CASA470M10
C 405	CEV220M10	C 921	CKSQYB103K50
C 406	CKSQYB103K50	C 941	CKSQYB102K50
C 407	CEV220M10	C 942	CCH1181
C 408	CKSQYB103K50	C 943	CEZA470M25
C 409	CKSQYB103K50	C 944	CEJA1R0M50
C 410	CEV220M6R3	C 945	CEJA101M10
C 411	CKSQYB103K50	C 946	CEJA470M10
C 412	CKSQYB154K16	C 947	CKSQYB102K50
C 414	CKSQYB103K50	C 951	CKSQYB105K10
C 416	CKLSR473K16	C 952	CCSQCH101J50
C 417	CCH1250	C 971	CEJA2R2M50
C 418	CKSQYB103K50	C 972	CKSQYB102K50

DEX-P1R,DEH-P946,DEX-P1

====Circuit Symbol and No.==Part Name	Part No.	====Circuit Symbol and No.==Part Name	Part No.
C 973	CKSQYB104K16	R 1911	RS1/8S751J
C 991	CKSQYB473K16	R 1912	RS1/8S102J
C 992	CKSQYB102K50	R 1913	RS1/10S103J
C 993	CEJA101M10	R 1914	RS1/10S0R0J
		R 1916	RS1/8S751J
C Unit Number : CWM5686(DEX-P1R/UC)		R 1917	RS1/4S471J
Unit Number : CWM5689(DEH-P946/ES,DEX-P1/ES)		R 1918	RS1/10S103J
Unit Name : Keyboard Unit		R 1919	RS1/10S0R0J
		R 1921	RS1/4S471J
		R 1922	RS1/10S103J
MISCELLANEOUS			
IC 1901 HIC Module	RS-140		
IC 1902 IC	PD6237C	R 1923	RS1/10S0R0J
IC 1903 IC	SED1540F0A	R 1924	RS1/10S0R0J
IC 1904 IC	SED1526F0A	R 1927	RS1/10S473J
IC 1905 IC	SED1526F0A	R 1928	RS1/10S473J
		R 1929	RS1/10S473J
D 1901 Diode	MA153		
D 1902 Diode	MA153	R 1930	RS1/10S473J
D 1903 Diode	MA153	R 1931	RS1/16S470J
D 1904 Diode	MA152WA	R 1932	RS1/16S470J
D 1905 LED	CL170SBX	R 1935	RS1/10S473J
		R 1936	RS1/10S473J
D 1907 LED	CL170PGCD		
D 1909 LED	CL170PGCD	R 1937	RS1/10S103J
D 1910 LED	CL170SBX	R 1938	RS1/10S473J
D 1912 LED	CL170PGCD	R 1939	RA4C101J
D 1913 LED	CL170PGCD	R 1940	RS1/10S103J
		R 1941	RA4C101J
D 1914 LED	CL170PGCD		
D 1915 LED	CL170SBX	R 1942	RS1/10S103J
D 1917 LED	CL170PGCD	R 1943	RS1/10S473J
D 1918 LED	CL170PGCD	R 1944	RS1/10S473J
D 1919 LED	CL170SBX	R 1945	RS1/10S473J
		R 1946	RA3C102J
D 1920 LED	CL170PGCD		
L 1901 Inductor	LCTA2R2J3225	R 1947	RA3C102J
L 1902 Inductor	LCTB2R2K2125	R 1948	RA3C102J
L 1903 Inductor	LCTB2R2K2125	R 1950	RS1/10S624J
L 1904 Inductor	LCTB2R2K2125	R 1951	RS1/10S754J
		R 1952	RS1/10S624J
L 1905 Inductor	LCTA4R7J3225		
X 1901 Radiator 3.77MHz	CSS1427	R 1953	RS1/10S754J
S 1901 Spring Switch	CSN1042	R 1954	RS1/10S471J
S 1902 Push Switch	CSG1117	R 1955	RS1/10S471J
S 1903 Switch	CSG1075	R 1956	RS1/10S471J
		R 1957	RS1/10S471J
S 1904 Push Switch	CSG1117		
S 1906 Push Switch	CSG1118	R 1958	RS1/10S473J
S 1907 Switch	CSG1075	R 1959	RS1/10S472J
S 1908 Push Switch	CSG1117	R 1960	RS1/10S103J
S 1909 Push Switch	CSG1117	R 1961	RS1/10S103J
		R 1962	RS1/10S103J
S 1910 Push Switch	CSG1117		
S 1911 Switch	CSG1108	R 1963	RS1/10S0R0J
S 1913 Push Switch	CSG1117	R 1964	RS1/8S102J
S 1914 Push Switch	CSG1118	R 1965	RS1/8S751J
S 1915 Switch	CSG1107	R 1966	RS1/8S751J
		R 1967	RS1/8S751J
S 1916 Push Switch	CSG1117		
VR 1901 Semi-fixed 220kΩ(B)	CCP1237	R 1968	RS1/8S102J
VR 1902 Semi-fixed 220kΩ(B)	CCP1237	R 1970	RS1/8S751J
EL 1901 EL	CEL1580		
LCD1901 LCD (DEX-P1R/UC)	CAW1470	CAPACITORS	
LCD1901 LCD (DEH-P946/ES,DEX-P1/ES)	CAW1471	C 1901	CSZSR100M6R3
RESISTORS		C 1902	CKSQYB104K16
R 1901	RS1/8S222J	C 1903	CKSQYB104K16
R 1902	RS1/8S222J	C 1904	CKSQYB104K16
R 1903	RS1/8S222J	C 1905	CKSQYB104K16
R 1904	RS1/10S121J		
R 1905	RS1/10S473J	C 1906	CKSQYB103K50
		C 1907	CKSQYB103K50
R 1906	RS1/8S102J	C 1908	CKSQYB103K50
R 1907	RS1/8S751J	C 1909	CKSQYF105Z16
R 1908	RS1/10S103J	C 1910	CKSQYF105Z16
R 1909	RS1/10S0R0J		
R 1910	RS1/8S751J	C 1911	CKSQYF105Z16
		C 1912	CKSQYF105Z16
		C 1913	CKSQYF105Z16
		C 1914	CKSQYF105Z16
		C 1915	CKSQYF105Z16

====Circuit Symbol and No.==Part Name			Part No.	====Circuit Symbol and No.==Part Name			Part No.
C	1916		CKSQYF105Z16	R	3011		RS1/16S102J
C	1917		CKSQYB103K50	R	3012		RS1/16S102J
C	1918		CSZS1R0M16	R	3013		RS1/16S102J
C	1919		CSZS1R0M16	R	3014		RS1/16S102J
C	1920		CSZS1R0M16	R	3015		RS1/16S473J
C	1921		CKSQYF105Z16	R	3016		RA3C102J
C	1922		CKSQYF105Z16	R	3018		RS1/16S102J
C	1923		CKSQYF105Z16	R	3019		RS1/16S102J
C	1924		CKSQYF105Z16	R	3020		RS1/16S102J
C	1925		CKSQYF105Z16	R	3021		RS1/16S102J
C	1926		CKSQYB103K50	R	3022		RS1/16S102J
C	1927		CSZS1R0M16	R	3023		RS1/16S102J
C	1928		CSZS1R0M16	R	3024		RS1/16S102J
C	1929		CSZS1R0M16	R	3025		RS1/16S102J
C	1934		CSZSR100M6R3	R	3026		RS1/16S102J
C	1935		CKSQYB104K16	R	3027		RS1/16S102J
C	1936		CSZSR100M6R3	R	3028		RS1/16S102J
F Unit Number : CWX2213 Unit Name : DSP Unit				R	3029		RS1/16S102J
				R	3030		RS1/16S102J
				R	3031		RS1/16S102J
				MISCELLANEOUS			
IC	3001	IC	PD5445C	R	3032		RS1/16S102J
IC	3101	IC	AK7712AVT	R	3033		RS1/16S473J
IC	3102	IC	TC9331F	R	3034		RS1/16S473J
IC	3103	IC(M5M51016BTP-70LL)	GGC1325	R	3035		RS1/16S473J
IC	3141	IC	BU4066BCFV	R	3036		RS1/16S105J
IC	3142	IC	TC7S08FU	R	3037		RS1/16S102J
IC	3201	IC	PE2001AF	R	3101		RS1/16S473J
IC	3301	IC	PM0017AM	R	3102		RS1/16S473J
L	3001	High Loss Inductor	CTF1410	R	3103		RA4C102J
L	3002	High Loss Inductor	CTF1410	R	3104		RA4C102J
L	3003	High Loss Inductor	CTF1410	R	3105		RA4C102J
L	3004	High Loss Inductor	CTF1410	R	3106		RA4C102J
L	3101	High Loss Inductor	CTF1410	R	3108		RA4C102J
L	3102	High Loss Inductor	CTF1410	R	3109		RA4C102J
L	3103	High Loss Inductor	CTF1410	R	3110		RA4C102J
L	3104	High Loss Inductor	CTF1410	R	3111		RA4C102J
L	3141	Inductor	LCTB2R2K2125	R	3112		RS1/16S105J
L	3142	High Loss Inductor	CTF1410	R	3113		RS1/16S105J
L	3143	Inductor	CTF1420	R	3114		RS1/16S102J
L	3151	High Loss Inductor	CTF1410	R	3115		RS1/16S102J
L	3152	High Loss Inductor	CTF1410	R	3116		RS1/16S473J
L	3153	High Loss Inductor	CTF1410	R	3141		RA3C103J
L	3154	High Loss Inductor	CTF1410	R	3151		RSK1/16S151J
L	3201	High Loss Inductor	CTF1410	R	3152		RSK1/16S151J
L	3301	High Loss Inductor	CTF1410	R	3153		RSK1/16S151J
L	3302	High Loss Inductor	CTF1410	R	3154		RSK1/16S151J
L	3303	High Loss Inductor	CTF1410	R	3155		RSK1/16S151J
L	3304	High Loss Inductor	CTF1410	R	3156		RSK1/16S151J
L	3305	High Loss Inductor	CTF1410	R	3160		RS1/10S0R0J
L	3306	High Loss Inductor	CTF1410	CAPACITORS			
X	3001	Resonator 10.00MHz	CSS1428	C	3002		CKSYB106K6R3
X	3101	Crystal Resonator 16.9344MHz	CSS1067	C	3102		CKSQYB103K50
X	3102	Crystal Resonator 32.0MHz	CSS1360	C	3104		CCSRCH100D50
				C	3105		CCSRCH100D50
				C	3107		CKSYB106K6R3
RESISTORS							
R	3001		RS1/16S102J	C	3108		CKSQYB104K16
R	3002		RS1/16S102J	C	3109		CSZSR470M6R3
R	3003		RS1/16S102J	C	3110		CKSQYB104K16
R	3004		RS1/16S681J	C	3111		CKSYB106K6R3
R	3005		RS1/16S681J	C	3112		CKSQYB104K16
R	3006		RS1/16S681J	C	3113		CCSQCH221J50
R	3007		RS1/16S681J	C	3114		CKSYB106K6R3
R	3008		RS1/16S681J	C	3115		CCSQCH100J50
R	3009		RS1/16S681J	C	3116		CCSQCH100J50
R	3010		RS1/16S102J	C	3117		CKSYB106K6R3

====Circuit Symbol and No.==Part Name	Part No.
C 3119	CKSYB106K6R3
C 3120	CKSQYB104K16
C 3141	CKSQYB103K50
C 3143	CKSQYB103K50
C 3145	CCSQCH470J50
C 3146	CCSRCH221J50
C 3151	CKLSRB332K50
C 3152	CKLSRB332K50
C 3159	CKLSRR103K16
C 3160	CKLSRR103K16
C 3161	CKLSRR103K16
C 3162	CKLSRR103K16
C 3163	CKLSRR103K16
C 3164	CKLSRR103K16
C 3201	CKSYB106K6R3
C 3203	CKSQYB104K16
C 3205	CSZSR470M6R3
C 3206	CKSQYB104K16
C 3207	CKSYB106K6R3
C 3301	CKSYB475K10
C 3302	CKSYB475K10
C 3303	CKSYB475K10
C 3304	CKSYB475K10
C 3305	CKSYB475K10
C 3306	CKSYB475K10
C 3307	CKSQYB104K16
C 3308	CKSYB106K6R3
C 3309	CKSQYB104K16

G Unit Number : CWM4538(DEX-P1R/UC,DEX-P1/ES)
Unit Name : D/D Converter Unit

MISCELLANEOUS

IC 4001	IC	TL1451ANS
Q 4001	Transistor	2SA1797
Q 4002	Transistor	2SC2812
Q 4003	Transistor	2SA1179
Q 4004	Transistor	2SA1576
Q 4005	Transistor	DTC124EU
D 4001	Diode	SC802-06
L 4001	Choke Coil 220μH	CTH1164
L 4002	Choke Coil 220μH	CTH1164
L 4003	Choke Coil 220μH	CTH1164

RESISTORS

R 4001		RS1/10S122J
R 4002		RS1/10S473J
R 4003		RS1/4S681J
R 4004		RS1/10S101J
R 4005	(RN1/10SE3302D)	GGC1319
R 4006	(RN1/10SE1202D)	GGC1269
R 4007		RS1/10S104J
R 4008	(RN1/10SE6201D)	GGC1324
R 4009		RS1/10S223J
R 4010		RS1/10S223J
R 4011		RS1/10S101J
R 4012	(RN1/10SE1002D)	GGC1320
R 4013	(RN1/10SE1002D)	GGC1320
R 4016		RS1/10S754J
R 4017	(RN1/10SE9101D)	GGC1321
R 4018	(RN1/10SE1502D)	GGC1322
R 4019	(RN1/10SE3002D)	GGC1323

CAPACITORS

C 4001	33μF/25V	CCH1249
C 4002		CKSQYB102K50
C 4003	33μF/25V	CCH1249
C 4004		CCSQCH101J50
C 4005		CKSQYB102K50

====Circuit Symbol and No.==Part Name	Part No.
C 4006	33μF/25V
C 4008	33μF/25V
C 4009	
C 4010	
C 4011	
C 4012	
C 4013	
C 4014	

High Out Unit
Consists of
D/D Converter PCB
High Out PCB

E H Unit Number : CWX2215(DEX-P1R/UC,DEX-P1/ES)
Unit Name : High Out Unit

MISCELLANEOUS

IC 4151	IC	NJM4580M
IC 4251	IC	NJM4580M
IC 4351	IC	NJM4580M
Q 4151	Transistor	IMX9
Q 4251	Transistor	IMX9
Q 4351	Transistor	IMX9

RESISTORS

R 4153		RSK1/10S103J
R 4154		RSK1/10S103J
R 4155		RSK1/10S153J
R 4156		RSK1/10S153J
R 4157		RSK1/10S680J
R 4158		RSK1/10S680J
R 4159		RS1/10S223J
R 4160		RS1/10S223J
R 4161		RS1/10S222J
R 4162		RS1/10S222J
R 4163		RS1/10S103J
R 4253		RSK1/10S103J
R 4254		RSK1/10S103J
R 4255		RSK1/10S163J
R 4256		RSK1/10S163J
R 4257		RSK1/10S680J
R 4258		RSK1/10S680J
R 4259		RS1/10S223J
R 4260		RS1/10S223J
R 4261		RS1/10S222J
R 4262		RS1/10S222J
R 4353		RSK1/10S103J
R 4354		RSK1/10S103J
R 4355		RSK1/10S153J
R 4356		RSK1/10S153J
R 4357		RSK1/10S680J
R 4358		RSK1/10S680J
R 4359		RS1/10S223J
R 4360		RS1/10S223J
R 4361		RS1/10S222J
R 4362		RS1/10S222J

CAPACITORS

C 4151		CEWAR100M50
C 4152		CKSQYB471K50
C 4153		CEWAR100M50
C 4154		CEWAR100M50
C 4157		CCSQCH820J50
C 4158		CCSQCH820J50
C 4253		CEWAR100M50
C 4254		CEWAR100M50
C 4257		CCSQCH820J50
C 4258		CCSQCH820J50

====Circuit Symbol and No.==Part Name

Part No.

C 4353
C 4354
C 4357
C 4358

CEWAR100M50
CEWAR100M50
CCSQCH820J50
CCSQCH820J50



Unit Number : CWX2216
Unit Name : ASL Unit

MISCELLANEOUS

IC 4501 IC
IC 4502 IC
Q 4501 Transistor
D 4501 Diode
D 4502 Diode

D 4503 Diode
VR 4501 Semi-fixed 10KΩ(B)
MIC4501 Microphone

NJM2068MD
NJM2068MD
2SC2458
MA152WK
MA3043(LMH)

MA3075(M)
CCP1319
CPM1011

RESISTORS

R 4501
R 4502
R 4503
R 4504
R 4505

RS1/8S222J
RS1/8S683J
RS1/8S103J
RS1/8S472J
RS1/8S471J

R 4506
R 4507
R 4508
R 4509
R 4510

RS1/8S682J
RS1/8S684J
RS1/8S562J
RS1/8S391J
RS1/8S472J

R 4511
R 4512
R 4513
R 4514
R 4515

RS1/8S472J
RS1/8S472J
RS1/8S153J
RS1/8S153J
RS1/8S102J

R 4517

RS1/8S270J

CAPACITORS

C 4501
C 4502
C 4503
C 4504
C 4505

CEJA470M10
CEJA470M10
CEJAR68M50
CEJA100M16
CEJA470M10

C 4506
C 4507
C 4508
C 4509
C 4510

CEJA470M16
CEJA100M16
CEJANP220M10
CEJAR68M50
CEJANP100M10

C 4511
C 4512
C 4513

CKSYB823K50
CCSCH101J50
CEJA470M10



Unit Number : CWX2191
Unit Name : Mechanism FPC Unit

MISCELLANEOUS

D 1 LED
D 2 LED
D 3 LED
S 1 Spring Switch(Clamp)
S 2 Spring Switch(Home)

CL200IRX
CL200IRX
CL200IRX
CSN1033
CSN1033

RESISTORS

R 1
R 2
R 3
R 4
R 5

RS1/8S0R0J
RS1/8S0R0J
RS1/8S751J
RS1/8S751J
RS1/8S751J

====Circuit Symbol and No.==Part Name

Part No.



Unit Number : CWX2190
Unit Name : Photo FPC Unit

P 1 Photo-transistor
P 2 Photo-transistor
P 3 Photo-transistor

CPT-230S-X
CPT-230S-X
CPT-230S-X



Unit Number :
Unit Name : Flap Sense PCB

S 951 Switch(CLOSE)
S 952 Switch(OPEN)

CSN1012
CSN1022



Unit Number :
Unit Name : Microphone Jack Unit

D 4601 LED

BR4361F

Miscellaneous Parts List

M 1 Pickup Unit(Service)
M 2 CRG Motor Assy(Carriage)
M 3 LOAD Motor Unit>Loading)
M 851 Motor(Spindle)
M 851 Motor

CXX1290
CXB1670
CXB1684
CXM1129
CXM1085