
2. EXPLODED VIEWS AND PARTS LIST

2.1 PACKING(DEH-P90HDD/UC)

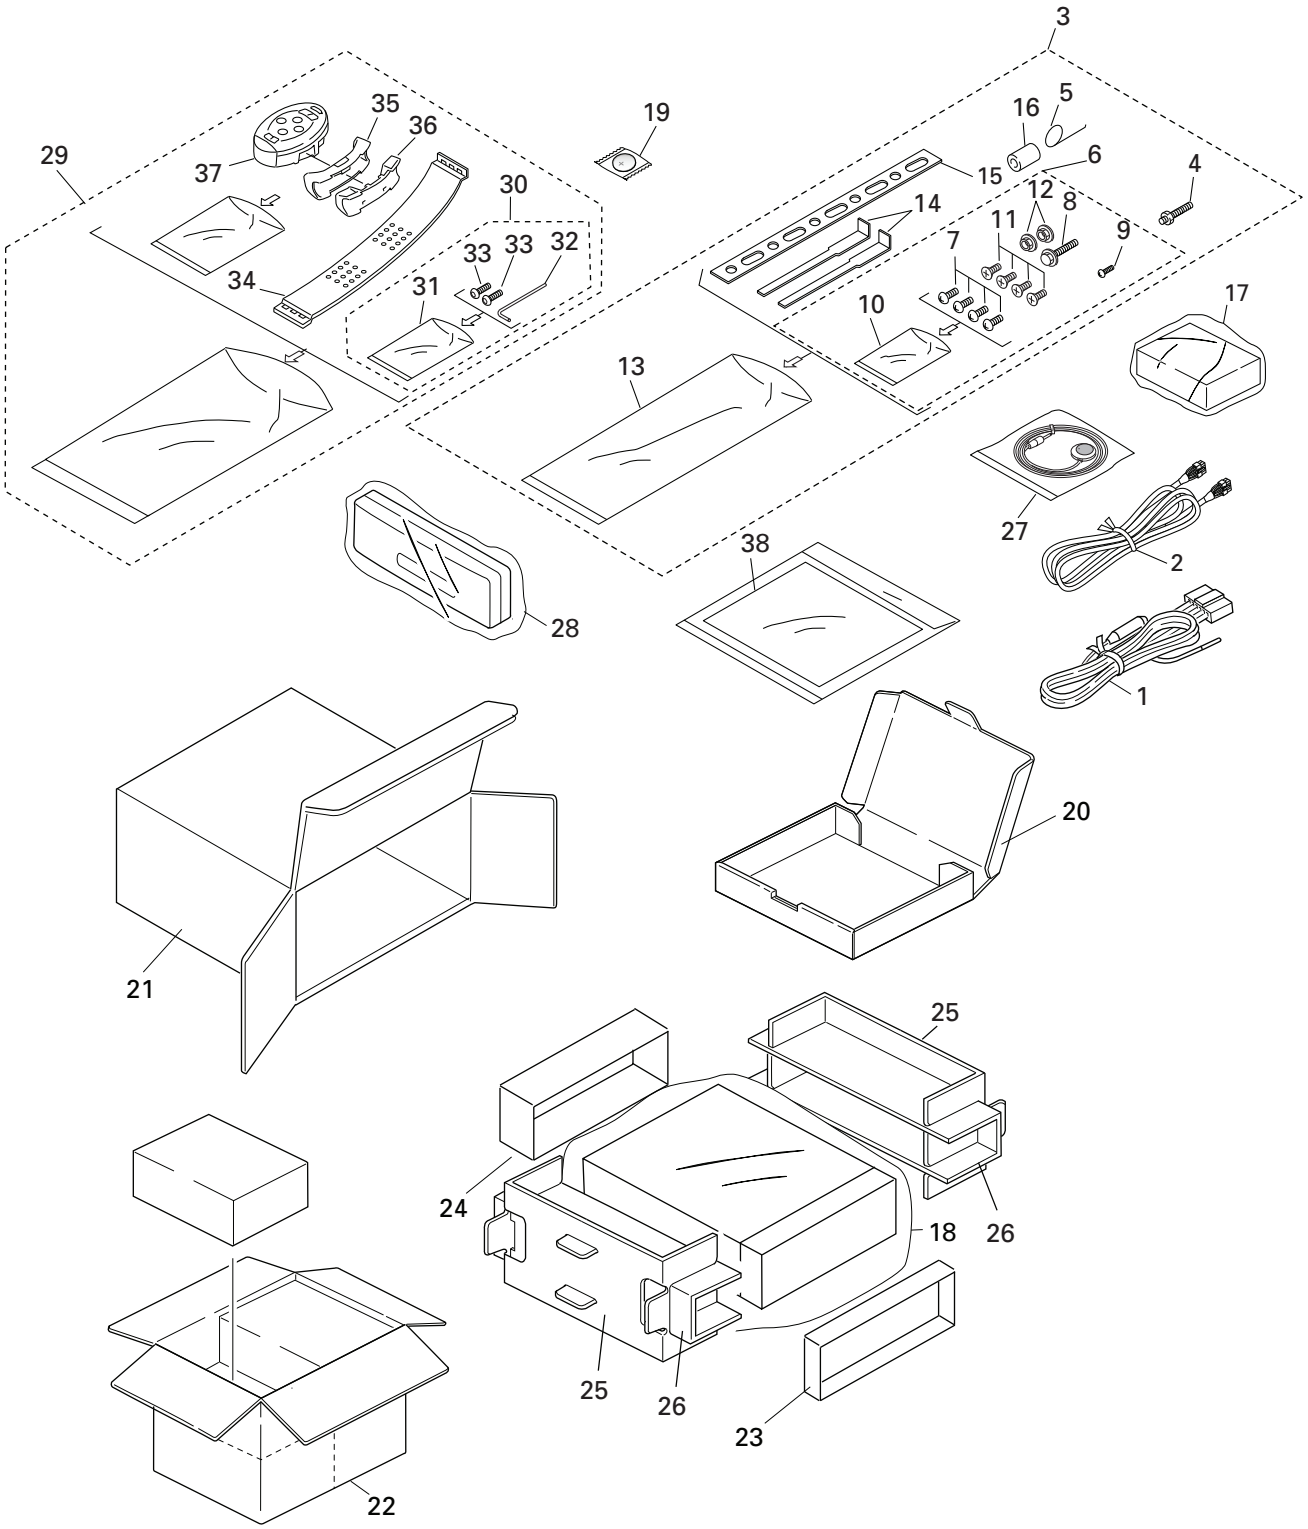

NOTE:

- Parts marked by "*" are generally unavailable because they are not in our Master Spare Parts List.
- Screws adjacent to ∇ mark on the product are used for disassembly.
- For the applying amount of lubricants or glue, follow the instructions in this manual.
  (In the case of no amount instructions, apply as you think it appropriate.)


● PACKING(DEH-P90HDD/UC) SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Cord Assy	CDE6563
	2	Cord Assy	CDE6584
	3	Accessory Assy	CEA3014
	4	Screw	CBA1002
	5	Spring	CBH-865
	6	Screw Assy	CEA3012
	7	Screw	BMZ50P080FMC
	8	Screw	CBA-102
	9	Screw(M2x6)	CBA1120
*	10	Polyethylene Bag	CEG-127
	11	Screw	CMZ50P080FMC
	12	Nut	NF50FMC
*	13	Polyethylene Bag	CEG-158
	14	Handle	CNC5395
	15	Strap	CNC5402
	16	Bush	CNV3930
*	17	Polyethylene Bag	CEG1163
	18	Polyethylene Bag	CEG1185
*	19	Battery	CEX1030
	20	Sub Carton	CHA3213
	21	Carton	CHG4504
	22	Contain Box	CHL4504
	23	Protector	CHP2385
	24	Protector	CHP2386
	25	Protector	CHP2445
	26	Protector	CHP2446
	27	Microphone Assy	CPM1054
	28	Case Assy	CXB3520
	29	Remote Control Assy	CXB6860
	30	Screw Assy	CZE3169
*	31	Polyethylene Bag	CEG-127
*	32	Hexagon Wrench	CZE3176
*	33	Screw	RMZ30H060FBK
	34	Belt	CZN7661
	35	Holder Assy	CZX3172
	36	Holder Assy	CZX3173
	37	Remote Control Assy	CZX3246
	38-1	Polyethylene Bag	CEG1116
	38-2	Owner's Manual	CRD3472
	38-3	Installation Manual	CRD3473
*	38-4	Caution Card	CRP1244
*	38-5	Card	ARY1048
*	38-6	Caution Card	CRP1274

● Owner's Manual, Installation Manual

Model	Part No.	Language
DEH-P90HDD/UC	CRD3472	English, French
DEH-P90HDD/UC	CRD3473	English, French

2.2 PACKING(DEH-P900HDD/EW)

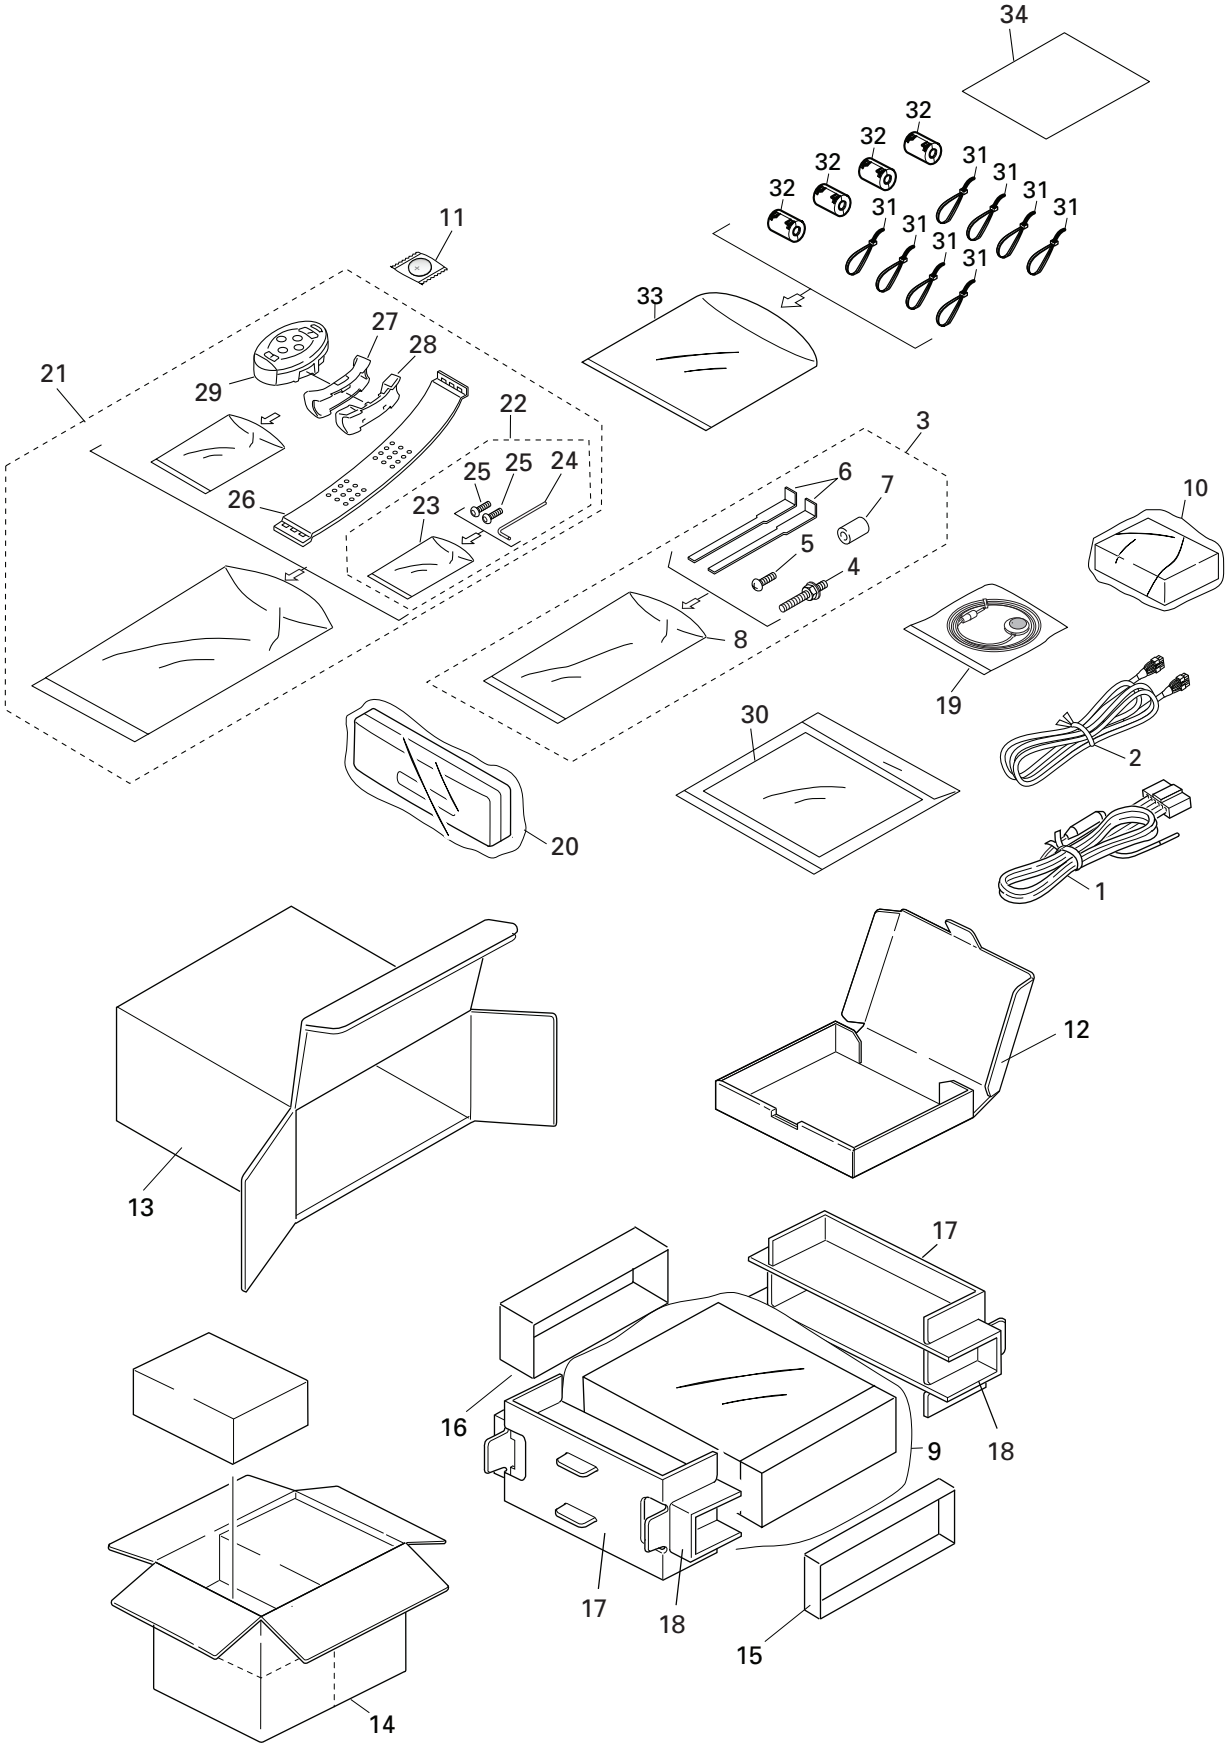


● PACKING(DEH-P900HDD/EW) SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Cord Assy	CDE6562
	2	Cord Assy	CDE6584
	3	Accessory Assy	CEA3015
	4	Screw	CBA1002
	5	Screw(M2x6)	CBA1120
	6	Handle	CNC5395
	7	Bush	CNV3930
*	8	Polyethylene Bag	E36-615
*	9	Cover	CEG1088
*	10	Polyethylene Bag	CEG1163
*	11	Battery	CEX1030
	12	Sub Carton	CHA3213
	13	Carton	CHG4503
	14	Contain Box	CHL4503
	15	Protector	CHP2385
	16	Protector	CHP2386
	17	Protector	CHP2445
	18	Protector	CHP2446
	19	Microphone Assy	CPM1054
	20	Case Assy	CXB3520
	21	Remote Control Assy	CXB6860
	22	Screw Assy	CZE3169
*	23	Polyethylene Bag	CEG-127
*	24	Hexagon Wrench	CZE3176
*	25	Screw	RMZ30H060FBK
	26	Belt	CZN7661
	27	Holder Assy	CZX3172
	28	Holder Assy	CZX3173
	29	Remote Control Assy	CZX3246
	30-1	Polyethylene Bag	CEG1116
	30-2	Owner's Manual	CRD3468
	30-3	Owner's Manual	CRD3469
	30-4	Owner's Manual	CRD3470
	30-5	Installation Manual	CRD3471
*	30-6	Caution Card	CRP1244
	30-7	Passport	CRY1013
*	30-8	Warranty Card	CRY1157
*	30-9	Caution Card	CRP1275
*	31	Lock Tie	CNV-754
	32	Filter	CTX1060
	33	Polyethylene Bag	CEG1161
*	34	Caution Card	CRP1271

● Owner's Manual, Installation Manual

Part No.	Language
CRD3468	English, Spanish
CRD3469	German, French
CRD3470	Italian, Dutch
CRD3471	English, Spanish, German, French, Italian, Dutch

2.3 PACKING(DEH-P900HDD/ES)

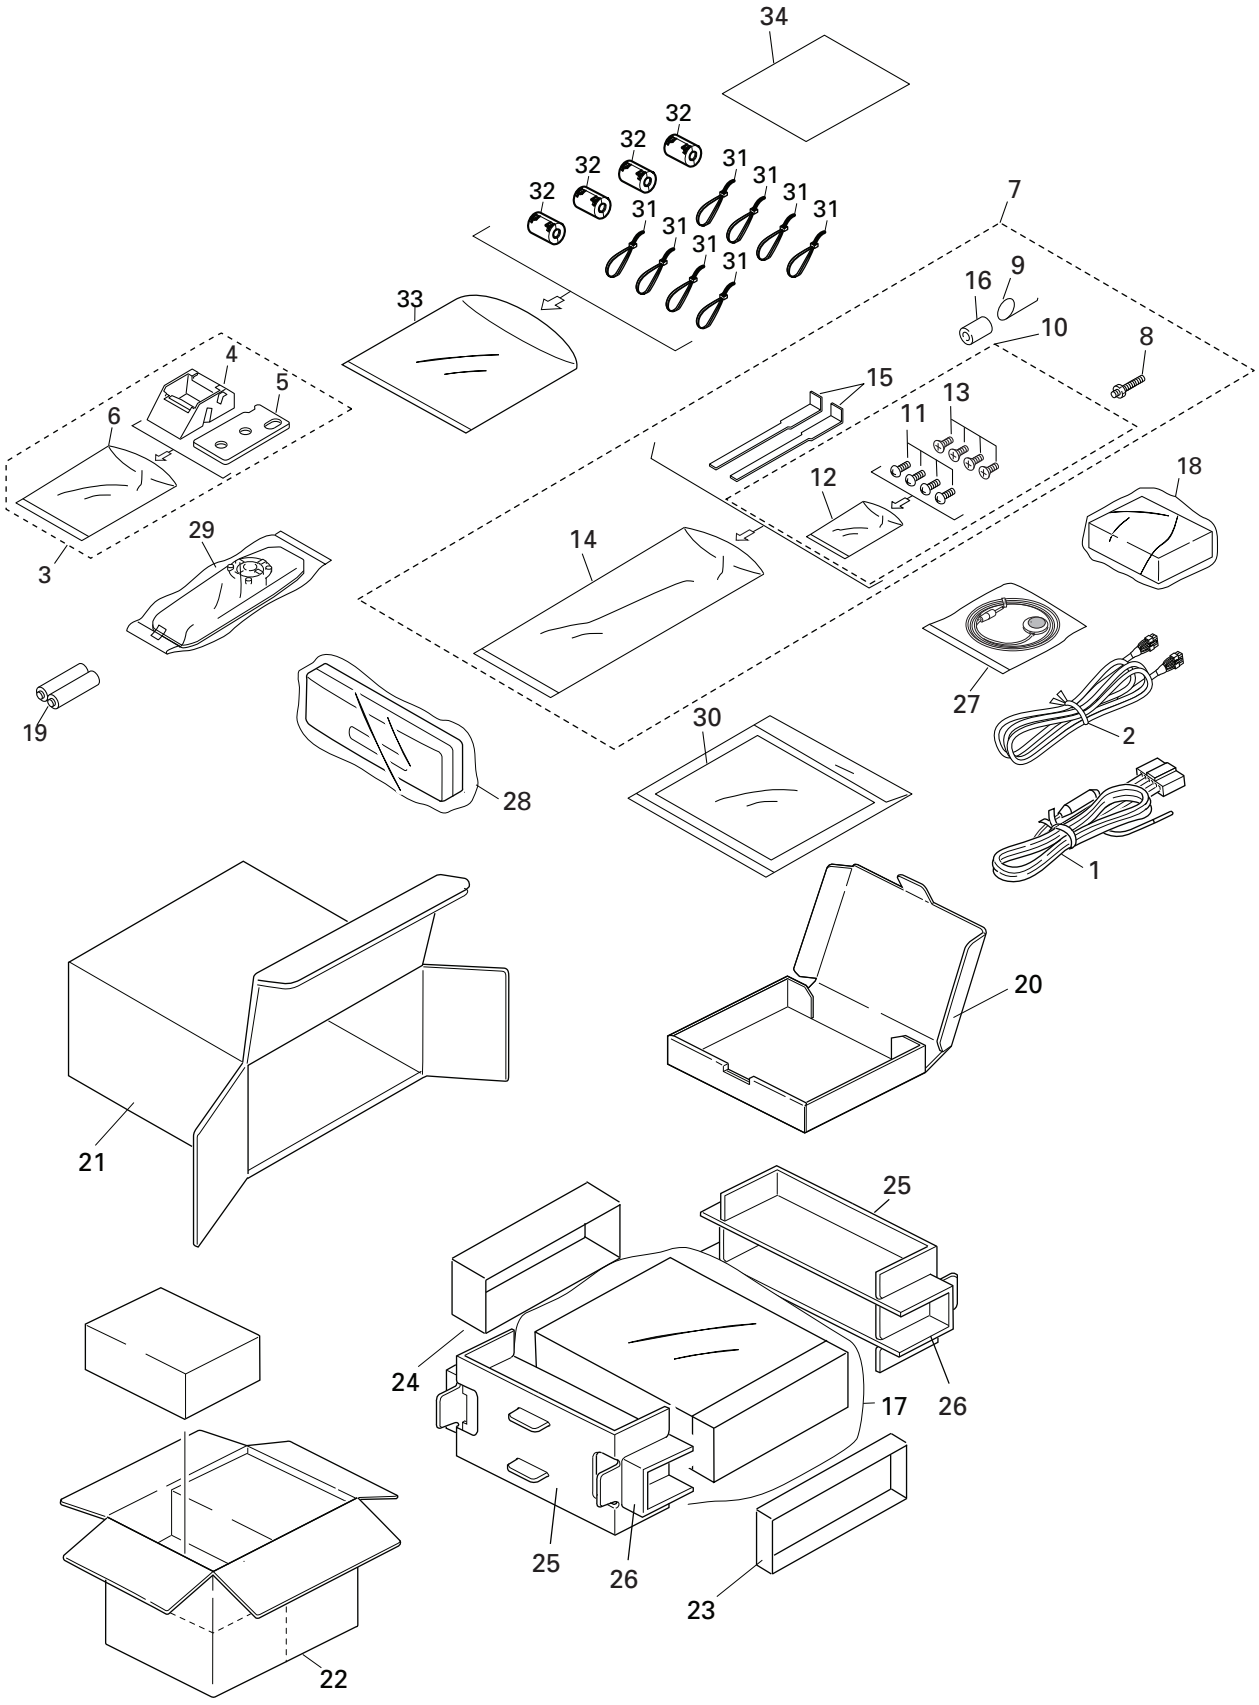


● PACKING(DEH-P900HDD/ES) SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Cord Assy	CDE6563
	2	Cord Assy	CDE6584
	3	Base Assy	CEA2426
*	4	Base	CNS5031
*	5	Sheet	CZA3371
	6	Polyethylene Bag	CZE3188
	7	Accessory Assy	CEA3013
	8	Screw	CBA1002
	9	Spring	CBH-865
	10	Screw Assy	CEA3105
	11	Screw	BMZ50P080FMC
*	12	Polyethylene Bag	CEG-127
	13	Screw	CMZ50P080FMC
*	14	Polyethylene Bag	CEG-158
	15	Handle	CNC5395
	16	Bush	CNV3930
*	17	Cover	CEG1088
*	18	Polyethylene Bag	CEG1163
*	19	Battery	CEX1006
	20	Sub Carton	CHA3213
	21	Carton	CHG4505
	22	Contain Box	CHL4505
	23	Protector	CHP2385
	24	Protector	CHP2386
	25	Protector	CHP2445
	26	Protector	CHP2446
	27	Microphone Assy	CPM1054
	28	Case Assy	CXB3520
	29	Remote Control Assy	CXB3875
	30-1	Polyethylene Bag	CEG1116
	30-2	Owner's Manual	CRB1731
	30-3	Owner's Manual	CRD3474
	30-4	Owner's Manual	CRD3475
	30-5	Installation Manual	CRD3476
*	30-6	Caution Card	CRP1244
*	30-7	Caution Card	CRP1274
*	31	Lock Tie	CNV-754
	32	Filter	CTX1060
	33	Polyethylene Bag	CEG1161
*	34	Caution Card	CRP1271

● Owner's Manual, Installation Manual

Part No.	Language
CRB1731	English
CRD3474	English, Spanish
CRD3475	Portuguese(B), Arabic
CRD3476	English, Spanish, Portuguese(B), Arabic

2.4 EXTERIOR(1)(DEH-P90HDD/UC, DEH-P900HDD/ES)

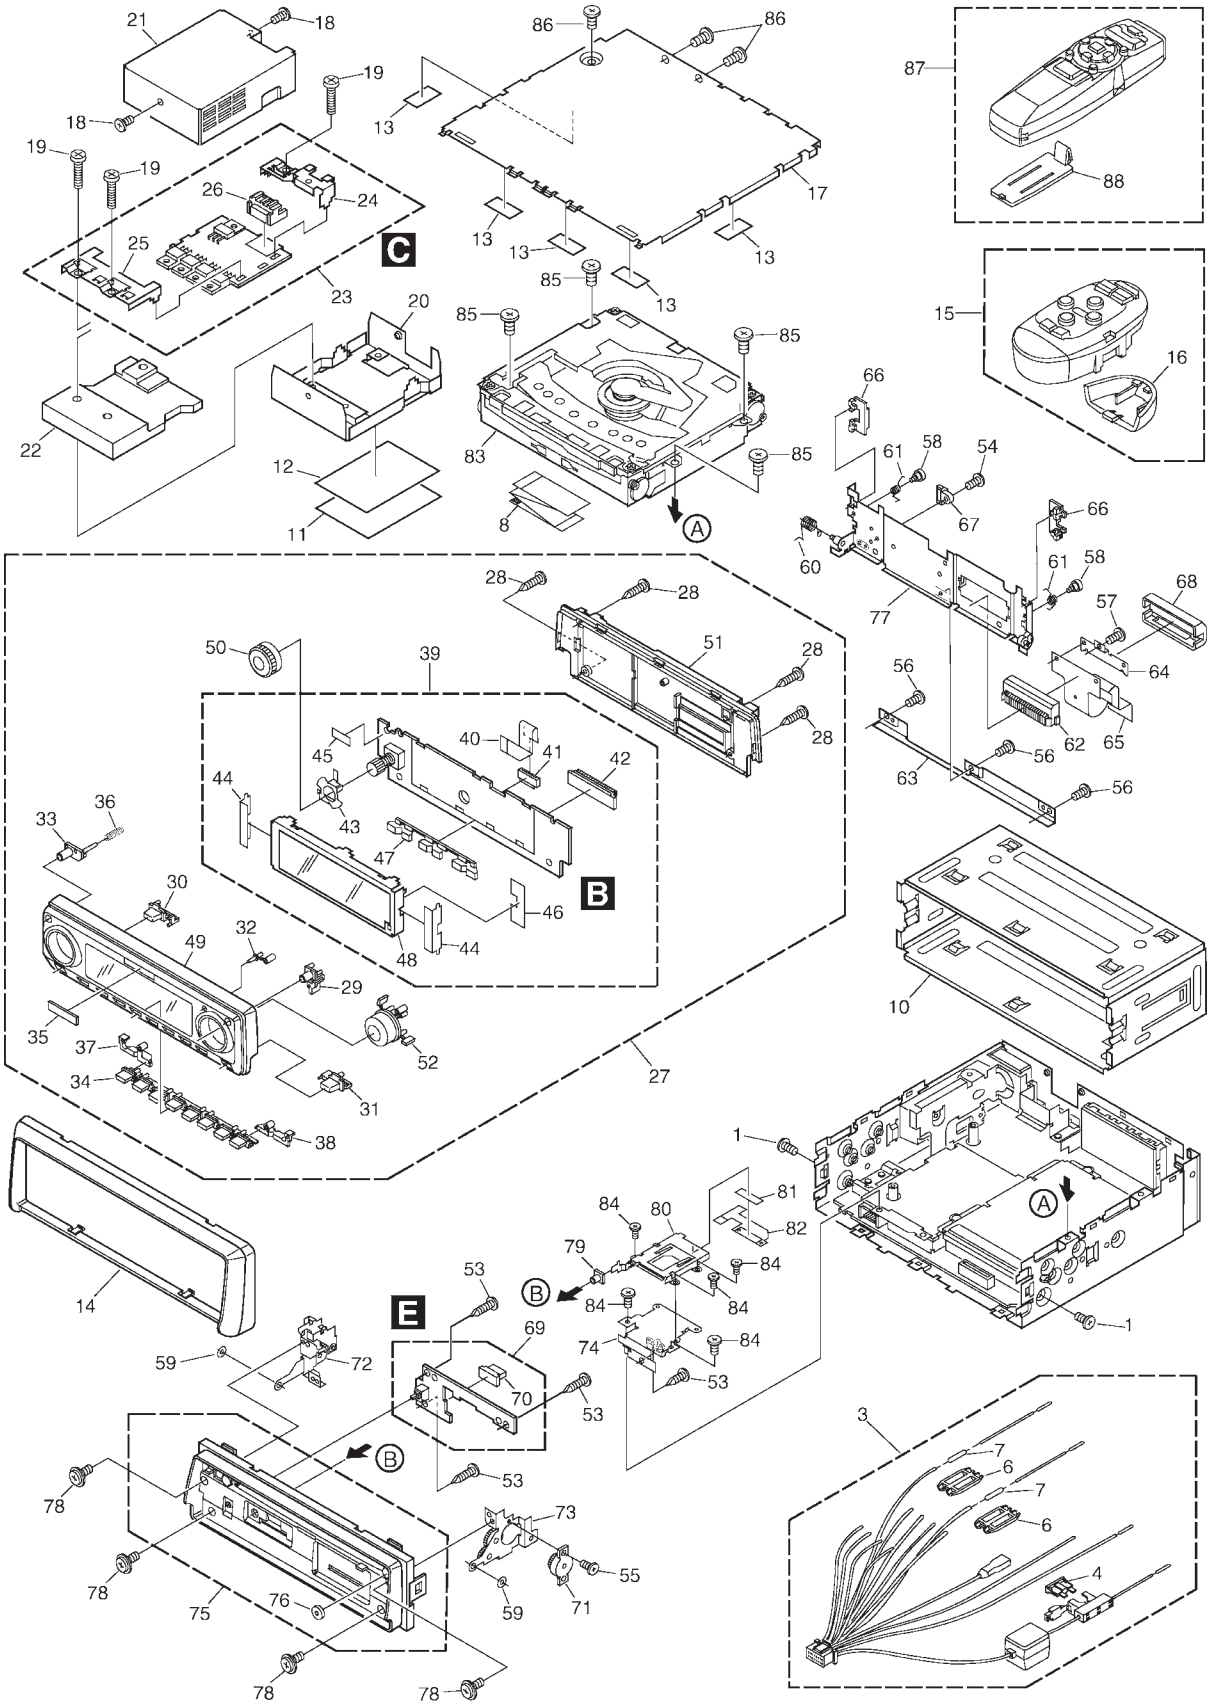

(1) EXTERIOR(1)(DEH-P90HDD/UC, DEH-P900HDD/ES) SECTION PARTS LIST


Mark	No.	Description	Part No.
	1	Screw	BMZ30P040FMC
	2	•••••	
	3	Cord Assy	CDE6563
	4	Fuse(10A)	CEK1136
	5	•••••	
	6	Cap	CNS1472
	7	Resistor	RS1/2PMF102J
	8	Flat Cable	CDE6581
	9	•••••	
	10	Holder	CNC8659
	11	Fastener	CNM7652
	12	Fastener	CNM7651
	13	Cushion	CNM7732
	14	Panel	See Contrast table(2)
	15	Remote Control Assy	See Contrast table(2)
	16	Cover	See Contrast table(2)
	17	Case Unit	CXB7094
	18	Screw	BSZ26P060FMC
	19	Screw	BSZ26P160FMC
	20	Chassis	CNA2393
	21	Case	CNB2731
	22	Heat Sink	CNR1611
	23	Power Supply Unit	CWM7665
*	24	Holder	CNC9353
*	25	Holder	CNC9354
	26	Connector(CN2801)	CKM1343
	27	Detach Grille Assy	See Contrast table(2)
	28	Screw	BPZ20P080FZK
	29	Button	CAC6863
	30	Button	CAC6867
	31	Button	CAC6870
	32	Button	CAC6872
	33	Button	CAC6951
	34	Button	CAC7307
*	35	Badge	CAH1754
	36	Spring	CBH1844
	37	Lighting Conductor	CNV6557
	38	Lighting Conductor	CNV6674
	39	Keyboard Unit	CWM7664
	40	Connector	CDE6741
	41	Connector(CN1902)	CKS3995
	42	Connector(CN1901)	CKS4435
	43	Spacer	CNM7409
	44	Spacer	CNM7529
	45	Spacer	CNM7711
	46	Cushion	CNM7719
	47	Lighting Conductor	CNV6554
	48	OEL Module	MXK8014
	49	Grille Unit	See Contrast table(2)
	50	Knob Unit	CXB7084
	51	Cover Unit	CXB7086
	52	Button Unit	CXB7440
	53	Screw	BPZ20P060FMC
	54	Screw(M2x3)	CBA1082
	55	Screw(M2x2)	CBA1176
	56	Screw(M2x2.2)	CBA1419
	57	Screw(M2x2)	CBA1505
	58	Screw(M2x1.5)	CBA1528
	59	Washer	CBF1001
	60	Spring	CBH2319
	61	Spring	CBH2445
	62	Connector	CKS4436
	63	Holder	CND1001
	64	Holder	CND1002
	65	Flexible PCB	CNP6278
	66	Holder	CNV6575
	67	Guide	CNV6676
	68	Cover	CNV7238
	69	Panel Unit	CWM7826
	70	Connector(CN1801)	CKS4251
	71	Damper Unit	CXB4659
	72	Holder Unit	CXB7097
	73	Holder Unit	CXB7098
	74	Holder Assy	CXB7495
	75	Panel Unit	CXB7572
	76	Cushion	CNM5486
	77	Holder Unit	CXB8903
	78	Screw	IMS20P040FZK
	79	Button	CAC7112
	80	Connector	CKS4494
	81	Double Faced Tape	CNM7785
	82	Flexible PCB	CNP6279
	83	CD Mechanism Module(H2)	CXK5354
	84	Screw	IMS20P030FMC
	85	Screw	BSZ26P060FMC
	86	Screw	BSZ30P050FMC
	87	Remote Control Assy	See Contrast table(2)
	88	Battery Cover	See Contrast table(2)

(2) CONTRAST TABLE

DEH-P90HDD/UC and DEH-P900HDD/ES are constructed the same except for the following:

Mark	No.	Symbol and Description	Part No. DEH-P90HDD/UC	Part No. DEH-P900HDD/ES
	14	Panel	CNS6665	CNS6669
	15	Remote Control Assy	CZX3246	Not used
	16	Cover	CZN7655	Not used
	27	Detach Grille Assy	CXB7474	CXB7475
	49	Grille Unit	CXB7081	CXB7082
	87	Remote Control Assy	Not used	CXB3875
	88	Battery Cover	Not used	CNS5032


2.5 EXTERIOR(1)(DEH-P900HDD/EW)

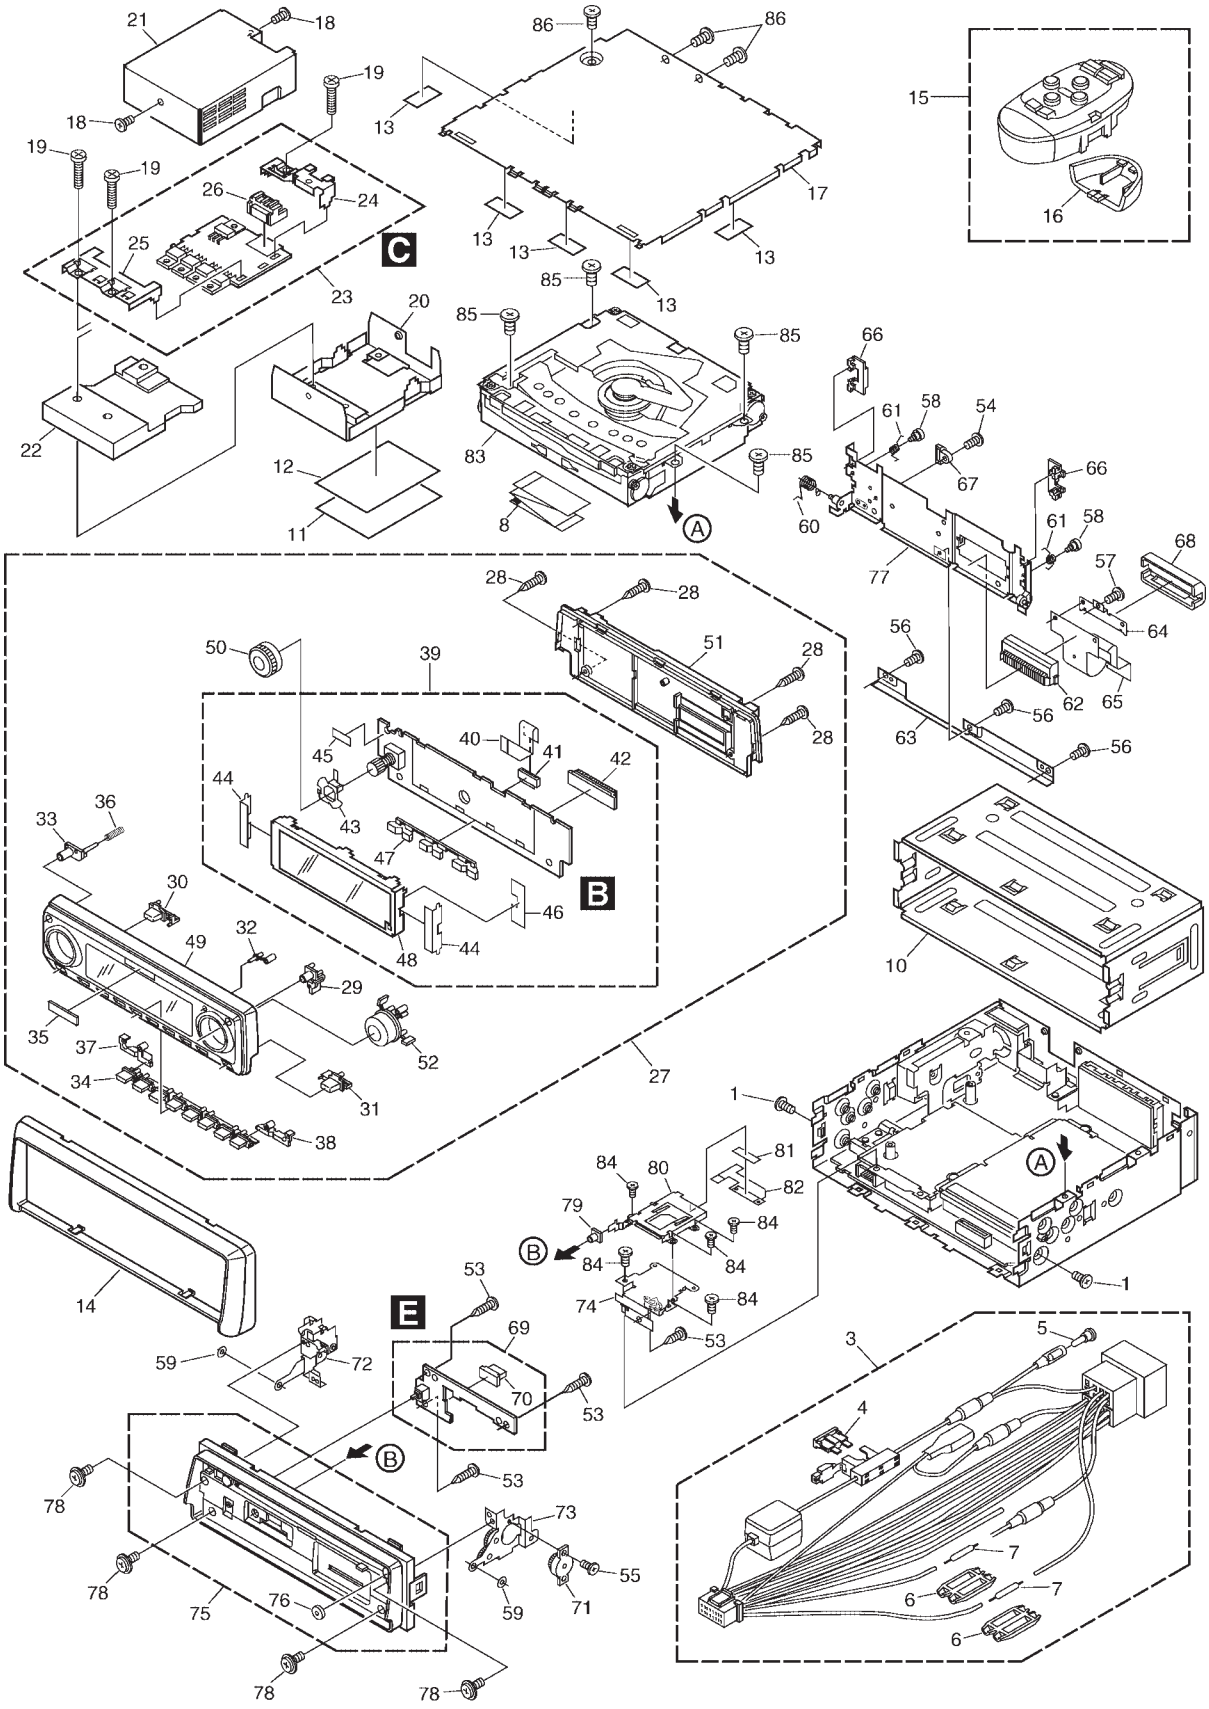

● EXTERIOR(1)(DEH-P900HDD/EW) SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Screw	BMZ30P040FMC
	2	•••••	
	3	Cord Assy	CDE6562
	4	Fuse(10A)	CEK1136
	5	Cap	CKX-003
	6	Cap	CNS1472
	7	Resistor	RS1/2PMF102J
	8	Flat Cable	CDE6581
	9	•••••	
	10	Holder	CNC8659
	11	Fastener	CNM7652
	12	Fastener	CNM7651
	13	Cushion	CNM7732
	14	Panel	CNS6665
	15	Remote Control Assy	CZX3246
	16	Cover	CZN7655
	17	Case Unit	CXB7094
	18	Screw	BSZ26P060FMC
	19	Screw	BSZ26P160FMC
	20	Chassis	CNA2393
	21	Case	CNB2731
	22	Heat Sink	CNR1611
	23	Power Supply Unit	CWM7665
*	24	Holder	CNC9353
*	25	Holder	CNC9354
	26	Connector(CN2801)	CKM1343
	27	Detach Grille Assy	CXB7472
	28	Screw	BPZ20P080FZK
	29	Button	CAC6863
	30	Button	CAC6867
	31	Button	CAC6870
	32	Button	CAC6872
	33	Button	CAC6951
	34	Button	CAC7307
*	35	Badge	CAH1754
	36	Spring	CBH1844
	37	Lighting Conductor	CNV6557
	38	Lighting Conductor	CNV6674
	39	Keyboard Unit	CWM7664
	40	Connector	CDE6741
	41	Connector(CN1902)	CKS3995
	42	Connector(CN1901)	CKS4435
	43	Spacer	CNM7409
	44	Spacer	CNM7529
	45	Spacer	CNM7711
	46	Cushion	CNM7719
	47	Lighting Conductor	CNV6554
	48	OEL Module	MXK8014
	49	Grille Unit	CXB7080
	50	Knob Unit	CXB7084
	51	Cover Unit	CXB7086
	52	Button Unit	CXB7440
	53	Screw	BPZ20P060FMC
	54	Screw(M2x3)	CBA1082
	55	Screw(M2x2)	CBA1176
	56	Screw(M2x2.2)	CBA1419
	57	Screw(M2x2)	CBA1505
	58	Screw(M2x1.5)	CBA1528
	59	Washer	CBF1001
	60	Spring	CBH2319
	61	Spring	CBH2445
	62	Connector	CKS4436
	63	Holder	CND1001
	64	Holder	CND1002
	65	Flexible PCB	CNP6278
	66	Holder	CNV6575
	67	Guide	CNV6676
	68	Cover	CNV7238
	69	Panel Unit	CWM7826
	70	Connector(CN1801)	CKS4251
	71	Damper Unit	CXB4659
	72	Holder Unit	CXB7097
	73	Holder Unit	CXB7098
	74	Holder Assy	CXB7495
	75	Panel Unit	CXB7572
	76	Cushion	CNM5486
	77	Holder Unit	CXB8903
	78	Screw	IMS20P040FZK
	79	Button	CAC7112
	80	Connector	CKS4494
	81	Double Faced Tape	CNM7785
	82	Flexible PCB	CNP6279
	83	CD Mechanism Module(H2)	CXK5354
	84	Screw	IMS20P030FMC
	85	Screw	BSZ26P060FMC
	86	Screw	BSZ30P050FMC

2.6 EXTERIOR(2)

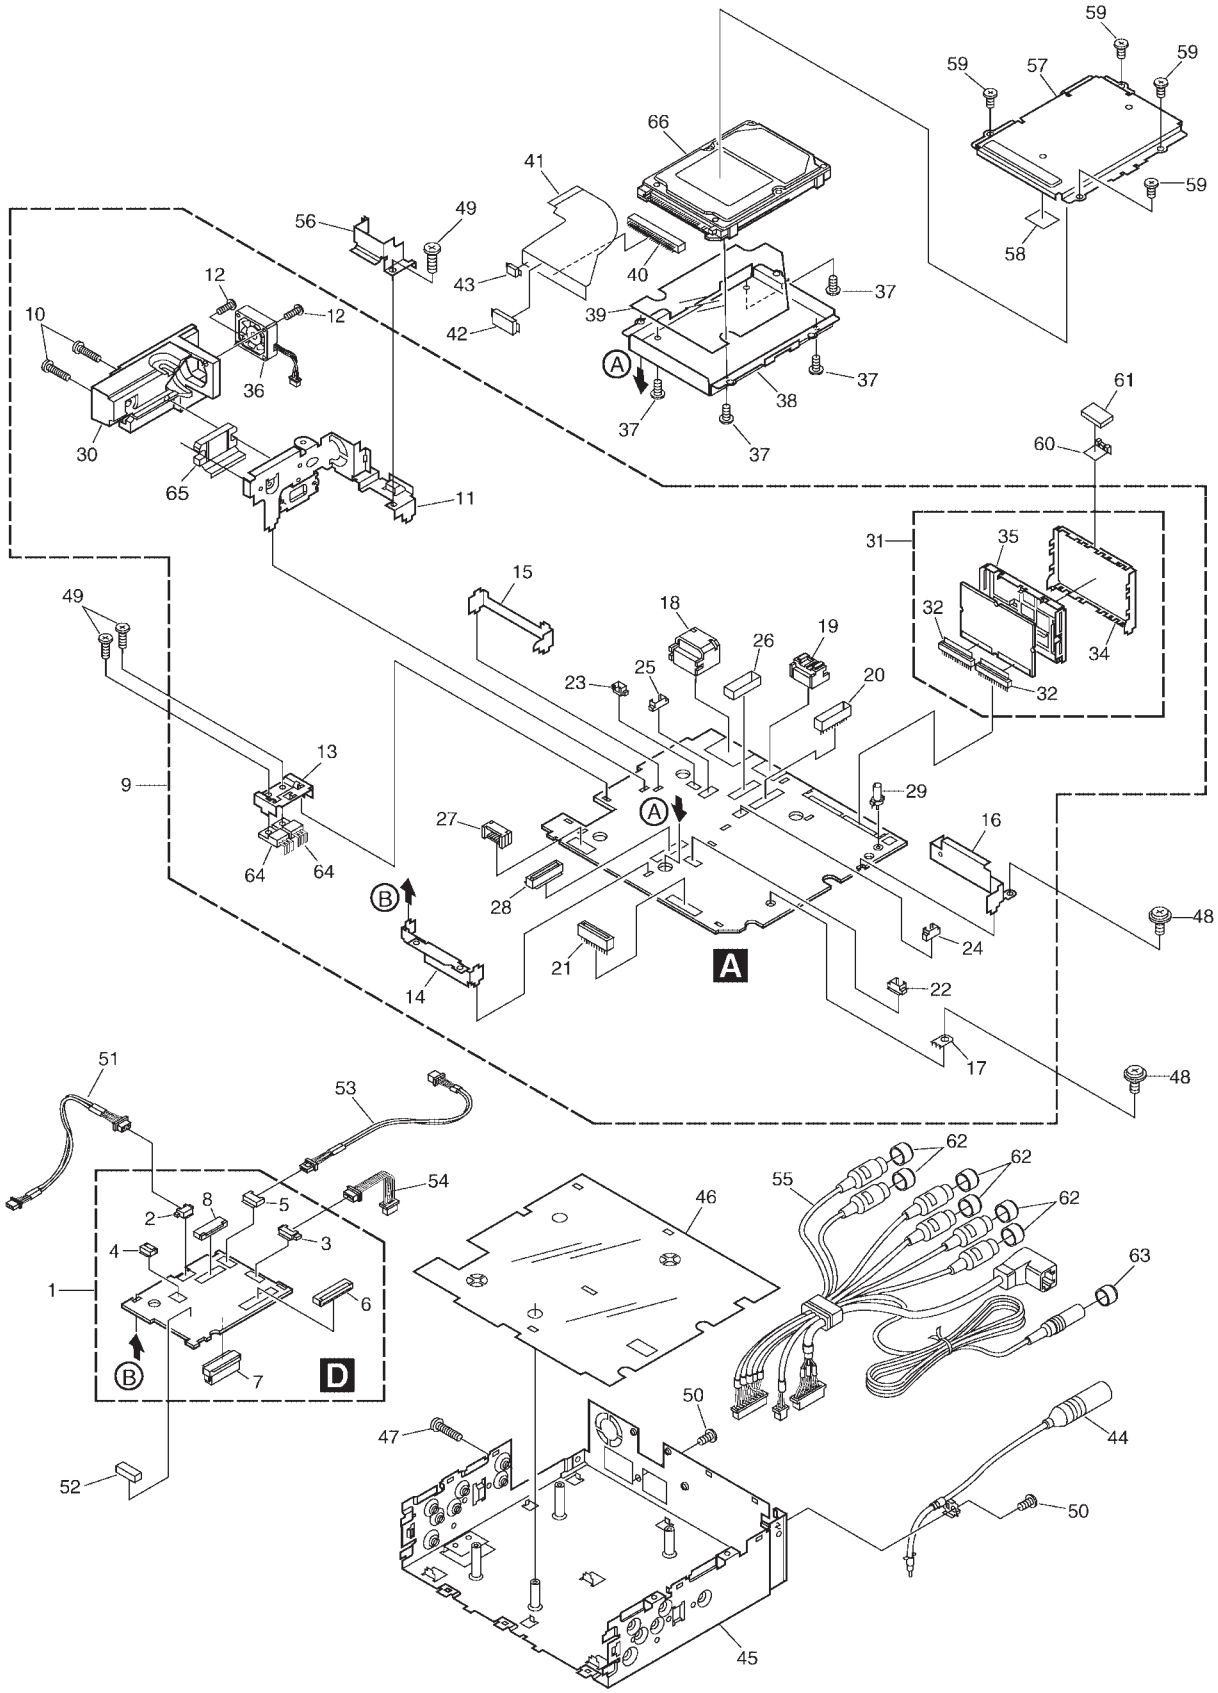

(1) EXTERIOR(2) SECTION PARTS LIST


Mark	No.	Description	Part No.
	1	Digital Unit	CWM7667
	2	Connector(CN3002)	CKS2193
	3	Connector(CN3003)	CKS2195
	4	Connector(CN3301)	CKS3752
	5	Connector(CN3101)	CKS4439
	6	Connector(CN3201)	CKS4512
	7	Connector(CN3001)	CKS4513
	8	Connector(CN3102)	CKS4522
	9	Tuner Amp Unit	See Contrast table(2)
	10	Screw	BMZ26P160FMC
*	11	Holder	CNC9349
	12	Screw(M2.6x14)	CBA1384
*	13	Holder	CNC9350
*	14	Holder	CNC9351
*	15	Holder	CNC9352
*	16	Shield	CNC9365
	17	Terminal(CN202)	CKF1059
	18	Plug(CN901)	CKM1278
	19	Connector(CN702)	CKM1343
	20	Plug(CN101)	CKS1044
	21	Connector(CN801)	CKS1568
	22	Connector(CN371)	CKS2193
	23	Connector(CN591)	CKS3124
	24	Connector(CN131)	CKS3125
	25	Connector(CN701)	CKS3128
	26	Connector(CN351)	CKS3592
	27	Connector(CN802)	CKS4262
	28	Connector(CN703)	CKS4514
	29	Mini Pin Jack(CN451)	CKX1046
	30	Heat Sink	CNR1610
	31	FM/AM Tuner Unit	See Contrast table(2)
	32	Connector(CN1, 2)	CKS4276
	33	•••••	
	34	Case	CNC8713
	35	Holder(SH1)	CNC8708
	36	Fan Motor	CXM1186
	37	Screw	BMZ30P040FMC
*	38	Case	CNC9348
*	39	Insulator	CNM7201
	40	Connector	CKS4493
	41	Flexible PCB	CNP6277
	42	Capacitor(C3206)	CCH1300
	43	Capacitor(C3207)	CSZSR100M16
	44	Antenna Cable	CDH1310
	45	Chassis Unit	See Contrast table(2)
	46	Insulator	CNM7200
	47	Screw	BSZ30P200FMC
	48	Screw	ISS26P055FUC
	49	Screw	BSZ26P080FMC
	50	Screw	BSZ30P050FMC
	51	Cord	CDE6582
	52	Cushion	CNM7228
	53	Cord	CDE6583
	54	Cord	CDE6580
	55	Cord Assy	CDE6856
*	56	Holder	CNC9509
*	57	Cover	CNC9347
*	58	Insulator	CNM7202
	59	Screw	BSZ26P060FMC
	60	Earth Plate	CNC9459
	61	Spacer	CNM7366
	62	Cap	CNV6727
	63	Cap	CNW-829
	64	Transistor(Q913, 921)	2SD2396
	65	IC(IC301)	PAL006A
	66	HDD Assy(Service)	CXX1565

(2) CONTRAST TABLE

DEH-P90HDD/UC, DEH-P900HDD/EW and DEH-P900HDD/ES are constructed the same except for the following:

Mark No.	Symbol and Description	Part No.		
		DEH-P90HDD/UC	DEH-P900HDD/EW	DEH-P900HDD/ES
9	Tuner Amp Unit	CWM7824	CWM7823	CWM7825
31	FM/AM Tuner Unit	CWE1605	CWE1604	CWE1605
45	Chassis Unit	CXB7095	CXB7545	CXB7095

2.7 CD MECHANISM MODULE

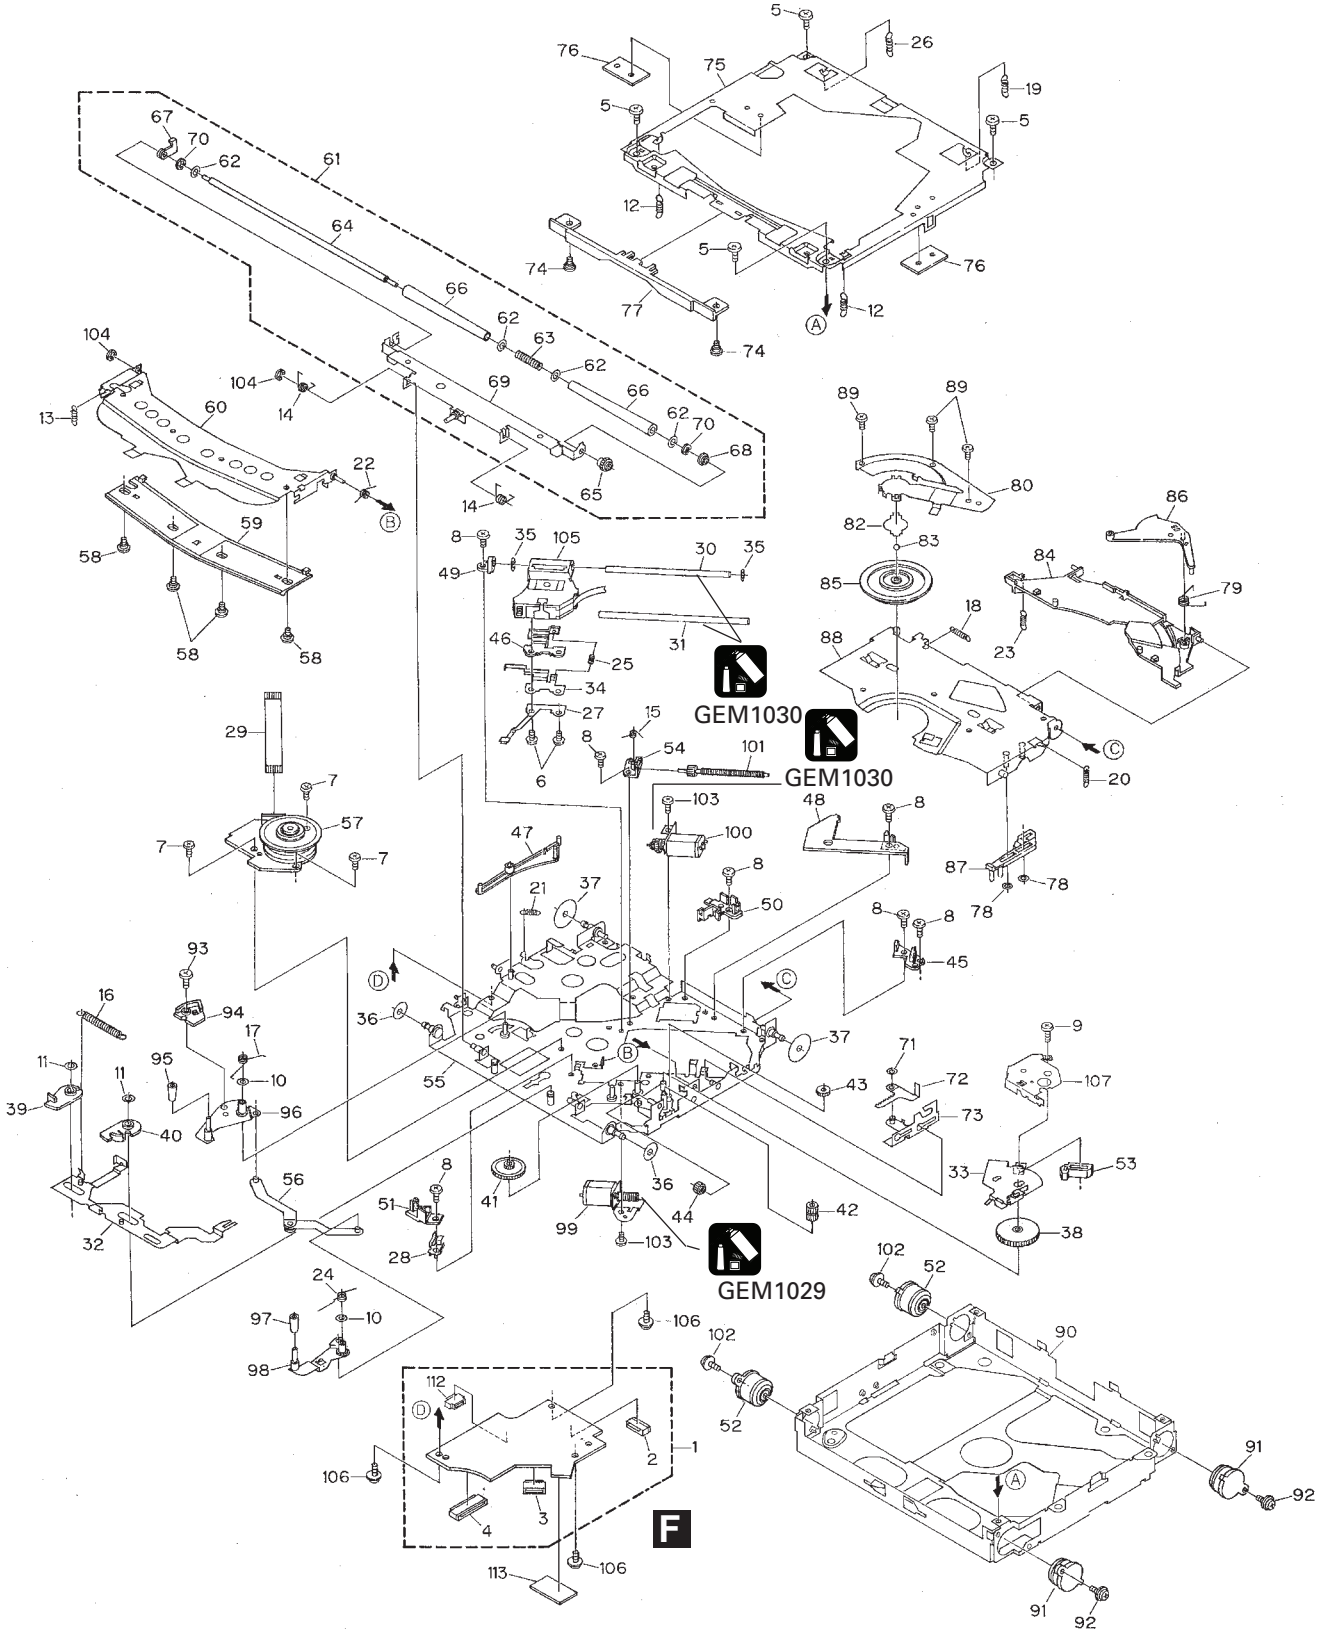

● CD MECHANISM MODULE SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	CD Core Unit	CWX2532
	2	Connector(CN101)	CKS3785
	3	Connector(CN901)	CKS4291
	4	Connector(CN701)	CKS4522
	5	Screw	BSZ20P035FMC
	6	Screw(M2x4)	CBA1362
	7	Screw(M2x2.5)	CBA1510
	8	Screw(M2x3)	CBA1511
	9	Screw(M2x6.2)	CBA1536
	10	Washer	CBF1037
	11	Washer	CBF1064
	12	Spring	CBH2291
	13	Spring	CBH2292
	14	Spring	CBH2293
	15	Spring	CBH2295
	16	Spring	CBH2297
	17	Spring	CBH2298
	18	Spring	CBH2299
	19	Spring	CBH2303
	20	Spring	CBH2304
	21	Spring	CBH2305
	22	Spring	CBH2308
	23	Spring	CBH2309
	24	Spring	CBH2332
	25	Spring	CBH2416
	26	Spring	CBH2434
	27	Spring	CBL1448
	28	Spring	CBL1466
	29	Connector	CDE6099
	30	Shaft	CLA3683
	31	Shaft	CLA3684
	32	Lever	CNC8501
	33	Bracket	CNC8507
	34	Bracket	CNC8509
	35	Cushion	CNM6301
	36	Sheet	CNM6773
	37	Sheet	CNM6774
	38	Gear	CNR1559
	39	Arm	CNV5928
	40	Arm	CNV5929
	41	Gear	CNV5930
	42	Gear	CNV5932
	43	Gear	CNV5931
	44	Gear	CNV5933
	45	Holder	CNV5943
	46	Holder	CNV5944
	47	Arm	CNV5948
	48	Cover	CNV5950
	49	Holder	CNV5951
	50	Holder	CNV6222
	51	Holder	CNV6223
	52	Damper	CNV6426
	53	Holder	CNV6446
	54	Holder	CNV6512
	55	Chassis Unit	CXB4501
	56	Arm Unit	CXB4503
	57	Motor Unit(M3)	CXB6620
	58	Screw(M2x1.2)	CBA1495
	59	Guide	CNV5925
	60	Arm Unit	CXB5311
	61	Loading Arm Assy(-G)	CXB5715
	62	Washer	CBF1060
	63	Spring	CBH2170
*	64	Shaft	CLA3678
*	65	Gear	CNV5934
	66	Roller	CNV6068
	67	Holder	CNV6210
	68	Collar	CNV6439
	69	Arm Unit	CXB5686
	70	Washer	YE20FUC
	71	Washer	CBF1038
	72	Arm	CNC8498
	73	Lever Unit	CXB4502
	74	Screw(M2x1.5)	CBA1509
	75	Frame	CNC8497
	76	Sheet	CNM6951
	77	Guide	CNV5924
	78	Washer	CBF1037
	79	Spring	CBH2300
	80	Spring	CBL1446
	81	•••••	
	82	Spacer	CNM6467
	83	Ball	CNR1189
	84	Guide	CNV5945
	85	Clamper	CNV5946
	86	Arm	CNV5947
	87	Lever	CNV5949
	88	Arm Unit	CXB4505
	89	Screw	JFZ20P020FMC
	90	Frame	CNC8496
	91	Damper	CNV6426
	92	Screw	ISS20P060FMC
	93	Screw(M2x3)	CBA1511
	94	Holder	CNV6341
	95	Roller	CNV6389
	96	Arm Unit	CXB5970
	97	Roller	CNV6389
	98	Arm Unit	CXB5971
	99	Load Motor Assy(-D)(M2)	CXB6340
	100	Carriage Motor Assy(-D)(M1)	CXB6361
	101	Screw Unit(-B)	CXB6363
	102	Screw	ISS20P060FMC
	103	Screw	JFZ20P025FNI
	104	Washer	YE15FUC
	105	Pickup Unit(Service)(P8)	CXX1305
	106	Screw	IMS20P030FMC
*	107	Cover	CNC9151
	108-111	•••••	
	112	Connector(CN301)	CKS4439
	113	Spacer	CNM7805

5. ELECTRICAL PARTS LIST

NOTE:

- Parts whose parts numbers are omitted are subject to being not supplied.
- The part numbers shown below indicate chip components.

Chip Resistor

RS1/○S○○○J,RS1/○○S○○○J

Chip Capacitor (except for CQS.....)

CKS....., CCS....., CSZS.....

A Unit Number : CWM7824(DEH-P90HDD/UC)
Unit Name : Tuner Amp Unit

MISCELLANEOUS

=====Circuit Symbol and No.		===Part Name	Part No.
IC	101	IC	HA12187FP
IC	141	IC	NJM2068MD
IC	142	IC	NJM2068MD
IC	201	IC	NJM2068MD
IC	202	IC	NJM2068MD
IC	203	IC	NJM2068MD
IC	204	IC	NJM2068MD
IC	205	IC	PDG262A
IC	206	IC	TC7WH34FU
IC	291	IC	PD5704A
IC	301	IC	PAL006A
IC	371	IC	TC74VHC126FT
IC	372	IC	TC7SH08FU
IC	373	IC	TC7SH08FU
IC	381	IC	PML011A
IC	551	IC	AK4321VF
IC	552	IC	TC7SET08FU
IC	601	IC	PD5646A
IC	602	IC	TC7S32FU
IC	731	IC	NJU7223DL1-33
IC	741	IC	NJM2870F18
IC	742	IC	NJU7223DL1-33
IC	831	IC	NJM2068MD
IC	911	IC	TC7SET32FU
IC	931	IC	TC7S08FU
IC	961	IC	S-80735ANDZI
IC	971	IC	BA033FP
Q	101	Transistor	2SA1162
Q	102	Transistor	DTC124EU
Q	131	Transistor	2SC2412K
Q	132	Transistor	IMD2A
Q	133	Transistor	2SC2412K
Q	331	Transistor	DTC124EU
Q	332	Transistor	DTC124EU
Q	351	Transistor	IMH3A
Q	352	Transistor	IMH3A
Q	353	Transistor	IMH3A
Q	371	Transistor	IMD2A
Q	381	Transistor	DTC124EU
Q	401	Transistor	2SC2412K
Q	591	Transistor	2SD1859
Q	592	Transistor	IMD2A
Q	761	Transistor	2SB1238
Q	762	Transistor	DTC143EU
Q	771	Transistor	IMD2A
Q	801	Transistor	2SD1760F5
Q	802	Transistor	IMD2A
Q	806	Transistor	2SD1859
Q	807	Transistor	IMD2A
Q	831	Transistor	DTC314TU

=====Circuit Symbol and No.		===Part Name	Part No.
Q	832	Transistor	DTC314TU
Q	833	Transistor	IMD2A
Q	851	Transistor	IMD2A
Q	852	Transistor	2SC2412K
Q	853	Transistor	2SD1859
Q	911	Transistor	2SD1760F5
Q	912	Transistor	IMD2A
Q	913	Transistor	2SD2396
Q	914	Transistor	IMD2A
Q	921	Transistor	2SD2396
Q	922	Transistor	IMD2A
Q	931	Transistor	IMX1
Q	932	Transistor	DTC114EK
Q	951	Transistor	2SA1162
Q	962	Transistor	2SC2412K
Q	971	Transistor	2SB1238
Q	972	Transistor	DTC114EU
Q	973	Transistor	IMD2A
Q	991	Transistor	2SC2412K
Q	992	Transistor	2SC2412K
Q	993	Transistor	IMD2A
Q	994	Transistor	IMD2A
D	131	Diode	MA3039(L)
D	141	Diode	UDZS3R9(B)
D	142	Diode	RB706F-40
D	381	Diode	DAN202U
D	591	Diode	HZS12L(A1)
D	801	Diode Network	DA204U
D	802	Diode Network	DA204U
D	803	Diode Network	DA204U
D	804	Diode Network	DA204U
D	805	Diode	MA3062(M)
D	806	Diode	HZS6L(B1)
D	811	Diode Network	DA204U
D	812	Diode Network	DA204U
D	813	Diode	HZS11L(A1)
D	814	Diode Network	DA204U
D	815	Diode Network	DA204U
D	851	Diode	HZS9L(A2)
D	901	Diode	MPG06G-6415G50
D	902	Diode	MPG06G-6415G50
D	903	Diode	MPG06G-6415G50
D	904	Diode	MPG06G-6415G50
D	911	Diode	MPG06G-6415G50
D	912	Diode	HZS6L(B1)
D	913	Diode	MPG06G-6415G50
D	914	Diode	HZS9L(B1)
D	921	Diode	HZS6L(C2)
D	931	Diode	HZS7L(A1)
D	932	Diode	HZS7L(C3)
D	933	Diode	MPG06G-6415G50
D	951	Diode	DAN202U
D	961	Diode	MA152K
D	971	Diode	IMN10
D	991	Diode	DAN202U

=====Circuit Symbol and No.		===Part Name	Part No.
D	992	Diode	HZS9L(A2)
D	993	Diode	1SS133
D	994	Diode	DAN202U
ZNR	451	Surge Protector	DSPS-201M-S00B
L	101	Inductor	LAU3R3K
L	131	Inductor	CTF1399
L	132	Inductor	CTF1399
L	133	Inductor	CTF1399
L	134	Inductor	CTF1399
L	201	Inductor	CTF1379
L	202	Inductor	CTF1379
L	215	Inductor	CTF1379
L	216	Inductor	CTF1379
L	217	Inductor	CTF1379
L	218	Inductor	CTF1379
L	219	Inductor	CTF1379
L	220	Inductor	CTF1379
L	261	Inductor	CTF1379
L	262	Ferri-Inductor	LAU101K
L	263	Ferri-Inductor	LAU151K
L	291	Inductor	CTF1399
L	361	Filter	CTF1071
L	371	Inductor	CTF1379
L	372	Inductor	CTF1379
L	376	Inductor	LCYC4R7K1608
L	377	Inductor	CTF1357
L	401	Inductor	LAU100K
L	402	Inductor	LCTB4R7K2125
L	404	Ferri-Inductor	LAU2R2K
L	405	Inductor	CTF1399
L	491	Inductor	CTF1399
L	551	Ferri-Inductor	LAU2R2K
L	601	Inductor	LAU100K
L	701	Inductor	CTF1379
L	731	Inductor	CTF1484
L	741	Ferri-Inductor	LAU2R2K
L	742	Inductor	LAU1R0K
L	761	Inductor	LAU100K
L	771	Inductor	LAU100K
L	801	Inductor	LAU100K
L	802	Inductor	CTF1489
L	803	Inductor	CTF1488
L	804	Inductor	CTF1488
L	951	Ferri-Inductor	LAU2R2K
L	971	Ferri-Inductor	LAU2R2K
L	972	Inductor	LAU1R0K
L	973	Ferri-Inductor	LAU2R2K
X	261	Radiator 16.9344MHz	CSS1463
X	291	Radiator 10.00MHz	CSS1428
X	601	Radiator 10.00MHz	CSS1475
VR	141	Semi-fixed 10kΩ(B)	CCP1448
FU	701	Fuse 3.15A	CEK1207
MIC	141	Microphone	CPM1011
		FM/AM Tuner Unit	CWE1605
BZ	641	Buzzer	CPV1050
		Fan Motor	CXM1186

RESISTORS

R	101		RS1/16S101J
R	102		RS1/16S620J
R	103		RS1/16S101J
R	104		RS1/16S222J
R	105		RS1/16S103J
R	106		RS1/16S562J
R	107		RS1/16S332J
R	108		RS1/16S181J
R	109		RS1/16S181J
R	110		RS1/16S223J
R	111		RS1/16S223J
R	112		RS1/16S102J
R	113		RS1/16S102J
R	114		RS1/16S0R0J
R	131		RS1/16S104J
R	132		RS1/16S222J
R	133		RS1/16S103J
R	134		RS1/16S561J
R	135		RS1/16S223J
R	136		RS1/16S473J
R	137		RS1/16S153J
R	138		RS1/16S683J
R	139		RS1/16S152J
R	140		RS1/16S682J
R	141		RS1/16S222J
R	142		RS1/16S152J
R	143		RS1/16S152J
R	144		RS1/16S104J
R	145		RS1/16S101J
R	146		RS1/16S563J
R	147		RS1/16S102J
R	148		RS1/16S103J
R	149		RS1/16S103J
R	150		RS1/16S153J
R	151		RS1/16S153J
R	152		RS1/16S223J
R	153		RN1/16SE4702D
R	154		RN1/16SE4702D
R	160		RS1/16S473J
R	161		RS1/16S272J
R	162		RS1/16S272J
R	163		RS1/16S162J
R	164		RS1/16S162J
R	171		RS1/16S0R0J
R	172		RS1/16S0R0J
R	201		RS1/16S474J
R	202		RS1/16S474J
R	203		RS1/16S223J
R	204		RS1/16S223J
R	205		RS1/16S472J
R	206		RS1/16S472J
R	207		RS1/16S225J
R	208		RS1/16S155J
R	215		RS1/16S474J
R	216		RS1/16S474J
R	217		RS1/16S474J
R	218		RS1/16S474J
R	219		RS1/16S474J
R	220		RS1/16S474J
R	221		RS1/16S222J
R	222		RS1/16S222J
R	223		RS1/16S222J
R	224		RS1/16S222J
R	225		RS1/16S222J
R	226		RS1/16S222J
R	227		RS1/16S333J
R	228		RS1/16S333J
R	229		RS1/16S333J
R	230		RS1/16S333J
R	231		RS1/16S333J
R	232		RS1/16S333J
R	233		RS1/16S273J
R	234		RS1/16S273J
R	235		RS1/16S273J
R	236		RS1/16S273J

Circuit Symbol and No.	Part Name	Part No.
R 237		RS1/16S273J
R 238		RS1/16S273J
R 239		RS1/16S183J
R 240		RS1/16S183J
R 241		RS1/16S183J
R 242		RS1/16S183J
R 243		RS1/16S183J
R 244		RS1/16S183J
R 245		RS1/16S273J
R 246		RS1/16S273J
R 247		RS1/16S273J
R 248		RS1/16S273J
R 249		RS1/16S273J
R 250		RS1/16S273J
R 251		RS1/16S103J
R 252		RS1/16S103J
R 253		RS1/16S103J
R 254		RS1/16S103J
R 261		RS1/16S331J
R 262		RAB4C221J
R 263		RS1/16S221J
R 264		RS1/16S221J
R 265		RS1/16S221J
R 266		RS1/16S102J
R 267		RS1/16S221J
R 282		RS1/16S103J
R 283		RS1/16S103J
R 284		RS1/16S153J
R 291		RAB4C681J
R 292		RS1/16S473J
R 293		RS1/16S102J
R 294		RS1/16S473J
R 295		RS1/16S102J
R 296		RS1/16S105J
R 297		RS1/16S102J
R 298		RS1/16S471J
R 299		RS1/16S102J
R 300		RAB4C473J
R 301		RAB4C681J
R 302		RS1/16S222J
R 303		RS1/16S104J
R 304		RAB4C471J
R 305		RS1/16S473J
R 306		RS1/16S102J
R 307		RS1/16S102J
R 308		RS1/16S473J
R 309		RS1/16S102J
R 310		RS1/16S102J
R 312		RS1/16S104J
R 313		RS1/16S222J
R 314		RS1/16S222J
R 315		RS1/16S473J
R 316		RAB4C0R0J
R 317		RS1/16S102J
R 318		RS1/16S473J
R 321		RS1/16S472J
R 322		RS1/16S104J
R 325		RS1/16S102J
R 326		RS1/16S0R0J
R 327		RS1/16S473J
R 328		RS1/16S473J
R 329		RAB4C681J
R 331		RS1/16S103J
R 332		RS1/16S103J
R 333		RS1/16S103J
R 334		RS1/16S331J
R 351		RS1/16S821J
R 352		RS1/16S821J
R 353		RS1/16S821J
R 354		RS1/16S821J
R 355		RS1/16S821J
R 356		RS1/16S821J
R 357		RS1/16S223J
R 358		RS1/16S223J
R 359		RS1/16S223J
R 360		RS1/16S223J
R 361		RS1/16S223J
R 362		RS1/16S223J
R 366		RS1/16S101J
R 367		RS1/16S0R0J
R 369		RS1/16S0R0J
R 371		RS1/16S102J
R 372		RS1/16S102J
R 373		RS1/16S102J
R 374		RS1/16S102J
R 375		RS1/16S102J
R 376		RS1/16S102J
R 377		RS1/16S102J
R 378		RS1/16S102J
R 379		RS1/16S221J
R 380		RS1/16S221J
R 381		RS1/16S682J
R 385		RS1/10S0R0J
R 401		RS1/16S473J
R 402		RS1/16S473J
R 403		RS1/16S681J
R 404		RS1/16S681J
R 409		RS1/16S681J
R 410		RS1/16S103J
R 411		RS1/16S681J
R 412		RS1/16S681J
R 413		RS1/16S681J
R 414		RS1/16S473J
R 415		RS1/16S472J
R 416		RS1/16S473J
R 417		RS1/16S473J
R 418		RS1/16S473J
R 419		RS1/16S222J
R 420		RS1/16S222J
R 423		RS1/16S0R0J
R 424		RS1/16S393J
R 430		RS1/16S0R0J
R 431		RS1/16S0R0J
R 507		RS1/16S0R0J
R 551		RS1/16S222J
R 552		RS1/16S102J
R 553		RS1/16S102J
R 554		RS1/16S102J
R 555		RS1/16S222J
R 556		RS1/16S222J
R 557		RS1/16S222J
R 558		RS1/16S681J
R 559		RS1/16S681J
R 560		RS1/16S332J
R 561		RS1/16S332J
R 562		RS1/16S332J
R 563		RS1/16S332J
R 564		RS1/16S101J
R 565		RS1/16S101J
R 591		RS1/10S1R0J

Circuit Symbol and No.	Part Name	Part No.
R 592		RS1/16S102J
R 593		RS1/16S102J
R 601		RS1/16S473J
R 602		RS1/16S102J
R 603		RS1/16S473J
R 604		RS1/16S472J
R 605		RS1/16S221J
R 606		RS1/16S682J
R 607		RS1/16S221J
R 608		RS1/16S682J
R 609		RS1/16S102J
R 610		RS1/16S102J
R 613		RS1/16S473J
R 615		RS1/16S221J
R 616		RS1/16S682J
R 617		RS1/16S221J
R 618		RS1/16S682J
R 619		RS1/16S221J
R 620		RS1/16S473J
R 621		RS1/16S221J
R 622		RS1/16S682J
R 623		RS1/16S102J
R 624		RS1/16S473J
R 625		RS1/16S473J
R 627		RS1/16S473J
R 631		RS1/16S473J
R 632		RS1/16S0R0J
R 633		RS1/16S0R0J
R 634		RS1/16S0R0J
R 635		RS1/16S0R0J
R 636		RS1/16S0R0J
R 637		RS1/16S473J
R 639		RS1/16S473J
R 641		RS1/16S102J
R 651		RS1/16S473J
R 701		RS1/10S102J
R 702		RS1/10S102J
R 703		RS1/10S102J
R 704		RS1/10S102J
R 705		RS1/10S102J
R 706		RS1/10S0R0J
R 761		RS1/16S472J
R 762		RS1/16S102J
R 801		RS1/10S222J
R 802		RS1/10S222J
R 803		RS1/10S222J
R 804		RS1/10S103J
R 805		RS1/10S472J
R 810		RS1/16S221J
R 811		RS1/16S221J
R 812		RS1/16S821J
R 813		RS1/16S681J
R 817		RS1/16S473J
R 820		RS1/10S1R0J
R 823		RS1/10S222J
R 824		RS1/10S222J
R 825		RS1/10S221J
R 826		RS1/10S221J
R 831		RS1/16S102J
R 832		RS1/16S102J
R 833		RS1/16S333J
R 834		RS1/16S333J
R 835		RS1/16S473J
R 836		RS1/16S473J
R 837		RS1/16S223J
R 838		RS1/16S223J
R 839		RS1/16S102J
R 840		RS1/16S102J
R 851		RS1/16S182J
R 855		RS1/16S560J
R 856		RS1/16S222J
R 857		RS1/16S222J
R 858		RS1/16S222J
R 859		RS1/16S102J
R 912		RS1/16S562J
R 913		RS1/16S101J
R 914		RS1/10S0R0J
R 915		RS1/16S123J
R 916		RS1/16S471J
R 921		RS1/16S681J
R 922		RS1/16S561J
R 931		RS1/10S472J
R 932		RS1/16S473J
R 933		RS1/16S103J
R 934		RS1/16S473J
R 935		RS1/16S104J
R 936		RS1/16S103J
R 937		RS1/16S473J
R 938		RS1/16S102J
R 951		RS1/10S153J
R 952		RS1/16S472J
R 953		RS1/16S472J
R 954		RS1/16S102J
R 961		RS1/16S102J
R 962		RS1/16S102J
R 963		RS1/16S473J
R 964		RS1/16S822J
R 965		RS1/16S102J
R 971		RS1/16S472J
R 972		RS1/16S102J
R 973		RS1/16S473J
R 974		RS1/16S473J
R 975		RS1/16S473J
R 976		RS1/16S0R0J
R 987		RS1/16S101J
R 991		RS1/16S223J
R 992		RS1/16S473J
R 993		RS1/16S104J
R 994		RS1/16S473J
R 995		RS1/16S224J
R 996		RS1/16S473J
R 997		RS1/16S102J

CAPACITORS

Circuit Symbol and No.	Part Name	Part No.
C 101		CKSRYB104K16
C 102		CKSRYB104K16
C 103		CKSRYB104K16
C 105		CCSRCH101J50
C 106		CCSRCH101J50
C 107		CCSRCH101J50
C 108		CCSRCH101J50
C 131		CKSRYB681K50
C 132		CEAL101M10
C 133		CKSQYB225K10
C 141		CEJQ470M10
C 142		CKSRYB105K10
C 143		CKSRYB105K10
C 144		CCSRCH101J50
C 145		CKSYB475K16

=====Circuit Symbol and No.	===Part Name	Part No.
C 146		CKSRYB105K10
C 147		CKSRYB104K16
C 148		CKSYB475K16
C 149		CKSRYB474K10
C 150		CKSRYB105K10
C 151		CKSRYB104K16
C 152		CKSYB106K6R3
C 153		CKSRYB104K16
C 161		CKSRYB183K25
C 162		CKSRYB183K25
C 201		CKSRYB105K10
C 202		CKSRYB105K10
C 203		CKSRYB102K50
C 204		CKSRYB102K50
C 205		CCSRCH221J50
C 206		CCSRCH221J50
C 209		CKSQYB225K10
C 210		CKSQYB225K10
C 213		CKSYB475K10
C 215		CKSRYB105K10
C 216		CKSRYB105K10
C 217		CKSRYB105K10
C 218		CKSRYB105K10
C 219		CKSRYB105K10
C 220		CKSRYB105K10
C 221		CCSRCH221J50
C 222		CCSRCH221J50
C 223		CCSRCH221J50
C 224		CCSRCH221J50
C 225		CCSRCH221J50
C 226		CCSRCH221J50
C 227		CCSRCH151J50
C 228		CCSRCH151J50
C 229		CCSRCH151J50
C 230		CCSRCH151J50
C 231		CCSRCH151J50
C 232		CCSRCH151J50
C 233		CCSRCH151J50
C 234		CCSRCH151J50
C 235		CCSRCH151J50
C 236		CCSRCH151J50
C 237		CCSRCH151J50
C 238		CCSRCH151J50
C 239		CKSQYB225K10
C 240		CKSQYB225K10
C 241		CKSQYB225K10
C 242		CKSQYB225K10
C 243		CKSQYB225K10
C 244		CKSQYB225K10
C 251		CKSRYB105K10
C 252		CKSRYB105K10
C 253		CKSRYB105K10
C 254		CKSRYB105K10
C 255		CKSRYB105K10
C 256		CKSRYB105K10
C 257		CSZSR100M16
C 258		CSZSR100M16
C 259		CKSYB475K10
C 261		CKSRYB102K50
C 262		CKSRYB102K50
C 263		CKSYB475K10
C 264		CKSRYB104K16
C 265		CKSRYB104K16
C 266		CKSRYB104K16
C 267		CKSRYB104K16

=====Circuit Symbol and No.	===Part Name	Part No.
C 268		CKSRYB104K16
C 269		CKSRYB104K16
C 270		CKSRYB104K16
C 271		CCSRCH180J50
C 272		CCSRCH180J50
C 273		CKSRYB104K16
C 274		CKSRYB104K16
C 275		CKSRYB104K16
C 276		CKSRYB104K16
C 277		CKSRYB104K16
C 278		CKSYB475K10
C 279		CEV101M6R3
C 280		CEV221M4
C 281		CKSRYB102K50
C 282		CKSRYB104K16
C 283		CKSRYB104K16
C 284		CKSYB475K10
C 285		CKSRYB104K16
C 286		CKSRYB104K16
C 287		CKSRYB105K10
C 289		CKSRYB103K50
C 290		CKSRYB103K50
C 291		CKSYB106K6R3
C 301		CCSRCH101J50
C 302		CCSRCH101J50
C 303		CCSRCH101J50
C 304		CCSRCH101J50
C 305		CCSRCH101J50
C 306		CCSRCH101J50
C 307		CKSRYB103K50
C 309		CCSRCH101J50
C 310		CCSRCH101J50
C 331		CKSRYB474K10
C 332		CKSRYB474K10
C 333		CKSRYB474K10
C 334		CKSRYB474K10
C 335		CKSRYB474K10
C 336		CKSRYB474K10
C 337		CKSRYB474K10
C 338		CKSRYB474K10
C 339		CEHAR330M10
C 340	3300µF/16V	CCH1125
C 341		CKSRYB104K16
C 342		CEHAR100M16
C 343		CKSYB225K16
C 344		CKSYB225K16
C 351		CEAL100M16
C 352		CEAL100M16
C 353		CEAL100M16
C 354		CEAL100M16
C 355		CEAL100M16
C 356		CEAL100M16
C 357		CCSRCH221J50
C 358		CCSRCH221J50
C 359		CCSRCH221J50
C 360		CCSRCH221J50
C 361		CCSRCH221J50
C 362		CCSRCH221J50
C 370		CKSRYB105K10
C 371		CKSRYB103K50
C 372		CKSRYB103K50
C 376		CCSRCH7R0D50
C 381		CKSRYB104K16
C 382		CSZSR100M10
C 383		CSZSR100M10

=====Circuit Symbol and No.	Part Name	Part No.
C 384		CKSRYB105K10
C 385		CKSQYB225K10
C 386		CKSQYB225K10
C 387		CKSQYB225K10
C 388		CKSQYB225K10
C 389		CKSRYB105K10
C 390		CKSRYB105K10
C 391		CKSRYB105K10
C 392		CKSRYB104K16
C 393		CKSRYB472K50
C 394		CKSRYB472K50
C 403		CKSRYB473K50
C 404		CEJQ101M10
C 405		CKSRYB103K50
C 406		CEJQ220M10
C 407		CKSQYB103K50
C 408		CKSRYB223K50
C 409		CKSRYB223K50
C 411		CKSRYB472K50
C 416		CKSRYB473K50
C 420		CCSRCH101J50
C 421		CKSRYB104K16
C 422		CKSRYB104K16
C 424		CKSRYB103K50
C 512		CKSRYB104K16
C 551		CEAL470M10
C 552		CEAL100M16
C 553		CEAL100M16
C 554		CKSRYB104K16
C 555		CKSRYB104K16
C 556		CKSRYB104K16
C 557		CKSRYB104K16
C 558		CKSRYB104K16
C 559		CKSRYB105K10
C 560		CKSRYB105K10
C 561		CKSRYB222K50
C 562		CKSRYB222K50
C 563		CKSRYB103K50
C 591		CEJQ100M16
C 592		CKSRYB103K50
C 593		CKSRYB103K50
C 601		CCSRCH220J50
C 602		CCSRCH150J50
C 604		CKSRYB103K50
C 605		CKSYB475K10
C 607		CCSRCH101J50
C 631		CKSRYB103K50
C 632		CKSRYB103K50
C 633		CKSRYB103K50
C 701		CKSYB225K16
C 702		CKSQYB104K16
C 703		CKSYB225K16
C 704		CKSQYB104K16
C 705		CKSQYB104K16
C 706		CKSQYB104K16
C 707		CKSYB225K16
C 708		CEAL101M10
C 709		CKSYB225K16
C 710		CKSRYB104K16
C 731		CKSRYB103K50
C 732		CKSRYB103K50
C 733		CEAL220M16
C 734		CEAL101M10
C 735		CKSRYB104K16
C 736		CKSRYB104K16

=====Circuit Symbol and No.	Part Name	Part No.
C 741		CKSRYB103K50
C 742		CKSRYB103K50
C 743		CEAL470M6R3
C 744		CKSRYB104K16
C 745		CKSRYB104K16
C 747		CKSYB475K10
C 748		CKSRYB103K50
C 749		CEAL470M6R3
C 750		CKSRYB105K10
C 755		CKSRYB104K16
C 761		CKSRYB103K50
C 762		CKSRYB103K50
C 763		CEAL220M16
C 771		CKSRYB103K50
C 772		CKSRYB103K50
C 773		CEAL220M16
C 805		CEJQ470M10
C 807		CKSRYB102K50
C 808		CKSYB475K16
C 809		CKSRYB104K16
C 810		CEJQ470M10
C 811		CKSRYB103K50
C 812		CKSYB475K16
C 814		CKSRYB103K50
C 815		CKSRYB104K16
C 816		CEJQ470M10
C 817		CKSYB475K16
C 818		CEVQ220M16
C 820		CKSYB475K16
C 827		CKSRYB103K50
C 828		CCSRCH101J50
C 831		CCSRCH470J50
C 832		CCSRCH470J50
C 833		CKSYB475K10
C 835		CKSYB475K10
C 836		CKSYB475K10
C 837		CKSYB475K10
C 838		CKSYB475K10
C 839		CKSRYB105K10
C 840		CKSRYB105K10
C 851		CKSRYB104K16
C 902		CKSRYB102K50
C 903		CKSRYB102K50
C 904		CKSRYB102K50
C 905		CKSRYB102K50
C 906		CKSRYB102K50
C 907		CKSRYB102K50
C 908		CKSRYB102K50
C 909		CKSRYB102K50
C 911		CEHAT102M16
C 912		CKSRYB103K50
C 913		CEAL470M10
C 914		CKSRYB103K50
C 915		CKSRYB103K50
C 916		CEAL470M16
C 917		CKSRYB103K50
C 918	2200µF/16V	CCH1439
C 921		CEALR33M50
C 922		CEAL470M10
C 923		CKSRYB103K50
C 931		CKSYB105K16
C 933		CKSRYB103K50
C 961		CKSRYB102K50
C 962		CKSRYB104K16
C 963		CEJQ2R2M50

=====Circuit Symbol and No.		===Part Name	Part No.
C	971		CKSRYB104K16
C	972		CKSYB106K6R3
C	973		CKSRYB103K50
C	974		CKSRYB103K50
C	975		CEVQ220M16
C	976		CKSRYB103K50
C	977		CKSYB475K16
C	978		CKSRYB103K50
C	979		CEAL470M16
C	980		CKSRYB103K50
C	981		CEAL220M16
C	982		CEALR33M50
C	991		CEAL220M16

A Unit Number : CWM7823(DEH-P900HDD/EW)
Unit Name : Tuner Amp Unit

MISCELLANEOUS

IC	101	IC	HA12187FP
IC	141	IC	NJM2068MD
IC	142	IC	NJM2068MD
IC	201	IC	NJM2068MD
IC	202	IC	NJM2068MD
IC	203	IC	NJM2068MD
IC	204	IC	NJM2068MD
IC	205	IC	PDG262A
IC	206	IC	TC7WH34FU
IC	291	IC	PD5704A
IC	301	IC	PAL006A
IC	371	IC	TC74VHC126FT
IC	372	IC	TC7SH08FU
IC	373	IC	TC7SH08FU
IC	381	IC	PML011A
IC	501	IC	PM4009A
IC	551	IC	AK4321VF
IC	552	IC	TC7SET08FU
IC	601	IC	PD5647A
IC	602	IC	TC7S32FU
IC	731	IC	NJU7223DL1-33
IC	741	IC	NJM2870F18
IC	742	IC	NJU7223DL1-33
IC	831	IC	NJM2068MD
IC	911	IC	TC7SET32FU
IC	931	IC	TC7S08FU
IC	961	IC	S-80735ANDZI
IC	971	IC	BA033FP
Q	101	Transistor	2SA1162
Q	102	Transistor	DTC124EU
Q	131	Transistor	2SC2412K
Q	132	Transistor	IMD2A
Q	133	Transistor	2SC2412K
Q	171	Transistor	2SD1757K
Q	172	Transistor	2SD1757K
Q	173	Transistor	IMH3A
Q	174	Transistor	DTA114EU
Q	175	Transistor	2SC2412K
Q	331	Transistor	DTC124EU
Q	332	Transistor	DTC124EU
Q	351	Transistor	IMH3A
Q	352	Transistor	IMH3A
Q	353	Transistor	IMH3A
Q	371	Transistor	IMD2A
Q	381	Transistor	DTC124EU
Q	401	Transistor	2SC2412K
Q	402	Transistor	2SC2412K
Q	501	Transistor	DTA123EU
Q	591	Transistor	2SD1859
Q	592	Transistor	IMD2A

=====Circuit Symbol and No.		===Part Name	Part No.
Q	761	Transistor	2SB1238
Q	762	Transistor	DTC143EU
Q	771	Transistor	IMD2A
Q	801	Transistor	2SD1760F5
Q	802	Transistor	IMD2A
Q	806	Transistor	2SD1859
Q	807	Transistor	IMD2A
Q	831	Transistor	DTC314TU
Q	832	Transistor	DTC314TU
Q	833	Transistor	IMD2A
Q	851	Transistor	IMD2A
Q	852	Transistor	2SC2412K
Q	853	Transistor	2SD1859
Q	911	Transistor	2SD1760F5
Q	912	Transistor	IMD2A
Q	913	Transistor	2SD2396
Q	914	Transistor	IMD2A
Q	921	Transistor	2SD2396
Q	922	Transistor	IMD2A
Q	931	Transistor	IMX1
Q	932	Transistor	DTC114EK
Q	951	Transistor	2SA1162
Q	962	Transistor	2SC2412K
Q	971	Transistor	2SB1238
Q	972	Transistor	DTC114EU
Q	973	Transistor	IMD2A
Q	991	Transistor	2SC2412K
Q	992	Transistor	2SC2412K
Q	993	Transistor	IMD2A
Q	994	Transistor	IMD2A
D	131	Diode	MA3039(L)
D	141	Diode	UDZS3R9(B)
D	142	Diode	RB706F-40
D	381	Diode	DAN202U
D	591	Diode	HZS12L(A1)
D	801	Diode Network	DA204U
D	802	Diode Network	DA204U
D	803	Diode Network	DA204U
D	804	Diode Network	DA204U
D	805	Diode	MA3062(M)
D	806	Diode	HZS6L(B1)
D	811	Diode Network	DA204U
D	812	Diode Network	DA204U
D	813	Diode	HZS11L(A1)
D	814	Diode Network	DA204U
D	815	Diode Network	DA204U
D	851	Diode	HZS9L(A2)
D	901	Diode	MPG06G-6415G50
D	902	Diode	MPG06G-6415G50
D	903	Diode	MPG06G-6415G50
D	904	Diode	MPG06G-6415G50
D	911	Diode	MPG06G-6415G50
D	912	Diode	HZS6L(B1)
D	913	Diode	MPG06G-6415G50
D	914	Diode	HZS9L(B1)
D	921	Diode	HZS6L(C2)
D	931	Diode	HZS7L(A1)
D	932	Diode	HZS7L(C3)
D	933	Diode	MPG06G-6415G50
D	951	Diode	DAN202U
D	961	Diode	MA152K
D	971	Diode	IMN10
D	991	Diode	DAN202U
D	992	Diode	HZS9L(A2)
D	993	Diode	1SS133

=====Circuit Symbol and No.		===Part Name	Part No.
D	994	Diode	DAN202U
ZNR	451	Surge Protector	DSPS-201M-S00B
L	101	Inductor	LAU3R3K
L	102	Inductor	CTF1399
L	131	Inductor	CTF1399
L	132	Inductor	CTF1399
L	133	Inductor	CTF1399
L	134	Inductor	CTF1399
L	201	Inductor	CTF1379
L	202	Inductor	CTF1379
L	215	Inductor	CTF1379
L	216	Inductor	CTF1379
L	217	Inductor	CTF1379
L	218	Inductor	CTF1379
L	219	Inductor	CTF1379
L	220	Inductor	CTF1379
L	261	Inductor	CTF1379
L	262	Ferri-Inductor	LAU101K
L	263	Ferri-Inductor	LAU151K
L	291	Inductor	CTF1399
L	361	Filter	CTF1071
L	371	Inductor	CTF1379
L	372	Inductor	CTF1379
L	376	Inductor	LCYC4R7K1608
L	377	Inductor	CTF1357
L	401	Inductor	LAU100K
L	402	Inductor	LCTB4R7K2125
L	404	Ferri-Inductor	LAU2R2K
L	405	Inductor	CTF1399
L	491	Inductor	CTF1399
L	501	Inductor	LCTB1R0K2125
L	502	Inductor	CTF1378
L	504	Inductor	CTF1378
L	505	Inductor	CTF1389
L	506	Inductor	CTF1378
L	551	Ferri-Inductor	LAU2R2K
L	601	Inductor	LAU100K
L	701	Inductor	CTF1379
L	731	Inductor	CTF1484
L	741	Ferri-Inductor	LAU2R2K
L	742	Inductor	LAU1R0K
L	761	Inductor	LAU100K
L	771	Inductor	LAU100K
L	801	Inductor	LAU100K
L	802	Inductor	CTF1489
L	803	Inductor	CTF1488
L	804	Inductor	CTF1488
L	951	Ferri-Inductor	LAU2R2K
L	971	Ferri-Inductor	LAU2R2K
L	972	Inductor	LAU1R0K
L	973	Ferri-Inductor	LAU2R2K
X	261	Radiator 16.9344MHz	CSS1463
X	291	Radiator 10.00MHz	CSS1428
X	501	Crystal Resonator 3.648MHz	CSS1447
X	601	Radiator 10.00MHz	CSS1475
VR	141	Semi-fixed 10kΩ(B)	CCP1448
FU	701	Fuse 3.15A	CEK1207
MIC	141	Microphone	CPM1011
		FM/AM Tuner Unit	CWE1604
BZ	641	Buzzer	CPV1050
		Fan Motor	CXM1186

RESISTORS

R	101		RS1/16S101J
R	102		RS1/16S620J
R	103		RS1/16S101J
R	104		RS1/16S222J
R	105		RS1/16S103J
R	106		RS1/16S562J
R	107		RS1/16S332J
R	108		RS1/16S181J
R	109		RS1/16S181J
R	110		RS1/16S223J
R	111		RS1/16S223J
R	112		RS1/16S102J
R	113		RS1/16S102J
R	131		RS1/16S104J
R	132		RS1/16S222J
R	133		RS1/16S103J
R	134		RS1/16S561J
R	135		RS1/16S223J
R	136		RS1/16S473J
R	137		RS1/16S153J
R	138		RS1/16S683J
R	139		RS1/16S152J
R	140		RS1/16S682J
R	141		RS1/16S222J
R	142		RS1/16S152J
R	143		RS1/16S152J
R	144		RS1/16S104J
R	145		RS1/16S101J
R	146		RS1/16S563J
R	147		RS1/16S102J
R	148		RS1/16S103J
R	149		RS1/16S103J
R	150		RS1/16S153J
R	151		RS1/16S153J
R	152		RS1/16S223J
R	153		RN1/16SE4702D
R	154		RN1/16SE4702D
R	160		RS1/16S473J
R	161		RS1/16S162J
R	162		RS1/16S162J
R	163		RS1/16S272J
R	164		RS1/16S272J
R	165		RS1/16S104J
R	166		RS1/16S104J
R	173		RS1/16S224J
R	174		RS1/16S224J
R	175		RS1/16S222J
R	176		RS1/16S222J
R	177		RS1/16S223J
R	178		RS1/16S223J
R	179		RS1/16S224J
R	180		RS1/16S473J
R	201		RS1/16S474J
R	202		RS1/16S474J
R	203		RS1/16S223J
R	204		RS1/16S223J
R	205		RS1/16S472J
R	206		RS1/16S472J
R	207		RS1/16S225J
R	208		RS1/16S155J
R	215		RS1/16S474J
R	216		RS1/16S474J
R	217		RS1/16S474J
R	218		RS1/16S474J
R	219		RS1/16S474J
R	220		RS1/16S474J
R	221		RS1/16S222J
R	222		RS1/16S222J
R	223		RS1/16S222J
R	224		RS1/16S222J

=====Circuit Symbol and No.	===Part Name	Part No.
R 225		RS1/16S222J
R 226		RS1/16S222J
R 227		RS1/16S333J
R 228		RS1/16S333J
R 229		RS1/16S333J
R 230		RS1/16S333J
R 231		RS1/16S333J
R 232		RS1/16S333J
R 233		RS1/16S273J
R 234		RS1/16S273J
R 235		RS1/16S273J
R 236		RS1/16S273J
R 237		RS1/16S273J
R 238		RS1/16S273J
R 239		RS1/16S183J
R 240		RS1/16S183J
R 241		RS1/16S183J
R 242		RS1/16S183J
R 243		RS1/16S183J
R 244		RS1/16S183J
R 245		RS1/16S273J
R 246		RS1/16S273J
R 247		RS1/16S273J
R 248		RS1/16S273J
R 249		RS1/16S273J
R 250		RS1/16S273J
R 251		RS1/16S103J
R 252		RS1/16S103J
R 253		RS1/16S103J
R 254		RS1/16S103J
R 261		RS1/16S331J
R 262		RAB4C221J
R 263		RS1/16S221J
R 264		RS1/16S221J
R 265		RS1/16S221J
R 266		RS1/16S102J
R 267		RS1/16S221J
R 282		RS1/16S103J
R 283		RS1/16S103J
R 284		RS1/16S153J
R 291		RAB4C681J
R 292		RS1/16S473J
R 293		RS1/16S102J
R 294		RS1/16S473J
R 295		RS1/16S102J
R 296		RS1/16S105J
R 297		RS1/16S102J
R 298		RS1/16S471J
R 299		RS1/16S102J
R 300		RAB4C473J
R 301		RAB4C681J
R 302		RS1/16S222J
R 303		RS1/16S104J
R 304		RAB4C471J
R 305		RS1/16S473J
R 306		RS1/16S102J
R 307		RS1/16S102J
R 308		RS1/16S473J
R 309		RS1/16S102J
R 310		RS1/16S102J
R 312		RS1/16S104J
R 313		RS1/16S222J
R 314		RS1/16S222J
R 315		RS1/16S473J
R 316		RAB4C0R0J

=====Circuit Symbol and No.	===Part Name	Part No.
R 317		RS1/16S102J
R 318		RS1/16S473J
R 321		RS1/16S472J
R 322		RS1/16S104J
R 325		RS1/16S102J
R 326		RS1/16S0R0J
R 327		RS1/16S473J
R 328		RS1/16S473J
R 329		RAB4C681J
R 331		RS1/16S103J
R 332		RS1/16S103J
R 333		RS1/16S103J
R 334		RS1/16S331J
R 351		RS1/16S821J
R 352		RS1/16S821J
R 353		RS1/16S821J
R 354		RS1/16S821J
R 355		RS1/16S821J
R 356		RS1/16S821J
R 357		RS1/16S223J
R 358		RS1/16S223J
R 359		RS1/16S223J
R 360		RS1/16S223J
R 361		RS1/16S223J
R 362		RS1/16S223J
R 366		RS1/16S101J
R 367		RS1/16S0R0J
R 369		RS1/16S0R0J
R 371		RS1/16S102J
R 372		RS1/16S102J
R 373		RS1/16S102J
R 374		RS1/16S102J
R 375		RS1/16S102J
R 376		RS1/16S102J
R 377		RS1/16S102J
R 378		RS1/16S102J
R 379		RS1/16S221J
R 380		RS1/16S221J
R 381		RS1/16S682J
R 385		RS1/10S0R0J
R 401		RS1/16S473J
R 402		RS1/16S473J
R 403		RS1/16S681J
R 404		RS1/16S681J
R 405		RS1/16S681J
R 406		RS1/16S102J
R 407		RS1/16S473J
R 409		RS1/16S681J
R 410		RS1/16S103J
R 411		RS1/16S681J
R 412		RS1/16S681J
R 413		RS1/16S681J
R 414		RS1/16S473J
R 415		RS1/16S472J
R 416		RS1/16S473J
R 417		RS1/16S473J
R 418		RS1/16S473J
R 419		RS1/16S222J
R 420		RS1/16S222J
R 421		RS1/16S681J
R 422		RS1/16S681J
R 423		RS1/16S0R0J
R 424		RS1/16S393J
R 426		RS1/16S153J
R 427		RS1/16S474J

Circuit Symbol and No.	Part Name	Part No.
R 428		RS1/16S681J
R 430		RS1/16S0R0J
R 431		RS1/16S0R0J
R 501		RS1/16S102J
R 502		RS1/16S102J
R 503		RS1/16S102J
R 504		RS1/16S681J
R 505		RS1/16S102J
R 506		RS1/16S225J
R 507		RS1/16S0R0J
R 551		RS1/16S222J
R 552		RS1/16S102J
R 553		RS1/16S102J
R 554		RS1/16S102J
R 555		RS1/16S222J
R 556		RS1/16S222J
R 557		RS1/16S222J
R 558		RS1/16S681J
R 559		RS1/16S681J
R 560		RS1/16S332J
R 561		RS1/16S332J
R 562		RS1/16S332J
R 563		RS1/16S332J
R 564		RS1/16S101J
R 565		RS1/16S101J
R 591		RS1/10S1R0J
R 592		RS1/16S102J
R 593		RS1/16S102J
R 601		RS1/16S473J
R 602		RS1/16S102J
R 603		RS1/16S473J
R 604		RS1/16S472J
R 605		RS1/16S221J
R 606		RS1/16S682J
R 607		RS1/16S221J
R 608		RS1/16S682J
R 609		RS1/16S102J
R 610		RS1/16S102J
R 613		RS1/16S473J
R 615		RS1/16S221J
R 616		RS1/16S682J
R 617		RS1/16S221J
R 618		RS1/16S682J
R 619		RS1/16S221J
R 620		RS1/16S473J
R 621		RS1/16S221J
R 622		RS1/16S682J
R 623		RS1/16S102J
R 624		RS1/16S473J
R 625		RS1/16S473J
R 631		RS1/16S473J
R 632		RS1/16S0R0J
R 633		RS1/16S0R0J
R 634		RS1/16S0R0J
R 635		RS1/16S0R0J
R 636		RS1/16S0R0J
R 637		RS1/16S473J
R 639		RS1/16S473J
R 641		RS1/16S102J
R 651		RS1/16S473J
R 701		RS1/10S102J
R 702		RS1/10S102J
R 703		RS1/10S102J
R 704		RS1/10S102J
R 705		RS1/10S102J
R 706		RS1/10S0R0J
R 761		RS1/16S472J
R 762		RS1/16S102J
R 801		RS1/10S222J
R 802		RS1/10S222J
R 803		RS1/10S222J
R 804		RS1/10S103J
R 805		RS1/10S472J
R 810		RS1/16S221J
R 811		RS1/16S221J
R 812		RS1/16S821J
R 813		RS1/16S681J
R 817		RS1/16S473J
R 820		RS1/10S1R0J
R 823		RS1/10S222J
R 824		RS1/10S222J
R 825		RS1/10S221J
R 826		RS1/10S221J
R 831		RS1/16S102J
R 832		RS1/16S102J
R 833		RS1/16S333J
R 834		RS1/16S333J
R 835		RS1/16S473J
R 836		RS1/16S473J
R 837		RS1/16S223J
R 838		RS1/16S223J
R 839		RS1/16S102J
R 840		RS1/16S102J
R 851		RS1/16S182J
R 855		RS1/16S560J
R 856		RS1/16S222J
R 857		RS1/16S222J
R 858		RS1/16S222J
R 859		RS1/16S102J
R 912		RS1/16S562J
R 913		RS1/16S101J
R 914		RS1/10S0R0J
R 915		RS1/16S123J
R 916		RS1/16S471J
R 921		RS1/16S681J
R 922		RS1/16S561J
R 931		RS1/10S472J
R 932		RS1/16S473J
R 933		RS1/16S103J
R 934		RS1/16S473J
R 935		RS1/16S104J
R 936		RS1/16S103J
R 937		RS1/16S473J
R 938		RS1/16S102J
R 951		RS1/10S153J
R 952		RS1/16S472J
R 953		RS1/16S472J
R 954		RS1/16S102J
R 961		RS1/16S102J
R 962		RS1/16S102J
R 963		RS1/16S473J
R 964		RS1/16S822J
R 965		RS1/16S102J
R 971		RS1/16S472J
R 972		RS1/16S102J
R 973		RS1/16S473J
R 974		RS1/16S473J
R 975		RS1/16S473J
R 976		RS1/16S0R0J
R 987		RS1/16S101J

Circuit Symbol and No.	Part Name	Part No.
R 991		RS1/16S223J
R 992		RS1/16S473J
R 993		RS1/16S104J
R 994		RS1/16S473J
R 995		RS1/16S224J
R 996		RS1/16S473J
R 997		RS1/16S102J

CAPACITORS

C 101		CKSRYB104K16
C 102		CKSRYB104K16
C 103		CKSRYB104K16
C 131		CKSRYB681K50
C 132		CEAL101M10
C 133		CKSQYB225K10
C 141		CEJQ470M10
C 142		CKSRYB105K10
C 143		CKSRYB105K10
C 144		CCSRCH101J50
C 145		CKSYB475K16
C 146		CKSRYB105K10
C 147		CKSRYB104K16
C 148		CKSYB475K16
C 149		CKSRYB474K10
C 150		CKSRYB105K10
C 151		CKSRYB104K16
C 152		CKSYB106K6R3
C 153		CKSRYB104K16
C 161		CKSRYB123K25
C 162		CKSRYB123K25
C 171		CEJQ1R0M50
C 172		CEJQ1R0M50
C 173		CKSRYB223K50
C 201		CKSRYB105K10
C 202		CKSRYB105K10
C 203		CKSRYB102K50
C 204		CKSRYB102K50
C 205		CCSRCH221J50
C 206		CCSRCH221J50
C 209		CKSQYB225K10
C 210		CKSQYB225K10
C 213		CKSYB475K10
C 215		CKSRYB105K10
C 216		CKSRYB105K10
C 217		CKSRYB105K10
C 218		CKSRYB105K10
C 219		CKSRYB105K10
C 220		CKSRYB105K10
C 221		CCSRCH221J50
C 222		CCSRCH221J50
C 223		CCSRCH221J50
C 224		CCSRCH221J50
C 225		CCSRCH221J50
C 226		CCSRCH221J50
C 227		CCSRCH151J50
C 228		CCSRCH151J50
C 229		CCSRCH151J50
C 230		CCSRCH151J50
C 231		CCSRCH151J50
C 232		CCSRCH151J50
C 233		CCSRCH151J50
C 234		CCSRCH151J50
C 235		CCSRCH151J50
C 236		CCSRCH151J50

Circuit Symbol and No.	Part Name	Part No.
C 237		CCSRCH151J50
C 238		CCSRCH151J50
C 239		CKSQYB225K10
C 240		CKSQYB225K10
C 241		CKSQYB225K10
C 242		CKSQYB225K10
C 243		CKSQYB225K10
C 244		CKSQYB225K10
C 251		CKSRYB105K10
C 252		CKSRYB105K10
C 253		CKSRYB105K10
C 254		CKSRYB105K10
C 255		CKSRYB105K10
C 256		CKSRYB105K10
C 257		CSZSR100M16
C 258		CSZSR100M16
C 259		CKSYB475K10
C 261		CKSRYB102K50
C 262		CKSRYB102K50
C 263		CKSYB475K10
C 264		CKSRYB104K16
C 265		CKSRYB104K16
C 266		CKSRYB104K16
C 267		CKSRYB104K16
C 268		CKSRYB104K16
C 269		CKSRYB104K16
C 270		CKSRYB104K16
C 271		CCSRCH180J50
C 272		CCSRCH180J50
C 273		CKSRYB104K16
C 274		CKSRYB104K16
C 275		CKSRYB104K16
C 276		CKSRYB104K16
C 277		CKSRYB104K16
C 278		CKSYB475K10
C 279		CEV101M6R3
C 280		CEV221M4
C 281		CKSRYB102K50
C 282		CKSRYB104K16
C 283		CKSRYB104K16
C 284		CKSYB475K10
C 285		CKSRYB104K16
C 286		CKSRYB104K16
C 287		CKSRYB105K10
C 289		CKSRYB103K50
C 290		CKSRYB103K50
C 291		CKSYB106K6R3
C 301		CCSRCH101J50
C 302		CCSRCH101J50
C 303		CCSRCH101J50
C 304		CCSRCH101J50
C 305		CCSRCH101J50
C 306		CCSRCH101J50
C 307		CKSRYB103K50
C 309		CCSRCH101J50
C 310		CCSRCH101J50
C 331		CKSRYB474K10
C 332		CKSRYB474K10
C 333		CKSRYB474K10
C 334		CKSRYB474K10
C 335		CKSRYB474K10
C 336		CKSRYB474K10
C 337		CKSRYB474K10
C 338		CKSRYB474K10
C 339		CEHAR330M10

=====Circuit Symbol and No.		===Part Name	Part No.
C	340	3300µF/16V	CCH1125
C	341		CKSRYB104K16
C	342		CEHAR100M16
C	343		CKSYB225K16
C	344		CKSYB225K16
C	351		CEAL100M16
C	352		CEAL100M16
C	353		CEAL100M16
C	354		CEAL100M16
C	355		CEAL100M16
C	356		CEAL100M16
C	357		CCSRCH221J50
C	358		CCSRCH221J50
C	359		CCSRCH221J50
C	360		CCSRCH221J50
C	361		CCSRCH221J50
C	362		CCSRCH221J50
C	370		CKSRYB105K10
C	371		CKSRYB103K50
C	372		CKSRYB103K50
C	376		CCSRCH7R0D50
C	381		CKSRYB104K16
C	382		CSZSR100M10
C	383		CSZSR100M10
C	384		CKSRYB105K10
C	385		CKSQYB225K10
C	386		CKSQYB225K10
C	387		CKSQYB225K10
C	388		CKSQYB225K10
C	389		CKSRYB105K10
C	390		CKSRYB105K10
C	391		CKSRYB105K10
C	392		CKSRYB104K16
C	393		CKSRYB472K50
C	394		CKSRYB472K50
C	401		CKSRYB182K50
C	403		CKSRYB473K50
C	404		CEJQ101M10
C	405		CKSRYB103K50
C	406		CEJQ220M10
C	407		CKSQYB103K50
C	408		CKSRYB223K50
C	409		CKSRYB223K50
C	411		CKSRYB472K50
C	412		CKSRYB472K50
C	416		CKSRYB473K50
C	420		CCSRCH101J50
C	421		CKSRYB104K16
C	422		CKSRYB104K16
C	423		CKSRYB104K16
C	424		CKSRYB103K50
C	501		CSZSC220M16
C	502		CCSRCH101J50
C	503		CCSRCH270J50
C	504		CCSRCH270J50
C	505		CKSRYB104K16
C	506		CKSRYB471K50
C	507		CKSRYB471K50
C	508		CKSRYB473K50
C	509		CSZSC220M16
C	511		CKSRYB104K16
C	512		CKSRYB104K16
C	515		CCSRCH101J50
C	551		CEAL470M10
C	552		CEAL100M16

=====Circuit Symbol and No.		===Part Name	Part No.
C	553		CEAL100M16
C	554		CKSRYB104K16
C	555		CKSRYB104K16
C	556		CKSRYB104K16
C	557		CKSRYB104K16
C	558		CKSRYB104K16
C	559		CKSRYB105K10
C	560		CKSRYB105K10
C	561		CKSRYB222K50
C	562		CKSRYB222K50
C	563		CKSRYB103K50
C	591		CEJQ100M16
C	592		CKSRYB103K50
C	593		CKSRYB103K50
C	601		CCSRCH220J50
C	602		CCSRCH150J50
C	604		CKSRYB103K50
C	605		CKSYB475K10
C	607		CCSRCH101J50
C	631		CKSRYB103K50
C	632		CKSRYB103K50
C	633		CKSRYB103K50
C	701		CKSYB225K16
C	702		CKSQYB104K16
C	703		CKSYB225K16
C	704		CKSQYB104K16
C	705		CKSQYB104K16
C	706		CKSQYB104K16
C	707		CKSYB225K16
C	708		CEAL101M10
C	709		CKSYB225K16
C	710		CKSRYB104K16
C	731		CKSRYB103K50
C	732		CKSRYB103K50
C	733		CEAL220M16
C	734		CEAL101M10
C	735		CKSRYB104K16
C	736		CKSRYB104K16
C	741		CKSRYB103K50
C	742		CKSRYB103K50
C	743		CEAL470M6R3
C	744		CKSRYB104K16
C	745		CKSRYB104K16
C	747		CKSYB475K10
C	748		CKSRYB103K50
C	749		CEAL470M6R3
C	750		CKSRYB105K10
C	755		CKSRYB104K16
C	761		CKSRYB103K50
C	762		CKSRYB103K50
C	763		CEAL220M16
C	771		CKSRYB103K50
C	772		CKSRYB103K50
C	773		CEAL220M16
C	805		CEJQ470M10
C	807		CKSRYB102K50
C	808		CKSYB475K16
C	809		CKSRYB104K16
C	810		CEJQ470M10
C	811		CKSRYB103K50
C	812		CKSYB475K16
C	814		CKSRYB103K50
C	815		CKSRYB104K16
C	816		CEJQ470M10
C	817		CKSYB475K16

=====Circuit Symbol and No.		===Part Name	Part No.
C	818		CEVQ220M16
C	820		CKSYB475K16
C	827		CKSRYB103K50
C	828		CCSRCH101J50
C	831		CCSRCH470J50
C	832		CCSRCH470J50
C	833		CKSYB475K10
C	835		CKSYB475K10
C	836		CKSYB475K10
C	837		CKSYB475K10
C	838		CKSYB475K10
C	839		CKSRYB105K10
C	840		CKSRYB105K10
C	851		CKSRYB104K16
C	902		CKSRYB102K50
C	903		CKSRYB102K50
C	904		CKSRYB102K50
C	905		CKSRYB102K50
C	906		CKSRYB102K50
C	907		CKSRYB102K50
C	908		CKSRYB102K50
C	909		CKSRYB102K50
C	911		CEHAT102M16
C	912		CKSRYB103K50
C	913		CEAL470M10
C	914		CKSRYB103K50
C	915		CKSRYB103K50
C	916		CEAL470M16
C	917		CKSRYB103K50
C	918	2200µF/16V	CCH1439
C	921		CEALR33M50
C	922		CEAL470M10
C	923		CKSRYB103K50
C	931		CKSYB105K16
C	933		CKSRYB103K50
C	961		CKSRYB102K50
C	962		CKSRYB104K16
C	963		CEJQ2R2M50
C	971		CKSRYB104K16
C	972		CKSYB106K6R3
C	973		CKSRYB103K50
C	974		CKSRYB103K50
C	975		CEVQ220M16
C	976		CKSRYB103K50
C	977		CKSYB475K16
C	978		CKSRYB103K50
C	979		CEAL470M16
C	980		CKSRYB103K50
C	981		CEAL220M16
C	982		CEALR33M50
C	991		CEAL220M16

A Unit Number : CWM7825(DEH-P900HDD/ES)
Unit Name : Tuner Amp Unit

MISCELLANEOUS

IC	101	IC	HA12187FP
IC	141	IC	NJM2068MD
IC	142	IC	NJM2068MD
IC	201	IC	NJM2068MD
IC	202	IC	NJM2068MD
IC	203	IC	NJM2068MD
IC	204	IC	NJM2068MD
IC	205	IC	PDG262A
IC	206	IC	TC7WH34FU
IC	291	IC	PD5704A

=====Circuit Symbol and No.		===Part Name	Part No.
IC	301	IC	PAL006A
IC	371	IC	TC74VHC126FT
IC	372	IC	TC7SH08FU
IC	373	IC	TC7SH08FU
IC	381	IC	PML011A
IC	551	IC	AK4321VF
IC	552	IC	TC7SET08FU
IC	601	IC	PD5646A
IC	602	IC	TC7S32FU
IC	731	IC	NJU7223DL1-33
IC	741	IC	NJM2870F18
IC	742	IC	NJU7223DL1-33
IC	831	IC	NJM2068MD
IC	911	IC	TC7SET32FU
IC	931	IC	TC7S08FU
IC	961	IC	S-80735ANDZI
IC	971	IC	BA033FP
Q	101	Transistor	2SA1162
Q	102	Transistor	DTC124EU
Q	131	Transistor	2SC2412K
Q	132	Transistor	IMD2A
Q	133	Transistor	2SC2412K
Q	331	Transistor	DTC124EU
Q	332	Transistor	DTC124EU
Q	351	Transistor	IMH3A
Q	352	Transistor	IMH3A
Q	353	Transistor	IMH3A
Q	371	Transistor	IMD2A
Q	381	Transistor	DTC124EU
Q	401	Transistor	2SC2412K
Q	591	Transistor	2SD1859
Q	592	Transistor	IMD2A
Q	761	Transistor	2SB1238
Q	762	Transistor	DTC143EU
Q	771	Transistor	IMD2A
Q	801	Transistor	2SD1760F5
Q	802	Transistor	IMD2A
Q	806	Transistor	2SD1859
Q	807	Transistor	IMD2A
Q	831	Transistor	DTC314TU
Q	832	Transistor	DTC314TU
Q	833	Transistor	IMD2A
Q	851	Transistor	IMD2A
Q	852	Transistor	2SC2412K
Q	853	Transistor	2SD1859
Q	911	Transistor	2SD1760F5
Q	912	Transistor	IMD2A
Q	913	Transistor	2SD2396
Q	914	Transistor	IMD2A
Q	921	Transistor	2SD2396
Q	922	Transistor	IMD2A
Q	931	Transistor	IMX1
Q	932	Transistor	DTC114EK
Q	951	Transistor	2SA1162
Q	962	Transistor	2SC2412K
Q	971	Transistor	2SB1238
Q	972	Transistor	DTC114EU
Q	973	Transistor	IMD2A
Q	991	Transistor	2SC2412K
Q	992	Transistor	2SC2412K
Q	993	Transistor	IMD2A
Q	994	Transistor	IMD2A
D	131	Diode	MA3039(L)
D	141	Diode	UDZS3R9(B)
D	142	Diode	RB706F-40

Circuit Symbol and No.		Part Name	Part No.
D	381	Diode	DAN202U
D	591	Diode	HZS12L(A1)
D	801	Diode Network	DA204U
D	802	Diode Network	DA204U
D	803	Diode Network	DA204U
D	804	Diode Network	DA204U
D	805	Diode	MA3062(M)
D	806	Diode	HZS6L(B1)
D	811	Diode Network	DA204U
D	812	Diode Network	DA204U
D	813	Diode	HZS11L(A1)
D	814	Diode Network	DA204U
D	815	Diode Network	DA204U
D	851	Diode	HZS9L(A2)
D	901	Diode	MPG06G-6415G50
D	902	Diode	MPG06G-6415G50
D	903	Diode	MPG06G-6415G50
D	904	Diode	MPG06G-6415G50
D	911	Diode	MPG06G-6415G50
D	912	Diode	HZS6L(B1)
D	913	Diode	MPG06G-6415G50
D	914	Diode	HZS9L(B1)
D	921	Diode	HZS6L(C2)
D	931	Diode	HZS7L(A1)
D	932	Diode	HZS7L(C3)
D	933	Diode	MPG06G-6415G50
D	951	Diode	DAN202U
D	961	Diode	MA152K
D	971	Diode	IMN10
D	991	Diode	DAN202U
D	992	Diode	HZS9L(A2)
D	993	Diode	1SS133
D	994	Diode	DAN202U
ZNR	451	Surge Protector	DSPS-201M-S00B
L	101	Inductor	LAU3R3K
L	102	Inductor	CTF1399
L	131	Inductor	CTF1399
L	132	Inductor	CTF1399
L	133	Inductor	CTF1399
L	134	Inductor	CTF1399
L	201	Inductor	CTF1379
L	202	Inductor	CTF1379
L	215	Inductor	CTF1379
L	216	Inductor	CTF1379
L	217	Inductor	CTF1379
L	218	Inductor	CTF1379
L	219	Inductor	CTF1379
L	220	Inductor	CTF1379
L	261	Inductor	CTF1379
L	262	Ferri-Inductor	LAU101K
L	263	Ferri-Inductor	LAU151K
L	291	Inductor	CTF1399
L	361	Filter	CTF1071
L	371	Inductor	CTF1379
L	372	Inductor	CTF1379
L	376	Inductor	LCYC4R7K1608
L	377	Inductor	CTF1357
L	401	Inductor	LAU100K
L	402	Inductor	LCTB4R7K2125
L	404	Ferri-Inductor	LAU2R2K
L	405	Inductor	CTF1399
L	491	Inductor	CTF1399
L	551	Ferri-Inductor	LAU2R2K
L	601	Inductor	LAU100K
L	701	Inductor	CTF1379

Circuit Symbol and No.		Part Name	Part No.
L	731	Inductor	CTF1484
L	741	Ferri-Inductor	LAU2R2K
L	742	Inductor	LAU1R0K
L	761	Inductor	LAU100K
L	771	Inductor	LAU100K
L	801	Inductor	LAU100K
L	802	Inductor	CTF1489
L	803	Inductor	CTF1488
L	804	Inductor	CTF1488
L	951	Ferri-Inductor	LAU2R2K
L	971	Ferri-Inductor	LAU2R2K
L	972	Inductor	LAU1R0K
L	973	Ferri-Inductor	LAU2R2K
X	261	Radiator 16.9344MHz	CSS1463
X	291	Radiator 10.00MHz	CSS1428
X	601	Radiator 10.00MHz	CSS1475
VR	141	Semi-fixed 10kΩ(B)	CCP1448
FU	701	Fuse 3.15A	CEK1207
MIC	141	Microphone	CPM1011
		FM/AM Tuner Unit	CWE1605
BZ	641	Buzzer	CPV1050
		Fan Motor	CXM1186

RESISTORS

R	101		RS1/16S101J
R	102		RS1/16S620J
R	103		RS1/16S101J
R	104		RS1/16S222J
R	105		RS1/16S103J
R	106		RS1/16S562J
R	107		RS1/16S332J
R	108		RS1/16S181J
R	109		RS1/16S181J
R	110		RS1/16S223J
R	111		RS1/16S223J
R	112		RS1/16S102J
R	113		RS1/16S102J
R	131		RS1/16S104J
R	132		RS1/16S222J
R	133		RS1/16S103J
R	134		RS1/16S561J
R	135		RS1/16S223J
R	136		RS1/16S473J
R	137		RS1/16S153J
R	138		RS1/16S683J
R	139		RS1/16S152J
R	140		RS1/16S682J
R	141		RS1/16S222J
R	142		RS1/16S152J
R	143		RS1/16S152J
R	144		RS1/16S104J
R	145		RS1/16S101J
R	146		RS1/16S563J
R	147		RS1/16S102J
R	148		RS1/16S103J
R	149		RS1/16S103J
R	150		RS1/16S153J
R	151		RS1/16S153J
R	152		RS1/16S223J
R	153		RN1/16SE4702D
R	154		RN1/16SE4702D
R	160		RS1/16S473J
R	161		RS1/16S272J
R	162		RS1/16S272J

=====Circuit Symbol and No.	===Part Name	Part No.
R 163		RS1/16S162J
R 164		RS1/16S162J
R 171		RS1/16S0R0J
R 172		RS1/16S0R0J
R 201		RS1/16S474J
R 202		RS1/16S474J
R 203		RS1/16S223J
R 204		RS1/16S223J
R 205		RS1/16S472J
R 206		RS1/16S472J
R 207		RS1/16S225J
R 208		RS1/16S155J
R 215		RS1/16S474J
R 216		RS1/16S474J
R 217		RS1/16S474J
R 218		RS1/16S474J
R 219		RS1/16S474J
R 220		RS1/16S474J
R 221		RS1/16S222J
R 222		RS1/16S222J
R 223		RS1/16S222J
R 224		RS1/16S222J
R 225		RS1/16S222J
R 226		RS1/16S222J
R 227		RS1/16S333J
R 228		RS1/16S333J
R 229		RS1/16S333J
R 230		RS1/16S333J
R 231		RS1/16S333J
R 232		RS1/16S333J
R 233		RS1/16S273J
R 234		RS1/16S273J
R 235		RS1/16S273J
R 236		RS1/16S273J
R 237		RS1/16S273J
R 238		RS1/16S273J
R 239		RS1/16S183J
R 240		RS1/16S183J
R 241		RS1/16S183J
R 242		RS1/16S183J
R 243		RS1/16S183J
R 244		RS1/16S183J
R 245		RS1/16S273J
R 246		RS1/16S273J
R 247		RS1/16S273J
R 248		RS1/16S273J
R 249		RS1/16S273J
R 250		RS1/16S273J
R 251		RS1/16S103J
R 252		RS1/16S103J
R 253		RS1/16S103J
R 254		RS1/16S103J
R 261		RS1/16S331J
R 262		RAB4C221J
R 263		RS1/16S221J
R 264		RS1/16S221J
R 265		RS1/16S221J
R 266		RS1/16S102J
R 267		RS1/16S221J
R 282		RS1/16S103J
R 283		RS1/16S103J
R 284		RS1/16S153J
R 291		RAB4C681J
R 292		RS1/16S473J
R 293		RS1/16S102J

=====Circuit Symbol and No.	===Part Name	Part No.
R 294		RS1/16S473J
R 295		RS1/16S102J
R 296		RS1/16S105J
R 297		RS1/16S102J
R 298		RS1/16S471J
R 299		RS1/16S102J
R 300		RAB4C473J
R 301		RAB4C681J
R 302		RS1/16S222J
R 303		RS1/16S104J
R 304		RAB4C471J
R 305		RS1/16S473J
R 306		RS1/16S102J
R 307		RS1/16S102J
R 308		RS1/16S473J
R 309		RS1/16S102J
R 310		RS1/16S102J
R 312		RS1/16S104J
R 313		RS1/16S222J
R 314		RS1/16S222J
R 315		RS1/16S473J
R 316		RAB4C0R0J
R 317		RS1/16S102J
R 318		RS1/16S473J
R 321		RS1/16S472J
R 322		RS1/16S104J
R 325		RS1/16S102J
R 326		RS1/16S0R0J
R 327		RS1/16S473J
R 328		RS1/16S473J
R 329		RAB4C681J
R 331		RS1/16S103J
R 332		RS1/16S103J
R 333		RS1/16S103J
R 334		RS1/16S331J
R 351		RS1/16S821J
R 352		RS1/16S821J
R 353		RS1/16S821J
R 354		RS1/16S821J
R 355		RS1/16S821J
R 356		RS1/16S821J
R 357		RS1/16S223J
R 358		RS1/16S223J
R 359		RS1/16S223J
R 360		RS1/16S223J
R 361		RS1/16S223J
R 362		RS1/16S223J
R 366		RS1/16S101J
R 367		RS1/16S0R0J
R 369		RS1/16S0R0J
R 371		RS1/16S102J
R 372		RS1/16S102J
R 373		RS1/16S102J
R 374		RS1/16S102J
R 375		RS1/16S102J
R 376		RS1/16S102J
R 377		RS1/16S102J
R 378		RS1/16S102J
R 379		RS1/16S221J
R 380		RS1/16S221J
R 381		RS1/16S682J
R 385		RS1/10S0R0J
R 401		RS1/16S473J
R 402		RS1/16S473J
R 403		RS1/16S681J

Circuit Symbol and No.	Part Name	Part No.
R 404		RS1/16S681J
R 409		RS1/16S681J
R 410		RS1/16S103J
R 411		RS1/16S681J
R 412		RS1/16S681J
R 413		RS1/16S681J
R 414		RS1/16S473J
R 415		RS1/16S472J
R 416		RS1/16S473J
R 417		RS1/16S473J
R 418		RS1/16S473J
R 419		RS1/16S222J
R 420		RS1/16S222J
R 423		RS1/16S0R0J
R 424		RS1/16S393J
R 430		RS1/16S0R0J
R 431		RS1/16S0R0J
R 507		RS1/16S0R0J
R 551		RS1/16S222J
R 552		RS1/16S102J
R 553		RS1/16S102J
R 554		RS1/16S102J
R 555		RS1/16S222J
R 556		RS1/16S222J
R 557		RS1/16S222J
R 558		RS1/16S681J
R 559		RS1/16S681J
R 560		RS1/16S332J
R 561		RS1/16S332J
R 562		RS1/16S332J
R 563		RS1/16S332J
R 564		RS1/16S101J
R 565		RS1/16S101J
R 591		RS1/10S1R0J
R 592		RS1/16S102J
R 593		RS1/16S102J
R 601		RS1/16S473J
R 602		RS1/16S102J
R 603		RS1/16S473J
R 604		RS1/16S472J
R 605		RS1/16S221J
R 606		RS1/16S682J
R 607		RS1/16S221J
R 608		RS1/16S682J
R 609		RS1/16S102J
R 610		RS1/16S102J
R 613		RS1/16S473J
R 615		RS1/16S221J
R 616		RS1/16S682J
R 617		RS1/16S221J
R 618		RS1/16S682J
R 619		RS1/16S221J
R 620		RS1/16S473J
R 621		RS1/16S221J
R 622		RS1/16S682J
R 623		RS1/16S102J
R 624		RS1/16S473J
R 625		RS1/16S473J
R 626		RS1/16S473J
R 631		RS1/16S473J
R 632		RS1/16S0R0J
R 633		RS1/16S0R0J
R 634		RS1/16S0R0J
R 635		RS1/16S0R0J
R 636		RS1/16S0R0J
R 637		RS1/16S473J
R 639		RS1/16S473J
R 641		RS1/16S102J
R 651		RS1/16S473J
R 701		RS1/10S102J
R 702		RS1/10S102J
R 703		RS1/10S102J
R 704		RS1/10S102J
R 705		RS1/10S102J
R 706		RS1/10S0R0J
R 761		RS1/16S472J
R 762		RS1/16S102J
R 801		RS1/10S222J
R 802		RS1/10S222J
R 803		RS1/10S222J
R 804		RS1/10S103J
R 805		RS1/10S472J
R 810		RS1/16S221J
R 811		RS1/16S221J
R 812		RS1/16S821J
R 813		RS1/16S681J
R 817		RS1/16S473J
R 820		RS1/10S1R0J
R 823		RS1/10S222J
R 824		RS1/10S222J
R 825		RS1/10S221J
R 826		RS1/10S221J
R 831		RS1/16S102J
R 832		RS1/16S102J
R 833		RS1/16S333J
R 834		RS1/16S333J
R 835		RS1/16S473J
R 836		RS1/16S473J
R 837		RS1/16S223J
R 838		RS1/16S223J
R 839		RS1/16S102J
R 840		RS1/16S102J
R 851		RS1/16S182J
R 855		RS1/16S560J
R 856		RS1/16S222J
R 857		RS1/16S222J
R 858		RS1/16S222J
R 859		RS1/16S102J
R 912		RS1/16S562J
R 913		RS1/16S101J
R 914		RS1/10S0R0J
R 915		RS1/16S123J
R 916		RS1/16S471J
R 921		RS1/16S681J
R 922		RS1/16S561J
R 931		RS1/10S472J
R 932		RS1/16S473J
R 933		RS1/16S103J
R 934		RS1/16S473J
R 935		RS1/16S104J
R 936		RS1/16S103J
R 937		RS1/16S473J
R 938		RS1/16S102J
R 951		RS1/10S153J
R 952		RS1/16S472J
R 953		RS1/16S472J
R 954		RS1/16S102J
R 961		RS1/16S102J
R 962		RS1/16S102J
R 963		RS1/16S473J

=====Circuit Symbol and No.	===Part Name	Part No.
R 964		RS1/16S822J
R 965		RS1/16S102J
R 971		RS1/16S472J
R 972		RS1/16S102J
R 973		RS1/16S473J
R 974		RS1/16S473J
R 975		RS1/16S473J
R 976		RS1/16S0R0J
R 987		RS1/16S101J
R 991		RS1/16S223J
R 992		RS1/16S473J
R 993		RS1/16S104J
R 994		RS1/16S473J
R 995		RS1/16S224J
R 996		RS1/16S473J
R 997		RS1/16S102J

CAPACITORS

C 101		CKSRYB104K16
C 102		CKSRYB104K16
C 103		CKSRYB104K16
C 131		CKSRYB681K50
C 132		CEAL101M10
C 133		CKSQYB225K10
C 141		CEJQ470M10
C 142		CKSRYB105K10
C 143		CKSRYB105K10
C 144		CCSRCH101J50
C 145		CKSYB475K16
C 146		CKSRYB105K10
C 147		CKSRYB104K16
C 148		CKSYB475K16
C 149		CKSRYB474K10
C 150		CKSRYB105K10
C 151		CKSRYB104K16
C 152		CKSYB106K6R3
C 153		CKSRYB104K16
C 161		CKSRYB183K25
C 162		CKSRYB183K25
C 201		CKSRYB105K10
C 202		CKSRYB105K10
C 203		CKSRYB102K50
C 204		CKSRYB102K50
C 205		CCSRCH221J50
C 206		CCSRCH221J50
C 209		CKSQYB225K10
C 210		CKSQYB225K10
C 213		CKSYB475K10
C 215		CKSRYB105K10
C 216		CKSRYB105K10
C 217		CKSRYB105K10
C 218		CKSRYB105K10
C 219		CKSRYB105K10
C 220		CKSRYB105K10
C 221		CCSRCH221J50
C 222		CCSRCH221J50
C 223		CCSRCH221J50
C 224		CCSRCH221J50
C 225		CCSRCH221J50
C 226		CCSRCH221J50
C 227		CCSRCH151J50
C 228		CCSRCH151J50
C 229		CCSRCH151J50

=====Circuit Symbol and No.	===Part Name	Part No.
C 230		CCSRCH151J50
C 231		CCSRCH151J50
C 232		CCSRCH151J50
C 233		CCSRCH151J50
C 234		CCSRCH151J50
C 235		CCSRCH151J50
C 236		CCSRCH151J50
C 237		CCSRCH151J50
C 238		CCSRCH151J50
C 239		CKSQYB225K10
C 240		CKSQYB225K10
C 241		CKSQYB225K10
C 242		CKSQYB225K10
C 243		CKSQYB225K10
C 244		CKSQYB225K10
C 251		CKSRYB105K10
C 252		CKSRYB105K10
C 253		CKSRYB105K10
C 254		CKSRYB105K10
C 255		CKSRYB105K10
C 256		CKSRYB105K10
C 257		CSZSR100M16
C 258		CSZSR100M16
C 259		CKSYB475K10
C 261		CKSRYB102K50
C 262		CKSRYB102K50
C 263		CKSYB475K10
C 264		CKSRYB104K16
C 265		CKSRYB104K16
C 266		CKSRYB104K16
C 267		CKSRYB104K16
C 268		CKSRYB104K16
C 269		CKSRYB104K16
C 270		CKSRYB104K16
C 271		CCSRCH180J50
C 272		CCSRCH180J50
C 273		CKSRYB104K16
C 274		CKSRYB104K16
C 275		CKSRYB104K16
C 276		CKSRYB104K16
C 277		CKSRYB104K16
C 278		CKSYB475K10
C 279		CEV101M6R3
C 280		CEV221M4
C 281		CKSRYB102K50
C 282		CKSRYB104K16
C 283		CKSRYB104K16
C 284		CKSYB475K10
C 285		CKSRYB104K16
C 286		CKSRYB104K16
C 287		CKSRYB105K10
C 289		CKSRYB103K50
C 290		CKSRYB103K50
C 291		CKSYB106K6R3
C 301		CCSRCH101J50
C 302		CCSRCH101J50
C 303		CCSRCH101J50
C 304		CCSRCH101J50
C 305		CCSRCH101J50
C 306		CCSRCH101J50
C 307		CKSRYB103K50
C 309		CCSRCH101J50
C 310		CCSRCH101J50
C 331		CKSRYB474K10
C 332		CKSRYB474K10

=====Circuit Symbol and No.		===Part Name	Part No.
C	333		CKSRYB474K10
C	334		CKSRYB474K10
C	335		CKSRYB474K10
C	336		CKSRYB474K10
C	337		CKSRYB474K10
C	338		CKSRYB474K10
C	339		CEHAR330M10
C	340	3300µF/16V	CCH1125
C	341		CKSRYB104K16
C	342		CEHAR100M16
C	343		CKSYB225K16
C	344		CKSYB225K16
C	351		CEAL100M16
C	352		CEAL100M16
C	353		CEAL100M16
C	354		CEAL100M16
C	355		CEAL100M16
C	356		CEAL100M16
C	357		CCSRCH221J50
C	358		CCSRCH221J50
C	359		CCSRCH221J50
C	360		CCSRCH221J50
C	361		CCSRCH221J50
C	362		CCSRCH221J50
C	370		CKSRYB105K10
C	371		CKSRYB103K50
C	372		CKSRYB103K50
C	376		CCSRCH7R0D50
C	381		CKSRYB104K16
C	382		CSZSR100M10
C	383		CSZSR100M10
C	384		CKSRYB105K10
C	385		CKSQYB225K10
C	386		CKSQYB225K10
C	387		CKSQYB225K10
C	388		CKSQYB225K10
C	389		CKSRYB105K10
C	390		CKSRYB105K10
C	391		CKSRYB105K10
C	392		CKSRYB104K16
C	393		CKSRYB472K50
C	394		CKSRYB472K50
C	403		CKSRYB473K50
C	404		CEJQ101M10
C	405		CKSRYB103K50
C	406		CEJQ220M10
C	407		CKSQYB103K50
C	408		CKSRYB223K50
C	409		CKSRYB223K50
C	411		CKSRYB472K50
C	416		CKSRYB473K50
C	420		CCSRCH101J50
C	421		CKSRYB104K16
C	422		CKSRYB104K16
C	423		CKSRYB104K16
C	424		CKSRYB103K50
C	512		CKSRYB104K16
C	551		CEAL470M10
C	552		CEAL100M16
C	553		CEAL100M16
C	554		CKSRYB104K16
C	555		CKSRYB104K16
C	556		CKSRYB104K16
C	557		CKSRYB104K16
C	558		CKSRYB104K16

=====Circuit Symbol and No.		===Part Name	Part No.
C	559		CKSRYB105K10
C	560		CKSRYB105K10
C	561		CKSRYB222K50
C	562		CKSRYB222K50
C	563		CKSRYB103K50
C	591		CEJQ100M16
C	592		CKSRYB103K50
C	593		CKSRYB103K50
C	601		CCSRCH220J50
C	602		CCSRCH150J50
C	604		CKSRYB103K50
C	605		CKSYB475K10
C	607		CCSRCH101J50
C	631		CKSRYB103K50
C	632		CKSRYB103K50
C	633		CKSRYB103K50
C	701		CKSYB225K16
C	702		CKSQYB104K16
C	703		CKSYB225K16
C	704		CKSQYB104K16
C	705		CKSQYB104K16
C	706		CKSQYB104K16
C	707		CKSYB225K16
C	708		CEAL101M10
C	709		CKSYB225K16
C	710		CKSRYB104K16
C	731		CKSRYB103K50
C	732		CKSRYB103K50
C	733		CEAL220M16
C	734		CEAL101M10
C	735		CKSRYB104K16
C	736		CKSRYB104K16
C	741		CKSRYB103K50
C	742		CKSRYB103K50
C	743		CEAL470M6R3
C	744		CKSRYB104K16
C	745		CKSRYB104K16
C	747		CKSYB475K10
C	748		CKSRYB103K50
C	749		CEAL470M6R3
C	750		CKSRYB105K10
C	755		CKSRYB104K16
C	761		CKSRYB103K50
C	762		CKSRYB103K50
C	763		CEAL220M16
C	771		CKSRYB103K50
C	772		CKSRYB103K50
C	773		CEAL220M16
C	805		CEJQ470M10
C	807		CKSRYB102K50
C	808		CKSYB475K16
C	809		CKSRYB104K16
C	810		CEJQ470M10
C	811		CKSRYB103K50
C	812		CKSYB475K16
C	814		CKSRYB103K50
C	815		CKSRYB104K16
C	816		CEJQ470M10
C	817		CKSYB475K16
C	818		CEVQ220M16
C	820		CKSYB475K16
C	827		CKSRYB103K50
C	828		CCSRCH101J50
C	831		CCSRCH470J50
C	832		CCSRCH470J50

Circuit Symbol and No.		Part Name	Part No.
C	833		CKSYB475K10
C	835		CKSYB475K10
C	836		CKSYB475K10
C	837		CKSYB475K10
C	838		CKSYB475K10
C	839		CKSRYB105K10
C	840		CKSRYB105K10
C	851		CKSRYB104K16
C	902		CKSRYB102K50
C	903		CKSRYB102K50
C	904		CKSRYB102K50
C	905		CKSRYB102K50
C	906		CKSRYB102K50
C	907		CKSRYB102K50
C	908		CKSRYB102K50
C	909		CKSRYB102K50
C	911		CEHAT102M16
C	912		CKSRYB103K50
C	913		CEAL470M10
C	914		CKSRYB103K50
C	915		CKSRYB103K50
C	916		CEAL470M16
C	917		CKSRYB103K50
C	918	2200µF/16V	CCH1439
C	921		CEALR33M50
C	922		CEAL470M10
C	923		CKSRYB103K50
C	931		CKSYB105K16
C	933		CKSRYB103K50
C	961		CKSRYB102K50
C	962		CKSRYB104K16
C	963		CEJQ2R2M50
C	971		CKSRYB104K16
C	972		CKSYB106K6R3
C	973		CKSRYB103K50
C	974		CKSRYB103K50
C	975		CEVQ220M16
C	976		CKSRYB103K50
C	977		CKSYB475K16
C	978		CKSRYB103K50
C	979		CEAL470M16
C	980		CKSRYB103K50
C	981		CEAL220M16
C	982		CEALR33M50
C	991		CEAL220M16

B Unit Number : CWM7664
Unit Name : Keyboard Unit

MISCELLANEOUS

IC	1901		RS-140
IC	1902	IC	PD5658A
IC	1903	IC	S-80734ANDYI
IC	1905	IC	PD8081A
IC	1906	IC	PD6364A
IC	1907	IC	PD3428A
Q	1901	Transistor	IMD2A
Q	1902	Transistor	IMD2A
Q	1903	Transistor	2SC4081
Q	1904	Transistor	2SC4081
D	1901	Diode	DAP202U
D	1902	Diode	DAN202U
D	1905	Diode	MA111
D	1906	Diode	DAN202U
D	1907	Diode	UDZS13(B)

Circuit Symbol and No.		Part Name	Part No.
D	1908	Diode	UDZS3R9(B)
D	1909	LED	CL170UBX
D	1910	LED	CL170UBX
D	1911	LED	CL170UBX
D	1912	LED	CL170UBX
D	1913	LED	CL170UBX
D	1914	LED	CL170UBX
D	1915	LED	CL170UBX
D	1916	LED	CL170UBX
D	1917	LED	CL170UBX
D	1918	LED	CL170UBX
D	1919	LED	CL170UBX
L	1901	Inductor	CTF1295
L	1902	Inductor	CTF1484
L	1903	Inductor	CTF1305
L	1904	Inductor	CTF1399
L	1905	Inductor	CTF1399
L	1906	Inductor	CTF1399
L	1907	Inductor-Array	CTF1421
L	1908	Inductor-Array	CTF1421
L	1909	Inductor-Array	CTF1421
L	1910	Inductor-Array	CTF1421
L	1911	Inductor	CTF1399
L	1912	Inductor	CTF1530
L	1913	Inductor-Array	CTF1421
L	1914	Inductor-Array	CTF1421
L	1915	Inductor-Array	CTF1421
L	1916	Inductor-Array	CTF1421
L	1917	Inductor-Array	CTF1421
L	1918	Inductor-Array	CTF1421
L	1919	Inductor-Array	CTF1421
L	1920	Inductor-Array	CTF1421
L	1921	Inductor	CTF1379
L	1922	Inductor	CTF1399
L	1923	Inductor	CTF1399
L	1924	Inductor	CTF1379
L	1925	Inductor	CTF1379
X	1901	Ceramic Resonator 20MHz	CSS1491
S	1901	Push Switch	CSG1111
S	1902	Push Switch	CSG1111
S	1903	Push Switch	CSG1111
S	1904	Push Switch	CSG1111
S	1905	Push Switch	CSG1111
S	1906	Push Switch	CSG1111
S	1907	Push Switch	CSG1111
S	1908	Push Switch	CSG1111
S	1909	Push Switch	CSG1111
S	1910	Push Switch	CSG1111
S	1911	Push Switch	CSG1111
S	1912	Push Switch	CSG1111
S	1913	Push Switch	CSG1111
S	1914	Push Switch	CSG1111
S	1915	Push Switch	CSG1135
S	1916	Push Switch	CSG1145
S	1917	Push Switch	CSG1111
S	1918	Encoder	CSD1059

RESISTORS

R	1901		RS1/16S222J
R	1902		RS1/16S222J
R	1905		RS1/16S103J
R	1906		RS1/16S121J
R	1907		RS1/16S2R2J
R	1908		RS1/16S222J
R	1913		RAB4C102J
R	1914		RS1/16S473J
R	1915		RS1/16S473J
R	1916		RS1/16S102J

Circuit Symbol and No.	Part Name	Part No.
R 1917		RS1/16S104J
R 1918		RS1/16S0R0J
R 1919		RS1/16S101J
R 1920		RS1/16S101J
R 1923		RS1/16S101J
R 1924		RS1/16S473J
R 1925		RS1/16S101J
R 1927		RS1/16S101J
R 1933		RAB4C102J
R 1934		RAB4C473J
R 1936		RS1/16S473J
R 1937		RS1/16S473J
R 1938		RS1/16S473J
R 1939		RS1/16S473J
R 1940		RS1/16S102J
R 1941		RS1/16S221J
R 1942		RS1/16S223J
R 1943		RS1/16S223J
R 1945		RS1/16S470J
R 1947		RS1/16S470J
R 1949		RS1/16S470J
R 1950		RS1/16S391J
R 1951		RS1/16S470J
R 1952		RS1/16S470J
R 1953		RS1/16S391J
R 1955		RS1/16S470J
R 1960		RS1/16S560J
R 1961		RS1/16S560J
R 1962		RS1/16S560J
R 1963		RS1/16S560J
R 1964		RS1/16S560J
R 1965		RS1/16S391J
R 1966		RS1/16S391J
R 1967		RS1/16S560J
R 1968		RS1/16S0R0J
R 1969		RS1/16S221J
R 1970		RS1/16S221J
R 1971		RS1/16S473J
R 1972		RS1/16S0R0J

CAPACITORS

C 1901		CSZSR100M10
C 1902		CKSRYB105K10
C 1904		CSZSR100M10
C 1906	4.7µF	CCG1111
C 1908		CSZSR100M16
C 1909		CKSRYB105K10
C 1910		CKSRYB103K50
C 1911		CKSRYB104K16
C 1914		CKSRYB103K50
C 1915		CKSRYB103K50
C 1917		CSZSR100M10
C 1918		CKSRYB103K50
C 1919		CKSRYB104K16
C 1920		CKSRYB103K50
C 1921		CSZSR100M16
C 1922		CKSRYB103K50
C 1923		CSZSR100M10
C 1924		CCSRCH101J50
C 1926		CSZSR100M10
C 1931		CKSRYB104K16
C 1932		CKSRYB104K16
C 1933		CKSRYB104K16
C 1934		CKSRYB104K16
C 1935		CKSRYB104K16
C 1936		CKSRYB104K16

Circuit Symbol and No.	Part Name	Part No.
C 1937		CKSRYB104K16
C 1938		CKSRYB104K16
C 1939		CKSRYB104K16
C 1940		CKSRYB104K16
C 1941		CKSRYB104K16
C 1943		CKSRYB104K16
C 1945		CKSRYB104K16
C 1946		CCSRCH101J50
C 1947		CCSRCH101J50
C 1948		CCSRCH101J50
C 1949		CKSRYB103K50
C 1950		CCSRCH220J50
C 1954		CKSRYB103K50
C 1955		CCSRCH101J50
C 1957		CCSRCH101J50
C 1961		CCSRCH101J50
C 1962		CCSRCH101J50
C 1963		CCSRCH101J50

C Unit Number : CWM7665
Unit Name : Power Supply Unit

MISCELLANEOUS

IC	2831	IC	NJM7805FA
Q	2801	Transistor	2SD2396
Q	2802	Transistor	IMD2A
Q	2811	Transistor	2SD2396
Q	2812	Transistor	2SB1238
Q	2813	Transistor	DTC114EK
Q	2821	Transistor	2SD2396
Q	2822	Transistor	IMD2A
Q	2841	Transistor	2SD2396
Q	2842	Transistor	IMD2A
D	2801	Diode	HZS9L(C3)
D	2811	Diode	HZS9L(B3)
D	2821	Diode	HZS9L(B1)
D	2841	Diode	HZS9L(C3)
FU	2801	Fuse 800mA	CEK1206
FU	2811	Fuse 800mA	CEK1206
FU	2821	Fuse 2A	CEK1190

RESISTORS

R 2801		RS1/16S102J
R 2802		RD1/4PU681J
R 2811		RS1/16S102J
R 2812		RS1/16S223J
R 2813		RD1/4PU272J
R 2814		RS1/16S561J
R 2815		RS1/16S471J
R 2816		RD1/4PU221J
R 2821		RS1/16S102J
R 2822		RD1/4PU221J
R 2823		RD1/4PU221J
R 2841		RD1/4PU221J
R 2842		RS1/16S102J

CAPACITORS

C 2801		CKSRYB103K50
C 2803		CKSRYB473K50
C 2804		CEJQ470M16
C 2811		CKSRYB103K50
C 2812		CEJQ101M16
C 2813		CKSRYB103K50
C 2814	330µF/10V	CCH1181
C 2821		CKSRYB103K50
C 2823		CKSRYB473K50
C 2824		CEJQ101M16

=====Circuit Symbol and No.		===Part Name	Part No.
C	2831		CKSRYB104K16
C	2832	330µF/10V	CCH1181
C	2834	330µF/10V	CCH1181
C	2841		CKSRYB473K50
C	2842		CKSRYB103K50
C	2850	470µF/16V	CCH1331

D Unit Number : CWM7667
Unit Name : Digital Unit

MISCELLANEOUS

IC	3001	IC	PE5218C
IC	3002	IC	TC55V16100FTI-15
IC	3003	IC	TC7S08FU
IC	3004	IC	S-80818ANUP-EDF
IC	3005	IC	TC7SH08FU
IC	3006	IC	TC74LVXC3245FS
IC	3007	IC	TC7SET32FU
IC	3008	IC	TC7SET32FU
IC	3009	IC	TC7SET32FU
IC	3010	IC	TC74VHCT125AFT
IC	3011	IC	TC7WH34FU
IC	3101	IC	TC7SH08FU
IC	3102	IC	TC74LVXC3245FS
IC	3103	IC	TC74VHC126FT
IC	3104	IC	TC74VHC125FT
IC	3105	IC	LC78683ES
IC	3106	IC	MSM51V16165DSL-50
IC	3107	IC	TC7SH08FU
IC	3108	IC	TC7SH08FU
IC	3201	IC	TC7S08FU
IC	3202	IC	TC7SH04FU
IC	3203	IC	TC74VHC541FT
IC	3204	IC	TC7W00FU
IC	3205	IC	TC7WH04FU
IC	3206	IC	TC74LCXR163245FT
IC	3301	IC	AK5353VT
IC	3303	IC	TC74VHC157FT
IC	3304	IC	CXD1859AR
IC	3305	IC	CXK2000EN
IC	3306	IC	TC7SH04FU
IC	3307	IC	TC74VHC126FT
IC	3308	IC	TC7SH32FU
Q	3001	Transistor	UMD2N
Q	3101	Transistor	UMD2N
Q	3301	Transistor	DTA123JK
Q	3302	Transistor	DTC124EK
L	3001	Inductor	CTF1399
L	3002	Inductor	CTF1473
L	3012	Inductor	CTF1399
L	3013	Inductor	CTF1379
L	3014	Inductor	CTF1379
L	3015	Inductor	CTF1379
L	3016	Inductor	CTF1379
L	3103	Inductor	CTF1379
L	3104	Inductor	CTF1379
L	3105	Inductor	CTF1379
L	3106	Inductor	CTF1379
L	3107	Inductor	CTF1379
L	3108	Inductor	CTF1379
L	3109	Inductor	CTF1379
L	3110	Inductor	CTF1379
L	3111	Inductor	LCYC4R7K1608
L	3201	Inductor	CTF1379
L	3202	Inductor	CTF1379
L	3203	Inductor	CTF1379

=====Circuit Symbol and No.		===Part Name	Part No.
L	3301	Inductor	CTF1379
L	3302	Inductor	CTF1399
L	3303	Inductor	CTF1399
L	3305	Inductor	CTF1379
L	3306	Inductor	CTF1399
L	3307	Coil	LCYA101J2520
L	3308	Inductor	CTF1473
X	3001	Radiator 4.97MHz	CSS1574
X	3301	Radiator 12.0MHz	CSS1568

RESISTORS

R	3001		RS1/16SS103J
R	3002		RS1/16SS103J
R	3003		RS1/16SS681J
R	3004		RS1/16SS103J
R	3005		RS1/16SS221J
R	3006		RS1/16SS221J
R	3007		RS1/16SS221J
R	3008		RS1/16SS0R0J
R	3009		RS1/16SS222J
R	3010		RS1/16SS473J
R	3011		RS1/16SS102J
R	3012		RS1/16SS103J
R	3013		RS1/16SS222J
R	3015		RS1/16SS105J
R	3016		RS1/16SS102J
R	3017		RS1/16SS221J
R	3018		RS1/16SS221J
R	3019		RS1/16SS103J
R	3020		RS1/16SS103J
R	3021		RS1/16SS682J
R	3022		RS1/16SS682J
R	3023		RS1/16SS221J
R	3024		RS1/16SS221J
R	3025		RS1/16SS221J
R	3027		RS1/16SS103J
R	3028		RS1/16SS221J
R	3029		RS1/16SS221J
R	3030		RS1/16SS221J
R	3031		RS1/16SS102J
R	3032		RS1/16SS102J
R	3033		RS1/16SS102J
R	3034		RS1/16SS103J
R	3036		RS1/16SS682J
R	3037		RS1/16SS682J
R	3038		RS1/16SS682J
R	3039		RS1/16SS682J
R	3040		RS1/16SS682J
R	3041		RS1/16SS681J
R	3042		RS1/16SS681J
R	3043		RS1/16SS681J
R	3044		RS1/16SS104J
R	3045		RS1/16SS104J
R	3046		RS1/16SS104J
R	3047		RAB4CQ220J
R	3049		RS1/16SS0R0J
R	3050		RAB4CQ220J
R	3051		RAB4CQ220J
R	3052		RAB4CQ220J
R	3053		RAB4CQ220J
R	3054		RAB4CQ220J
R	3055		RAB4CQ220J
R	3056		RAB4CQ220J
R	3057		RAB4CQ220J
R	3058		RAB4CQ220J
R	3059		RAB4CQ220J

=====Circuit Symbol and No.	Part Name	Part No.
R 3060		RS1/16SS101J
R 3061		RS1/16SS101J
R 3062		RAB4CQ220J
R 3064		RS1/16SS220J
R 3065		RS1/16SS220J
R 3066		RS1/16SS220J
R 3067		RS1/16SS102J
R 3068		RS1/16SS102J
R 3069		RS1/16SS102J
R 3070		RS1/16SS103J
R 3071		RS1/16SS102J
R 3077		RS1/16SS0R0J
R 3078		RS1/16SS332J
R 3079		RS1/16SS102J
R 3080		RS1/10S0R0J
R 3102		RS1/16SS682J
R 3103		RS1/16SS682J
R 3104		RS1/16SS0R0J
R 3105		RS1/16SS102J
R 3106		RS1/16SS682J
R 3107		RS1/16SS682J
R 3108		RS1/16SS682J
R 3109		RS1/16SS102J
R 3110		RS1/16SS104J
R 3111		RS1/16SS682J
R 3112		RS1/16SS680J
R 3113		RS1/16SS680J
R 3114		RS1/16SS680J
R 3115		RS1/16SS680J
R 3116		RS1/16SS680J
R 3117		RS1/16SS680J
R 3118		RS1/16SS680J
R 3119		RS1/16SS680J
R 3120		RS1/16SS680J
R 3121		RS1/16SS102J
R 3122		RS1/16SS101J
R 3123		RS1/16SS101J
R 3124		RS1/16SS101J
R 3125		RS1/16SS472J
R 3126		RS1/16SS221J
R 3127		RS1/16SS101J
R 3128		RS1/16SS101J
R 3129		RS1/16SS102J
R 3131		RS1/16SS202J
R 3132		RS1/16SS151J
R 3133		RS1/16SS332J
R 3134		RS1/16SS0R0J
R 3135		RS1/16SS0R0J
R 3140		RS1/16S0R0J
R 3141		RS1/16S0R0J
R 3143		RS1/16S0R0J
R 3201		RS1/16SS562J
R 3202		RS1/16SS473J
R 3204		RS1/16SS473J
R 3205		RS1/16SS103J
R 3206		RS1/16SS102J
R 3207		RS1/16SS270J
R 3208		RS1/16SS270J
R 3209		RS1/16SS270J
R 3210		RS1/16SS270J
R 3211		RS1/16SS270J
R 3212		RS1/16SS270J
R 3213		RS1/16SS270J
R 3214		RS1/16SS270J
R 3301		RS1/16SS470J
R 3302		RS1/16SS470J
R 3303		RS1/16SS104J
R 3304		RS1/16SS102J
R 3305		RS1/16SS102J
R 3306		RS1/16SS681J
R 3307		RS1/16SS103J
R 3308		RS1/16SS101J
R 3309		RS1/16SS101J
R 3310		RS1/16SS102J
R 3311		RS1/16SS101J
R 3313		RS1/16SS101J
R 3314		RS1/16SS104J
R 3315		RS1/16SS104J
R 3316		RS1/16SS104J
R 3317		RS1/16SS681J
R 3318		RS1/16SS0R0J
R 3320		RS1/16SS0R0J
R 3322		RS1/16SS680J
R 3323		RS1/16SS680J
R 3324		RS1/16SS680J
R 3326		RS1/16SS103J
R 3327		RS1/16SS103J
R 3328		RS1/16SS102J
R 3329		RS1/16SS102J
R 3330		RS1/16S102J
R 3333		RAB4CQ220J
R 3334		RAB4CQ220J
R 3335		RAB4CQ220J
R 3336		RAB4CQ220J
R 3337		RS1/16SS102J
R 3338		RS1/16SS102J
R 3340		RS1/16SS101J
R 3341		RS1/16SS101J
R 3342		RS1/16SS101J

CAPACITORS

=====Circuit Symbol and No.	Part Name	Part No.
C 3001		CKSRYB104K16
C 3002		CCSSCH220J50
C 3003		CSZSR470M6R3
C 3004		CCSSCH220J50
C 3005		CKSSYB103K16
C 3006		CKSRYB104K16
C 3007		CKSSYB104K10
C 3008		CKSRYB104K16
C 3009		CKSRYB104K16
C 3010		CSZSR470M6R3
C 3011		CKSSYB104K10
C 3012		CKSSYB103K16
C 3013		CKSRYB105K10
C 3014		CKSRYB105K10
C 3015		CKSYB106K6R3
C 3016		CKSSYB104K10
C 3017		CKSRYB105K10
C 3018		CKSSYB104K10
C 3019		CKSRYB104K16
C 3020		CKSSYB104K10
C 3021		CKSSYB104K10
C 3024		CKSRYB104K16
C 3025		CKSSYB104K10
C 3101		CCSSCH4R0C50
C 3102		CKSSYB104K10
C 3104		CKSRYB105K10
C 3105		CKSRYB105K10
C 3106		CKSSYB104K10
C 3107		CKSSYB104K10
C 3108		CCSRCH101J50

=====Circuit Symbol and No.	===Part Name	Part No.
C 3109		CKSSYB104K10
C 3110		CKSSYB104K10
C 3111		CKSSYB104K10
C 3112		CKSSYB104K10
C 3113		CKSSYB104K10
C 3114		CKSRYB105K10
C 3115		CKSSYB104K10
C 3116		CKSSYB104K10
C 3117		CKSSYB104K10
C 3118		CKSSYB104K10
C 3119		CKSRYB105K10
C 3120		CCSSCH220J50
C 3121		CCSRCH101J50
C 3122		CCSRCH101J50
C 3123		CKSYB475K10
C 3201		CKSSYB104K10
C 3204		CKSYB106K6R3
C 3205		CKSYB106K6R3
C 3301		CSZSR470M6R3
C 3302		CKSSYB104K10
C 3303		CKSSYB104K10
C 3304		CKSYB475K10
C 3305		CKSYB475K10
C 3306		CSZSR470M6R3
C 3307		CKSSYB104K10
C 3308		CKSSYB104K10
C 3309		CKSSYB104K10
C 3310		CKSSYB104K10
C 3312		CCSSCH330J50
C 3313		CCSSCH330J50
C 3314		CKSSYB104K10
C 3315		CKSSYB104K10
C 3316		CKSSYB104K10
C 3317		CKSRYB104K16
C 3318		CKSSYB104K10
C 3319		CKSSYB104K10
C 3320		CKSRYB104K16
C 3321		CKSRYB104K16
C 3323		CKSSYB104K10
C 3324		CKSRYB104K16
C 3325		CKSSYB104K10
C 3326		CKSSYB104K10
C 3327		CKSRYB104K16
C 3328		CKSSYB104K10
C 3329		CKSSYB104K10
C 3330		CKSRYB104K16
C 3331		CKSRYB104K16
C 3332		CKSSYB104K10
C 3333		CKSSYB104K10
C 3334		CKSRYB105K10
C 3335		CKSRYB105K10
C 3336		CKSSYB222K50
C 3337		CKSSYB222K50
C 3338		CSZSR470M6R3
C 3339		CSZSR470M6R3

E Unit Number : CWM7826
Unit Name : Panel Unit

MISCELLANEOUS

D	1801	LED	CL170UBX
D	1802	LED	CL170FGCD
D	1803	LED	CL170FGCD
S	1801	Switch(CSENS)	CSN1027
S	1802	Spring Switch(MSSENS)	CSN1051

=====Circuit Symbol and No.	===Part Name	Part No.

RESISTORS

R 1801		RS1/16S121J
R 1802		RS1/16S121J
R 1803		RS1/16S680J
R 1804		RS1/16S680J
R 1805		RS1/16S680J
R 1806		RS1/16S680J

CAPACITORS

C 1801		CKSRYB104K16

F Unit Number : CWX2532
Unit Name : CD Core Unit

MISCELLANEOUS

IC	201	IC	TA2153FN
IC	301	IC	TC9495F2
IC	401	IC	BA5811FM
IC	601	IC	PE5273A
IC	801	IC	BA05SFP
Q	101	Transistor	2SD1664
Q	102	Transistor	UMD2N
Q	601	Transistor	DTA114EU
TH	601	Thermistor	CCX1037
X	601	Ceramic Resonator 32.00MHz	CSS1544
S	901	Spring Switch(LOAD,EJ)	CSN1052
S	902	Spring Switch(LOAD,EJ)	CSN1052
S	903	Spring Switch(LOAD,EJ)	CSN1052
S	904	Spring Switch(HOME)	CSN1051

RESISTORS

R 101		RS1/16S222J
R 102		RS1/16S220J
R 103		RS1/16S220J
R 104		RS1/16S220J
R 105		RS1/16S220J
R 201		RS1/16S153J
R 202		RS1/16S153J
R 203		RS1/16S823J
R 204		RS1/16S823J
R 205		RS1/16S102J
R 206		RS1/16S823J
R 207		RS1/16S102J
R 208		RS1/16S124J
R 209		RS1/16S183J
R 210		RS1/16S153J
R 211		RS1/16S103J
R 212		RS1/16S103J
R 213		RS1/16S124J
R 215		RS1/16S471J
R 216		RS1/16S473J
R 217		RS1/16S473J
R 301		RS1/16S153J
R 302		RS1/16S332J
R 303		RS1/16S332J
R 304		RS1/16S105J
R 305		RS1/16S472J
R 308		RS1/16S471J
R 309		RS1/16S471J
R 310		RS1/16S471J
R 311		RS1/16S221J
R 312		RS1/16S103J
R 313		RS1/16S473J
R 314		RS1/16S224J
R 315		RS1/16S334J
R 316		RS1/16S473J

Circuit Symbol and No.		Part Name	Part No.
R	321		RS1/16S0R0J
R	401		RS1/16S103J
R	403		RS1/16S154J
R	404		RS1/16S362J
R	405		RS1/16S183J
R	406		RS1/16S183J
R	407		RS1/16S752J
R	408		RS1/16S102J
R	409		RS1/16S103J
R	410		RS1/16S752J
R	411		RS1/16S153J
R	412		RS1/16S154J
R	413		RS1/16S333J
R	602		RS1/16S1502D
R	603		RS1/16S222J
R	604		RS1/16S104J
R	605		RS1/16S223J
R	606		RS1/16S473J
R	607		RS1/16S103J
R	608		RS1/16S102J
R	609		RS1/16S102J
R	610		RAB4CQ102J
R	611		RS1/16S473J
R	701		RAB4CQ221J
R	702		RS1/16S221J
R	703		RS1/16S102J
R	704		RS1/16S0R0J
R	707		RS1/16S221J
R	708		RS1/16S0R0J
R	711		RS1/16S0R0J
R	713		RS1/16S0R0J
R	901		RS1/16S104J
R	902		RS1/16S473J
R	903		RS1/16S273J

CAPACITORS

Circuit Symbol and No.		Part Name	Part No.
C	101		CEVL470M6R3
C	102		CKSRYB102K50
C	103		CKSRYB104K16
C	104		CKSRYB334K10
C	105		CEVL470M6R3
C	106		CKSRYB104K16
C	201		CKSRYB104K16
C	202		CCSRCH560J50
C	204		CKSRYB334K10
C	205		CKSRYB334K10
C	206		CKSRYB273K25
C	207		CKSRYB273K25
C	208		CKSRYB104K16
C	209		CKSRYB104K16
C	210		CCSRCK2R0C50
C	211		CCSRCH220J50
C	212		CCSRCH220J50
C	301		CKSRYB153K25
C	302		CKSRYB104K16
C	303		CKSRYB103K50
C	304		CKSRYB822K50
C	305		CKSRYB223K25
C	306		CKSRYB104K16
C	307		CKSRYB103K50
C	308		CKSRYB104K16
C	309		CKSRYB473K16
C	310		CKSRYB473K16
C	311		CKSRYB104K16
C	312		CKSRYB104K16
C	313		CKSRYB104K16
C	314		CCSRCH221J50
C	315		CEVL220M16
C	316		CEVL101M6R3
C	317		CKSRYB104K16
C	318		CKSRYB104K16
C	319		CKSRYB104K16
C	320		CCSRCH330J50
C	325		CCSRCH471J50
C	329		CKSRYB223K25
C	401		CCSRCH271J50
C	402		CCSRCH471J50
C	403		CKSRYB223K25
C	404		CKSRYB103K50
C	405		CEVL101M10
C	601		CKSRYB103K50
C	602		CKSRYB472K50
C	703	10µF/10V	CCH1349
C	801	10µF/10V	CCH1349
C	802		CEVL101M6R3
C	803		CKSRYB334K10
C	901		CKSRYB103K50
C	902		CKSRYB103K50

Miscellaneous Parts List

M	1	Carriage Motor Assy(-D)	CXB6361
M	2	Load Motor Assy(-D)	CXB6340
M	3	Motor Unit(SPINDLE)	CXB6620
		Pickup Unit(Service)(P8)	CXX1305