



## PARTS LIST

### MONITOR WITH DVD RECEIVER

|             |             |             |
|-------------|-------------|-------------|
| KW-NSX700A  | KW-NSX700E  | KW-NSX700EE |
| KW-NSX700EU | KW-NSX700J  | KW-NSX700U  |
| KW-NSX700UI | KW-NSX700UP |             |

## ■ PRECAUTIONS ON SCHEMATIC DIAGRAMS

- Due to the improvement in performance, some part numbers shown in the circuit diagrams may not agree with those indicated in the Parts List.
- The parts numbers, values and rated voltage etc. in the Schematic Diagrams are for reference only.
- Since the circuit diagrams are standard ones, the circuits and circuit constants may be subject to change for improvement without any notice.

## ■ PRECAUTIONS ON PARTS LIST

- The parts identified by the  $\triangle$  symbol are critical for safety. Whenever replacing these parts, be sure to use specified ones to secure the safety.
- The parts not indicated in this Parts List and those which are filled with lines --- in the Parts No. columns will not be supplied.
- P.W. BOARD Ass'y will not be supplied, but those which are filled with the Parts No. in the Parts No. columns will be supplied.
- When ordering chips, screws etc., place bulk orders (unit of tens) whenever possible to improve shipping efficiency.
- There are cases where the actual implemented parts in the sets and the service parts are different. When ordering parts, make sure to refer to the Parts List.


## ■ PRECAUTIONS ON SERVICE

Certain parts of the power circuits and the GNDs differ according to the models. Care must be taken for the following points as the differences are indicated separately in the LIVE GND () and the ISOLATED (NEUTRAL) GND ()

1. Do not touch the LIVE GND, or do not touch the LIVE GND and the ISOLATED (NEUTRAL) GND at the same time. It may cause an electric shock.  
Before pulling out the chassis or other parts, make sure to pull out the power cord from the wall outlet first.
2. Do not short circuit between the LIVE GND and ISOLATED (NEUTRAL) GND, or never measure the LIVE GND and ISOLATED (NEUTRAL) GND at the same time using measuring instruments (oscilloscope, etc.). It may blow fuses or damage other parts.

## ■ DEVIATION TOLERANCE RANGE

| DEVIATION TOLERANCE RANGE |      |      |      |      |      |              |              |              |              |
|---------------------------|------|------|------|------|------|--------------|--------------|--------------|--------------|
| F                         | G    | J    | K    | M    | N    | R            | H            | Z            | P            |
| ± 1%                      | ± 2% | ± 5% | ±10% | ±20% | ±30% | +30%<br>-10% | +50%<br>-10% | +80%<br>-20% | +100%<br>-0% |

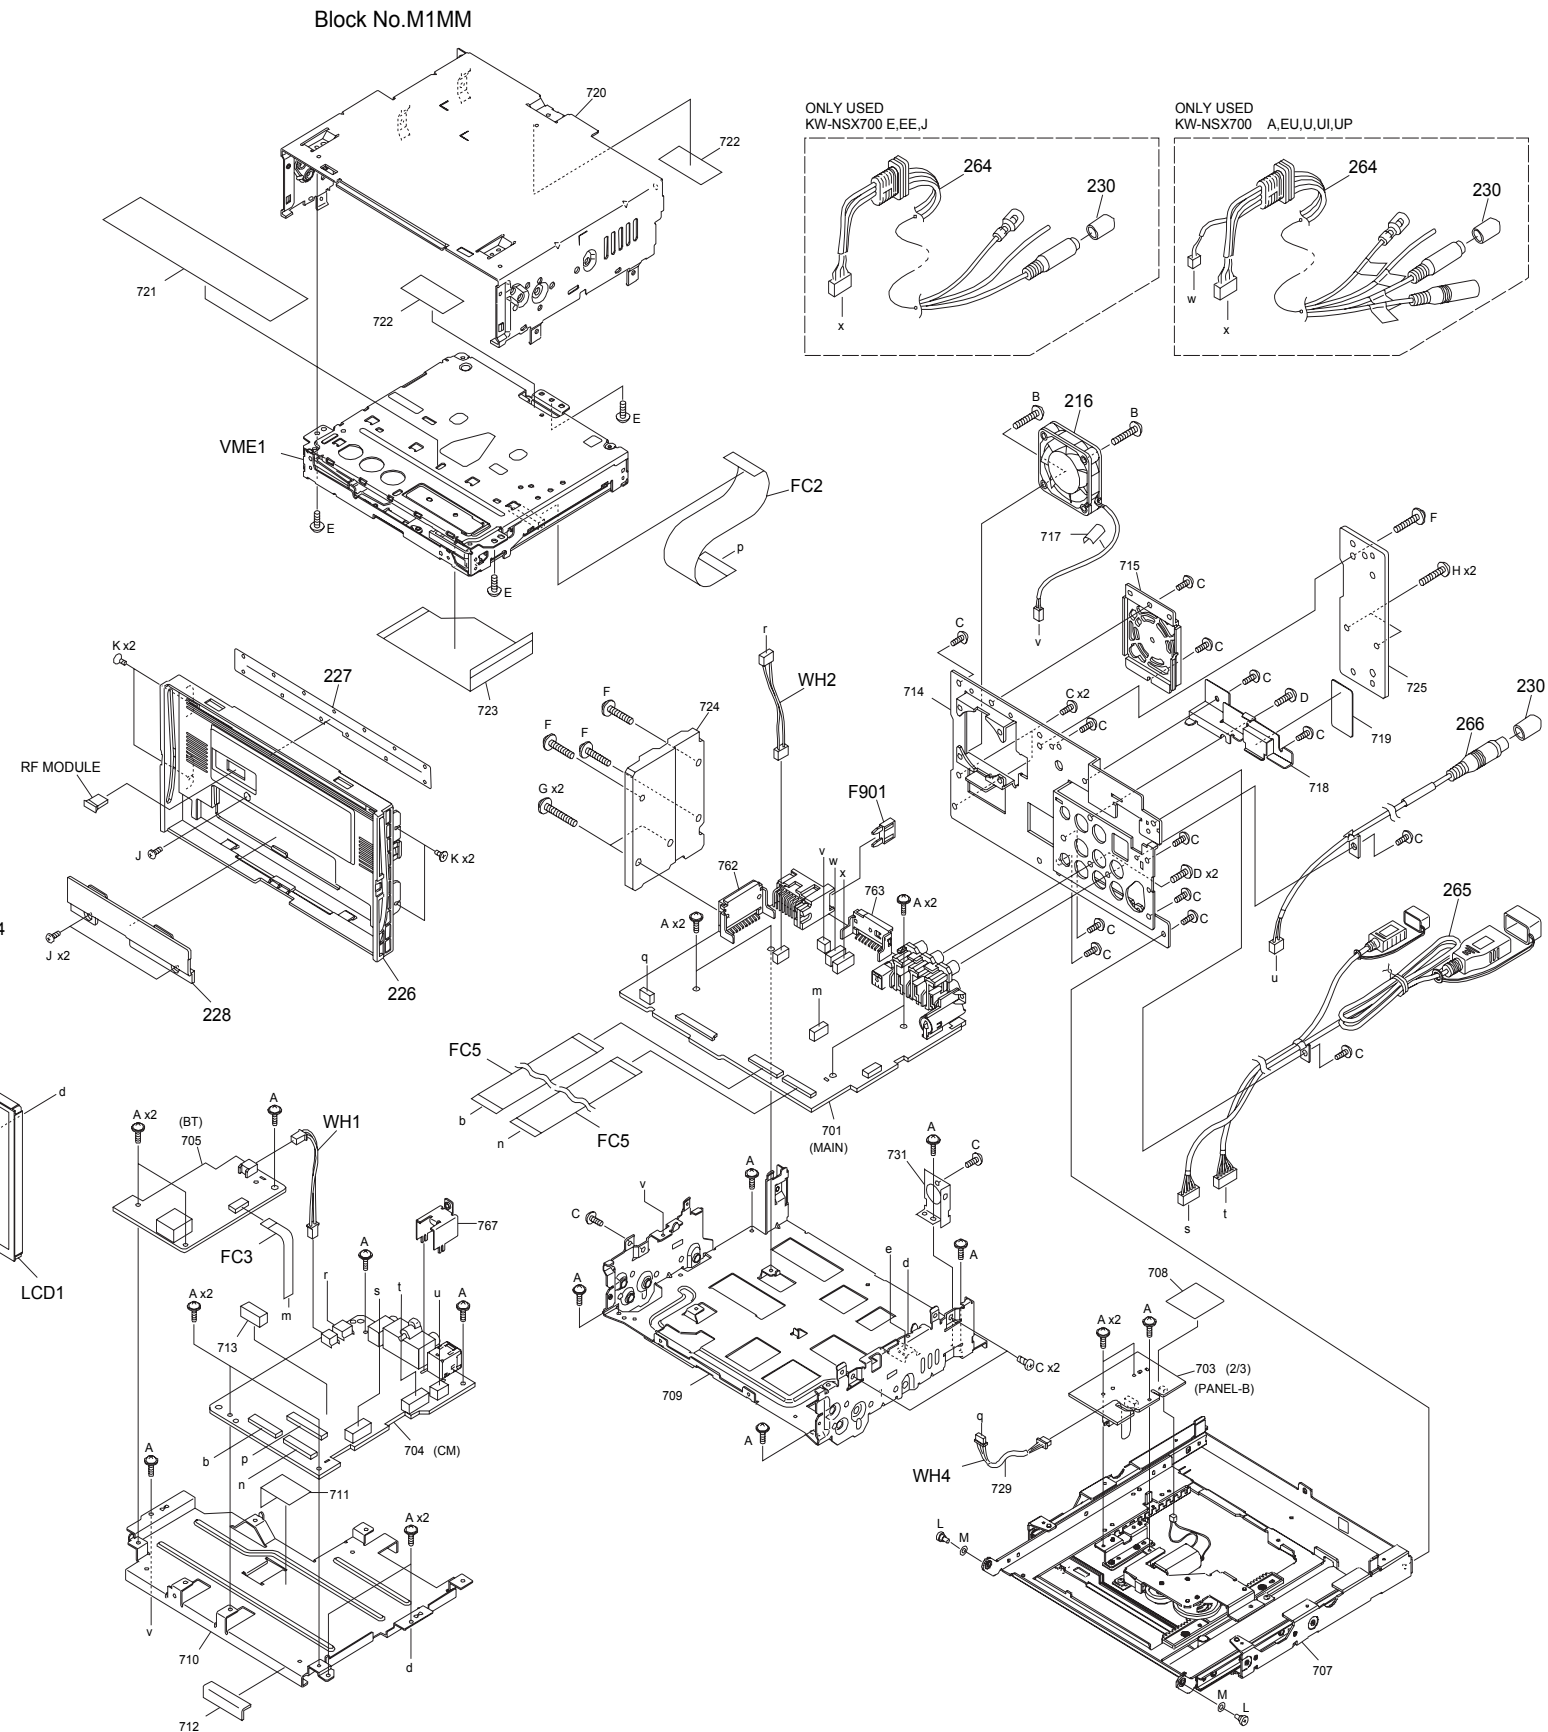[illegible]


created date:2013-02-18

| MODEL      | MARK | MODEL      | MARK | MODEL       | MARK | MODEL       | MARK |
|------------|------|------------|------|-------------|------|-------------|------|
| KW-NSX700A | A    | KW-NSX700E | B    | KW-NSX700EE | C    | KW-NSX700EU | D    |
| KW-NSX700J | E    | KW-NSX700U | F    | KW-NSX700UI | G    | KW-NSX700UP | H    |

| Safe                        | Symbol No. | Parts No.       | Parts Name            | Description         | QTY | Local         |
|-----------------------------|------------|-----------------|-----------------------|---------------------|-----|---------------|
| EXPLODED VIEW (UNIT) <M1MM> |            |                 |                       |                     |     |               |
| △                           | DC1        | QAM1351-002     | DC CORD               |                     | 1   | A,E,F,G,H     |
| △                           | DC2        | QAM1352-003     | DC CORD               |                     | 1   | B,C,D         |
| △                           | F901       | QMF2064-100-J1  | FUSE                  | 10A                 | 1   |               |
|                             | FC1        | QUQY05-3005BC-E | FFC WIRE              | 30pin 5cm           | 1   |               |
|                             | FC2        | QUQY05-5010BC-E | FFC WIRE              | 50pin 10cm          | 1   |               |
|                             | FC3        | QUQY05-12X8BC-E | FFC WIRE              | 12pin 8.5cm         | 1   |               |
|                             | FC4        | WJT0261-001A-E  | E-CARD WIRE           |                     | 1   |               |
|                             | FC5        | WJT0316-001A-E  | E-CARD WIRE           |                     | 2   |               |
|                             | FPC1       | QAL1376-001     | FPC                   |                     | 1   |               |
|                             | LCD1       | QLD0721-001     | LCD MODULE            |                     | 1   |               |
|                             | PA1        | LV11743-020A    | FRONT PANEL           |                     | 1   | A,B,C,D,F,G,H |
|                             | PA1        | LV11743-019A    | FRONT PANEL           |                     | 1   | E             |
|                             | VME1       | FMU-XS2-51D     | DVD MECHANISM         |                     | 1   |               |
|                             | WH1        | WJJ1272-001A-E  | E-SI C WIRE C-C       |                     | 1   |               |
|                             | WH2        | WJJ1273-001A-E  | E-SI C WIRE C-C       |                     | 1   |               |
|                             | WH4        | QJJ075-060801-E | SIN CR C-C W          |                     | 1   |               |
|                             | A          | LV44615-003A    | SPECIAL SCREW         |                     | 34  |               |
|                             | B          | LV45522-002A    | SPECIAL SCREW         |                     | 2   |               |
|                             | C          | LV44800-002A    | SPECIAL SCREW         |                     | 19  |               |
|                             | D          | QYSDSF3010ZA    | TAP SCREW             | M3 x 10mm           | 3   |               |
|                             | E          | LV44800-004A    | SPECIAL SCREW         |                     | 3   |               |
|                             | F          | GE40377-003A    | SPECIAL SCREW         |                     | 4   |               |
|                             | G          | LV41200-007A    | SPECIAL SCREW         |                     | 2   |               |
|                             | H          | QYSDST2610ZA    | TAP SCREW             | M2.6 x 10mm         | 2   |               |
|                             | J          | QYSDST2006MA    | TAP SCREW             | M2 x 6mm            | 3   |               |
|                             | K          | LV43819-008A    | SPECIAL SCREW         |                     | 4   |               |
|                             | L          | LV44470-002A    | SPECIAL SCREW         |                     | 2   |               |
|                             | M          | LV45039-001A    | WAVE WASHER           |                     | 2   |               |
|                             | N          | LV44464-001A    | SPECIAL SCREW         |                     | 4   |               |
|                             | P          | QYWFM628050     | WASHER                | 8mm/6.2mm x 0.5mm   | 2   |               |
|                             | Q          | LV45701-001A    | SPECIAL SCREW         |                     | 2   |               |
|                             | R          | LV44159-002A    | MINI SCREW            |                     | 5   |               |
|                             | 206        | CB-NSX700KYD    | KEY UNIT              | LVA11182-01A        | 1   |               |
| △                           | 216        | QAR0521-001     | COOLING FAN           |                     | 1   |               |
|                             | 226        | LV11796-008A    | FRONT CHASSIS         |                     | 1   |               |
|                             | 227        | LV45134-003A    | BLIND                 |                     | 1   |               |
|                             | 228        | LV22941-001A    | FPC GUIDE             |                     | 1   |               |
|                             | 230        | GE40101-001A    | PIN CAP               |                     | 2   |               |
|                             | 233        | LV22885-002A    | BUTTON BASE           |                     | 1   |               |
|                             | 234        | LV39130-005A    | BUTTON TOP(L)         |                     | 1   |               |
|                             | 235        | LV39131-005A    | BUTTON TOP(C)         |                     | 1   |               |
|                             | 236        | LV39132-005A    | BUTTON TOP(R)         |                     | 1   |               |
|                             | 237        | LV39133-003A    | BUTTON L1             |                     | 1   |               |
|                             | 238        | LV39134-005A    | BUTTON L2             |                     | 1   |               |
|                             | 239        | LV39962-001A    | RESET BUTTON          |                     | 1   |               |
|                             | 240        | LV39963-001A    | BUTTON COVER          |                     | 1   |               |
|                             | 241        | LV39136-006A    | BUTTON R2             |                     | 1   |               |
|                             | 244        | QAL1307-001     | TOUCH PANEL           |                     | 1   |               |
|                             | 252        | LV44468-002A    | SPRING                |                     | 2   |               |
|                             | 253        | LV44469-001A    | ROLLER                |                     | 2   |               |
|                             | 254        | LV44471-003A    | TOR SPRING            |                     | 1   |               |
|                             | 255        | QYSDSP5008ZA    | SCREW                 | M5 x 8mm            | 8   |               |
|                             | 256        | QYSSSP5008ZA    | SCREW                 | M5 x 8mm            | 8   |               |
|                             | 257        | QAM1503-002     | CAR CABLE(MICRO US B) |                     | 1   |               |
|                             | 259        | QAN0109-001     | MICROPHONE            |                     | 1   |               |
|                             | 260        | QAU0526-003     | RF MODULE             |                     | 1   |               |
|                             | 261        | LV36544-001A    | TRANSPORT BKT         |                     | 2   | A,F,G,H       |
|                             | 261        | LV37518-001A    | TRANSPORT BKT         |                     | 2   | B,C,D,E       |
|                             | 264        | QAM1414-001     | CAR CABLE(AV)         |                     | 1   | A,D,F,G,H     |
|                             | 264        | QAM1415-001     | CAR CABLE(AV)         |                     | 1   | B,C,E         |
|                             | 265        | QAM1502-002     | CAR CABLE(USB)        |                     | 1   | A,B,C,E,F,G,H |
|                             | 265        | QAM1502-003     | CAR CABLE(USB)        |                     | 1   | D             |
|                             | 266        | QAM1500-001     | CAR CABLE(CAMERA I N) |                     | 1   |               |
|                             | 268        | LV45399-001A    | HOOK                  |                     | 2   | B,C,D,E       |
|                             | 269        | VKZ4027-202     | PLUG NUT              |                     | 1   | B,C,D,E       |
|                             | 270        | GE40426-002A    | MOUNT BOLT            |                     | 1   | B,C,D,E       |
|                             | 271        | VKZ4328-003     | LOCK NUT              |                     | 1   | B,C,D,E       |
|                             | 272        | QYWWWS53A008ZA  | WASHER                |                     | 1   | B,C,D,E       |
|                             | 273        | LV22463-005A    | TRIM PLATE            |                     | 1   | B,C,D,E,G     |
|                             | 274        | LV22812-002A    | SLEEVE ASSY           |                     | 1   | B,C,D,E       |
|                             | 501        | LVT2404-001A    | INST BOOK             | ENG                 | 1   | A             |
|                             | 501        | LVT2398-001A    | INST BOOK             | ENG GER FRE DAT     | 1   | B             |
|                             | 501        | LVT2399-001A    | INST BOOK             | RUS UKR             | 1   | C             |
|                             | 501        | LVT2400-001A    | INST BOOK             | ENG SPA RUS         | 1   | D             |
|                             | 501        | LVT2397-001A    | INST BOOK             | ENG SPA FRE         | 1   | E             |
|                             | 501        | LVT2401-001A    | INST BOOK             | ENG CHI(TAIWAN) THA | 1   | F             |
|                             | 501        | LVT2402-001A    | INST BOOK             | ENG                 | 1   | G             |
|                             | 501        | LVT2403-001A    | INST BOOK             | KOR                 | 1   | H             |
|                             | 502        | LVT2398-002A    | INST BOOK             | SPA ITA POR SWE     | 1   | B             |
|                             | 502        | LVT2400-002A    | INST BOOK             | ARA PER TUR         | 1   | D             |
|                             | 503        | LVT2397-002A    | SUB MANUAL            | ENG SPA FRE         | 1   | E             |
|                             | 504        | LV3A244-001A    | CARTON                |                     | 1   | A,D,F,G,H     |
|                             | 504        | LV3A243-001A    | CARTON                |                     | 1   | B,C           |
|                             | 504        | LV3A129-002A    | CARTON                |                     | 1   | E             |

# EXPLODED VIEW (PANEL MECHA ASSY)

Block No.M2MM

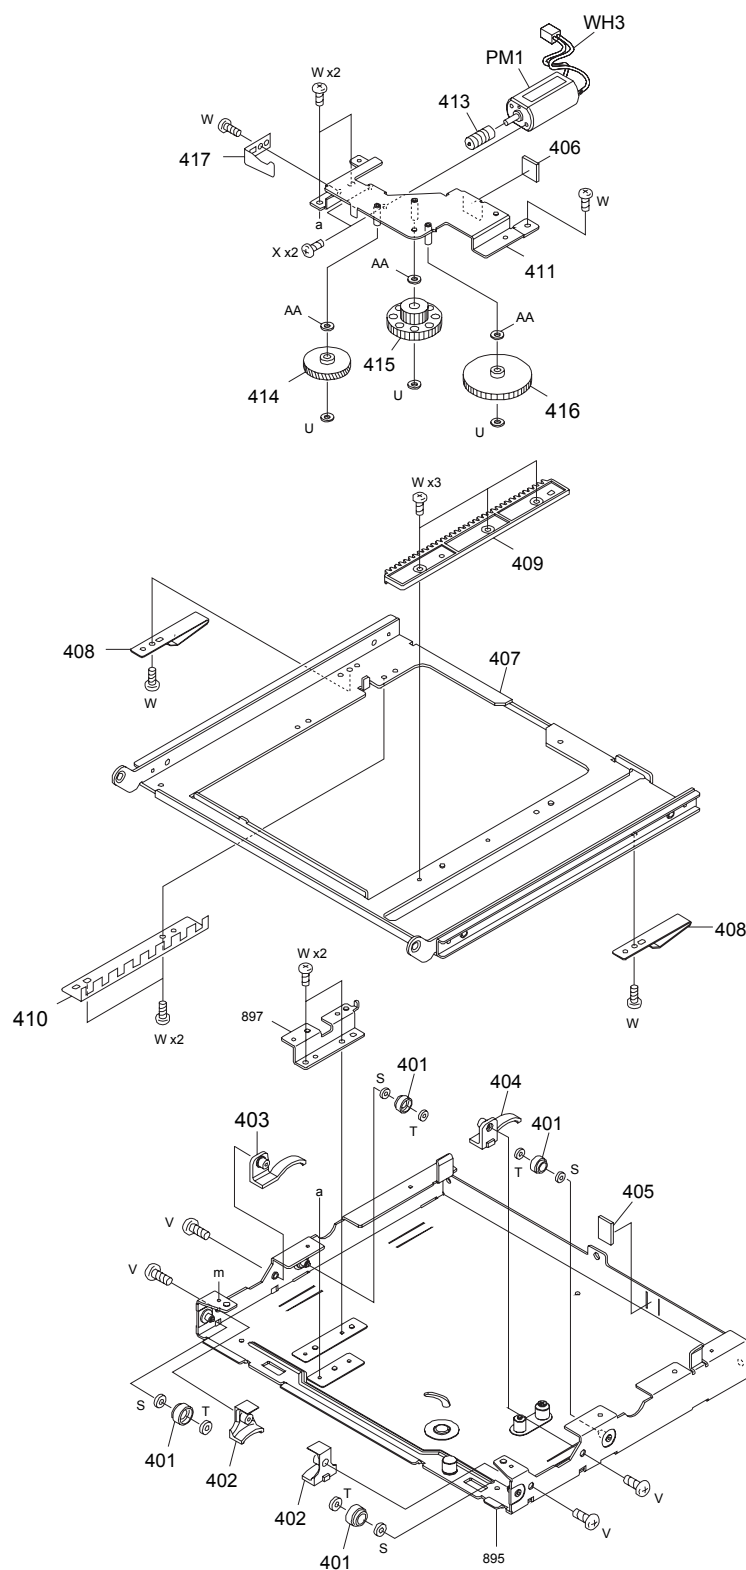

Parts with the exploded numbers larger than 800 are not supplied.

| MODEL      | MARK | MODEL      | MARK | MODEL       | MARK | MODEL       | MARK |
|------------|------|------------|------|-------------|------|-------------|------|
| KW-NSX700A | A    | KW-NSX700E | B    | KW-NSX700EE | C    | KW-NSX700EU | D    |
| KW-NSX700J | E    | KW-NSX700U | F    | KW-NSX700UI | G    | KW-NSX700UP | H    |


| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|------|------------|-----------|------------|-------------|-----|-------|
|------|------------|-----------|------------|-------------|-----|-------|

EXPLODED VIEW (PANEL MECHA ASSY) <M2MM>

|     |                |                 |                    |    |
|-----|----------------|-----------------|--------------------|----|
| PM1 | QAR0378-002    | FEED MOTOR      |                    | 1  |
| WH3 | WJM0460-001A-E | E-SI C WIRE C-F |                    | 1  |
| AA  | QYWFM265013    | WASHER          | 5mm/2.6mm x 0.13mm | 3  |
| S   | QYWFM315013    | WASHER          | 5mm/3.1mm x 0.13mm | 4  |
| T   | QYWDL164035    | SLIT WASHER     | 4mm/1.6mm x 0.35mm | 4  |
| U   | QYWDM215025    | SLIT WASHER     | 5mm/2.1mm x 0.25mm | 3  |
| V   | QYSPSFT1745ZA  | TAP SCREW       | M1.7 x 4.5mm       | 4  |
| W   | LV44159-004A   | MINI SCREW      |                    | 13 |
| X   | QYSPSPT2020ZA  | SCREW           | M2 x 2mm           | 2  |
| 401 | LV44666-003A   | ROLLER(SLD)     |                    | 4  |
| 402 | LV36940-002A   | RAIL GUIDE      |                    | 2  |
| 403 | LV37308-001A   | GUIDE SPRING(L) |                    | 1  |
| 404 | LV37309-001A   | GUIDE SPRING(R) |                    | 1  |
| 405 | LV40846-053A   | SPACER(F)       |                    | 1  |
| 406 | LV40846-057A   | SPACER(F)       |                    | 1  |
| 407 | LV36514-012A   | DRIVE PLATE ASS |                    | 1  |
| 408 | LV44453-004A   | FRICTION SPRING |                    | 2  |
| 409 | LV36516-001A   | RACK GEAR       |                    | 1  |
| 410 | LV36517-003A   | PHOTO PLATE     |                    | 1  |
| 411 | LV36509-002A   | DR.CHASSIS ASSY |                    | 1  |
| 413 | LV44451-001A   | WORM GEAR       |                    | 1  |
| 414 | LV36511-001A   | SECOND GEAR     |                    | 1  |
| 415 | LV36512-001A   | THIRD GEAR      |                    | 1  |
| 416 | LV36513-001A   | FORTH GEAR      |                    | 1  |
| 417 | LV44452-001A   | SPRING(WORM)    |                    | 1  |

# EXPLODED VIEW (DVD MECHANISM: FMU-XS2-51D)

Block No.MJMM

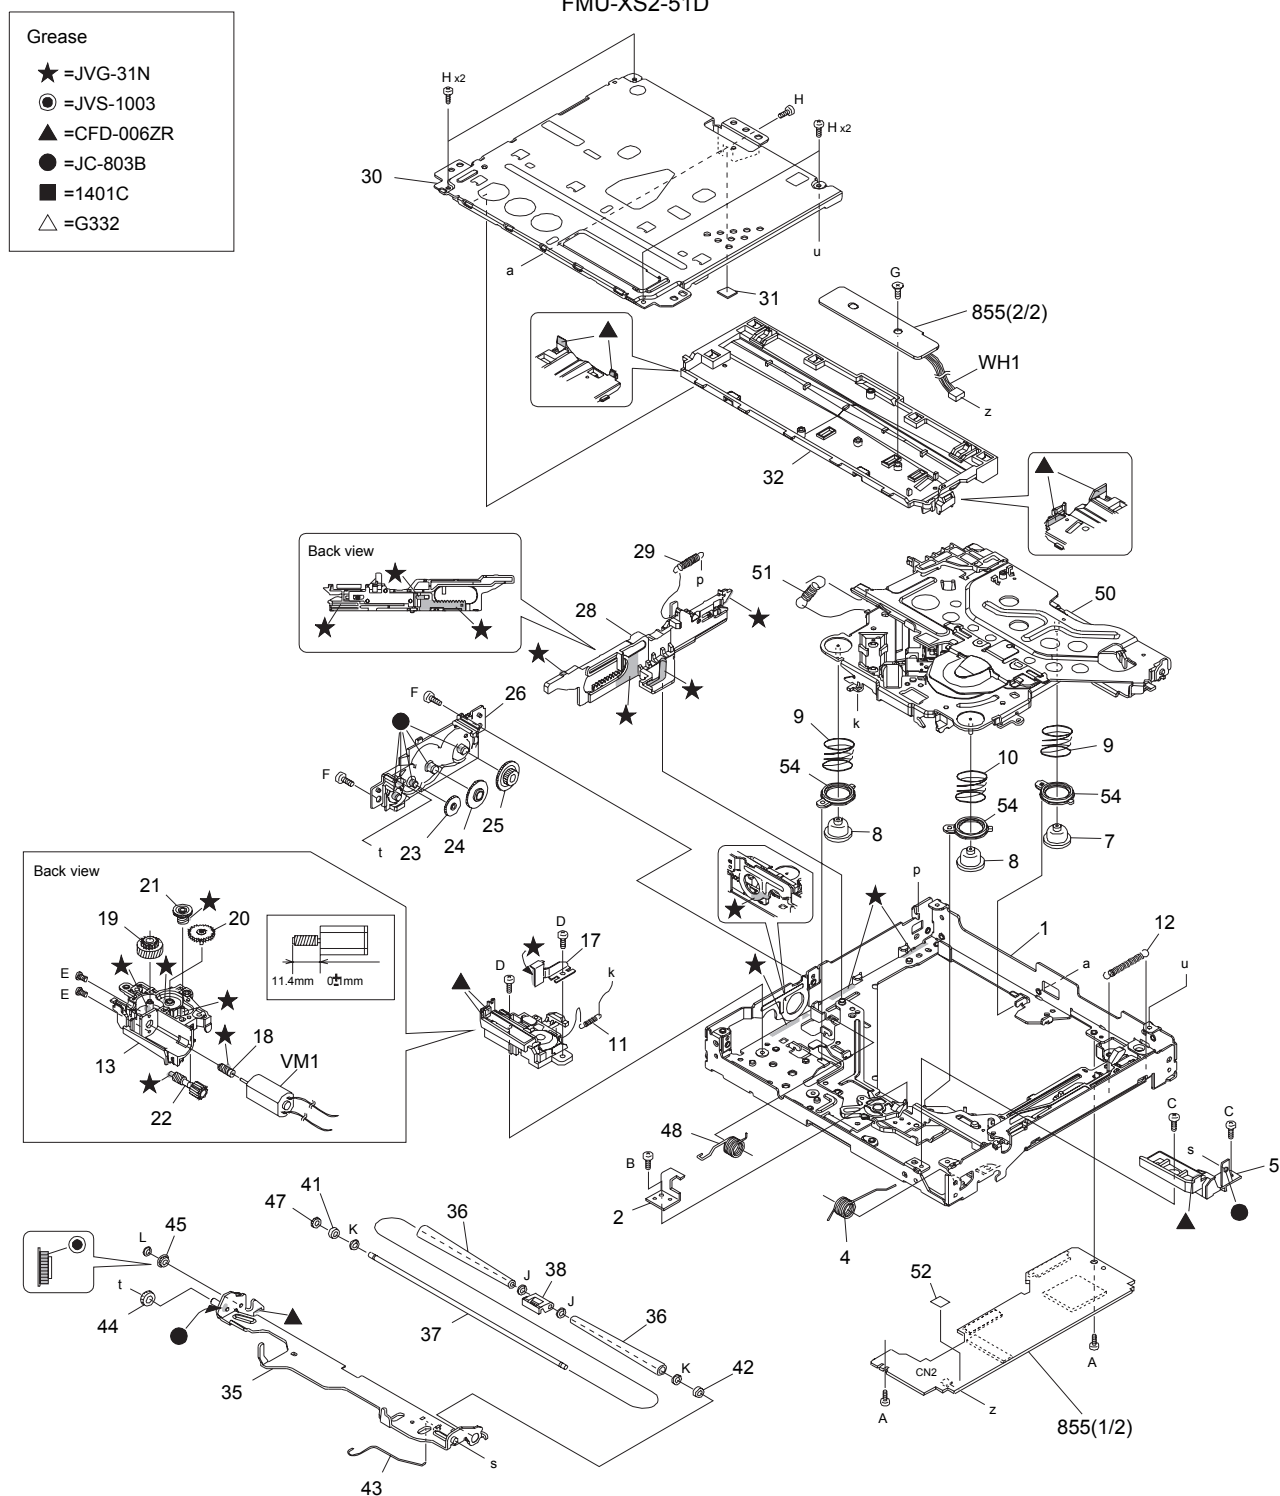

| MODEL      | MARK | MODEL      | MARK | MODEL       | MARK | MODEL       | MARK |
|------------|------|------------|------|-------------|------|-------------|------|
| KW-NSX700A | A    | KW-NSX700E | B    | KW-NSX700EE | C    | KW-NSX700EU | D    |
| KW-NSX700J | E    | KW-NSX700U | F    | KW-NSX700UI | G    | KW-NSX700UP | H    |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|------|------------|-----------|------------|-------------|-----|-------|
|------|------------|-----------|------------|-------------|-----|-------|

EXPLODED VIEW (DVD MECHANISM: FMU-XS2-51D) <MJMM>

|     |                |                    |   |
|-----|----------------|--------------------|---|
| VM1 | QAR0531-001    | LOADING MOTOR      | 1 |
| WH1 | WJS0108-001A-E | E-FL/RB WIRE       | 1 |
| A   | VKZ4539-054    | MINI SCREW         | 2 |
| B   | LV44959-002A   | SPECIAL SCREW      | 1 |
| C   | VKZ4539-054    | MINI SCREW         | 2 |
| D   | LV45135-001A   | MINI TAP SCREW     | 2 |
| E   | QYSPSPU1425MA  | SCREW              | 2 |
| F   | VKZ4539-054    | MINI SCREW         | 2 |
| G   | LV44586-001A   | SPECIAL SCREW      | 1 |
| H   | VKZ4539-054    | MINI SCREW         | 5 |
| J   | LV45252-001A   | WASHER             | 2 |
| K   | LV44960-001A   | SLIT WASHER        | 2 |
| L   | QYWDL1735250   | SLIT WASHER        | 1 |
| 1   | LV11435-009A   | MECHA FRAME        | 1 |
| 2   | LV45021-001A   | STOPPER            | 1 |
| 4   | LV45249-002A   | L A SPRING(R) 2    | 1 |
| 5   | LV37639-002A   | L ARM HOLDER       | 1 |
| 7   | LV45639-002A   | INSULATOR          | 1 |
| 8   | LV45639-001A   | INSULATOR          | 2 |
| 9   | LV45074-001A   | DAMPER SPRING B    | 2 |
| 10  | LV45073-001A   | DAMPER SPRING A    | 1 |
| 11  | LV44897-002A   | FLOATING SPRING    | 1 |
| 12  | LV44894-001A   | LOCK SLIDER SPRING | 1 |
| 13  | LV11436-001A   | MOTOR HOLDER       | 1 |
| 17  | LV37642-001A   | MOTOR TH SPRING    | 1 |
| 18  | LV37643-002A   | MOTOR WORM GEAR    | 1 |
| 19  | LV37644-002A   | M WHEEL GEAR       | 1 |
| 20  | LV37645-002A   | M CONNECT GEAR     | 1 |
| 21  | LV37646-001A   | A WORM GEAR        | 1 |
| 22  | LV37647-001A   | A WHEEL GEAR       | 1 |
| 23  | LV37648-001A   | ACT GEAR           | 1 |
| 24  | LV37649-001A   | A CONNECT GAER     | 1 |
| 25  | LV37650-001A   | LOAD GAER          | 1 |
| 26  | LV22553-003A   | GEAR BASE          | 1 |
| 28  | LV37688-002A   | SLIDE CAM ASSY     | 1 |
| 29  | LV45090-001A   | S.CAM SPRING       | 1 |
| 30  | LV11437-003A   | TOP COVER          | 1 |
| 31  | LV45719-001A   | PU FPC SHEET       | 1 |
| 32  | LV11600-001A   | DISC PLATE 2       | 1 |
| 35  | LV22735-001A   | LOADING A AS 2     | 1 |
| 36  | LV44902-002A   | ROLLER             | 2 |
| 37  | LV45244-001A   | ROLLER SHAFT 2     | 1 |
| 38  | LV37652-002A   | SHAFT GUIDE        | 1 |
| 41  | LV44904-001A   | ROLLER COLLAR L    | 1 |
| 42  | LV45221-001A   | R. COLLAR R2       | 1 |
| 43  | LV45235-001A   | L ARM ROD          | 1 |
| 44  | LV37653-001A   | CONNECT GEAR       | 1 |
| 45  | LV37654-001A   | MIDDLE GEAR        | 1 |
| 47  | LV37655-001A   | ROLLER GAER        | 1 |
| 48  | LV45248-001A   | L A SPRING(L) 2    | 1 |
| 50  | CM-FMUXM1D     | TRA MECHA UNIT     | 1 |
| 51  | LV44910-002A   | CLAMPER SPRING     | 1 |
| 52  | LV45289-002A   | SPACER(P)          | 1 |
| 54  | LV39479-002A   | INSULATOR CAP      | 3 |

| MODEL      | MARK | MODEL      | MARK | MODEL       | MARK | MODEL       | MARK |
|------------|------|------------|------|-------------|------|-------------|------|
| KW-NSX700A | A    | KW-NSX700E | B    | KW-NSX700EE | C    | KW-NSX700EU | D    |
| KW-NSX700J | E    | KW-NSX700U | F    | KW-NSX700UI | G    | KW-NSX700UP | H    |

| Safe                          | Symbol No. | Parts No.       | Parts Name      | Description | QTY | Local       |
|-------------------------------|------------|-----------------|-----------------|-------------|-----|-------------|
| MAIN UNIT (LVA11176-xxA) <01> |            |                 |                 |             |     |             |
|                               | IC11       | TEF6614TV1S3-X  | IC              |             | 1   |             |
|                               | IC101      | TB2931HQ        | IC              |             | 1   |             |
|                               | IC141      | TDA7415CB       | IC              |             | 1   |             |
|                               | IC162      | NJM2584AM-X     | IC              |             | 1   |             |
|                               | IC191      | NJM4565E-X      | IC              |             | 1   |             |
|                               | IC701      | JVM627C         | IC(MCU)         |             | 1   |             |
|                               | IC721      | R1EX24016ASAA-X | IC              |             | 1   |             |
|                               | IC731      | XC6120N242NG-X  | IC              |             | 1   |             |
|                               | IC801      | LV5680NPVC      | IC              |             | 1   |             |
|                               | IC802      | BD9673EFJ-X     | IC              |             | 1   |             |
|                               | IC803      | BA9743AFV-X     | IC              |             | 1   |             |
|                               | IC821      | XC6213B332NG-X  | IC              |             | 1   |             |
|                               | IC851      | BAJ5CC0FP-X     | IC              |             | 1   |             |
|                               | IC931      | RT3J33M-X       | MOS FET ARRAY   |             | 1   | A,D,F,G,H   |
|                               | IC981      | BA6956AN        | IC              |             | 1   |             |
|                               | Q731       | LTA014EEB-X     | DIGI TRANSISTOR |             | 1   |             |
|                               | Q791       | 2SA812A/5-6/-X  | TRANSISTOR      |             | 1   |             |
|                               | Q803       | LTC014EEB-X     | DIGI TRANSISTOR |             | 1   |             |
|                               | Q804       | LTA014EEB-X     | DIGI TRANSISTOR |             | 1   |             |
|                               | Q805       | LTC014EEB-X     | DIGI TRANSISTOR |             | 1   |             |
|                               | Q821       | LTA014EEB-X     | DIGI TRANSISTOR |             | 1   |             |
|                               | Q822       | LTC044EEB-X     | DIGI TRANSISTOR |             | 1   |             |
|                               | Q871       | MTM98140-X      | TRANSISTOR      |             | 1   |             |
|                               | Q872       | LTA014EEB-X     | DIGI TRANSISTOR |             | 1   |             |
|                               | Q873       | LTC044EEB-X     | DIGI TRANSISTOR |             | 1   |             |
|                               | Q874       | LTC014EEB-X     | DIGI TRANSISTOR |             | 1   |             |
|                               | Q875       | LTA014EEB-X     | DIGI TRANSISTOR |             | 1   |             |
|                               | Q921       | LSAR523UB-X     | TRANSISTOR      |             | 1   |             |
|                               | Q922       | LTC014YEB-X     | DIGI TRANSISTOR |             | 1   |             |
|                               | Q931       | LTC014YEB-X     | DIGI TRANSISTOR |             | 1   | A,D,F,G,H   |
|                               | Q971       | LSCR523UB-X     | TRANSISTOR      |             | 1   |             |
|                               | Q972       | LSCR523UB-X     | TRANSISTOR      |             | 1   |             |
|                               | Q981       | LTC014EEB-X     | DIGI TRANSISTOR |             | 1   |             |
|                               | Q1121      | IMX9-W          | PAIR TRANSISTOR |             | 1   |             |
|                               | Q1221      | IMX9-W          | PAIR TRANSISTOR |             | 1   |             |
|                               | Q1341      | IMX9-W          | PAIR TRANSISTOR |             | 1   |             |
|                               | Q1401      | INC2002AC1-X    | TRANSISTOR      |             | 1   |             |
|                               | Q1501      | LTA014EEB-X     | DIGI TRANSISTOR |             | 1   |             |
|                               | Q1502      | LSCR523UB-X     | TRANSISTOR      |             | 1   |             |
|                               | Q1503      | LTA014EEB-X     | DIGI TRANSISTOR |             | 1   |             |
|                               | Q1504      | LTA014EEB-X     | DIGI TRANSISTOR |             | 1   |             |
|                               | Q1505      | LTC043ZEB-X     | DIGI TRANSISTOR |             | 1   |             |
|                               | Q1507      | LTC043ZEB-X     | DIGI TRANSISTOR |             | 1   |             |
|                               | Q1508      | LTC043ZEB-X     | DIGI TRANSISTOR |             | 1   |             |
|                               | Q1942      | LSCR523UB-X     | TRANSISTOR      |             | 1   |             |
|                               | Q1943      | LTA014YEB-X     | DIGI TRANSISTOR |             | 1   |             |
|                               | Q1944      | LSCR523UB-X     | TRANSISTOR      |             | 1   |             |
|                               | Q1951      | RT1N141U-X      | DIGI TRANSISTOR |             | 1   |             |
|                               | Q1961      | LTC014EEB-X     | DIGI TRANSISTOR |             | 1   |             |
|                               | Q6221      | LTA043ZEB-X     | DIGI TRANSISTOR |             | 1   |             |
|                               | Q6222      | LTA043ZEB-X     | DIGI TRANSISTOR |             | 1   |             |
|                               | Q6223      | LTC043ZEB-X     | DIGI TRANSISTOR |             | 1   |             |
|                               | Q6224      | LTC043ZEB-X     | DIGI TRANSISTOR |             | 1   |             |
|                               | Q8021      | LTC014EEB-X     | DIGI TRANSISTOR |             | 1   |             |
|                               | Q8101      | RSQ030P03-W     | MOS FET         |             | 1   |             |
|                               | Q8102      | 2SC1623A/5-6/-X | TRANSISTOR      |             | 1   |             |
|                               | Q8103      | 2SA812A/5-6/-X  | TRANSISTOR      |             | 1   |             |
|                               | Q8104      | LTC014EEB-X     | DIGI TRANSISTOR |             | 1   |             |
|                               | Q8201      | RTQ035N03-W     | MOS FET         |             | 1   |             |
|                               | Q8202      | 2SA812A/5-6/-X  | TRANSISTOR      |             | 1   |             |
|                               | Q8203      | 2SC1623A/5-6/-X | TRANSISTOR      |             | 1   |             |
|                               | Q8301      | 2SC1623A/5-6/-X | TRANSISTOR      |             | 1   |             |
|                               | D821       | MBRX130-TP-X    | SB DIODE        |             | 1   |             |
|                               | D871       | DZ2J180/M/-X    | Z DIODE         |             | 1   |             |
|                               | D901       | 1N5402-BPC04    | SI DIODE        |             | 1   |             |
|                               | D902       | GS1J-LTP-X      | SI DIODE        |             | 1   | B,D,G       |
|                               | D931       | DZ2J180/M/-X    | Z DIODE         |             | 1   | A,D,F,G,H   |
|                               | D932       | DZ2J180/M/-X    | Z DIODE         |             | 1   | A,D,F,G,H   |
|                               | D937       | MC2838-X        | DIODE           |             | 1   | A,D,F,G,H   |
|                               | D971       | DZ2J068/M/-X    | Z DIODE         |             | 1   |             |
|                               | D972       | DZ2J068/M/-X    | Z DIODE         |             | 1   |             |
|                               | D981       | MBRX130-TP-X    | SB DIODE        |             | 1   |             |
|                               | D982       | DZ2J056/M/-X    | Z DIODE         |             | 1   |             |
|                               | D1121      | MC2836-X        | DIODE           |             | 1   |             |
|                               | D1221      | MC2836-X        | DIODE           |             | 1   |             |
|                               | D1303      | DA2J101-X       | SI DIODE        |             | 1   |             |
|                               | D1304      | DA2J101-X       | SI DIODE        |             | 1   |             |
|                               | D1371      | MBRX130-TP-X    | SB DIODE        |             | 1   |             |
|                               | D1372      | DZ2J056/M/-X    | Z DIODE         |             | 1   |             |
|                               | D1401      | MC2836-X        | DIODE           |             | 1   |             |
|                               | D1402      | MC2836-X        | DIODE           |             | 1   |             |
|                               | D1403      | MC2836-X        | DIODE           |             | 1   |             |
|                               | D1501      | MC2836-X        | DIODE           |             | 1   |             |
|                               | D1502      | MC2836-X        | DIODE           |             | 1   |             |
|                               | D1503      | MC2836-X        | DIODE           |             | 1   |             |
|                               | D1504      | MC2836-X        | DIODE           |             | 1   |             |
|                               | D1911      | MBRX130-TP-X    | SB DIODE        |             | 1   |             |
|                               | D1912      | MBRX130-TP-X    | SB DIODE        |             | 1   |             |
|                               | D1921      | MBRX130-TP-X    | SB DIODE        |             | 1   | A,D,E,F,G,H |
|                               | D1922      | MBRX130-TP-X    | SB DIODE        |             | 1   | A,D,E,F,G,H |

| MODEL      | MARK | MODEL      | MARK | MODEL       | MARK | MODEL       | MARK |
|------------|------|------------|------|-------------|------|-------------|------|
| KW-NSX700A | A    | KW-NSX700E | B    | KW-NSX700EE | C    | KW-NSX700EU | D    |
| KW-NSX700J | E    | KW-NSX700U | F    | KW-NSX700UI | G    | KW-NSX700UP | H    |

| Safe | Symbol No. | Parts No.    | Parts Name   | Description  | QTY | Local       |
|------|------------|--------------|--------------|--------------|-----|-------------|
|      | D1931      | MC2836-X     | DIODE        |              | 1   |             |
|      | D1941      | DA2J101-X    | SI DIODE     |              | 1   |             |
|      | D1961      | DZ2J180/M/-X | Z DIODE      |              | 1   |             |
|      | D1971      | DZ2J062/M/-X | Z DIODE      |              | 1   |             |
|      | D7301      | DA2J101-X    | SI DIODE     |              | 1   |             |
|      | D8001      | RB051L-40-X  | SB DIODE     |              | 1   |             |
|      | D8011      | MBRX130-TP-X | SB DIODE     |              | 1   |             |
|      | D8021      | DZ2J062/M/-X | Z DIODE      |              | 1   |             |
|      | D8101      | RB051L-40-X  | SB DIODE     |              | 1   |             |
|      | D8106      | DZ2J062/M/-X | Z DIODE      |              | 1   |             |
|      | D8201      | MBRX130-TP-X | SB DIODE     |              | 1   |             |
|      | D8203      | RB521S-30-X  | SB DIODE     |              | 1   |             |
|      | D8204      | RB521S-30-X  | SB DIODE     |              | 1   |             |
|      | D8205      | RB521S-30-X  | SB DIODE     |              | 1   |             |
|      | D8301      | DA2J101-X    | SI DIODE     |              | 1   |             |
|      | D8501      | DA2J101-X    | SI DIODE     |              | 1   |             |
|      | C1         | NCBA1HK-471W | C CAPACITOR  | 470pF 50V K  | 1   |             |
|      | C2         | NDC31HJ-2R0X | C CAPACITOR  | 2pF 50V J    | 1   |             |
|      | C8         | NDCA1HJ-270W | C CAPACITOR  | 27pF 50V J   | 1   |             |
|      | C9         | NCB31CK-224X | C CAPACITOR  | 0.22uF 16V K | 1   |             |
|      | C10        | NCBA1CK-103W | C CAPACITOR  | 0.01uF 16V K | 1   |             |
|      | C12        | NCBA1CK-103W | C CAPACITOR  | 0.01uF 16V K | 1   |             |
|      | C13        | NCBA1AK-104W | C CAPACITOR  | 0.1uF 10V K  | 1   |             |
|      | C14        | NCBA1CK-103W | C CAPACITOR  | 0.01uF 16V K | 1   |             |
|      | C16        | NCBA1CK-103W | C CAPACITOR  | 0.01uF 16V K | 1   |             |
|      | C17        | QETN1CM-107Z | E CAPACITOR  | 100uF 16V M  | 1   |             |
|      | C18        | NCBA1AK-104W | C CAPACITOR  | 0.1uF 10V K  | 1   |             |
|      | C19        | NCB31CK-105X | C CAPACITOR  | 1uF 16V K    | 1   |             |
|      | C20        | NDCA1HJ-6R0W | C CAPACITOR  | 6pF 50V J    | 1   |             |
|      | C21        | NCBA1AK-104W | C CAPACITOR  | 0.1uF 10V K  | 1   |             |
|      | C22        | NCBA1HK-102W | C CAPACITOR  | 1000pF 50V K | 1   |             |
|      | C23        | NDCA1HJ-100W | C CAPACITOR  | 10pF 50V J   | 1   |             |
|      | C24        | NCB31CK-224X | C CAPACITOR  | 0.22uF 16V K | 1   |             |
|      | C25        | NCBA1CK-103W | C CAPACITOR  | 0.01uF 16V K | 1   |             |
|      | C26        | NCB31CK-105X | C CAPACITOR  | 1uF 16V K    | 1   |             |
|      | C27        | NDCA1HJ-150W | C CAPACITOR  | 15pF 50V J   | 1   |             |
|      | C29        | NCBA1AK-104W | C CAPACITOR  | 0.1uF 10V K  | 1   |             |
|      | C30        | NCBA1CK-103W | C CAPACITOR  | 0.01uF 16V K | 1   |             |
|      | C42        | NCBA1HK-102W | C CAPACITOR  | 1000pF 50V K | 1   |             |
|      | C45        | NDCA1HJ-7R0W | C CAPACITOR  | 7pF 50V J    | 1   |             |
|      | C46        | NDCA1HJ-2R0W | C CAPACITOR  | 2pF 50V J    | 1   |             |
|      | C50        | NCB31HK-103X | C CAPACITOR  | 0.01uF 50V K | 1   |             |
|      | C160       | NCB20JK-106X | C CAPACITOR  | 10uF 6.3V K  | 1   |             |
|      | C162       | NCB31CK-105X | C CAPACITOR  | 1uF 16V K    | 1   |             |
|      | C172       | NCB31CK-105X | C CAPACITOR  | 1uF 16V K    | 1   |             |
|      | C182       | NCB31CK-105X | C CAPACITOR  | 1uF 16V K    | 1   |             |
|      | C705       | NCBA1AK-104W | C CAPACITOR  | 0.1uF 10V K  | 1   |             |
|      | C713       | NCBA1HK-102W | C CAPACITOR  | 1000pF 50V K | 1   |             |
|      | C714       | NDCA1HJ-220W | C CAPACITOR  | 22pF 50V J   | 1   |             |
|      | C715       | NDCA1HJ-220W | C CAPACITOR  | 22pF 50V J   | 1   |             |
|      | C717       | NDCA1HJ-120W | C CAPACITOR  | 12pF 50V J   | 1   |             |
|      | C718       | NDCA1HJ-100W | C CAPACITOR  | 10pF 50V J   | 1   |             |
|      | C723       | QETN1AM-227Z | E CAPACITOR  | 220uF 10V M  | 1   |             |
|      | C801       | QEKJ1EM-106Z | E CAPACITOR  | 10uF 25V M   | 1   |             |
|      | C802       | QEKJ1EM-106Z | E CAPACITOR  | 10uF 25V M   | 1   | A,D,E,F,G,H |
|      | C803       | QETN1AM-227Z | E CAPACITOR  | 220uF 10V M  | 1   |             |
|      | C804       | NCBA1AK-104W | C CAPACITOR  | 0.1uF 10V K  | 1   |             |
|      | C805       | NCBA1AK-104W | C CAPACITOR  | 0.1uF 10V K  | 1   |             |
|      | C806       | NCBA1AK-104W | C CAPACITOR  | 0.1uF 10V K  | 1   |             |
|      | C807       | NCB31CK-105X | C CAPACITOR  | 1uF 16V K    | 1   |             |
|      | C808       | QETN1EM-476Z | E CAPACITOR  | 47uF 25V M   | 1   |             |
|      | C809       | QETN1CM-227Z | E CAPACITOR  | 220uF 16V M  | 1   |             |
|      | C810       | NCB31HK-102X | C CAPACITOR  | 1000pF 50V K | 1   |             |
|      | C812       | QETN1HM-226Z | E CAPACITOR  | 22uF 50V M   | 1   |             |
|      | C816       | NCB31HK-104X | C CAPACITOR  | 0.1uF 50V K  | 1   |             |
|      | C820       | NCB31HK-103X | C CAPACITOR  | 0.01uF 50V K | 1   |             |
|      | C821       | QETN1CM-107Z | E CAPACITOR  | 100uF 16V M  | 1   |             |
|      | C822       | QEKJ1EM-106Z | E CAPACITOR  | 10uF 25V M   | 1   |             |
|      | C823       | NCB31HK-102X | C CAPACITOR  | 1000pF 50V K | 1   |             |
|      | C824       | NCBA1HK-102W | C CAPACITOR  | 1000pF 50V K | 1   |             |
|      | C871       | NCBA1CK-103W | C CAPACITOR  | 0.01uF 16V K | 1   |             |
|      | C872       | NCB21EK-334X | C CAPACITOR  | 0.33uF 25V K | 1   |             |
|      | C901       | QE20934-338  | E CAPACITOR  | 3300uF       | 1   |             |
|      | C902       | QEKJ1HM-225Z | E CAPACITOR  | 2.2uF 50V M  | 1   |             |
|      | C904       | QEKJ1HM-225Z | E CAPACITOR  | 2.2uF 50V M  | 1   |             |
|      | C921       | NCBA1HK-102W | C CAPACITOR  | 1000pF 50V K | 1   |             |
|      | C931       | NCBA1CK-103W | C CAPACITOR  | 0.01uF 16V K | 1   | A,D,F,G,H   |
|      | C932       | NCBA1CK-103W | C CAPACITOR  | 0.01uF 16V K | 1   | A,D,F,G,H   |
|      | C981       | QETN1CM-107Z | E CAPACITOR  | 100uF 16V M  | 1   |             |
|      | C1101      | NDCA1HJ-101W | C CAPACITOR  | 100pF 50V J  | 1   |             |
|      | C1102      | NDCA1HJ-101W | C CAPACITOR  | 100pF 50V J  | 1   |             |
|      | C1103      | QFVF1HJ-224Z | MF CAPACITOR | 0.22uF 50V J | 1   |             |
|      | C1111      | NDCA1HJ-101W | C CAPACITOR  | 100pF 50V J  | 1   |             |
|      | C1112      | NDCA1HJ-101W | C CAPACITOR  | 100pF 50V J  | 1   |             |
|      | C1113      | QFVF1HJ-224Z | MF CAPACITOR | 0.22uF 50V J | 1   |             |
|      | C1121      | NDC31HJ-101X | C CAPACITOR  | 100pF 50V J  | 1   |             |
|      | C1122      | QEKJ1HM-475Z | E CAPACITOR  | 4.7uF 50V M  | 1   |             |
|      | C1131      | NDC31HJ-101X | C CAPACITOR  | 100pF 50V J  | 1   |             |
|      | C1132      | QEKJ1HM-475Z | E CAPACITOR  | 4.7uF 50V M  | 1   |             |
|      | C1141      | NDC31HJ-101X | C CAPACITOR  | 100pF 50V J  | 1   |             |

| MODEL      | MARK | MODEL      | MARK | MODEL       | MARK | MODEL       | MARK |
|------------|------|------------|------|-------------|------|-------------|------|
| KW-NSX700A | A    | KW-NSX700E | B    | KW-NSX700EE | C    | KW-NSX700EU | D    |
| KW-NSX700J | E    | KW-NSX700U | F    | KW-NSX700UI | G    | KW-NSX700UP | H    |

| Safe | Symbol No. | Parts No.      | Parts Name   | Description   | QTY | Local |
|------|------------|----------------|--------------|---------------|-----|-------|
|      | C1142      | NCB20JK-475X   | C CAPACITOR  | 4.7uF 6.3V K  | 1   |       |
|      | C1151      | NDC31HJ-101X   | C CAPACITOR  | 100pF 50V J   | 1   |       |
|      | C1159      | NCB31CK-105X   | C CAPACITOR  | 1uF 16V K     | 1   |       |
|      | C1161      | NCB31CK-105X   | C CAPACITOR  | 1uF 16V K     | 1   |       |
|      | C1162      | QEKJ1HM-475Z   | E CAPACITOR  | 4.7uF 50V M   | 1   |       |
|      | C1163      | NCB31CK-105X   | C CAPACITOR  | 1uF 16V K     | 1   |       |
|      | C1164      | NCB31CK-105X   | C CAPACITOR  | 1uF 16V K     | 1   |       |
|      | C1166      | NCB31CK-105X   | C CAPACITOR  | 1uF 16V K     | 1   |       |
|      | C1167      | NCBA1HK-332W   | C CAPACITOR  | 3300pF 50V K  | 1   |       |
|      | C1168      | NDCA1HJ-221W   | C CAPACITOR  | 220pF 50V J   | 1   | H     |
|      | C1169      | NCBA1HK-332W   | C CAPACITOR  | 3300pF 50V K  | 1   |       |
|      | C1170      | NCB31CK-105X   | C CAPACITOR  | 1uF 16V K     | 1   |       |
|      | C1191      | QEKJ1EM-106Z   | E CAPACITOR  | 10uF 25V M    | 1   |       |
|      | C1192      | QEKJ1EM-106Z   | E CAPACITOR  | 10uF 25V M    | 1   |       |
|      | C1193      | NCBA1HK-471W   | C CAPACITOR  | 470pF 50V K   | 1   |       |
|      | C1194      | NCBA1EK-682W   | C CAPACITOR  | 6800pF 25V K  | 1   |       |
|      | C1195      | NCBA1HK-471W   | C CAPACITOR  | 470pF 50V K   | 1   |       |
|      | C1201      | NDCA1HJ-101W   | C CAPACITOR  | 100pF 50V J   | 1   |       |
|      | C1202      | NDCA1HJ-101W   | C CAPACITOR  | 100pF 50V J   | 1   |       |
|      | C1203      | QFVF1HJ-224Z   | MF CAPACITOR | 0.22uF 50V J  | 1   |       |
|      | C1211      | NDCA1HJ-101W   | C CAPACITOR  | 100pF 50V J   | 1   |       |
|      | C1212      | NDCA1HJ-101W   | C CAPACITOR  | 100pF 50V J   | 1   |       |
|      | C1213      | QFVF1HJ-224Z   | MF CAPACITOR | 0.22uF 50V J  | 1   |       |
|      | C1221      | NDC31HJ-101X   | C CAPACITOR  | 100pF 50V J   | 1   |       |
|      | C1222      | QEKJ1HM-475Z   | E CAPACITOR  | 4.7uF 50V M   | 1   |       |
|      | C1231      | NDC31HJ-101X   | C CAPACITOR  | 100pF 50V J   | 1   |       |
|      | C1232      | QEKJ1HM-475Z   | E CAPACITOR  | 4.7uF 50V M   | 1   |       |
|      | C1241      | NDC31HJ-101X   | C CAPACITOR  | 100pF 50V J   | 1   |       |
|      | C1242      | NCB20JK-475X   | C CAPACITOR  | 4.7uF 6.3V K  | 1   |       |
|      | C1251      | NDC31HJ-101X   | C CAPACITOR  | 100pF 50V J   | 1   |       |
|      | C1259      | NCB31CK-105X   | C CAPACITOR  | 1uF 16V K     | 1   |       |
|      | C1261      | NCB31CK-105X   | C CAPACITOR  | 1uF 16V K     | 1   |       |
|      | C1262      | QEKJ1HM-475Z   | E CAPACITOR  | 4.7uF 50V M   | 1   |       |
|      | C1263      | NCB31CK-105X   | C CAPACITOR  | 1uF 16V K     | 1   |       |
|      | C1264      | NCB31CK-105X   | C CAPACITOR  | 1uF 16V K     | 1   |       |
|      | C1266      | NCB31CK-105X   | C CAPACITOR  | 1uF 16V K     | 1   |       |
|      | C1267      | NCBA1HK-332W   | C CAPACITOR  | 3300pF 50V K  | 1   |       |
|      | C1268      | NDCA1HJ-221W   | C CAPACITOR  | 220pF 50V J   | 1   | H     |
|      | C1269      | NCBA1HK-332W   | C CAPACITOR  | 3300pF 50V K  | 1   |       |
|      | C1270      | NCB31CK-105X   | C CAPACITOR  | 1uF 16V K     | 1   |       |
|      | C1291      | QEKJ1EM-106Z   | E CAPACITOR  | 10uF 25V M    | 1   |       |
|      | C1292      | QEKJ1EM-106Z   | E CAPACITOR  | 10uF 25V M    | 1   |       |
|      | C1293      | NCBA1HK-471W   | C CAPACITOR  | 470pF 50V K   | 1   |       |
|      | C1294      | NCBA1EK-682W   | C CAPACITOR  | 6800pF 25V K  | 1   |       |
|      | C1295      | NCBA1HK-471W   | C CAPACITOR  | 470pF 50V K   | 1   |       |
|      | C1301      | NCBA1CK-103W   | C CAPACITOR  | 0.01uF 16V K  | 1   |       |
|      | C1303      | NDCA1HJ-820W   | C CAPACITOR  | 82pF 50V J    | 1   |       |
|      | C1304      | NCB31CK-105X   | C CAPACITOR  | 1uF 16V K     | 1   |       |
|      | C1306      | QEKJ1EM-106Z   | E CAPACITOR  | 10uF 25V M    | 1   |       |
|      | C1308      | NDCA1HJ-820W   | C CAPACITOR  | 82pF 50V J    | 1   |       |
|      | C1309      | NCB31HK-103X   | C CAPACITOR  | 0.01uF 50V K  | 1   |       |
|      | C1312      | NCB31CK-105X   | C CAPACITOR  | 1uF 16V K     | 1   |       |
|      | C1313      | NCB31CK-105X   | C CAPACITOR  | 1uF 16V K     | 1   |       |
|      | C1351      | NCB31CK-473X   | C CAPACITOR  | 0.047uF 16V K | 1   |       |
|      | C1359      | NCB31CK-105X   | C CAPACITOR  | 1uF 16V K     | 1   |       |
|      | C1367      | NDCA1HJ-330W   | C CAPACITOR  | 33pF 50V J    | 1   |       |
|      | C1368      | QEKJ1EM-106Z   | E CAPACITOR  | 10uF 25V M    | 1   |       |
|      | C1369      | NCB31CK-105X   | C CAPACITOR  | 1uF 16V K     | 1   |       |
|      | C1370      | NCJ21CK-106X-A | C CAPACITOR  | 10uF 16V K    | 1   |       |
|      | C1371      | QETN1CM-107Z   | E CAPACITOR  | 100uF 16V M   | 1   |       |
|      | C1373      | QEKJ1HM-105Z   | E CAPACITOR  | 1uF 50V M     | 1   |       |
|      | C1374      | NCB31CK-474X   | C CAPACITOR  | 0.47uF 16V K  | 1   |       |
|      | C1375      | QEKJ1HM-105Z   | E CAPACITOR  | 1uF 50V M     | 1   |       |
|      | C1376      | NCB31CK-474X   | C CAPACITOR  | 0.47uF 16V K  | 1   |       |
|      | C1378      | QEKJ1EM-106Z   | E CAPACITOR  | 10uF 25V M    | 1   |       |
|      | C1380      | NCB31CK-105X   | C CAPACITOR  | 1uF 16V K     | 1   |       |
|      | C1391      | QETN1EM-476Z   | E CAPACITOR  | 47uF 25V M    | 1   |       |
|      | C1392      | QEKJ1EM-106Z   | E CAPACITOR  | 10uF 25V M    | 1   |       |
|      | C1393      | QEKJ1EM-106Z   | E CAPACITOR  | 10uF 25V M    | 1   |       |
|      | C1400      | NDC31HJ-101X   | C CAPACITOR  | 100pF 50V J   | 1   |       |
|      | C1401      | NCB31HK-102X   | C CAPACITOR  | 1000pF 50V K  | 1   |       |
|      | C1402      | QEKJ1EM-106Z   | E CAPACITOR  | 10uF 25V M    | 1   |       |
|      | C1911      | NCB31HK-104X   | C CAPACITOR  | 0.1uF 50V K   | 1   |       |
|      | C1932      | NCB31HK-104X   | C CAPACITOR  | 0.1uF 50V K   | 1   |       |
|      | C1941      | NDC31HJ-151X   | C CAPACITOR  | 150pF 50V J   | 1   |       |
|      | C1944      | NCB31AK-225X   | C CAPACITOR  | 2.2uF 10V K   | 1   |       |
|      | C1952      | QEKJ1CM-226Z   | E CAPACITOR  | 22uF 16V M    | 1   |       |
|      | C1961      | NDC31HJ-151X   | C CAPACITOR  | 150pF 50V J   | 1   |       |
|      | C1963      | QEKJ1EM-106Z   | E CAPACITOR  | 10uF 25V M    | 1   |       |
|      | C6221      | NCBA1CK-103W   | C CAPACITOR  | 0.01uF 16V K  | 1   |       |
|      | C6222      | NCBA1CK-103W   | C CAPACITOR  | 0.01uF 16V K  | 1   |       |
|      | C7088      | NCBA1CK-103W   | C CAPACITOR  | 0.01uF 16V K  | 1   |       |
|      | C7089      | NCB31HK-103X   | C CAPACITOR  | 0.01uF 50V K  | 1   |       |
|      | C7092      | NCB31HK-103X   | C CAPACITOR  | 0.01uF 50V K  | 1   |       |
|      | C7093      | NCB31HK-103X   | C CAPACITOR  | 0.01uF 50V K  | 1   |       |
|      | C7095      | NCBA1CK-103W   | C CAPACITOR  | 0.01uF 16V K  | 1   |       |
|      | C7104      | NCBA1CK-103W   | C CAPACITOR  | 0.01uF 16V K  | 1   |       |
|      | C7106      | NCBA1CK-103W   | C CAPACITOR  | 0.01uF 16V K  | 1   |       |
|      | C7107      | NCBA1CK-103W   | C CAPACITOR  | 0.01uF 16V K  | 1   |       |
|      | C7108      | NCBA1CK-103W   | C CAPACITOR  | 0.01uF 16V K  | 1   |       |
|      | C7109      | NCBA1CK-103W   | C CAPACITOR  | 0.01uF 16V K  | 1   |       |
|      | C7121      | NCBA1CK-103W   | C CAPACITOR  | 0.01uF 16V K  | 1   |       |

| MODEL      | MARK | MODEL      | MARK | MODEL       | MARK | MODEL       | MARK |
|------------|------|------------|------|-------------|------|-------------|------|
| KW-NSX700A | A    | KW-NSX700E | B    | KW-NSX700EE | C    | KW-NSX700EU | D    |
| KW-NSX700J | E    | KW-NSX700U | F    | KW-NSX700UI | G    | KW-NSX700UP | H    |

| Safe | Symbol No. | Parts No.      | Parts Name  | Description   | QTY | Local         |
|------|------------|----------------|-------------|---------------|-----|---------------|
|      | C7126      | NCBA1CK-103W   | C CAPACITOR | 0.01uF 16V K  | 1   |               |
|      | C7128      | NCBA1CK-103W   | C CAPACITOR | 0.01uF 16V K  | 1   |               |
|      | C7301      | NCBA1CK-103W   | C CAPACITOR | 0.01uF 16V K  | 1   |               |
|      | C7302      | NCB31CK-105X   | C CAPACITOR | 1uF 16V K     | 1   |               |
|      | C8003      | QEKJ1EM-476Z   | E CAPACITOR | 47uF 25V M    | 1   |               |
|      | C8004      | NCJ11EK-106X-R | C CAPACITOR | 10uF 25V      | 1   |               |
|      | C8005      | NCBA1CK-104W   | C CAPACITOR | 0.1uF 16V K   | 1   |               |
|      | C8006      | NCBA1HK-682W   | C CAPACITOR | 6800pF 50V K  | 1   |               |
|      | C8007      | NCBA1HK-102W   | C CAPACITOR | 1000pF 50V K  | 1   |               |
|      | C8008      | NCB20JK-106X   | C CAPACITOR | 10uF 6.3V K   | 1   |               |
|      | C8009      | QETN1AM-477Z   | E CAPACITOR | 470uF 10V M   | 1   |               |
|      | C8010      | NCB20JK-106X   | C CAPACITOR | 10uF 6.3V K   | 1   |               |
|      | C8011      | NCBA1HK-102W   | C CAPACITOR | 1000pF 50V K  | 1   |               |
|      | C8101      | NCB31CK-334X   | C CAPACITOR | 0.33uF 16V K  | 1   |               |
|      | C8103      | NCBA1HK-102W   | C CAPACITOR | 1000pF 50V K  | 1   |               |
|      | C8106      | NCJ11EK-106X-R | C CAPACITOR | 10uF 25V      | 1   |               |
|      | C8107      | NCB20JK-106X   | C CAPACITOR | 10uF 6.3V K   | 1   |               |
|      | C8108      | QETN1AM-477Z   | E CAPACITOR | 470uF 10V M   | 1   |               |
|      | C8201      | NCB31CK-474X   | C CAPACITOR | 0.47uF 16V K  | 1   |               |
|      | C8203      | NCBA1HK-222W   | C CAPACITOR | 2200pF 50V K  | 1   |               |
|      | C8204      | NCB31HK-682X   | C CAPACITOR | 6800pF 50V K  | 1   |               |
|      | C8205      | NCBA1HK-391W   | C CAPACITOR | 390pF 50V K   | 1   |               |
|      | C8206      | NCJ11EK-106X-R | C CAPACITOR | 10uF 25V      | 1   |               |
|      | C8207      | NCJ11EK-106X-R | C CAPACITOR | 10uF 25V      | 1   |               |
|      | C8208      | QETN1HM-107Z   | E CAPACITOR | 100uF 50V M   | 1   |               |
|      | C8209      | NCJ11EK-106X-R | C CAPACITOR | 10uF 25V      | 1   |               |
|      | C8210      | NCB31HK-104X   | C CAPACITOR | 0.1uF 50V K   | 1   |               |
|      | C8213      | QETN1HM-226Z   | E CAPACITOR | 22uF 50V M    | 1   |               |
|      | C8301      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K   | 1   |               |
|      | C8302      | NCBA1HK-272W   | C CAPACITOR | 2700pF 50V K  | 1   |               |
|      | C8303      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K   | 1   |               |
|      | C8304      | NCBA1HK-102W   | C CAPACITOR | 1000pF 50V K  | 1   |               |
|      | C8306      | NCB31CK-105X   | C CAPACITOR | 1uF 16V K     | 1   |               |
|      | C8501      | NCB21EK-334X   | C CAPACITOR | 0.33uF 25V K  | 1   |               |
|      | C8502      | QEKJ1CM-226Z   | E CAPACITOR | 22uF 16V M    | 1   |               |
|      | R1         | NRSA63J-0R0X   | MG RESISTOR | 0Ω 1/10W J    | 1   | A,B,C,D,F,G,H |
|      | R14        | NRSA6AJ-472W   | MG RESISTOR | 4.7kΩ 1/16W J | 1   |               |
|      | R16        | NRSA6AJ-684W   | MG RESISTOR | 680kΩ 1/16W J | 1   |               |
|      | R19        | NRSA6AJ-101W   | MG RESISTOR | 100Ω 1/16W J  | 1   |               |
|      | R21        | NRS181J-220X   | MG RESISTOR | 22Ω 1/8W J    | 1   |               |
|      | R22        | NRSA6AJ-684W   | MG RESISTOR | 680kΩ 1/16W J | 1   |               |
|      | R23        | NRSA6AJ-101W   | MG RESISTOR | 100Ω 1/16W J  | 1   |               |
|      | R162       | NRSA6AD-151W   | MG RESISTOR | 150Ω 1/16W D  | 1   |               |
|      | R164       | NRSA6AJ-470W   | MG RESISTOR | 47Ω 1/16W J   | 1   |               |
|      | R165       | NRSA6AJ-470W   | MG RESISTOR | 47Ω 1/16W J   | 1   |               |
|      | R166       | NRSA6AJ-470W   | MG RESISTOR | 47Ω 1/16W J   | 1   |               |
|      | R172       | NRSA6AD-151W   | MG RESISTOR | 150Ω 1/16W D  | 1   |               |
|      | R182       | NRSA6AD-151W   | MG RESISTOR | 150Ω 1/16W D  | 1   |               |
|      | R700       | NRSA6AJ-221W   | MG RESISTOR | 220Ω 1/16W J  | 1   |               |
|      | R701       | NRSA6AJ-123W   | MG RESISTOR | 12kΩ 1/16W J  | 1   | A,B,C,D,F,G,H |
|      | R702       | NRSA6AJ-243W   | MG RESISTOR | 24kΩ 1/16W J  | 1   | A             |
|      | R702       | NRSA6AJ-332W   | MG RESISTOR | 3.3kΩ 1/16W J | 1   | B             |
|      | R702       | NRSA6AJ-622W   | MG RESISTOR | 6.2kΩ 1/16W J | 1   | C             |
|      | R702       | NRSA6AJ-153W   | MG RESISTOR | 15kΩ 1/16W J  | 1   | D,G           |
|      | R702       | NRSA6AJ-123W   | MG RESISTOR | 12kΩ 1/16W J  | 1   | E             |
|      | R702       | NRSA6AJ-912W   | MG RESISTOR | 9.1kΩ 1/16W J | 1   | F,H           |
|      | R703       | NRSA6AJ-123W   | MG RESISTOR | 12kΩ 1/16W J  | 1   |               |
|      | R704       | NRSA6AJ-622W   | MG RESISTOR | 6.2kΩ 1/16W J | 1   |               |
|      | R707       | NRSA6AJ-473W   | MG RESISTOR | 47kΩ 1/16W J  | 1   |               |
|      | R708       | NRSA6AJ-473W   | MG RESISTOR | 47kΩ 1/16W J  | 1   |               |
|      | R709       | NRSA6AJ-223W   | MG RESISTOR | 22kΩ 1/16W J  | 1   |               |
|      | R711       | NRSA6AJ-123W   | MG RESISTOR | 12kΩ 1/16W J  | 1   |               |
|      | R712       | NRSA63J-123X   | MG RESISTOR | 12kΩ 1/16W J  | 1   |               |
|      | R714       | NRSA6AJ-0R0W   | MG RESISTOR | 0Ω 1/16W J    | 1   |               |
|      | R715       | NRSA6AJ-106W   | MG RESISTOR | 10MΩ 1/16W J  | 1   |               |
|      | R722       | NRSA6AJ-123W   | MG RESISTOR | 12kΩ 1/16W J  | 1   |               |
|      | R723       | NRSA6AJ-123W   | MG RESISTOR | 12kΩ 1/16W J  | 1   | A,D,F,G,H     |
|      | R724       | NRSA6AJ-123W   | MG RESISTOR | 12kΩ 1/16W J  | 1   | B,C,E         |
|      | R726       | NRSA6AJ-473W   | MG RESISTOR | 47kΩ 1/16W J  | 1   |               |
|      | R729       | NRSA63J-473X   | MG RESISTOR | 47kΩ 1/16W J  | 1   |               |
|      | R734       | NRSA6AJ-472W   | MG RESISTOR | 4.7kΩ 1/16W J | 1   |               |
|      | R735       | NRSA6AJ-472W   | MG RESISTOR | 4.7kΩ 1/16W J | 1   |               |
|      | R741       | NRSA6AJ-473W   | MG RESISTOR | 47kΩ 1/16W J  | 1   |               |
|      | R743       | NRSA6AJ-104W   | MG RESISTOR | 100kΩ 1/16W J | 1   |               |
|      | R748       | NRSA6AJ-104W   | MG RESISTOR | 100kΩ 1/16W J | 1   |               |
|      | R749       | NRSA6AJ-473W   | MG RESISTOR | 47kΩ 1/16W J  | 1   |               |
|      | R752       | NRSA6AJ-473W   | MG RESISTOR | 47kΩ 1/16W J  | 1   |               |
|      | R758       | NRSA6AJ-473W   | MG RESISTOR | 47kΩ 1/16W J  | 1   |               |
|      | R765       | NRSA6AJ-472W   | MG RESISTOR | 4.7kΩ 1/16W J | 1   |               |
|      | R766       | NRSA6AJ-472W   | MG RESISTOR | 4.7kΩ 1/16W J | 1   |               |
|      | R774       | NRSA6AJ-473W   | MG RESISTOR | 47kΩ 1/16W J  | 1   |               |
|      | R776       | NRSA6AJ-472W   | MG RESISTOR | 4.7kΩ 1/16W J | 1   |               |
|      | R777       | NRSA6AJ-272W   | MG RESISTOR | 2.7kΩ 1/16W J | 1   |               |
|      | R778       | NRSA6AJ-472W   | MG RESISTOR | 4.7kΩ 1/16W J | 1   |               |
|      | R790       | NRSA6AJ-123W   | MG RESISTOR | 12kΩ 1/16W J  | 1   |               |
|      | R792       | NRSA6AJ-123W   | MG RESISTOR | 12kΩ 1/16W J  | 1   |               |
|      | R796       | NRSA6AJ-473W   | MG RESISTOR | 47kΩ 1/16W J  | 1   |               |
|      | R797       | NRSA6AJ-473W   | MG RESISTOR | 47kΩ 1/16W J  | 1   |               |
|      | R798       | NRSA6AJ-473W   | MG RESISTOR | 47kΩ 1/16W J  | 1   |               |
|      | R799       | NRSA6AJ-474W   | MG RESISTOR | 470kΩ 1/16W J | 1   |               |

| MODEL      | MARK | MODEL      | MARK | MODEL       | MARK | MODEL       | MARK |
|------------|------|------------|------|-------------|------|-------------|------|
| KW-NSX700A | A    | KW-NSX700E | B    | KW-NSX700EE | C    | KW-NSX700EU | D    |
| KW-NSX700J | E    | KW-NSX700U | F    | KW-NSX700UI | G    | KW-NSX700UP | H    |

| Safe | Symbol No. | Parts No.    | Parts Name  | Description   | QTY | Local       |
|------|------------|--------------|-------------|---------------|-----|-------------|
|      | R800       | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J    | 1   |             |
|      | R801       | NRSA63D-103X | MG RESISTOR | 10kΩ 1/16W D  | 1   |             |
|      | R803       | NRSA63D-562X | MG RESISTOR | 5.6kΩ 1/16W D | 1   |             |
|      | R806       | NRSA6AD-472W | MG RESISTOR | 4.7kΩ 1/16W D | 1   |             |
|      | R807       | NRSA6AD-273W | MG RESISTOR | 27kΩ 1/16W D  | 1   |             |
|      | R808       | NRSA6AJ-331W | MG RESISTOR | 330Ω 1/16W J  | 1   |             |
|      | R809       | NRSA6AJ-821W | MG RESISTOR | 820Ω 1/16W J  | 1   |             |
|      | R813       | NRSA6AJ-271W | MG RESISTOR | 270Ω 1/16W J  | 1   |             |
|      | R815       | NRSA02J-0R0X | MG RESISTOR | 0Ω 1/10W J    | 1   | A,D,E,F,G,H |
|      | R871       | NRSA6AJ-223W | MG RESISTOR | 22kΩ 1/16W J  | 1   |             |
|      | R872       | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J  | 1   |             |
|      | R873       | NRSA6AJ-471W | MG RESISTOR | 470Ω 1/16W J  | 1   |             |
|      | R874       | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |             |
|      | R875       | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J  | 1   |             |
|      | R921       | NRSA6AJ-222W | MG RESISTOR | 2.2kΩ 1/16W J | 1   |             |
|      | R922       | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |             |
|      | R931       | NRSA02J-470X | MG RESISTOR | 47Ω 1/10W J   | 1   | A,D,F,G,H   |
|      | R932       | NRSA02J-470X | MG RESISTOR | 47Ω 1/10W J   | 1   | A,D,F,G,H   |
|      | R933       | NRSA6AD-472W | MG RESISTOR | 4.7kΩ 1/16W D | 1   | A,D,F,G,H   |
|      | R934       | NRSA6AD-472W | MG RESISTOR | 4.7kΩ 1/16W D | 1   | A,D,F,G,H   |
|      | R935       | NRSA02D-241X | MG RESISTOR | 240Ω 1/10W D  | 1   | A,D,F,G,H   |
|      | R936       | NRSA02D-241X | MG RESISTOR | 240Ω 1/10W D  | 1   | A,D,F,G,H   |
|      | R937       | NRSA6AJ-104W | MG RESISTOR | 100kΩ 1/16W J | 1   | A,D,F,G,H   |
|      | R938       | NRSA6AJ-104W | MG RESISTOR | 100kΩ 1/16W J | 1   | A,D,F,G,H   |
|      | R939       | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   | A,D,F,G,H   |
|      | R940       | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   | A,D,F,G,H   |
|      | R941       | NRSA6AJ-152W | MG RESISTOR | 1.5kΩ 1/16W J | 1   | A,D,F,G,H   |
|      | R942       | NRSA6AJ-152W | MG RESISTOR | 1.5kΩ 1/16W J | 1   | A,D,F,G,H   |
|      | R943       | NRSA6AJ-681W | MG RESISTOR | 680Ω 1/16W J  | 1   | A,D,F,G,H   |
|      | R944       | NRSA6AJ-681W | MG RESISTOR | 680Ω 1/16W J  | 1   | A,D,F,G,H   |
|      | R945       | NRSA02D-271X | MG RESISTOR | 270Ω 1/10W D  | 1   | A,D,F,G,H   |
|      | R946       | NRSA02D-271X | MG RESISTOR | 270Ω 1/10W D  | 1   | A,D,F,G,H   |
|      | R971       | NRSA02J-683X | MG RESISTOR | 68kΩ 1/10W J  | 1   |             |
|      | R972       | NRSA02J-473X | MG RESISTOR | 47kΩ 1/10W J  | 1   |             |
|      | R973       | NRSA6AJ-153W | MG RESISTOR | 15kΩ 1/16W J  | 1   |             |
|      | R974       | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J  | 1   |             |
|      | R975       | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J  | 1   |             |
|      | R976       | NRSA6AJ-822W | MG RESISTOR | 8.2kΩ 1/16W J | 1   |             |
|      | R981       | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   |             |
|      | R982       | NRSA6AJ-222W | MG RESISTOR | 2.2kΩ 1/16W J | 1   |             |
|      | R1101      | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J    | 1   |             |
|      | R1102      | NRSA6AJ-121W | MG RESISTOR | 120Ω 1/16W J  | 1   |             |
|      | R1103      | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J    | 1   |             |
|      | R1110      | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J    | 1   |             |
|      | R1111      | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J    | 1   |             |
|      | R1112      | NRSA6AJ-121W | MG RESISTOR | 120Ω 1/16W J  | 1   |             |
|      | R1113      | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J    | 1   |             |
|      | R1121      | NRSA02J-101X | MG RESISTOR | 100Ω 1/10W J  | 1   |             |
|      | R1122      | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J  | 1   |             |
|      | R1123      | NRSA6AJ-471W | MG RESISTOR | 470Ω 1/16W J  | 1   |             |
|      | R1124      | NRSA6AJ-222W | MG RESISTOR | 2.2kΩ 1/16W J | 1   |             |
|      | R1131      | NRSA02J-101X | MG RESISTOR | 100Ω 1/10W J  | 1   |             |
|      | R1132      | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J  | 1   |             |
|      | R1133      | NRSA6AJ-471W | MG RESISTOR | 470Ω 1/16W J  | 1   |             |
|      | R1134      | NRSA6AJ-222W | MG RESISTOR | 2.2kΩ 1/16W J | 1   |             |
|      | R1141      | NRSA02J-101X | MG RESISTOR | 100Ω 1/10W J  | 1   |             |
|      | R1142      | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J  | 1   |             |
|      | R1143      | NRSA6AJ-222W | MG RESISTOR | 2.2kΩ 1/16W J | 1   |             |
|      | R1144      | NRSA6AJ-471W | MG RESISTOR | 470Ω 1/16W J  | 1   |             |
|      | R1151      | NRSA63J-222X | MG RESISTOR | 2.2kΩ 1/16W J | 1   |             |
|      | R1152      | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J  | 1   |             |
|      | R1168      | NRSA6AJ-221W | MG RESISTOR | 220Ω 1/16W J  | 1   |             |
|      | R1184      | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J    | 1   |             |
|      | R1191      | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |             |
|      | R1192      | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |             |
|      | R1193      | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |             |
|      | R1194      | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |             |
|      | R1195      | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |             |
|      | R1196      | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |             |
|      | R1201      | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J    | 1   |             |
|      | R1202      | NRSA6AJ-121W | MG RESISTOR | 120Ω 1/16W J  | 1   |             |
|      | R1203      | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J    | 1   |             |
|      | R1210      | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J    | 1   |             |
|      | R1211      | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J    | 1   |             |
|      | R1212      | NRSA6AJ-121W | MG RESISTOR | 120Ω 1/16W J  | 1   |             |
|      | R1213      | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J    | 1   |             |
|      | R1221      | NRSA02J-101X | MG RESISTOR | 100Ω 1/10W J  | 1   |             |
|      | R1222      | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J  | 1   |             |
|      | R1223      | NRSA6AJ-471W | MG RESISTOR | 470Ω 1/16W J  | 1   |             |
|      | R1224      | NRSA6AJ-222W | MG RESISTOR | 2.2kΩ 1/16W J | 1   |             |
|      | R1231      | NRSA02J-101X | MG RESISTOR | 100Ω 1/10W J  | 1   |             |
|      | R1232      | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J  | 1   |             |
|      | R1233      | NRSA6AJ-471W | MG RESISTOR | 470Ω 1/16W J  | 1   |             |
|      | R1234      | NRSA6AJ-222W | MG RESISTOR | 2.2kΩ 1/16W J | 1   |             |
|      | R1241      | NRSA02J-101X | MG RESISTOR | 100Ω 1/10W J  | 1   |             |
|      | R1242      | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J  | 1   |             |
|      | R1243      | NRSA6AJ-222W | MG RESISTOR | 2.2kΩ 1/16W J | 1   |             |
|      | R1244      | NRSA6AJ-471W | MG RESISTOR | 470Ω 1/16W J  | 1   |             |
|      | R1251      | NRSA63J-222X | MG RESISTOR | 2.2kΩ 1/16W J | 1   |             |
|      | R1252      | NRSA63J-473X | MG RESISTOR | 47kΩ 1/16W J  | 1   |             |
|      | R1268      | NRSA6AJ-221W | MG RESISTOR | 220Ω 1/16W J  | 1   |             |
|      | R1284      | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J    | 1   |             |

|            |      |            |      |             |      |             |      |
|------------|------|------------|------|-------------|------|-------------|------|
| MODEL      | MARK | MODEL      | MARK | MODEL       | MARK | MODEL       | MARK |
| KW-NSX700A | A    | KW-NSX700E | B    | KW-NSX700EE | C    | KW-NSX700EU | D    |
| KW-NSX700J | E    | KW-NSX700U | F    | KW-NSX700UI | G    | KW-NSX700UP | H    |

| Safe | Symbol No. | Parts No.    | Parts Name  | Description   | QTY | Local       |
|------|------------|--------------|-------------|---------------|-----|-------------|
|      | R1291      | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |             |
|      | R1292      | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |             |
|      | R1293      | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |             |
|      | R1294      | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |             |
|      | R1295      | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |             |
|      | R1296      | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |             |
|      | R1301      | NRSA6AJ-333W | MG RESISTOR | 33kΩ 1/16W J  | 1   |             |
|      | R1302      | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J  | 1   |             |
|      | R1303      | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J  | 1   |             |
|      | R1304      | NRSA6AJ-331W | MG RESISTOR | 330Ω 1/16W J  | 1   |             |
|      | R1306      | NRSA6AJ-912W | MG RESISTOR | 9.1kΩ 1/16W J | 1   |             |
|      | R1307      | NRSA6AJ-430W | MG RESISTOR | 43Ω 1/16W J   | 1   |             |
|      | R1308      | NRSA6AJ-123W | MG RESISTOR | 12kΩ 1/16W J  | 1   |             |
|      | R1309      | NRSA6AJ-912W | MG RESISTOR | 9.1kΩ 1/16W J | 1   |             |
|      | R1310      | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J    | 1   |             |
|      | R1350      | NRSA02J-100X | MG RESISTOR | 10Ω 1/10W J   | 1   |             |
|      | R1368      | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   |             |
|      | R1369      | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J  | 1   |             |
|      | R1370      | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J  | 1   |             |
|      | R1371      | NRSA6AJ-221W | MG RESISTOR | 220Ω 1/16W J  | 1   |             |
|      | R1372      | NRSA6AJ-104W | MG RESISTOR | 100kΩ 1/16W J | 1   |             |
|      | R1373      | NRSA6AJ-222W | MG RESISTOR | 2.2kΩ 1/16W J | 1   |             |
|      | R1374      | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |             |
|      | R1375      | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |             |
|      | R1384      | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J    | 1   |             |
|      | R1391      | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J  | 1   |             |
|      | R1392      | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J  | 1   |             |
|      | R1393      | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J  | 1   |             |
|      | R1394      | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J  | 1   |             |
|      | R1401      | NRSA02J-221X | MG RESISTOR | 220Ω 1/10W J  | 1   |             |
|      | R1402      | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J  | 1   |             |
|      | R1403      | NRSA6AJ-821W | MG RESISTOR | 820Ω 1/16W J  | 1   |             |
|      | R1404      | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |             |
|      | R1502      | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J  | 1   |             |
|      | R1503      | NRSA6AJ-222W | MG RESISTOR | 2.2kΩ 1/16W J | 1   |             |
|      | R1912      | NRS181J-332X | MG RESISTOR | 3.3kΩ 1/8W J  | 1   |             |
|      | R1921      | NRSA02J-472X | MG RESISTOR | 4.7kΩ 1/10W J | 1   | A,D,E,F,G,H |
|      | R1931      | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J  | 1   |             |
|      | R1932      | NRSA6AJ-683W | MG RESISTOR | 68kΩ 1/16W J  | 1   |             |
|      | R1933      | NRSA6AJ-123W | MG RESISTOR | 12kΩ 1/16W J  | 1   |             |
|      | R1941      | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J  | 1   |             |
|      | R1942      | NRSA6AJ-223W | MG RESISTOR | 22kΩ 1/16W J  | 1   |             |
|      | R1944      | NRSA6AJ-223W | MG RESISTOR | 22kΩ 1/16W J  | 1   |             |
|      | R1945      | NRSA6AJ-471W | MG RESISTOR | 470Ω 1/16W J  | 1   |             |
|      | R1946      | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J  | 1   |             |
|      | R1947      | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J  | 1   |             |
|      | R1948      | NRSA6AJ-223W | MG RESISTOR | 22kΩ 1/16W J  | 1   |             |
|      | R1952      | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |             |
|      | R1953      | NRSA6AJ-273W | MG RESISTOR | 27kΩ 1/16W J  | 1   |             |
|      | R1961      | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J  | 1   |             |
|      | R1971      | NRS181J-152X | MG RESISTOR | 1.5kΩ 1/8W J  | 1   |             |
|      | R6221      | NRSA6AJ-333W | MG RESISTOR | 33kΩ 1/16W J  | 1   |             |
|      | R6222      | NRSA6AJ-333W | MG RESISTOR | 33kΩ 1/16W J  | 1   |             |
|      | R7003      | NRSA6AJ-222W | MG RESISTOR | 2.2kΩ 1/16W J | 1   |             |
|      | R7005      | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   |             |
|      | R7014      | NRSA6AJ-154W | MG RESISTOR | 150kΩ 1/16W J | 1   |             |
|      | R7017      | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |             |
|      | R7024      | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J  | 1   |             |
|      | R7025      | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |             |
|      | R7038      | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |             |
|      | R7040      | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J  | 1   |             |
|      | R7046      | NRSA6AJ-222W | MG RESISTOR | 2.2kΩ 1/16W J | 1   |             |
|      | R7048      | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |             |
|      | R7062      | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   |             |
|      | R7063      | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   |             |
|      | R7064      | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   |             |
|      | R7065      | NRSA6AJ-221W | MG RESISTOR | 220Ω 1/16W J  | 1   |             |
|      | R7066      | NRSA6AJ-221W | MG RESISTOR | 220Ω 1/16W J  | 1   |             |
|      | R7072      | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J   | 1   |             |
|      | R7073      | NRSA63J-102X | MG RESISTOR | 1kΩ 1/16W J   | 1   |             |
|      | R7088      | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   |             |
|      | R7089      | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   |             |
|      | R7092      | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   |             |
|      | R7093      | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   |             |
|      | R7095      | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   |             |
|      | R7103      | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |             |
|      | R7118      | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |             |
|      | R7119      | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   |             |
|      | R7121      | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   |             |
|      | R7122      | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   |             |
|      | R7201      | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J  | 1   |             |
|      | R7202      | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J  | 1   |             |
|      | R7204      | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J  | 1   |             |
|      | R7223      | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J  | 1   |             |
|      | R7238      | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J  | 1   |             |
|      | R7301      | NRSA6AJ-223W | MG RESISTOR | 22kΩ 1/16W J  | 1   |             |
|      | R7302      | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J  | 1   |             |
|      | R7303      | NRSA6AJ-223W | MG RESISTOR | 22kΩ 1/16W J  | 1   |             |
|      | R7304      | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J  | 1   |             |
|      | R7502      | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |             |

| MODEL      | MARK | MODEL      | MARK | MODEL       | MARK | MODEL       | MARK |
|------------|------|------------|------|-------------|------|-------------|------|
| KW-NSX700A | A    | KW-NSX700E | B    | KW-NSX700EE | C    | KW-NSX700EU | D    |
| KW-NSX700J | E    | KW-NSX700U | F    | KW-NSX700UI | G    | KW-NSX700UP | H    |

| Safe | Symbol No. | Parts No.      | Parts Name    | Description    | QTY | Local     |
|------|------------|----------------|---------------|----------------|-----|-----------|
|      | R7503      | NRSA6AJ-0R0W   | MG RESISTOR   | 0Ω 1/16W J     | 1   |           |
|      | R7777      | NRSA6AJ-103W   | MG RESISTOR   | 10kΩ 1/16W J   | 1   |           |
|      | R8000      | NRSA6AJ-102W   | MG RESISTOR   | 1kΩ 1/16W J    | 1   |           |
|      | R8001      | NRSA6AJ-102W   | MG RESISTOR   | 1kΩ 1/16W J    | 1   |           |
|      | R8005      | NRS181J-100X   | MG RESISTOR   | 10Ω 1/8W J     | 1   |           |
|      | R8006      | NRSA6AJ-103W   | MG RESISTOR   | 10kΩ 1/16W J   | 1   |           |
|      | R8007      | NRSA6AD-104W   | MG RESISTOR   | 100kΩ 1/16W D  | 1   |           |
|      | R8008      | NRSA6AD-243W   | MG RESISTOR   | 24kΩ 1/16W D   | 1   |           |
|      | R8009      | NRSA6AJ-153W   | MG RESISTOR   | 15kΩ 1/16W J   | 1   |           |
|      | R8010      | NRSA6AJ-103W   | MG RESISTOR   | 10kΩ 1/16W J   | 1   |           |
|      | R8101      | NRSA6AJ-683W   | MG RESISTOR   | 68kΩ 1/16W J   | 1   |           |
|      | R8102      | NRSA6AJ-823W   | MG RESISTOR   | 82kΩ 1/16W J   | 1   |           |
|      | R8103      | NRSA6AD-333W   | MG RESISTOR   | 33kΩ 1/16W D   | 1   |           |
|      | R8104      | NRSA6AD-333W   | MG RESISTOR   | 33kΩ 1/16W D   | 1   |           |
|      | R8105      | NRSA6AJ-121W   | MG RESISTOR   | 120Ω 1/16W J   | 1   |           |
|      | R8106      | NRSA6AJ-222W   | MG RESISTOR   | 2.2kΩ 1/16W J  | 1   |           |
|      | R8107      | NRSA6AJ-222W   | MG RESISTOR   | 2.2kΩ 1/16W J  | 1   |           |
|      | R8109      | NRSA6AD-471W   | MG RESISTOR   | 470Ω 1/16W D   | 1   |           |
|      | R8110      | NRSA6AD-122W   | MG RESISTOR   | 1.2kΩ 1/16W D  | 1   |           |
|      | R8111      | NRSA6AD-102W   | MG RESISTOR   | 1kΩ 1/16W D    | 1   |           |
|      | R8115      | NRSA6AJ-5R6W   | MG RESISTOR   | 5.6Ω 1/16W J   | 1   |           |
|      | R8201      | NRSA6AJ-683W   | MG RESISTOR   | 68kΩ 1/16W J   | 1   |           |
|      | R8202      | NRSA6AJ-683W   | MG RESISTOR   | 68kΩ 1/16W J   | 1   |           |
|      | R8203      | NRSA6AD-333W   | MG RESISTOR   | 33kΩ 1/16W D   | 1   |           |
|      | R8204      | NRSA6AD-333W   | MG RESISTOR   | 33kΩ 1/16W D   | 1   |           |
|      | R8205      | NRSA6AJ-562W   | MG RESISTOR   | 5.6kΩ 1/16W J  | 1   |           |
|      | R8206      | NRSA6AJ-821W   | MG RESISTOR   | 820Ω 1/16W J   | 1   |           |
|      | R8207      | NRSA6AJ-471W   | MG RESISTOR   | 470Ω 1/16W J   | 1   |           |
|      | R8208      | NRSA6AJ-103W   | MG RESISTOR   | 10kΩ 1/16W J   | 1   |           |
|      | R8209      | NRSA6AD-472W   | MG RESISTOR   | 4.7kΩ 1/16W D  | 1   |           |
|      | R8210      | NRSA6AD-123W   | MG RESISTOR   | 12kΩ 1/16W D   | 1   |           |
|      | R8211      | NRSA6AD-102W   | MG RESISTOR   | 1kΩ 1/16W D    | 1   |           |
|      | R8212      | NRSA6AJ-333W   | MG RESISTOR   | 33kΩ 1/16W J   | 1   |           |
|      | R8213      | NRSA6AJ-123W   | MG RESISTOR   | 12kΩ 1/16W J   | 1   |           |
|      | R8214      | NRSA6AJ-150W   | MG RESISTOR   | 15Ω 1/16W J    | 1   |           |
|      | R8215      | NRSA6AJ-100W   | MG RESISTOR   | 10Ω 1/16W J    | 1   |           |
|      | R8216      | NRSA02J-100X   | MG RESISTOR   | 10Ω 1/10W J    | 1   |           |
|      | R8217      | NRSA6AJ-0R0W   | MG RESISTOR   | 0Ω 1/16W J     | 1   |           |
|      | R8301      | NRSA6AJ-333W   | MG RESISTOR   | 33kΩ 1/16W J   | 1   |           |
|      | R8302      | NRSA6AJ-473W   | MG RESISTOR   | 47kΩ 1/16W J   | 1   |           |
|      | R8303      | NRSA6AJ-122W   | MG RESISTOR   | 1.2kΩ 1/16W J  | 1   |           |
|      | R8309      | NRSA6AJ-0R0W   | MG RESISTOR   | 0Ω 1/16W J     | 1   |           |
|      | R9993      | NRSA6AJ-0R0W   | MG RESISTOR   | 0Ω 1/16W J     | 1   |           |
|      | R9998      | NRSA63J-0R0X   | MG RESISTOR   | 0Ω 1/10W J     | 1   |           |
|      | R9999      | NRSA63J-0R0X   | MG RESISTOR   | 0Ω 1/10W J     | 1   |           |
|      | RA131      | NRB04CJ-392W   | NET RESISTOR  | 3.9kΩ J        | 1   |           |
|      | RA132      | NRB04CJ-392W   | NET RESISTOR  | 3.9kΩ J        | 1   |           |
|      | RA722      | NRB04CJ-102W   | NET RESISTOR  | 1kΩ J          | 1   |           |
|      | RA723      | NRB04CJ-470W   | NET RESISTOR  | 47Ω J          | 1   |           |
|      | RA724      | NRB04CJ-102W   | NET RESISTOR  | 1kΩ J          | 1   |           |
|      | RA725      | NRB04CJ-102W   | NET RESISTOR  | 1kΩ J          | 1   |           |
|      | RA728      | NRB04CJ-102W   | NET RESISTOR  | 1kΩ J          | 1   |           |
|      | RA729      | NRB04CJ-101W   | NET RESISTOR  | 100Ω J         | 1   |           |
|      | RA731      | NRB04CJ-102W   | NET RESISTOR  | 1kΩ J          | 1   |           |
|      | L1         | QQR1872-001    | RF COIL       |                | 1   |           |
|      | L2         | NQL114K-561X   | P COIL        | 560uH K        | 1   |           |
|      | L3         | NQL093K-R27X   | P COIL        | 0.27uH K       | 1   |           |
|      | L5         | NQL114K-561X   | P COIL        | 560uH K        | 1   |           |
|      | L6         | NQL79GM-4R7X   | COIL          | 4.7uH M        | 1   |           |
|      | L8         | NQL093K-R47X   | P COIL        | 0.47uH K       | 1   |           |
|      | L9         | NQL093K-4R7X   | P COIL        | 4.7uH K        | 1   |           |
|      | L10        | NQL093K-R47X   | P COIL        | 0.47uH K       | 1   |           |
|      | L11        | NQL093K-1R8X   | P COIL        | 1.8uH K        | 1   |           |
|      | L801       | NQL52EM-220X   | COIL          | 22uH M         | 1   |           |
|      | L901       | QQR1883-002    | CHOKE COIL    |                | 1   |           |
|      | L902       | NQL79GM-101X   | COIL          | 100uH M        | 1   |           |
|      | L8001      | NQLL8EM-220X   | COIL          | 22uH M         | 1   |           |
|      | L8002      | NQL52EM-220X   | COIL          | 22uH M         | 1   |           |
|      | L8101      | NQLL8EM-220X   | COIL          | 22uH M         | 1   |           |
|      | L8201      | NQLL8EM-470X   | COIL          | 47uH M         | 1   |           |
|      | CN101      | QGA2501C1-04   | CONNECTOR     | W-B (1-4)      | 1   |           |
|      | CN103      | QGF0516C2-12X  | CONNECTOR     | FFC/FPC (1-12) | 1   |           |
|      | CN105      | QGF0534F6-40X  | CONNECTOR     | FFC/FPC (1-40) | 1   |           |
|      | CN108      | QGF0534F6-40X  | CONNECTOR     | FFC/FPC (1-40) | 1   |           |
|      | CN109      | QGA1002C1-06X  | CONNECTOR     | W-B (1-6)      | 1   |           |
|      | CN111      | QGA2501C1-02   | CONNECTOR     | W-B (1-2)      | 1   |           |
|      | CN112      | QGA2001C1-02   | CONNECTOR     | W-B (1-2)      | 1   |           |
|      | CN116      | QGF0567F1-45W  | CONNECTOR     | FFC/FPC (1-45) | 1   |           |
|      | CN119      | QGA2501C1-03   | CONNECTOR     | W-B (1-3)      | 1   | A,D,F,G,H |
| △    | F801       | NMFZ032-4R0X-H | FUSE          | 4A             | 1   |           |
| △    | F831       | NMFZ031-1R6X-H | FUSE          | 1.6A           | 1   |           |
|      | J101       | QNB0348-001    | ANT TERMINAL  |                | 1   |           |
|      | J901       | QNZ0607-001    | CAR CONNECTOR |                | 1   |           |
|      | J1001      | QNN0861-001    | PIN JACK      |                | 1   |           |
|      | J1003      | QNS0301-002    | 3.5 JACK      |                | 1   |           |
|      | K1         | NQR0269-026X   | FERRITE BEADS | 10.500mA       | 1   | E         |
|      | TH131      | NAD0052-471X   | P THERMISTOR  | 470Ω           | 1   |           |
|      | VA111      | NAF0034-270X   | VARIATOR(ZNR) | 27V            | 1   |           |
|      | VA121      | NAF0034-270X   | VARIATOR(ZNR) | 27V            | 1   |           |
|      | VA131      | NAF0034-270X   | VARIATOR(ZNR) | 27V            | 1   |           |
|      | VA941      | NAF0034-270X   | VARIATOR(ZNR) | 27V            | 1   |           |
|      | X1         | QAX0952-001Z   | CRYSTAL       |                | 1   |           |

| MODEL      | MARK | MODEL      | MARK | MODEL       | MARK | MODEL       | MARK |
|------------|------|------------|------|-------------|------|-------------|------|
| KW-NSX700A | A    | KW-NSX700E | B    | KW-NSX700EE | C    | KW-NSX700EU | D    |
| KW-NSX700J | E    | KW-NSX700U | F    | KW-NSX700UI | G    | KW-NSX700UP | H    |

| Safe                        | Symbol No. | Parts No.      | Parts Name      | Description  | QTY | Local |
|-----------------------------|------------|----------------|-----------------|--------------|-----|-------|
|                             | X701       | QAX0967-001Z   | CRYSTAL         |              | 1   |       |
|                             | X702       | QAX0401-001    | CRYSTAL         | 32.768KHz    | 1   |       |
| CM UNIT (LVA11180-01A) <04> |            |                |                 |              |     |       |
|                             | IC201      | R5S72690P266FP | IC(MCU)         |              | 1   |       |
|                             | IC202      | JVM628C        | PROGRAMED IC    |              | 1   |       |
|                             | IC203      | EM639165TS-6G  | IC              |              | 1   |       |
|                             | IC211      | MN864779KT     | IC              |              | 1   |       |
|                             | IC212      | SII1292CNUC    | IC              |              | 1   |       |
|                             | IC213      | TS3USB3200RSVX | IC              |              | 1   |       |
|                             | IC251      | THS8200PFP     | IC              |              | 1   |       |
|                             | IC252      | AK4387ET-X     | IC              |              | 1   |       |
|                             | IC255      | TC7WH241FU-X   | IC              |              | 1   |       |
|                             | IC261      | NJM2535V-X     | IC              |              | 1   |       |
|                             | IC262      | NJM2535V-X     | IC              |              | 1   |       |
|                             | IC263      | NJM2561F1-X    | IC              |              | 1   |       |
|                             | IC264      | NJM2505AF-X    | IC              |              | 1   |       |
|                             | IC271      | BD9673EFJ-X    | IC              |              | 1   |       |
|                             | IC272      | BD9673EFJ-X    | IC              |              | 1   |       |
|                             | IC273      | BD9673EFJ-X    | IC              |              | 1   |       |
|                             | IC274      | XC6223D331PG-X | IC              |              | 1   |       |
|                             | IC275      | XC6223D181PG-X | IC              |              | 1   |       |
|                             | IC276      | BD9673EFJ-X    | IC              |              | 1   |       |
|                             | IC277      | MM1701YH-X     | IC              |              | 1   |       |
|                             | Q2501      | IMX9-W         | PAIR TRANSISTOR |              | 1   |       |
|                             | Q2502      | DRA9144E-X     | DIGI TRANSISTOR |              | 1   |       |
|                             | Q2701      | MTM98140-X     | TRANSISTOR      |              | 1   |       |
|                             | Q2702      | LTA014EEB-X    | DIGI TRANSISTOR |              | 1   |       |
|                             | Q2703      | LTC044EEB-X    | DIGI TRANSISTOR |              | 1   |       |
|                             | Q2704      | LTA014EEB-X    | DIGI TRANSISTOR |              | 1   |       |
|                             | Q2705      | LTC014EEB-X    | DIGI TRANSISTOR |              | 1   |       |
|                             | Q2706      | LTC014EEB-X    | DIGI TRANSISTOR |              | 1   |       |
|                             | Q2707      | LTC014EEB-X    | DIGI TRANSISTOR |              | 1   |       |
|                             | Q2708      | LTC014EEB-X    | DIGI TRANSISTOR |              | 1   |       |
|                             | Q2709      | LTC014EEB-X    | DIGI TRANSISTOR |              | 1   |       |
|                             | D291       | DZ2J062/M/-X   | Z DIODE         |              | 1   |       |
|                             | D292       | DZ2J062/M/-X   | Z DIODE         |              | 1   |       |
|                             | D2501      | MC2836-X       | DIODE           |              | 1   |       |
|                             | D2505      | RB521S-30-X    | SB DIODE        |              | 1   |       |
|                             | D2701      | DZ2J180/M/-X   | Z DIODE         |              | 1   |       |
|                             | D2702      | DZ2J062/M/-X   | Z DIODE         |              | 1   |       |
|                             | D2703      | RB051L-40-X    | SB DIODE        |              | 1   |       |
|                             | D2704      | DZ2J062/M/-X   | Z DIODE         |              | 1   |       |
|                             | D2705      | RB051L-40-X    | SB DIODE        |              | 1   |       |
|                             | D2706      | DZ2J062/M/-X   | Z DIODE         |              | 1   |       |
|                             | D2707      | RB051L-40-X    | SB DIODE        |              | 1   |       |
|                             | D2708      | DZ2J062/M/-X   | Z DIODE         |              | 1   |       |
|                             | D2709      | RB051L-40-X    | SB DIODE        |              | 1   |       |
|                             | D2710      | GS1J-LTP-X     | SI DIODE        |              | 1   |       |
|                             | C201       | NCBA1AK-104W   | C CAPACITOR     | 0.1uF 10V K  | 1   |       |
|                             | C202       | NCBA1AK-104W   | C CAPACITOR     | 0.1uF 10V K  | 1   |       |
|                             | C203       | NCBA1AK-104W   | C CAPACITOR     | 0.1uF 10V K  | 1   |       |
|                             | C204       | NCBA1AK-104W   | C CAPACITOR     | 0.1uF 10V K  | 1   |       |
|                             | C205       | NCBA1AK-104W   | C CAPACITOR     | 0.1uF 10V K  | 1   |       |
|                             | C206       | NCBA1AK-104W   | C CAPACITOR     | 0.1uF 10V K  | 1   |       |
|                             | C207       | NCBA1AK-104W   | C CAPACITOR     | 0.1uF 10V K  | 1   |       |
|                             | C208       | NCBA1AK-104W   | C CAPACITOR     | 0.1uF 10V K  | 1   |       |
|                             | C209       | NCBA1AK-104W   | C CAPACITOR     | 0.1uF 10V K  | 1   |       |
|                             | C210       | NCBA1AK-104W   | C CAPACITOR     | 0.1uF 10V K  | 1   |       |
|                             | C211       | NCB20JK-106X   | C CAPACITOR     | 10uF 6.3V K  | 1   |       |
|                             | C212       | NCB20JK-106X   | C CAPACITOR     | 10uF 6.3V K  | 1   |       |
|                             | C214       | NDCA1HJ-120W   | C CAPACITOR     | 12pF 50V J   | 1   |       |
|                             | C215       | NDCA1HJ-120W   | C CAPACITOR     | 12pF 50V J   | 1   |       |
|                             | C217       | NCBA1HK-102W   | C CAPACITOR     | 1000pF 50V K | 1   |       |
|                             | C232       | NCBA1CK-103W   | C CAPACITOR     | 0.01uF 16V K | 1   |       |
|                             | C234       | NCBA1CK-103W   | C CAPACITOR     | 0.01uF 16V K | 1   |       |
|                             | C271       | NCBA1CK-103W   | C CAPACITOR     | 0.01uF 16V K | 1   |       |
|                             | C272       | NCBA1CK-103W   | C CAPACITOR     | 0.01uF 16V K | 1   |       |
|                             | C273       | NCBA1CK-103W   | C CAPACITOR     | 0.01uF 16V K | 1   |       |
|                             | C274       | NCB20JK-106X   | C CAPACITOR     | 10uF 6.3V K  | 1   |       |
|                             | C275       | NCBA1AK-104W   | C CAPACITOR     | 0.1uF 10V K  | 1   |       |
|                             | C276       | NCBA1CK-103W   | C CAPACITOR     | 0.01uF 16V K | 1   |       |
|                             | C277       | NCB20JK-106X   | C CAPACITOR     | 10uF 6.3V K  | 1   |       |
|                             | C278       | NCBA1CK-103W   | C CAPACITOR     | 0.01uF 16V K | 1   |       |
|                             | C279       | NCBA1CK-103W   | C CAPACITOR     | 0.01uF 16V K | 1   |       |
|                             | C280       | NCBA1CK-103W   | C CAPACITOR     | 0.01uF 16V K | 1   |       |
|                             | C281       | NCBA1AK-104W   | C CAPACITOR     | 0.1uF 10V K  | 1   |       |
|                             | C282       | NCBA1AK-104W   | C CAPACITOR     | 0.1uF 10V K  | 1   |       |
|                             | C283       | NCBA1AK-104W   | C CAPACITOR     | 0.1uF 10V K  | 1   |       |
|                             | C284       | NCB20JK-106X   | C CAPACITOR     | 10uF 6.3V K  | 1   |       |
|                             | C285       | NCB20JK-106X   | C CAPACITOR     | 10uF 6.3V K  | 1   |       |
|                             | C286       | NCBA1HK-102W   | C CAPACITOR     | 1000pF 50V K | 1   |       |
|                             | C291       | NCBA1HK-471W   | C CAPACITOR     | 470pF 50V K  | 1   |       |
|                             | C292       | NCJ11AK-476X-A | C CAPACITOR     | 47uF 10V K   | 1   |       |
|                             | C293       | NCBA1HK-471W   | C CAPACITOR     | 470pF 50V K  | 1   |       |
|                             | C294       | NCJ11AK-476X-A | C CAPACITOR     | 47uF 10V K   | 1   |       |
|                             | C2002      | NCBA1AK-104W   | C CAPACITOR     | 0.1uF 10V K  | 1   |       |
|                             | C2007      | NCBA1AK-104W   | C CAPACITOR     | 0.1uF 10V K  | 1   |       |
|                             | C2011      | NCBA1AK-104W   | C CAPACITOR     | 0.1uF 10V K  | 1   |       |
|                             | C2017      | NCBA1AK-104W   | C CAPACITOR     | 0.1uF 10V K  | 1   |       |
|                             | C2021      | NCBA1AK-104W   | C CAPACITOR     | 0.1uF 10V K  | 1   |       |
|                             | C2027      | NCBA1AK-104W   | C CAPACITOR     | 0.1uF 10V K  | 1   |       |

|            |      |            |      |             |      |             |      |
|------------|------|------------|------|-------------|------|-------------|------|
| MODEL      | MARK | MODEL      | MARK | MODEL       | MARK | MODEL       | MARK |
| KW-NSX700A | A    | KW-NSX700E | B    | KW-NSX700EE | C    | KW-NSX700EU | D    |
| KW-NSX700J | E    | KW-NSX700U | F    | KW-NSX700UI | G    | KW-NSX700UP | H    |

| Safe | Symbol No. | Parts No.      | Parts Name  | Description  | QTY | Local |
|------|------------|----------------|-------------|--------------|-----|-------|
|      | C2031      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2037      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2041      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2047      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2051      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2057      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2060      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2078      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2082      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2083      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2084      | NDCA1HJ-120W   | C CAPACITOR | 12pF 50V J   | 1   |       |
|      | C2085      | NDCA1HJ-120W   | C CAPACITOR | 12pF 50V J   | 1   |       |
|      | C2088      | NCBA1HK-102W   | C CAPACITOR | 1000pF 50V K | 1   |       |
|      | C2091      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2096      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2100      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2101      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2103      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2105      | NDCA1HJ-100W   | C CAPACITOR | 10pF 50V J   | 1   |       |
|      | C2106      | NDCA1HJ-9R0W   | C CAPACITOR | 9pF 50V J    | 1   |       |
|      | C2107      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2108      | NDCA1HJ-100W   | C CAPACITOR | 10pF 50V J   | 1   |       |
|      | C2109      | NDCA1HJ-100W   | C CAPACITOR | 10pF 50V J   | 1   |       |
|      | C2111      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2126      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2127      | NCBA1HK-102W   | C CAPACITOR | 1000pF 50V K | 1   |       |
|      | C2128      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2137      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2141      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2142      | NDCA1HJ-120W   | C CAPACITOR | 12pF 50V J   | 1   |       |
|      | C2143      | NDCA1HJ-120W   | C CAPACITOR | 12pF 50V J   | 1   |       |
|      | C2146      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2152      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2156      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2162      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2166      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2172      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2176      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2182      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2186      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2194      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2205      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2213      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2222      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2226      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2231      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2240      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2250      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2261      | NCB20JK-106X   | C CAPACITOR | 10uF 6.3V K  | 1   |       |
|      | C2262      | NCB20JK-106X   | C CAPACITOR | 10uF 6.3V K  | 1   |       |
|      | C2401      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2402      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2403      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2404      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2405      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2406      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2407      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2408      | NCB20JK-106X   | C CAPACITOR | 10uF 6.3V K  | 1   |       |
|      | C2409      | NCB20JK-106X   | C CAPACITOR | 10uF 6.3V K  | 1   |       |
|      | C2410      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2411      | NCB20JK-106X   | C CAPACITOR | 10uF 6.3V K  | 1   |       |
|      | C2501      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2502      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2503      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2504      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2505      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2506      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2507      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2508      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2509      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2510      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2511      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2512      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2513      | NCBA1HK-102W   | C CAPACITOR | 1000pF 50V K | 1   |       |
|      | C2515      | NCB20JK-106X   | C CAPACITOR | 10uF 6.3V K  | 1   |       |
|      | C2516      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2517      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C2518      | NCJ20JM-226X-R | C CAPACITOR | 22uF 6.3V M  | 1   |       |
|      | C2521      | NCB20JK-106X   | C CAPACITOR | 10uF 6.3V K  | 1   |       |
|      | C2522      | NCB20JK-106X   | C CAPACITOR | 10uF 6.3V K  | 1   |       |
|      | C2529      | NCBA1HK-102W   | C CAPACITOR | 1000pF 50V K | 1   |       |
|      | C2530      | NCBA1HK-102W   | C CAPACITOR | 1000pF 50V K | 1   |       |
|      | C2531      | NCB20JK-106X   | C CAPACITOR | 10uF 6.3V K  | 1   |       |
|      | C2532      | NCB20JK-106X   | C CAPACITOR | 10uF 6.3V K  | 1   |       |
|      | C2533      | NCB20JK-106X   | C CAPACITOR | 10uF 6.3V K  | 1   |       |
|      | C2534      | NCB20JK-106X   | C CAPACITOR | 10uF 6.3V K  | 1   |       |
|      | C2539      | NCB31AK-105X-R | C CAPACITOR | 1uF 10V K    | 1   |       |
|      | C2542      | NCB31CK-105X   | C CAPACITOR | 1uF 16V K    | 1   |       |
|      | C2544      | NCB31CK-105X   | C CAPACITOR | 1uF 16V K    | 1   |       |
|      | C2546      | NCB31CK-105X   | C CAPACITOR | 1uF 16V K    | 1   |       |
|      | C2601      | NCB31CK-105X   | C CAPACITOR | 1uF 16V K    | 1   |       |
|      | C2602      | NCB31CK-105X   | C CAPACITOR | 1uF 16V K    | 1   |       |

| MODEL      | MARK | MODEL      | MARK | MODEL       | MARK | MODEL       | MARK |
|------------|------|------------|------|-------------|------|-------------|------|
| KW-NSX700A | A    | KW-NSX700E | B    | KW-NSX700EE | C    | KW-NSX700EU | D    |
| KW-NSX700J | E    | KW-NSX700U | F    | KW-NSX700UI | G    | KW-NSX700UP | H    |

| Safe | Symbol No. | Parts No. | Parts Name     | Description | QTY           | Local |
|------|------------|-----------|----------------|-------------|---------------|-------|
|      |            | C2603     | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K   | 1     |
|      |            | C2604     | NCB31CK-105X   | C CAPACITOR | 1uF 16V K     | 1     |
|      |            | C2605     | NCB31CK-105X   | C CAPACITOR | 1uF 16V K     | 1     |
|      |            | C2606     | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K   | 1     |
|      |            | C2607     | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K   | 1     |
|      |            | C2608     | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K   | 1     |
|      |            | C2609     | NEZ0053-477X   | E CAPACITOR | 470uF         | 1     |
|      |            | C2610     | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K   | 1     |
|      |            | C2611     | NCB21CK-475X   | C CAPACITOR | 4.7uF 16V K   | 1     |
|      |            | C2612     | NCB21CK-475X   | C CAPACITOR | 4.7uF 16V K   | 1     |
|      |            | C2613     | NCJ21CK-106X-R | C CAPACITOR | 10uF 16V K    | 1     |
|      |            | C2615     | NCB31CK-105X   | C CAPACITOR | 1uF 16V K     | 1     |
|      |            | C2616     | NDC31HJ-101X   | C CAPACITOR | 100pF 50V J   | 1     |
|      |            | C2620     | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K   | 1     |
|      |            | C2621     | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K   | 1     |
|      |            | C2701     | NCB21EK-334X   | C CAPACITOR | 0.33uF 25V K  | 1     |
|      |            | C2702     | NCBA1CK-103W   | C CAPACITOR | 0.01uF 16V K  | 1     |
|      |            | C2703     | NEZ0054-477X   | E CAPACITOR | 470uF         | 1     |
|      |            | C2705     | NCB20JK-106X   | C CAPACITOR | 10uF 6.3V K   | 1     |
|      |            | C2706     | NCBA1HK-102W   | C CAPACITOR | 1000pF 50V K  | 1     |
|      |            | C2708     | NCBA1HK-682W   | C CAPACITOR | 6800pF 50V K  | 1     |
|      |            | C2709     | NCBA1CK-104W   | C CAPACITOR | 0.1uF 16V K   | 1     |
|      |            | C2710     | NCJ11EK-106X-R | C CAPACITOR | 10uF 25V      | 1     |
|      |            | C2713     | NEZ0058-337X   | E CAPACITOR | 330uF         | 1     |
|      |            | C2715     | NCB20JK-106X   | C CAPACITOR | 10uF 6.3V K   | 1     |
|      |            | C2716     | NCBA1HK-102W   | C CAPACITOR | 1000pF 50V K  | 1     |
|      |            | C2718     | NCBA1HK-682W   | C CAPACITOR | 6800pF 50V K  | 1     |
|      |            | C2719     | NCBA1CK-104W   | C CAPACITOR | 0.1uF 16V K   | 1     |
|      |            | C2720     | NCJ11EK-106X-R | C CAPACITOR | 10uF 25V      | 1     |
|      |            | C2722     | NEZ0058-337X   | E CAPACITOR | 330uF         | 1     |
|      |            | C2724     | NCB20JK-106X   | C CAPACITOR | 10uF 6.3V K   | 1     |
|      |            | C2725     | NCBA1HK-102W   | C CAPACITOR | 1000pF 50V K  | 1     |
|      |            | C2726     | NCBA1HK-102W   | C CAPACITOR | 1000pF 50V K  | 1     |
|      |            | C2727     | NCBA1HK-682W   | C CAPACITOR | 6800pF 50V K  | 1     |
|      |            | C2728     | NCBA1CK-104W   | C CAPACITOR | 0.1uF 16V K   | 1     |
|      |            | C2729     | NCJ11EK-106X-R | C CAPACITOR | 10uF 25V      | 1     |
|      |            | C2731     | NCB31AK-105X-R | C CAPACITOR | 1uF 10V K     | 1     |
|      |            | C2732     | NCB31AK-105X-R | C CAPACITOR | 1uF 10V K     | 1     |
|      |            | C2733     | NCB31AK-105X-R | C CAPACITOR | 1uF 10V K     | 1     |
|      |            | C2734     | NCB31AK-105X-R | C CAPACITOR | 1uF 10V K     | 1     |
|      |            | C2740     | NEZ0054-477X   | E CAPACITOR | 470uF         | 1     |
|      |            | C2742     | NCB20JK-106X   | C CAPACITOR | 10uF 6.3V K   | 1     |
|      |            | C2743     | NCBA1HK-102W   | C CAPACITOR | 1000pF 50V K  | 1     |
|      |            | C2744     | NCBA1HK-102W   | C CAPACITOR | 1000pF 50V K  | 1     |
|      |            | C2745     | NCBA1HK-682W   | C CAPACITOR | 6800pF 50V K  | 1     |
|      |            | C2746     | NCBA1CK-104W   | C CAPACITOR | 0.1uF 16V K   | 1     |
|      |            | C2747     | NCJ11EK-106X-R | C CAPACITOR | 10uF 25V      | 1     |
|      |            | C2749     | NCB20JK-106X   | C CAPACITOR | 10uF 6.3V K   | 1     |
|      |            | C2750     | NCBA1CK-103W   | C CAPACITOR | 0.01uF 16V K  | 1     |
|      |            | C2751     | NCB31CK-105X   | C CAPACITOR | 1uF 16V K     | 1     |
|      |            | R200      | NRSA6AJ-121W   | MG RESISTOR | 120Ω 1/16W J  | 1     |
|      |            | R201      | NRSA6AJ-121W   | MG RESISTOR | 120Ω 1/16W J  | 1     |
|      |            | R202      | NRSA6AJ-121W   | MG RESISTOR | 120Ω 1/16W J  | 1     |
|      |            | R203      | NRSA6AJ-121W   | MG RESISTOR | 120Ω 1/16W J  | 1     |
|      |            | R204      | NRSA6AJ-121W   | MG RESISTOR | 120Ω 1/16W J  | 1     |
|      |            | R205      | NRSA6AJ-121W   | MG RESISTOR | 120Ω 1/16W J  | 1     |
|      |            | R206      | NRSA6AJ-121W   | MG RESISTOR | 120Ω 1/16W J  | 1     |
|      |            | R207      | NRSA6AJ-121W   | MG RESISTOR | 120Ω 1/16W J  | 1     |
|      |            | R210      | NRSA6AJ-121W   | MG RESISTOR | 120Ω 1/16W J  | 1     |
|      |            | R211      | NRSA6AJ-121W   | MG RESISTOR | 120Ω 1/16W J  | 1     |
|      |            | R212      | NRSA6AJ-121W   | MG RESISTOR | 120Ω 1/16W J  | 1     |
|      |            | R213      | NRSA6AJ-121W   | MG RESISTOR | 120Ω 1/16W J  | 1     |
|      |            | R214      | NRSA6AJ-121W   | MG RESISTOR | 120Ω 1/16W J  | 1     |
|      |            | R215      | NRSA6AJ-121W   | MG RESISTOR | 120Ω 1/16W J  | 1     |
|      |            | R216      | NRSA6AJ-121W   | MG RESISTOR | 120Ω 1/16W J  | 1     |
|      |            | R217      | NRSA6AJ-121W   | MG RESISTOR | 120Ω 1/16W J  | 1     |
|      |            | R220      | NRSA6AJ-121W   | MG RESISTOR | 120Ω 1/16W J  | 1     |
|      |            | R221      | NRSA6AJ-121W   | MG RESISTOR | 120Ω 1/16W J  | 1     |
|      |            | R222      | NRSA6AJ-121W   | MG RESISTOR | 120Ω 1/16W J  | 1     |
|      |            | R223      | NRSA6AJ-121W   | MG RESISTOR | 120Ω 1/16W J  | 1     |
|      |            | R224      | NRSA6AJ-121W   | MG RESISTOR | 120Ω 1/16W J  | 1     |
|      |            | R225      | NRSA6AJ-121W   | MG RESISTOR | 120Ω 1/16W J  | 1     |
|      |            | R226      | NRSA6AJ-121W   | MG RESISTOR | 120Ω 1/16W J  | 1     |
|      |            | R227      | NRSA6AJ-121W   | MG RESISTOR | 120Ω 1/16W J  | 1     |
|      |            | R228      | NRSA6AJ-220W   | MG RESISTOR | 22Ω 1/16W J   | 1     |
|      |            | R229      | NRSA6AJ-220W   | MG RESISTOR | 22Ω 1/16W J   | 1     |
|      |            | R231      | NRSA6AJ-121W   | MG RESISTOR | 120Ω 1/16W J  | 1     |
|      |            | R232      | NRSA6AJ-121W   | MG RESISTOR | 120Ω 1/16W J  | 1     |
|      |            | R233      | NRSA6AJ-121W   | MG RESISTOR | 120Ω 1/16W J  | 1     |
|      |            | R234      | NRSA6AJ-121W   | MG RESISTOR | 120Ω 1/16W J  | 1     |
|      |            | R235      | NRSA6AJ-121W   | MG RESISTOR | 120Ω 1/16W J  | 1     |
|      |            | R236      | NRSA6AJ-101W   | MG RESISTOR | 100Ω 1/16W J  | 1     |
|      |            | R237      | NRSA6AJ-473W   | MG RESISTOR | 47kΩ 1/16W J  | 1     |
|      |            | R238      | NRSA6AJ-121W   | MG RESISTOR | 120Ω 1/16W J  | 1     |
|      |            | R240      | NRSA6AJ-472W   | MG RESISTOR | 4.7kΩ 1/16W J | 1     |
|      |            | R241      | NRSA6AJ-472W   | MG RESISTOR | 4.7kΩ 1/16W J | 1     |
|      |            | R243      | NRSA6AJ-121W   | MG RESISTOR | 120Ω 1/16W J  | 1     |
|      |            | R244      | NRSA6AJ-121W   | MG RESISTOR | 120Ω 1/16W J  | 1     |
|      |            | R248      | NRSA6AJ-102W   | MG RESISTOR | 1kΩ 1/16W J   | 1     |
|      |            | R249      | NRSA6AJ-103W   | MG RESISTOR | 10kΩ 1/16W J  | 1     |

|            |      |            |      |             |      |             |      |
|------------|------|------------|------|-------------|------|-------------|------|
| MODEL      | MARK | MODEL      | MARK | MODEL       | MARK | MODEL       | MARK |
| KW-NSX700A | A    | KW-NSX700E | B    | KW-NSX700EE | C    | KW-NSX700EU | D    |
| KW-NSX700J | E    | KW-NSX700U | F    | KW-NSX700UI | G    | KW-NSX700UP | H    |

| Safe | Symbol No. | Parts No.    | Parts Name  | Description   | QTY | Local |
|------|------------|--------------|-------------|---------------|-----|-------|
|      | R250       | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |       |
|      | R252       | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |       |
|      | R254       | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   |       |
|      | R256       | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R260       | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R261       | NRSA6AJ-751W | MG RESISTOR | 750Ω 1/16W J  | 1   |       |
|      | R262       | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J     | 1   |       |
|      | R263       | NRSA6AJ-751W | MG RESISTOR | 750Ω 1/16W J  | 1   |       |
|      | R264       | NRS181J-0R0X | MG RESISTOR | 0Ω 1/8W J     | 1   |       |
|      | R266       | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |       |
|      | R270       | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R273       | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |       |
|      | R274       | NRSA6AJ-182W | MG RESISTOR | 1.8kΩ 1/16W J | 1   |       |
|      | R275       | NRSA6AJ-182W | MG RESISTOR | 1.8kΩ 1/16W J | 1   |       |
|      | R276       | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J  | 1   |       |
|      | R279       | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J  | 1   |       |
|      | R280       | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R281       | NRSA6AJ-220W | MG RESISTOR | 22Ω 1/16W J   | 1   |       |
|      | R282       | NRSA6AJ-220W | MG RESISTOR | 22Ω 1/16W J   | 1   |       |
|      | R283       | NRSA6AJ-220W | MG RESISTOR | 22Ω 1/16W J   | 1   |       |
|      | R284       | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |       |
|      | R285       | NRSA6AJ-220W | MG RESISTOR | 22Ω 1/16W J   | 1   |       |
|      | R291       | NRSA6AJ-104W | MG RESISTOR | 100kΩ 1/16W J | 1   |       |
|      | R292       | NRSA6AJ-222W | MG RESISTOR | 2.2kΩ 1/16W J | 1   |       |
|      | R2001      | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   |       |
|      | R2014      | NRSA6AJ-220W | MG RESISTOR | 22Ω 1/16W J   | 1   |       |
|      | R2015      | NRSA6AJ-220W | MG RESISTOR | 22Ω 1/16W J   | 1   |       |
|      | R2020      | NRSA6AJ-220W | MG RESISTOR | 22Ω 1/16W J   | 1   |       |
|      | R2040      | NRSA6AJ-220W | MG RESISTOR | 22Ω 1/16W J   | 1   |       |
|      | R2045      | NRSA6AJ-220W | MG RESISTOR | 22Ω 1/16W J   | 1   |       |
|      | R2046      | NRSA6AJ-220W | MG RESISTOR | 22Ω 1/16W J   | 1   |       |
|      | R2048      | NRSA6AJ-220W | MG RESISTOR | 22Ω 1/16W J   | 1   |       |
|      | R2050      | NRSA6AJ-220W | MG RESISTOR | 22Ω 1/16W J   | 1   |       |
|      | R2052      | NRSA6AJ-220W | MG RESISTOR | 22Ω 1/16W J   | 1   |       |
|      | R2053      | NRSA6AJ-220W | MG RESISTOR | 22Ω 1/16W J   | 1   |       |
|      | R2054      | NRSA6AJ-220W | MG RESISTOR | 22Ω 1/16W J   | 1   |       |
|      | R2056      | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   |       |
|      | R2058      | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   |       |
|      | R2059      | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |       |
|      | R2061      | NRSA6AJ-220W | MG RESISTOR | 22Ω 1/16W J   | 1   |       |
|      | R2063      | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |       |
|      | R2072      | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |       |
|      | R2073      | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |       |
|      | R2076      | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R2077      | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R2079      | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |       |
|      | R2081      | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |       |
|      | R2085      | NRSA6AJ-222W | MG RESISTOR | 2.2kΩ 1/16W J | 1   |       |
|      | R2087      | NRSA6AJ-104W | MG RESISTOR | 100kΩ 1/16W J | 1   |       |
|      | R2088      | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R2095      | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R2098      | NRSA6AJ-562W | MG RESISTOR | 5.6kΩ 1/16W J | 1   |       |
|      | R2106      | NRSA6AJ-471W | MG RESISTOR | 470Ω 1/16W J  | 1   |       |
|      | R2109      | NRSA6AJ-471W | MG RESISTOR | 470Ω 1/16W J  | 1   |       |
|      | R2117      | NRSA6AJ-243W | MG RESISTOR | 24kΩ 1/16W J  | 1   |       |
|      | R2119      | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R2120      | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R2122      | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J  | 1   |       |
|      | R2123      | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R2127      | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   |       |
|      | R2129      | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   |       |
|      | R2130      | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R2131      | NRSA6AJ-220W | MG RESISTOR | 22Ω 1/16W J   | 1   |       |
|      | R2132      | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |       |
|      | R2133      | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |       |
|      | R2134      | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |       |
|      | R2142      | NRSA6AJ-222W | MG RESISTOR | 2.2kΩ 1/16W J | 1   |       |
|      | R2189      | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R2190      | NRSA6AJ-220W | MG RESISTOR | 22Ω 1/16W J   | 1   |       |
|      | R2191      | NRSA6AJ-220W | MG RESISTOR | 22Ω 1/16W J   | 1   |       |
|      | R2192      | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   |       |
|      | R2193      | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R2195      | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   |       |
|      | R2197      | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R2198      | NRSA6AJ-181W | MG RESISTOR | 180Ω 1/16W J  | 1   |       |
|      | R2199      | NRSA6AJ-220W | MG RESISTOR | 22Ω 1/16W J   | 1   |       |
|      | R2200      | NRSA6AJ-220W | MG RESISTOR | 22Ω 1/16W J   | 1   |       |
|      | R2201      | NRSA6AJ-220W | MG RESISTOR | 22Ω 1/16W J   | 1   |       |
|      | R2202      | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J  | 1   |       |
|      | R2204      | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   |       |
|      | R2206      | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   |       |
|      | R2208      | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R2209      | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R2210      | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   |       |
|      | R2211      | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R2212      | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R2216      | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R2217      | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J    | 1   |       |
|      | R2218      | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J  | 1   |       |
|      | R2219      | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |       |

| MODEL      | MARK | MODEL      | MARK | MODEL       | MARK | MODEL       | MARK |
|------------|------|------------|------|-------------|------|-------------|------|
| KW-NSX700A | A    | KW-NSX700E | B    | KW-NSX700EE | C    | KW-NSX700EU | D    |
| KW-NSX700J | E    | KW-NSX700U | F    | KW-NSX700UI | G    | KW-NSX700UP | H    |

| Safe | Symbol No. | Parts No.    | Parts Name  | Description   | QTY | Local |
|------|------------|--------------|-------------|---------------|-----|-------|
|      | R2220      | NRSA6AJ-104W | MG RESISTOR | 100kΩ 1/16W J | 1   |       |
|      | R2239      | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   |       |
|      | R2256      | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |       |
|      | R2401      | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |       |
|      | R2402      | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |       |
|      | R2403      | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |       |
|      | R2405      | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |       |
|      | R2406      | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |       |
|      | R2407      | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |       |
|      | R2501      | NRSA6AD-272W | MG RESISTOR | 2.7kΩ 1/16W D | 1   |       |
|      | R2502      | NRSA6AJ-202W | MG RESISTOR | 2kΩ 1/16W J   | 1   |       |
|      | R2503      | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J  | 1   |       |
|      | R2504      | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R2505      | NRSA6AJ-473W | MG RESISTOR | 47kΩ 1/16W J  | 1   |       |
|      | R2506      | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R2507      | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R2541      | NRSA6AJ-750W | MG RESISTOR | 75Ω 1/16W J   | 1   |       |
|      | R2542      | NRSA6AJ-750W | MG RESISTOR | 75Ω 1/16W J   | 1   |       |
|      | R2543      | NRSA6AJ-750W | MG RESISTOR | 75Ω 1/16W J   | 1   |       |
|      | R2544      | NRSA6AJ-750W | MG RESISTOR | 75Ω 1/16W J   | 1   |       |
|      | R2545      | NRSA6AJ-750W | MG RESISTOR | 75Ω 1/16W J   | 1   |       |
|      | R2546      | NRSA6AJ-750W | MG RESISTOR | 75Ω 1/16W J   | 1   |       |
|      | R2547      | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   |       |
|      | R2548      | NRSA6AJ-121W | MG RESISTOR | 120Ω 1/16W J  | 1   |       |
|      | R2549      | NRSA6AJ-121W | MG RESISTOR | 120Ω 1/16W J  | 1   |       |
|      | R2550      | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R2551      | NRSA6AJ-104W | MG RESISTOR | 100kΩ 1/16W J | 1   |       |
|      | R2552      | NRSA6AJ-271W | MG RESISTOR | 270Ω 1/16W J  | 1   |       |
|      | R2553      | NRSA6AJ-271W | MG RESISTOR | 270Ω 1/16W J  | 1   |       |
|      | R2554      | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J    | 1   |       |
|      | R2555      | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J    | 1   |       |
|      | R2556      | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J    | 1   |       |
|      | R2557      | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J    | 1   |       |
|      | R2558      | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J    | 1   |       |
|      | R2559      | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J    | 1   |       |
|      | R2560      | NRSA6AJ-0R0W | MG RESISTOR | 0Ω 1/16W J    | 1   |       |
|      | R2561      | NRSA6AJ-104W | MG RESISTOR | 100kΩ 1/16W J | 1   |       |
|      | R2562      | NRSA6AJ-104W | MG RESISTOR | 100kΩ 1/16W J | 1   |       |
|      | R2563      | NRSA6AJ-222W | MG RESISTOR | 2.2kΩ 1/16W J | 1   |       |
|      | R2564      | NRSA6AJ-222W | MG RESISTOR | 2.2kΩ 1/16W J | 1   |       |
|      | R2601      | NRSA6AD-151W | MG RESISTOR | 150Ω 1/16W D  | 1   |       |
|      | R2602      | NRSA6AJ-105W | MG RESISTOR | 1MΩ 1/16W J   | 1   |       |
|      | R2603      | NRSA6AJ-105W | MG RESISTOR | 1MΩ 1/16W J   | 1   |       |
|      | R2604      | NRSA6AJ-101W | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R2605      | NRSA6AJ-104W | MG RESISTOR | 100kΩ 1/16W J | 1   |       |
|      | R2606      | NRSA6AJ-154W | MG RESISTOR | 150kΩ 1/16W J | 1   |       |
|      | R2607      | NRSA6AJ-471W | MG RESISTOR | 470Ω 1/16W J  | 1   |       |
|      | R2608      | NRSA6AJ-471W | MG RESISTOR | 470Ω 1/16W J  | 1   |       |
|      | R2609      | NRSA63J-750X | MG RESISTOR | 75Ω 1/16W J   | 1   |       |
|      | R2610      | NRSA63J-750X | MG RESISTOR | 75Ω 1/16W J   | 1   |       |
|      | R2611      | NRSA63J-750X | MG RESISTOR | 75Ω 1/16W J   | 1   |       |
|      | R2701      | NRSA6AJ-223W | MG RESISTOR | 22kΩ 1/16W J  | 1   |       |
|      | R2702      | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J  | 1   |       |
|      | R2703      | NRSA6AJ-471W | MG RESISTOR | 470Ω 1/16W J  | 1   |       |
|      | R2704      | NRSA6AJ-472W | MG RESISTOR | 4.7kΩ 1/16W J | 1   |       |
|      | R2705      | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J  | 1   |       |
|      | R2707      | NRSA6AJ-223W | MG RESISTOR | 22kΩ 1/16W J  | 1   |       |
|      | R2708      | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J  | 1   |       |
|      | R2709      | NRSA6AJ-223W | MG RESISTOR | 22kΩ 1/16W J  | 1   |       |
|      | R2710      | NRSA6AD-104W | MG RESISTOR | 100kΩ 1/16W D | 1   |       |
|      | R2711      | NRSA6AD-243W | MG RESISTOR | 24kΩ 1/16W D  | 1   |       |
|      | R2712      | NRS181J-100X | MG RESISTOR | 10Ω 1/8W J    | 1   |       |
|      | R2713      | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J  | 1   |       |
|      | R2714      | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   |       |
|      | R2715      | NRSA6AJ-153W | MG RESISTOR | 15kΩ 1/16W J  | 1   |       |
|      | R2716      | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   |       |
|      | R2717      | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J  | 1   |       |
|      | R2718      | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J  | 1   |       |
|      | R2720      | NRSA6AJ-223W | MG RESISTOR | 22kΩ 1/16W J  | 1   |       |
|      | R2721      | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J  | 1   |       |
|      | R2722      | NRSA6AJ-223W | MG RESISTOR | 22kΩ 1/16W J  | 1   |       |
|      | R2723      | NRSA6AD-114W | MG RESISTOR | 110kΩ 1/16W D | 1   |       |
|      | R2724      | NRSA6AD-273W | MG RESISTOR | 27kΩ 1/16W D  | 1   |       |
|      | R2725      | NRS181J-100X | MG RESISTOR | 10Ω 1/8W J    | 1   |       |
|      | R2726      | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J  | 1   |       |
|      | R2727      | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   |       |
|      | R2728      | NRSA6AJ-153W | MG RESISTOR | 15kΩ 1/16W J  | 1   |       |
|      | R2729      | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   |       |
|      | R2730      | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J  | 1   |       |
|      | R2731      | NRSA6AJ-223W | MG RESISTOR | 22kΩ 1/16W J  | 1   |       |
|      | R2732      | NRSA6AD-124W | MG RESISTOR | 120kΩ 1/16W D | 1   |       |
|      | R2733      | NRSA6AD-303W | MG RESISTOR | 30kΩ 1/16W D  | 1   |       |
|      | R2734      | NRS181J-100X | MG RESISTOR | 10Ω 1/8W J    | 1   |       |
|      | R2735      | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J  | 1   |       |
|      | R2736      | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   |       |
|      | R2737      | NRSA6AJ-153W | MG RESISTOR | 15kΩ 1/16W J  | 1   |       |
|      | R2738      | NRSA6AJ-102W | MG RESISTOR | 1kΩ 1/16W J   | 1   |       |
|      | R2739      | NRSA6AJ-103W | MG RESISTOR | 10kΩ 1/16W J  | 1   |       |
|      | R2741      | NRSA6AJ-223W | MG RESISTOR | 22kΩ 1/16W J  | 1   |       |
|      | R2742      | NRSA6AD-623W | MG RESISTOR | 62kΩ 1/16W D  | 1   |       |
|      | R2743      | NRSA6AD-273W | MG RESISTOR | 27kΩ 1/16W D  | 1   |       |
|      | R2744      | NRS181J-100X | MG RESISTOR | 10Ω 1/8W J    | 1   |       |

| MODEL      | MARK | MODEL      | MARK | MODEL       | MARK | MODEL       | MARK |
|------------|------|------------|------|-------------|------|-------------|------|
| KW-NSX700A | A    | KW-NSX700E | B    | KW-NSX700EE | C    | KW-NSX700EU | D    |
| KW-NSX700J | E    | KW-NSX700U | F    | KW-NSX700UI | G    | KW-NSX700UP | H    |

| Safe                             | Symbol No. | Parts No.      | Parts Name      | Description                                    | QTY | Local |
|----------------------------------|------------|----------------|-----------------|------------------------------------------------|-----|-------|
|                                  | R2745      | NRSA6AJ-103W   | MG RESISTOR     | 10kΩ 1/16W J                                   | 1   |       |
|                                  | R2746      | NRSA6AJ-102W   | MG RESISTOR     | 1kΩ 1/16W J                                    | 1   |       |
|                                  | R2747      | NRSA6AJ-153W   | MG RESISTOR     | 15kΩ 1/16W J                                   | 1   |       |
|                                  | R2748      | NRSA6AJ-102W   | MG RESISTOR     | 1kΩ 1/16W J                                    | 1   |       |
|                                  | R2749      | NRSA6AJ-103W   | MG RESISTOR     | 10kΩ 1/16W J                                   | 1   |       |
|                                  | RA201      | NRB04CJ-220W   | NET RESISTOR    | 22Ω J                                          | 1   |       |
|                                  | RA202      | NRB04CJ-220W   | NET RESISTOR    | 22Ω J                                          | 1   |       |
|                                  | RA203      | NRB04CJ-220W   | NET RESISTOR    | 22Ω J                                          | 1   |       |
|                                  | RA204      | NRB04CJ-220W   | NET RESISTOR    | 22Ω J                                          | 1   |       |
|                                  | RA205      | NRB04CJ-220W   | NET RESISTOR    | 22Ω J                                          | 1   |       |
|                                  | RA206      | NRB04CJ-220W   | NET RESISTOR    | 22Ω J                                          | 1   |       |
|                                  | RA207      | NRB04CJ-220W   | NET RESISTOR    | 22Ω J                                          | 1   |       |
|                                  | RA208      | NRB04CJ-220W   | NET RESISTOR    | 22Ω J                                          | 1   |       |
|                                  | RA209      | NRB04CJ-220W   | NET RESISTOR    | 22Ω J                                          | 1   |       |
|                                  | RA210      | NRB04CJ-220W   | NET RESISTOR    | 22Ω J                                          | 1   |       |
|                                  | RA211      | NRB04CJ-220W   | NET RESISTOR    | 22Ω J                                          | 1   |       |
|                                  | RA212      | NRB04CJ-220W   | NET RESISTOR    | 22Ω J                                          | 1   |       |
|                                  | RA213      | NRB04CJ-220W   | NET RESISTOR    | 22Ω J                                          | 1   |       |
|                                  | RA214      | NRB04CJ-220W   | NET RESISTOR    | 22Ω J                                          | 1   |       |
|                                  | RA261      | NRB04CJ-392W   | NET RESISTOR    | 3.9kΩ J                                        | 1   |       |
|                                  | RA271      | NRB04CJ-100W   | NET RESISTOR    | 10Ω J                                          | 1   |       |
|                                  | RA272      | NRB04CJ-100W   | NET RESISTOR    | 10Ω J                                          | 1   |       |
|                                  | RA273      | NRB04CJ-100W   | NET RESISTOR    | 10Ω J                                          | 1   |       |
|                                  | L221       | NQR0654-001X   | EMI FILTER      |                                                | 1   |       |
|                                  | L2501      | NQL79GM-470X   | COIL            | 47uH M                                         | 1   |       |
|                                  | L2701      | NQLL8EM-220X   | COIL            | 22uH M                                         | 1   |       |
|                                  | L2702      | NQLL8EM-220X   | COIL            | 22uH M                                         | 1   |       |
|                                  | L2703      | NQLL8EM-100X   | COIL            | 10uH M                                         | 1   |       |
|                                  | L2704      | NQLL8EM-220X   | COIL            | 22uH M                                         | 1   |       |
|                                  | CN201      | QGF0534F6-40X  | CONNECTOR       | FFC/FPC (1-40)                                 | 1   |       |
|                                  | CN202      | QGF0534F6-40X  | CONNECTOR       | FFC/FPC (1-40)                                 | 1   |       |
|                                  | CN203      | QGF0534F6-50X  | CONNECTOR       | FFC/FPC (1-50)                                 | 1   |       |
|                                  | CN211      | QGA2001C1-05   | CONNECTOR       | W-B (1-5)                                      | 1   |       |
|                                  | CN212      | QGA2001C1-06   | CONNECTOR       | W-B (1-6)                                      | 1   |       |
|                                  | CN261      | QGA2001C1-02   | CONNECTOR       | W-B (1-2)                                      | 1   |       |
|                                  | CN262      | QGA2001F1-02   | CONNECTOR       | W-B (1-2)                                      | 1   |       |
|                                  | CN271      | QGA2501F1-02   | CONNECTOR       | W-B (1-2)                                      | 1   |       |
|                                  | CN291      | QNZ0984-002    | CAR CONNECTOR   |                                                | 1   |       |
| △                                | F2701      | NMFZ032-4R0X-H | FUSE            | 4A                                             | 1   |       |
|                                  | J2601      | QNN0011-002    | PIN JACK        |                                                | 1   |       |
|                                  | J2602      | QNS0307-001    | 3.5 JACK        |                                                | 1   |       |
|                                  | K271       | NQR0154-003X   | FERRITE CORE    |                                                | 1   |       |
|                                  | K272       | NQR0154-003X   | FERRITE CORE    |                                                | 1   |       |
|                                  | K273       | NQR0154-003X   | FERRITE CORE    |                                                | 1   |       |
|                                  | K291       | NQR0286-001X   | FERRITE BEADS   |                                                | 1   |       |
|                                  | K292       | NQR0286-001X   | FERRITE BEADS   |                                                | 1   |       |
|                                  | K293       | NQR0389-001X   | FERRITE BEADS   |                                                | 1   |       |
|                                  | K294       | NQR0389-001X   | FERRITE BEADS   |                                                | 1   |       |
|                                  | P201       | QZW0112-002    | WIRE CLAMP      |                                                | 1   |       |
|                                  | VA261      | NAF0034-270X   | VARIATOR(ZNR)   | 27V                                            | 1   |       |
|                                  | VA262      | NAF0034-270X   | VARIATOR(ZNR)   | 27V                                            | 1   |       |
|                                  | VA263      | NAF0034-270X   | VARIATOR(ZNR)   | 27V                                            | 1   |       |
|                                  | VA264      | NAF0034-270X   | VARIATOR(ZNR)   | 27V                                            | 1   |       |
|                                  | X201       | NAX1135-001X   | CRYSTAL         |                                                | 1   |       |
|                                  | X2001      | NAX1194-001X   | CRYSTAL         |                                                | 1   |       |
|                                  | X2002      | NAX1140-001X   | CRYSTAL         |                                                | 1   |       |
|                                  | X2003      | NAX1135-001X   | CRYSTAL         |                                                | 1   |       |
|                                  | X2004      | NAX1204-001X   | CRYSTAL         |                                                | 1   |       |
| PANEL-A UNIT (LVA11039-41A) <02> |            |                |                 |                                                |     |       |
|                                  | IC401      | MN103SH23      | IC(MCU)         |                                                | 1   |       |
|                                  | IC404      | NL17SZ17XV5-X  | IC              |                                                | 1   |       |
|                                  | IC405      | XC6213B122NG-X | IC              |                                                | 1   |       |
|                                  | IC431      | A3V28S40FTP-G6 | IC              |                                                | 1   |       |
|                                  | IC441      | JVM623C        | PROGRAMED IC    | IC441 IC451 will need to be replaced in pairs. | 1   |       |
|                                  | IC451      | JVM624C        | PROGRAMED IC    | IC441 IC451 will need to be replaced in pairs. | 1   |       |
|                                  | IC501      | NJM2831F92-X   | IC              |                                                | 1   |       |
|                                  | IC511      | NJM2904V-X     | IC              |                                                | 1   |       |
|                                  | Q4601      | LSAR523UB-X    | TRANSISTOR      |                                                | 1   |       |
|                                  | Q4611      | LSAR523UB-X    | TRANSISTOR      |                                                | 1   |       |
|                                  | Q4621      | LSAR523UB-X    | TRANSISTOR      |                                                | 1   |       |
|                                  | Q4631      | LSAR523UB-X    | TRANSISTOR      |                                                | 1   |       |
|                                  | Q5201      | LTC014EEB-X    | DIGI TRANSISTOR |                                                | 1   |       |
|                                  | Q5202      | LSCR523UB-X    | TRANSISTOR      |                                                | 1   |       |
|                                  | Q5203      | LSCR523UB-X    | TRANSISTOR      |                                                | 1   |       |
|                                  | Q5301      | LSAR523UB-X    | TRANSISTOR      |                                                | 1   |       |
|                                  | Q5302      | LSAR523UB-X    | TRANSISTOR      |                                                | 1   |       |
|                                  | D5201      | HSU119-X       | SI DIODE        |                                                | 1   |       |
|                                  | D5202      | RKZ18B2KG-X    | Z DIODE         |                                                | 1   |       |
|                                  | C4001      | NDCA1HJ-6R0W   | C CAPACITOR     | 6pF 50V J                                      | 1   |       |
|                                  | C4002      | NDCA1HJ-6R0W   | C CAPACITOR     | 6pF 50V J                                      | 1   |       |
|                                  | C4010      | NCBA1AK-104W   | C CAPACITOR     | 0.1uF 10V K                                    | 1   |       |
|                                  | C4013      | NCBA1AK-104W   | C CAPACITOR     | 0.1uF 10V K                                    | 1   |       |
|                                  | C4019      | NCBA1AK-104W   | C CAPACITOR     | 0.1uF 10V K                                    | 1   |       |
|                                  | C4020      | NCJA0JK-105W-R | C CAPACITOR     | 1uF 6.3V K                                     | 1   |       |
|                                  | C4028      | NCBA1AK-104W   | C CAPACITOR     | 0.1uF 10V K                                    | 1   |       |
|                                  | C4038      | NCBA1AK-104W   | C CAPACITOR     | 0.1uF 10V K                                    | 1   |       |
|                                  | C4039      | NCJA0JK-105W-R | C CAPACITOR     | 1uF 6.3V K                                     | 1   |       |
|                                  | C4049      | NCBA1AK-104W   | C CAPACITOR     | 0.1uF 10V K                                    | 1   |       |
|                                  | C4051      | NCBA1AK-104W   | C CAPACITOR     | 0.1uF 10V K                                    | 1   |       |

| MODEL      | MARK | MODEL      | MARK | MODEL       | MARK | MODEL       | MARK |
|------------|------|------------|------|-------------|------|-------------|------|
| KW-NSX700A | A    | KW-NSX700E | B    | KW-NSX700EE | C    | KW-NSX700EU | D    |
| KW-NSX700J | E    | KW-NSX700U | F    | KW-NSX700UI | G    | KW-NSX700UP | H    |

| Safe | Symbol No. | Parts No.      | Parts Name  | Description  | QTY | Local |
|------|------------|----------------|-------------|--------------|-----|-------|
|      | C4055      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4056      | NCB20JK-106X   | C CAPACITOR | 10uF 6.3V K  | 1   |       |
|      | C4057      | NCB20JK-106X   | C CAPACITOR | 10uF 6.3V K  | 1   |       |
|      | C4066      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4067      | NCJA0JK-105W-R | C CAPACITOR | 1uF 6.3V K   | 1   |       |
|      | C4069      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4074      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4075      | NCJA0JK-105W-R | C CAPACITOR | 1uF 6.3V K   | 1   |       |
|      | C4085      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4094      | NCBA1CK-103W   | C CAPACITOR | 0.01uF 16V K | 1   |       |
|      | C4095      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4097      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4103      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4106      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4107      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4120      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4121      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4122      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4129      | NDC31HJ-151X   | C CAPACITOR | 150pF 50V J  | 1   |       |
|      | C4135      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4145      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4154      | NCBA1HK-102W   | C CAPACITOR | 1000pF 50V K | 1   |       |
|      | C4155      | NCBA1HK-102W   | C CAPACITOR | 1000pF 50V K | 1   |       |
|      | C4157      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4160      | NDCA1HJ-330W   | C CAPACITOR | 33pF 50V J   | 1   |       |
|      | C4163      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4164      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4165      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4166      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4168      | NCJ20JM-226X-A | C CAPACITOR | 22uF 6.3V M  | 1   |       |
|      | C4169      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4171      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4172      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4173      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4176      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4177      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4178      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4182      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4183      | NCJA0JK-105W-R | C CAPACITOR | 1uF 6.3V K   | 1   |       |
|      | C4190      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4196      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4201      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4210      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4217      | NCB20JK-475X   | C CAPACITOR | 4.7uF 6.3V K | 1   |       |
|      | C4218      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4301      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4303      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4309      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4314      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4327      | NCB20JK-106X   | C CAPACITOR | 10uF 6.3V K  | 1   |       |
|      | C4343      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4349      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4354      | NCB20JK-106X   | C CAPACITOR | 10uF 6.3V K  | 1   |       |
|      | C4408      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4409      | NCB20JK-106X   | C CAPACITOR | 10uF 6.3V K  | 1   |       |
|      | C4508      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4601      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | C4602      | NDCA1HJ-680W   | C CAPACITOR | 68pF 50V J   | 1   |       |
|      | C4604      | NDCA1HJ-180W   | C CAPACITOR | 18pF 50V J   | 1   |       |
|      | C4605      | NCB20JK-106X   | C CAPACITOR | 10uF 6.3V K  | 1   |       |
|      | C4614      | NDCA1HJ-560W   | C CAPACITOR | 56pF 50V J   | 1   |       |
|      | C4615      | NCJA0JK-105W-R | C CAPACITOR | 1uF 6.3V K   | 1   |       |
|      | C4616      | NCJA0JK-105W-R | C CAPACITOR | 1uF 6.3V K   | 1   |       |
|      | C4624      | NDCA1HJ-560W   | C CAPACITOR | 56pF 50V J   | 1   |       |
|      | C4625      | NCJA0JK-105W-R | C CAPACITOR | 1uF 6.3V K   | 1   |       |
|      | C4626      | NCJA0JK-105W-R | C CAPACITOR | 1uF 6.3V K   | 1   |       |
|      | C4634      | NDCA1HJ-560W   | C CAPACITOR | 56pF 50V J   | 1   |       |
|      | C4635      | NCJA0JK-105W-R | C CAPACITOR | 1uF 6.3V K   | 1   |       |
|      | C4636      | NCJA0JK-105W-R | C CAPACITOR | 1uF 6.3V K   | 1   |       |
|      | C5001      | NCB31HK-104X   | C CAPACITOR | 0.1uF 50V K  | 1   |       |
|      | C5002      | NCBA1CK-104W   | C CAPACITOR | 0.1uF 16V K  | 1   |       |
|      | C5003      | NCB20JK-106X   | C CAPACITOR | 10uF 6.3V K  | 1   |       |
|      | C5004      | NCJ21CK-106X-A | C CAPACITOR | 10uF 16V K   | 1   |       |
|      | C5005      | NCJA0JK-105W-R | C CAPACITOR | 1uF 6.3V K   | 1   |       |
|      | C5010      | NCB31CK-105X   | C CAPACITOR | 1uF 16V K    | 1   |       |
|      | C5011      | NCB31HK-104X   | C CAPACITOR | 0.1uF 50V K  | 1   |       |
|      | C5103      | NCBA1CK-104W   | C CAPACITOR | 0.1uF 16V K  | 1   |       |
|      | C5201      | NCB31HK-104X   | C CAPACITOR | 0.1uF 50V K  | 1   |       |
|      | C5202      | NCB21EK-105X   | C CAPACITOR | 1uF 25V K    | 1   |       |
|      | C5203      | NCB31HK-104X   | C CAPACITOR | 0.1uF 50V K  | 1   |       |
|      | C5301      | NCBA1CK-104W   | C CAPACITOR | 0.1uF 16V K  | 1   |       |
|      | C5302      | NCBA1AK-104W   | C CAPACITOR | 0.1uF 10V K  | 1   |       |
|      | R4001      | NRSA6AJ-681W   | MG RESISTOR | 680Ω 1/16W J | 1   |       |
|      | R4002      | NRSA6AJ-105W   | MG RESISTOR | 1MΩ 1/16W J  | 1   |       |
|      | R4030      | NRSA6AJ-680W   | MG RESISTOR | 68Ω 1/16W J  | 1   |       |
|      | R4053      | NRSA6AJ-680W   | MG RESISTOR | 68Ω 1/16W J  | 1   |       |
|      | R4054      | NRSA6AJ-680W   | MG RESISTOR | 68Ω 1/16W J  | 1   |       |
|      | R4058      | NRSA6AJ-103W   | MG RESISTOR | 10kΩ 1/16W J | 1   |       |
|      | R4060      | NRSA6AJ-101W   | MG RESISTOR | 100Ω 1/16W J | 1   |       |
|      | R4062      | NRSA6AJ-102W   | MG RESISTOR | 1kΩ 1/16W J  | 1   |       |

| MODEL      | MARK | MODEL      | MARK | MODEL       | MARK | MODEL       | MARK |
|------------|------|------------|------|-------------|------|-------------|------|
| KW-NSX700A | A    | KW-NSX700E | B    | KW-NSX700EE | C    | KW-NSX700EU | D    |
| KW-NSX700J | E    | KW-NSX700U | F    | KW-NSX700UI | G    | KW-NSX700UP | H    |

| Safe | Symbol No. | Parts No.    | Parts Name   | Description   | QTY | Local |
|------|------------|--------------|--------------|---------------|-----|-------|
| △    | R4063      | NRSA6AJ-102W | MG RESISTOR  | 1kΩ 1/16W J   | 1   |       |
|      | R4064      | NRSA6AJ-101W | MG RESISTOR  | 100Ω 1/16W J  | 1   |       |
|      | R4065      | NRSA6AJ-102W | MG RESISTOR  | 1kΩ 1/16W J   | 1   |       |
|      | R4066      | NRSA6AJ-101W | MG RESISTOR  | 100Ω 1/16W J  | 1   |       |
|      | R4067      | NRSA6AJ-101W | MG RESISTOR  | 100Ω 1/16W J  | 1   |       |
|      | R4069      | NRSA6AJ-101W | MG RESISTOR  | 100Ω 1/16W J  | 1   |       |
|      | R4070      | NRSA6AJ-101W | MG RESISTOR  | 100Ω 1/16W J  | 1   |       |
|      | R4077      | NRSA6AJ-101W | MG RESISTOR  | 100Ω 1/16W J  | 1   |       |
|      | R4078      | NRSA6AJ-680W | MG RESISTOR  | 68Ω 1/16W J   | 1   |       |
|      | R4079      | NRSA6AJ-680W | MG RESISTOR  | 68Ω 1/16W J   | 1   |       |
|      | R4083      | NRSA6AJ-680W | MG RESISTOR  | 68Ω 1/16W J   | 1   |       |
|      | R4087      | NRSA6AJ-680W | MG RESISTOR  | 68Ω 1/16W J   | 1   |       |
|      | R4091      | NRSA6AJ-680W | MG RESISTOR  | 68Ω 1/16W J   | 1   |       |
|      | R4127      | NRSA6AJ-101W | MG RESISTOR  | 100Ω 1/16W J  | 1   |       |
|      | R4128      | NRSA6AJ-101W | MG RESISTOR  | 100Ω 1/16W J  | 1   |       |
|      | R4129      | NRSA6AJ-470W | MG RESISTOR  | 47Ω 1/16W J   | 1   |       |
|      | R4130      | NRSA6AJ-102W | MG RESISTOR  | 1kΩ 1/16W J   | 1   |       |
|      | R4131      | NRSA6AJ-101W | MG RESISTOR  | 100Ω 1/16W J  | 1   |       |
|      | R4132      | NRSA6AJ-220W | MG RESISTOR  | 22Ω 1/16W J   | 1   |       |
|      | R4133      | NRSA6AJ-470W | MG RESISTOR  | 47Ω 1/16W J   | 1   |       |
|      | R4136      | NRSA6AJ-470W | MG RESISTOR  | 47Ω 1/16W J   | 1   |       |
|      | R4137      | NRSA6AJ-101W | MG RESISTOR  | 100Ω 1/16W J  | 1   |       |
|      | R4138      | NRSA6AJ-330W | MG RESISTOR  | 33Ω 1/16W J   | 1   |       |
|      | R4146      | NRSA6AJ-473W | MG RESISTOR  | 47kΩ 1/16W J  | 1   |       |
|      | R4157      | NRSA6AJ-0R0W | MG RESISTOR  | 0Ω 1/16W J    | 1   |       |
|      | R4161      | NRSA6AJ-101W | MG RESISTOR  | 100Ω 1/16W J  | 1   |       |
|      | R4164      | NRSA6AD-103W | MG RESISTOR  | 10kΩ 1/16W D  | 1   |       |
|      | R4166      | NRSA6AJ-2R2W | MG RESISTOR  | 2.2Ω 1/16W J  | 1   |       |
|      | R4167      | NRSA6AJ-0R0W | MG RESISTOR  | 0Ω 1/16W J    | 1   |       |
|      | R4402      | NRSA6AJ-680W | MG RESISTOR  | 68Ω 1/16W J   | 1   |       |
|      | R4501      | NRSA6AJ-0R0W | MG RESISTOR  | 0Ω 1/16W J    | 1   |       |
|      | R4502      | NRSA6AJ-680W | MG RESISTOR  | 68Ω 1/16W J   | 1   |       |
|      | R4503      | NRSA6AJ-0R0W | MG RESISTOR  | 0Ω 1/16W J    | 1   |       |
|      | R4516      | NRSA6AJ-0R0W | MG RESISTOR  | 0Ω 1/16W J    | 1   |       |
|      | R4517      | NRSA6AJ-0R0W | MG RESISTOR  | 0Ω 1/16W J    | 1   |       |
|      | R4601      | NRSA6AJ-391W | MG RESISTOR  | 390Ω 1/16W J  | 1   |       |
|      | R4606      | NRSA6AJ-152W | MG RESISTOR  | 1.5kΩ 1/16W J | 1   |       |
|      | R4608      | NRSA6AJ-471W | MG RESISTOR  | 470Ω 1/16W J  | 1   |       |
|      | R4611      | NRSA6AJ-470W | MG RESISTOR  | 47Ω 1/16W J   | 1   |       |
|      | R4613      | NRSA6AJ-103W | MG RESISTOR  | 10kΩ 1/16W J  | 1   |       |
|      | R4614      | NRSA6AJ-103W | MG RESISTOR  | 10kΩ 1/16W J  | 1   |       |
|      | R4615      | NRSA6AJ-151W | MG RESISTOR  | 150Ω 1/16W J  | 1   |       |
|      | R4618      | NRSA6AJ-471W | MG RESISTOR  | 470Ω 1/16W J  | 1   |       |
|      | R4621      | NRSA6AJ-470W | MG RESISTOR  | 47Ω 1/16W J   | 1   |       |
|      | R4623      | NRSA6AJ-103W | MG RESISTOR  | 10kΩ 1/16W J  | 1   |       |
|      | R4624      | NRSA6AJ-103W | MG RESISTOR  | 10kΩ 1/16W J  | 1   |       |
|      | R4625      | NRSA6AJ-151W | MG RESISTOR  | 150Ω 1/16W J  | 1   |       |
|      | R4628      | NRSA6AJ-471W | MG RESISTOR  | 470Ω 1/16W J  | 1   |       |
|      | R4631      | NRSA6AJ-470W | MG RESISTOR  | 47Ω 1/16W J   | 1   |       |
|      | R4633      | NRSA6AJ-103W | MG RESISTOR  | 10kΩ 1/16W J  | 1   |       |
|      | R4634      | NRSA6AJ-103W | MG RESISTOR  | 10kΩ 1/16W J  | 1   |       |
|      | R4635      | NRSA6AJ-151W | MG RESISTOR  | 150Ω 1/16W J  | 1   |       |
|      | R4638      | NRSA6AJ-471W | MG RESISTOR  | 470Ω 1/16W J  | 1   |       |
|      | R4640      | NRSA6AJ-0R0W | MG RESISTOR  | 0Ω 1/16W J    | 1   |       |
|      | R5001      | NRSA6AD-101W | MG RESISTOR  | 100Ω 1/16W D  | 1   |       |
|      | R5002      | NRSA6AD-161W | MG RESISTOR  | 160Ω 1/16W D  | 1   |       |
|      | R5003      | NRSA6AD-430W | MG RESISTOR  | 43Ω 1/16W D   | 1   |       |
|      | R5004      | NRSA6AD-360W | MG RESISTOR  | 36Ω 1/16W D   | 1   |       |
|      | R5005      | NRSA6AD-101W | MG RESISTOR  | 100Ω 1/16W D  | 1   |       |
|      | R5006      | NRSA6AD-161W | MG RESISTOR  | 160Ω 1/16W D  | 1   |       |
|      | R5007      | NRSA6AD-101W | MG RESISTOR  | 100Ω 1/16W D  | 1   |       |
|      | R5008      | NRSA6AD-360W | MG RESISTOR  | 36Ω 1/16W D   | 1   |       |
|      | R5009      | NRSA6AD-430W | MG RESISTOR  | 43Ω 1/16W D   | 1   |       |
|      | R5010      | NRSA6AD-161W | MG RESISTOR  | 160Ω 1/16W D  | 1   |       |
|      | R5011      | NRSA6AD-620W | MG RESISTOR  | 62Ω 1/16W D   | 1   |       |
|      | R5020      | NRSA6AJ-101W | MG RESISTOR  | 100Ω 1/16W J  | 1   |       |
|      | R5106      | NRSA6AD-822W | MG RESISTOR  | 8.2kΩ 1/16W D | 1   |       |
|      | R5107      | NRSA6AD-472W | MG RESISTOR  | 4.7kΩ 1/16W D | 1   |       |
|      | R5109      | NRSA6AJ-105W | MG RESISTOR  | 1MΩ 1/16W J   | 1   |       |
|      | R5201      | NRSA6AJ-473W | MG RESISTOR  | 47kΩ 1/16W J  | 1   |       |
|      | R5203      | NRSA6AJ-183W | MG RESISTOR  | 18kΩ 1/16W J  | 1   |       |
|      | R5204      | NRSA6AJ-183W | MG RESISTOR  | 18kΩ 1/16W J  | 1   |       |
|      | R5205      | NRSA6AJ-471W | MG RESISTOR  | 470Ω 1/16W J  | 1   |       |
|      | R5302      | NRSA6AJ-103W | MG RESISTOR  | 10kΩ 1/16W J  | 1   |       |
|      | R5303      | NRSA6AD-103W | MG RESISTOR  | 10kΩ 1/16W D  | 1   |       |
|      | R5304      | NRSA6AD-562W | MG RESISTOR  | 5.6kΩ 1/16W D | 1   |       |
|      | RA401      | NRB04CJ-680W | NET RESISTOR | 68Ω J         | 1   |       |
|      | RA402      | NRB04CJ-680W | NET RESISTOR | 68Ω J         | 1   |       |
|      | RA403      | NRB04CJ-680W | NET RESISTOR | 68Ω J         | 1   |       |
|      | RA404      | NRB04CJ-680W | NET RESISTOR | 68Ω J         | 1   |       |
|      | RA405      | NRB04CJ-680W | NET RESISTOR | 68Ω J         | 1   |       |
|      | RA406      | NRB04CJ-680W | NET RESISTOR | 68Ω J         | 1   |       |
|      | RA407      | NRB04CJ-680W | NET RESISTOR | 68Ω J         | 1   |       |
|      | RA408      | NRB04CJ-680W | NET RESISTOR | 68Ω J         | 1   |       |
|      | RA409      | NRB04CJ-680W | NET RESISTOR | 68Ω J         | 1   |       |
|      | RA415      | NRB04CJ-101W | NET RESISTOR | 100Ω J        | 1   |       |
|      | RA416      | NRB04CJ-101W | NET RESISTOR | 100Ω J        | 1   |       |
|      | RA417      | NRB04CJ-101W | NET RESISTOR | 100Ω J        | 1   |       |
|      | RA418      | NRB04CJ-101W | NET RESISTOR | 100Ω J        | 1   |       |
|      | RA419      | NRB04CJ-101W | NET RESISTOR | 100Ω J        | 1   |       |
|      | RA420      | NRB04CJ-330W | NET RESISTOR | 33Ω J         | 1   |       |
|      | L4001      | NQL79GM-470X | COIL         | 47uH M        | 1   |       |

| MODEL      | MARK | MODEL      | MARK | MODEL       | MARK | MODEL       | MARK |
|------------|------|------------|------|-------------|------|-------------|------|
| KW-NSX700A | A    | KW-NSX700E | B    | KW-NSX700EE | C    | KW-NSX700EU | D    |
| KW-NSX700J | E    | KW-NSX700U | F    | KW-NSX700UI | G    | KW-NSX700UP | H    |

| Safe                             | Symbol No. | Parts No.       | Parts Name      | Description    | QTY | Local |
|----------------------------------|------------|-----------------|-----------------|----------------|-----|-------|
|                                  | L4601      | NQLD8DJ-470X    | COIL            | 47uH J         | 1   |       |
|                                  | CN401      | QGF0534F6-30X   | CONNECTOR       | FFC/FPC (1-30) | 1   |       |
|                                  | CN501      | QGF0572F1-60X   | CONNECTOR       | FFC/FPC (1-60) | 1   |       |
|                                  | X4001      | NAX1038-001X    | CRYSTAL         |                | 1   |       |
| PANEL-B UNIT (LVA11178-01A) <03> |            |                 |                 |                |     |       |
| △                                | IC351      | CPI-210/BC/-X   | PHOTO COUPLER   |                | 1   |       |
|                                  | Q3501      | 2SC1623A/5-6/-X | TRANSISTOR      |                | 1   |       |
|                                  | Q6010      | 2SA1577/QR/-X   | TRANSISTOR      |                | 1   |       |
|                                  | Q6011      | LTC014YEB-X     | DIGI TRANSISTOR |                | 1   |       |
|                                  | Q6201      | LSCR523UB-X     | TRANSISTOR      |                | 1   |       |
|                                  | Q6202      | LSCR523UB-X     | TRANSISTOR      |                | 1   |       |
|                                  | Q6203      | LSCR523UB-X     | TRANSISTOR      |                | 1   |       |
|                                  | Q6204      | LSCR523UB-X     | TRANSISTOR      |                | 1   |       |
|                                  | Q6205      | LSCR523UB-X     | TRANSISTOR      |                | 1   |       |
|                                  | Q6206      | LSCR523UB-X     | TRANSISTOR      |                | 1   |       |
|                                  | Q6207      | LSCR523UB-X     | TRANSISTOR      |                | 1   |       |
|                                  | Q6208      | LSCR523UB-X     | TRANSISTOR      |                | 1   |       |
|                                  | Q6301      | LSCR523UB-X     | TRANSISTOR      |                | 1   |       |
|                                  | Q6302      | LSCR523UB-X     | TRANSISTOR      |                | 1   |       |
|                                  | Q6303      | LSCR523UB-X     | TRANSISTOR      |                | 1   |       |
|                                  | Q6304      | LSCR523UB-X     | TRANSISTOR      |                | 1   |       |
|                                  | Q6305      | LSCR523UB-X     | TRANSISTOR      |                | 1   |       |
|                                  | Q6306      | LSCR523UB-X     | TRANSISTOR      |                | 1   |       |
|                                  | D6010      | DA2J101-X       | SI DIODE        |                | 1   |       |
|                                  | D6101      | DZ2J062/M/-X    | Z DIODE         |                | 1   |       |
|                                  | D6102      | DZ2J062/M/-X    | Z DIODE         |                | 1   |       |
|                                  | D6103      | DZ2J062/M/-X    | Z DIODE         |                | 1   |       |
|                                  | D6104      | DZ2J062/M/-X    | Z DIODE         |                | 1   |       |
|                                  | C6015      | NCB20JK-106X    | C CAPACITOR     | 10uF 6.3V K    | 1   |       |
|                                  | C6101      | NDC31HJ-101X    | C CAPACITOR     | 100pF 50V J    | 1   |       |
|                                  | C6102      | NDC31HJ-101X    | C CAPACITOR     | 100pF 50V J    | 1   |       |
|                                  | C6103      | NDC31HJ-101X    | C CAPACITOR     | 100pF 50V J    | 1   |       |
|                                  | C6104      | NDC31HJ-101X    | C CAPACITOR     | 100pF 50V J    | 1   |       |
|                                  | R3501      | NRSA63J-751X    | MG RESISTOR     | 750Ω 1/16W J   | 1   |       |
|                                  | R3503      | NRSA6AJ-393W    | MG RESISTOR     | 39kΩ 1/16W J   | 1   |       |
|                                  | R3504      | NRSA6AJ-333W    | MG RESISTOR     | 33kΩ 1/16W J   | 1   |       |
|                                  | R3505      | NRSA6AJ-333W    | MG RESISTOR     | 33kΩ 1/16W J   | 1   |       |
|                                  | R3507      | NRSA6AJ-682W    | MG RESISTOR     | 6.8kΩ 1/16W J  | 1   |       |
|                                  | R3508      | NRSA6AJ-222W    | MG RESISTOR     | 2.2kΩ 1/16W J  | 1   |       |
|                                  | R3509      | NRSA6AJ-102W    | MG RESISTOR     | 1kΩ 1/16W J    | 1   |       |
|                                  | R3510      | NRSA6AJ-151W    | MG RESISTOR     | 150Ω 1/16W J   | 1   |       |
|                                  | R6010      | NRSA6AJ-473W    | MG RESISTOR     | 47kΩ 1/16W J   | 1   |       |
|                                  | R6011      | NRSA6AJ-153W    | MG RESISTOR     | 15kΩ 1/16W J   | 1   |       |
|                                  | R6012      | NRSA6AJ-153W    | MG RESISTOR     | 15kΩ 1/16W J   | 1   |       |
|                                  | R6013      | NRSA6AJ-0R0W    | MG RESISTOR     | 0Ω 1/16W J     | 1   |       |
|                                  | R6201      | NRSA6AD-221W    | MG RESISTOR     | 220Ω 1/16W D   | 1   |       |
|                                  | R6202      | NRSA6AD-181W    | MG RESISTOR     | 180Ω 1/16W D   | 1   |       |
|                                  | R6203      | NRSA6AD-221W    | MG RESISTOR     | 220Ω 1/16W D   | 1   |       |
|                                  | R6204      | NRSA6AD-181W    | MG RESISTOR     | 180Ω 1/16W D   | 1   |       |
|                                  | R6205      | NRSA6AD-221W    | MG RESISTOR     | 220Ω 1/16W D   | 1   |       |
|                                  | R6206      | NRSA6AD-181W    | MG RESISTOR     | 180Ω 1/16W D   | 1   |       |
|                                  | R6207      | NRSA6AD-221W    | MG RESISTOR     | 220Ω 1/16W D   | 1   |       |
|                                  | R6208      | NRSA6AD-181W    | MG RESISTOR     | 180Ω 1/16W D   | 1   |       |
|                                  | R6209      | NRSA6AJ-121W    | MG RESISTOR     | 120Ω 1/16W J   | 1   |       |
|                                  | R6301      | NRSA6AD-561W    | MG RESISTOR     | 560Ω 1/16W D   | 1   |       |
|                                  | R6303      | NRSA6AD-222W    | MG RESISTOR     | 2.2kΩ 1/16W D  | 1   |       |
|                                  | R6305      | NRSA6AD-621W    | MG RESISTOR     | 620Ω 1/16W D   | 1   |       |
|                                  | R6307      | NRSA6AJ-473W    | MG RESISTOR     | 47kΩ 1/16W J   | 1   |       |
|                                  | R6308      | NRSA6AJ-473W    | MG RESISTOR     | 47kΩ 1/16W J   | 1   |       |
|                                  | R6309      | NRSA6AJ-473W    | MG RESISTOR     | 47kΩ 1/16W J   | 1   |       |
|                                  | R6310      | NRSA6AJ-0R0W    | MG RESISTOR     | 0Ω 1/16W J     | 1   |       |
|                                  | R6311      | NRSA6AJ-0R0W    | MG RESISTOR     | 0Ω 1/16W J     | 1   |       |
|                                  | R6312      | NRSA6AJ-0R0W    | MG RESISTOR     | 0Ω 1/16W J     | 1   |       |
|                                  | R6321      | NRSA6AD-561W    | MG RESISTOR     | 560Ω 1/16W D   | 1   |       |
|                                  | R6323      | NRSA6AD-222W    | MG RESISTOR     | 2.2kΩ 1/16W D  | 1   |       |
|                                  | R6325      | NRSA6AD-621W    | MG RESISTOR     | 620Ω 1/16W D   | 1   |       |
|                                  | R6327      | NRSA6AJ-473W    | MG RESISTOR     | 47kΩ 1/16W J   | 1   |       |
|                                  | R6328      | NRSA6AJ-473W    | MG RESISTOR     | 47kΩ 1/16W J   | 1   |       |
|                                  | R6329      | NRSA6AJ-473W    | MG RESISTOR     | 47kΩ 1/16W J   | 1   |       |
|                                  | R6330      | NRSA6AJ-0R0W    | MG RESISTOR     | 0Ω 1/16W J     | 1   |       |
|                                  | R6331      | NRSA6AJ-0R0W    | MG RESISTOR     | 0Ω 1/16W J     | 1   |       |
|                                  | R6332      | NRSA6AJ-0R0W    | MG RESISTOR     | 0Ω 1/16W J     | 1   |       |
|                                  | RA601      | NRB04CJ-102W    | NET RESISTOR    | 1kΩ J          | 1   |       |
|                                  | RA602      | NRB04CJ-102W    | NET RESISTOR    | 1kΩ J          | 1   |       |
|                                  | RA603      | NRB04CJ-102W    | NET RESISTOR    | 1kΩ J          | 1   |       |
|                                  | RA604      | NRB04CJ-102W    | NET RESISTOR    | 1kΩ J          | 1   |       |
|                                  | L6001      | NQL79GM-470X    | COIL            | 47uH M         | 1   |       |
|                                  | CN351      | QGA1002C1-06X   | CONNECTOR       | W-B (1-6)      | 1   |       |
|                                  | CN352      | QGA1002F1-02X   | CONNECTOR       | W-B (1-2)      | 1   |       |
|                                  | CN601      | QGF0523F5-45W   | CONNECTOR       | FFC/FPC (1-45) | 1   |       |
|                                  | CN602      | QGF0534F6-30X   | CONNECTOR       | FFC/FPC (1-30) | 1   |       |
|                                  | CN603      | QGF1039F3-04X   | CONNECTOR       | FFC/FPC (1-4)  | 1   |       |
|                                  | CN604      | QGF0534F6-10X   | CONNECTOR       | FFC/FPC (1-10) | 1   |       |
|                                  | CN605      | QGF0545F2-13X   | CONNECTOR       | FFC/FPC (1-13) | 1   |       |
|                                  | S3501      | NSW0225-001X    | DETECT SWITCH   |                | 1   |       |
|                                  | S3502      | NSW0126-001X    | DETECT SWITCH   |                | 1   |       |
|                                  | VA601      | NAF0034-270X    | VARIATOR(ZNR)   | 27V            | 1   |       |
|                                  | VA608      | NAF0034-270X    | VARIATOR(ZNR)   | 27V            | 1   |       |
|                                  | VA609      | NAF0034-270X    | VARIATOR(ZNR)   | 27V            | 1   |       |

KEY UNIT (LVA11182-01A) <06>

| MODEL      | MARK | MODEL      | MARK | MODEL       | MARK | MODEL       | MARK |
|------------|------|------------|------|-------------|------|-------------|------|
| KW-NSX700A | A    | KW-NSX700E | B    | KW-NSX700EE | C    | KW-NSX700EU | D    |
| KW-NSX700J | E    | KW-NSX700U | F    | KW-NSX700UI | G    | KW-NSX700UP | H    |

| Safe                        | Symbol No. | Parts No.       | Parts Name      | Description    | QTY | Local |
|-----------------------------|------------|-----------------|-----------------|----------------|-----|-------|
|                             | D651       | SMLP36RGB2W/JX  | LED             |                | 1   |       |
|                             | D652       | SMLP36RGB2W/JX  | LED             |                | 1   |       |
|                             | D653       | SMLP36RGB2W/JX  | LED             |                | 1   |       |
|                             | D654       | SMLP36RGB2W/JX  | LED             |                | 1   |       |
|                             | D655       | SMLP36RGB2W/JX  | LED             |                | 1   |       |
|                             | D656       | SMLP36RGB2W/JX  | LED             |                | 1   |       |
|                             | D657       | SMLP36RGB2W/JX  | LED             |                | 1   |       |
|                             | D658       | SMLP36RGB2W/JX  | LED             |                | 1   |       |
|                             | D659       | SMLP36RGB2W/JX  | LED             |                | 1   |       |
|                             | C651       | NCB31CK-104X    | C CAPACITOR     | 0.1uF 16V      | 1   |       |
|                             | C652       | NCB31CK-104X    | C CAPACITOR     | 0.1uF 16V      | 1   |       |
|                             | C653       | NCB31CK-104X    | C CAPACITOR     | 0.1uF 16V      | 1   |       |
|                             | C654       | NCB31CK-104X    | C CAPACITOR     | 0.1uF 16V      | 1   |       |
|                             | R651       | NRSA63J-182X    | MG RESISTOR     | 1.8kΩ 1/16W J  | 1   |       |
|                             | R652       | NRSA63J-242X    | MG RESISTOR     | 2.4kΩ 1/16W J  | 1   |       |
|                             | R653       | NRSA63J-302X    | MG RESISTOR     | 3kΩ 1/16W J    | 1   |       |
|                             | R654       | NRSA63J-182X    | MG RESISTOR     | 1.8kΩ 1/16W J  | 1   |       |
|                             | R655       | NRSA63J-242X    | MG RESISTOR     | 2.4kΩ 1/16W J  | 1   |       |
|                             | R656       | NRSA63J-302X    | MG RESISTOR     | 3kΩ 1/16W J    | 1   |       |
|                             | CN651      | QGF0545F2-13X   | CONNECTOR       | FFC/FPC (1-13) | 1   |       |
|                             | S651       | NSW0335-001X    | TACT SWITCH     |                | 1   |       |
|                             | S652       | NSW0335-001X    | TACT SWITCH     |                | 1   |       |
|                             | S653       | NSW0335-001X    | TACT SWITCH     |                | 1   |       |
|                             | S654       | NSW0335-001X    | TACT SWITCH     |                | 1   |       |
|                             | S655       | NSW0335-001X    | TACT SWITCH     |                | 1   |       |
|                             | S656       | NSW0335-001X    | TACT SWITCH     |                | 1   |       |
|                             | S657       | NSW0335-001X    | TACT SWITCH     |                | 1   |       |
|                             | S658       | NSW0335-001X    | TACT SWITCH     |                | 1   |       |
|                             | S659       | NSW0331-001X    | TACT SWITCH     |                | 1   |       |
| BT UNIT (LVA11181-01A) <05> |            |                 |                 |                |     |       |
|                             | IC301      | TCC8600         | IC              |                | 1   |       |
|                             | IC302      | JVM603D         | PROGRAMED IC    |                | 1   |       |
|                             | IC303      | A3V28S40FTP-G6  | IC              |                | 1   |       |
|                             | IC331      | AK4387ET-X      | IC              |                | 1   |       |
|                             | IC332      | NJM4565E-X      | IC              |                | 1   |       |
|                             | IC341      | NJM4565E-X      | IC              |                | 1   |       |
|                             | IC371      | XC6213B182NG-X  | IC              |                | 1   |       |
|                             | Q3001      | DSA7504/QR/-X   | TRANSISTOR      |                | 1   |       |
|                             | Q3002      | LTC014EEB-X     | DIGI TRANSISTOR |                | 1   |       |
|                             | Q3311      | 2SC1623A/5-6/-X | TRANSISTOR      |                | 1   |       |
|                             | D3003      | DA2J101-X       | SI DIODE        |                | 1   |       |
|                             | D3311      | DZ2J062/M/-X    | Z DIODE         |                | 1   |       |
|                             | D3312      | DA2J101-X       | SI DIODE        |                | 1   |       |
|                             | C303       | NDCA1HJ-151W    | C CAPACITOR     | 150pF 50V J    | 1   |       |
|                             | C311       | NCB20JK-106X    | C CAPACITOR     | 10uF 6.3V K    | 1   |       |
|                             | C331       | NCB20JK-106X    | C CAPACITOR     | 10uF 6.3V K    | 1   |       |
|                             | C333       | NCBA1AK-104W    | C CAPACITOR     | 0.1uF 10V K    | 1   |       |
|                             | C335       | NCBA1AK-104W    | C CAPACITOR     | 0.1uF 10V K    | 1   |       |
|                             | C337       | NCBA1AK-104W    | C CAPACITOR     | 0.1uF 10V K    | 1   |       |
|                             | C339       | NCB20JK-106X    | C CAPACITOR     | 10uF 6.3V K    | 1   |       |
|                             | C341       | NCBA1AK-104W    | C CAPACITOR     | 0.1uF 10V K    | 1   |       |
|                             | C343       | NCBA1AK-104W    | C CAPACITOR     | 0.1uF 10V K    | 1   |       |
|                             | C371       | NCB31CK-474X    | C CAPACITOR     | 0.47uF 16V K   | 1   |       |
|                             | C372       | NCB21AK-225X    | C CAPACITOR     | 2.2uF 10V K    | 1   |       |
|                             | C3001      | NCB20JK-106X    | C CAPACITOR     | 10uF 6.3V K    | 1   |       |
|                             | C3010      | NCBA1CK-103W    | C CAPACITOR     | 0.01uF 16V K   | 1   |       |
|                             | C3100      | NCBA1CK-103W    | C CAPACITOR     | 0.01uF 16V K   | 1   |       |
|                             | C3102      | NCBA1HK-821W    | C CAPACITOR     | 820pF 50V K    | 1   |       |
|                             | C3103      | NDCA1HJ-151W    | C CAPACITOR     | 150pF 50V J    | 1   |       |
|                             | C3104      | NCB31CK-105X    | C CAPACITOR     | 1uF 16V K      | 1   |       |
|                             | C3142      | NCB31CK-105X    | C CAPACITOR     | 1uF 16V K      | 1   |       |
|                             | C3143      | NCBA1HK-471W    | C CAPACITOR     | 470pF 50V K    | 1   |       |
|                             | C3145      | NCBA1CK-333W    | C CAPACITOR     | 0.033uF 16V K  | 1   |       |
|                             | C3146      | NCBA1CK-333W    | C CAPACITOR     | 0.033uF 16V K  | 1   |       |
|                             | C3147      | NCBA1AK-104W    | C CAPACITOR     | 0.1uF 10V K    | 1   |       |
|                             | C3151      | NCB31CK-105X    | C CAPACITOR     | 1uF 16V K      | 1   |       |
|                             | C3152      | NCB31CK-105X    | C CAPACITOR     | 1uF 16V K      | 1   |       |
|                             | C3202      | NCBA1HK-821W    | C CAPACITOR     | 820pF 50V K    | 1   |       |
|                             | C3203      | NDCA1HJ-151W    | C CAPACITOR     | 150pF 50V J    | 1   |       |
|                             | C3204      | NCB31CK-105X    | C CAPACITOR     | 1uF 16V K      | 1   |       |
|                             | C3241      | NCBA1HK-102W    | C CAPACITOR     | 1000pF 50V K   | 1   |       |
|                             | C3242      | NCB31CK-105X    | C CAPACITOR     | 1uF 16V K      | 1   |       |
|                             | C3243      | NCBA1HK-471W    | C CAPACITOR     | 470pF 50V K    | 1   |       |
|                             | C3301      | NEAF1CM-107X    | E CAPACITOR     | 100uF 16V M    | 1   |       |
|                             | C3302      | NCBA1AK-104W    | C CAPACITOR     | 0.1uF 10V K    | 1   |       |
|                             | C3303      | NEAF1CM-476X    | E CAPACITOR     | 47uF 16V M     | 1   |       |
|                             | C3304      | NCBA1CK-123W    | C CAPACITOR     | 0.012uF 16V K  | 1   |       |
|                             | C3311      | NEAF1CM-107X    | E CAPACITOR     | 100uF 16V M    | 1   |       |
|                             | C3322      | NCBA1CK-104W    | C CAPACITOR     | 0.1uF 16V K    | 1   |       |
|                             | C3323      | NEAF1CM-476X    | E CAPACITOR     | 47uF 16V M     | 1   |       |
|                             | C3324      | NCBA1HK-821W    | C CAPACITOR     | 820pF 50V K    | 1   |       |
|                             | C3325      | NDCA1HJ-151W    | C CAPACITOR     | 150pF 50V J    | 1   |       |
|                             | C3326      | NCB31CK-105X    | C CAPACITOR     | 1uF 16V K      | 1   |       |
|                             | C3407      | NCBA1AK-104W    | C CAPACITOR     | 0.1uF 10V K    | 1   |       |
|                             | C3409      | NCBA1AK-104W    | C CAPACITOR     | 0.1uF 10V K    | 1   |       |
|                             | C3410      | NCBA1AK-104W    | C CAPACITOR     | 0.1uF 10V K    | 1   |       |
|                             | C3419      | NCBA1AK-104W    | C CAPACITOR     | 0.1uF 10V K    | 1   |       |
|                             | C3424      | NCBA1AK-104W    | C CAPACITOR     | 0.1uF 10V K    | 1   |       |
|                             | C3426      | NCBA1AK-104W    | C CAPACITOR     | 0.1uF 10V K    | 1   |       |
|                             | C3440      | NCBA1AK-104W    | C CAPACITOR     | 0.1uF 10V K    | 1   |       |
|                             | C3443      | NCBA1AK-104W    | C CAPACITOR     | 0.1uF 10V K    | 1   |       |

| MODEL      | MARK | MODEL      | MARK | MODEL       | MARK | MODEL       | MARK |
|------------|------|------------|------|-------------|------|-------------|------|
| KW-NSX700A | A    | KW-NSX700E | B    | KW-NSX700EE | C    | KW-NSX700EU | D    |
| KW-NSX700J | E    | KW-NSX700U | F    | KW-NSX700UI | G    | KW-NSX700UP | H    |

| Safe                                                        | Symbol No. | Parts No.      | Parts Name    | Description    | QTY | Local |
|-------------------------------------------------------------|------------|----------------|---------------|----------------|-----|-------|
|                                                             | C3454      | NDCA1HJ-270W   | C CAPACITOR   | 27pF 50V J     | 1   |       |
|                                                             | C3455      | NDCA1HJ-330W   | C CAPACITOR   | 33pF 50V J     | 1   |       |
|                                                             | C3458      | NCBA1AK-104W   | C CAPACITOR   | 0.1uF 10V K    | 1   |       |
|                                                             | C3465      | NCBA1AK-104W   | C CAPACITOR   | 0.1uF 10V K    | 1   |       |
|                                                             | C3468      | NCBA1CK-103W   | C CAPACITOR   | 0.01uF 16V K   | 1   |       |
|                                                             | C3469      | NCBA1AK-104W   | C CAPACITOR   | 0.1uF 10V K    | 1   |       |
|                                                             | C3472      | NCBA1HK-122W   | C CAPACITOR   | 1200pF 50V K   | 1   |       |
|                                                             | C3473      | NCJA0JK-105W-A | C CAPACITOR   | 1uF 6.3V K     | 1   |       |
|                                                             | C3475      | NDCA1HJ-331W   | C CAPACITOR   | 330pF 50V J    | 1   |       |
|                                                             | C3477      | NCB31CK-154X   | C CAPACITOR   | 0.15uF 16V K   | 1   |       |
|                                                             | C3484      | NCBA1AK-104W   | C CAPACITOR   | 0.1uF 10V K    | 1   |       |
|                                                             | C3491      | NCBA1AK-104W   | C CAPACITOR   | 0.1uF 10V K    | 1   |       |
|                                                             | C3524      | NCBA1AK-104W   | C CAPACITOR   | 0.1uF 10V K    | 1   |       |
|                                                             | C3575      | NDCA1HJ-220W   | C CAPACITOR   | 22pF 50V J     | 1   |       |
|                                                             | R322       | NRSA6AJ-472W   | MG RESISTOR   | 4.7kΩ 1/16W J  | 1   |       |
|                                                             | R323       | NRSA6AJ-473W   | MG RESISTOR   | 47kΩ 1/16W J   | 1   |       |
|                                                             | R324       | NRSA6AJ-472W   | MG RESISTOR   | 4.7kΩ 1/16W J  | 1   |       |
|                                                             | R325       | NRSA6AJ-472W   | MG RESISTOR   | 4.7kΩ 1/16W J  | 1   |       |
|                                                             | R3001      | NRSA6AJ-472W   | MG RESISTOR   | 4.7kΩ 1/16W J  | 1   |       |
|                                                             | R3002      | NRSA6AJ-471W   | MG RESISTOR   | 470Ω 1/16W J   | 1   |       |
|                                                             | R3003      | NRSA6AJ-103W   | MG RESISTOR   | 10kΩ 1/16W J   | 1   |       |
|                                                             | R3004      | NRSA6AJ-153W   | MG RESISTOR   | 15kΩ 1/16W J   | 1   |       |
|                                                             | R3005      | NRSA6AJ-153W   | MG RESISTOR   | 15kΩ 1/16W J   | 1   |       |
|                                                             | R3008      | NRSA6AJ-102W   | MG RESISTOR   | 1kΩ 1/16W J    | 1   |       |
|                                                             | R3010      | NRSA6AJ-100W   | MG RESISTOR   | 10Ω 1/16W J    | 1   |       |
|                                                             | R3101      | NRSA6AJ-223W   | MG RESISTOR   | 22kΩ 1/16W J   | 1   |       |
|                                                             | R3102      | NRSA6AJ-243W   | MG RESISTOR   | 24kΩ 1/16W J   | 1   |       |
|                                                             | R3103      | NRSA6AJ-153W   | MG RESISTOR   | 15kΩ 1/16W J   | 1   |       |
|                                                             | R3142      | NRSA6AJ-122W   | MG RESISTOR   | 1.2kΩ 1/16W J  | 1   |       |
|                                                             | R3143      | NRSA6AJ-124W   | MG RESISTOR   | 120kΩ 1/16W J  | 1   |       |
|                                                             | R3144      | NRSA6AJ-822W   | MG RESISTOR   | 8.2kΩ 1/16W J  | 1   |       |
|                                                             | R3145      | NRSA6AJ-333W   | MG RESISTOR   | 33kΩ 1/16W J   | 1   |       |
|                                                             | R3146      | NRSA6AJ-103W   | MG RESISTOR   | 10kΩ 1/16W J   | 1   |       |
|                                                             | R3151      | NRSA6AJ-103W   | MG RESISTOR   | 10kΩ 1/16W J   | 1   |       |
|                                                             | R3152      | NRSA6AJ-103W   | MG RESISTOR   | 10kΩ 1/16W J   | 1   |       |
|                                                             | R3201      | NRSA6AJ-223W   | MG RESISTOR   | 22kΩ 1/16W J   | 1   |       |
|                                                             | R3202      | NRSA6AJ-243W   | MG RESISTOR   | 24kΩ 1/16W J   | 1   |       |
|                                                             | R3203      | NRSA6AJ-153W   | MG RESISTOR   | 15kΩ 1/16W J   | 1   |       |
|                                                             | R3241      | NRSA6AJ-272W   | MG RESISTOR   | 2.7kΩ 1/16W J  | 1   |       |
|                                                             | R3242      | NRSA6AJ-122W   | MG RESISTOR   | 1.2kΩ 1/16W J  | 1   |       |
|                                                             | R3243      | NRSA6AJ-124W   | MG RESISTOR   | 120kΩ 1/16W J  | 1   |       |
|                                                             | R3311      | NRSA6AJ-122W   | MG RESISTOR   | 1.2kΩ 1/16W J  | 1   |       |
|                                                             | R3312      | NRSA6AJ-680W   | MG RESISTOR   | 68Ω 1/16W J    | 1   |       |
|                                                             | R3313      | NRSA6AJ-680W   | MG RESISTOR   | 68Ω 1/16W J    | 1   |       |
|                                                             | R3321      | NRSA6AJ-103W   | MG RESISTOR   | 10kΩ 1/16W J   | 1   |       |
|                                                             | R3322      | NRSA6AJ-103W   | MG RESISTOR   | 10kΩ 1/16W J   | 1   |       |
|                                                             | R3323      | NRSA6AJ-223W   | MG RESISTOR   | 22kΩ 1/16W J   | 1   |       |
|                                                             | R3324      | NRSA6AJ-243W   | MG RESISTOR   | 24kΩ 1/16W J   | 1   |       |
|                                                             | R3325      | NRSA6AJ-153W   | MG RESISTOR   | 15kΩ 1/16W J   | 1   |       |
|                                                             | R3326      | NRSA6AJ-473W   | MG RESISTOR   | 47kΩ 1/16W J   | 1   |       |
|                                                             | R3404      | NRSA6AJ-102W   | MG RESISTOR   | 1kΩ 1/16W J    | 1   |       |
|                                                             | R3415      | NRSA6AJ-103W   | MG RESISTOR   | 10kΩ 1/16W J   | 1   |       |
|                                                             | R3444      | NRSA6AJ-470W   | MG RESISTOR   | 47Ω 1/16W J    | 1   |       |
|                                                             | R3446      | NRSA6AJ-470W   | MG RESISTOR   | 47Ω 1/16W J    | 1   |       |
|                                                             | R3447      | NRSA6AJ-470W   | MG RESISTOR   | 47Ω 1/16W J    | 1   |       |
|                                                             | R3454      | NRSA6AJ-151W   | MG RESISTOR   | 150Ω 1/16W J   | 1   |       |
|                                                             | R3455      | NRSA6AJ-105W   | MG RESISTOR   | 1MΩ 1/16W J    | 1   |       |
|                                                             | R3457      | NRSA6AJ-102W   | MG RESISTOR   | 1kΩ 1/16W J    | 1   |       |
|                                                             | R3463      | NRSA6AJ-101W   | MG RESISTOR   | 100Ω 1/16W J   | 1   |       |
|                                                             | R3466      | NRSA6AJ-223W   | MG RESISTOR   | 22kΩ 1/16W J   | 1   |       |
|                                                             | R3468      | NRSA6AJ-223W   | MG RESISTOR   | 22kΩ 1/16W J   | 1   |       |
|                                                             | R3469      | NRSA6AJ-223W   | MG RESISTOR   | 22kΩ 1/16W J   | 1   |       |
|                                                             | R3478      | NRSA6AJ-472W   | MG RESISTOR   | 4.7kΩ 1/16W J  | 1   |       |
|                                                             | R3479      | NRSA6AJ-153W   | MG RESISTOR   | 15kΩ 1/16W J   | 1   |       |
|                                                             | R3480      | NRSA6AJ-153W   | MG RESISTOR   | 15kΩ 1/16W J   | 1   |       |
|                                                             | R3482      | NRSA6AJ-330W   | MG RESISTOR   | 33Ω 1/16W J    | 1   |       |
|                                                             | R3483      | NRSA6AJ-330W   | MG RESISTOR   | 33Ω 1/16W J    | 1   |       |
|                                                             | R3577      | NRSA6AJ-472W   | MG RESISTOR   | 4.7kΩ 1/16W J  | 1   |       |
|                                                             | R3586      | NRSA6AJ-472W   | MG RESISTOR   | 4.7kΩ 1/16W J  | 1   |       |
|                                                             | R3587      | NRSA6AJ-472W   | MG RESISTOR   | 4.7kΩ 1/16W J  | 1   |       |
|                                                             | R3589      | NRSA6AJ-472W   | MG RESISTOR   | 4.7kΩ 1/16W J  | 1   |       |
|                                                             | RA301      | NRB04CJ-680W   | NET RESISTOR  | 68Ω J          | 1   |       |
|                                                             | RA302      | NRB04CJ-680W   | NET RESISTOR  | 68Ω J          | 1   |       |
|                                                             | RA303      | NRB04CJ-680W   | NET RESISTOR  | 68Ω J          | 1   |       |
|                                                             | RA304      | NRB04CJ-680W   | NET RESISTOR  | 68Ω J          | 1   |       |
|                                                             | RA305      | NRB04CJ-470W   | NET RESISTOR  | 47Ω J          | 1   |       |
|                                                             | RA306      | NRB04CJ-472W   | NET RESISTOR  | 4.7kΩ J        | 1   |       |
|                                                             | RA307      | NRB04CJ-101W   | NET RESISTOR  | 100Ω J         | 1   |       |
|                                                             | L3001      | NQR0654-001X   | EMI FILTER    |                | 1   |       |
|                                                             | L3301      | NQL79GM-470X   | COIL          | 47uH M         | 1   |       |
|                                                             | L3462      | NQL093K-1R8X   | P COIL        | 1.8uH K        | 1   |       |
|                                                             | L3473      | NQL79GM-330X   | COIL          | 33uH M         | 1   |       |
|                                                             | B301       | NRSA6AJ-0R0W   | MG RESISTOR   | 0Ω 1/16W J     | 1   |       |
|                                                             | CN301      | QNZ1037-001    | USB CONNECTOR |                | 1   |       |
|                                                             | CN311      | QGF0534F6-12X  | CONNECTOR     | FFC/FPC (1-12) | 1   |       |
|                                                             | CN341      | QGA2001F6-02X  | CONNECTOR     | W-B (1-2)      | 1   |       |
|                                                             | X3402      | NAX1168-001X   | CRYSTAL       |                | 1   |       |
| CD PLAYER UNIT (FMU-XS2-51D: LVA11111-08A) IN CD MECHA <07> |            |                |               |                |     |       |
|                                                             | IC101      | RT3CLLM/EF/-X  | TRANSISTOR    |                | 1   |       |
|                                                             | IC102      | RT3K11M-X      | MOS FET ARRAY |                | 1   |       |
|                                                             | IC201      | BD8215EFV-X    | IC            |                | 1   |       |

| MODEL      | MARK | MODEL      | MARK | MODEL       | MARK | MODEL       | MARK |
|------------|------|------------|------|-------------|------|-------------|------|
| KW-NSX700A | A    | KW-NSX700E | B    | KW-NSX700EE | C    | KW-NSX700EU | D    |
| KW-NSX700J | E    | KW-NSX700U | F    | KW-NSX700UI | G    | KW-NSX700UP | H    |

| Safe | Symbol No. | Parts No.      | Parts Name       | Description   | QTY | Local |
|------|------------|----------------|------------------|---------------|-----|-------|
|      | IC301      | MN2DS0040MA    | IC               |               | 1   |       |
|      | IC381      | JVM606C        | PROGRAMED IC     |               | 1   |       |
|      | IC391      | A3V28S40FTP-G6 | IC               |               | 1   |       |
|      | IC401      | AK4387ET-X     | IC               |               | 1   |       |
|      | IC501      | BR24T32FVT-W-X | IC               |               | 1   |       |
|      | IC551      | MFI337S3959-X  | IC               |               | 1   |       |
|      | IC901      | MM3233CF-X     | IC               |               | 1   |       |
|      | IC921      | BD12KA5FP-X    | IC               |               | 1   |       |
|      | Q4         | DSC2001/R/-X   | TRANSISTOR       |               | 1   |       |
|      | Q11        | DSC2001/R/-X   | TRANSISTOR       |               | 1   |       |
|      | Q12        | LTC044EEB-X    | DIGI TRANSISTOR  |               | 1   |       |
|      | Q101       | 2SB1424/R/-W   | TRANSISTOR       |               | 1   |       |
|      | Q102       | 2SB1424/R/-W   | TRANSISTOR       |               | 1   |       |
|      | Q103       | 2SC4617/QR/-X  | TRANSISTOR       |               | 1   |       |
|      | Q271       | LTC014EEB-X    | DIGI TRANSISTOR  |               | 1   |       |
|      | Q302       | LTC044EEB-X    | DIGI TRANSISTOR  |               | 1   |       |
|      | Q341       | LTC044EEB-X    | DIGI TRANSISTOR  |               | 1   |       |
|      | D6         | AN1102W-6-X    | IR LED           |               | 1   |       |
|      | D7         | AN1102W-6-X    | IR LED           |               | 1   |       |
|      | D9         | PS1192HB-22-X  | PHOTO TRANSISTOR |               | 1   |       |
|      | D11        | PS1192HB-22-X  | PHOTO TRANSISTOR |               | 1   |       |
|      | C101       | NCJ20JM-226X-A | C CAPACITOR      | 22uF 6.3V M   | 1   |       |
|      | C102       | NCJ10JM-476X-A | C CAPACITOR      | 47uF 6.3V M   | 1   |       |
|      | C103       | NCJ10JM-476X-A | C CAPACITOR      | 47uF 6.3V M   | 1   |       |
|      | C106       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C107       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C108       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C109       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C110       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C111       | NCB31CK-105X   | C CAPACITOR      | 1uF 16V K     | 1   |       |
|      | C112       | NCB31CK-105X   | C CAPACITOR      | 1uF 16V K     | 1   |       |
|      | C113       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C121       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C122       | NCBA1CK-333W   | C CAPACITOR      | 0.033uF 16V K | 1   |       |
|      | C123       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C124       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C131       | NCBA1HK-272W   | C CAPACITOR      | 2700pF 50V K  | 1   |       |
|      | C133       | NCB31CK-684X   | C CAPACITOR      | 0.68uF 16V K  | 1   |       |
|      | C134       | NCB31CK-684X   | C CAPACITOR      | 0.68uF 16V K  | 1   |       |
|      | C135       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C136       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C137       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C138       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C151       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C201       | NCJ41CK-476X-A | C CAPACITOR      | 47uF 16V K    | 1   |       |
|      | C203       | NCJ41CK-476X-A | C CAPACITOR      | 47uF 16V K    | 1   |       |
|      | C207       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C208       | NCBA1HK-222W   | C CAPACITOR      | 2200pF 50V K  | 1   |       |
|      | C209       | NCBA1HK-102W   | C CAPACITOR      | 1000pF 50V K  | 1   |       |
|      | C210       | NCBA1HK-102W   | C CAPACITOR      | 1000pF 50V K  | 1   |       |
|      | C211       | NCBA1HK-102W   | C CAPACITOR      | 1000pF 50V K  | 1   |       |
|      | C212       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C213       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C214       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C215       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C218       | NCBA1HK-102W   | C CAPACITOR      | 1000pF 50V K  | 1   |       |
|      | C219       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C220       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C221       | NCB31CK-105X   | C CAPACITOR      | 1uF 16V K     | 1   |       |
|      | C241       | NCBA1EK-223W   | C CAPACITOR      | 0.022uF 25V K | 1   |       |
|      | C242       | NCBA1EK-223W   | C CAPACITOR      | 0.022uF 25V K | 1   |       |
|      | C251       | NCBA1HK-221W   | C CAPACITOR      | 220pF 50V K   | 1   |       |
|      | C261       | NDCA1HJ-181W   | C CAPACITOR      | 180pF 50V J   | 1   |       |
|      | C301       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C302       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C303       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C304       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C305       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C306       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C307       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C308       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C309       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C310       | NCBA1EK-103W   | C CAPACITOR      | 0.01uF 25V K  | 1   |       |
|      | C311       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C314       | NCBA1HK-122W   | C CAPACITOR      | 1200pF 50V K  | 1   |       |
|      | C315       | NCBA1HK-122W   | C CAPACITOR      | 1200pF 50V K  | 1   |       |
|      | C316       | NCB31CK-105X   | C CAPACITOR      | 1uF 16V K     | 1   |       |
|      | C317       | NCB31CK-105X   | C CAPACITOR      | 1uF 16V K     | 1   |       |
|      | C318       | NCB31CK-105X   | C CAPACITOR      | 1uF 16V K     | 1   |       |
|      | C319       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C320       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C322       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C324       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C325       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C326       | NCBA1EK-103W   | C CAPACITOR      | 0.01uF 25V K  | 1   |       |
|      | C327       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C329       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C330       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C331       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C332       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C333       | NCBA1CK-104W   | C CAPACITOR      | 0.1uF 16V K   | 1   |       |
|      | C351       | NDCA1HJ-120W   | C CAPACITOR      | 12pF 50V J    | 1   |       |

| MODEL      | MARK | MODEL      | MARK | MODEL       | MARK | MODEL       | MARK |
|------------|------|------------|------|-------------|------|-------------|------|
| KW-NSX700A | A    | KW-NSX700E | B    | KW-NSX700EE | C    | KW-NSX700EU | D    |
| KW-NSX700J | E    | KW-NSX700U | F    | KW-NSX700UI | G    | KW-NSX700UP | H    |

| Safe | Symbol No. | Parts No.      | Parts Name  | Description   | QTY | Local |
|------|------------|----------------|-------------|---------------|-----|-------|
|      | C352       | NDCA1HJ-120W   | C CAPACITOR | 12pF 50V J    | 1   |       |
|      | C381       | NCB10JK-226X-R | C CAPACITOR | 22uF 6.3V K   | 1   |       |
|      | C382       | NCBA1CK-104W   | C CAPACITOR | 0.1uF 16V K   | 1   |       |
|      | C391       | NCJ20JM-226X-A | C CAPACITOR | 22uF 6.3V M   | 1   |       |
|      | C392       | NCBA1CK-104W   | C CAPACITOR | 0.1uF 16V K   | 1   |       |
|      | C394       | NCBA1CK-104W   | C CAPACITOR | 0.1uF 16V K   | 1   |       |
|      | C395       | NCBA1CK-104W   | C CAPACITOR | 0.1uF 16V K   | 1   |       |
|      | C396       | NCBA1CK-104W   | C CAPACITOR | 0.1uF 16V K   | 1   |       |
|      | C397       | NCBA1CK-104W   | C CAPACITOR | 0.1uF 16V K   | 1   |       |
|      | C398       | NCBA1CK-104W   | C CAPACITOR | 0.1uF 16V K   | 1   |       |
|      | C399       | NCBA1CK-104W   | C CAPACITOR | 0.1uF 16V K   | 1   |       |
|      | C401       | NCJ11AK-476X-A | C CAPACITOR | 47uF 10V K    | 1   |       |
|      | C402       | NCBA1CK-104W   | C CAPACITOR | 0.1uF 16V K   | 1   |       |
|      | C403       | NCBA1CK-104W   | C CAPACITOR | 0.1uF 16V K   | 1   |       |
|      | C404       | NCB10JK-226X-R | C CAPACITOR | 22uF 6.3V K   | 1   |       |
|      | C405       | NCBA1CK-104W   | C CAPACITOR | 0.1uF 16V K   | 1   |       |
|      | C406       | NCBA1HK-331W   | C CAPACITOR | 330pF 50V K   | 1   |       |
|      | C411       | NCBA1CK-473W   | C CAPACITOR | 0.047uF 16V K | 1   |       |
|      | C412       | NDCA1HJ-101W   | C CAPACITOR | 100pF 50V J   | 1   |       |
|      | C501       | NCBA1CK-104W   | C CAPACITOR | 0.1uF 16V K   | 1   |       |
|      | C511       | NCBA1CK-104W   | C CAPACITOR | 0.1uF 16V K   | 1   |       |
|      | C701       | NCBA1CK-104W   | C CAPACITOR | 0.1uF 16V K   | 1   |       |
|      | C702       | NCBA1CK-104W   | C CAPACITOR | 0.1uF 16V K   | 1   |       |
|      | C703       | NCBA1CK-104W   | C CAPACITOR | 0.1uF 16V K   | 1   |       |
|      | C704       | NCBA1CK-104W   | C CAPACITOR | 0.1uF 16V K   | 1   |       |
|      | C705       | NCBA1CK-104W   | C CAPACITOR | 0.1uF 16V K   | 1   |       |
|      | C901       | NCB31CK-105X   | C CAPACITOR | 1uF 16V K     | 1   |       |
|      | C902       | NCB31CK-105X   | C CAPACITOR | 1uF 16V K     | 1   |       |
|      | C911       | NCJ10JM-476X-A | C CAPACITOR | 47uF 6.3V M   | 1   |       |
|      | C912       | NCBA1CK-104W   | C CAPACITOR | 0.1uF 16V K   | 1   |       |
|      | C913       | NCJ20JM-226X-A | C CAPACITOR | 22uF 6.3V M   | 1   |       |
|      | C914       | NCBA1CK-104W   | C CAPACITOR | 0.1uF 16V K   | 1   |       |
|      | C921       | NCB31CK-105X   | C CAPACITOR | 1uF 16V K     | 1   |       |
|      | C923       | NCB31CK-105X   | C CAPACITOR | 1uF 16V K     | 1   |       |
|      | R11        | NRSA63J-391X   | MG RESISTOR | 390Ω 1/16W J  | 1   |       |
|      | R12        | NRSA6AJ-184W   | MG RESISTOR | 180kΩ 1/16W J | 1   |       |
|      | R13        | NRSA6AJ-103W   | MG RESISTOR | 10kΩ 1/16W J  | 1   |       |
|      | R15        | NRSA6AJ-822W   | MG RESISTOR | 8.2kΩ 1/16W J | 1   |       |
|      | R17        | NRSA6AJ-473W   | MG RESISTOR | 47kΩ 1/16W J  | 1   |       |
|      | R21        | NRSA63J-391X   | MG RESISTOR | 390Ω 1/16W J  | 1   |       |
|      | R101       | NRSA6AJ-471W   | MG RESISTOR | 470Ω 1/16W J  | 1   |       |
|      | R102       | NRSA6AJ-471W   | MG RESISTOR | 470Ω 1/16W J  | 1   |       |
|      | R103       | NRSA6AJ-102W   | MG RESISTOR | 1kΩ 1/16W J   | 1   |       |
|      | R104       | NRSA63J-2R2X   | MG RESISTOR | 2.2Ω 1/16W J  | 1   |       |
|      | R105       | NRZ0122-270X   | MG RESISTOR | 27Ω           | 1   |       |
|      | R107       | NRSA6AJ-471W   | MG RESISTOR | 470Ω 1/16W J  | 1   |       |
|      | R111       | NRSA6AJ-471W   | MG RESISTOR | 470Ω 1/16W J  | 1   |       |
|      | R112       | NRSA6AJ-471W   | MG RESISTOR | 470Ω 1/16W J  | 1   |       |
|      | R113       | NRSA6AJ-102W   | MG RESISTOR | 1kΩ 1/16W J   | 1   |       |
|      | R114       | NRSA63J-2R2X   | MG RESISTOR | 2.2Ω 1/16W J  | 1   |       |
|      | R115       | NRZ0122-390X   | MG RESISTOR | 39Ω           | 1   |       |
|      | R117       | NRSA6AJ-471W   | MG RESISTOR | 470Ω 1/16W J  | 1   |       |
|      | R121       | NRSA6AJ-910W   | MG RESISTOR | 91Ω 1/16W J   | 1   |       |
|      | R122       | NRSA6AJ-910W   | MG RESISTOR | 91Ω 1/16W J   | 1   |       |
|      | R123       | NRSA6AJ-104W   | MG RESISTOR | 100kΩ 1/16W J | 1   |       |
|      | R124       | NRSA6AJ-103W   | MG RESISTOR | 10kΩ 1/16W J  | 1   |       |
|      | R125       | NRSA6AJ-103W   | MG RESISTOR | 10kΩ 1/16W J  | 1   |       |
|      | R126       | NRSA63J-150X   | MG RESISTOR | 15Ω 1/16W J   | 1   |       |
|      | R131       | NRSA63D-122X   | MG RESISTOR | 1.2kΩ 1/16W D | 1   |       |
|      | R132       | NRSA63D-122X   | MG RESISTOR | 1.2kΩ 1/16W D | 1   |       |
|      | R139       | NRSA63J-0R0X   | MG RESISTOR | 0Ω 1/10W J    | 1   |       |
|      | R142       | NRSA6AJ-471W   | MG RESISTOR | 470Ω 1/16W J  | 1   |       |
|      | R151       | NRSA6AJ-472W   | MG RESISTOR | 4.7kΩ 1/16W J | 1   |       |
|      | R165       | NRSA6AJ-473W   | MG RESISTOR | 47kΩ 1/16W J  | 1   |       |
|      | R201       | NRZ0098-R22X   | MG RESISTOR | 0.22Ω         | 1   |       |
|      | R202       | NRZ0098-R22X   | MG RESISTOR | 0.22Ω         | 1   |       |
|      | R203       | NRSA63J-101X   | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R204       | NRZ0098-R47X   | MG RESISTOR | 0.47Ω         | 1   |       |
|      | R205       | NRZ0098-R47X   | MG RESISTOR | 0.47Ω         | 1   |       |
|      | R206       | NRSA63D-473X   | MG RESISTOR | 47kΩ 1/16W D  | 1   |       |
|      | R212       | NRSA63D-104X   | MG RESISTOR | 100kΩ 1/16W D | 1   |       |
|      | R213       | NRSA6AJ-101W   | MG RESISTOR | 100Ω 1/16W J  | 1   |       |
|      | R221       | NRSA6AJ-102W   | MG RESISTOR | 1kΩ 1/16W J   | 1   |       |
|      | R222       | NRSA6AJ-102W   | MG RESISTOR | 1kΩ 1/16W J   | 1   |       |
|      | R232       | NRSA6AJ-473W   | MG RESISTOR | 47kΩ 1/16W J  | 1   |       |
|      | R233       | NRSA6AJ-104W   | MG RESISTOR | 100kΩ 1/16W J | 1   |       |
|      | R234       | NRSA6AJ-104W   | MG RESISTOR | 100kΩ 1/16W J | 1   |       |
|      | R241       | NRSA63J-223X   | MG RESISTOR | 22kΩ 1/16W J  | 1   |       |
|      | R242       | NRSA63J-103X   | MG RESISTOR | 10kΩ 1/16W J  | 1   |       |
|      | R243       | NRSA63J-223X   | MG RESISTOR | 22kΩ 1/16W J  | 1   |       |
|      | R244       | NRSA63J-103X   | MG RESISTOR | 10kΩ 1/16W J  | 1   |       |
|      | R251       | NRSA63J-393X   | MG RESISTOR | 39kΩ 1/16W J  | 1   |       |
|      | R252       | NRSA63J-203X   | MG RESISTOR | 20kΩ 1/16W J  | 1   |       |
|      | R261       | NRSA63J-333X   | MG RESISTOR | 33kΩ 1/16W J  | 1   |       |
|      | R262       | NRSA63D-753X   | MG RESISTOR | 75kΩ 1/16W D  | 1   |       |
|      | R271       | NRSA6AJ-623W   | MG RESISTOR | 62kΩ 1/16W J  | 1   |       |
|      | R272       | NRSA6AJ-152W   | MG RESISTOR | 1.5kΩ 1/16W J | 1   |       |
|      | R273       | NRSA6AJ-622W   | MG RESISTOR | 6.2kΩ 1/16W J | 1   |       |
|      | R274       | NRSA6AJ-391W   | MG RESISTOR | 390Ω 1/16W J  | 1   |       |
|      | R302       | NRSA6AJ-101W   | MG RESISTOR | 100Ω 1/16W J  | 1   |       |

| MODEL      | MARK | MODEL      | MARK | MODEL       | MARK | MODEL       | MARK |
|------------|------|------------|------|-------------|------|-------------|------|
| KW-NSX700A | A    | KW-NSX700E | B    | KW-NSX700EE | C    | KW-NSX700EU | D    |
| KW-NSX700J | E    | KW-NSX700U | F    | KW-NSX700UI | G    | KW-NSX700UP | H    |

| Safe | Symbol No. | Parts No.     | Parts Name    | Description    | QTY | Local |
|------|------------|---------------|---------------|----------------|-----|-------|
|      | R303       | NRSA6AJ-101W  | MG RESISTOR   | 100Ω 1/16W J   | 1   |       |
|      | R304       | NRSA6AJ-101W  | MG RESISTOR   | 100Ω 1/16W J   | 1   |       |
|      | R306       | NRSA6AJ-331W  | MG RESISTOR   | 330Ω 1/16W J   | 1   |       |
|      | R307       | NRSA6AJ-331W  | MG RESISTOR   | 330Ω 1/16W J   | 1   |       |
|      | R308       | NRSA63J-152X  | MG RESISTOR   | 1.5kΩ 1/16W J  | 1   |       |
|      | R309       | NRSA63J-152X  | MG RESISTOR   | 1.5kΩ 1/16W J  | 1   |       |
|      | R310       | NRSA6AJ-103W  | MG RESISTOR   | 10kΩ 1/16W J   | 1   |       |
|      | R311       | NRSA6AJ-223W  | MG RESISTOR   | 22kΩ 1/16W J   | 1   |       |
|      | R313       | NRSA63J-181X  | MG RESISTOR   | 180Ω 1/16W J   | 1   |       |
|      | R314       | NRSA63D-222X  | MG RESISTOR   | 2.2kΩ 1/16W D  | 1   |       |
|      | R315       | NRSA63D-222X  | MG RESISTOR   | 2.2kΩ 1/16W D  | 1   |       |
|      | R319       | NRSA63D-243X  | MG RESISTOR   | 24kΩ 1/16W D   | 1   |       |
|      | R323       | NRSA6AJ-104W  | MG RESISTOR   | 100kΩ 1/16W J  | 1   |       |
|      | R327       | NRSA6AJ-270W  | MG RESISTOR   | 27Ω 1/16W J    | 1   |       |
|      | R328       | NRSA6AJ-102W  | MG RESISTOR   | 1kΩ 1/16W J    | 1   |       |
|      | R329       | NRSA6AJ-102W  | MG RESISTOR   | 1kΩ 1/16W J    | 1   |       |
|      | R330       | NRSA6AJ-103W  | MG RESISTOR   | 10kΩ 1/16W J   | 1   |       |
|      | R341       | NRSA63J-103X  | MG RESISTOR   | 10kΩ 1/16W J   | 1   |       |
|      | R351       | NRSA63J-105X  | MG RESISTOR   | 1MΩ 1/16W J    | 1   |       |
|      | R352       | NRSA6AJ-102W  | MG RESISTOR   | 1kΩ 1/16W J    | 1   |       |
|      | R365       | NRSA6AJ-103W  | MG RESISTOR   | 10kΩ 1/16W J   | 1   |       |
|      | R376       | NRSA6AJ-822W  | MG RESISTOR   | 8.2kΩ 1/16W J  | 1   |       |
|      | R386       | NRSA6AJ-184W  | MG RESISTOR   | 180kΩ 1/16W J  | 1   |       |
|      | R400       | NRSA6AJ-153W  | MG RESISTOR   | 15kΩ 1/16W J   | 1   |       |
|      | R401       | NRSA63J-100X  | MG RESISTOR   | 10Ω 1/16W J    | 1   |       |
|      | R402       | NRSA6AJ-100W  | MG RESISTOR   | 10Ω 1/16W J    | 1   |       |
|      | R403       | NRSA6AJ-103W  | MG RESISTOR   | 10kΩ 1/16W J   | 1   |       |
|      | R501       | NRSA6AJ-103W  | MG RESISTOR   | 10kΩ 1/16W J   | 1   |       |
|      | R511       | NRSA6AJ-103W  | MG RESISTOR   | 10kΩ 1/16W J   | 1   |       |
|      | R512       | NRSA6AJ-103W  | MG RESISTOR   | 10kΩ 1/16W J   | 1   |       |
|      | R515       | NRSA6AJ-103W  | MG RESISTOR   | 10kΩ 1/16W J   | 1   |       |
|      | R601       | NRS181F-330X  | MG RESISTOR   | 33Ω 1/8W F     | 1   |       |
|      | R602       | NRS181F-330X  | MG RESISTOR   | 33Ω 1/8W F     | 1   |       |
|      | R611       | NRSA6AJ-153W  | MG RESISTOR   | 15kΩ 1/16W J   | 1   |       |
|      | R612       | NRSA6AJ-153W  | MG RESISTOR   | 15kΩ 1/16W J   | 1   |       |
|      | R702       | NRSA6AJ-102W  | MG RESISTOR   | 1kΩ 1/16W J    | 1   |       |
|      | R911       | NRZ0098-R18X  | MG RESISTOR   | 0.18Ω          | 1   |       |
|      | B341       | NRSA63J-0R0X  | MG RESISTOR   | 0Ω 1/10W J     | 1   |       |
|      | B411       | NRSA63J-0R0X  | MG RESISTOR   | 0Ω 1/10W J     | 1   |       |
|      | CN101      | QGF0522F2-30W | CONNECTOR     | FFC/FPC (1-30) | 1   |       |
|      | CN201      | QGF0523F3-20W | CONNECTOR     | FFC/FPC (1-20) | 1   |       |
|      | CN401      | QGF0534F6-50X | CONNECTOR     | FFC/FPC (1-50) | 1   |       |
|      | K101       | NQR0007-002X  | FERRITE BEADS |                | 1   |       |
|      | K102       | NQR0007-002X  | FERRITE BEADS |                | 1   |       |
|      | K301       | NQR0129-002X  | FERRITE BEADS |                | 1   |       |
|      | K311       | NQR0129-002X  | FERRITE BEADS |                | 1   |       |
|      | K312       | NQR0129-002X  | FERRITE BEADS |                | 1   |       |
|      | K313       | NQR0129-002X  | FERRITE BEADS |                | 1   |       |
|      | K314       | NQR0129-002X  | FERRITE BEADS |                | 1   |       |
|      | K381       | NRSA63J-0R0X  | MG RESISTOR   | 0Ω 1/10W J     | 1   |       |
|      | K391       | NQR0502-001X  | FERRITE BEADS |                | 1   |       |
|      | K703       | NQR0022-005X  | FERRITE BEADS |                | 1   |       |
|      | K707       | NQR0022-005X  | FERRITE BEADS |                | 1   |       |
|      | K708       | NQR0022-005X  | FERRITE BEADS |                | 1   |       |
|      | K709       | NQR0022-005X  | FERRITE BEADS |                | 1   |       |
|      | K711       | NQR0022-005X  | FERRITE BEADS |                | 1   |       |
|      | K712       | NQR0022-005X  | FERRITE BEADS |                | 1   |       |
|      | K714       | NQR0022-005X  | FERRITE BEADS |                | 1   |       |
|      | K911       | NQR0502-001X  | FERRITE BEADS |                | 1   |       |
|      | S1         | NSW0313-001X  | DETECT SWITCH |                | 1   |       |
|      | X351       | NAX1135-001X  | CRYSTAL       |                | 1   |       |