



EXPLODED VIEW

- B : N09-2292-05
- D : N30-2606-48
- E : N30-3016-43
- F : N32-3006-43
- G : N32-4008-43
- H : N67-3008-48
- J : N80-2006-43
- K : N80-2608-43
- L : N87-2608-48

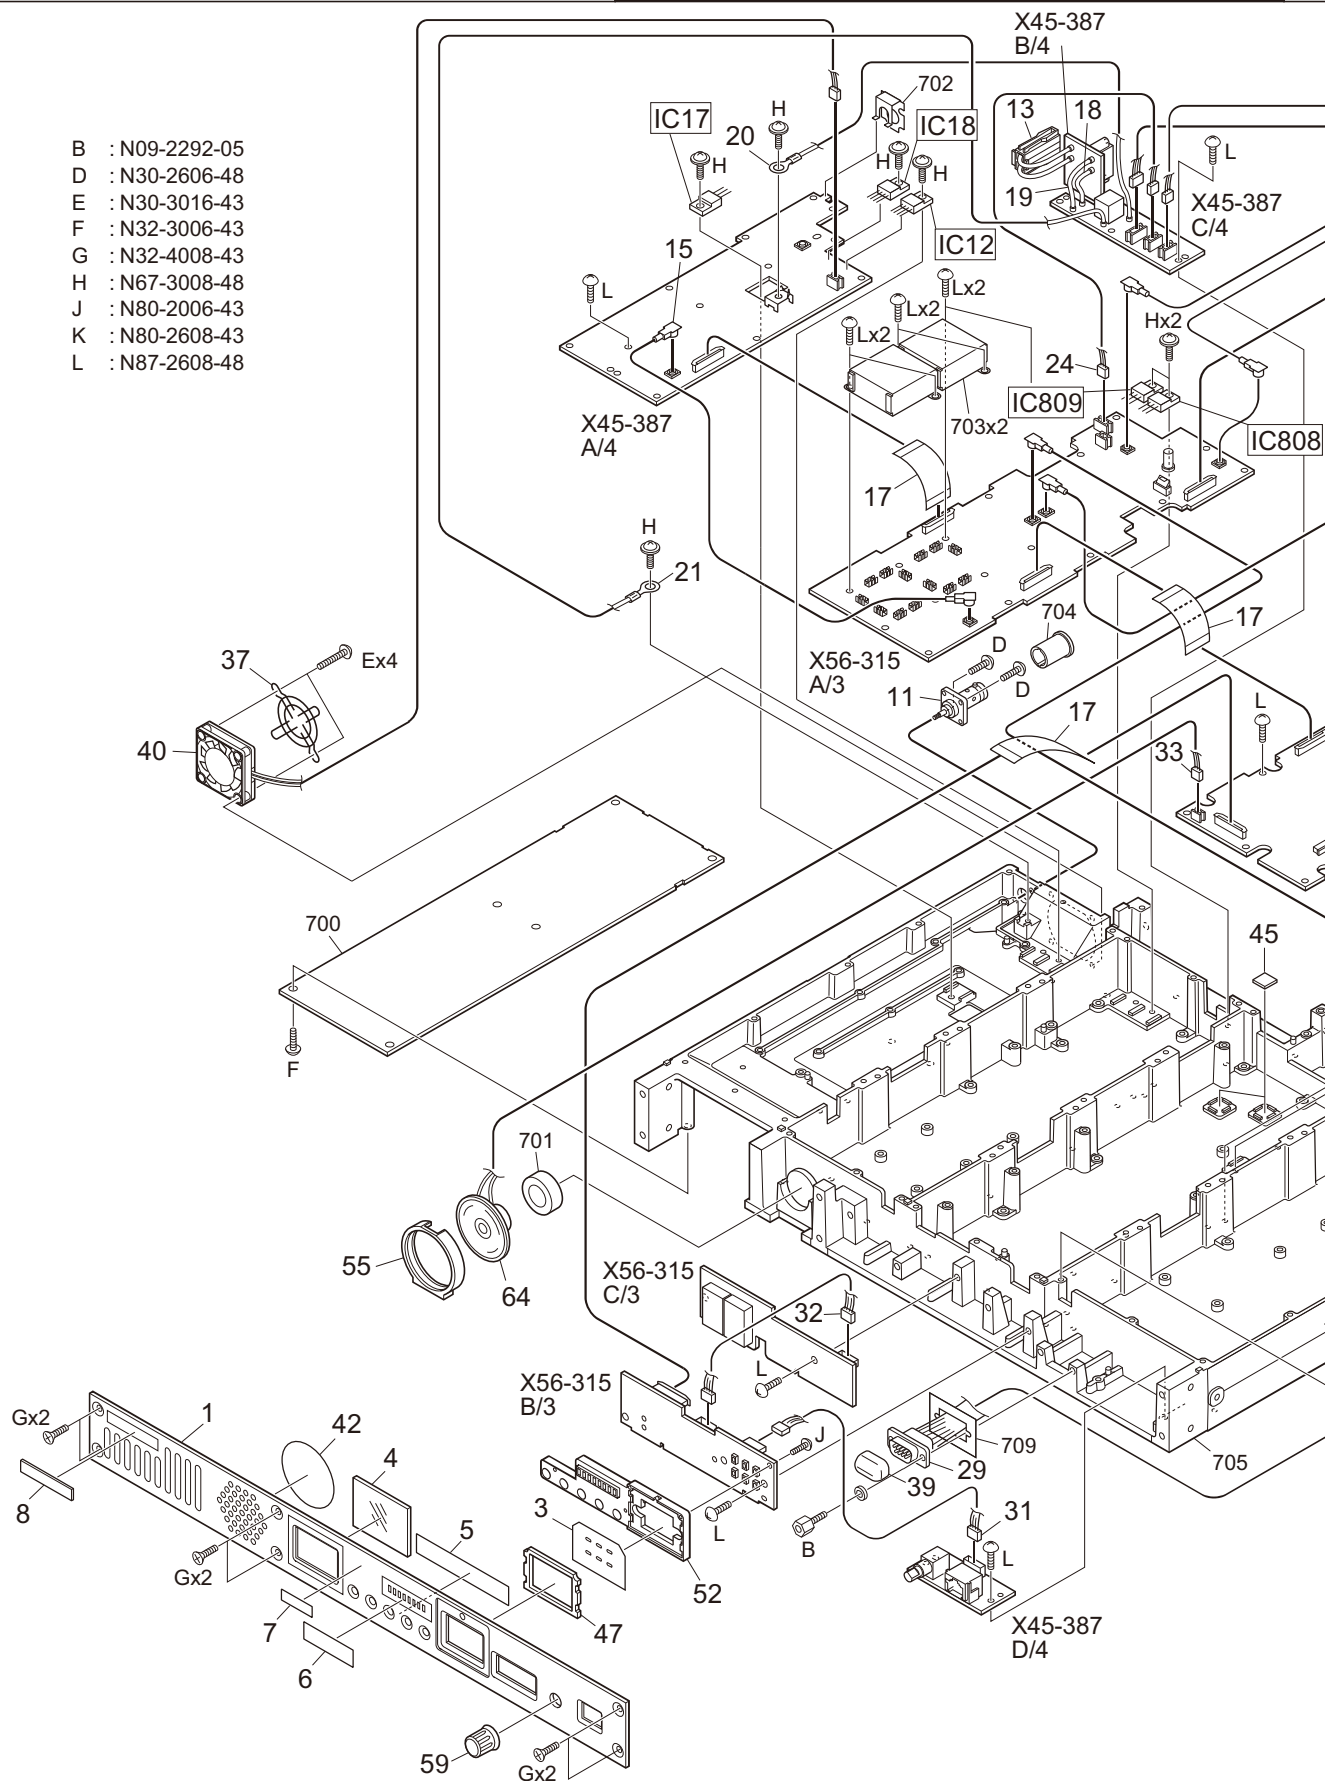


EXPLODED VIEW

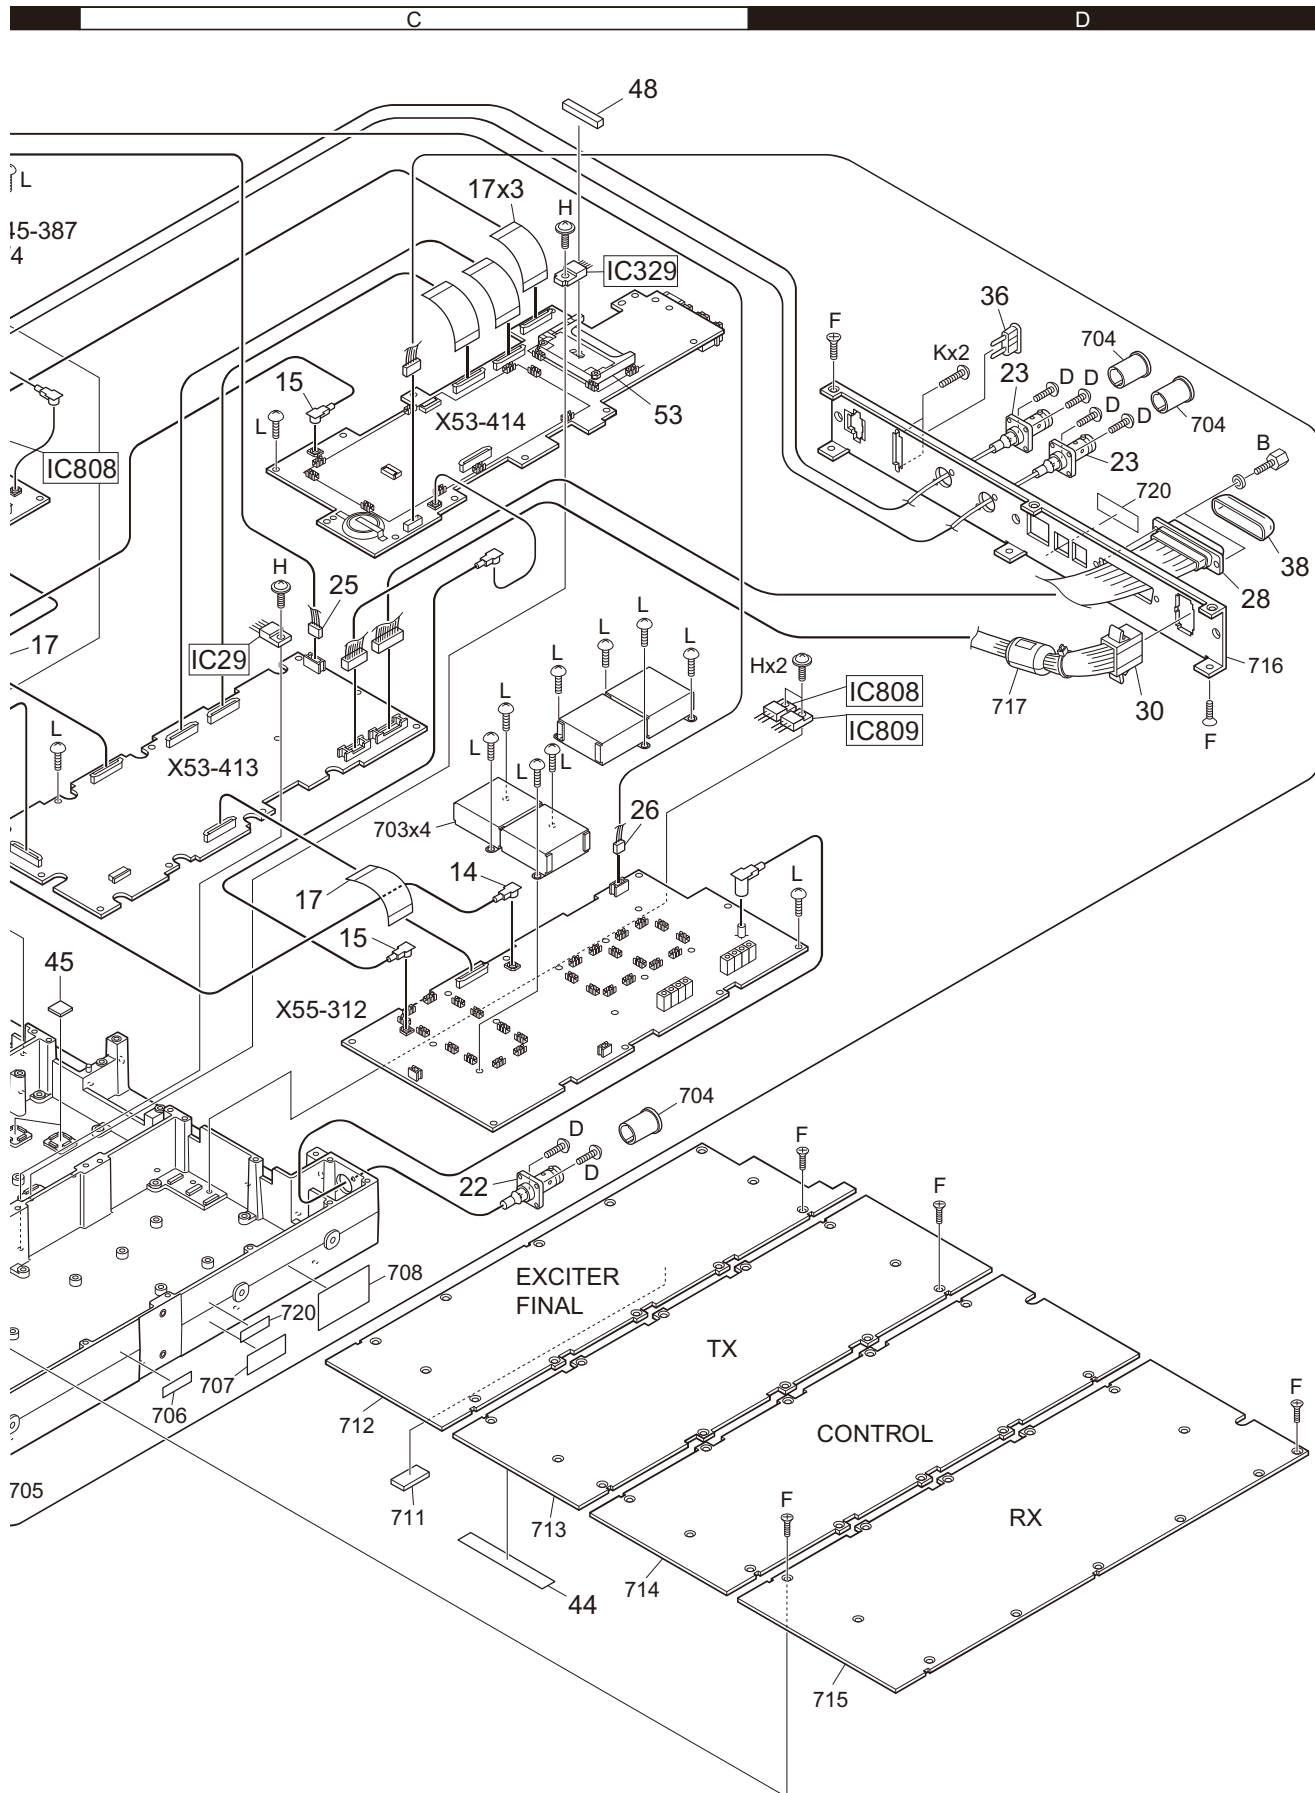

Parts with the exploded numbers larger than 700 are not supplied.
 If a part reference number is listed in a box on the exploded view of the PCB, that part does not come with the PCB.
 These parts must be ordered separately.

PACKING

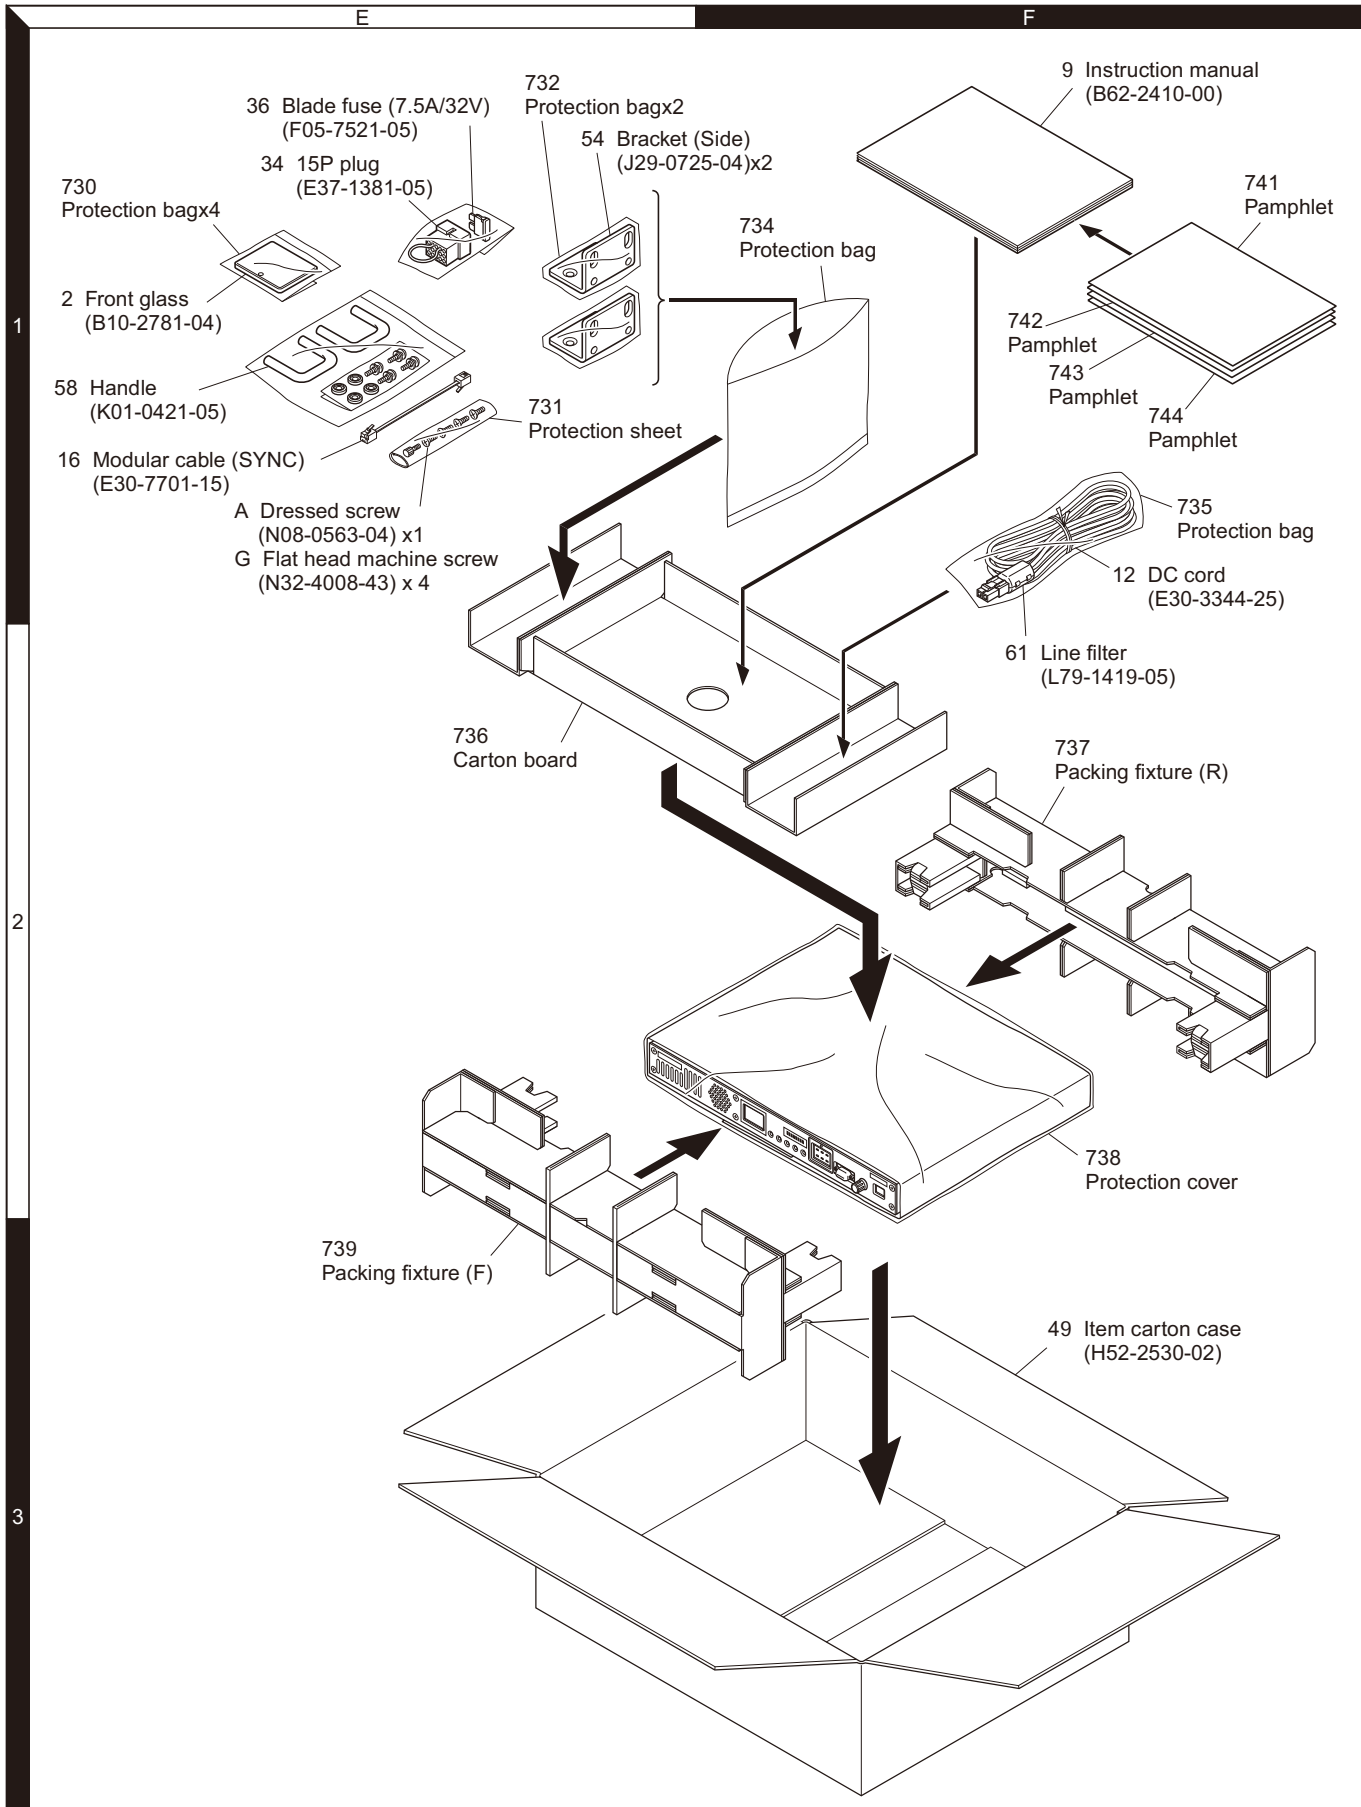

PARTS LIST

* New Parts. △ indicates safety critical components.

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

L : Scandinavia

Y : PX (Far East, Hawaii)

C : China

K : USA

T : England

X : Australia

P : Canada

E : Europe

M : Other Areas

NXR-901

FINAL UNIT (X45-3870-11)

Ref. No.	Address	New parts	Parts No.	Description	Destination
NXR-901					
1	3A		A62-1142-02	MAIN PANEL	
2	1E		B10-2781-04	FRONT GLASS ACCESSORY	
3	3A		B11-1841-04	FILTER(PF)	
4	3A		B11-1842-04	FILTER(17SEG)	
5	3A		B11-1843-04	FILTER(LED)	
6	3A		B11-1844-04	FILTER(STATUS)	
7	3A		B42-7296-04	STICKER(NEXEDGE)	
8	3A		B43-1188-04	BADGE	
9	1F	*	B62-2410-00	INSTRUCTION MANUAL	
11	2B		E04-0463-05	RF COAXIAL RECEPTACLE(BNC)	
12	1F		E30-3344-25	DC CORD ACCESSORY	
13	1B		E30-7581-05	DC CORD	
14	2C		E30-7582-05	TRUNK CABLE	
15	1B,1C,2C		E30-7583-05	TRUNK CABLE	
16	1E		E30-7701-15	MODULAR CABLE(SYNC)	
17	1B,1C		E37-1295-05	FLAT CABLE(36P)	
18	1B		E37-1299-05	LEAD WIRE WITH TERMINAL(FUSE-DC+)	
19	1B		E37-1300-05	LEAD WIRE WITH TERMINAL(FUSE-DC-)	
20	1B		E37-1301-05	LEAD WIRE WITH TERMINAL(DC-PA+)	
21	1B		E37-1302-05	LEAD WIRE WITH TERMINAL(DC-PA-)	
22	2C		E37-1303-05	LEAD WIRE WITH CONNECTOR(BNC-RX)	
23	1D		E37-1304-05	LEAD WIRE WITH CONNECTOR(BNC-REF)	
24	1B		E37-1305-05	LEAD WIRE WITH CONNECTOR(DC-TX)	
25	1C		E37-1306-05	LEAD WIRE WITH CONNECTOR(DC-CONT)	
26	2C		E37-1307-05	LEAD WIRE WITH CONNECTOR(DC-RX)	
28	1D		E37-1310-05	LEAD WIRE WITH CONNECTOR(DSUB-25P)	
29	3B		E37-1311-05	LEAD WIRE WITH CONNECTOR(DSUB-9P)	
30	2D		E37-1313-05	LEAD WIRE WITH CONNECTOR(ACC15)	
31	3B		E37-1314-05	LEAD WIRE WITH CONNECTOR(DISP-MIC)	
32	3B		E37-1315-05	LEAD WIRE WITH CONNECTOR(DISP-17SEG)	
33	2B		E37-1316-05	LEAD WIRE WITH CONNECTOR(SP)	
34	1E		E37-1381-05	15P PLUG ACCESSORY	
36	1D,1E		F05-7521-05	BLADE FUSE(7.5A/32V) ACCESSORY	
37	2A		F07-1930-05	COVER(FAN)	
38	1D		F09-0445-05	CAP(25P)	
39	3B		F09-0484-05	CAP(9P)	
40	2A		F09-0488-15	FANMOTOR	
42	3A		G10-1343-04	FIBROUS SHEET(FRONT PANEL)	
44	3C		G10-1396-04	FIBROUS SHEET(SHIELDING COVER)	
45	2B		G11-4408-04	RUBBER SHEET(CONT-TR)	
47	3A		G13-2163-04	CUSHION(PF)	
48	1C	*	G13-2382-04	CONDUCTIVE CUSHION(COMPACT FLASH)	
49	3F	*	H52-2530-02	ITEM CARTON CASE	
52	3B	*	J19-5496-12	HOLDER(DISP)	
53	1C	*	J19-5546-05	HOLDER(COMPACT FLASH)	
54	1E		J29-0725-04	BRACKET(SIDE)	
55	3A		J39-0655-03	SPACER(SP)	
-			J61-0307-05	BAND(DC CORD)	
58	1E		K01-0421-05	HANDLE ACCESSORY	
59	3A		K29-4539-04	KNOB(VOLUME)	
61	1F		L79-1419-05	LINE FILTER(DC)	

Ref. No.	Address	New parts	Parts No.	Description	Destination
A	1E		N08-0563-04	DRESSED SCREW(FRONT GLASS)	
B	3B,1D		N09-2292-05	HEXAGON HEAD SCREW(DSUB)	
D	2C,1D		N30-2606-48	PAN HEAD MACHINE SCREW(BNC)	
E	2A		N30-3016-43	PAN HEAD MACHINE SCREW(FAN)	
F	2D,3D		N32-3006-43	FLAT HEAD MACHINE SCREW(TOP/REAR)	
G	3A,1E		N32-4008-43	FLAT HEAD MACHINE SCREW(PANEL)	
H	1B,1C		N67-3008-48	PAN HEAD SEMS SCREW(AVR)	
J	3B		N80-2006-43	PAN HEAD TAPTITE SCREW(DISP)	
K	1D		N80-2608-43	PAN HEAD TAPTITE SCREW(FUSE)	
L	1B,2C		N87-2608-48	BRAZIER HEAD TAPTITE SCREW(PCB)	
64	3A		T07-0347-15	SPEAKER	
-			X53-4132-72	SERVICE CONTROL UNIT	
-			X53-4140-11	SERVICE CONTROL UNIT	
-			490-0174-05	ADHESIVE TAPE	
FINAL UNIT (X45-3870-11)					
C1 ,2			CD04BQ1H101M	ELECTRO 100UF 50WV	
C7 ,8			CE32BM1V220M	CHIP EL 22UF 35WV	
C10 ,11			CC73GCH1H470J	CHIP C 47PF J	
C15 -17			CK73GB1H103K	CHIP C 0.010UF K	
C21			CC73GCH1H470J	CHIP C 47PF J	
C22			CE32BM1V220M	CHIP EL 22UF 35WV	
C25 -27			CK73GB1H103K	CHIP C 0.010UF K	
C28 -30			CC73GCH1H470J	CHIP C 47PF J	
C32			CE32BM1V220M	CHIP EL 22UF 35WV	
C33			CE32AU1E100M	CHIP EL 10UF 25WV	
C36			CC73GCH1H470J	CHIP C 47PF J	
C37			CK73GB1H103K	CHIP C 0.010UF K	
C38			CE32AU1E100M	CHIP EL 10UF 25WV	
C39			CC73GCH1H470J	CHIP C 47PF J	
C40			CK73GB1H103K	CHIP C 0.010UF K	
C41 ,42			CC73GCH1H470J	CHIP C 47PF J	
C45 ,46			CC73GCH1H470J	CHIP C 47PF J	
C49			CK73GB1H103K	CHIP C 0.010UF K	
C54			CC73GCH1H470J	CHIP C 47PF J	
C58			CC73GCH1H470J	CHIP C 47PF J	
C59			CK73GB1H103K	CHIP C 0.010UF K	
C61			CC73GCH1H470J	CHIP C 47PF J	
C63 ,64			CC73GCH1H470J	CHIP C 47PF J	
C67			CC73GCH1H470J	CHIP C 47PF J	
C70			CK73GB1H103K	CHIP C 0.010UF K	
C71 -75			CC73GCH1H470J	CHIP C 47PF J	
C77 ,78			CC73GCH1H470J	CHIP C 47PF J	
C80			CK73GB1H103K	CHIP C 0.010UF K	
C83			CC73GCH1H470J	CHIP C 47PF J	
C86			CK73GB1H103K	CHIP C 0.010UF K	
C87			CC73GCH1H040B	CHIP C 4.0PF B	
C89 -91			CC73GCH1H470J	CHIP C 47PF J	
C96			CC73GCH1H470J	CHIP C 47PF J	
C102			CC73GCH1H470J	CHIP C 47PF J	
C104,105			CC73GCH1H470J	CHIP C 47PF J	

PARTS LIST

FINAL UNIT (X45-3870-11)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
C122,123		*	C93-0983-05	CHIP C 6.0PF D		CN905			E41-1483-05	PIN ASSY(11P)	
C130			C93-0980-05	CHIP C 5.0PF B		J901			E58-0526-05	MODULAR JACK(MIC)	
C132			C93-0980-05	CHIP C 5.0PF B		F1			F53-0324-15	FUSE(2.5A)	
C134			CC73GCH1H470J	CHIP C 47PF J		CN4			J13-0071-05	FUSE HOLDER	
C137			C93-0878-05	CHIP C 2.0PF B		L1			L92-0179-05	CHIP FERRITE	
C138			CE32CL1V100M	CHIP EL 10UF 35WV		L3			L79-0558-05	FILTER	
C148			C93-0878-05	CHIP C 2.0PF B		L12			L34-4605-15	AIR-CORE COIL	
C150			CK73GB1H104K	CHIP C 0.10UF K		L17			L34-4521-05	AIR-CORE COIL	
C167			CK73GB1H104K	CHIP C 0.10UF K		L18 -20			L34-4604-15	AIR-CORE COIL	
C169,170			CC73GCH1H470J	CHIP C 47PF J		L21 ,22			L41-1085-14	SMALL FIXED INDUCTOR(100NH)	
C187,188			C92-0905-05	OS-CON 47UF 35WV		L30			L34-4645-15	AIR-CORE COIL	
C191			CC73GCH1H470J	CHIP C 47PF J		L31		*	L39-1593-05	ISOLATOR	
C192			CC73GCH1H120G	CHIP C 12PF G		L900			L92-0447-05	BEADS CORE	
C193			CC73GCH1H0R5B	CHIP C 0.5PF B		R2			RK73GB2A000J	CHIP R 0 J 1/10W	
C194,195			CC73GCH1H470J	CHIP C 47PF J		R9			RK73GB2A101J	CHIP R 100 J 1/10W	
C197			CC73GCH1H221J	CHIP C 220PF J		R11			RK73EB2E4R7J	CHIP R 4.7 J 1/4W	
C198			CK73GB1H103K	CHIP C 0.010UF K		R12			RK73GB2A562J	CHIP R 5.6K J 1/10W	
C199			CC73GCH1H470J	CHIP C 47PF J		R13			RK73GB2A103J	CHIP R 10K J 1/10W	
C200			CK73GB1H103K	CHIP C 0.010UF K		R17			RK73GB2A103J	CHIP R 10K J 1/10W	
C202			CC73GCH1H470J	CHIP C 47PF J		R18			RK73GB2A473J	CHIP R 47K J 1/10W	
C203			CC73GCH1H221J	CHIP C 220PF J		R20			RK73GB2A223J	CHIP R 22K J 1/10W	
C204			CK73GB1H333K	CHIP C 0.033UF K		R21			RK73GB2A103J	CHIP R 10K J 1/10W	
C205-211			CC73GCH1H470J	CHIP C 47PF J		R25			RK73GB2A104J	CHIP R 100K J 1/10W	
C302,303			C93-0871-05	CHIP C 1.0PF B		R27 ,28			RK73GB2A824J	CHIP R 820K J 1/10W	
C304-306			CC73GCH1H470J	CHIP C 47PF J		R29 ,30			RK73GB2A103J	CHIP R 10K J 1/10W	
C307			C93-0980-05	CHIP C 5.0PF B		R31 ,32			RK73GB2A104J	CHIP R 100K J 1/10W	
C308			CK73GB1H102K	CHIP C 1000PF K		R34			RK73GB2A101J	CHIP R 100 J 1/10W	
C309			CK73GB1H103K	CHIP C 0.010UF K		R35 ,36			RK73GB2A224J	CHIP R 220K J 1/10W	
C310-312			CC73GCH1H470J	CHIP C 47PF J		R38			RK73GB2A101J	CHIP R 100 J 1/10W	
C313			CK73GB1H103K	CHIP C 0.010UF K		R42			RK73GB2A680J	CHIP R 68 J 1/10W	
C320			CC73GCH1H470J	CHIP C 47PF J		R44			RK73GB2A271J	CHIP R 270 J 1/10W	
C321			CK73GB1H103K	CHIP C 0.010UF K		R45			RK73GB2A000J	CHIP R 0 J 1/10W	
C325			CC73GCH1H470J	CHIP C 47PF J		R46			RK73GB2A223J	CHIP R 22K J 1/10W	
C326			CK73GB1H103K	CHIP C 0.010UF K		R47			RK73GB2A331J	CHIP R 330 J 1/10W	
C327			CK73GB1H333K	CHIP C 0.033UF K		R52			RK73GB2A330J	CHIP R 33 J 1/10W	
C503			CK73GB1H473K	CHIP C 0.047UF K		R53			RK73GB2A154J	CHIP R 150K J 1/10W	
C504			CC73GCH1H470J	CHIP C 47PF J		R56 ,57			RK73GB2A104J	CHIP R 100K J 1/10W	
C505			CK73GB1H104K	CHIP C 0.10UF K		R61			RK73GB2A220J	CHIP R 22 J 1/10W	
C506			CC73GCH1H470J	CHIP C 47PF J		R62			RK73GH2A223D	CHIP R 22K D 1/10W	
C508			CC73GCH1H470J	CHIP C 47PF J		R63			RK73GH2A563D	CHIP R 56K D 1/10W	
C900			CK73GB1H104K	CHIP C 0.10UF K		R69			RK73GB2A102J	CHIP R 1.0K J 1/10W	
C901			CK73GB1H102K	CHIP C 1000PF K		R70 -72			RK73GB2A000J	CHIP R 0 J 1/10W	
C902			CC73GCH1H101J	CHIP C 100PF J		R75 ,76			RK73GB2A472J	CHIP R 4.7K J 1/10W	
C904			CC73GCH1H101J	CHIP C 100PF J		R78			RK73GB2A104J	CHIP R 100K J 1/10W	
C905			CK73FB0J106K	CHIP C 10UF K		R92			RK73GB2A104J	CHIP R 100K J 1/10W	
C906-908			CK73GB1H102K	CHIP C 1000PF K		R102			RK73GH2A471D	CHIP R 470 D 1/10W	
C909,910			CC73GCH1H101J	CHIP C 100PF J		R105			RK73GB2A000J	CHIP R 0 J 1/10W	
C912,913			CC73GCH1H101J	CHIP C 100PF J		R106			RK73GB2A474J	CHIP R 470K J 1/10W	
C914			CK73GB1H104K	CHIP C 0.10UF K		R107-109			RK73GB2A000J	CHIP R 0 J 1/10W	
C915			CC73GCH1H101J	CHIP C 100PF J		R110			RK73GB2A394J	CHIP R 390K J 1/10W	
C916			CK73GB1H102K	CHIP C 1000PF K		R121			RK73GH2A103D	CHIP R 10K D 1/10W	
C917-919			CE32BM1V220M	CHIP EL 22UF 35WV		R123			RK73GB2A103J	CHIP R 10K J 1/10W	
CN1			E04-0193-05	PIN SOCKET		R125			R92-1061-05	JUMPER REST 0 OHM	
CN2			E23-0902-05	TERMINAL		R133			RK73GB2A103J	CHIP R 10K J 1/10W	
CN8			E41-2671-05	PIN ASSY(2P)		R136			RK73GB2A394J	CHIP R 390K J 1/10W	
CN11			E41-2673-05	PIN ASSY(4P)		R137,138			RK73GB2A104J	CHIP R 100K J 1/10W	
CN12			E41-2672-05	PIN ASSY(3P)		R140			RK73GB2A104J	CHIP R 100K J 1/10W	
CN15			E41-2672-05	PIN ASSY(3P)		R142			RK73GB2A000J	CHIP R 0 J 1/10W	
CN20			E40-6656-05	PIN ASSY(36P)							

PARTS LIST

FINAL UNIT (X45-3870-11)
CONTROL UNIT (X53-4132-71)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
R145			RK73GB2A000J	CHIP R 0 J 1/10W		Q22			SSM3K15TE(F)	FET	
R151			RK73GB2A000J	CHIP R 0 J 1/10W		Q501			2SA1832F	TRANSISTOR	
R152			RK73GB2A223J	CHIP R 22K J 1/10W		CONTROL UNIT (X53-4132-71)					
R155			RK73GB2A101J	CHIP R 100 J 1/10W		C1 -5			CK73GB1H102K	CHIP C 1000PF	K
R156,157			RK73GB2A000J	CHIP R 0 J 1/10W		C6			CC73GCH1H101J	CHIP C 100PF	J
R163,164			RK73GB2A122J	CHIP R 1.2K J 1/10W		C7			CK73GB1H102K	CHIP C 1000PF	K
R165			RK73GB2A474J	CHIP R 470K J 1/10W		C8			CC73GCH1H101J	CHIP C 100PF	J
R166			RK73GB2A000J	CHIP R 0 J 1/10W		C9			CK73GB1H102K	CHIP C 1000PF	K
R167			RK73GB2A333D	CHIP R 33K D 1/10W		C10			CC73GCH1H101J	CHIP C 100PF	J
R169,170			RK73GB2A103J	CHIP R 10K J 1/10W		C12 -16			CK73GB1H102K	CHIP C 1000PF	K
R203			RK73GB2A000J	CHIP R 0 J 1/10W		C18 -28			CK73GB1H102K	CHIP C 1000PF	K
R204			RK73GB2A104J	CHIP R 100K J 1/10W		C29			CC73GCH1H101J	CHIP C 100PF	J
R206			RK73GB2A104J	CHIP R 100K J 1/10W		C30 -33			CK73GB1H102K	CHIP C 1000PF	K
R207,208			RK73GB2A473J	CHIP R 47K J 1/10W		C34			CC73GCH1H101J	CHIP C 100PF	J
R501			RK73GB2A104J	CHIP R 100K J 1/10W		C35			CK73GB1H102K	CHIP C 1000PF	K
R502			RK73GB2A474J	CHIP R 470K J 1/10W		C36			CC73GCH1H101J	CHIP C 100PF	J
R503,504			RK73GB2A103J	CHIP R 10K J 1/10W		C37			CK73GB1H104K	CHIP C 0.10UF	K
R505			RK73GB2A223J	CHIP R 22K J 1/10W		C39 -47			CK73GB1H102K	CHIP C 1000PF	K
R506			RK73GB2A103J	CHIP R 10K J 1/10W		C49			CC73GCH1H101J	CHIP C 100PF	J
R802			RK73GB2A000J	CHIP R 0 J 1/10W		C50 -53			CK73GB1H102K	CHIP C 1000PF	K
R900			RK73GB2A000J	CHIP R 0 J 1/10W		C54			CC73GCH1H101J	CHIP C 100PF	J
R901			RK73GB2A182J	CHIP R 1.8K J 1/10W		C55			CK73GB1H102K	CHIP C 1000PF	K
R902			RK73GB2A000J	CHIP R 0 J 1/10W		C56			CC73GCH1H101J	CHIP C 100PF	J
R903			RK73GB2A681J	CHIP R 680 J 1/10W		C57			CK73GB1H102K	CHIP C 1000PF	K
R905,906			RK73GB2A000J	CHIP R 0 J 1/10W		C58			CC73GCH1H101J	CHIP C 100PF	J
R907			RK73GH2A153D	CHIP R 15K D 1/10W		C60 -62			CK73GB1H102K	CHIP C 1000PF	K
R909			RK73GB2A000J	CHIP R 0 J 1/10W		C63			CK73GB1H104K	CHIP C 0.10UF	K
R910			RK73GB2A182J	CHIP R 1.8K J 1/10W		C64			CK73GB1H102K	CHIP C 1000PF	K
R911,912			RK73GB2A000J	CHIP R 0 J 1/10W		C65			CK73FB0J106K	CHIP C 10UF	K
R914			RK73GB2A222J	CHIP R 2.2K J 1/10W		C66			CK73GB1H102K	CHIP C 1000PF	K
R915-917			RK73EB2E4R7J	CHIP R 4.7 J 1/4W		C67			CK73FB0J106K	CHIP C 10UF	K
R918-921			RK73EB2ER39K	CHIP R 0.39 K 1/4W		C68			CK73GB1H102K	CHIP C 1000PF	K
R922			RK73GB2A390J	CHIP R 39 J 1/10W		C69			CK73GB1H104K	CHIP C 0.10UF	K
VR902			R31-0668-15	VARIABLE RESISTOR(10K)		C70			CK73GB1H102K	CHIP C 1000PF	K
D4			Z5W27V	SURGE ABSORBER		C71			CK73FB0J106K	CHIP C 10UF	K
D5			DSM3MA1-RPB	DIODE		C72			CK73GB1E105K	CHIP C 1.0UF	K
D6			1SS355	DIODE		C73			CC73GCH1H101J	CHIP C 100PF	J
D20 -22			HSM88AS-E	DIODE		C74			CK73GB1H104K	CHIP C 0.10UF	K
D23			UDZW4.7(B)	ZENER DIODE		C75			CC73GCH1H101J	CHIP C 100PF	J
D902			AVRM16270MABB	VARISTOR		C76			CK73GB1H102K	CHIP C 1000PF	K
IC1			LTC6101BIS5-F	ANALOGUE IC		C77			C93-1824-05	CHIP C 100UF	M
IC2			NJM2904E-ZB	ANALOGUE IC		C78			CK73FB0J106K	CHIP C 10UF	K
IC4			NJM2904E-ZB	ANALOGUE IC		C79 -82			CK73GB1H104K	CHIP C 0.10UF	K
IC6			NJM2904E-ZB	ANALOGUE IC		C83 -86			CK73FB0J106K	CHIP C 10UF	K
IC7			LM56BIMM/NOPB	ANALOGUE IC		C87			C93-1824-05	CHIP C 100UF	M
IC9			S24CS02AFJTBG	ROM IC		C88			CK73GB1H103K	CHIP C 0.010UF	K
IC11			NJM78M05DL1AZB	ANALOGUE IC		C89,90			CC73GCH1H221J	CHIP C 220PF	J
IC12	1B		KIA7805API	BI-POLAR IC		C92			CC73GCH1H100D	CHIP C 10PF	D
IC15			NJM2904E-ZB	ANALOGUE IC		C95			C93-1824-05	CHIP C 100UF	M
IC17	1B		KIA7805API	BI-POLAR IC		C96			CC73GCH1H101J	CHIP C 100PF	J
IC18	1B		KIA7808API	BI-POLAR IC		C97			CK73GB1H104K	CHIP C 0.10UF	K
IC20			AV111-12LF	ANALOGUE IC		C98			CK73FB0J106K	CHIP C 10UF	K
IC21			ADL5604ACPZ	ANALOGUE IC		C99			CK73GB1H102K	CHIP C 1000PF	K
Q2			SSM3K15TE(F)	FET		C102			CC73GCH1H150J	CHIP C 15PF	J
Q3			SSM3J01F	FET		C103			CC73GCH1H101J	CHIP C 100PF	J
Q6			SSM3K15TE(F)	FET		C104-106			CD04BQ1H221M	ELECTRO 220UF	50WV
Q8			SSM3K15TE(F)	FET		C107			CK73GB1H102K	CHIP C 1000PF	K
Q14			SSM3K15TE(F)	FET		C108			CK73GB1H104K	CHIP C 0.10UF	K
Q15			2SJ506-E(S)	FET							

If a part reference number is listed in a shaded box, that part does not come with the PCB.

PARTS LIST

CONTROL UNIT (X53-4132-71)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
C109			CK73GB1H102K	CHIP C 1000PF K		C217			CK73GB1H103K	CHIP C 0.010UF K	
C110			C93-1824-05	CHIP C 100UF M		C218			CC73GCH1H471J	CHIP C 470PF J	
C111			CK73GB1H104K	CHIP C 0.10UF K		C219			CC73GCH1H100D	CHIP C 10PF D	
C119			CC73GCH1H181J	CHIP C 180PF J		C220			CK73GB1H103K	CHIP C 0.010UF K	
C120			CK73GB1H102K	CHIP C 1000PF K		C222			CC73GCH1H150J	CHIP C 15PF J	
C121			CK73FB0J106K	CHIP C 10UF K		C223			CK73GB1H103K	CHIP C 0.010UF K	
C122			CC73GCH1H101J	CHIP C 100PF J		C224			CK73GB1E105K	CHIP C 1.0UF K	
C123			CK73GB1H472K	CHIP C 4700PF K		C225			CK73GB1H104K	CHIP C 0.10UF K	
C125			CK73GB1H472K	CHIP C 4700PF K		C226			CK73FB0J106K	CHIP C 10UF K	
C127			CK73GB1H182K	CHIP C 1800PF K		C227			CK73GB1H102K	CHIP C 1000PF K	
C128			CC73GCH1H101J	CHIP C 100PF J		C228			CK73GB1H104K	CHIP C 0.10UF K	
C130			CD04BQ1H221M	ELECTRO 220UF 50WV		C229			CC73GCH1H101J	CHIP C 100PF J	
C131			CE32AU1C330M	CHIP EL 33UF 16WV		C230			CK73GB1E105K	CHIP C 1.0UF K	
C133			CD04BQ1H221M	ELECTRO 220UF 50WV		C231			CK73GB1H104K	CHIP C 0.10UF K	
C134			CK73GB1H104K	CHIP C 0.10UF K		C233			CK73GB1H103K	CHIP C 0.010UF K	
C137,138			CK73GB1H102K	CHIP C 1000PF K		C234,235			CK73GB1H104K	CHIP C 0.10UF K	
C139,140			CE32AU1C330M	CHIP EL 33UF 16WV		C236			C90-4120-05	ELECTRO 470UF 35WV	
C141			CK73GB1H102K	CHIP C 1000PF K		C237			CK73GB1H104K	CHIP C 0.10UF K	
C144			CE32AU1C330M	CHIP EL 33UF 16WV		C238			CK73GB1H102K	CHIP C 1000PF K	
C145			CK73GB1H182K	CHIP C 1800PF K		C239			C92-0777-05	ELECTRO 1000UF 25WV	
C146			CK73GB1H104K	CHIP C 0.10UF K		C241			CK73GB1H103K	CHIP C 0.010UF K	
C152			CK73GB1H102K	CHIP C 1000PF K		C243			CK73GB1H103K	CHIP C 0.010UF K	
C155			CC73GCH1H181J	CHIP C 180PF J		C244			CK73GB1H104K	CHIP C 0.10UF K	
C157			CE32AU1C330M	CHIP EL 33UF 16WV		C245			CK73FB0J106K	CHIP C 10UF K	
C159			CK73GB1H102K	CHIP C 1000PF K		C246,247			CK73GB1H102K	CHIP C 1000PF K	
C161			CK73GB1H102K	CHIP C 1000PF K		C248,249			CK73GB1H104K	CHIP C 0.10UF K	
C162			CE32AU1C330M	CHIP EL 33UF 16WV		C250			CK73FB0J106K	CHIP C 10UF K	
C165			CK73GB1H102K	CHIP C 1000PF K		C251			CK73GB1H102K	CHIP C 1000PF K	
C166			CE32AU1C330M	CHIP EL 33UF 16WV		C252			CK73FB0J106K	CHIP C 10UF K	
C169			CK73FB0J106K	CHIP C 10UF K		C253-255			CK73GB1H103K	CHIP C 0.010UF K	
C170			CK73GB1H102K	CHIP C 1000PF K		C256			CK73GB1H104K	CHIP C 0.10UF K	
C172			CK73FB0J106K	CHIP C 10UF K		C257			CK73FB0J106K	CHIP C 10UF K	
C173			CC73GCH1H101J	CHIP C 100PF J		C258			CK73GB1H103K	CHIP C 0.010UF K	
C174			CK73GB1H102K	CHIP C 1000PF K		C262			CK73FB0J106K	CHIP C 10UF K	
C175			CC73GCH1H391J	CHIP C 390PF J		C263			CK73GB1H102K	CHIP C 1000PF K	
C177			CC73GCH1H101J	CHIP C 100PF J		C265			CK73GB1H104K	CHIP C 0.10UF K	
C178			CK73FB0J106K	CHIP C 10UF K		C266-270			CK73GB1H103K	CHIP C 0.010UF K	
C188,189			CK73GB1H104K	CHIP C 0.10UF K		C271			CK73FB0J106K	CHIP C 10UF K	
C190			CK73GB1E105K	CHIP C 1.0UF K		C272,273			CK73GB1H103K	CHIP C 0.010UF K	
C192,193			CK73GB1E105K	CHIP C 1.0UF K		C274			CK73GB1H472K	CHIP C 4700PF K	
C194			CC73GCH1H560J	CHIP C 56PF J		C275			CC73GCH1H120J	CHIP C 12PF J	
C195			CC73GCH1H181J	CHIP C 180PF J		C276			CC73GCH1H100D	CHIP C 10PF D	
C196			CC73GCH1H101J	CHIP C 100PF J		C277			CK73GB1H103K	CHIP C 0.010UF K	
C197			CC73GCH1H330J	CHIP C 33PF J		C278			CK73FB0J106K	CHIP C 10UF K	
C199			C93-1824-05	CHIP C 100UF M		C279			CK73GB1H103K	CHIP C 0.010UF K	
C200			CK73FB0J106K	CHIP C 10UF K		C280			CC73GCH1H100D	CHIP C 10PF D	
C202			CK73GB1E105K	CHIP C 1.0UF K		C281			CC73GCH1H150J	CHIP C 15PF J	
C203			CC73GCH1H101J	CHIP C 100PF J		C282			CK73GB1H103K	CHIP C 0.010UF K	
C204			CC73GCH1H121J	CHIP C 120PF J		C283			CK73GB1H104K	CHIP C 0.10UF K	
C205			CK73GB1H182K	CHIP C 1800PF K		C284-288			CK73GB1H103K	CHIP C 0.010UF K	
C206			C93-1824-05	CHIP C 100UF M		C289			CK73GB1H102K	CHIP C 1000PF K	
C207			CK73GB1H102K	CHIP C 1000PF K		C290-297			CK73GB1H103K	CHIP C 0.010UF K	
C208			CK73FB0J106K	CHIP C 10UF K		C299,300			CK73GB1H103K	CHIP C 0.010UF K	
C209			CK73GB1H103K	CHIP C 0.010UF K		C302			CK73GB1H103K	CHIP C 0.010UF K	
C210			CK73GB1E105K	CHIP C 1.0UF K		C304			CC73GCH1H101J	CHIP C 100PF J	
C211			CK73GB1H392K	CHIP C 3900PF K		C305,306			CK73GB1H102K	CHIP C 1000PF K	
C212			CC73GCH1H120J	CHIP C 12PF J		C307-310			CC73GCH1H101J	CHIP C 100PF J	
C213,214			CK73GB1H103K	CHIP C 0.010UF K		C311,312			CK73GB1H102K	CHIP C 1000PF K	
C215			CK73GB1H104K	CHIP C 0.10UF K		C313			CC73GCH1H101J	CHIP C 100PF J	
C216			CC73GCH1H100D	CHIP C 10PF D		C314			CK73GB1H102K	CHIP C 1000PF K	

PARTS LIST

CONTROL UNIT (X53-4132-71)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
C315			CC73GCH1H101J	CHIP C 100PF J		C413			CK73GB1H104K	CHIP C 0.10UF K	
C316			CK73GB1H102K	CHIP C 1000PF K		C414			CK73GB1H103K	CHIP C 0.010UF K	
C317			CK73GB1H103K	CHIP C 0.010UF K		C415			CK73GB1H104K	CHIP C 0.10UF K	
C318			CC73GCH1H101J	CHIP C 100PF J		C416			CK73GB1H103K	CHIP C 0.010UF K	
C319			CK73GB1H102K	CHIP C 1000PF K		C417			CK73GB1E105K	CHIP C 1.0UF K	
C320			CK73GB1H103K	CHIP C 0.010UF K		C418-420			CK73GB1H102K	CHIP C 1000PF K	
C321			CC73GCH1H101J	CHIP C 100PF J		C421			CC73GCH1H101J	CHIP C 100PF J	
C322,323			CK73GB1H102K	CHIP C 1000PF K		C422-424			CK73GB1H102K	CHIP C 1000PF K	
C324			CK73GB1H103K	CHIP C 0.010UF K		C425,426			CC73GCH1H101J	CHIP C 100PF J	
C325			CC73GCH1H101J	CHIP C 100PF J		C427-435			CK73GB1H102K	CHIP C 1000PF K	
C326,327			CK73GB1H102K	CHIP C 1000PF K		C436			CK73GB1E105K	CHIP C 1.0UF K	
C328			CK73GB1H103K	CHIP C 0.010UF K		C437,438			CC73GCH1H101J	CHIP C 100PF J	
C329-331			CK73GB1H102K	CHIP C 1000PF K		C440			CK73GB1H102K	CHIP C 1000PF K	
C332			CK73GB1H103K	CHIP C 0.010UF K		C442			CC73GCH1H101J	CHIP C 100PF J	
C333-339			CK73GB1H102K	CHIP C 1000PF K		C444			CK73GB1H102K	CHIP C 1000PF K	
C340			CK73GB1H103K	CHIP C 0.010UF K		C445			CK73GB1H104K	CHIP C 0.10UF K	
C342,343			CK73GB1H102K	CHIP C 1000PF K		C446			CC73GCH1H391J	CHIP C 390PF J	
C344			CK73GB1H103K	CHIP C 0.010UF K		C447			CC73GCH1H101J	CHIP C 100PF J	
C345			CK73GB1H104K	CHIP C 0.10UF K		C448,449			CK73GB1H102K	CHIP C 1000PF K	
C346,347			CK73GB1H102K	CHIP C 1000PF K		C450			CC73GCH1H101J	CHIP C 100PF J	
C348			CK73GB1H103K	CHIP C 0.010UF K		C452,453			CK73GB1H102K	CHIP C 1000PF K	
C350			CK73GB1H102K	CHIP C 1000PF K		C456,457			CK73GB1H102K	CHIP C 1000PF K	
C351			CK73GB1H103K	CHIP C 0.010UF K		C463			CK73GB1H104K	CHIP C 0.10UF K	
C352,353			CK73GB1H102K	CHIP C 1000PF K		C467,468			CK73GB1H102K	CHIP C 1000PF K	
C354			CK73GB1H103K	CHIP C 0.010UF K		C469,470			CC73GCH1H101J	CHIP C 100PF J	
C355			CC73GCH1H101J	CHIP C 100PF J		C471			CK73GB1H102K	CHIP C 1000PF K	
C356			CK73GB1H102K	CHIP C 1000PF K		C473-475			CK73GB1H102K	CHIP C 1000PF K	
C357			CK73GB1H103K	CHIP C 0.010UF K		C477			CK73GB1E105K	CHIP C 1.0UF K	
C358			CK73GB1H102K	CHIP C 1000PF K		C499			C92-0905-05	OS-CON 47UF 35WV	
C359			CC73GCH1H101J	CHIP C 100PF J		C500			CK73GB1H104K	CHIP C 0.10UF K	
C360			CK73GB1H102K	CHIP C 1000PF K		C510			CK73FB0J106K	CHIP C 10UF K	
C361			CK73GB1H103K	CHIP C 0.010UF K		CN1 -3			E40-6656-05	PIN ASSY(36P)	
C362			CK73GB1H102K	CHIP C 1000PF K		CN4			E41-2673-05	PIN ASSY(4P)	
C363			CC73GCH1H101J	CHIP C 100PF J		CN56,57			E40-6656-05	PIN ASSY(36P)	
C364			CK73GB1H102K	CHIP C 1000PF K		CN58			E40-5960-05	PIN ASSY(30P)	
C365			CK73GB1H103K	CHIP C 0.010UF K		CN59			E40-6102-05	PIN ASSY(20P)	
C366-368			CK73GB1H102K	CHIP C 1000PF K		CN60			E41-2735-05	PIN ASSY(2P)	
C369			CK73GB1H103K	CHIP C 0.010UF K		F1 ,2			F53-0315-15	FUSE(250MA)	
C370-372			CK73GB1H102K	CHIP C 1000PF K		F3			F53-0328-15	FUSE(5A)	
C373			CC73GCH1H101J	CHIP C 100PF J		L3 -14			L92-0447-05	BEADS CORE	
C374			CK73GB1H103K	CHIP C 0.010UF K		L15			L33-1476-05	SMALL FIXED INDUCTOR	
C375,376			CK73GB1H102K	CHIP C 1000PF K		L16			L33-1475-05	SMALL FIXED INDUCTOR	
C377			CC73GCH1H101J	CHIP C 100PF J		L17 ,18			L92-0447-05	BEADS CORE	
C379,380			CK73GB1H102K	CHIP C 1000PF K		L19			L33-1475-05	SMALL FIXED INDUCTOR	
C381			CC73GCH1H101J	CHIP C 100PF J		L20 -22			L92-0447-05	BEADS CORE	
C382			CK73GB1H103K	CHIP C 0.010UF K		L32 -40			L92-0447-05	BEADS CORE	
C383,384			CK73GB1H102K	CHIP C 1000PF K		L43			L92-0447-05	BEADS CORE	
C385			CC73GCH1H101J	CHIP C 100PF J		L44 -49			L92-0467-05	CHIP FERRITE	
C386,387			CK73GB1H102K	CHIP C 1000PF K		X1			L77-1984-05	CRYSTAL RESONATOR(14.7456MHZ)	
C388			CC73GCH1H101J	CHIP C 100PF J		X2			L77-1987-05	CRYSTAL RESONATOR(16.515072MHZ)	
C389,390			CK73GB1H102K	CHIP C 1000PF K		CP8			RK75GB1JR00	CHIP-COM 0 1/16W	
C394			C92-0905-05	OS-CON 47UF 35WV		CP10			RK75GB1JR00	CHIP-COM 0 1/16W	
C395			CK73GB1H103K	CHIP C 0.010UF K		CP13			RK75GB1JR00	CHIP-COM 0 1/16W	
C396-399			CK73GB1H102K	CHIP C 1000PF K		CP19			RK75GB1JR00	CHIP-COM 0 1/16W	
C400,401			CE32AU1C330M	CHIP EL 33UF 16WV		CP25,26			RK75GB1JR00	CHIP-COM 0 1/16W	
C403			CK73GB1E105K	CHIP C 1.0UF K		R1 ,2			RK73GB2A000J	CHIP R 0 J 1/10W	
C404			CK73FB0J106K	CHIP C 10UF K		R6			RK73GB2A101J	CHIP R 100 J 1/10W	
C405,406			CC73GCH1H101J	CHIP C 100PF J							
C407			CK73GB1H102K	CHIP C 1000PF K							
C408-410			CK73GB1E105K	CHIP C 1.0UF K							

PARTS LIST

CONTROL UNIT (X53-4132-71)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
R7 -17			RK73GB2A000J	CHIP R 0 J 1/10W		R156,157			RK73GH2A104D	CHIP R 100K D 1/10W	
R18 ,19			RK73GB2A101J	CHIP R 100 J 1/10W		R158			RK73GB2A333J	CHIP R 33K J 1/10W	
R21 -45			RK73GB2A000J	CHIP R 0 J 1/10W		R159			RK73GB2A000J	CHIP R 0 J 1/10W	
R47 -49			RK73GB2A000J	CHIP R 0 J 1/10W		R160,161			RK73GB2A563J	CHIP R 56K J 1/10W	
R51 -61			RK73GB2A000J	CHIP R 0 J 1/10W		R162			RK73GB2A224J	CHIP R 220K J 1/10W	
R62			RK73GB2A101J	CHIP R 100 J 1/10W		R163			RK73GB2A000J	CHIP R 0 J 1/10W	
R63 ,64			RK73GB2A332J	CHIP R 3.3K J 1/10W		R165			RK73GB2A104J	CHIP R 100K J 1/10W	
R65			RK73GB2A123J	CHIP R 12K J 1/10W		R166			RK73GB2A333J	CHIP R 33K J 1/10W	
R66			RK73GB2A683J	CHIP R 68K J 1/10W		R167			RK73GB2A473J	CHIP R 47K J 1/10W	
R67			RK73GH2A822D	CHIP R 8.2K D 1/10W		R168			RK73GB2A563J	CHIP R 56K J 1/10W	
R68			RK73GH2A332D	CHIP R 3.3K D 1/10W		R169			RK73GB2A333J	CHIP R 33K J 1/10W	
R69 ,70			RK73GB2A000J	CHIP R 0 J 1/10W		R171			RK73GB2A183J	CHIP R 18K J 1/10W	
R71			RK73GH2A473D	CHIP R 47K D 1/10W		R172,173			RK73GB2A473J	CHIP R 47K J 1/10W	
R72 -76			RK73GB2A000J	CHIP R 0 J 1/10W		R174			RK73GB2A683J	CHIP R 68K J 1/10W	
R77			RK73GH2A104D	CHIP R 100K D 1/10W		R175			RK73GB2A393J	CHIP R 39K J 1/10W	
R78			RK73GB2A104J	CHIP R 100K J 1/10W		R176			RK73GB2A473J	CHIP R 47K J 1/10W	
R79			RK73GH2A332D	CHIP R 3.3K D 1/10W		R177,178			RK73GB2A000J	CHIP R 0 J 1/10W	
R80			RK73GB2A123J	CHIP R 12K J 1/10W		R179			RK73GB2A473J	CHIP R 47K J 1/10W	
R81 ,82			RK73GB2A563J	CHIP R 56K J 1/10W		R180			RK73GB2A223J	CHIP R 22K J 1/10W	
R83			RK73GB2A124J	CHIP R 120K J 1/10W		R181,182			RK73GB2A103J	CHIP R 10K J 1/10W	
R84			RK73GB2A473J	CHIP R 47K J 1/10W		R183			RK73GB2A000J	CHIP R 0 J 1/10W	
R85			RK73GB2A000J	CHIP R 0 J 1/10W		R184			RK73GB2A473J	CHIP R 47K J 1/10W	
R86			RK73GB2A473J	CHIP R 47K J 1/10W		R185			RK73GB2A103J	CHIP R 10K J 1/10W	
R87			RK73GB2A223J	CHIP R 22K J 1/10W		R186			RK73GB2A563J	CHIP R 56K J 1/10W	
R88			RK73GB2A000J	CHIP R 0 J 1/10W		R187			RK73GB2A223J	CHIP R 22K J 1/10W	
R89			RK73GB2A103J	CHIP R 10K J 1/10W		R190			RK73GB2A393J	CHIP R 39K J 1/10W	
R90			RK73GB2A153J	CHIP R 15K J 1/10W		R191			RK73GB2A000J	CHIP R 0 J 1/10W	
R91			RK73GB2A472J	CHIP R 4.7K J 1/10W		R192			RK73GB2A154J	CHIP R 150K J 1/10W	
R92			RK73GB2A562J	CHIP R 5.6K J 1/10W		R193			RK73GB2A103J	CHIP R 10K J 1/10W	
R93 ,94			RK73GB2A000J	CHIP R 0 J 1/10W		R194			RK73GB2A473J	CHIP R 47K J 1/10W	
R95			RK73GB2A470J	CHIP R 47 J 1/10W		R195,196			RK73GB2A000J	CHIP R 0 J 1/10W	
R96			RK73GB2A223J	CHIP R 22K J 1/10W		R197			RK73GB2A103J	CHIP R 10K J 1/10W	
R98			RK73GB2A103J	CHIP R 10K J 1/10W		R198			RK73GB2A473J	CHIP R 47K J 1/10W	
R100			RK73GB2A473J	CHIP R 47K J 1/10W		R199			RK73GB2A103J	CHIP R 10K J 1/10W	
R101			RK73GB2A000J	CHIP R 0 J 1/10W		R200,201			RK73GB2A000J	CHIP R 0 J 1/10W	
R102			RK73GB2A123J	CHIP R 12K J 1/10W		R202			RK73GB2A473J	CHIP R 47K J 1/10W	
R103-105			RK73GB2A473J	CHIP R 47K J 1/10W		R203			RK73GB2A104J	CHIP R 100K J 1/10W	
R106-108			RK73GB2A000J	CHIP R 0 J 1/10W		R204			RK73GB2A473J	CHIP R 47K J 1/10W	
R109			RK73GB2A153J	CHIP R 15K J 1/10W		R205			RK73GB2A104J	CHIP R 100K J 1/10W	
R111			RK73GB2A823J	CHIP R 82K J 1/10W		R206			RK73GB2A122J	CHIP R 1.2K J 1/10W	
R112			RK73GB2A123J	CHIP R 12K J 1/10W		R207,208			RK73GB2A473J	CHIP R 47K J 1/10W	
R113			RK73GB2A823J	CHIP R 82K J 1/10W		R209			RK73GB2A103J	CHIP R 10K J 1/10W	
R114			RK73GB2A223J	CHIP R 22K J 1/10W		R210			RK73GB2A000J	CHIP R 0 J 1/10W	
R115			RK73GB2A154J	CHIP R 150K J 1/10W		R211,212			RK73GB2A473J	CHIP R 47K J 1/10W	
R116			RK73GB2A223J	CHIP R 22K J 1/10W		R213			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R127			RK73GB2A473J	CHIP R 47K J 1/10W		R214			RK73GB2A824J	CHIP R 820K J 1/10W	
R128-130			RK73GB2A000J	CHIP R 0 J 1/10W		R215			RK73GB2A473J	CHIP R 47K J 1/10W	
R131-133			RK73GB2A473J	CHIP R 47K J 1/10W		R216,217			RK73GB2A000J	CHIP R 0 J 1/10W	
R135			RK73GB2A000J	CHIP R 0 J 1/10W		R218,219			RK73GB2A473J	CHIP R 47K J 1/10W	
R137			RK73GB2A102J	CHIP R 1.0K J 1/10W		R220,221			RK73GB2A000J	CHIP R 0 J 1/10W	
R138			RK73GB2A473J	CHIP R 47K J 1/10W		R222			RK73GB2A473J	CHIP R 47K J 1/10W	
R141-144			RK73GB2A000J	CHIP R 0 J 1/10W		R223			RK73GB2A103J	CHIP R 10K J 1/10W	
R145			RK73GB2A104J	CHIP R 100K J 1/10W		R224			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R146-148			RK73GB2A000J	CHIP R 0 J 1/10W		R225			RK73GB2A103J	CHIP R 10K J 1/10W	
R149			RK73GB2A333J	CHIP R 33K J 1/10W		R226			RK73GB2A822J	CHIP R 8.2K J 1/10W	
R150			RK73GB2A563J	CHIP R 56K J 1/10W		R228,229			RK73GB2A824J	CHIP R 820K J 1/10W	
R151			RK73GB2A124J	CHIP R 120K J 1/10W		R230,231			RK73GB2A473J	CHIP R 47K J 1/10W	
R152			RK73GB2A104J	CHIP R 100K J 1/10W		R232			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R153			RK73GB2A000J	CHIP R 0 J 1/10W		R233			RK73GB2A000J	CHIP R 0 J 1/10W	
R154,155			RK73GB2A333J	CHIP R 33K J 1/10W		R234,235			RK73GB2A473J	CHIP R 47K J 1/10W	

PARTS LIST

CONTROL UNIT (X53-4132-71)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
R237			RK73GB2A473J	CHIP R 47K J 1/10W		R471-473			RK73GB2A104J	CHIP R 100K J 1/10W	
R240-243			RK73GB2A473J	CHIP R 47K J 1/10W		R474			RK73GB2A000J	CHIP R 0 J 1/10W	
R245,246			RK73GB2A472J	CHIP R 4.7K J 1/10W		R475			RK73GB2A104J	CHIP R 100K J 1/10W	
R247			RK73GB2A473J	CHIP R 47K J 1/10W		R477			RK73GB2A104J	CHIP R 100K J 1/10W	
R249,250			RK73GB2A000J	CHIP R 0 J 1/10W		R478			RK73GB2A103J	CHIP R 10K J 1/10W	
R251			RK73GB2A473J	CHIP R 47K J 1/10W		R479			RK73GB2A000J	CHIP R 0 J 1/10W	
R254			RK73GB2A473J	CHIP R 47K J 1/10W		R482			RK73GB2A000J	CHIP R 0 J 1/10W	
R261,262			RK73GB2A473J	CHIP R 47K J 1/10W		R484			RK73GB2A000J	CHIP R 0 J 1/10W	
R267-271			RK73GB2A473J	CHIP R 47K J 1/10W		R491-495			RK73GB2A000J	CHIP R 0 J 1/10W	
R273			RK73GB2A473J	CHIP R 47K J 1/10W		R501			RK73GB2A000J	CHIP R 0 J 1/10W	
R275			RK73GB2A473J	CHIP R 47K J 1/10W		R502			RK73GB2A183J	CHIP R 18K J 1/10W	
R277			RK73GB2A473J	CHIP R 47K J 1/10W		R507-510			RK73GB2A183J	CHIP R 18K J 1/10W	
R279			RK73GB2A103J	CHIP R 10K J 1/10W		R511-515			RK73GB2A123J	CHIP R 12K J 1/10W	
R281			RK73GB2A103J	CHIP R 10K J 1/10W		R522,523			RK73GB2A000J	CHIP R 0 J 1/10W	
R283			RK73GB2A000J	CHIP R 0 J 1/10W		R524,525			RK73GB2A473J	CHIP R 47K J 1/10W	
R286-288			RK73GB2A000J	CHIP R 0 J 1/10W		R526,527			RK73GB2A121J	CHIP R 120 J 1/10W	
R289			RK73GB2A473J	CHIP R 47K J 1/10W		R528-535			RK73GB2A000J	CHIP R 0 J 1/10W	
R290			RK73GB2A000J	CHIP R 0 J 1/10W		R536			RK73GB2A104J	CHIP R 100K J 1/10W	
R292-294			RK73GB2A000J	CHIP R 0 J 1/10W		R540			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R296,297			RK73GB2A473J	CHIP R 47K J 1/10W		R541			RK73GB2A123J	CHIP R 12K J 1/10W	
R299,300			RK73GB2A103J	CHIP R 10K J 1/10W		R552			RK73GB2A000J	CHIP R 0 J 1/10W	
R301,302			RK73GB2A104J	CHIP R 100K J 1/10W		D1 ,2			CMS05-Q	DIODE	
R303-315			RK73GB2A473J	CHIP R 47K J 1/10W		D3 ,4			DA204U	DIODE	
R316-338			RK73GB2A000J	CHIP R 0 J 1/10W		D5			1SS355	DIODE	
R340			RK73GB2A102J	CHIP R 1.0K J 1/10W		D6			02DZ18F-X	ZENER DIODE	
R342-351			RK73GB2A102J	CHIP R 1.0K J 1/10W		D7 -11			DA204U	DIODE	
R352			RK73GB2A471J	CHIP R 470 J 1/10W		D12			1SS355	DIODE	
R353-357			RK73GB2A102J	CHIP R 1.0K J 1/10W		D13			02DZ18F-X	ZENER DIODE	
R358			RK73GB2A122J	CHIP R 1.2K J 1/10W		D14 -18			DA204U	DIODE	
R359			RK73GB2A000J	CHIP R 0 J 1/10W		D20			DA204U	DIODE	
R360			RK73GB2A122J	CHIP R 1.2K J 1/10W		D23			DA204U	DIODE	
R361-377			RK73GB2A000J	CHIP R 0 J 1/10W		D24			SMD185F-2	VARIATOR	
R378,379			RK73GB2A122J	CHIP R 1.2K J 1/10W		D25			MINISMD C020F	VARIATOR	
R380			RK73GB2A000J	CHIP R 0 J 1/10W		D26			1SS388F	DIODE	
R389-396			RK73GB2A000J	CHIP R 0 J 1/10W		D28			1SS355	DIODE	
R398-404			RK73GB2A000J	CHIP R 0 J 1/10W		D29			02DZ18F-X	ZENER DIODE	
R406-409			RK73GB2A000J	CHIP R 0 J 1/10W		D30			1SS355	DIODE	
R410			RK73GB2A684J	CHIP R 680K J 1/10W		D31			02DZ18F-X	ZENER DIODE	
R411			RK73GB2A224J	CHIP R 220K J 1/10W		D32			1SS355	DIODE	
R412			RK73GB2A103J	CHIP R 10K J 1/10W		D33			02DZ18F-X	ZENER DIODE	
R413			RK73GB2A104J	CHIP R 100K J 1/10W		D36 ,37			DA204U	DIODE	
R414			RK73GB2A000J	CHIP R 0 J 1/10W		D38 ,39			1SS388F	DIODE	
R415-418			RK73GB2A104J	CHIP R 100K J 1/10W		IC1			BU4094BCFV	MOS-IC	
R419,420			RK73GB2A000J	CHIP R 0 J 1/10W		IC2 ,3			BU4053BCFV	MOS-IC	
R426			RS14KB3D220J	FL-PROOF RS 22 J 2W		IC4			AK4550VTP	MOS-IC	
R427			RK73GB2A223J	CHIP R 22K J 1/10W		IC5			NJM2732V	BI-POLAR IC	
R428-430			RK73GB2A000J	CHIP R 0 J 1/10W		IC6			XC6209B332P-G	MOS-IC	
R432			RK73GB2A470J	CHIP R 47 J 1/10W		IC7			TA75S01F-F	MOS-IC	
R433			RK73GB2A473J	CHIP R 47K J 1/10W		IC8			M62364FP-F	MOS-IC	
R434			RK73GB2A470J	CHIP R 47 J 1/10W		IC9			NJM2734V	BI-POLAR IC	
R435			RK73GB2A473J	CHIP R 47K J 1/10W		IC10,11			NJM2340RB1	MOS-IC	
R436-446			RK73GB2A000J	CHIP R 0 J 1/10W		IC12			NJM2732V	BI-POLAR IC	
R448-454			RK73GB2A000J	CHIP R 0 J 1/10W		IC14			BU4053BCFV	MOS-IC	
R455			RK73GB2A104J	CHIP R 100K J 1/10W		IC15			BA33BC0FP	MOS-IC	
R457			RK73GB2A473J	CHIP R 47K J 1/10W		IC16			XC6209B502P-G	MOS-IC	
R458,459			RK73GB2A104J	CHIP R 100K J 1/10W		IC17			Note 1(BGA)	ROM IC	
R460,461			RK73GB2A103J	CHIP R 10K J 1/10W		IC18			XC6201P182M-G	MOS-IC	
R467,468			RK73GB2A000J	CHIP R 0 J 1/10W		IC19			NJM2732V	BI-POLAR IC	
R469			RK73GB2A103J	CHIP R 10K J 1/10W		IC20,21			NJM2734V	BI-POLAR IC	
R470			RK73GB2A000J	CHIP R 0 J 1/10W							

Note 1 : This part cannot be replaced. Therefore, this part is not supplied as a service part.

PARTS LIST

CONTROL UNIT (X53-4132-71)

CONTROL UNIT (X53-4140-10)

Ref. No.	Address	New parts	Parts No.	Description	Desti- nation	Ref. No.	Address	New parts	Parts No.	Description	Desti- nation
IC22	2C		BU4094BCFV	MOS-IC		C341,342			CK73HB1H102K	CHIP C 1000PF	K
IC23			TC7SH00FU-F	MOS-IC		C343			CC73HCH1H101J	CHIP C 100PF	J
IC25			TC7S66FUF	MOS-IC		C344			CK73HB1H102K	CHIP C 1000PF	K
IC26			NJM2734V	BI-POLAR IC		C345			CC73HCH1H101J	CHIP C 100PF	J
IC27			TC7SET126FU-F	MOS-IC		C346-348			CK73HB1H102K	CHIP C 1000PF	K
IC28			TC7SH126FU-F	MOS-IC		C349			CC73HCH1H101J	CHIP C 100PF	J
IC29			LA4425A	MOS-IC		C350			CK73HB1H102K	CHIP C 1000PF	K
IC30			TC7SH00FU-F	MOS-IC		C352			CK73HB1H102K	CHIP C 1000PF	K
IC31			* TC74VHC4040FK	MOS-IC		C353			CC73HCH1H101J	CHIP C 100PF	J
IC32,33			TC7SH126FU-F	MOS-IC		C354			CK73HB1H102K	CHIP C 1000PF	K
IC34			* 30625MGP490GU	MICROPROCESSOR IC		C355			CK73HB1E103K	CHIP C 0.010UF	K
IC35			S24CS02AFJTBG	ROM IC		C356			CC73HCH1H101J	CHIP C 100PF	J
IC36			* TC74VHCT541AK	MOS-IC		C357,358			CK73HB1H102K	CHIP C 1000PF	K
IC37			320VC5402PGE	MICROPROCESSOR IC		C359,360			CK73HB1A104K	CHIP C 0.10UF	K
IC38			TC7SET08FU-F	MOS-IC		C361			CK73HB1H102K	CHIP C 1000PF	K
IC39			TC7SH125FU-F	MOS-IC		C362			CK73HB1E103K	CHIP C 0.010UF	K
IC40			TC7SH126FU-F	MOS-IC		C364-366			CK73HB1H102K	CHIP C 1000PF	K
IC41			TC7SH08FU-F	MOS-IC		C369,370			CK73HB1H102K	CHIP C 1000PF	K
IC50			TC7SH08FU-F	MOS-IC		C371			CK73HB1A104K	CHIP C 0.10UF	K
Q1			RT1N141M-T111	TRANSISTOR		C373,374			CK73HB1H102K	CHIP C 1000PF	K
Q2 ,3			2SJ506-E(S)	FET		C376-378			CK73HB1H102K	CHIP C 1000PF	K
Q4 ,5			2SC4738F	TRANSISTOR		C379			CK73HB1A104K	CHIP C 0.10UF	K
Q6			DTC363EU	DIGITAL TRANSISTOR		C380,381			CK73HB1H102K	CHIP C 1000PF	K
Q7 ,8			RT1N141M-T111	TRANSISTOR		C383-386			CK73HB1H102K	CHIP C 1000PF	K
Q9			2SJ506-E(S)	FET		C387			CK73GB1H103K	CHIP C 0.010UF	K
Q10			2SC4738F	TRANSISTOR		C388-390			CK73HB1H102K	CHIP C 1000PF	K
Q11			2SD2114K(W)	TRANSISTOR		C391			CK73GB1E105K	CHIP C 1.0UF	K
Q12			2SC4738F	TRANSISTOR		C393-395			CK73HB1H102K	CHIP C 1000PF	K
Q13			2SD2114K(W)	TRANSISTOR		C396			CK73GB1H103K	CHIP C 0.010UF	K
Q14			2SC4116(Y)F	TRANSISTOR		C397,398			CK73HB1H102K	CHIP C 1000PF	K
Q15			2SA1586(Y)F	TRANSISTOR		C399			CK73GB1H104K	CHIP C 0.10UF	K
Q16			2SC4116(Y)F	TRANSISTOR		C401			CC73HCH1H101J	CHIP C 100PF	J
Q17			2SA1586(Y)F	TRANSISTOR		C402			CK73HB1H102K	CHIP C 1000PF	K
Q18			2SK1830F	FET		C403			CC73HCH1H101J	CHIP C 100PF	J
Q19			HN1L02FU(F)	FET		C405,406			CK73HB1H102K	CHIP C 1000PF	K
Q20			2SA1955A-F	TRANSISTOR		C409			CK73HB1H102K	CHIP C 1000PF	K
Q21			RT1N441M-T111	TRANSISTOR		C410			CC73HCH1H101J	CHIP C 100PF	J
Q22			2SA1955A-F	TRANSISTOR		C412-415			CK73HB1H102K	CHIP C 1000PF	K
Q23			RT1N441M-T111	TRANSISTOR		C416			CC73HCH1H101J	CHIP C 100PF	J
Q25 ,26			RT1N441M-T111	TRANSISTOR		C417,418			CE32AU1C330M	CHIP EL 33UF 16WV	
Q27 -29			2SD2114K(W)	TRANSISTOR		C419			CC73HCH1H101J	CHIP C 100PF	J
CONTROL UNIT (X53-4140-10)						C420			CK73HB1A104K	CHIP C 0.10UF	K
C302			CC73HCH1H101J	CHIP C 100PF	J	C421	CK73HB1H102K	CHIP C 1000PF	K		
C303			CK73HB1H102K	CHIP C 1000PF	K	C422	CE32AU1C330M	CHIP EL 33UF 16WV			
C305			CK73HB1A104K	CHIP C 0.10UF	K	C423	CC73HCH1H101J	CHIP C 100PF	J		
C306			CK73HB1H102K	CHIP C 1000PF	K	C424	CK73HB1H102K	CHIP C 1000PF	K		
C308,309			CK73HB1H102K	CHIP C 1000PF	K	C426-430	CK73HB1H102K	CHIP C 1000PF	K		
C311			CK73HB1A104K	CHIP C 0.10UF	K	C432	CC73HCH1H101J	CHIP C 100PF	J		
C312-317			CK73HB1H102K	CHIP C 1000PF	K	C433	CK73HB1H102K	CHIP C 1000PF	K		
C320			CC73HCH1H101J	CHIP C 100PF	J	C435-437	CK73HB1H102K	CHIP C 1000PF	K		
C322,323			CK73HB1H102K	CHIP C 1000PF	K	C438	CK73GB1H103K	CHIP C 0.010UF	K		
C324			CC73HCH1H101J	CHIP C 100PF	J	C439	CE32AU1C330M	CHIP EL 33UF 16WV			
C326-329			CK73HB1H102K	CHIP C 1000PF	K	C440-442	CK73HB1H102K	CHIP C 1000PF	K		
C331			CK73HB1H102K	CHIP C 1000PF	K	C443,444	CE32AU1C330M	CHIP EL 33UF 16WV			
C333-335			CK73HB1H102K	CHIP C 1000PF	K	C445	CK73HB1A104K	CHIP C 0.10UF	K		
C337			CK73HB1H102K	CHIP C 1000PF	K	C446	CK73FB1H102K	CHIP C 1000PF	K		
C339			CC73HCH1H101J	CHIP C 100PF	J	C447	CK73HB1A104K	CHIP C 0.10UF	K		
						C448	CE32AU1C330M	CHIP EL 33UF 16WV			
						C449,450	CK73HB1A104K	CHIP C 0.10UF	K		
						C453	CK73GB1H103K	CHIP C 0.010UF	K		

PARTS LIST

CONTROL UNIT (X53-4140-10)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
C461			CK73GB1H103K	CHIP C 0.010UF K		C575-588			CK73HB1E103K	CHIP C 0.010UF K	
C462			CK73HB1E103K	CHIP C 0.010UF K		C590-601			CK73HB1E103K	CHIP C 0.010UF K	
C463			CC73HCH1H100D	CHIP C 10PF D		C700			CK73HB1E103K	CHIP C 0.010UF K	
C465			CK73GB1H103K	CHIP C 0.010UF K		C701			CK73HB1A104K	CHIP C 0.10UF K	
C466			CK73GB1H104K	CHIP C 0.10UF K		C702			CK73HB1H102K	CHIP C 1000PF K	
C467			CK73GB1H103K	CHIP C 0.010UF K		C703			CC73HCH1H150J	CHIP C 15PF J	
C468			CK73GB1H104K	CHIP C 0.10UF K		C704,705			CK73FB0J106K	CHIP C 10UF K	
C469			CC73GCH1H121J	CHIP C 120PF J		C706			CK73HB1H102K	CHIP C 1000PF K	
C471			CK73HB1H102K	CHIP C 1000PF K		C707			CC73HCH1H080D	CHIP C 8.0PF D	
C474			CK73HB1H392K	CHIP C 3900PF K		C708			CK73HB1A104K	CHIP C 0.10UF K	
C475			CK73FB0J106K	CHIP C 10UF K		C709			CK73FB0J106K	CHIP C 10UF K	
C476			CK73HB1A104K	CHIP C 0.10UF K		C710			CK73HB1E103K	CHIP C 0.010UF K	
C477			CC73GCH1H121J	CHIP C 120PF J		C711			CK73FB0J106K	CHIP C 10UF K	
C478			CK73HB1H102K	CHIP C 1000PF K		C712			CK73HB1H102K	CHIP C 1000PF K	
C479			CC73GCH1H121J	CHIP C 120PF J		C713			CK73HB1A104K	CHIP C 0.10UF K	
C480			CK73FB0J106K	CHIP C 10UF K		C714			CK73FB0J106K	CHIP C 10UF K	
C482			CK73HB1A104K	CHIP C 0.10UF K		C715			CK73HB1A104K	CHIP C 0.10UF K	
C484			CS77BA1C010M	CHIP TNTL 1.0UF 16WV		C716			CK73HB1H102K	CHIP C 1000PF K	
C485			CK73GB1H103K	CHIP C 0.010UF K		C717			CK73HB1A104K	CHIP C 0.10UF K	
C486			CC73GCH1H121J	CHIP C 120PF J		C718			CC73HCH1H080D	CHIP C 8.0PF D	
C487			CK73HB1H102K	CHIP C 1000PF K		C719			CK73FB0J106K	CHIP C 10UF K	
C491			CK73FB0J106K	CHIP C 10UF K		C720			CK73HB1A104K	CHIP C 0.10UF K	
C493,494			CK73HB1A104K	CHIP C 0.10UF K		C721			CC73HCH1H100D	CHIP C 10PF D	
C495			CK73GB1E105K	CHIP C 1.0UF K		C722,723			CK73HB1H102K	CHIP C 1000PF K	
C496			CK73HB1C822K	CHIP C 8200PF K		C724			CK73HB1A104K	CHIP C 0.10UF K	
C501			CK73HB1A104K	CHIP C 0.10UF K		C725			CK73HB1H102K	CHIP C 1000PF K	
C504			CK73HB1A104K	CHIP C 0.10UF K		C726			CK73FB0J106K	CHIP C 10UF K	
C506			CK73HB1H472K	CHIP C 4700PF K		C727			CC73HCH1H020B	CHIP C 2.0PF B	
C507			CK73HB1E103K	CHIP C 0.010UF K		C728			CK73HB1E103K	CHIP C 0.010UF K	
C508			CK73HB1A104K	CHIP C 0.10UF K		C729			CC73HCH1H020B	CHIP C 2.0PF B	
C509			CK73GB1E105K	CHIP C 1.0UF K		C730			CK73HB1A104K	CHIP C 0.10UF K	
C515			CK73GB1E105K	CHIP C 1.0UF K		C732			CK73HB1H102K	CHIP C 1000PF K	
C516			CK73HB1H102K	CHIP C 1000PF K		C733-741			CK73HB1A104K	CHIP C 0.10UF K	
C517			CK73HB1A104K	CHIP C 0.10UF K		C742			CK73FB0J106K	CHIP C 10UF K	
C519			CK73HB1C473K	CHIP C 0.047UF K		C743,744			CK73HB1A104K	CHIP C 0.10UF K	
C520			CK73GB1E105K	CHIP C 1.0UF K		C746-750			CK73GB1E105K	CHIP C 1.0UF K	
C521			CK73HB1E103K	CHIP C 0.010UF K		C751			CK73HB1E103K	CHIP C 0.010UF K	
C522-525			CK73HB1A104K	CHIP C 0.10UF K		C754-758			CK73HB1A104K	CHIP C 0.10UF K	
C526-529			CK73FB0J106K	CHIP C 10UF K		C767,768			CK73HB1H102K	CHIP C 1000PF K	
C531			CK73HB1H102K	CHIP C 1000PF K		C769			CK73FB0J106K	CHIP C 10UF K	
C532			CK73HB1A104K	CHIP C 0.10UF K		C770-773			CK73HB1A104K	CHIP C 0.10UF K	
C533-536			CK73HB1H102K	CHIP C 1000PF K		C775			CK73HB1H102K	CHIP C 1000PF K	
C537			CK73FB0J106K	CHIP C 10UF K		C776-780			CK73HB1E103K	CHIP C 0.010UF K	
C538,539			CK73HB1H102K	CHIP C 1000PF K		C781			CK73HB1A104K	CHIP C 0.10UF K	
C543			CK73FB0J106K	CHIP C 10UF K		C782,783			CC73HCH1H120G	CHIP C 12PF G	
C544-546			CK73HB1H102K	CHIP C 1000PF K		C784,785			CK73HB1A104K	CHIP C 0.10UF K	
C547			CK73FB0J106K	CHIP C 10UF K		C786			CC73HCH1H150J	CHIP C 15PF J	
C548			CK73HB1E103K	CHIP C 0.010UF K		C787			CC73HCH1H100D	CHIP C 10PF D	
C549			CC73HCH1H120G	CHIP C 12PF G		C788			CK73FB0J106K	CHIP C 10UF K	
C550,551			CC73HCH1H100D	CHIP C 10PF D		C789-793			CK73HB1A104K	CHIP C 0.10UF K	
C552			CC73HCH1H150J	CHIP C 15PF J		C794			CK73FB0J106K	CHIP C 10UF K	
C553			CK73HB1E103K	CHIP C 0.010UF K		C795			CK73HB1A104K	CHIP C 0.10UF K	
C557			CK73HB1H102K	CHIP C 1000PF K		C796,797			CK73HB1E103K	CHIP C 0.010UF K	
C565			CK73FB0J106K	CHIP C 10UF K		C798			CK73HB1A104K	CHIP C 0.10UF K	
C566			CK73HB1H102K	CHIP C 1000PF K		C799,800			CK73HB1E103K	CHIP C 0.010UF K	
C567			CK73HB1E103K	CHIP C 0.010UF K		C801			CK73HB1H102K	CHIP C 1000PF K	
C569			CE32AU1C330M	CHIP EL 33UF 16WV		C802,803			CK73HB1A104K	CHIP C 0.10UF K	
C570,571			CK73HB1H102K	CHIP C 1000PF K		C804			CK73FB0J106K	CHIP C 10UF K	
C572			CE32BM1E470M	CHIP EL 47UF 25WV		C805-807			CK73HB1E103K	CHIP C 0.010UF K	
C574			CK73HB1H102K	CHIP C 1000PF K		C808			CK73HB1H102K	CHIP C 1000PF K	

PARTS LIST

CONTROL UNIT (X53-4140-10)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
C809			CK73HB1A104K	CHIP C 0.10UF K		R309			RK73HB1J000J	CHIP R 0 J 1/16W	
C812			CK73HB1A104K	CHIP C 0.10UF K		R311-317			RK73HB1J000J	CHIP R 0 J 1/16W	
C813-815			CK73HB1H102K	CHIP C 1000PF K		R318,319			RK73HB1J101J	CHIP R 100 J 1/16W	
C816-818			CK73HB1A104K	CHIP C 0.10UF K		R320-337			RK73HB1J000J	CHIP R 0 J 1/16W	
C819			CK73HB1H102K	CHIP C 1000PF K		R339			RK73HB1J473J	CHIP R 47K J 1/16W	
C820,821			CK73HB1A104K	CHIP C 0.10UF K		R340-350			RK73HB1J000J	CHIP R 0 J 1/16W	
C822			CK73HB1H102K	CHIP C 1000PF K		R352-354			RK73HB1J000J	CHIP R 0 J 1/16W	
C825			CK73HB1H102K	CHIP C 1000PF K		R356-360			RK73HB1J000J	CHIP R 0 J 1/16W	
C826,827			CC73HCH1H101J	CHIP C 100PF J		R361			RK73GB2A104J	CHIP R 100K J 1/10W	
C828			CK73HB1H102K	CHIP C 1000PF K		R362			RK73GB2A681J	CHIP R 680 J 1/10W	
C829			CC73HCH1H101J	CHIP C 100PF J		R363-386			RK73HB1J000J	CHIP R 0 J 1/16W	
C830			CK73HB1H102K	CHIP C 1000PF K		R387			RK73HB1J104J	CHIP R 100K J 1/16W	
C831			CC73HCH1H101J	CHIP C 100PF J		R388-390			RK73GB2A000J	CHIP R 0 J 1/10W	
C832			CK73HB1H102K	CHIP C 1000PF K		R391			RK73GB2A100J	CHIP R 10 J 1/10W	
C833,834			CK73HB1A104K	CHIP C 0.10UF K		R392			RK73HB1J103J	CHIP R 10K J 1/16W	
C835-837			CK73HB1H102K	CHIP C 1000PF K		R393-397			RK73HB1J000J	CHIP R 0 J 1/16W	
C838,839			CC73HCH1H101J	CHIP C 100PF J		R398			RK73HB1J104J	CHIP R 100K J 1/16W	
C841-848			CC73GCH1H470J	CHIP C 47PF J		R399			RK73HB1J151J	CHIP R 150 J 1/16W	
C850			CC73GCH1H470J	CHIP C 47PF J		R401			RK73HB1J000J	CHIP R 0 J 1/16W	
C851-869			CC73HCH1H470J	CHIP C 47PF J		R403			RK73GB2A000J	CHIP R 0 J 1/10W	
C870-873			CK73HB1H102K	CHIP C 1000PF K		R404,405			RK73HB1J000J	CHIP R 0 J 1/16W	
CN300			E04-0193-05	PIN SOCKET		R406			RK73GB2A000J	CHIP R 0 J 1/10W	
CN302			E04-0193-05	PIN SOCKET		R408,409			RK73HB1J000J	CHIP R 0 J 1/16W	
CN400-402			E40-6656-05	PIN ASSY(36P)		R410			RK73GB2A103J	CHIP R 10K J 1/10W	
CN713			E41-2263-05	PIN ASSY(9P)		R411			RK73GB2A472J	CHIP R 4.7K J 1/10W	
J700			E58-0516-05	MODULAR JACK(LAN)		R413			RK73GB2A103J	CHIP R 10K J 1/10W	
J701			E58-0543-05	RECTANGULAR RECEPTACLE		R414			RK73HB1J000J	CHIP R 0 J 1/16W	
J702,703			E58-0533-05	MODULAR JACK(SYNC)		R415			RK73HB1J100J	CHIP R 10 J 1/16W	
L300-307			L92-0447-05	BEADS CORE		R416			RK73HB1J104J	CHIP R 100K J 1/16W	
L308,309			L41-8285-33	SMALL FIXED INDUCTOR(0.82UH)		R417			RK73HB1J000J	CHIP R 0 J 1/16W	
L310			L41-1005-33	SMALL FIXED INDUCTOR(10UH)		R418,419			RK73GB2A104J	CHIP R 100K J 1/10W	
L311,312			L41-1595-33	SMALL FIXED INDUCTOR(1.5UH)		R420			RK73HB1J000J	CHIP R 0 J 1/16W	
L313-316			L92-0447-05	BEADS CORE		R421			RK73HB1J100J	CHIP R 10 J 1/16W	
L317,318			L33-1500-05	CHOKE COIL		R423			RK73HB1J000J	CHIP R 0 J 1/16W	
L319-325			L92-0447-05	BEADS CORE		R424			RK73GB2A681J	CHIP R 680 J 1/10W	
L326-331			L92-0467-05	CHIP FERRITE		R425			RK73HB1J000J	CHIP R 0 J 1/16W	
X300			L77-1988-05	VCXO(12.288MHZ)		R428			RK73GB2A100J	CHIP R 10 J 1/10W	
X301			L77-1984-05	CRYSTAL RESONATOR(14.7456MHZ)		R429			RK73GB2A471J	CHIP R 470 J 1/10W	
X700			L77-1985-05	CRYSTAL RESONATOR(25.8048MHZ)		R431			RK73HB1J000J	CHIP R 0 J 1/16W	
X701			L77-1802-05	CRYSTAL RESONATOR(32.768KHZ)		R432			RK73GB2A220J	CHIP R 22 J 1/10W	
X702			L77-1986-05	CRYSTAL RESONATOR(25MHZ)		R433			RK73HB1J105J	CHIP R 1.0M J 1/16W	
CP7 -11			RK75HA1J104J	CHIP-COM 100K J 1/16W		R438			RK73GB2A100J	CHIP R 10 J 1/10W	
CP13			RK75HA1J104J	CHIP-COM 100K J 1/16W		R439,440			RK73GB2A220J	CHIP R 22 J 1/10W	
CP14-16			RK75HA1JR00J	CHIP-COM 0 J 1/16W		R441			RK73HB1J823J	CHIP R 82K J 1/16W	
CP18			RK75HA1JR00J	CHIP-COM 0 J 1/16W		R442			RK73HB1J683J	CHIP R 68K J 1/16W	
CP20			RK75HA1JR00J	CHIP-COM 0 J 1/16W		R445			RK73HB1J393J	CHIP R 39K J 1/16W	
CP37			RK75HA1JR00J	CHIP-COM 0 J 1/16W		R446,447			RK73HB1J000J	CHIP R 0 J 1/16W	
CP43			RK75HA1JR00J	CHIP-COM 0 J 1/16W		R448			RK73GB2A221J	CHIP R 220 J 1/10W	
CP47			RK75HA1JR00J	CHIP-COM 0 J 1/16W		R449			RK73HB1J683J	CHIP R 68K J 1/16W	
CP50			RK75HA1JR00J	CHIP-COM 0 J 1/16W		R451			RK73HB1J473J	CHIP R 47K J 1/16W	
CP60			RK75HA1JR00J	CHIP-COM 0 J 1/16W		R452-454			RK73HB1J100J	CHIP R 10 J 1/16W	
CP62			RK75HA1JR00J	CHIP-COM 0 J 1/16W		R457-461			RK73HB1J473J	CHIP R 47K J 1/16W	
CP68			RK75HA1JR00J	CHIP-COM 0 J 1/16W		R464			RK73HB1J472J	CHIP R 4.7K J 1/16W	
CP75-78			RK75HA1JR00J	CHIP-COM 0 J 1/16W		R469			RK73HB1J470J	CHIP R 47 J 1/16W	
CP83-98			RK75HA1J390J	CHIP-COM 39 J 1/16W		R470			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R300,301			RK73GB2A000J	CHIP R 0 J 1/10W		R474			RK73HB1J100J	CHIP R 10 J 1/16W	
R302			RK73HB1J000J	CHIP R 0 J 1/16W		R478			RK73HB1J100J	CHIP R 10 J 1/16W	
R303			RK73GB2A000J	CHIP R 0 J 1/10W		R479			RK73HB1J102J	CHIP R 1.0K J 1/16W	
						R480			RK73HB1J100J	CHIP R 10 J 1/16W	
						R481			RK73HB1J473J	CHIP R 47K J 1/16W	

PARTS LIST

CONTROL UNIT (X53-4140-10)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
R483			RK73HB1J104J	CHIP R 100K J 1/16W		R641			RK73HB1J000J	CHIP R 0 J 1/16W	
R484			RK73HB1J000J	CHIP R 0 J 1/16W		R642			RK73HB1J101J	CHIP R 100 J 1/16W	
R485			RK73HB1J100J	CHIP R 10 J 1/16W		R643			RK73HB1J473J	CHIP R 47K J 1/16W	
R486-489			RK73HB1J000J	CHIP R 0 J 1/16W		R644			RK73HB1J000J	CHIP R 0 J 1/16W	
R491-505			RK73HB1J000J	CHIP R 0 J 1/16W		R646			RK73HB1J473J	CHIP R 47K J 1/16W	
R516-518			RK73HB1J473J	CHIP R 47K J 1/16W		R648			RK73HB1J000J	CHIP R 0 J 1/16W	
R521			RK73HB1J000J	CHIP R 0 J 1/16W		R649			RK73HB1J101J	CHIP R 100 J 1/16W	
R522			RK73HB1J473J	CHIP R 47K J 1/16W		R650			RK73HB1J473J	CHIP R 47K J 1/16W	
R526			RK73HB1J000J	CHIP R 0 J 1/16W		R651-653			RK73HB1J000J	CHIP R 0 J 1/16W	
R527			RK73HB1J473J	CHIP R 47K J 1/16W		R656,657			RK73HB1J000J	CHIP R 0 J 1/16W	
R528,529			RK73HB1J000J	CHIP R 0 J 1/16W		R660-664			RK73HB1J000J	CHIP R 0 J 1/16W	
R530			RK73HB1J473J	CHIP R 47K J 1/16W		R667,668			RK73HB1J000J	CHIP R 0 J 1/16W	
R531,532			RK73HB1J000J	CHIP R 0 J 1/16W		R672-674			RK73HB1J473J	CHIP R 47K J 1/16W	
R533,534			RK73HB1J473J	CHIP R 47K J 1/16W		R678,679			RK73HB1J000J	CHIP R 0 J 1/16W	
R535-539			RK73HB1J000J	CHIP R 0 J 1/16W		R680			RK73HB1J473J	CHIP R 47K J 1/16W	
R540-542			RK73HB1J473J	CHIP R 47K J 1/16W		R685-687			RK73HB1J000J	CHIP R 0 J 1/16W	
R543			RK73HB1J000J	CHIP R 0 J 1/16W		R690			RK73HB1J000J	CHIP R 0 J 1/16W	
R546			RK73HB1J000J	CHIP R 0 J 1/16W		R700,701			RK73HB1J103J	CHIP R 10K J 1/16W	
R547,548			RK73HB1J473J	CHIP R 47K J 1/16W		R702,703			RK73HB1J473J	CHIP R 47K J 1/16W	
R549			RK73HB1J000J	CHIP R 0 J 1/16W		R709,710			RK73HB1J104J	CHIP R 100K J 1/16W	
R550			RK73HB1J473J	CHIP R 47K J 1/16W		R711			RK73GB2A000J	CHIP R 0 J 1/10W	
R551,552			RK73HB1J000J	CHIP R 0 J 1/16W		R712-714			RK73HB1J100J	CHIP R 10 J 1/16W	
R553-555			RK73HB1J473J	CHIP R 47K J 1/16W		R715			RK73GB2A000J	CHIP R 0 J 1/10W	
R556,557			RK73HB1J000J	CHIP R 0 J 1/16W		R716			RK73HB1J000J	CHIP R 0 J 1/16W	
R559			RK73HB1J102J	CHIP R 1.0K J 1/16W		R718			RK73HB1J104J	CHIP R 100K J 1/16W	
R560			RK73HB1J103J	CHIP R 10K J 1/16W		R719			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R561			RK73HB1J000J	CHIP R 0 J 1/16W		R720			RK73HB1J100J	CHIP R 10 J 1/16W	
R562			RK73HB1J103J	CHIP R 10K J 1/16W		R721			RK73GB2A000J	CHIP R 0 J 1/10W	
R564-566			RK73HB1J000J	CHIP R 0 J 1/16W		R722			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R567			RK73HB1J473J	CHIP R 47K J 1/16W		R725,726			RK73HB1J000J	CHIP R 0 J 1/16W	
R568			RK73HB1J000J	CHIP R 0 J 1/16W		R727			RK73HB1J103J	CHIP R 10K J 1/16W	
R569			RK73HB1J224J	CHIP R 220K J 1/16W		R729,730			RK73HB1J000J	CHIP R 0 J 1/16W	
R570			RK73HB1J000J	CHIP R 0 J 1/16W		R731			RK73HB1J103J	CHIP R 10K J 1/16W	
R573-576			RK73HB1J000J	CHIP R 0 J 1/16W		R732			RK73HB1J390J	CHIP R 39 J 1/16W	
R577,578			RK73HB1J473J	CHIP R 47K J 1/16W		R733			RK73HB1J104J	CHIP R 100K J 1/16W	
R579			RK73HB1J000J	CHIP R 0 J 1/16W		R734			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R581			RK73HB1J000J	CHIP R 0 J 1/16W		R735,736			RK73HB1J000J	CHIP R 0 J 1/16W	
R582			RK73HB1J473J	CHIP R 47K J 1/16W		R738			RK73HB1J104J	CHIP R 100K J 1/16W	
R583			RK73HB1J000J	CHIP R 0 J 1/16W		R742			RK73HB1J104J	CHIP R 100K J 1/16W	
R584			RK73HB1J473J	CHIP R 47K J 1/16W		R743,744			RK73HB1J153J	CHIP R 15K J 1/16W	
R585,586			RK73HB1J000J	CHIP R 0 J 1/16W		R745			RK73HB1J104J	CHIP R 100K J 1/16W	
R587			RK73HB1J473J	CHIP R 47K J 1/16W		R754			RK73HB1J103J	CHIP R 10K J 1/16W	
R588			RK73HB1J000J	CHIP R 0 J 1/16W		R756			RK73HB1J000J	CHIP R 0 J 1/16W	
R589			RK73HB1J473J	CHIP R 47K J 1/16W		R758			RK73HB1J103J	CHIP R 10K J 1/16W	
R590			RK73HB1J000J	CHIP R 0 J 1/16W		R759			RK73HB1J000J	CHIP R 0 J 1/16W	
R591			RK73HB1J223J	CHIP R 22K J 1/16W		R760			RK73HB1J103J	CHIP R 10K J 1/16W	
R592-600			RK73HB1J000J	CHIP R 0 J 1/16W		R761-765			RK73GB2A000J	CHIP R 0 J 1/10W	
R602			RK73HB1J103J	CHIP R 10K J 1/16W		R766			RK73HB1J000J	CHIP R 0 J 1/16W	
R604			RK73HB1J103J	CHIP R 10K J 1/16W		R767			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R605-610			RK73HB1J000J	CHIP R 0 J 1/16W		R768-770			RK73HB1J000J	CHIP R 0 J 1/16W	
R612-616			RK73HB1J000J	CHIP R 0 J 1/16W		R772-777			RK73HB1J104J	CHIP R 100K J 1/16W	
R620-623			RK73HB1J000J	CHIP R 0 J 1/16W		R779			RK73HB1J104J	CHIP R 100K J 1/16W	
R624			RK73HB1J473J	CHIP R 47K J 1/16W		R780			RK73HB1J000J	CHIP R 0 J 1/16W	
R626			RK73HB1J473J	CHIP R 47K J 1/16W		R781-784			RK73HB1J104J	CHIP R 100K J 1/16W	
R627			RK73HB1J000J	CHIP R 0 J 1/16W		R785			RK73HB1J272J	CHIP R 2.7K J 1/16W	
R629-631			RK73HB1J000J	CHIP R 0 J 1/16W		R786-788			RK73HB1J104J	CHIP R 100K J 1/16W	
R632			RK73HB1J101J	CHIP R 100 J 1/16W		R794			RK73HB1J104J	CHIP R 100K J 1/16W	
R634			RK73HB1J473J	CHIP R 47K J 1/16W		R796			RK73HB1J104J	CHIP R 100K J 1/16W	
R635,636			RK73HB1J000J	CHIP R 0 J 1/16W		R799-803			RK73HB1J104J	CHIP R 100K J 1/16W	
R637-640			RK73HB1J473J	CHIP R 47K J 1/16W		R805-808			RK73HB1J103J	CHIP R 10K J 1/16W	

PARTS LIST

CONTROL UNIT (X53-4140-10)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
R816			RK73HB1J105J	CHIP R 1.0M J 1/16W		R960			RK73GB2A000J	CHIP R 0 J 1/10W	
R817			RK73HB1J821J	CHIP R 820 J 1/16W		R970,971			RK73HB1J000J	CHIP R 0 J 1/16W	
R818			RK73HB1J104J	CHIP R 100K J 1/16W		S700			S79-0473-05	DIP SWITCHES	
R820			RK73HB1J103J	CHIP R 10K J 1/16W		D300			1SS388F	DIODE	
R821			RK73HB1J000J	CHIP R 0 J 1/16W		D701			1SS388F	DIODE	
R822			RK73HB1J103J	CHIP R 10K J 1/16W		D702			1SS355	DIODE	
R824			RK73HB1J103J	CHIP R 10K J 1/16W		IC300,301			TC7SET126FU-F	MOS-IC	
R826			RK73HB1J103J	CHIP R 10K J 1/16W		IC302			ISL8485EIBZ	MOS-IC	
R828			RK73HB1J104J	CHIP R 100K J 1/16W		IC303			BU4829FVE	MOS-IC	
R829			RK73HH1J113D	CHIP R 11K D 1/16W		IC304			TC7SH125FU-F	MOS-IC	
R830			RK73HB1J104J	CHIP R 100K J 1/16W		IC305			XC6209B332P-G	MOS-IC	
R832			RK73HB1J104J	CHIP R 100K J 1/16W		IC306			BA15BC0FP	MOS-IC	
R833			RK73HB1J000J	CHIP R 0 J 1/16W		IC307		*	XC6201P152P-G	MOS-IC	
R834			RK73HB1J104J	CHIP R 100K J 1/16W		IC308		*	XC61CN2702N-G	MOS-IC	
R835			RK73HB1J000J	CHIP R 0 J 1/16W		IC309			AK4550VTP	MOS-IC	
R837			RK73GH2A49R9D	CHIP R 49.9 D 1/10W		IC312			ADCS7476AIMF	MOS-IC	
R839			RK73GB2A000J	CHIP R 0 J 1/10W		IC313			TC7WU04FK-F	MOS-IC	
R840			RK73GH2A49R9D	CHIP R 49.9 D 1/10W		IC314			Note 1(BGA)	ROM IC	
R842-845			RK73HB1J104J	CHIP R 100K J 1/16W		IC315			ADF4001BRUZ	MOS-IC	
R867,868			RK73GH2A24R9D	CHIP R 24.9 D 1/10W		IC318			TC7SH126FU-F	MOS-IC	
R869			RK73HB1J331J	CHIP R 330 J 1/16W		IC319-321			TC7SET126FU-F	MOS-IC	
R870			RK73HB1J000J	CHIP R 0 J 1/16W		IC323,324			Note 1(BGA)	MICROPROCESSOR IC	
R871-873			RK73HB1J103J	CHIP R 10K J 1/16W		IC325		*	30625MGP490GU	MICROPROCESSOR IC	
R874			RK73HB1J000J	CHIP R 0 J 1/16W		IC327			TC7SH08FU-F	MOS-IC	
R875,876			RK73GH2A24R9D	CHIP R 24.9 D 1/10W		IC329	1C		BA33DD0WT	MOS-IC	
R877,878			RK73HB1J103J	CHIP R 10K J 1/16W		IC330			TC7SH126FU-F	MOS-IC	
R879			RK73GB2A000J	CHIP R 0 J 1/10W		IC700			L102616LL70LI	SRAM IC	
R880,881			RK73HB1J104J	CHIP R 100K J 1/16W		IC701			RV5C386A	MOS-IC	
R884,885			RK73HB1J000J	CHIP R 0 J 1/16W		IC702			29PL127JKCDC	ROM IC	
R886			RK73HB1J221J	CHIP R 220 J 1/16W		IC703			Note 1(BGA)	MICROPROCESSOR IC	
R887			RK73HB1J000J	CHIP R 0 J 1/16W		IC704		*	EM639165TS6IG	DRAM IC	
R888			RK73HB1J221J	CHIP R 220 J 1/16W		IC705			ADM3202ARUZ	MOS-IC	
R889			RK73HB1J103J	CHIP R 10K J 1/16W		IC707		*	EM639165TS6IG	DRAM IC	
R890			RK73HB1J000J	CHIP R 0 J 1/16W		IC708			BU4829FVE	MOS-IC	
R891			RK73HB1J104J	CHIP R 100K J 1/16W		IC709			TC7SH126FU-F	MOS-IC	
R892,893			RK73HB1J000J	CHIP R 0 J 1/16W		IC710,711			TC7SH00FU-F	MOS-IC	
R894			RK73HB1J103J	CHIP R 10K J 1/16W		IC712,713			TC7SH32FU-F	MOS-IC	
R895			RK73HB1J151J	CHIP R 150 J 1/16W		IC714-716		*	TC74LCX244FK	MOS-IC	
R896			RK73HB1J101J	CHIP R 100 J 1/16W		IC717,718			TC74LCX245FK	MOS-IC	
R897			RK73HB1J104J	CHIP R 100K J 1/16W		IC719			LAN91C111I-NU	MOS-IC	
R902,903			RK73HB1J000J	CHIP R 0 J 1/16W		IC720		*	AT93C46DN-SH	ROM IC	
R907			RK73HB1J000J	CHIP R 0 J 1/16W		IC721			TC7SH08FU-F	MOS-IC	
R909			RK73HB1J000J	CHIP R 0 J 1/16W		IC722			TC7SH32FU-F	MOS-IC	
R910			RK73HB1J473J	CHIP R 47K J 1/16W		IC723			TC7SH00FU-F	MOS-IC	
R911			RK73HB1J000J	CHIP R 0 J 1/16W		IC724			TC7SH125FU-F	MOS-IC	
R912			RK73HB1J473J	CHIP R 47K J 1/16W		IC725			TC7SH126FU-F	MOS-IC	
R913,914			RK73HB1J000J	CHIP R 0 J 1/16W		IC726			TC7SH08FU-F	MOS-IC	
R915			RK73HB1J473J	CHIP R 47K J 1/16W		IC727,728			TC7SH126FU-F	MOS-IC	
R916,917			RK73HB1J000J	CHIP R 0 J 1/16W		Q300			2SC4738F	TRANSISTOR	
R919-923			RK73HB1J000J	CHIP R 0 J 1/16W		Q301		*	LTC014EUBFS8	TRANSISTOR	
R924			RK73HB1J104J	CHIP R 100K J 1/16W		Q302			2SA1955A-F	TRANSISTOR	
R926			RK73HB1J473J	CHIP R 47K J 1/16W		Q303			RT1P441M-T111	TRANSISTOR	
R927-933			RK73HB1J000J	CHIP R 0 J 1/16W		Q304,305			2SC4738F	TRANSISTOR	
R934,935			RK73HB1J474J	CHIP R 470K J 1/16W		Q307,308			2SC4738F	TRANSISTOR	
R936			RK73HB1J104J	CHIP R 100K J 1/16W		Q309			SSM6N16FE-F	FET	
R942			RK73HB1J104J	CHIP R 100K J 1/16W		Q700			2SC4738F	TRANSISTOR	
R943			RK73HB1J000J	CHIP R 0 J 1/16W		Q702			2SC4738F	TRANSISTOR	
R945-950			RK73HB1J000J	CHIP R 0 J 1/16W		Q704,705			2SC4738F	TRANSISTOR	
R951			RK73HB1J104J	CHIP R 100K J 1/16W							
R952,953			RK73HB1J000J	CHIP R 0 J 1/16W							

PARTS LIST

CONTROL UNIT (X53-4140-10)
RX UNIT (X55-3120-11)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
Q706 Q707 BA300		* *	LTC014EUBFS8 LTC044EUBFS8 W09-1004-05	TRANSISTOR TRANSISTOR LITHIUM CELL		C68 C70 C71 ,72 C73 C74			CC73GCH1H080B CC73GCH1H060B CC73GCH1H040B CC73GCH1H0R5C CC73GCH1H050B	CHIP C 8.0PF B CHIP C 6.0PF B CHIP C 4.0PF B CHIP C 0.5PF C CHIP C 5.0PF B	
RX UNIT (X55-3120-11)						C76 C77 C78 C79 C81			CK73GB1H104K CC73GCH1H471J CS77CC1C330M CC73GCH1H080B CC73GCH1H060B	CHIP C 0.10UF K CHIP C 470PF J CHIP TNTL 33UF 16WV CHIP C 8.0PF B CHIP C 6.0PF B	
D6			B30-2230-05	LED(YG)		C83 C84 C85 C86 ,87 C88			CC73GCH1H040B CK73GB1E105K CK73GB1H104K CC73GCH1H471J CK73GB1H104K	CHIP C 4.0PF B CHIP C 1.0UF K CHIP C 0.10UF K CHIP C 470PF J CHIP C 0.10UF K	
C1 C2 ,3 C4 C5 C6			CC73GCH1H471J CK73GB1H473K CC73GCH1H820J CK73GB1H473K CK73GB1H104K	CHIP C 470PF J CHIP C 0.047UF K CHIP C 82PF J CHIP C 0.047UF K CHIP C 0.10UF K		C89 C90 C91 C92 C93 ,94			CC73GCH1H471J CC73GCH1H470J CK73GB1H104K CC73GCH1H050B CC73GCH1H470J	CHIP C 470PF J CHIP C 47PF J CHIP C 0.10UF K CHIP C 5.0PF B CHIP C 47PF J	
C7 ,8 C9 ,10 C11 C14 C18			CC73GCH1H471J CK73GB1H473K CC73GCH1H221J CC73GCH1H331J CC73GCH1H181J	CHIP C 470PF J CHIP C 0.047UF K CHIP C 220PF J CHIP C 330PF J CHIP C 180PF J		C95 ,96 C97 C98 C99 C100			CC73GCH1H471J CC73GCH1H070B CC73GCH1H080B CS77CC1C330M CK73GB1H104K	CHIP C 470PF J CHIP C 7.0PF B CHIP C 8.0PF B CHIP TNTL 33UF 16WV CHIP C 0.10UF K	
C19 C20 C21 C23 C24			CK73GB1H473K CK73FB1E224K CS77BA1E010M CS77CB21C220M CS77CC1C330M	CHIP C 0.047UF K CHIP C 0.22UF K CHIP TNTL 1.0UF 25WV CHIP TNTL 22UF 16WV CHIP TNTL 33UF 16WV		C101 C103 C104 ,105 C106 C107			CC73GCH1H471J CE32AU1E100M CK73GB1H104K CC73GCH1H470J CK73GB1H103K	CHIP C 470PF J CHIP EL 10UF 25WV CHIP C 0.10UF K CHIP C 47PF J CHIP C 0.010UF K	
C25 C27 C28 C29 ,30 C31			CC73GCH1H471J CK73GB1H103K CE32BM1E470M CC73GCH1H471J CK73GB1H473K	CHIP C 470PF J CHIP C 0.010UF K CHIP EL 47UF 25WV CHIP C 470PF J CHIP C 0.047UF K		C108 C109 C111 C112 C113			CC73GCH1H470J CC73GCH1H040B CK73GB1E105K CC73GCH1H471J CC73GCH1H100C	CHIP C 47PF J CHIP C 4.0PF B CHIP C 1.0UF K CHIP C 470PF J CHIP C 10PF C	
C32 C33 C34 C35 ,36 C37			CC73GCH1H101J CC73GCH1H470J CC73GCH1H101J CK73GB1H473K CS77CB21C220M	CHIP C 100PF J CHIP C 47PF J CHIP C 100PF J CHIP C 0.047UF K CHIP TNTL 22UF 16WV		C114 C115 ,116 C117 C119 C124			CC73GCH1H471J CC73GCH1H040B CC73GCH1H471J CC73GCH1H470J CC73GCH1H470J	CHIP C 470PF J CHIP C 4.0PF B CHIP C 470PF J CHIP C 47PF J CHIP C 47PF J	
C38 C39 C40 C41 C42			CS77CC1C330M CC73GCH1H060B CS77CA1VR15M CC73GCH1H010B CC73GCH1H030B	CHIP TNTL 33UF 16WV CHIP C 6.0PF B CHIP TNTL 0.15UF 35WV CHIP C 1.0PF B CHIP C 3.0PF B		C125 C126 C127 C128 C129			CC73GCH1H040B CK73GB1H104K CC73GCH1H471J CK73GB1H103K CC73GCH1H471J	CHIP C 4.0PF B CHIP C 0.10UF K CHIP C 470PF J CHIP C 0.010UF K CHIP C 470PF J	
C43 C44 C45 C46 C47			CC73GCH1H040B CK73GB1H104K CC73GCH1H471J C93-0787-05 CC73GCH1H471J	CHIP C 4.0PF B CHIP C 0.10UF K CHIP C 470PF J CHIP C 0.1UF J CHIP C 470PF J		C132 C133 ,134 C135 C137 C138			CK73GB1H104K CC73GCH1H470J CC73GCH1H471J CC73GCH1H100C CC73GCH1H471J	CHIP C 0.10UF K CHIP C 47PF J CHIP C 470PF J CHIP C 10PF C CHIP C 470PF J	
C48 C49 C50 C52 C54			CK73GB1H103K CE32BM1E470M CC73GCH1H471J CK73GB1H103K CC73GCH1H101J	CHIP C 0.010UF K CHIP EL 47UF 25WV CHIP C 470PF J CHIP C 0.010UF K CHIP C 100PF J		C139 C140 C141 C142 ,143 C144			CC73GCH1H030B CC73GCH1H040B CC73GCH1H030B CC73GCH1H040B CC73GCH1H120J	CHIP C 3.0PF B CHIP C 4.0PF B CHIP C 3.0PF B CHIP C 4.0PF B CHIP C 12PF J	
C55 C56 C58 C59 C60			CC73GCH1H040B CC73GCH1H060B CC73GCH1H101J CC73GCH1H470J CK73GB1H104K	CHIP C 4.0PF B CHIP C 6.0PF B CHIP C 100PF J CHIP C 47PF J CHIP C 0.10UF K		C146 C147 C201-203 C204 C206			CC73GCH1H150J CC73GCH1H040B CC73GCH1H470J CC73GCH1H030B CC73GCH1H470J	CHIP C 15PF J CHIP C 4.0PF B CHIP C 47PF J CHIP C 3.0PF B CHIP C 47PF J	
C61 C62 ,63 C64 C65 C66			CC73GCH1H101J CC73GCH1H470J CS77BA1E010M CC73GCH1H470J CC73GCH1H060B	CHIP C 100PF J CHIP C 47PF J CHIP TNTL 1.0UF 25WV CHIP C 47PF J CHIP C 6.0PF B							

PARTS LIST

RX UNIT (X55-3120-11)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
C209			CK73GB1H103K	CHIP C 0.010UF K		C375			CK73GB1H103K	CHIP C 0.010UF K	
C211,212			CC73GCH1H470J	CHIP C 47PF J		C378			CK73GB1H103K	CHIP C 0.010UF K	
C213			CK73GB1H104K	CHIP C 0.10UF K		C381			CK73GB1H103K	CHIP C 0.010UF K	
C214			CK73GB1H103K	CHIP C 0.010UF K		C383			CE32AU1C330M	CHIP EL 33UF 16WV	
C215			CC73GCH1H030B	CHIP C 3.0PF B		C386			CK73GB1H103K	CHIP C 0.010UF K	
C216			CC73GCH1H101J	CHIP C 100PF J		C388			CK73GB1H103K	CHIP C 0.010UF K	
C217			CC73GCH1H470J	CHIP C 47PF J		C389			CK73GB1H104K	CHIP C 0.10UF K	
C218			CK73GB1H104K	CHIP C 0.10UF K		C390			CK73GB1H103K	CHIP C 0.010UF K	
C219			CC73GCH1H101J	CHIP C 100PF J		C393			CK73FB1E474K	CHIP C 0.47UF K	
C220,221			CC73GCH1H470J	CHIP C 47PF J		C394			CK73GB1H103K	CHIP C 0.010UF K	
C222			CK73GB1H103K	CHIP C 0.010UF K		C396			CK73GB1H103K	CHIP C 0.010UF K	
C224,225			CC73GCH1H470J	CHIP C 47PF J		C397			CC73GCH1H680G	CHIP C 68PF G	
C226			CK73GB1H103K	CHIP C 0.010UF K		C398-400			CK73GB1H103K	CHIP C 0.010UF K	
C229			CC73GCH1H470J	CHIP C 47PF J		C404			CK73GB1H103K	CHIP C 0.010UF K	
C230,231			CK73GB1H103K	CHIP C 0.010UF K		C405,406			CC73GCH1H330G	CHIP C 33PF G	
C233			CK73GB1H104K	CHIP C 0.10UF K		C407			CK73FB1E474K	CHIP C 0.47UF K	
C234			CK73GB1H103K	CHIP C 0.010UF K		C409,410			CK73FB1E474K	CHIP C 0.47UF K	
C235			CK73GB1H104K	CHIP C 0.10UF K		C411			CC73GCH1H221J	CHIP C 220PF J	
C236-239			CC73GCH1H470J	CHIP C 47PF J		C413			CK73FB1E474K	CHIP C 0.47UF K	
C240			CK73GB1H103K	CHIP C 0.010UF K		C414			CC73GCH1H221J	CHIP C 220PF J	
C242,243			CC73GCH1H470J	CHIP C 47PF J		C415			CK73GB1H102K	CHIP C 1000PF K	
C244			CC73HCH1H100C	CHIP C 10PF C		C416			CC73GCH1H471J	CHIP C 470PF J	
C245			CC73GCH1H101J	CHIP C 100PF J		C417			CK73FB1E474K	CHIP C 0.47UF K	
C246			CC73GCH1H470J	CHIP C 47PF J		C419			CK73FB1E474K	CHIP C 0.47UF K	
C247			CC73HCH1H100C	CHIP C 10PF C		C420			CK73GB1H103K	CHIP C 0.010UF K	
C250			CC73GCH1H101J	CHIP C 100PF J		C421,422			CK73FB1E474K	CHIP C 0.47UF K	
C251			CC73GCH1H470J	CHIP C 47PF J		C424			CK73GB1H104K	CHIP C 0.10UF K	
C252			CK73GB1H103K	CHIP C 0.010UF K		C426			CK73FB1E474K	CHIP C 0.47UF K	
C253,254			CC73GCH1H470J	CHIP C 47PF J		C427			CC73GCH1H100C	CHIP C 10PF C	
C256			CK73GB1E154K	CHIP C 0.15UF K		C428			CK73FB1E474K	CHIP C 0.47UF K	
C257			CK73GB1H103K	CHIP C 0.010UF K		C429			CK73GB1H102K	CHIP C 1000PF K	
C258			CC73GCH1H470J	CHIP C 47PF J		C430			CE32AU1E100M	CHIP EL 10UF 25WV	
C259-262			CK73GB1H103K	CHIP C 0.010UF K		C431			CK73FB1H333K	CHIP C 0.033UF K	
C263			CC73GCH1H120J	CHIP C 12PF J		C432			CK73FB1E474K	CHIP C 0.47UF K	
C264			CK73GB1H103K	CHIP C 0.010UF K		C434			C93-1824-05	CHIP C 100UF M	
C266			CC73GCH1H101J	CHIP C 100PF J		C435			CK73FB1E474K	CHIP C 0.47UF K	
C267			CK73GB1H103K	CHIP C 0.010UF K		C436			CC73GCH1H101J	CHIP C 100PF J	
C269			CK73GB1H103K	CHIP C 0.010UF K		C439			CK73FB1E474K	CHIP C 0.47UF K	
C270			CK73GB1H104K	CHIP C 0.10UF K		C440			CK73FB0J106K	CHIP C 10UF K	
C271-274			CK73GB1H103K	CHIP C 0.010UF K		C441			CK73GB1H102K	CHIP C 1000PF K	
C281,282			CK73GB1H103K	CHIP C 0.010UF K		C442			CK73FB1H333K	CHIP C 0.033UF K	
C284			CC73GCH1H180G	CHIP C 18PF G		C446			CK73GB1H103K	CHIP C 0.010UF K	
C288			CC73GCH1H150J	CHIP C 15PF J		C447,448			CK73GB1H104K	CHIP C 0.10UF K	
C289			CK73GB1H103K	CHIP C 0.010UF K		C449			CK73FB1H333K	CHIP C 0.033UF K	
C296			CC73GCH1H220G	CHIP C 22PF G		C450			CC73GCH1H150J	CHIP C 15PF J	
C298			CC73GCH1H680G	CHIP C 68PF G		C452			CC73GCH1H270G	CHIP C 27PF G	
C299			CK73GB1H103K	CHIP C 0.010UF K		C453			CC73GCH1H100C	CHIP C 10PF C	
C306,307			CC73GCH1H330G	CHIP C 33PF G		C501,502			CK73GB1H103K	CHIP C 0.010UF K	
C313			CK73GB1H103K	CHIP C 0.010UF K		C503			CC73GCH1H270G	CHIP C 27PF G	
C315			CK73GB1H473K	CHIP C 0.047UF K		C504			CK73GB1H103K	CHIP C 0.010UF K	
C318			CK73GB1H104K	CHIP C 0.10UF K		C505			CK73GB1H473K	CHIP C 0.047UF K	
C322			CK73FB1E474K	CHIP C 0.47UF K		C506			CK73GB1H104K	CHIP C 0.10UF K	
C325			CC73GCH1H150J	CHIP C 15PF J		C507			CK73FB1E474K	CHIP C 0.47UF K	
C327			CK73GB1H103K	CHIP C 0.010UF K		C508			CK73GB1H103K	CHIP C 0.010UF K	
C330			CK73GB1H104K	CHIP C 0.10UF K		C509			CK73FB1E474K	CHIP C 0.47UF K	
C333			CK73GB1H104K	CHIP C 0.10UF K		C510			CK73GB1H473K	CHIP C 0.047UF K	
C335			CK73GB1H103K	CHIP C 0.010UF K		C511			CK73FB1E474K	CHIP C 0.47UF K	
C339			CK73GB1H103K	CHIP C 0.010UF K		C512,513			CK73GB1H104K	CHIP C 0.10UF K	
C370			CK73GB1H103K	CHIP C 0.010UF K		C515			CK73GB1H473K	CHIP C 0.047UF K	
C374			CE32AU1C330M	CHIP EL 33UF 16WV		C516,517			CK73FB1E474K	CHIP C 0.47UF K	

PARTS LIST

RX UNIT (X55-3120-11)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
C518,519			CK73GB1H473K	CHIP C 0.047UF K		C667			CC73GCH1H060B	CHIP C 6.0PF B	
C520			CK73GB1H104K	CHIP C 0.10UF K		C670			CC73GCH1H680G	CHIP C 68PF G	
C521			CK73FB1E474K	CHIP C 0.47UF K		C671			CK73GB1H473K	CHIP C 0.047UF K	
C522,523			CK73GB1H104K	CHIP C 0.10UF K		C672			CC73GCH1H220G	CHIP C 22PF G	
C524			CC73GCH1H470J	CHIP C 47PF J		C673			CC73GCH1H020B	CHIP C 2.0PF B	
C525			CC73GCH1H471J	CHIP C 470PF J		C674,675			CS77CC1C330M	CHIP TNTL 33UF 16WV	
C526			CK73GB1E105K	CHIP C 1.0UF K		C676			CK73GB1H102K	CHIP C 1000PF K	
C527			CK73GB1H104K	CHIP C 0.10UF K		C677			CC73GCH1H330G	CHIP C 33PF G	
C528			CC73GCH1H471J	CHIP C 470PF J		C679			CC73GCH1H330G	CHIP C 33PF G	
C529			CK73GB1E105K	CHIP C 1.0UF K		C680			CK73GB1H103K	CHIP C 0.010UF K	
C530			CC73GCH1H180G	CHIP C 18PF G		C681			CC73GCH1H680G	CHIP C 68PF G	
C531			CC73GCH1H050B	CHIP C 5.0PF B		C683,684			CC73GCH1H330G	CHIP C 33PF G	
C532			CC73GCH1H220G	CHIP C 22PF G		C685			CC73GCH1H471J	CHIP C 470PF J	
C533			CC73GCH1H560J	CHIP C 56PF J		C686			CK73GB1H104K	CHIP C 0.10UF K	
C534			CC73GCH1H270G	CHIP C 27PF G		C687			CK73GB1E105K	CHIP C 1.0UF K	
C601,602			CK73GB1H473K	CHIP C 0.047UF K		C688			CC73GCH1H471J	CHIP C 470PF J	
C603			CC73GCH1H820J	CHIP C 82PF J		C689,690			CK73GB1H104K	CHIP C 0.10UF K	
C604,605			CK73GB1H473K	CHIP C 0.047UF K		C691			CC73GCH1H470J	CHIP C 47PF J	
C606			CK73GB1H102K	CHIP C 1000PF K		C692			CK73GB1H102K	CHIP C 1000PF K	
C607			CC73GCH1H101J	CHIP C 100PF J		C693			CK73GB1H104K	CHIP C 0.10UF K	
C608-611			CK73GB1H473K	CHIP C 0.047UF K		C694-697			CK73GB1H102K	CHIP C 1000PF K	
C612			CC73GCH1H471J	CHIP C 470PF J		C698			CK73GB1H473K	CHIP C 0.047UF K	
C613,614			CK73GB1H473K	CHIP C 0.047UF K		C699,700			CK73GB1H102K	CHIP C 1000PF K	
C615			CC73GCH1H471J	CHIP C 470PF J		C701			CE32BM1E470M	CHIP EL 47UF 25WV	
C616			CC73GCH1H080B	CHIP C 8.0PF B		C702			CC73GCH1H220G	CHIP C 22PF G	
C620			CK73GB1H102K	CHIP C 1000PF K		C703			CK73GB1H102K	CHIP C 1000PF K	
C621			CS77CA1ER47M	CHIP TNTL 0.47UF 25WV		C704			CC73GCH1H471J	CHIP C 470PF J	
C623			CK73GB1H473K	CHIP C 0.047UF K		C705			CK73GB1E105K	CHIP C 1.0UF K	
C624			CS77CB21C150M	CHIP TNTL 15UF 16WV		C706			CK73GB1H104K	CHIP C 0.10UF K	
C625			CK73GB1H102K	CHIP C 1000PF K		C707			CK73GB1E105K	CHIP C 1.0UF K	
C626			CC73GCH1H050B	CHIP C 5.0PF B		C708,709			CC73GCH1H471J	CHIP C 470PF J	
C627-629			CK73GB1H102K	CHIP C 1000PF K		C710			CK73GB1E105K	CHIP C 1.0UF K	
C630			CC73GCH1H471J	CHIP C 470PF J		C711			CC73GCH1H470J	CHIP C 47PF J	
C631			CC73GCH1H120J	CHIP C 12PF J		C801			CE32CL1V100M	CHIP EL 10UF 35WV	
C634			CC73GCH1H080B	CHIP C 8.0PF B		C802			CC73GCH1H471J	CHIP C 470PF J	
C638			CS77BA1E010M	CHIP TNTL 1.0UF 25WV		C803			CE32CL1V100M	CHIP EL 10UF 35WV	
C639			CK73GB1H473K	CHIP C 0.047UF K		C804			CE32AU1C330M	CHIP EL 33UF 16WV	
C640			CK73GB1H102K	CHIP C 1000PF K		C805,806			CC73GCH1H471J	CHIP C 470PF J	
C641			CK73GB1H473K	CHIP C 0.047UF K		C807			CE32CL1V100M	CHIP EL 10UF 35WV	
C642,643			CK73GB1H102K	CHIP C 1000PF K		C808			CC73GCH1H471J	CHIP C 470PF J	
C644			CC73GCH1H270G	CHIP C 27PF G		C809			CK73GB1H103K	CHIP C 0.010UF K	
C645			CC73GCH1H180G	CHIP C 18PF G		C811			CC73GCH1H470J	CHIP C 47PF J	
C646			CK73GB1H102K	CHIP C 1000PF K		C813			CC73GCH1H470J	CHIP C 47PF J	
C647			CK73GB1H473K	CHIP C 0.047UF K		C815			CE32BM1E470M	CHIP EL 47UF 25WV	
C648			CC73GCH1H270G	CHIP C 27PF G		C816			CC73GCH1H470J	CHIP C 47PF J	
C649			CE32BM1E470M	CHIP EL 47UF 25WV		C817			CC73GCH1H471J	CHIP C 470PF J	
C650			CC73GCH1H220G	CHIP C 22PF G		C818			CE32CL1V100M	CHIP EL 10UF 35WV	
C651,652			CK73GB1H102K	CHIP C 1000PF K		C819-821			CC73GCH1H471J	CHIP C 470PF J	
C653			CK73GB1H103K	CHIP C 0.010UF K		C822,823			CE32CL1V100M	CHIP EL 10UF 35WV	
C654			CC73GCH1H220G	CHIP C 22PF G		C824			CC73GCH1H470J	CHIP C 47PF J	
C655			CK73GB1H103K	CHIP C 0.010UF K		C828			CK73GB1H104K	CHIP C 0.10UF K	
C656			CC73GCH1H330G	CHIP C 33PF G		C829			CC73GCH1H471J	CHIP C 470PF J	
C658			CC73GCH1H680G	CHIP C 68PF G		C830			CK73GB1H473K	CHIP C 0.047UF K	
C659			CK73GB1H104K	CHIP C 0.10UF K		C831			CC73GCH1H471J	CHIP C 470PF J	
C660			CC73GCH1H220G	CHIP C 22PF G		C832			CE32BM1V220M	CHIP EL 22UF 35WV	
C661			CK73GB1H102K	CHIP C 1000PF K		C833			CC73GCH1H471J	CHIP C 470PF J	
C662			CK73GB1H473K	CHIP C 0.047UF K		C834			CK73GB1H103K	CHIP C 0.010UF K	
C663			CK73GB1H102K	CHIP C 1000PF K		C835-838			CC73GCH1H471J	CHIP C 470PF J	
C664			CE32BM1E470M	CHIP EL 47UF 25WV		C839,840			CK73GB1H103K	CHIP C 0.010UF K	
C666			CC73GCH1H680G	CHIP C 68PF G		C841-843			CK73GB1H473K	CHIP C 0.047UF K	

PARTS LIST

RX UNIT (X55-3120-11)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
C844			CC73GCH1H471J	CHIP C 470PF J		L23			L41-1078-55	SMALL FIXED INDUCTOR(10NH)	
C845			CK73GB1H473K	CHIP C 0.047UF K		L24			L92-0140-05	CHIP FERRITE	
C846			CC73GCH1H471J	CHIP C 470PF J		L25 ,26			L41-1078-55	SMALL FIXED INDUCTOR(10NH)	
C847			CK73GB1H103K	CHIP C 0.010UF K		L27			L41-1578-55	SMALL FIXED INDUCTOR(15NH)	
C848			CK73GB1H104K	CHIP C 0.10UF K		L28			L41-1078-55	SMALL FIXED INDUCTOR(10NH)	
C850			CK73GB1H473K	CHIP C 0.047UF K		L29 ,30			L41-2278-55	SMALL FIXED INDUCTOR(22NH)	
C851			CK73GB1H104K	CHIP C 0.10UF K		L34			L41-1078-55	SMALL FIXED INDUCTOR(10NH)	
C853			CK73GB1H104K	CHIP C 0.10UF K		L36			L41-1078-55	SMALL FIXED INDUCTOR(10NH)	
C854,855			CC73GCH1H471J	CHIP C 470PF J		L202			L41-4778-55	SMALL FIXED INDUCTOR(47NH)	
C856			CE32CL1V100M	CHIP EL 10UF 35WV		L203		*	L79-1954-05	DIELECTRIC FILTER	
C857			CK73GB1H104K	CHIP C 0.10UF K		L205			L41-3965-55	SMALL FIXED INDUCTOR(3.9NH)	
C859			CK73GB1H104K	CHIP C 0.10UF K		L208			L41-1078-55	SMALL FIXED INDUCTOR(10NH)	
C860			CK73GB1H473K	CHIP C 0.047UF K		L210		*	L79-1954-05	DIELECTRIC FILTER	
C861			C92-0904-05	OS-CON 22UF 35WV		L211			L41-4778-55	SMALL FIXED INDUCTOR(47NH)	
C862			CC73GCH1H020B	CHIP C 2.0PF B		L212,213			L41-2788-55	SMALL FIXED INDUCTOR(270NH)	
C863			CC73GCH1H120J	CHIP C 12PF J		L214			L41-1278-55	SMALL FIXED INDUCTOR(12NH)	
C864			CC73GCH1H150J	CHIP C 15PF J		L215		*	L39-1804-05	TOROIDAL COIL	
C865			CC73HCH1HR75B	CHIP C 0.75PF B		L218		*	L39-1804-05	TOROIDAL COIL	
CN1 -4			E23-1280-05	TERMINAL		L221			L39-1498-05	TOROIDAL COIL	
CN5			E04-0460-05	RF COAXIAL RECEPTACLE(SMB)		L222			L40-1585-92	SMALL FIXED INDUCTOR(150NH)	
CN6 -14			E23-1280-05	TERMINAL		L223			L40-2785-92	SMALL FIXED INDUCTOR(270NH)	
CN16,17			E23-1280-05	TERMINAL		L227			L41-4775-33	SMALL FIXED INDUCTOR(0.047UH)	
CN19			E23-1280-05	TERMINAL		L232			L34-4749-05	COIL	
CN20-24			E23-1330-05	TERMINAL		L246			L34-4749-05	COIL	
CN25,26			E23-1280-05	TERMINAL		L249			L40-2775-92	SMALL FIXED INDUCTOR(27NH)	
CN28			E23-1280-05	TERMINAL		L251,252			L40-1585-92	SMALL FIXED INDUCTOR(150NH)	
CN30			E23-1280-05	TERMINAL		L254			L40-1575-92	SMALL FIXED INDUCTOR(15NH)	
CN32			E23-1280-05	TERMINAL		L258			L40-2785-92	SMALL FIXED INDUCTOR(270NH)	
CN34-36			E23-1280-05	TERMINAL		L278			L40-2775-92	SMALL FIXED INDUCTOR(27NH)	
CN38,39			E23-1280-05	TERMINAL		L279			L92-0138-05	CHIP FERRITE	
CN42			E40-6656-05	PIN ASSY(36P)		L281			L40-1575-92	SMALL FIXED INDUCTOR(15NH)	
CN43			E04-0193-05	PIN SOCKET		L282			L40-2785-92	SMALL FIXED INDUCTOR(270NH)	
CN44			E41-2672-05	PIN ASSY(3P)		L284,285			L40-1585-92	SMALL FIXED INDUCTOR(150NH)	
CN45			E04-0193-05	PIN SOCKET		L286			L34-4725-05	COIL	
CN46,47			E41-2735-05	PIN ASSY(2P)		L288			L92-0138-05	CHIP FERRITE	
CN61,62			E23-1280-05	TERMINAL		L290			L41-1278-55	SMALL FIXED INDUCTOR(12NH)	
CN68			E04-0193-05	PIN SOCKET		L291,292			L92-0138-05	CHIP FERRITE	
CN87-89			E23-1330-05	TERMINAL		L293			L40-1885-92	SMALL FIXED INDUCTOR(180NH)	
-			F10-3080-04	SHIELDING CASE		L501			L41-1588-55	SMALL FIXED INDUCTOR(150NH)	
CF201			L72-1018-05	CERAMIC FILTER(450KHZ)		L502			L41-1088-55	SMALL FIXED INDUCTOR(100NH)	
CF203			L72-1018-05	CERAMIC FILTER(450KHZ)		L503			L41-8278-55	SMALL FIXED INDUCTOR(82NH)	
CF501			L72-1027-05	CERAMIC FILTER(450KHZ)		L601			L41-8295-33	SMALL FIXED INDUCTOR(8.2UH)	
CF502			L72-1028-05	CERAMIC FILTER(450KHZ)		L602			L41-2288-55	SMALL FIXED INDUCTOR(220NH)	
L1			L41-2288-55	SMALL FIXED INDUCTOR(220NH)		L603,604			L41-6895-33	SMALL FIXED INDUCTOR(6.8UH)	
L2			L41-6895-33	SMALL FIXED INDUCTOR(6.8UH)		L605,606			L41-1005-33	SMALL FIXED INDUCTOR(10UH)	
L3 ,4			L41-3985-33	SMALL FIXED INDUCTOR(0.39UH)		L607			L41-6895-33	SMALL FIXED INDUCTOR(6.8UH)	
L5 ,6			L41-1098-40	SMALL FIXED INDUCTOR(1000NH)		L608			L41-1595-33	SMALL FIXED INDUCTOR(1.5UH)	
L7 ,8			L92-0140-05	CHIP FERRITE		L609			L40-2285-92	SMALL FIXED INDUCTOR(220NH)	
L9			L41-1098-40	SMALL FIXED INDUCTOR(1000NH)		L610,611			L41-1005-33	SMALL FIXED INDUCTOR(10UH)	
L10			L34-4610-15	AIR-CORE COIL(9T)		L612,613			L41-1588-55	SMALL FIXED INDUCTOR(150NH)	
L11			L92-0140-05	CHIP FERRITE		L614			L41-1595-33	SMALL FIXED INDUCTOR(1.5UH)	
L12			L41-1098-40	SMALL FIXED INDUCTOR(1000NH)		L615			L41-1878-55	SMALL FIXED INDUCTOR(18NH)	
L13		*	L41-8265-55	SMALL FIXED INDUCTOR(8.2NH)		L617			L41-2288-55	SMALL FIXED INDUCTOR(220NH)	
L14			L92-0140-05	CHIP FERRITE		L618			L41-1878-55	SMALL FIXED INDUCTOR(18NH)	
L15 ,16		*	L41-8265-55	SMALL FIXED INDUCTOR(8.2NH)		L619			L41-1595-33	SMALL FIXED INDUCTOR(1.5UH)	
L17			L41-1078-55	SMALL FIXED INDUCTOR(10NH)		L620			L41-8278-55	SMALL FIXED INDUCTOR(82NH)	
L18		*	L41-8265-55	SMALL FIXED INDUCTOR(8.2NH)		L621-623			L41-1588-55	SMALL FIXED INDUCTOR(150NH)	
L19		*	L41-1098-40	SMALL FIXED INDUCTOR(1000NH)		L624			L41-8278-55	SMALL FIXED INDUCTOR(82NH)	
L21 ,22		*	L41-8265-55	SMALL FIXED INDUCTOR(8.2NH)		L625			L41-1588-55	SMALL FIXED INDUCTOR(150NH)	
						L801,802			L41-1005-33	SMALL FIXED INDUCTOR(10UH)	

PARTS LIST

RX UNIT (X55-3120-11)

Ref. No.	Address	New parts	Parts No.	Description	Desti-nation	Ref. No.	Address	New parts	Parts No.	Description	Desti-nation
XF1			L71-0666-05	MCF(73.05MHZ)		R73			RK73GB2A180J	CHIP R 18 J 1/10W	
R2			RK73GB2A332J	CHIP R 3.3K J 1/10W		R74			RK73GB2A101J	CHIP R 100 J 1/10W	
R3			RK73GB2A682J	CHIP R 6.8K J 1/10W		R77			RK73GB2A331J	CHIP R 330 J 1/10W	
R4			RK73GB2A181J	CHIP R 180 J 1/10W		R78			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R5			RK73GB2A100J	CHIP R 10 J 1/10W		R79			RK73GB2A000J	CHIP R 0 J 1/10W	
R6			RK73GB2A561J	CHIP R 560 J 1/10W		R80			RK73GB2A392J	CHIP R 3.9K J 1/10W	
R8			RK73GB2A470J	CHIP R 47 J 1/10W		R81			RK73GB2A271J	CHIP R 270 J 1/10W	
R9			RK73GB2A681J	CHIP R 680 J 1/10W		R84			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R10			RK73GB2A471J	CHIP R 470 J 1/10W		R85			RK73GB2A331J	CHIP R 330 J 1/10W	
R11 ,12			RK73GB2A000J	CHIP R 0 J 1/10W		R86			RK73GB2A392J	CHIP R 3.9K J 1/10W	
R13			RK73GB2A474J	CHIP R 470K J 1/10W		R87			RK73GB2A100J	CHIP R 10 J 1/10W	
R14 -16			RK73GB2A000J	CHIP R 0 J 1/10W		R89			RK73GB2A391J	CHIP R 390 J 1/10W	
R17			RK73GH2A274D	CHIP R 270K D 1/10W		R90			RK73GB2A120J	CHIP R 12 J 1/10W	
R18			RK73GH2A154D	CHIP R 150K D 1/10W		R91			RK73GB2A391J	CHIP R 390 J 1/10W	
R19			RK73GH2A274D	CHIP R 270K D 1/10W		R93			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R20			RK73GH2A154D	CHIP R 150K D 1/10W		R202			RK73GB2A000J	CHIP R 0 J 1/10W	
R21			RK73GB2A000J	CHIP R 0 J 1/10W		R204			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R22 -25			RK73GB2A100J	CHIP R 10 J 1/10W		R205			RK73GB2A681J	CHIP R 680 J 1/10W	
R26			RK73GB2A102J	CHIP R 1.0K J 1/10W		R206			RK73GB2A000J	CHIP R 0 J 1/10W	
R27			RK73GB2A151J	CHIP R 150 J 1/10W		R208			RK73GB2A390J	CHIP R 39 J 1/10W	
R28			RK73GB2A102J	CHIP R 1.0K J 1/10W		R209			RK73GB2A000J	CHIP R 0 J 1/10W	
R29			RK73GB2A220J	CHIP R 22 J 1/10W		R210			RK73GB2A100J	CHIP R 10 J 1/10W	
R30			RK73GB2A000J	CHIP R 0 J 1/10W		R212,213			RK73GB2A104J	CHIP R 100K J 1/10W	
R31			RK73GB2A330J	CHIP R 33 J 1/10W		R215			RK73GB2A684J	CHIP R 680K J 1/10W	
R32			RK73GB2A106J	CHIP R 10M J 1/10W		R218			RK73GB2A684J	CHIP R 680K J 1/10W	
R33			RK73GB2A823J	CHIP R 82K J 1/10W		R219			RK73GB2A103J	CHIP R 10K J 1/10W	
R35			RK73GB2A104J	CHIP R 100K J 1/10W		R220			RK73GB2A123J	CHIP R 12K J 1/10W	
R36			RN73GE1J271D	METAL FILM 270 D 1/16W		R224			RK73GB2A332J	CHIP R 3.3K J 1/10W	
R37			RK73GB2A271J	CHIP R 270 J 1/10W		R225			RK73GB2A470J	CHIP R 47 J 1/10W	
R38			RK73GB2A180J	CHIP R 18 J 1/10W		R227			RK73GB2A8R2J	CHIP R 8.2 J 1/10W	
R39			RK73GB2A271J	CHIP R 270 J 1/10W		R229			RK73GB2A8R2J	CHIP R 8.2 J 1/10W	
R41			RK73GB2A100J	CHIP R 10 J 1/10W		R230			RK73GB2A151J	CHIP R 150 J 1/10W	
R42			RK73GB2A102J	CHIP R 1.0K J 1/10W		R235			RK73GB2A103J	CHIP R 10K J 1/10W	
R43			RK73GB2A473J	CHIP R 47K J 1/10W		R237			RK73GB2A223J	CHIP R 22K J 1/10W	
R44			RK73GB2A100J	CHIP R 10 J 1/10W		R240			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R45			RK73GB2A470J	CHIP R 47 J 1/10W		R241			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R46			RN73GE1J391D	METAL FILM 390 D 1/16W		R242			RK73GB2A680J	CHIP R 68 J 1/10W	
R47			RK73GB2A000J	CHIP R 0 J 1/10W		R243			RK73GB2A000J	CHIP R 0 J 1/10W	
R48			RK73GB2A102J	CHIP R 1.0K J 1/10W		R244			RK73GB2A103J	CHIP R 10K J 1/10W	
R49			RK73GB2A000J	CHIP R 0 J 1/10W		R252,253			RK73GB2A103J	CHIP R 10K J 1/10W	
R50			RK73GB2A102J	CHIP R 1.0K J 1/10W		R254			RK73GB2A473J	CHIP R 47K J 1/10W	
R51			RK73GB2A471J	CHIP R 470 J 1/10W		R255			RK73GB2A000J	CHIP R 0 J 1/10W	
R52			RK73GB2A331J	CHIP R 330 J 1/10W		R256			RK73GB2A5R6J	CHIP R 5.6 J 1/10W	
R53			RK73GB2A100J	CHIP R 10 J 1/10W		R258,259			RK73GB2A000J	CHIP R 0 J 1/10W	
R54			RK73GB2A391J	CHIP R 390 J 1/10W		R261			RK73GB2A470J	CHIP R 47 J 1/10W	
R55			RK73GB2A392J	CHIP R 3.9K J 1/10W		R265			RK73GB2A221J	CHIP R 220 J 1/10W	
R56			RK73GB2A472J	CHIP R 4.7K J 1/10W		R268			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R57 ,58			RK73GB2A271J	CHIP R 270 J 1/10W		R269			RK73GB2A100J	CHIP R 10 J 1/10W	
R59			RK73GB2A101J	CHIP R 100 J 1/10W		R270			RK73GB2A000J	CHIP R 0 J 1/10W	
R60			RK73GB2A822J	CHIP R 8.2K J 1/10W		R272			RK73GB2A000J	CHIP R 0 J 1/10W	
R61			RK73GB2A472J	CHIP R 4.7K J 1/10W		R273			RK73GB2A101J	CHIP R 100 J 1/10W	
R62			RK73GB2A331J	CHIP R 330 J 1/10W		R276,277			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R63			RK73GB2A102J	CHIP R 1.0K J 1/10W		R280			RK73GB2A272J	CHIP R 2.7K J 1/10W	
R64			RK73GB2A330J	CHIP R 33 J 1/10W		R287			RK73GB2A680J	CHIP R 68 J 1/10W	
R65			RK73GB2A101J	CHIP R 100 J 1/10W		R289			RK73GB2A182J	CHIP R 1.8K J 1/10W	
R66			RK73GB2A100J	CHIP R 10 J 1/10W		R295,296			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R67 ,68			RK73GB2A000J	CHIP R 0 J 1/10W		R298			RK73GB2A101J	CHIP R 100 J 1/10W	
R71			RK73GB2A331J	CHIP R 330 J 1/10W		R300			RK73GB2A470J	CHIP R 47 J 1/10W	
R72			RK73GB2A000J	CHIP R 0 J 1/10W		R304			RK73GB2A100J	CHIP R 10 J 1/10W	
						R308			RK73GB2A000J	CHIP R 0 J 1/10W	

PARTS LIST

RX UNIT (X55-3120-11)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
R312			RK73GB2A000J	CHIP R 0 J 1/10W		R512			RK73GB2A152J	CHIP R 1.5K J 1/10W	
R314			RK73GB2A000J	CHIP R 0 J 1/10W		R513			RK73GB2A123J	CHIP R 12K J 1/10W	
R336			RK73GB2A101J	CHIP R 100 J 1/10W		R514			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R343			RK73GB2A000J	CHIP R 0 J 1/10W		R515			RK73GB2A183J	CHIP R 18K J 1/10W	
R346			RK73GB2A221J	CHIP R 220 J 1/10W		R516			RK73GB2A152J	CHIP R 1.5K J 1/10W	
R347			RK73GB2A182J	CHIP R 1.8K J 1/10W		R517			RK73GB2A181J	CHIP R 180 J 1/10W	
R349			RK73GB2A102J	CHIP R 1.0K J 1/10W		R518			RK73GB2A470J	CHIP R 47 J 1/10W	
R351			RK73GB2A102J	CHIP R 1.0K J 1/10W		R519			RK73GB2A104J	CHIP R 100K J 1/10W	
R354			RK73GB2A470J	CHIP R 47 J 1/10W		R520			RK73GB2A152J	CHIP R 1.5K J 1/10W	
R355			RK73GB2A101J	CHIP R 100 J 1/10W		R521			RK73GB2A183J	CHIP R 18K J 1/10W	
R357			RK73GB2A151J	CHIP R 150 J 1/10W		R522			RK73GB2A152J	CHIP R 1.5K J 1/10W	
R360			RK73GB2A390J	CHIP R 39 J 1/10W		R523,524			RK73GB2A103J	CHIP R 10K J 1/10W	
R361			RK73GB2A151J	CHIP R 150 J 1/10W		R525			RK73GB2A471J	CHIP R 470 J 1/10W	
R362			RK73GB2A470J	CHIP R 47 J 1/10W		R526			RK73GB2A122J	CHIP R 1.2K J 1/10W	
R364			RK73GB2A101J	CHIP R 100 J 1/10W		R527			RK73GB2A000J	CHIP R 0 J 1/10W	
R365			RK73GB2A470J	CHIP R 47 J 1/10W		R528			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R366			RK73GB2A000J	CHIP R 0 J 1/10W		R601-603			RK73GB2A180J	CHIP R 18 J 1/10W	
R368			RK73GB2A000J	CHIP R 0 J 1/10W		R604			RK73GB2A100J	CHIP R 10 J 1/10W	
R374			RK73GB2A332J	CHIP R 3.3K J 1/10W		R605			RK73GB2A471J	CHIP R 470 J 1/10W	
R375			RK73GB2A104J	CHIP R 100K J 1/10W		R606			RK73GB2A473J	CHIP R 47K J 1/10W	
R377			RK73GB2A182J	CHIP R 1.8K J 1/10W		R607			RK73GB2A470J	CHIP R 47 J 1/10W	
R378			RK73GB2A000J	CHIP R 0 J 1/10W		R608			RK73GB2A332J	CHIP R 3.3K J 1/10W	
R380			RK73GB2A103J	CHIP R 10K J 1/10W		R609,610			RK73GB2A105J	CHIP R 1.0M J 1/10W	
R381			RK73GB2A473J	CHIP R 47K J 1/10W		R611			RK73GB2A682J	CHIP R 6.8K J 1/10W	
R383			RK73GB2A154J	CHIP R 150K J 1/10W		R612			RK73GB2A271J	CHIP R 270 J 1/10W	
R384			RK73GB2A473J	CHIP R 47K J 1/10W		R613			RK73GB2A100J	CHIP R 10 J 1/10W	
R386			RK73GB2A103J	CHIP R 10K J 1/10W		R614			RK73GB2A101J	CHIP R 100 J 1/10W	
R387			RK73GB2A471J	CHIP R 470 J 1/10W		R615			RK73GB2A221J	CHIP R 220 J 1/10W	
R390			RK73GB2A000J	CHIP R 0 J 1/10W		R616			RK73GB2A561J	CHIP R 560 J 1/10W	
R391			RK73GB2A152J	CHIP R 1.5K J 1/10W		R618			RK73GB2A000J	CHIP R 0 J 1/10W	
R392			RK73GB2A223J	CHIP R 22K J 1/10W		R619			RK73GB2A121J	CHIP R 120 J 1/10W	
R393			RK73GB2A122J	CHIP R 1.2K J 1/10W		R620			RK73GB2A000J	CHIP R 0 J 1/10W	
R396			RK73GB2A681J	CHIP R 680 J 1/10W		R622			RK73GB2A000J	CHIP R 0 J 1/10W	
R399			RK73GB2A103J	CHIP R 10K J 1/10W		R623			RK73GB2A101J	CHIP R 100 J 1/10W	
R400			RK73GB2A334J	CHIP R 330K J 1/10W		R625			RK73GB2A682J	CHIP R 6.8K J 1/10W	
R402			RK73GB2A560J	CHIP R 56 J 1/10W		R626			RK73GB2A332J	CHIP R 3.3K J 1/10W	
R403			RK73GB2A223J	CHIP R 22K J 1/10W		R627			RK73GB2A151J	CHIP R 150 J 1/10W	
R406			RK73GB2A332J	CHIP R 3.3K J 1/10W		R628-632			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R407			RK73GB2A273J	CHIP R 27K J 1/10W		R633			RK73GB2A000J	CHIP R 0 J 1/10W	
R408			RK73GB2A000J	CHIP R 0 J 1/10W		R634			RK73GB2A470J	CHIP R 47 J 1/10W	
R412			RK73GB2A183J	CHIP R 18K J 1/10W		R635			RN73GE1J221D	METAL FILM 220 D 1/16W	
R413			RK73GB2A103J	CHIP R 10K J 1/10W		R636			RK73GB2A000J	CHIP R 0 J 1/10W	
R415			RK73GB2A000J	CHIP R 0 J 1/10W		R638			RK73GB2A100J	CHIP R 10 J 1/10W	
R416			RK73GB2A273J	CHIP R 27K J 1/10W		R639			RK73GB2A821J	CHIP R 820 J 1/10W	
R417			RK73GB2A103J	CHIP R 10K J 1/10W		R640			RK73GB2A5R6J	CHIP R 5.6 J 1/10W	
R419			RK73GB2A473J	CHIP R 47K J 1/10W		R641			RK73GB2A821J	CHIP R 820 J 1/10W	
R420			RK73GB2A123J	CHIP R 12K J 1/10W		R642			RK73GB2A100J	CHIP R 10 J 1/10W	
R421			RK73GB2A101J	CHIP R 100 J 1/10W		R643,644			RK73GB2A104J	CHIP R 100K J 1/10W	
R422			RK73GB2A474J	CHIP R 470K J 1/10W		R645			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R431			RK73GB2A000J	CHIP R 0 J 1/10W		R646			RK73GB2A2R2J	CHIP R 2.2 J 1/10W	
R432			RK73GB2A100J	CHIP R 10 J 1/10W		R648			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R441			RK73GB2A680J	CHIP R 68 J 1/10W		R649			RK73GB2A000J	CHIP R 0 J 1/10W	
R442			RK73GB2A181J	CHIP R 180 J 1/10W		R651			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R501			RK73GB2A470J	CHIP R 47 J 1/10W		R652			RK73GB2A682J	CHIP R 6.8K J 1/10W	
R502			RK73GB2A000J	CHIP R 0 J 1/10W		R653			RK73GB2A152J	CHIP R 1.5K J 1/10W	
R503			RK73GB2A470J	CHIP R 47 J 1/10W		R654			RK73GB2A330J	CHIP R 33 J 1/10W	
R504			RK73GB2A562J	CHIP R 5.6K J 1/10W		R655			RK73GB2A101J	CHIP R 100 J 1/10W	
R505			RK73GB2A332J	CHIP R 3.3K J 1/10W		R656			RK73GB2A104J	CHIP R 100K J 1/10W	
R506			RK73GB2A271J	CHIP R 270 J 1/10W		R657			RK73GB2A000J	CHIP R 0 J 1/10W	
R508			RK73GB2A100J	CHIP R 10 J 1/10W		R659,660			RK73GB2A100J	CHIP R 10 J 1/10W	

PARTS LIST

RX UNIT (X55-3120-11)
TX UNIT (X56-3150-11)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
R661			RK73GB2A181J	CHIP R 180 J 1/10W		IC503			NJM2878F4-33	BI-POLAR IC	
R663			RK73GB2A682J	CHIP R 6.8K J 1/10W		IC601			LMC7101BIM5	MOS-IC	
R664			RK73GB2A332J	CHIP R 3.3K J 1/10W		IC602			TC7WH126FU-F	MOS-IC	
R665			RK73GB2A470J	CHIP R 47 J 1/10W		IC603			ADF4111BCP7	MOS-IC	
R666			RK73GB2A100J	CHIP R 10 J 1/10W		IC604			TC7WH126FU-F	MOS-IC	
R667			RK73GB2A181J	CHIP R 180 J 1/10W		IC605,606			NJM2878F4-33	BI-POLAR IC	
R668-670			RK73GB2A180J	CHIP R 18 J 1/10W		IC801-804			NJM78M05DL1AZB	ANALOGUE IC	
R671			RK73GB2A102J	CHIP R 1.0K J 1/10W		IC805			BH2220FVM	ANALOGUE IC	
R672			RK73GB2A473J	CHIP R 47K J 1/10W		IC806			LM50BIM3/NOPB	MOS-IC	
R673			RK73GB2A102J	CHIP R 1.0K J 1/10W		IC807			NJM2386ADL3-09	ANALOGUE IC	
R674			RK73GB2A473J	CHIP R 47K J 1/10W		IC808	2D		KIA7805API	BI-POLAR IC	
R675,676			RK73GB2A472J	CHIP R 4.7K J 1/10W		IC809	2D		KIA7808API	BI-POLAR IC	
R677,678			RK73GB2A473J	CHIP R 47K J 1/10W		IC810			AD1582	ANALOGUE IC	
R679,680			RK73GB2A472J	CHIP R 4.7K J 1/10W		IC811			AD7908BRU	MOS-IC	
R681			RK73GB2A473J	CHIP R 47K J 1/10W		IC812			NJM2732V	BI-POLAR IC	
R802			RK73GB2A000J	CHIP R 0 J 1/10W		IC813			S24CS02AFJTBG	ROM IC	
R809			RK73GB2A100J	CHIP R 10 J 1/10W		IC814			NJM2732V	BI-POLAR IC	
R810-812			RK73GB2A101J	CHIP R 100 J 1/10W		Q1			2SC4617(R)	TRANSISTOR	
R813-815			RK73GB2A100J	CHIP R 10 J 1/10W		Q2 -4			2SC4116(BL)F	TRANSISTOR	
R816			RK73GB2A000J	CHIP R 0 J 1/10W		Q5			2SK508NV(K53)	FET	
R817			RK73GB2A102J	CHIP R 1.0K J 1/10W		Q6			2SC4116(BL)F	TRANSISTOR	
R819			RK73GB2A103J	CHIP R 10K J 1/10W		Q7			SSM3K15TE(F)	FET	
R820-822			RK73GB2A102J	CHIP R 1.0K J 1/10W		Q8 -11			2SC5108(Y)F	TRANSISTOR	
R825			RK73GB2A000J	CHIP R 0 J 1/10W		Q201			NESG220034	TRANSISTOR	
R828-830			RK73GB2A104J	CHIP R 100K J 1/10W		Q202			2SC5636	TRANSISTOR	
R832,833			RK73GB2A104J	CHIP R 100K J 1/10W		Q204			NESG220034	TRANSISTOR	
R834,835			RK73GB2A472J	CHIP R 4.7K J 1/10W		Q211			NESG220034	TRANSISTOR	
R837			RK73GB2A100J	CHIP R 10 J 1/10W		Q214			2SC4617(S)	TRANSISTOR	
R838			RK73GB2A000J	CHIP R 0 J 1/10W		Q501			2SC4725	TRANSISTOR	
R839,840			RK73GB2A101J	CHIP R 100 J 1/10W		Q601,602			2SC4617(R)	TRANSISTOR	
R842			RK73GB2A101J	CHIP R 100 J 1/10W		Q603			2SC4725	TRANSISTOR	
R845			RK73GB2A104J	CHIP R 100K J 1/10W		Q604			2SK2539-7	FET	
R847,848			RK73GB2A104J	CHIP R 100K J 1/10W		Q605			2SC4116(BL)F	TRANSISTOR	
R850			RK73GB2A470J	CHIP R 47 J 1/10W		Q606			2SA1832F	TRANSISTOR	
R851,852			RK73GB2A101J	CHIP R 100 J 1/10W		Q607			SSM3K15TE(F)	FET	
R854			RK73GB2A000J	CHIP R 0 J 1/10W		Q608,609			2SC4725	TRANSISTOR	
R855,856			RK73GB2A104J	CHIP R 100K J 1/10W		Q610,611			SSM3K15TE(F)	FET	
R857-860			RK73GB2A103J	CHIP R 10K J 1/10W		Q801			SSM3K15TE(F)	FET	
R861			RK73FB2B000J	CHIP R 0 J 1/8W							
R862-868			RK73GB2A000J	CHIP R 0 J 1/10W							
R870,871			RK73GB2A000J	CHIP R 0 J 1/10W							
D1 -3			1SV278F	VARIABLE CAPACITANCE DIODE							
D5			DA221	DIODE							
D203			HSM88AS-E	DIODE							
D214,215			DB3J314FOL	DIODE							
D601			KV1470-G	VARIABLE CAPACITANCE DIODE							
IC1			LMC7101BIM5	MOS-IC							
IC2			SKY72310-362	MOS-IC							
IC3			LMC7101BIM5	MOS-IC							
IC4			NJM2878F4-33	BI-POLAR IC							
IC201		*	BU7261G	MOS-IC							
IC202			AV111-12LF	ANALOGUE IC							
IC204			NJM2732V	BI-POLAR IC							
IC205			ADL5801ACPZ	MOS-IC							
IC207			TA31136FNG	MOS-IC							
IC208			AD8051ART	ANALOGUE IC							
IC210			NJM2732V	BI-POLAR IC							
IC501			AD607Z	BI-POLAR IC							
IC502			AD8051ART	ANALOGUE IC							

TX UNIT (X56-3150-11)

D8			B30-2230-05	LED(YG)	
D201			B30-2230-05	LED(YG)	
D920-924			B30-2265-05	LED(BR/PG)	
D925-932			B30-2171-05	LED(D)	
C1			CK73GB1H103K	CHIP C 0.010UF K	
C2			CC73GCH1H101J	CHIP C 100PF J	
C3			CK73GB1H103K	CHIP C 0.010UF K	
C4			CC73GCH1H101J	CHIP C 100PF J	
C7			CK73GB1H104K	CHIP C 0.10UF K	
C8			CC73GCH1H101J	CHIP C 100PF J	
C9			CC73GCH1H471J	CHIP C 470PF J	
C10			CK73GB1H103K	CHIP C 0.010UF K	
C11 -13			CC73GCH1H101J	CHIP C 100PF J	
C14			CC73GCH1H471J	CHIP C 470PF J	

If a part reference number is listed in a shaded box, that part does not come with the PCB.

PARTS LIST

TX UNIT (X56-3150-11)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
C15			CK73GB1H103K	CHIP C 0.010UF K		C114			CK73GB1H103K	CHIP C 0.010UF K	
C16			CC73GCH1H471J	CHIP C 470PF J		C120			CC73GCH1H090B	CHIP C 9.0PF B	
C18			CS77CA1ER47M	CHIP TNTL 0.47UF 25WV		C121			CC73GCH1H050B	CHIP C 5.0PF B	
C19			CK73GB1E105K	CHIP C 1.0UF K		C122,123			CC73GCH1H470J	CHIP C 47PF J	
C20 -23			CC73GCH1H471J	CHIP C 470PF J		C124			CC73GCH1H040B	CHIP C 4.0PF B	
C24			CK73GB1E105K	CHIP C 1.0UF K		C125			CC73GCH1H470J	CHIP C 47PF J	
C25 -27			CK73GB1H103K	CHIP C 0.010UF K		C126			CC73GCH1H471J	CHIP C 470PF J	
C30			CS77CA1C2R2M	CHIP TNTL 2.2UF 16WV		C127			CC73GCH1H470J	CHIP C 47PF J	
C31			CS77CC1C330M	CHIP TNTL 33UF 16WV		C128			CK73GB1H103K	CHIP C 0.010UF K	
C32			CC73GCH1H101J	CHIP C 100PF J		C129			CC73GCH1H470J	CHIP C 47PF J	
C33			CK73GB1E105K	CHIP C 1.0UF K		C130			CC73GCH1H100C	CHIP C 10PF C	
C34 ,35			CK73GB1H103K	CHIP C 0.010UF K		C131			CC73GCH1H080B	CHIP C 8.0PF B	
C37 ,38			CC73GCH1H471J	CHIP C 470PF J		C132			CC73GCH1H470J	CHIP C 47PF J	
C39			CK73EB1E104K	CHIP C 0.10UF K		C133			CK73GB1E105K	CHIP C 1.0UF K	
C40			CC73GCH1H221J	CHIP C 220PF J		C134			CC73GCH1H030B	CHIP C 3.0PF B	
C41			CC73GCH1H331J	CHIP C 330PF J		C136			CC73GCH1H470J	CHIP C 47PF J	
C42 ,43			CK73GB1H103K	CHIP C 0.010UF K		C137			CK73GB1H223K	CHIP C 0.022UF K	
C44			CC73GCH1H680J	CHIP C 68PF J		C138			CC73GCH1H470J	CHIP C 47PF J	
C45			CK73GB1H104K	CHIP C 0.10UF K		C139			CK73GB1H103K	CHIP C 0.010UF K	
C46			CC73GCH1H180J	CHIP C 18PF J		C140			CC73GCH1H471J	CHIP C 470PF J	
C47			CC73GCH1H470J	CHIP C 47PF J		C141			CC73GCH1H040B	CHIP C 4.0PF B	
C50			CC73GCH1H070B	CHIP C 7.0PF B		C142			CC73GCH1H470J	CHIP C 47PF J	
C52			CC73GCH1H060B	CHIP C 6.0PF B		C144			CC73GCH1H010B	CHIP C 1.0PF B	
C54			CC73GCH1H471J	CHIP C 470PF J		C145			CC73GCH1H470J	CHIP C 47PF J	
C56			CC73GCH1H471J	CHIP C 470PF J		C146			CK73GB1H103K	CHIP C 0.010UF K	
C57			CC73GCH1H181J	CHIP C 180PF J		C147			CC73GCH1H471J	CHIP C 470PF J	
C58			CC73GCH1H470J	CHIP C 47PF J		C149			CC73GCH1H470J	CHIP C 47PF J	
C63 ,64			CC73GCH1H0R5B	CHIP C 0.5PF B		C150			CK73GB1H103K	CHIP C 0.010UF K	
C65			CC73GCH1H471J	CHIP C 470PF J		C153			CC73GCH1H040B	CHIP C 4.0PF B	
C67			CC73GCH1H0R5B	CHIP C 0.5PF B		C155			CC73GCH1H060B	CHIP C 6.0PF B	
C68			CC73GCH1H050B	CHIP C 5.0PF B		C157			CC73GCH1H040B	CHIP C 4.0PF B	
C69			CC73GCH1H040B	CHIP C 4.0PF B		C158,159			CC73GCH1H020B	CHIP C 2.0PF B	
C70			CC73GCH1H060B	CHIP C 6.0PF B		C160			CC73GCH1H030B	CHIP C 3.0PF B	
C72			CC73GCH1H030B	CHIP C 3.0PF B		C161			CC73GCH1H020B	CHIP C 2.0PF B	
C75			CC73GCH1H471J	CHIP C 470PF J		C162			CC73GCH1H060B	CHIP C 6.0PF B	
C76			CK73GB1H103K	CHIP C 0.010UF K		C163			CC73GCH1H090B	CHIP C 9.0PF B	
C77 ,78			CC73GCH1H470J	CHIP C 47PF J		C164			CC73GCH1H040B	CHIP C 4.0PF B	
C79 ,80			CC73GCH1H471J	CHIP C 470PF J		C166			CC73GCH1H090B	CHIP C 9.0PF B	
C82 -84			CC73GCH1H471J	CHIP C 470PF J		C168			CC73GCH1H050B	CHIP C 5.0PF B	
C85			CC73GCH1H090B	CHIP C 9.0PF B		C169			CC73GCH1H020B	CHIP C 2.0PF B	
C86			CC73GCH1H471J	CHIP C 470PF J		C170-172			CC73GCH1H030B	CHIP C 3.0PF B	
C87			CK73GB1H103K	CHIP C 0.010UF K		C173			CC73GCH1H090B	CHIP C 9.0PF B	
C88			CC73GCH1H070B	CHIP C 7.0PF B		C174			CC73GCH1H070B	CHIP C 7.0PF B	
C89			CC73GCH1H060B	CHIP C 6.0PF B		C175			CC73GCH1H090B	CHIP C 9.0PF B	
C90			CC73GCH1H030B	CHIP C 3.0PF B		C177			CC73GCH1H080B	CHIP C 8.0PF B	
C91			CE32BM1E470M	CHIP EL 47UF 25WV		C178			CC73GCH1H030B	CHIP C 3.0PF B	
C92			CC73GCH1H471J	CHIP C 470PF J		C179			CC73GCH1H070B	CHIP C 7.0PF B	
C93 ,94			CS77CC1C330M	CHIP TNTL 33UF 16WV		C180			CC73GCH1H030B	CHIP C 3.0PF B	
C95			CE32CL1V100M	CHIP EL 10UF 35WV		C181			CK73GB1H103K	CHIP C 0.010UF K	
C96			CC73GCH1H471J	CHIP C 470PF J		C182			CC73GCH1H471J	CHIP C 470PF J	
C97			CC73GCH1H100C	CHIP C 10PF C		C201			CK73FB0J106K	CHIP C 10UF K	
C98			CC73GCH1H070B	CHIP C 7.0PF B		C202			CK73GB1H104K	CHIP C 0.10UF K	
C99 -101			CC73GCH1H471J	CHIP C 470PF J		C203,204			CK73FB0J106K	CHIP C 10UF K	
C104			CK73GB1H103K	CHIP C 0.010UF K		C205			CK73GB1H104K	CHIP C 0.10UF K	
C105,106			CC73GCH1H471J	CHIP C 470PF J		C206,207			CK73GB1H103K	CHIP C 0.010UF K	
C107			CK73GB1H103K	CHIP C 0.010UF K		C209			CS77CA1C2R2M	CHIP TNTL 2.2UF 16WV	
C109			CC73GCH1H471J	CHIP C 470PF J		C210			CC73GCH1H100C	CHIP C 10PF C	
C110			CC73GCH1H100C	CHIP C 10PF C		C211			CC73GCH1H471J	CHIP C 470PF J	
C111			CC73GCH1H470J	CHIP C 47PF J		C212			CK73GB1H104K	CHIP C 0.10UF K	
C113			CC73GCH1H470J	CHIP C 47PF J		C213			CE32BM1E470M	CHIP EL 47UF 25WV	

PARTS LIST

TX UNIT (X56-3150-11)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
C215			CK73GB1H103K	CHIP C 0.010UF K		C324			CK73GB1H104K	CHIP C 0.10UF K	
C216			CC73GCH1H181J	CHIP C 180PF J		C325			CK73GB1H103K	CHIP C 0.010UF K	
C217-219			CK73GB1H103K	CHIP C 0.010UF K		C328-330			CK73GB1H103K	CHIP C 0.010UF K	
C220			CC73GCH1H471J	CHIP C 470PF J		C331			CK73GB1E105K	CHIP C 1.0UF K	
C222			CK73GB1H102K	CHIP C 1000PF K		C332-340			CK73GB1H103K	CHIP C 0.010UF K	
C223			CK73GB1H104K	CHIP C 0.10UF K		C341			CC73GCH1H680J	CHIP C 68PF J	
C224			CE32CL1V100M	CHIP EL 10UF 35WV		C342			CK73GB1H104K	CHIP C 0.10UF K	
C225			C93-1824-05	CHIP C 100UF M		C343			CC73GCH1H221J	CHIP C 220PF J	
C226			CE32CL1V100M	CHIP EL 10UF 35WV		C344			CK73GB1H103K	CHIP C 0.010UF K	
C227			CC73GCH1H121J	CHIP C 120PF J		C345			CC73GCH1H180J	CHIP C 18PF J	
C228			CC73GCH1H100C	CHIP C 10PF C		C346			CC73GCH1H331J	CHIP C 330PF J	
C229			CS77CC1C100M	CHIP TNL 10UF 16WV		C347			CC73GCH1H470J	CHIP C 47PF J	
C230			CC73GCH1H331J	CHIP C 330PF J		C348			CC73GCH1H181J	CHIP C 180PF J	
C231,232			CS77CB21A470M	CHIP TNL 47UF 10WV		C349-352			CK73GB1H103K	CHIP C 0.010UF K	
C233			CC73GCH1H221J	CHIP C 220PF J		C353			CC73GCH1H680J	CHIP C 68PF J	
C234			CS77CC1C100M	CHIP TNL 10UF 16WV		C354			CK73GB1H103K	CHIP C 0.010UF K	
C235			CK73GB1H103K	CHIP C 0.010UF K		C355			CK73GB1H104K	CHIP C 0.10UF K	
C236			CC73GCH1H470J	CHIP C 47PF J		C356			CC73GCH1H221J	CHIP C 220PF J	
C237			CK73GB1H104K	CHIP C 0.10UF K		C357			CC73GCH1H180J	CHIP C 18PF J	
C238			CC73GCH1H180J	CHIP C 18PF J		C358			CC73GCH1H331J	CHIP C 330PF J	
C239			CK73GB1H103K	CHIP C 0.010UF K		C359			CC73GCH1H470J	CHIP C 47PF J	
C240			CK73GB1H104K	CHIP C 0.10UF K		C360			CC73GCH1H181J	CHIP C 180PF J	
C241			CC73GCH1H331J	CHIP C 330PF J		C362-367			CK73GB1H103K	CHIP C 0.010UF K	
C242			CC73GCH1H680J	CHIP C 68PF J		C368			CC73GCH1H680J	CHIP C 68PF J	
C243,244			CK73GB1H103K	CHIP C 0.010UF K		C369,370			CK73GB1H103K	CHIP C 0.010UF K	
C245			CC73GCH1H270J	CHIP C 27PF J		C371			CC73GCH1H680J	CHIP C 68PF J	
C246			CC73GCH1H331J	CHIP C 330PF J		C372,373			CK73GB1H104K	CHIP C 0.10UF K	
C247,248			CK73GB1H104K	CHIP C 0.10UF K		C374			CK73GB1E105K	CHIP C 1.0UF K	
C249,250			C93-1824-05	CHIP C 100UF M		C375			CK73GB1H103K	CHIP C 0.010UF K	
C251			CK73GB1H102K	CHIP C 1000PF K		C376			CK73GB1H104K	CHIP C 0.10UF K	
C252-254			CC73GCH1H100C	CHIP C 10PF C		C401			CK73GB1H104K	CHIP C 0.10UF K	
C255			CK73GB1H104K	CHIP C 0.10UF K		C402			CC73GCH1H100C	CHIP C 10PF C	
C256			CC73GCH1H471J	CHIP C 470PF J		C404			CC73GCH1H270J	CHIP C 27PF J	
C257			CC73GCH1H100C	CHIP C 10PF C		C407			CC73GCH1H100C	CHIP C 10PF C	
C258,259			CK73GB1H103K	CHIP C 0.010UF K		C408-412			CK73GB1H104K	CHIP C 0.10UF K	
C260			CC73GCH1H471J	CHIP C 470PF J		C413-416			CC73GCH1H560J	CHIP C 56PF J	
C261			CK73GB1H103K	CHIP C 0.010UF K		C417-420			CK73GB1H104K	CHIP C 0.10UF K	
C263-265			CK73GB1H103K	CHIP C 0.010UF K		C421-423			CK73GB1H103K	CHIP C 0.010UF K	
C266			CK73GB1H104K	CHIP C 0.10UF K		C424			CK73GB1H104K	CHIP C 0.10UF K	
C267			CC73GCH1H471J	CHIP C 470PF J		C425			CK73GB1H103K	CHIP C 0.010UF K	
C268			CK73GB1H103K	CHIP C 0.010UF K		C426			CK73GB1H104K	CHIP C 0.10UF K	
C269			CK73GB1E105K	CHIP C 1.0UF K		C433,434			CC73GCH1H471J	CHIP C 470PF J	
C271			CK73GB1H103K	CHIP C 0.010UF K		C435			CK73GB1H104K	CHIP C 0.10UF K	
C301			CK73GB1H104K	CHIP C 0.10UF K		C436			CC73GCH1H100C	CHIP C 10PF C	
C302			CK73GB1H103K	CHIP C 0.010UF K		C437			CK73GB1H102K	CHIP C 1000PF K	
C303			CC73GCH1H471J	CHIP C 470PF J		C438			CK73GB1H103K	CHIP C 0.010UF K	
C304,305			CK73GB1H104K	CHIP C 0.10UF K		C439			CK73GB1H104K	CHIP C 0.10UF K	
C306			CC73GCH1H471J	CHIP C 470PF J		C440			CK73GB1H103K	CHIP C 0.010UF K	
C307			CK73GB1H103K	CHIP C 0.010UF K		C441			CK73GB1H104K	CHIP C 0.10UF K	
C309			CE32BM1E470M	CHIP EL 47UF 25WV		C442			CK73FB0J106K	CHIP C 10UF K	
C310			CK73GB1H103K	CHIP C 0.010UF K		C443,444			CK73GB1E105K	CHIP C 1.0UF K	
C311			CK73GB1H223K	CHIP C 0.022UF K		C501			CC73GCH1H100C	CHIP C 10PF C	
C312-314			CK73GB1H103K	CHIP C 0.010UF K		C502-504			CK73GB1H104K	CHIP C 0.10UF K	
C316			CC73GCH1H181J	CHIP C 180PF J		C505			CC73GCH1H221J	CHIP C 220PF J	
C317			CC73GCH1H470J	CHIP C 47PF J		C506			CC73GCH1H121J	CHIP C 120PF J	
C318			CS77CA1ER47M	CHIP TNL 0.47UF 25WV		C507			CC73GCH1H271J	CHIP C 270PF J	
C319			CC73GCH1H331J	CHIP C 330PF J		C508			CC73GCH1H221J	CHIP C 220PF J	
C320			CC73GCH1H180J	CHIP C 18PF J		C509			CC73GCH1H470J	CHIP C 47PF J	
C321			CC73GCH1H221J	CHIP C 220PF J		C510			CC73GCH1H331J	CHIP C 330PF J	
C323			CC73GCH1H680J	CHIP C 68PF J		C511			CK73GB1H104K	CHIP C 0.10UF K	

PARTS LIST

TX UNIT (X56-3150-11)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
C512,513			CC73GCH1H221J	CHIP C 220PF J		C620			CC73GCH1H820J	CHIP C 82PF J	
C514			CC73GCH1H271J	CHIP C 270PF J		C621,622			CC73GCH1H471J	CHIP C 470PF J	
C516			CC73GCH1H470J	CHIP C 47PF J		C623			CC73GCH1H470J	CHIP C 47PF J	
C517			CK73GB1H104K	CHIP C 0.10UF K		C701,702			CK73GB1H104K	CHIP C 0.10UF K	
C518			CC73GCH1H121J	CHIP C 120PF J		C703			CC73GCH1H471J	CHIP C 470PF J	
C519			CC73GCH1H470J	CHIP C 47PF J		C704			CK73GB1E105K	CHIP C 1.0UF K	
C520-522			CK73GB1H104K	CHIP C 0.10UF K		C705			CE32CL1V100M	CHIP EL 10UF 35WV	
C523			CC73GCH1H030B	CHIP C 3.0PF B		C706,707			CK73GB1H104K	CHIP C 0.10UF K	
C524-526			CK73GB1H104K	CHIP C 0.10UF K		C708,709			CC73GCH1H471J	CHIP C 470PF J	
C527			CC73GCH1H471J	CHIP C 470PF J		C710			CK73GB1H104K	CHIP C 0.10UF K	
C528			CK73GB1H104K	CHIP C 0.10UF K		C711			CK73GB1H103K	CHIP C 0.010UF K	
C529			CC73GCH1H331J	CHIP C 330PF J		C712-714			CK73GB1H104K	CHIP C 0.10UF K	
C530-532			CK73GB1H104K	CHIP C 0.10UF K		C715			CE32CL1V100M	CHIP EL 10UF 35WV	
C533			CC73GCH1H030B	CHIP C 3.0PF B		C716			CK73GB1H103K	CHIP C 0.010UF K	
C534			CK73GB1H104K	CHIP C 0.10UF K		C717,718			CE32CL1V100M	CHIP EL 10UF 35WV	
C536-538			CK73GB1H104K	CHIP C 0.10UF K		C719,720			CK73GB1H103K	CHIP C 0.010UF K	
C539			CC73GCH1H820J	CHIP C 82PF J		C721			CK73GB1H104K	CHIP C 0.10UF K	
C540-544			CK73GB1H104K	CHIP C 0.10UF K		C722			CE32CL1V100M	CHIP EL 10UF 35WV	
C545			CC73GCH1H471J	CHIP C 470PF J		C723			CK73GB1H103K	CHIP C 0.010UF K	
C546-549			CK73GB1H104K	CHIP C 0.10UF K		C724			CK73GB1H104K	CHIP C 0.10UF K	
C550			CC73GCH1H471J	CHIP C 470PF J		C725			CE32CL1V100M	CHIP EL 10UF 35WV	
C551-553			CK73GB1H104K	CHIP C 0.10UF K		C726			CK73GB1H103K	CHIP C 0.010UF K	
C554			CC73GCH1H221J	CHIP C 220PF J		C727-729			CC73GCH1H471J	CHIP C 470PF J	
C555			CC73GCH1H121J	CHIP C 120PF J		C730			CK73GB1H103K	CHIP C 0.010UF K	
C556-558			CK73GB1H104K	CHIP C 0.10UF K		C731-734			CC73GCH1H471J	CHIP C 470PF J	
C561			CC73GCH1H100C	CHIP C 10PF C		C735,736			CK73GB1H103K	CHIP C 0.010UF K	
C562			CC73GCH1H471J	CHIP C 470PF J		C737,738			CC73GCH1H471J	CHIP C 470PF J	
C563			CC73GCH1H470J	CHIP C 47PF J		C739			CK73GB1H103K	CHIP C 0.010UF K	
C564			CC73GCH1H331J	CHIP C 330PF J		C740			CC73GCH1H471J	CHIP C 470PF J	
C565			CK73GB1H103K	CHIP C 0.010UF K		C741			CK73GB1H103K	CHIP C 0.010UF K	
C566			CK73GB1H104K	CHIP C 0.10UF K		C801			CK73GB1H103K	CHIP C 0.010UF K	
C567			CK73GB1H103K	CHIP C 0.010UF K		C802,803			CC73GCH1H471J	CHIP C 470PF J	
C568-572			CK73GB1H104K	CHIP C 0.10UF K		C804			CK73GB1H103K	CHIP C 0.010UF K	
C573			CC73GCH1H221J	CHIP C 220PF J		C809			CC73GCH1H331J	CHIP C 330PF J	
C577,578			CC73GCH1H100C	CHIP C 10PF C		C811			CC73GCH1H270J	CHIP C 27PF J	
C579			CK73GB1H104K	CHIP C 0.10UF K		C812			CC73GCH1H331J	CHIP C 330PF J	
C580			CC73GCH1H121J	CHIP C 120PF J		C813			CC73GCH1H270J	CHIP C 27PF J	
C582			CC73GCH1H471J	CHIP C 470PF J		C814			CC73GCH1H471J	CHIP C 470PF J	
C583			CC73GCH1H470J	CHIP C 47PF J		C826			CE32AU1E100M	CHIP EL 10UF 25WV	
C584			CC73GCH1H331J	CHIP C 330PF J		C834,835			CC73GCH1H331J	CHIP C 330PF J	
C585,586			CK73GB1H104K	CHIP C 0.10UF K		C839			C92-0904-05	OS-CON 22UF 35WV	
C589			CK73GB1H103K	CHIP C 0.010UF K		C840			CC73GCH1H470J	CHIP C 47PF J	
C591,592			CK73GB1H103K	CHIP C 0.010UF K		C920-925			CK73GB1H104K	CHIP C 0.10UF K	
C593			CC73GCH1H181J	CHIP C 180PF J		C926			CK73GB1H102K	CHIP C 1000PF K	
C594-598			CK73GB1H104K	CHIP C 0.10UF K		C928,929			CK73GB1H104K	CHIP C 0.10UF K	
C599			CC73GCH1H470J	CHIP C 47PF J		C930,931			CK73GB1E105K	CHIP C 1.0UF K	
C600			CC73GCH1H331J	CHIP C 330PF J		C932			CC73GCH1H470J	CHIP C 47PF J	
C601			CC73GCH1H180J	CHIP C 18PF J		C933,934			CS77CA1A1R5M	CHIP TNL 1.5UF 10WV	
C602			CC73GCH1H221J	CHIP C 220PF J		C935,936			CK73GB1H104K	CHIP C 0.10UF K	
C603			CC73GCH1H680J	CHIP C 68PF J		C937			CK73GB1H103K	CHIP C 0.010UF K	
C604-606			CK73GB1H103K	CHIP C 0.010UF K		C938			CK73FB0J106K	CHIP C 10UF K	
C608			CK73GB1H104K	CHIP C 0.10UF K		C939			CK73GB1H102K	CHIP C 1000PF K	
C609			CK73GB1H103K	CHIP C 0.010UF K		C941			CK73GB1H102K	CHIP C 1000PF K	
C610			CK73GB1H104K	CHIP C 0.10UF K		C943			CK73GB1H104K	CHIP C 0.10UF K	
C611			CK73GB1H103K	CHIP C 0.010UF K		C960-965			CK73GB1H104K	CHIP C 0.10UF K	
C612,613			CK73GB1H104K	CHIP C 0.10UF K		CN104			E23-1280-05	TERMINAL	
C614,615			CK73GB1H103K	CHIP C 0.010UF K		CN108-110			E23-1280-05	TERMINAL	
C616			CK73FB0J106K	CHIP C 10UF K		CN112-120			E23-1280-05	TERMINAL	
C617,618			CK73GB1H104K	CHIP C 0.10UF K		CN130			E23-1330-05	TERMINAL	
C619			CK73FB0J106K	CHIP C 10UF K		CN403			E04-0193-05	PIN SOCKET	

PARTS LIST

TX UNIT (X56-3150-11)

Ref. No.	Address	New parts	Parts No.	Description	Desti-nation	Ref. No.	Address	New parts	Parts No.	Description	Desti-nation
CN405,406			E04-0193-05	PIN SOCKET		L314			L41-1005-33	SMALL FIXED INDUCTOR(10UH)	
CN407			E04-0154-05	PIN SOCKET		L315,316			L41-1095-33	SMALL FIXED INDUCTOR(1.0UH)	
CN408			E04-0193-05	PIN SOCKET		L401			L41-3305-33	SMALL FIXED INDUCTOR(33UH)	
CN801			E41-2672-05	PIN ASSY(3P)		L402,403			L41-4705-33	SMALL FIXED INDUCTOR(47UH)	
CN802			E04-0193-05	PIN SOCKET		L404			L41-2205-33	SMALL FIXED INDUCTOR(22UH)	
CN803			E40-6822-05	FLAT CABLE CONNECTOR(13P)		L405,406			L41-1205-33	SMALL FIXED INDUCTOR(12UH)	
CN804-806			E40-6656-05	PIN ASSY(36P)		L408			L41-1005-33	SMALL FIXED INDUCTOR(10UH)	
CN807			E41-2671-05	PIN ASSY(2P)		L410			L41-1005-33	SMALL FIXED INDUCTOR(10UH)	
CN920			E41-1493-05	PIN ASSY(10P)		L413			L41-1005-33	SMALL FIXED INDUCTOR(10UH)	
CN921			E40-6656-05	PIN ASSY(36P)		L501			L41-3305-33	SMALL FIXED INDUCTOR(33UH)	
CN923			E41-1483-05	PIN ASSY(11P)		L502			L41-5685-33	SMALL FIXED INDUCTOR(0.56UH)	
CN960			E41-1493-05	PIN ASSY(10P)		L503			L41-6885-33	SMALL FIXED INDUCTOR(0.68UH)	
CF401			L72-1019-05	CERAMIC FILTER(6MHZ)		L504			L41-5685-33	SMALL FIXED INDUCTOR(0.56UH)	
L1 -3			L92-0140-05	CHIP FERRITE		L505			L41-6885-33	SMALL FIXED INDUCTOR(0.68UH)	
L4			L41-1095-33	SMALL FIXED INDUCTOR(1.0UH)		L506,507			L39-1517-05	TOROIDAL COIL	
L5			L41-1098-40	SMALL FIXED INDUCTOR(1000NH)		L508,509			L41-3395-33	SMALL FIXED INDUCTOR(3.3UH)	
L8 ,9			L41-1098-40	SMALL FIXED INDUCTOR(1000NH)		L510			L41-5685-33	SMALL FIXED INDUCTOR(0.56UH)	
L10			L92-0140-05	CHIP FERRITE		L511			L41-6885-33	SMALL FIXED INDUCTOR(0.68UH)	
L11			L34-4607-15	AIR-CORE COIL(6T)		L512,513			L41-3305-33	SMALL FIXED INDUCTOR(33UH)	
L12			L41-3385-33	SMALL FIXED INDUCTOR(0.33UH)		L515			L41-5685-33	SMALL FIXED INDUCTOR(0.56UH)	
L13			L41-3985-33	SMALL FIXED INDUCTOR(0.39UH)		L516			L41-6885-33	SMALL FIXED INDUCTOR(0.68UH)	
L16 -18			L41-1098-40	SMALL FIXED INDUCTOR(1000NH)		L518			L41-1005-33	SMALL FIXED INDUCTOR(10UH)	
L19 ,20			L41-6865-55	SMALL FIXED INDUCTOR(6.8NH)		L519			L41-3385-33	SMALL FIXED INDUCTOR(0.33UH)	
L21			L41-2278-55	SMALL FIXED INDUCTOR(22NH)		L520			L41-3985-33	SMALL FIXED INDUCTOR(0.39UH)	
L22 ,23			L41-1878-55	SMALL FIXED INDUCTOR(18NH)		L521			L41-1095-33	SMALL FIXED INDUCTOR(1.0UH)	
L24			L41-1078-55	SMALL FIXED INDUCTOR(10NH)		L701			L41-1095-33	SMALL FIXED INDUCTOR(1.0UH)	
L25			L39-1498-05	TOROIDAL COIL		L801,802			L41-2785-33	SMALL FIXED INDUCTOR(0.27UH)	
L28			L41-1878-55	SMALL FIXED INDUCTOR(18NH)		X201			L77-3066-05	VCXO(19.2MHZ)	
L32			L41-3665-55	SMALL FIXED INDUCTOR(3.6NH)		X301			L77-3068-05	VCXO(20MHZ)	
L33			L41-1561-55	SMALL FIXED INDUCTOR(1.5NH)		X401	*		L77-3096-05	TCXO(19.2MHZ)	
L34			L79-1953-05	FILTER(938MHZ)		CP11,12			RK74GB1J102J	CHIP-COM 1.0K J 1/16W	
L35			L41-1561-55	SMALL FIXED INDUCTOR(1.5NH)		CP13			RK75GB1JR00	CHIP-COM 0 1/16W	
L37 ,38			L41-3665-55	SMALL FIXED INDUCTOR(3.6NH)		CP14,15			RK74GB1J681J	CHIP-COM 680 J 1/16W	
L39			L41-1005-33	SMALL FIXED INDUCTOR(10UH)		CP16-23			RK74GB1J102J	CHIP-COM 1.0K J 1/16W	
L40 ,41			L41-3965-55	SMALL FIXED INDUCTOR(3.9NH)		R3 ,4			RK73GB2A000J	CHIP R 0 J 1/10W	
L42 ,43			L41-1278-55	SMALL FIXED INDUCTOR(12NH)		R5			RK73GB2A473J	CHIP R 47K J 1/10W	
L45 ,46			L41-3965-55	SMALL FIXED INDUCTOR(3.9NH)		R6			RK73GB2A102J	CHIP R 1.0K J 1/10W	
L47			L41-1078-55	SMALL FIXED INDUCTOR(10NH)		R7			RK73GB2A473J	CHIP R 47K J 1/10W	
L48			L41-1278-55	SMALL FIXED INDUCTOR(12NH)		R8			RK73GB2A101J	CHIP R 100 J 1/10W	
L49			L41-1098-40	SMALL FIXED INDUCTOR(1000NH)		R9			RK73GB2A100J	CHIP R 10 J 1/10W	
L50 ,51			L41-6865-55	SMALL FIXED INDUCTOR(6.8NH)		R10			RK73GB2A101J	CHIP R 100 J 1/10W	
L52			L41-1005-33	SMALL FIXED INDUCTOR(10UH)		R11			RK73GB2A000J	CHIP R 0 J 1/10W	
L201			L41-1005-33	SMALL FIXED INDUCTOR(10UH)		R12			RK73GB2A105J	CHIP R 1.0M J 1/10W	
L202			L41-1095-33	SMALL FIXED INDUCTOR(1.0UH)		R13 -15			RK73GB2A100J	CHIP R 10 J 1/10W	
L203			L41-1005-33	SMALL FIXED INDUCTOR(10UH)		R16			RK73GB2A105J	CHIP R 1.0M J 1/10W	
L204			L41-3385-33	SMALL FIXED INDUCTOR(0.33UH)		R17			RK73GB2A151J	CHIP R 150 J 1/10W	
L205			L41-3985-33	SMALL FIXED INDUCTOR(0.39UH)		R18			RK73GB2A221J	CHIP R 220 J 1/10W	
L206			L41-2785-33	SMALL FIXED INDUCTOR(0.27UH)		R19			RK73GB2A104J	CHIP R 100K J 1/10W	
L207,208			L41-1095-33	SMALL FIXED INDUCTOR(1.0UH)		R21			RK73GB2A102J	CHIP R 1.0K J 1/10W	
L301			L41-1095-33	SMALL FIXED INDUCTOR(1.0UH)		R22			RK73GB2A332J	CHIP R 3.3K J 1/10W	
L302,303			L41-1005-33	SMALL FIXED INDUCTOR(10UH)		R23			RK73GB2A470J	CHIP R 47 J 1/10W	
L304			L41-3385-33	SMALL FIXED INDUCTOR(0.33UH)		R24			RK73GB2A682J	CHIP R 6.8K J 1/10W	
L305			L41-3985-33	SMALL FIXED INDUCTOR(0.39UH)		R25			RK73GB2A100J	CHIP R 10 J 1/10W	
L306-308			L41-1095-33	SMALL FIXED INDUCTOR(1.0UH)		R26			RK73GB2A683J	CHIP R 68K J 1/10W	
L309			L41-3985-33	SMALL FIXED INDUCTOR(0.39UH)		R27			RK73GB2A000J	CHIP R 0 J 1/10W	
L310			L41-3385-33	SMALL FIXED INDUCTOR(0.33UH)		R28			RK73GB2A106J	CHIP R 10M J 1/10W	
L311			L41-1095-33	SMALL FIXED INDUCTOR(1.0UH)		R29			RK73GB2A471J	CHIP R 470 J 1/10W	
L312			L41-3985-33	SMALL FIXED INDUCTOR(0.39UH)		R32			RK73GB2A221J	CHIP R 220 J 1/10W	
L313			L41-3385-33	SMALL FIXED INDUCTOR(0.33UH)		R35			RK73GB2A470J	CHIP R 47 J 1/10W	
						R38			RK73GB2A000J	CHIP R 0 J 1/10W	

PARTS LIST

TX UNIT (X56-3150-11)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
R39			RK73GB2A224J	CHIP R 220K J 1/10W		R207,208			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R42			RK73GB2A000J	CHIP R 0 J 1/10W		R209,210			RK73GB2A104J	CHIP R 100K J 1/10W	
R43			RK73GB2A101J	CHIP R 100 J 1/10W		R211			RK73GB2A2R2J	CHIP R 2.2 J 1/10W	
R44			RK73GB2A184J	CHIP R 180K J 1/10W		R213,214			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R45			RN73GE1J101D	METAL FILM 100 D 1/16W		R216			RK73GB2A471J	CHIP R 470 J 1/10W	
R46			RN73GE1J271D	METAL FILM 270 D 1/16W		R217,218			RK73GB2A100J	CHIP R 10 J 1/10W	
R48 ,49			RK73GB2A331J	CHIP R 330 J 1/10W		R219			RK73GB2A474J	CHIP R 470K J 1/10W	
R50			RK73GB2A000J	CHIP R 0 J 1/10W		R220			RK73GB2A100J	CHIP R 10 J 1/10W	
R51			RK73GB2A392J	CHIP R 3.9K J 1/10W		R221,222			RK73GB2A473J	CHIP R 47K J 1/10W	
R52			RK73GB2A472J	CHIP R 4.7K J 1/10W		R223			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R53			RK73GB2A103J	CHIP R 10K J 1/10W		R224			RK73GB2A470J	CHIP R 47 J 1/10W	
R54			RK73GB2A272J	CHIP R 2.7K J 1/10W		R225			RK73GB2A101J	CHIP R 100 J 1/10W	
R55			RK73GB2A101J	CHIP R 100 J 1/10W		R226			RK73GB2A104J	CHIP R 100K J 1/10W	
R56			RK73GB2A221J	CHIP R 220 J 1/10W		R228,229			RK73GB2A104J	CHIP R 100K J 1/10W	
R57			RK73GB2A470J	CHIP R 47 J 1/10W		R230,231			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R58			RK73GB2A000J	CHIP R 0 J 1/10W		R232			RK73GB2A154J	CHIP R 150K J 1/10W	
R59			RK73GB2A271J	CHIP R 270 J 1/10W		R233-235			RK73GB2A104J	CHIP R 100K J 1/10W	
R60			RK73GB2A180J	CHIP R 18 J 1/10W		R236			RK73GB2A683J	CHIP R 68K J 1/10W	
R61			RK73GB2A271J	CHIP R 270 J 1/10W		R237			RK73GB2A000J	CHIP R 0 J 1/10W	
R62			RK73GB2A101J	CHIP R 100 J 1/10W		R238			RK73GB2A183J	CHIP R 18K J 1/10W	
R63			RK73GB2A391J	CHIP R 390 J 1/10W		R239			RK73GB2A103J	CHIP R 10K J 1/10W	
R64			RK73GB2A120J	CHIP R 12 J 1/10W		R240			RK73GB2A105J	CHIP R 1.0M J 1/10W	
R65			RK73GB2A391J	CHIP R 390 J 1/10W		R241			RK73GB2A471J	CHIP R 470 J 1/10W	
R66 ,67			RK73GB2A102J	CHIP R 1.0K J 1/10W		R242,243			RK73GB2A000J	CHIP R 0 J 1/10W	
R68			RK73GB2A220J	CHIP R 22 J 1/10W		R244			RK73GB2A681J	CHIP R 680 J 1/10W	
R70			RK73GB2A103J	CHIP R 10K J 1/10W		R245			RK73GB2A100J	CHIP R 10 J 1/10W	
R71			RK73GB2A152J	CHIP R 1.5K J 1/10W		R246-248			RK73GB2A104J	CHIP R 100K J 1/10W	
R74			RK73GB2A000J	CHIP R 0 J 1/10W		R249			RK73GB2A000J	CHIP R 0 J 1/10W	
R77			RK73GB2A221J	CHIP R 220 J 1/10W		R250-252			RK73GB2A100J	CHIP R 10 J 1/10W	
R78			RK73GB2A562J	CHIP R 5.6K J 1/10W		R253-256			RK73GB2A104J	CHIP R 100K J 1/10W	
R79			RK73GB2A152J	CHIP R 1.5K J 1/10W		R257			RK73GB2A332J	CHIP R 3.3K J 1/10W	
R81			RK73GB2A270J	CHIP R 27 J 1/10W		R258			RK73GB2A105J	CHIP R 1.0M J 1/10W	
R83			RK73GB2A000J	CHIP R 0 J 1/10W		R259			RK73GB2A221J	CHIP R 220 J 1/10W	
R85			RK73GB2A000J	CHIP R 0 J 1/10W		R260			RK73GB2A471J	CHIP R 470 J 1/10W	
R86 ,87			RK73GB2A474J	CHIP R 470K J 1/10W		R261			RK73GB2A682J	CHIP R 6.8K J 1/10W	
R89			RK73GB2A000J	CHIP R 0 J 1/10W		R262			RK73GB2A000J	CHIP R 0 J 1/10W	
R91			RK73GB2A102J	CHIP R 1.0K J 1/10W		R263,264			RK73GB2A100J	CHIP R 10 J 1/10W	
R92			RK73GB2A563J	CHIP R 56K J 1/10W		R265-273			RK73GB2A104J	CHIP R 100K J 1/10W	
R93			RK73GB2A392J	CHIP R 3.9K J 1/10W		R274			RK73GB2A101J	CHIP R 100 J 1/10W	
R94			RK73GB2A103J	CHIP R 10K J 1/10W		R275			RK73GB2A822J	CHIP R 8.2K J 1/10W	
R95			RK73GB2A123J	CHIP R 12K J 1/10W		R276			RK73GB2A2R2J	CHIP R 2.2 J 1/10W	
R96			RK73GB2A221J	CHIP R 220 J 1/10W		R277,278			RK73GB2A000J	CHIP R 0 J 1/10W	
R97			RK73GB2A474J	CHIP R 470K J 1/10W		R279			RK73GB2A182J	CHIP R 1.8K J 1/10W	
R98			RK73GB2A220J	CHIP R 22 J 1/10W		R301			RK73GB2A000J	CHIP R 0 J 1/10W	
R99			RK73GB2A4R7J	CHIP R 4.7 J 1/10W		R302			RK73GB2A152J	CHIP R 1.5K J 1/10W	
R100			RK73GB2A000J	CHIP R 0 J 1/10W		R304			RK73GB2A474J	CHIP R 470K J 1/10W	
R103,104			RK73GB2A000J	CHIP R 0 J 1/10W		R305			RK73GB2A100J	CHIP R 10 J 1/10W	
R105			RK73GB2A104J	CHIP R 100K J 1/10W		R306			RK73GB2A474J	CHIP R 470K J 1/10W	
R106,107			RK73GB2A474J	CHIP R 470K J 1/10W		R307			RK73GB2A100J	CHIP R 10 J 1/10W	
R108			RK73GB2A821J	CHIP R 820 J 1/10W		R308			RK73GB2A474J	CHIP R 470K J 1/10W	
R111-114			RK73GB2A472J	CHIP R 4.7K J 1/10W		R309			RK73GB2A101J	CHIP R 100 J 1/10W	
R115			RK73GB2A473J	CHIP R 47K J 1/10W		R310			RK73GB2A100J	CHIP R 10 J 1/10W	
R118,119			RK73GB2A474J	CHIP R 470K J 1/10W		R311			RK73GB2A104J	CHIP R 100K J 1/10W	
R121,122			RK73GB2A000J	CHIP R 0 J 1/10W		R312,313			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R201			RK73GB2A104J	CHIP R 100K J 1/10W		R314			RK73GB2A104J	CHIP R 100K J 1/10W	
R202			RK73GB2A473J	CHIP R 47K J 1/10W		R315			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R203			RK73GB2A2R2J	CHIP R 2.2 J 1/10W		R316			RK73GB2A104J	CHIP R 100K J 1/10W	
R204			RK73GB2A104J	CHIP R 100K J 1/10W		R317			RK73GB2A2R2J	CHIP R 2.2 J 1/10W	
R205			RK73GB2A000J	CHIP R 0 J 1/10W		R318			RK73GB2A103J	CHIP R 10K J 1/10W	
R206			RK73GB2A104J	CHIP R 100K J 1/10W		R319,320			RK73GB2A105J	CHIP R 1.0M J 1/10W	

PARTS LIST

TX UNIT (X56-3150-11)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
R321			RK73GB2A104J	CHIP R 100K J 1/10W		R420			RK73GB2A100J	CHIP R 10 J 1/10W	
R322			RK73GB2A472J	CHIP R 4.7K J 1/10W		R421			RK73GB2A474J	CHIP R 470K J 1/10W	
R323			RK73GB2A470J	CHIP R 47 J 1/10W		R422			RK73GB2A100J	CHIP R 10 J 1/10W	
R324,325			RK73GB2A000J	CHIP R 0 J 1/10W		R423			RK73GB2A101J	CHIP R 100 J 1/10W	
R326			RK73GB2A224J	CHIP R 220K J 1/10W		R424			RK73GB2A100J	CHIP R 10 J 1/10W	
R327			RK73GB2A000J	CHIP R 0 J 1/10W		R425			RK73GB2A332J	CHIP R 3.3K J 1/10W	
R329			RK73GB2A103J	CHIP R 10K J 1/10W		R426			RK73GB2A563J	CHIP R 56K J 1/10W	
R330			RK73GB2A102J	CHIP R 1.0K J 1/10W		R427			RK73GB2A000J	CHIP R 0 J 1/10W	
R331			RK73GB2A221J	CHIP R 220 J 1/10W		R429			RK73GB2A000J	CHIP R 0 J 1/10W	
R332			RK73GB2A100J	CHIP R 10 J 1/10W		R430			RK73GB2A473J	CHIP R 47K J 1/10W	
R333			RK73GB2A822J	CHIP R 8.2K J 1/10W		R431-434			RK73GB2A000J	CHIP R 0 J 1/10W	
R334			RK73GB2A123J	CHIP R 12K J 1/10W		R435			RK73GB2A563J	CHIP R 56K J 1/10W	
R335			RK73GB2A332J	CHIP R 3.3K J 1/10W		R501			RK73GB2A104J	CHIP R 100K J 1/10W	
R336			RK73GB2A2R2J	CHIP R 2.2 J 1/10W		R502			RK73GB2A271J	CHIP R 270 J 1/10W	
R337			RK73GB2A182J	CHIP R 1.8K J 1/10W		R503			RK73GB2A180J	CHIP R 18 J 1/10W	
R338			RK73GB2A471J	CHIP R 470 J 1/10W		R504			RK73GB2A271J	CHIP R 270 J 1/10W	
R339			RK73GB2A104J	CHIP R 100K J 1/10W		R506			RK73GB2A470J	CHIP R 47 J 1/10W	
R340			RK73GB2A100J	CHIP R 10 J 1/10W		R508			RK73GB2A000J	CHIP R 0 J 1/10W	
R341			RK73GB2A221J	CHIP R 220 J 1/10W		R509,510			RK73GB2A104J	CHIP R 100K J 1/10W	
R342			RK73GB2A100J	CHIP R 10 J 1/10W		R511			RK73GB2A1R0J	CHIP R 1 J 1/10W	
R344			RK73GB2A682J	CHIP R 6.8K J 1/10W		R512			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R345			RK73GB2A332J	CHIP R 3.3K J 1/10W		R513			RK73GB2A220J	CHIP R 22 J 1/10W	
R346			RK73GB2A222J	CHIP R 2.2K J 1/10W		R514			RK73GB2A104J	CHIP R 100K J 1/10W	
R347			RK73GB2A471J	CHIP R 470 J 1/10W		R515			RK73GB2A473J	CHIP R 47K J 1/10W	
R348			RK73GB2A100J	CHIP R 10 J 1/10W		R516			RK73GB2A104J	CHIP R 100K J 1/10W	
R349			RK73GB2A470J	CHIP R 47 J 1/10W		R517			RK73GB2A473J	CHIP R 47K J 1/10W	
R350			RK73GB2A682J	CHIP R 6.8K J 1/10W		R518			RK73GH2A333D	CHIP R 33K D 1/10W	
R351			RK73GB2A332J	CHIP R 3.3K J 1/10W		R519			RK73GB2A561J	CHIP R 560 J 1/10W	
R352			RK73GB2A222J	CHIP R 2.2K J 1/10W		R520			RK73GB2A473J	CHIP R 47K J 1/10W	
R353			RK73GB2A221J	CHIP R 220 J 1/10W		R522			RK73GB2A271J	CHIP R 270 J 1/10W	
R354			RK73GB2A100J	CHIP R 10 J 1/10W		R523			RK73GB2A180J	CHIP R 18 J 1/10W	
R355			RK73GB2A470J	CHIP R 47 J 1/10W		R524			RK73GB2A271J	CHIP R 270 J 1/10W	
R356			RK73GB2A000J	CHIP R 0 J 1/10W		R525			RK73GB2A1R0J	CHIP R 1 J 1/10W	
R357			RK73GB2A221J	CHIP R 220 J 1/10W		R526			RK73GB2A220J	CHIP R 22 J 1/10W	
R358			RK73GB2A472J	CHIP R 4.7K J 1/10W		R527,528			RK73GB2A473J	CHIP R 47K J 1/10W	
R359			RK73GB2A331J	CHIP R 330 J 1/10W		R529,530			RK73GB2A104J	CHIP R 100K J 1/10W	
R360			RK73GB2A221J	CHIP R 220 J 1/10W		R532			RK73GB2A100J	CHIP R 10 J 1/10W	
R361			RK73GB2A123J	CHIP R 12K J 1/10W		R533			RK73GB2A391J	CHIP R 390 J 1/10W	
R362			RK73GB2A472J	CHIP R 4.7K J 1/10W		R534			RK73GB2A120J	CHIP R 12 J 1/10W	
R363			RK73GB2A123J	CHIP R 12K J 1/10W		R535			RK73GB2A391J	CHIP R 390 J 1/10W	
R364			RK73GB2A331J	CHIP R 330 J 1/10W		R536			RK73GH2A154D	CHIP R 150K D 1/10W	
R365,366			RK73GB2A100J	CHIP R 10 J 1/10W		R537			RK73GB2A564J	CHIP R 560K J 1/10W	
R367,368			RK73GB2A102J	CHIP R 1.0K J 1/10W		R538			RK73GB2A103J	CHIP R 10K J 1/10W	
R369			RK73GB2A000J	CHIP R 0 J 1/10W		R539			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R401			RK73GB2A471J	CHIP R 470 J 1/10W		R540			RK73GB2A104J	CHIP R 100K J 1/10W	
R402			RK73GB2A561J	CHIP R 560 J 1/10W		R541			RK73GB2A181J	CHIP R 180 J 1/10W	
R403			RK73GB2A682J	CHIP R 6.8K J 1/10W		R542			RK73GB2A563J	CHIP R 56K J 1/10W	
R404			RK73GB2A332J	CHIP R 3.3K J 1/10W		R543			RK73GB2A391J	CHIP R 390 J 1/10W	
R405			RK73GB2A471J	CHIP R 470 J 1/10W		R544			RK73GB2A120J	CHIP R 12 J 1/10W	
R406			RK73GB2A000J	CHIP R 0 J 1/10W		R545			RK73GB2A391J	CHIP R 390 J 1/10W	
R407			RK73GB2A100J	CHIP R 10 J 1/10W		R546			RK73GB2A100J	CHIP R 10 J 1/10W	
R408,409			RK73GB2A471J	CHIP R 470 J 1/10W		R547			RK73GB2A103J	CHIP R 10K J 1/10W	
R410,411			RK73GB2A104J	CHIP R 100K J 1/10W		R548			RK73GB2A181J	CHIP R 180 J 1/10W	
R412			RK73GB2A100J	CHIP R 10 J 1/10W		R550			RK73GB2A564J	CHIP R 560K J 1/10W	
R413			RK73GB2A331J	CHIP R 330 J 1/10W		R551			RK73GH2A154D	CHIP R 150K D 1/10W	
R414			RK73GB2A104J	CHIP R 100K J 1/10W		R552			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R415,416			RK73GB2A102J	CHIP R 1.0K J 1/10W		R553			RK73GB2A104J	CHIP R 100K J 1/10W	
R417			RK73GB2A000J	CHIP R 0 J 1/10W		R554			RK73GB2A333J	CHIP R 33K J 1/10W	
R418			RK73GB2A102J	CHIP R 1.0K J 1/10W		R555			RK73GB2A473J	CHIP R 47K J 1/10W	
R419			RK73GB2A392J	CHIP R 3.9K J 1/10W		R556,557			RK73GB2A470J	CHIP R 47 J 1/10W	

PARTS LIST

TX UNIT (X56-3150-11)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
R558			RK73GB2A333J	CHIP R 33K J 1/10W		R831,832			RK73GB2A000J	CHIP R 0 J 1/10W	
R559			RK73GB2A473J	CHIP R 47K J 1/10W		R835			RK73GB2A000J	CHIP R 0 J 1/10W	
R561			RK73GB2A474J	CHIP R 470K J 1/10W		R845-847			RK73GB2A000J	CHIP R 0 J 1/10W	
R563			RK73GB2A271J	CHIP R 270 J 1/10W		R848			RK73GB2A103J	CHIP R 10K J 1/10W	
R564-566			RK73GB2A102J	CHIP R 1.0K J 1/10W		R849-852			RK73GB2A000J	CHIP R 0 J 1/10W	
R567,568			RK73GB2A104J	CHIP R 100K J 1/10W		R855-859			RK73GB2A000J	CHIP R 0 J 1/10W	
R569			RK73GB2A474J	CHIP R 470K J 1/10W		R860			RK73GB2A103J	CHIP R 10K J 1/10W	
R570			RK73GB2A000J	CHIP R 0 J 1/10W		R920-932			RK73GB2A000J	CHIP R 0 J 1/10W	
R575			RK73GB2A474J	CHIP R 470K J 1/10W		R933			RK73GB2A821J	CHIP R 820 J 1/10W	
R576			RK73GB2A104J	CHIP R 100K J 1/10W		R934,935			RK73GB2A000J	CHIP R 0 J 1/10W	
R577,578			RK73GB2A221J	CHIP R 220 J 1/10W		R936,937			RK73GB2A122J	CHIP R 1.2K J 1/10W	
R580			RK73GB2A101J	CHIP R 100 J 1/10W		R938,939			RK73GB2A821J	CHIP R 820 J 1/10W	
R583			RK73GB2A822J	CHIP R 8.2K J 1/10W		R940			RK73GB2A122J	CHIP R 1.2K J 1/10W	
R584			RK73GB2A471J	CHIP R 470 J 1/10W		R941			RK73GB2A821J	CHIP R 820 J 1/10W	
R585			RK73GB2A100J	CHIP R 10 J 1/10W		R942			RK73GB2A000J	CHIP R 0 J 1/10W	
R586			RK73GB2A124J	CHIP R 120K J 1/10W		R943			RK73GH2A224D	CHIP R 220K D 1/10W	
R587			RK73GB2A102J	CHIP R 1.0K J 1/10W		R944,945			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R588			RK73GB2A223J	CHIP R 22K J 1/10W		R946			RK73GB2A103J	CHIP R 10K J 1/10W	
R589			RK73GB2A100J	CHIP R 10 J 1/10W		R947			RK73GB2A000J	CHIP R 0 J 1/10W	
R590			RK73GB2A181J	CHIP R 180 J 1/10W		R948,949			RK73GH2A104D	CHIP R 100K D 1/10W	
R591			RK73GB2A222J	CHIP R 2.2K J 1/10W		R950			RK73GH2A822D	CHIP R 8.2K D 1/10W	
R592			RK73GB2A221J	CHIP R 220 J 1/10W		R951			RK73GB2A122J	CHIP R 1.2K J 1/10W	
R593			RK73GB2A100J	CHIP R 10 J 1/10W		R960-965			RK73GB2A000J	CHIP R 0 J 1/10W	
R594			RK73GB2A000J	CHIP R 0 J 1/10W		R966,967			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R595			RK73GB2A224J	CHIP R 220K J 1/10W		S920-925			S70-0502-05	TACT SWITCH	
R599			RK73GB2A104J	CHIP R 100K J 1/10W		D1			DA221	DIODE	
R600			RK73GB2A102J	CHIP R 1.0K J 1/10W		D2 -5			1SV283F	VARIABLE CAPACITANCE DIODE	
R601			RK73GB2A392J	CHIP R 3.9K J 1/10W		D6			1SV278F	VARIABLE CAPACITANCE DIODE	
R602			RK73GB2A103J	CHIP R 10K J 1/10W		D7			HSM88AS-E	DIODE	
R603			RK73GB2A153J	CHIP R 15K J 1/10W		D401,402			HSC277	DIODE	
R604			RK73GB2A272J	CHIP R 2.7K J 1/10W		D501,502			UDZW3.0(B)	ZENER DIODE	
R605			RK73GB2A562J	CHIP R 5.6K J 1/10W		D503			HSC277	DIODE	
R606,607			RK73GB2A682J	CHIP R 6.8K J 1/10W		D504-506			HSM88AS-E	DIODE	
R608			RK73GB2A332J	CHIP R 3.3K J 1/10W		D507			HSC277	DIODE	
R609,610			RK73GB2A000J	CHIP R 0 J 1/10W		D509,510			HSC119	DIODE	
R612-614			RK73GB2A000J	CHIP R 0 J 1/10W		D511,512			UDZW3.0(B)	ZENER DIODE	
R615			RK73GB2A102J	CHIP R 1.0K J 1/10W		D515			HSM88AS-E	DIODE	
R619			RK73GB2A000J	CHIP R 0 J 1/10W		D516-519			HSC277	DIODE	
R621			RK73GB2A470J	CHIP R 47 J 1/10W		D801			CSA70-401L	SURGE ABSORBER	
R622			RK73GH2A393D	CHIP R 39K D 1/10W		D933,934			HSM88AS-E	DIODE	
R701,702			RK73GB2A100J	CHIP R 10 J 1/10W		D935,936			1SS355	DIODE	
R703			RK73GB2A104J	CHIP R 100K J 1/10W		D960,961			PSA05-11SRWA	LED	
R704			RK73GB2A100J	CHIP R 10 J 1/10W		IC1,2			TC7WH126FU-F	MOS-IC	
R705			RK73GB2A104J	CHIP R 100K J 1/10W		IC3			LMC7101BIM5	MOS-IC	
R706			RK73GB2A474J	CHIP R 470K J 1/10W		IC5			SKY72310-362	MOS-IC	
R707,708			RK73GB2A104J	CHIP R 100K J 1/10W		IC6			LMC7101BIM5	MOS-IC	
R709			RK73GB2A100J	CHIP R 10 J 1/10W		IC7			NJM2386ADL3-09	ANALOGUE IC	
R710			RK73GB2A474J	CHIP R 470K J 1/10W		IC8			NJM2904E-ZB	ANALOGUE IC	
R711,712			RK73GB2A104J	CHIP R 100K J 1/10W		IC201			BH2220FVM	ANALOGUE IC	
R713-715			RK73GB2A102J	CHIP R 1.0K J 1/10W		IC202			S24CS02AFJTBG	ROM IC	
R717			RK73GB2A102J	CHIP R 1.0K J 1/10W		IC203			NJM2732V	BI-POLAR IC	
R718-721			RK73GB2A100J	CHIP R 10 J 1/10W		IC204			ADF4001BRUZ	MOS-IC	
R722			RK73GB2A102J	CHIP R 1.0K J 1/10W		IC205			NJU6368PF1	MOS-IC	
R801			RK73GB2A000J	CHIP R 0 J 1/10W		IC206			NJM2732V	BI-POLAR IC	
R812			RK73GB2A104J	CHIP R 100K J 1/10W		IC207			M62364FP-F	MOS-IC	
R813			RK73GB2A103J	CHIP R 10K J 1/10W		IC208			LMC7101BIM5	MOS-IC	
R816,817			RK73GB2A000J	CHIP R 0 J 1/10W		IC301			NJU6368PF1	MOS-IC	
R822			RK73GB2A000J	CHIP R 0 J 1/10W		IC302			LMC7101BIM5	MOS-IC	
R823			RK73GB2A104J	CHIP R 100K J 1/10W		IC303			ADF4001BRUZ	MOS-IC	
R824-829			RK73GB2A000J	CHIP R 0 J 1/10W							

PARTS LIST

TX UNIT (X56-3150-11)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
IC401			AD9835BRUZ	MOS-IC							
IC402			NJU6368PF1	MOS-IC							
IC403			TK71733S	BI-POLAR IC							
IC501,502			TA75S01F-F	MOS-IC							
IC503			TC7WH74FU-F	MOS-IC							
IC504			NJU6368PF1	MOS-IC							
IC505,506			TC75S59F-F	MOS-IC							
IC701			BU4094BCFV	MOS-IC							
IC702			AD1582	ANALOGUE IC							
IC703			AD7908BRU	MOS-IC							
IC704			LM50BIM3/NOPB	MOS-IC							
IC705			AD5312BRM	MOS-IC							
IC707-710			NJM78M05DL1AZB	ANALOGUE IC							
IC711			TC7WH126FU-F	MOS-IC							
IC808,809	1B		KIA7808API	BI-POLAR IC							
IC810			NJM2878F4-33	BI-POLAR IC							
IC920-922			TC7SET126FU-F	MOS-IC							
IC923-925			BU4094BCFV	MOS-IC							
IC926			NJM2732V	BI-POLAR IC							
IC960-963			BU4094BCFV	MOS-IC							
Q1 ,2			SSM3K15TE(F)	FET							
Q3			2SC4617(R)	TRANSISTOR							
Q4			2SK2539-7	FET							
Q5 ,6			2SC5108(Y)F	TRANSISTOR							
Q7			2SC4116(BL)F	TRANSISTOR							
Q8 ,9			2SC5108(Y)F	TRANSISTOR							
Q10			2SC5337	TRANSISTOR							
Q11			RD01MUS1-T113	FET							
Q13			SSM3K15TE(F)	FET							
Q14			SSM3J01F	FET							
Q15			SSM3K15TE(F)	FET							
Q16			SSM3J01F	FET							
Q201			SSM3K15TE(F)	FET							
Q202			2SA1832F	TRANSISTOR							
Q203,204			SSM3K15TE(F)	FET							
Q205,206			2SC4617(R)	TRANSISTOR							
Q301-304			SSM3K15TE(F)	FET							
Q305			2SA1832F	TRANSISTOR							
Q306-311			2SC4617(R)	TRANSISTOR							
Q401,402			2SC4617(R)	TRANSISTOR							
Q403			SSM3K15TE(F)	FET							
Q404			SSM3J01F	FET							
Q405-407			SSM3K15TE(F)	FET							
Q501			SSM3J01F	FET							
Q502			SSM3K15TE(F)	FET							
Q503,504			RD01MUS1-T113	FET							
Q505,506			3SK294-FP	FET							
Q507			SSM3J01F	FET							
Q508			SSM3K15TE(F)	FET							
Q509,510			SSM6L05FU-F	FET							
Q511			2SC4617(R)	TRANSISTOR							
Q512			SSM3K15TE(F)	FET							
Q513,514			2SC4617(R)	TRANSISTOR							
Q515-518			SSM3K15TE(F)	FET							
Q920-930			UMG1N	TRANSISTOR							
Q931			2SC4116(Y)F	TRANSISTOR							
Q932			2SA1586(Y)F	TRANSISTOR							
Q960-976			UMG1N	TRANSISTOR							
TH1			157-302-65801	THERMISTOR							

If a part reference number is listed in a shaded box, that part does not come with the PCB.