


EXPLODED VIEW

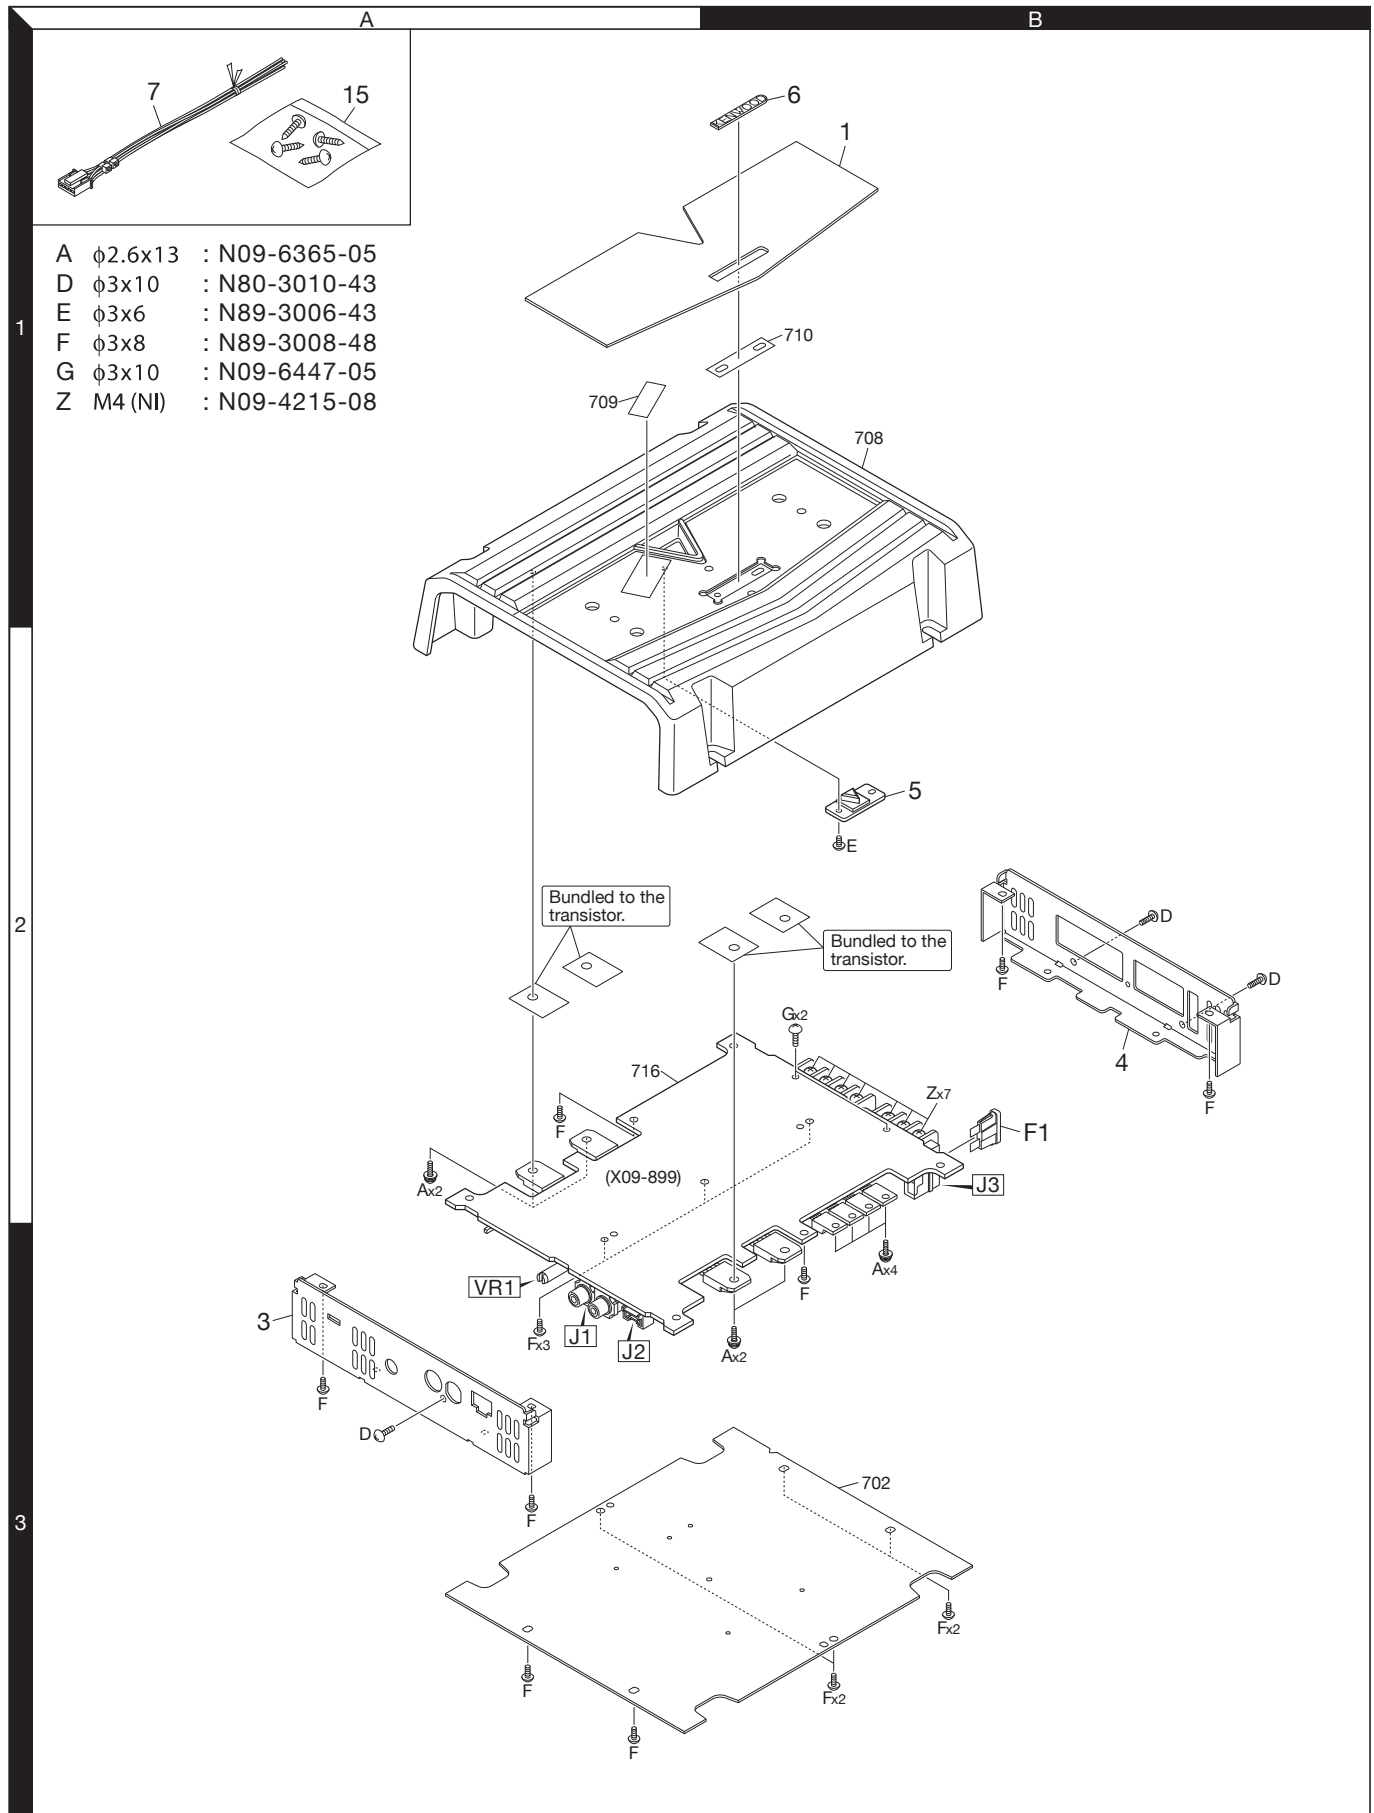

Parts with the exploded numbers larger than 700 are not supplied.

KAC-1502S/5205/M526

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	Ad	New	Parts No.	Description	Destination
KAC-1502S/5205/M526					
1	1B	*	A21-6803-02	DRESSING PANEL	K
1	1B	*	A21-6804-02	DRESSING PANEL	E1
1	1B	*	A21-6805-02	DRESSING PANEL	M1
3	3A	*	A64-5165-02	PANEL (FRONT)	
4	2B	*	A64-5166-02	PANEL (REAR)	
5	2B		B19-2586-14	LIGHTING BOARD	
6	1B		B43-0336-04	BADGE	
-		*	B64-4779-00	INST. MANUAL (ENG.FRE.SPA.)	KE1
-		*	B64-4780-00	INST. MANUAL (GER.DUT.ITA.)	E1
-		*	B64-4781-00	INST. MANUAL (POL.RUS.UKR.)	E1
-		*	B64-4782-00	INST. MANUAL (ENG.S-CHI.)	M1
7	1A	*	E30-6984-05	CONNECTING CORD ASSY (190mm)	
F1	2B		F52-0044-05	FUSE (BLADE TYPE) (25A)	
-		*	H54-4996-03	ITEM CARTON CASE	K
-		*	H54-4997-03	ITEM CARTON CASE	E1
-		*	H54-4998-03	ITEM CARTON CASE	M1
15	1A	*	N99-1840-05	SCREW SET	
A	3B		N09-6365-05	SEMS (TAPTITE SCREW)	
D	2B		N80-3010-43	PAN HEAD TAPTITE SCREW	
E	2B		N89-3006-43	BINDING HEAD TAPTITE SCREW	
F	3B		N89-3008-48	BINDING HEAD TAPTITE SCREW	
Z	2B		N09-4215-08	TERMINAL SCREW (M4)	
AUDIO UNIT (X09-8990-10)					
D4			B30-1743-05	LED (RED LED)	
C1			CD04AU1H100M	NP-ELEC 10UF 50WV	
C2			CK73GB1H103K	CHIP C 0.010UF K	
C3			CD04BN1C101M	ELECTRO 100UF 16WV	
C4			CK73FB1C105K	CHIP C 1.0UF K	
C5			CK73GB1H102K	CHIP C 1000PF K	
C6			CK73GB1H104K	CHIP C 0.10UF K	
C7			CD04BN1H100M	ELECTRO 10UF 50WV	
C8			CC73GCH1H102J	CHIP C 1000PF J	
C9			CD04BN1V470M	ELECTRO 47UF 35WV	
C10			CK73GB1H104K	CHIP C 0.10UF K	
C11			CK73GB1H103K	CHIP C 0.010UF K	
C12			CD04BN1H330M	ELECTRO 33UF 50WV	
C13			C90-6937-05	ELECTRO 2200UF 16WV	
C14 ,15			CK73GB1H152K	CHIP C 1500PF K	
C16 ,17		*	C90-7002-05	ELECTRO 2200UF 35WV	
C18 ,19			CD04BN1V470M	ELECTRO 47UF 35WV	
C20 ,21			CK73GB1H103K	CHIP C 0.010UF K	
C50			CK73EB1H474K	CHIP C 0.47UF K	
C51			CK73GB1H104K	CHIP C 0.10UF K	
C101,102		*	CD04BN1H220M	ELECTRO 22UF 50WV	
C103,104			CC73GCH1H271J	CHIP C 270PF J	
C105,106			CC73GCH1H150J	CHIP C 15PF J	
C107,108			CC73GCH1H330J	CHIP C 33PF J	
C109			CK73FB1E474K	CHIP C 0.47UF K	
C110			CK73GB1H104K	CHIP C 0.10UF K	

Ref. No.	Ad	New	Parts No.	Description	Destination
C111			CK73GB1H153K	CHIP C 0.015UF K	
C112			CC73GCH1H101J	CHIP C 100PF J	
C113,114			CK73GB1H103K	CHIP C 0.010UF K	
C115			CK73GB1H104K	CHIP C 0.10UF K	
C116			CC73GCH1H100D	CHIP C 10PF D	
C117			CD04BN1H100M	ELECTRO 10UF 50WV	
C151,152			CD04BN1A221M	ELECTRO 220UF 10WV	
C201,202			CC73GCH1H470J	CHIP C 47PF J	
C205,206			CK73GB1H103K	CHIP C 0.010UF K	
C207,208			CK73GB1H473K	CHIP C 0.047UF K	
C251,252			CD04BJ1A221M	ELECTRO 220UF 10WV	
C253,254			CC73GCH1H050C	CHIP C 5.0PF C	
J1	3A	*	E63-0965-05	PIN JACK	
J2	3A	*	E41-3247-05	PIN ASSY	
J3	2B		E70-0855-05	SCREW TERMINAL BOARD	
L1		*	L33-2558-05	CHOKE COIL	
L2		*	L19-0841-05	TRANSFORMER FOR CONVERTER	
G	2B		N09-6447-05	TAPTITE SCREW (3X10)	
R1			RK73EB2E392J	CHIP R 3.9K J 1/4W	
R2			RK73GB2A682J	CHIP R 6.8K J 1/10W	
R3 -5			RK73GB2A392J	CHIP R 3.9K J 1/10W	
R6 ,7			RK73GB2A473J	CHIP R 47K J 1/10W	
R8			RK73GB2A562J	CHIP R 5.6K J 1/10W	
R9			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R11 ,12			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R13			RK73GB2A203J	CHIP R 20K J 1/10W	
R14			RK73GB2A104J	CHIP R 100K J 1/10W	
R15			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R16			RK73GB2A100J	CHIP R 10 J 1/10W	
R17			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R18			RK73GB2A272J	CHIP R 2.7K J 1/10W	
R19 ,20			RK73GB2A103J	CHIP R 10K J 1/10W	
R21			RK73EB2E132J	CHIP R 1.3K J 1/4W	
R22			RK73GB2A223J	CHIP R 22K J 1/10W	
R23			RK73GB2A474J	CHIP R 470K J 1/10W	
R24			RK73GB2A823J	CHIP R 82K J 1/10W	
R25 ,26			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R27 ,28			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R29 ,30			RK73GB2A820J	CHIP R 82 J 1/10W	
R31 ,32			RK73PB2H100J	CHIP R 10 J 1/2W	
R33 ,34			RS14KB3A821J	FL-PROOF RS 820 J 1W	
R35			RK73GB2A103J	CHIP R 10K J 1/10W	
R36			RK73GB2A184J	CHIP R 180K J 1/10W	
R37			RK73GB2A103J	CHIP R 10K J 1/10W	
R38 ,39			RK73EB2E302J	CHIP R 3.0K J 1/4W	
R40			RK73GB2A152J	CHIP R 1.5K J 1/10W	
R50 ,51			RK73EB2E222J	CHIP R 2.2K J 1/4W	
R101,102			RK73GB2A183J	CHIP R 18K J 1/10W	
R103,104			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R105,106			RK73GB2A821J	CHIP R 820 J 1/10W	
R107,108			RK73GB2A103J	CHIP R 10K J 1/10W	
R109,110			RK73GB2A393J	CHIP R 39K J 1/10W	
R111,112			RK73GB2A103J	CHIP R 10K J 1/10W	

K : KAC-1502S M1 : KAC-M526 E1 : KAC-5205

△Indicates safety critical components.

PARTS LIST

AUDIO UNIT (X09-8990-10)

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
R113			RK73GB2A473J	CHIP R 47K J 1/10W	
R114			RK73GB2A623J	CHIP R 62K J 1/10W	
R115,116			RK73GB2A103J	CHIP R 10K J 1/10W	
R117			RK73GB2A104J	CHIP R 100K J 1/10W	
R119,120			RK73GB2A103J	CHIP R 10K J 1/10W	
R123			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R124			RK73GB2A103J	CHIP R 10K J 1/10W	
R125,126			RK73GB2A224J	CHIP R 220K J 1/10W	
R127-129			RK73GB2A103J	CHIP R 10K J 1/10W	
R130			RK73GB2A104J	CHIP R 100K J 1/10W	
R151,152			RK73GB2A104J	CHIP R 100K J 1/10W	
R153,154			RK73PB2H470J	CHIP R 47 J 1/2W	
R201,202			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R203,204			RK73GB2A681J	CHIP R 680 J 1/10W	
R207,208			RK73GB2A681J	CHIP R 680 J 1/10W	
R211,212			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R213,214			RK73GB2A101J	CHIP R 100 J 1/10W	
R215-218			RK73GB2A224J	CHIP R 220K J 1/10W	
R219,220			RK73GB2A101J	CHIP R 100 J 1/10W	
R221,222			RK73GB2A182J	CHIP R 1.8K J 1/10W	
R223,224			RK73GB2A101J	CHIP R 100 J 1/10W	
R225,226			RK73GB2A561J	CHIP R 560 J 1/10W	
R227-230			RK73FB2B470J	CHIP R 47 J 1/8W	
R231,232			RK73EB2E561J	CHIP R 560 J 1/4W	
R233-236			RK73EB2E4R7J	CHIP R 4.7 J 1/4W	
R237-240			R92-5413-05	METAL R 0.1 J 2W	
R241,242			RK73GB2A153J	CHIP R 15K J 1/10W	
R245,246			RK73EB2E100J	CHIP R 10 J 1/4W	
R247,248			RK73GB2A103J	CHIP R 10K J 1/10W	
R251,252			RK73GB2A433J	CHIP R 43K J 1/10W	
R253,254			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R255,256			RK73GB2A560J	CHIP R 56 J 1/10W	
VR1	1A	*	R31-0266-05	VARIABLE RESISTOR (20K, A)	
W101			RK73GB2A000J	CHIP R 0.0 J 1/10W	
W102			RK73EB2E000J	CHIP R 0.0 J 1/4W	
W103,104			RK73GB2A000J	CHIP R 0.0 J 1/10W	
W105			RK73EB2E000J	CHIP R 0.0 J 1/4W	
W106			RK73GB2A000J	CHIP R 0.0 J 1/10W	
W107			RK73EB2E000J	CHIP R 0.0 J 1/4W	
W108,109			RK73GB2A000J	CHIP R 0.0 J 1/10W	
W110			RK73EB2E000J	CHIP R 0.0 J 1/4W	
W111			RK73GB2A000J	CHIP R 0.0 J 1/10W	
W112			RK73EB2E000J	CHIP R 0.0 J 1/4W	
W113,114			RK73GB2A000J	CHIP R 0.0 J 1/10W	
W115			RK73EB2E000J	CHIP R 0.0 J 1/4W	
W116			RK73GB2A000J	CHIP R 0.0 J 1/10W	
W117,118			RK73EB2E000J	CHIP R 0.0 J 1/4W	
W119,120			RK73GB2A000J	CHIP R 0.0 J 1/10W	
W121			RK73EB2E000J	CHIP R 0.0 J 1/4W	
W122-124			RK73GB2A000J	CHIP R 0.0 J 1/10W	
W125			RK73EB2E000J	CHIP R 0.0 J 1/4W	
W126			RK73GB2A000J	CHIP R 0.0 J 1/10W	
W127-129			RK73EB2E000J	CHIP R 0.0 J 1/4W	
W130			RK73GB2A000J	CHIP R 0.0 J 1/10W	
W131,132			RK73EB2E000J	CHIP R 0.0 J 1/4W	
Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
S1			S62-0842-05	SLIDE SWITCH	
PH1		*	T95-0282-05	OPTO ISOLATOR	
D1			RKZ6.8KG(B2)	ZENER DIODE	
D2			RKZ15KG(B2)	ZENER DIODE	
D5			RKZ6.8KG(B2)	ZENER DIODE	
D6 -8			HSU119TRF-E	DIODE	
D9			FCH10A20	DIODE	
D10			FRH10A20	DIODE	
D11 ,12			RKZ15KG(B2)	ZENER DIODE	
D13			HSU119TRF-E	DIODE	
D14 ,15			RKZ5.1KG(B2)	ZENER DIODE	
D101,102			RKZ6.8KG(B2)	ZENER DIODE	
D103-106			RKZ15KG(B2)	ZENER DIODE	
D201-206			HSU119TRF-E	DIODE	
IC1 ,2			NJM4565E-ZB	ANALOGUE IC	
IC3			TL494IDR	ANALOGUE IC	
Q1 ,2			2SC4154(F)	TRANSISTOR	
Q3			2SB1241	TRANSISTOR	
Q4 ,5			2SC4154(F)	TRANSISTOR	
Q6			RT1N141M-T111	TRANSISTOR	
Q7			RT1P141M-T111	TRANSISTOR	
Q8			RT1N141M-T111	TRANSISTOR	
Q9			2SC4154(F)	TRANSISTOR	
Q10 ,11			2SA1577	TRANSISTOR	
Q12 ,13			STP60NF06FP	FET	
Q101			RT1P141M-T111	TRANSISTOR	
Q103-105		*	2SC4213-F(B)	TRANSISTOR	
Q201,202		*	RT3AMMAM1T111	TRANSISTOR	
Q203,204		*	RT3CLLM-T111	TRANSISTOR	
Q205,206			KTA1268-P	TRANSISTOR	
Q207,208			KTC3200-P	TRANSISTOR	
Q209,210			2SC4081(S)	TRANSISTOR	
Q211,212			2SC1627A-F	TRANSISTOR	
Q213,214			2SA817A-F	TRANSISTOR	
Q215,216			2SC4467NF	TRANSISTOR	
Q217,218			2SA1694NF	TRANSISTOR	
Q219,220			2SC4154(F)	TRANSISTOR	
TH1			NCP18WB473J0S	THERMISTOR	

K : KAC-1502S M1 : KAC-M526 E1 : KAC-5205

△ Indicates safety critical components.