

Exploded view diagram of the front panel assembly. The components shown are:

- DC1: A cable with a multi-pin connector.
- RC1: A rectangular component, likely a remote control or sensor.
- 351: A rectangular frame or bezel.
- 360: A coiled cable with a multi-pin connector.
- 501, 502, 503, 504: A stack of four rectangular panels.
- 353 x6: Six small circular components.
- 354 x6: Six small circular components.
- 357: A cable with a multi-pin connector.
- 358: A cable with a multi-pin connector.
- 359: A cable with a multi-pin connector.

created date:2018-07-30

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX26BT	K3	DDX276BT	K2	DDX419BT	A1	DDX419BT	M1
DDX419BT	R1	DDX419BTM	M2				


Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (UNIT) <M1MM>						
	DC1	E3A-0340-00	DC CORD		1	
	VDB1	CB-XJ8056K00N	VIDEO PWB ASSY	XJ8-056K-00	1	K3,K2,R1,M2
	VDB1	CB-XJ8056M01N	VIDEO PWB ASSY	XJ8-056M-01	1	A1,M1
△	F60	FZB10BT-100	BLADE FUSE		1	
	FC1	E3G-0108-00	FFC WIRE		1	K3,K2,M1,R1,M2
	FC1	E3G-0107-00	FFC WIRE		1	A1
	FC2	E3G-0124-00	FFC WIRE		1	
	FC3	E3G-0121-00	FFC WIRE		1	
	FC4	E3G-0118-00	FFC WIRE		1	
	FC5	EF0AD052208BC	FFC WIRE		1	K3,A1,M1,R1,M2
	FC5	EF0AD052608BC	FFC WIRE		1	K2
	FC6	EF0AD0508X6AC	FFC WIRE		1	
	FC7	E3G-0126-00	FFC WIRE		1	A1,M1
	LCD1	B3H-0014-20	LCD		1	
	PA1	A6C-0103-06	PANEL		1	K3
	PA1	A6C-0103-05	PANEL		1	K2
	PA1	A6C-0103-09	PANEL		1	A1,M1
	PA1	A6C-0103-07	PANEL		1	R1,M2
	RC1	QAL1319-001	REMOCON		1	A1,M1,R1,M2
	TP1	W0C-0197-00	TOUCH PANEL		1	
	VME1	XJJ-014W-02	MECHANISM ASSY		1	K3,K2,M1,R1,M2
	VME1	XJJ-044W-02	MECHANISM ASSY		1	A1
	WH1	E3K-0327-00	WIRING HARNESS		1	
	WH3	WJJ1273-001A-E	E-SI C WIRE C-C		1	K3,K2
	A	GE40377-002A	SPECIAL SCREW		2	
	B	LV45701-003A	SPECIAL SCREW		5	
	C	QYSDST2005ZA	TAP SCREW	M2 x 5mm	4	
	D	QYSDSP2610ZA	SCREW	M2.6 x 10mm	1	
	E	QYSDST2006ZA	TAP SCREW	M2 x 6mm	7	K3,K2,M1,R1,M2
	E	QYSDST2006ZA	TAP SCREW	M2 x 6mm	3	A1
	F	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	12	K3,K2,R1
	F	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	13	A1,M1,M2
	G	QYSDST2610ZA	TAP SCREW	M2.6 x 10mm	2	
	H	QYSDST2614ZA	TAP SCREW	M2.6 x 14mm	2	
	J	QYSDST2620ZA	TAP SCREW	M2.6 x 20mm	2	
	K	VKZ4777-015	MINI SCREW		3	
	L	QYSDSF2608ZA	TAP SCREW	M2.6 x 8mm	2	
	M	GE40377-002A	SPECIAL SCREW		2	
	N	LV45552-003A	SPECIAL SCREW		4	A1
	P	VKZ4777-012	SCREW		2	K3,K2,R1,M2
	P	VKZ4777-012	SCREW		3	A1,M1
	217	F0G-0134-00	SHIELDING COVER		1	K3,K2,M1,R1,M2
	221	E3A-0045-01	CORD W.CON.		1	
	222	E3A-0576-10	USB CORD		1	
	223	F2K-0012-00	INS.COVER		1	A1,M1,M2
	224	E3A-0377-00	CORD W.CON.		1	A1,M1,M2
	230	G1D-0034-00	CONDUCT CUSHION		1	K3,K2,M1,R1,M2
	231	F0K-0299-00	SHEET		1	
	251	K2K-0391-01	KEY TOP		1	
	252	K2K-0392-01	KEY TOP		1	
	253	K2K-0393-02	KEY TOP		1	
	254	K2A-0068-01	KNOB		1	
	255	K2K-0394-06	KEY TOP		1	
	256	F0K-0044-10	SHEET		1	A1,M1
	257	F1K-0005-00	BLIND PLATE		1	
	258	B1K-0115-01	LIGHTING BOARD		1	
	259	K2K-0389-00	KNOB BASE		1	
	260	K2K-0390-01	KNOB BASE		1	
	261	F0K-0284-00	SHEET		1	
	265	F0K-0052-00	SHEET		1	
	266	F0K-0047-0F	SHEET		1	K3,K2,R1,M2
	268	T6A-0071-00	PLASTIC LENS		1	
	271	F0C-0007-00	COOL SHEET		1	
	351	B9H-0007-00	ESCUTCHEON		1	R1
	353	QYSSSP5008ZA	SCREW	M5 x 8mm	6	
	354	QYSTSP5008ZA	SCREW	M5 x 8mm	6	
	357	QAN0126-001	MICROPHONE		1	K3,K2,R1,M2
	358	QAM1419-001	CAR CABLE		1	A1,M1,R1,M2
	359	E3A-0344-00	CORD		1	
	360	E3A-0424-00	CORD W.PINJACK		1	R1
	501	B5A-2606-00	INST.MANUAL	ENG	1	K3,K2,R1
	501	B5A-2608-00	INST.MANUAL	ENG	1	A1,M1,M2
	502	B5A-2606-02	INST.MANUAL	SPA	1	K3,K2,R1
	502	B5A-2608-04	INST.MANUAL	INDO	1	A1
	502	B5A-2608-01	INST.MANUAL	CHI(PEKIN)	1	M1
	502	B5A-2608-02	INST.MANUAL	TUR	1	M2
	503	B5A-2606-01	INST.MANUAL	FRE	1	K3,K2
	503	B5A-2608-03	INST.MANUAL	ARA	1	M2
	504	B5A-2608-05	INST.MANUAL	RUS	1	M2
	701	-----	MAIN PWB ASSY	NO SERVICE PART	1	K3
	701	-----	MAIN PWB ASSY	NO SERVICE PART	1	K2
	701	-----	MAIN PWB ASSY	NO SERVICE PART	1	A1
	701	-----	MAIN PWB ASSY	NO SERVICE PART	1	M1
	701	-----	MAIN PWB ASSY	NO SERVICE PART	1	R1
	701	-----	MAIN PWB ASSY	NO SERVICE PART	1	M2
	702	-----	OPERATION PWB ASSY	NO SERVICE PART	1	K3,K2
	702	-----	OPERATION PWB ASSY	NO SERVICE PART	1	A1,M1
	702	-----	OPERATION PWB ASSY	NO SERVICE PART	1	R1,M2
	704	-----	DAUGHTER PWB ASSY	NO SERVICE PART	1	K3
	704	-----	DAUGHTER PWB ASSY	NO SERVICE PART	1	K2

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX26BT	K3	DDX276BT	K2	DDX419BT	A1	DDX419BT	M1
DDX419BT	R1	DDX419BTM	M2				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	704	-----	DAUGHTER PWB ASSY	NO SERVICE PART	1	A1,R1
	704	-----	DAUGHTER PWB ASSY	NO SERVICE PART	1	M1,M2
	705	-----	BT PWB ASSY	NO SERVICE PART	1	
	711	-----	BRACKET	NO SERVICE PART	1	K3,K2,M1,R1,M2
	711	-----	BRACKET	NO SERVICE PART	1	A1
	712	-----	BRACKET	NO SERVICE PART	1	K3,K2,M1,R1,M2
	712	-----	BRACKET	NO SERVICE PART	1	A1
	713	-----	CHASSIS	NO SERVICE PART	1	
	714	-----	TOP PLATE	NO SERVICE PART	1	K3,K2,M1,R1,M2
	714	-----	TOP PLATE	NO SERVICE PART	1	A1
	715	-----	HEAT SINK	NO SERVICE PART	1	
	716	-----	HEAT SINK	NO SERVICE PART	1	
	719	-----	SPACER(H)	NO SERVICE PART	1	A1
	720	-----	STAY	NO SERVICE PART	1	
	762	-----	SHEET	NO SERVICE PART	1	
	763	-----	SPACER(H)	NO SERVICE PART	1	A1,M1
	764	-----	BRACKET	NO SERVICE PART	1	
	767	-----	CONDUCT CUSHION	NO SERVICE PART	4	

EXPLODED VIEW (DVD MECHANISM: XJJ-014W-02/FD3-2C00NXN)

Block No.MJMM

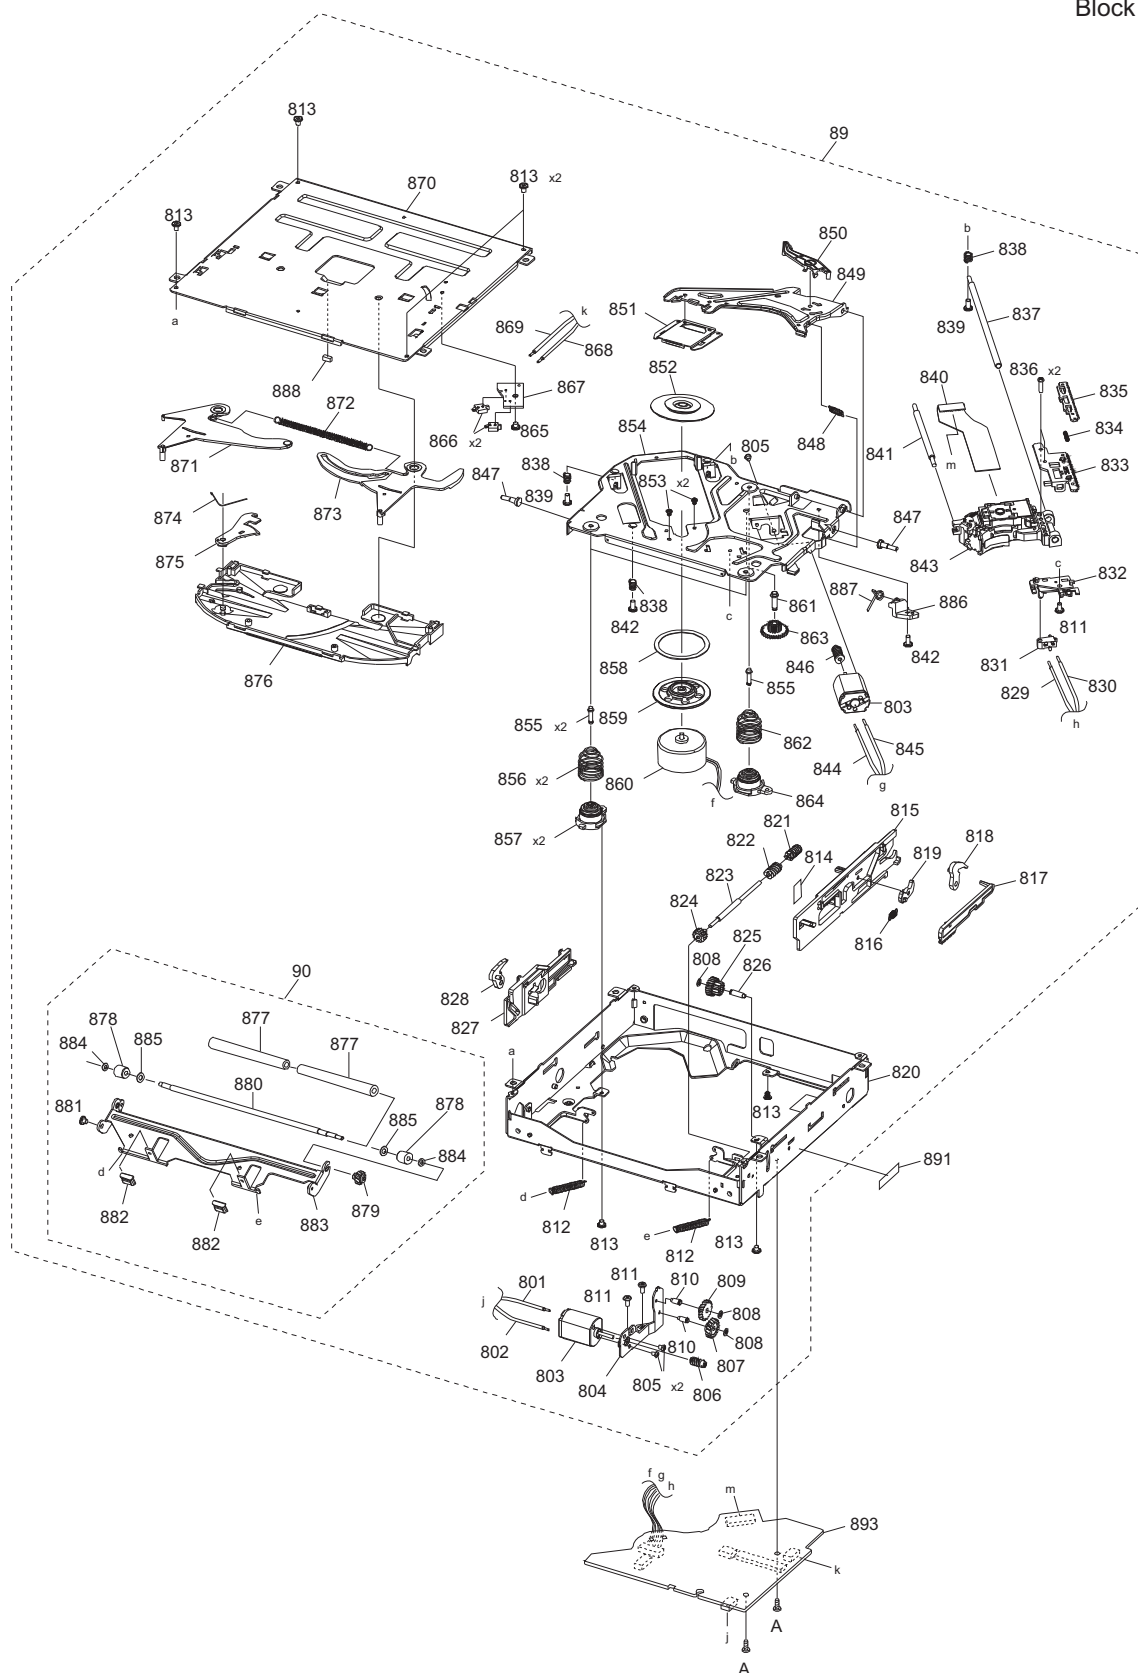

Parts with the exploded numbers larger than 800 are not supplied.

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX26BT	K3	DDX276BT	K2	DDX419BT	A1	DDX419BT	M1
DDX419BT	R1	DDX419BTM	M2				


Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (DVD MECHANISM: XJJ-014W-02/FD3-2C00NXN) <MJMM>						
A		LV44615-001A	SPECIAL SCREW		2	K3,K2,M1,R1,M2
89		D4A-0010-01	DVD DRIVE		1	K3,K2,M1,R1,M2
90		CM-ROFD3N	ROLLAR ASSY		1	K3,K2,M1,R1,M2
801		-----	LEAD	NO SERVICE PART	1	K3,K2,M1,R1,M2
802		-----	LEAD	NO SERVICE PART	1	K3,K2,M1,R1,M2
803		-----	SLED MOTOR	NO SERVICE PART	2	K3,K2,M1,R1,M2
804		-----	MOTOR BRACKET	NO SERVICE PART	1	K3,K2,M1,R1,M2
805		-----	SCREW	NO SERVICE PART	3	K3,K2,M1,R1,M2
806		-----	MOTOR WORM	NO SERVICE PART	1	K3,K2,M1,R1,M2
807		-----	IDLER WHEEL A	NO SERVICE PART	1	K3,K2,M1,R1,M2
808		-----	WASHER	NO SERVICE PART	3	K3,K2,M1,R1,M2
809		-----	IDLER WHEEL B	NO SERVICE PART	1	K3,K2,M1,R1,M2
810		-----	IDLER WHEEL PIN	NO SERVICE PART	2	K3,K2,M1,R1,M2
811		-----	SCREW	NO SERVICE PART	3	K3,K2,M1,R1,M2
812		-----	UP LEVER SPRING	NO SERVICE PART	2	K3,K2,M1,R1,M2
813		-----	SCREW	NO SERVICE PART	7	K3,K2,M1,R1,M2
814		-----	CUSHION	NO SERVICE PART	1	K3,K2,M1,R1,M2
815		-----	LEVER R	NO SERVICE PART	1	K3,K2,M1,R1,M2
816		-----	SUB SPRING R	NO SERVICE PART	1	K3,K2,M1,R1,M2
817		-----	SUB LEVER R	NO SERVICE PART	1	K3,K2,M1,R1,M2
818		-----	LOCK LEVER R	NO SERVICE PART	1	K3,K2,M1,R1,M2
819		-----	LOCK LEVER	NO SERVICE PART	1	K3,K2,M1,R1,M2
820		-----	MAIN SHASSIS	NO SERVICE PART	1	K3,K2,M1,R1,M2
821		-----	DRIVING WORM	NO SERVICE PART	1	K3,K2,M1,R1,M2
822		-----	ROLLER WORM	NO SERVICE PART	1	K3,K2,M1,R1,M2
823		-----	WORM SHAFT	NO SERVICE PART	1	K3,K2,M1,R1,M2
824		-----	LOAD GEAR	NO SERVICE PART	1	K3,K2,M1,R1,M2
825		-----	DRIVING GEAR	NO SERVICE PART	1	K3,K2,M1,R1,M2
826		-----	DRIVING GEAR PIN	NO SERVICE PART	1	K3,K2,M1,R1,M2
827		-----	LEVER L	NO SERVICE PART	1	K3,K2,M1,R1,M2
828		-----	LOCK LEVER L	NO SERVICE PART	1	K3,K2,M1,R1,M2
829		-----	LEAD	NO SERVICE PART	1	K3,K2,M1,R1,M2
830		-----	LEAD	NO SERVICE PART	1	K3,K2,M1,R1,M2
831		-----	INNER SWITCH	NO SERVICE PART	1	K3,K2,M1,R1,M2
832		-----	PICK-UP GUIDER	NO SERVICE PART	1	K3,K2,M1,R1,M2
833		-----	SLED RACK	NO SERVICE PART	1	K3,K2,M1,R1,M2
834		-----	SLED RACK SPRING	NO SERVICE PART	1	K3,K2,M1,R1,M2
835		-----	SUB SLED RACK	NO SERVICE PART	1	K3,K2,M1,R1,M2
836		-----	SCREW	NO SERVICE PART	2	K3,K2,M1,R1,M2
837		-----	MAIN SHAFT A	NO SERVICE PART	1	K3,K2,M1,R1,M2
838		-----	JUDGEMENT SPRING	NO SERVICE PART	3	K3,K2,M1,R1,M2
839		-----	SCREW	NO SERVICE PART	2	K3,K2,M1,R1,M2
840		-----	FPC	NO SERVICE PART	1	K3,K2,M1,R1,M2
841		-----	MAIN SHAFT B	NO SERVICE PART	1	K3,K2,M1,R1,M2
842		-----	SCREW	NO SERVICE PART	2	K3,K2,M1,R1,M2
843		-----	PICK-UP	NO SERVICE PART	1	K3,K2,M1,R1,M2
844		-----	LEAD	NO SERVICE PART	1	K3,K2,M1,R1,M2
845		-----	LEAD	NO SERVICE PART	1	K3,K2,M1,R1,M2
846		-----	SLED WORM	NO SERVICE PART	1	K3,K2,M1,R1,M2
847		-----	PB LOCK PIN	NO SERVICE PART	2	K3,K2,M1,R1,M2
848		-----	CHUCK SPRING	NO SERVICE PART	1	K3,K2,M1,R1,M2
849		-----	CHUCK ARM	NO SERVICE PART	1	K3,K2,M1,R1,M2
850		-----	PUSH LEVER	NO SERVICE PART	1	K3,K2,M1,R1,M2
851		-----	CHUCK PLATE	NO SERVICE PART	1	K3,K2,M1,R1,M2
852		-----	CLAMP PLATE	NO SERVICE PART	1	K3,K2,M1,R1,M2
853		-----	SCREW	NO SERVICE PART	2	K3,K2,M1,R1,M2
854		-----	PICK-UP BASE	NO SERVICE PART	1	K3,K2,M1,R1,M2
855		-----	DAMPER PIN	NO SERVICE PART	3	K3,K2,M1,R1,M2
856		-----	DAMPER SPRING L	NO SERVICE PART	2	K3,K2,M1,R1,M2
857		-----	DAMPER L	NO SERVICE PART	2	K3,K2,M1,R1,M2
858		-----	RIBBAND	NO SERVICE PART	1	K3,K2,M1,R1,M2
859		-----	TURN TABLE	NO SERVICE PART	1	K3,K2,M1,R1,M2
860		-----	SPINDER MOTOR	NO SERVICE PART	1	K3,K2,M1,R1,M2
861		-----	SLED GEAR SHAFT	NO SERVICE PART	1	K3,K2,M1,R1,M2
862		-----	DAMPER SPRING B	NO SERVICE PART	1	K3,K2,M1,R1,M2
863		-----	SLED GEAR	NO SERVICE PART	1	K3,K2,M1,R1,M2
864		-----	DAMPER B	NO SERVICE PART	1	K3,K2,M1,R1,M2
865		-----	SCREW	NO SERVICE PART	1	K3,K2,M1,R1,M2
866		-----	SWITCH	NO SERVICE PART	2	K3,K2,M1,R1,M2
867		-----	PCB	NO SERVICE PART	1	K3,K2,M1,R1,M2
868		-----	LEAD	NO SERVICE PART	1	K3,K2,M1,R1,M2
869		-----	LEAD	NO SERVICE PART	1	K3,K2,M1,R1,M2
870		-----	TOP COVER	NO SERVICE PART	1	K3,K2,M1,R1,M2
871		-----	DISC ARM L	NO SERVICE PART	1	K3,K2,M1,R1,M2
872		-----	DISC ARM SPRING	NO SERVICE PART	1	K3,K2,M1,R1,M2
873		-----	DISC ARM R	NO SERVICE PART	1	K3,K2,M1,R1,M2
874		-----	DISC ARM LOCKER SPRING	NO SERVICE PART	1	K3,K2,M1,R1,M2
875		-----	DISC ARM LOCKER	NO SERVICE PART	1	K3,K2,M1,R1,M2
876		-----	TOP GUIDE	NO SERVICE PART	1	K3,K2,M1,R1,M2
877		-----	ROLLER L	NO SERVICE PART	2	K3,K2,M1,R1,M2
878		-----	ROLLER SHAFT	NO SERVICE PART	2	K3,K2,M1,R1,M2
879		-----	ROLLER GEAR	NO SERVICE PART	1	K3,K2,M1,R1,M2
880		-----	ROLLER SHAFT	NO SERVICE PART	1	K3,K2,M1,R1,M2
881		-----	SCREW	NO SERVICE PART	1	K3,K2,M1,R1,M2
882		-----	PROTSCT COVER	NO SERVICE PART	2	K3,K2,M1,R1,M2
883		-----	UP LEVER	NO SERVICE PART	1	K3,K2,M1,R1,M2
884		-----	WASHER	NO SERVICE PART	2	K3,K2,M1,R1,M2
885		-----	WASHER	NO SERVICE PART	2	K3,K2,M1,R1,M2
886		-----	SUB CHUCK SPRING	NO SERVICE PART	1	K3,K2,M1,R1,M2

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX26BT	K3	DDX276BT	K2	DDX419BT	A1	DDX419BT	M1
DDX419BT	R1	DDX419BTM	M2				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
			BRACHET			
887	-----		SUB CHUCK SPRING	NO SERVICE PART	1	K3,K2,M1,R1,M2
888	-----		TOP CUSHION	NO SERVICE PART	1	K3,K2,M1,R1,M2
891	-----		SPACER(H)	NO SERVICE PART	2	K3,K2,M1,R1,M2
893	-----		DVD PROCESSOR U	NO SERVICE PART	1	K3,K2,M1,R1,M2

EXPLODED VIEW (DVD MECHANISM: XJJ-044W-02/FD2-5E00NXN)

Block No.MUMM

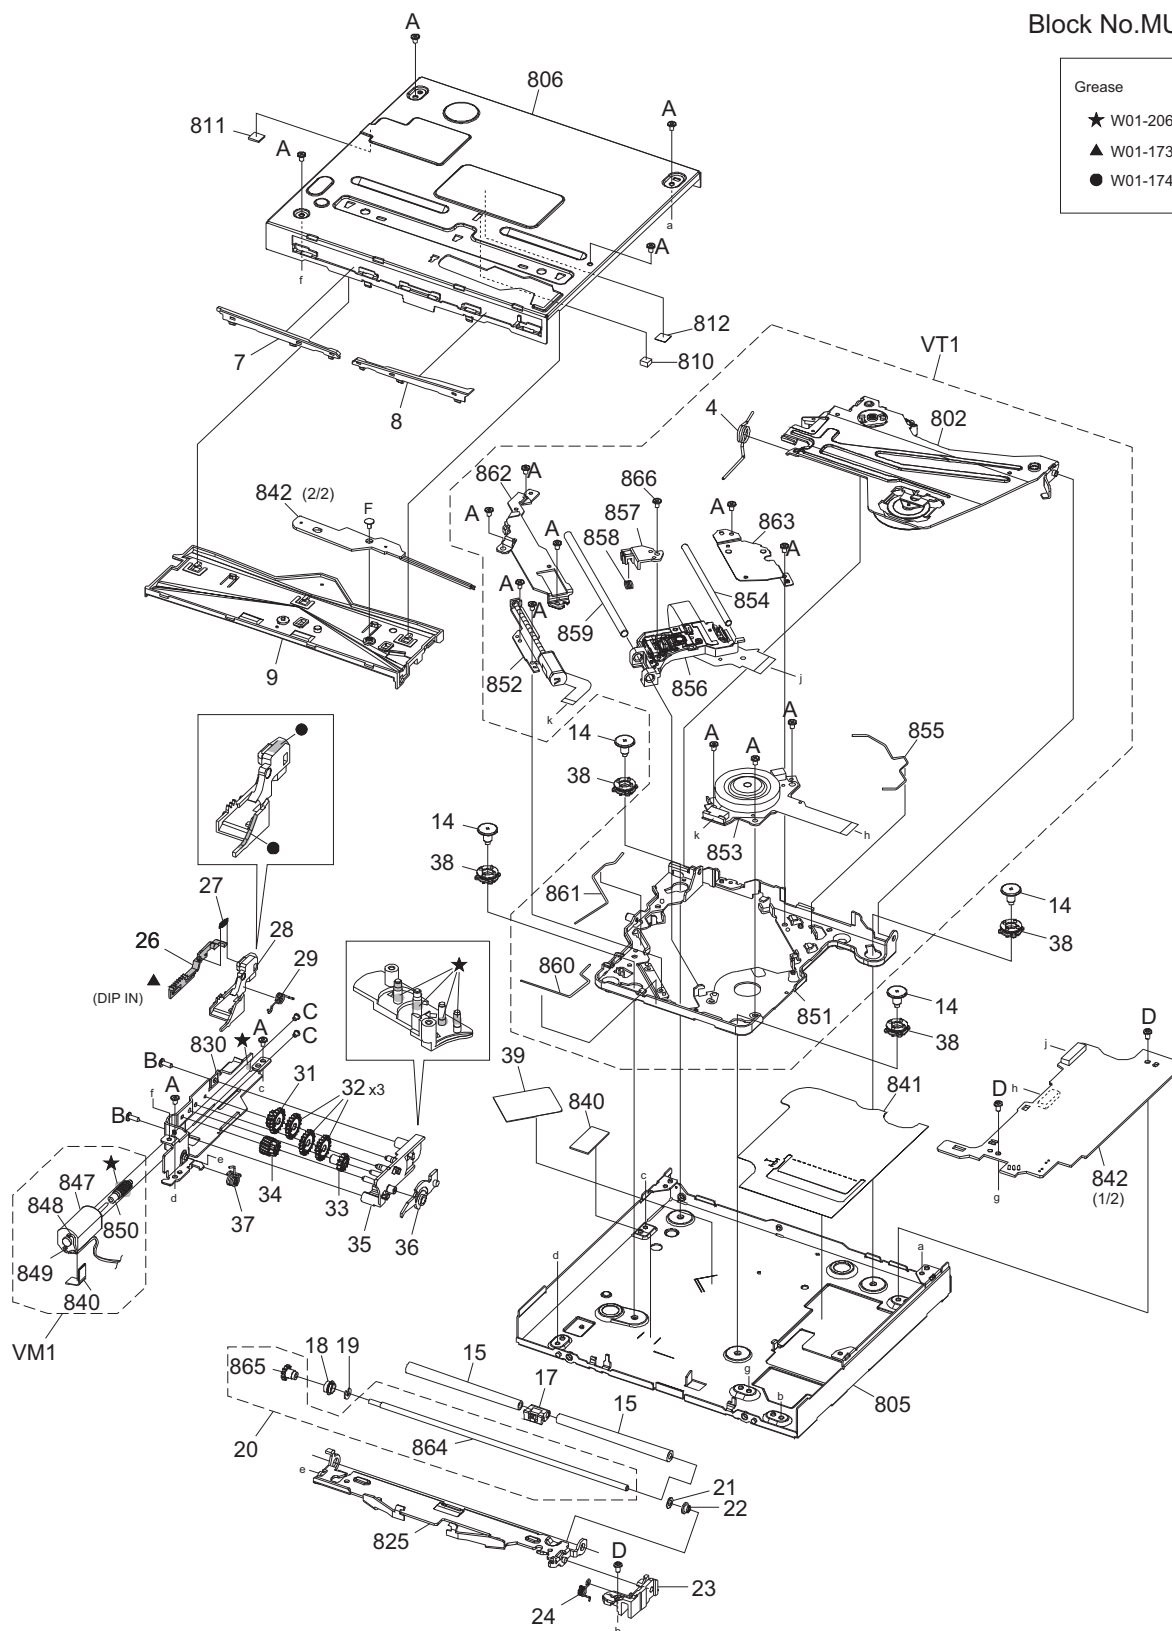

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX26BT	K3	DDX276BT	K2	DDX419BT	A1	DDX419BT	M1
DDX419BT	R1	DDX419BTM	M2				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
------	------------	-----------	------------	-------------	-----	-------

EXPLODED VIEW (DVD MECHANISM: XJJ-044W-02/FD2-5E00NXN) <MUMM>

VM1	CM-FD2-ALM	LOADING M ASSY		1	A1
VT1	CM-FD2-ATM2	TM ASSY		1	A1
A	LV44959-002A	SPECIAL SCREW		16	A1
B	LV45727-001A	GEAR SCREW		2	A1
C	QYSPSPU1425MA	SCREW	M1.4 x 2.5mm	2	A1
D	VKZ4539-054	MINI SCREW		3	A1
F	LV44586-001A	SPECIAL SCREW		1	A1
4	LV45709-002A	CLAMP SPRING		1	A1
7	LV23006-002A	GUIDE 2 L		1	A1
8	LV23007-002A	GUIDE 2 R		1	A1
9	LV11842-004A	DISC GUIDE		1	A1
14	LV45704-001A	DAMPER SHAFT		4	A1
15	LV45724-001A	RUBBER ROLLER		2	A1
17	LV37652-002A	SHAFT GUIDE		1	A1
18	LV39938-001A	GEAR RETAINER		1	A1
19	LV45730-001A	ROLLER C WASHER		1	A1
20	CM-FD2-AROS	RO SHAFT ASSY		1	A1
21	LV45731-001A	ROLLER WASHER		1	A1
22	LV45718-001A	ROLLER RETAINER		1	A1
23	LV23003-002A	ROLLER HOLDER		1	A1
24	LV45983-001A	ROLLER SPG L2		1	A1
26	LV39932-003A	TRIGGER SLIDER		1	A1
27	LV45715-001A	TRIGGER SPRING		1	A1
28	LV23004-004A	SLIDER		1	A1
29	LV39935-003A	SLIDER SPRING		1	A1
31	LV39929-001A	DRIVE GEAR 4		1	A1
32	LV39928-001A	DRIVE GEAR 3		3	A1
33	LV39927-001A	DRIVE GEAR 2		1	A1
34	LV39926-001A	DRIVE GEAR 1		1	A1
35	LV23005-001A	GEAR HOLDER		1	A1
36	LV39923-003A	UD LEVER		1	A1
37	LV45982-001A	ROLLER SPG R2		1	A1
38	LV39934-001A	DAMPER		4	A1
39	LV45719-001A	PU FPC SHEET		1	A1
802	-----	CLAMP ARM ASSY	NO SERVICE PART	1	A1
805	-----	BOTTOM CHASSIS	NO SERVICE PART	1	A1
806	-----	TOP CHASSIS	NO SERVICE PART	1	A1
810	-----	CLAMPER CUSHION	NO SERVICE PART	1	A1
811	-----	CL A CUSHION B	NO SERVICE PART	1	A1
812	-----	CL A CUSHION A	NO SERVICE PART	1	A1
825	-----	ROLLER ARM	NO SERVICE PART	1	A1
830	-----	GEAR BKT	NO SERVICE PART	1	A1
840	-----	SPACER(H)	NO SERVICE PART	2	A1
841	-----	BOTTOM SHEET	NO SERVICE PART	1	A1
842	-----	DVD PROCESSOR U	NO SERVICE PART	1	A1
847	-----	LOADING MOTOR	NO SERVICE PART	1	A1
848	-----	SIN TWIST WIRE	NO SERVICE PART	1	A1
849	-----	SIN TWIST WIRE	NO SERVICE PART	1	A1
850	-----	WORM GEAR	NO SERVICE PART	1	A1
851	-----	TM CHASSIS ASSY	NO SERVICE PART	1	A1
852	-----	FEED MOTOR	NO SERVICE PART	1	A1
853	-----	SPINDLE MOTOR	NO SERVICE PART	1	A1
854	-----	SUB SHAFT	NO SERVICE PART	1	A1
855	-----	SUB SHAFT SP	NO SERVICE PART	1	A1
856	-----	DVD OPT.PICKUP	NO SERVICE PART	1	A1
857	-----	PICKUP ARM	NO SERVICE PART	1	A1
858	-----	PICKUP ARM SP	NO SERVICE PART	1	A1
859	-----	SHAFT	NO SERVICE PART	1	A1
860	-----	MAIN SHAFT SP 2	NO SERVICE PART	1	A1
861	-----	MAIN SHAFT SP	NO SERVICE PART	1	A1
862	-----	TM COVER MAIN	NO SERVICE PART	1	A1
863	-----	TM COVER SUB	NO SERVICE PART	1	A1
864	-----	ROLLER SHAFT	NO SERVICE PART	1	A1
865	-----	ROLLER GEAR	NO SERVICE PART	1	A1
866	-----	SCREW	NO SERVICE PART	1	A1

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX26BT	K3	DDX276BT	K2	DDX419BT	A1	DDX419BT	M1
DDX419BT	R1	DDX419BTM	M2				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
MAIN PWB ASSY (XJ1-252x-0x) <XJ1>						
	IC80	TS3USB221ERSE	MOS IC		1	
	IC130	NJM2535V-ZB	ANALOG IC		1	
	IC131	NJM2535V-ZB	ANALOG IC		1	
	IC132	NJM2561F1	BIPOLAR IC		1	
	IC160	BD37069FV-M	ANALOG IC		1	
	IC161	NJM111100F1	ANALOG IC		1	A1,M1,M2
	IC220	NJM4580CV	ANALOG IC		1	
	IC243	NJM111100F1	ANALOG IC		1	
△	IC300	JCV8034	ANALOG IC		1	
	IC470	NJM2584AM	ANALOG IC		1	M1,M2
	IC500	MP9942AGJ	ANALOG IC		1	
	IC501	BD00HA5WEFJ	ANALOG IC		1	K3,K2,M1,R1,M2
	IC502	BD00HA5WEFJ	ANALOG IC		1	K3,K2,M1,R1,M2
	IC540	MP9942AGJ	ANALOG IC		1	
	IC580	LM3481MMXNOPB	ANALOG IC		1	
	IC600	SI4763-A42-GM	MOS IC		1	
	IC720	W3F-0404-00	MCU IC		1	
	IC730	RA8900CEUB	ANALOG IC		1	
	IC820	REX24016AAS0A	ROM IC		1	
	IC830	BU4228F	ANALOG IC		1	
	IC840	TC7SH17FUJC	MOS IC		1	K3,K2,M1,M2
	IC841	TC7SET08FUJC	MOS IC		1	K3,K2,M1,M2
	IC842	TC7SH17FUJC	MOS IC		1	K2
	IC843	TC7SET08FUJC	MOS IC		1	K2
	IC860	MP9942AGJ	ANALOG IC		1	
	IC890	TPS2553DDBV	MOS IC		1	
	IC900	LV5684NPVD-H	ANALOG IC		1	
	IC901	XC6201P502P-G	MOS IC		1	
	IC930	TC7SET08FUJC	MOS IC		1	
	Q161	LSCR523UBFS8	TRANSISTOR		1	
	Q162	LSCR523UBFS8	TRANSISTOR		1	
	Q250	IMX9	DUAL TRANSISTOR		1	
	Q270	KRA306-P	DIGI TRANSISTOR		1	
	Q320	IMX9	DUAL TRANSISTOR		1	
	Q340	IMX9	DUAL TRANSISTOR		1	
	Q360	LSCR523EBFS8	TRANSISTOR		1	
	Q410	LSAR523EBFS8	TRANSISTOR		1	
	Q411	LSCR523EBFS8	TRANSISTOR		1	
	Q412	KRA307E-P	TRANSISTOR		1	
	Q413	KRC403E-P	DIGI TRANSISTOR		1	
	Q540	KRC407E-P	DIGI TRANSISTOR		1	
	Q541	KRC407E-P	DIGI TRANSISTOR		1	
	Q580	RTQ035N03	FET		1	
	Q720	LSAR523UBFS8	TRANSISTOR		1	
	Q830	KRA302E-P	DIGI TRANSISTOR		1	
	Q831	KRC407E-P	DIGI TRANSISTOR		1	
	Q832	KRC407E-P	DIGI TRANSISTOR		1	
	Q920	KRA302E-P	DIGI TRANSISTOR		1	
	Q921	KRC404E-P	DIGI TRANSISTOR		1	
	Q922	MCQ4435	FET		1	
	Q950	KRC407E-P	DIGI TRANSISTOR		1	
	Q951	LSCR523UBFS8	TRANSISTOR		1	
	Q952	LSAR523UBFS8	TRANSISTOR		1	
	Q970	KRC407E-P	DIGI TRANSISTOR		1	
	Q971	KRC407E-P	DIGI TRANSISTOR		1	
	Q972	LSCR523EBFS8	TRANSISTOR		1	
	Q973	LSAR523EBFS8	TRANSISTOR		1	
	Q974	LSCR523EBFS8	TRANSISTOR		1	
	Q975	LTA014TUBFS8	DIGI TRANSISTOR		1	
	Q976	LSAR523EBFS8	TRANSISTOR		1	
	Q990	RE1C002ZP	FET		1	A1,M1,R1,M2
	Q991	RE1C002ZP	FET		1	A1,M1,R1,M2
	Q992	KRC407E-P	DIGI TRANSISTOR		1	A1,M1,R1,M2
	Q1010	KRC407E-P	DIGI TRANSISTOR		1	
	D61	S3DB	RECTIFIER DIODE		1	
	D160	UDZV6.2B	ZENER DIODE		1	
	D270	DAP202U	DIODE ARRAY		1	
	D271	1SS355VM	DIODE		1	
	D382	SM5818PL	SCHOTTKY DIODE		1	
	D383	SM5818PL	SCHOTTKY DIODE		1	
	D400	UDZV6.2B	ZENER DIODE		1	
	D410	1SS355VM	DIODE		1	
	D411	1SS355VM	DIODE		1	
	D500	SM5818PL	SCHOTTKY DIODE		1	K3,K2,M1,R1,M2
	D501	SM5818PL	SCHOTTKY DIODE		1	K3,K2,M1,R1,M2
	D540	1SS355VM	DIODE		1	
	D541	1SS355VM	DIODE		1	
	D542	UDZV6.2B	ZENER DIODE		1	
	D580	SMAB14-P	SCHOTTKY DIODE		1	
	D581	1SS355VM	DIODE		1	
	D582	1SS355VM	DIODE		1	
	D830	1SS355VM	DIODE		1	
	D900	SM5818PL	SCHOTTKY DIODE		1	
	D901	SK34A-L	SCHOTTKY DIODE		1	
	D920	UDZV18B	ZENER DIODE		1	
	D950	UDZV6.2B	ZENER DIODE		1	
	D951	UDZV18B	ZENER DIODE		1	
	D970	UDZV6.2B	ZENER DIODE		1	
	D990	1SS355VM	DIODE		1	A1,M1,R1,M2
	D991	1SS355VM	DIODE		1	A1,M1,R1,M2

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX26BT	K3	DDX276BT	K2	DDX419BT	A1	DDX419BT	M1
DDX419BT	R1	DDX419BTM	M2				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C60	CC73HCH1H221J	C CAPACITOR	220pF 50V J	1	
	C61	CC73HCH1H221J	C CAPACITOR	220pF 50V J	1	
	C62	CC73HCH1H221J	C CAPACITOR	220pF 50V J	1	
	C63	CC73HCH1H221J	C CAPACITOR	220pF 50V J	1	
	C68	CC73HCH1H221J	C CAPACITOR	220pF 50V J	1	
	C69	CC73HCH1H221J	C CAPACITOR	220pF 50V J	1	
	C70	CC73HCH1H221J	C CAPACITOR	220pF 50V J	1	
	C71	CC73HCH1H221J	C CAPACITOR	220pF 50V J	1	
	C72	CD04EU1C222M1	E CAPACITOR	2200uF 16V M	1	
	C80	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C81	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1	
	C82	CK73HXR1C103K	C CAPACITOR	0.01uF 16V K	1	
	C83	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C91	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C100	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C102	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	
	C104	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C105	CK73HXR1H102K	C CAPACITOR	1000pF 50V K	1	
	C106	CK73HXR1H102K	C CAPACITOR	1000pF 50V K	1	
	C130	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	A1,M1,M2
	C131	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	C132	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C133	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C134	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C135	CE32BY1C221M	E CAPACITOR	220uF 16V M	1	
	C136	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	C137	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C138	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C139	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C140	CE32BY1C221M	E CAPACITOR	220uF 16V M	1	
	C141	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C142	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C143	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C160	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C161	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C162	CE32BJ1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C163	CE32BJ1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C164	CE32BJ1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C165	CE32BJ1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C166	CE32BJ1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C167	CE32BJ1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C168	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C169	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C170	CE32BY1C470M	E CAPACITOR	47uF 16V M	1	
	C171	CE32CL1C100M	E CAPACITOR	10uF 16V M	1	
	C172	CE32CL1E330M	E CAPACITOR	33uF 25V M	1	
	C173	CK73HXR1H152K	C CAPACITOR	1500pF 50V K	1	
	C174	CK73HXR1H152K	C CAPACITOR	1500pF 50V K	1	
	C175	CK73HXR1H152K	C CAPACITOR	1500pF 50V K	1	
	C176	CK73HXR1H152K	C CAPACITOR	1500pF 50V K	1	
	C177	CK73HXR1H152K	C CAPACITOR	1500pF 50V K	1	
	C178	CK73HXR1H152K	C CAPACITOR	1500pF 50V K	1	
	C179	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C180	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C181	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C182	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C183	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C185	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	A1,M1,M2
	C186	CK73GXR1C104K	C CAPACITOR	0.1uF 16V K	1	A1,M1,M2
	C187	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	A1,M1,M2
	C188	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	A1,M1,M2
	C225	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	
	C226	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	
	C228	CC73HCH1H151J	C CAPACITOR	150pF 50V J	1	
	C229	CC73HCH1H150J	C CAPACITOR	15pF 50V J	1	
	C230	CC73HCH1H151J	C CAPACITOR	150pF 50V J	1	
	C232	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	C233	CK73HXR1A683K	C CAPACITOR	0.068uF 10V K	1	
	C235	CK73HXR1A683K	C CAPACITOR	0.068uF 10V K	1	
	C236	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	
	C237	CK73EXR1C106K	C CAPACITOR	10uF 16V K	1	
	C238	CK73EXR1C106K	C CAPACITOR	10uF 16V K	1	
	C239	CK73EXR1C106K	C CAPACITOR	10uF 16V K	1	
	C240	CK73EXR1C106K	C CAPACITOR	10uF 16V K	1	
	C242	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	
	C243	CK73GXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C244	CK73GXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	C245	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C247	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C250	CK73EXR1C475K	C CAPACITOR	4.7uF 16V G	1	
	C251	CK73EXR1C475K	C CAPACITOR	4.7uF 16V G	1	
	C270	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C300	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C301	CE32CL1E330M	E CAPACITOR	33uF 25V M	1	
	C302	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	
	C303	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	
	C304	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	
	C305	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	
	C306	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C308	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX26BT	K3	DDX276BT	K2	DDX419BT	A1	DDX419BT	M1
DDX419BT	R1	DDX419BTM	M2				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C320	CK73EXR1C475K	C CAPACITOR	4.7uF 16V G	1	
	C330	CK73EXR1C475K	C CAPACITOR	4.7uF 16V G	1	
	C340	CK73EXR1C475K	C CAPACITOR	4.7uF 16V G	1	
	C350	CK73EXR1C475K	C CAPACITOR	4.7uF 16V G	1	
	C352	CK73HXR1H332K	C CAPACITOR	3300pF 50V K	1	
	C353	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C360	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	
	C361	CK73HXR1E103K	C CAPACITOR	0.01uF 25V K	1	
	C362	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	
	C410	CK73GXR0J225K	C CAPACITOR	2.2uF 6.3V K	1	
	C412	CK73HXR1E103K	C CAPACITOR	0.01uF 25V K	1	
	C470	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	M1,M2
	C471	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	M1,M2
	C472	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C473	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	M1,M2
	C474	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	M1,M2
	C475	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	M1,M2
	C476	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	M1,M2
	C477	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	M1,M2
	C480	CK73HXR1E223K	C CAPACITOR	0.022uF 25V K	1	
	C485	CK73HXR1E103K	C CAPACITOR	0.01uF 25V K	1	
	C486	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C487	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C489	CK73HXR1E103K	C CAPACITOR	0.01uF 25V K	1	K3,K2,M1,R1,M2
	C490	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C491	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	K3,K2,M1,R1,M2
	C492	CE32BY1C101M	E CAPACITOR	100uF 16V M	1	
	C493	CK73HXR1E103K	C CAPACITOR	0.01uF 25V K	1	
	C494	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C495	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C500	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C501	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C503	CK73HXR0J224K	C CAPACITOR	0.22uF 6.3V K	1	
	C504	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	C505	CC73HCH1H120J	C CAPACITOR	12pF 50V J	1	K3,K2,M1,R1,M2
	C505	CC73HCH1H150J	C CAPACITOR	15pF 50V J	1	A1
	C507	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C508	CE32CC1C221M	E CAPACITOR	220uF 16V M	1	
	C509	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K3,K2,M1,R1,M2
	C510	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K3,K2,M1,R1,M2
	C511	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	K3,K2,M1,R1,M2
	C512	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K3,K2,M1,R1,M2
	C513	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K3,K2,M1,R1,M2
	C514	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	K3,K2,M1,R1,M2
	C515	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C516	CK73HXR0J224K	C CAPACITOR	0.22uF 6.3V K	1	
	C540	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C541	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C543	CK73HXR0J224K	C CAPACITOR	0.22uF 6.3V K	1	
	C544	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	C545	CC73HCH1H150J	C CAPACITOR	15pF 50V J	1	
	C547	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C548	CE32CC1C221M	E CAPACITOR	220uF 16V M	1	
	C549	CK73HXR0J224K	C CAPACITOR	0.22uF 6.3V K	1	
	C580	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C581	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C582	CK73HXR1H391K	C CAPACITOR	390pF 50V K	1	
	C583	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	C585	CK73HXR1H821K	C CAPACITOR	820pF 50V K	1	
	C586	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	
	C587	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C588	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C589	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C590	CE32BY1E101M	E CAPACITOR	100uF 25V M	1	
	C591	CK73HXR1C103K	C CAPACITOR	0.01uF 16V K	1	
	C592	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C593	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1	
	C600	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C601	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	C602	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C603	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C604	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	C605	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C606	CK73HXR1H222K	C CAPACITOR	2200pF 50V K	1	
	C607	CK73HXR1H102K	C CAPACITOR	1000pF 50V K	1	
	C608	CC73HCH1H390J	C CAPACITOR	39pF 50V J	1	
	C609	CC73HCH1H270J	C CAPACITOR	27pF 50V J	1	
	C613	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	
	C614	CC73HCH1H050C	C CAPACITOR	5pF 50V C	1	
	C615	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C616	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C617	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C618	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	C622	CK73HXR1H682K	C CAPACITOR	6800pF 50V K	1	
	C623	CK73HXR1H682K	C CAPACITOR	6800pF 50V K	1	
	C624	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C625	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C626	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C627	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	
	C628	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C629	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C630	CC73HCH1H0R5C	C CAPACITOR	0.5pF 50V C	1	M2

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX26BT	K3	DDX276BT	K2	DDX419BT	A1	DDX419BT	M1
DDX419BT	R1	DDX419BTM	M2				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C632	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	C634	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	
	C635	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C636	CK73HXR1H222K	C CAPACITOR	2200pF 50V K	1	
	C637	CK73GXR1H222K	C CAPACITOR	2200pF 50V K	1	
	C638	CK73HXR1H222K	C CAPACITOR	2200pF 50V K	1	
	C639	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C640	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
△	C642	CC73GCH1H010C	C CAPACITOR	1pF 50V C	1	K3,K2,A1,M1,R1
	C648	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	
	C649	CC73HCH1H0R5C	C CAPACITOR	0.5pF 50V C	1	
	C650	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	
	C656	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	
	C720	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C721	CK73HXR1H222K	C CAPACITOR	2200pF 50V K	1	
	C727	CK73HXR1E103K	C CAPACITOR	0.01uF 25V K	1	
	C728	CK73HXR1E103K	C CAPACITOR	0.01uF 25V K	1	
	C729	CK73HXR1E103K	C CAPACITOR	0.01uF 25V K	1	
	C730	CK73HXR1E103K	C CAPACITOR	0.01uF 25V K	1	
	C731	CK73HXR1E103K	C CAPACITOR	0.01uF 25V K	1	
	C732	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C733	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C734	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C735	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C737	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C738	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	C739	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C740	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	C741	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C742	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1	
	C743	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1	
	C744	CK73HXR1E103K	C CAPACITOR	0.01uF 25V K	1	
	C745	CK73HXR1E103K	C CAPACITOR	0.01uF 25V K	1	
	C820	CK73HXR1E103K	C CAPACITOR	0.01uF 25V K	1	
	C831	CK73HXR1E103K	C CAPACITOR	0.01uF 25V K	1	
	C832	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	
	C833	CK73HXR1E103K	C CAPACITOR	0.01uF 25V K	1	
	C840	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1	K3,K2,M1,M2
	C841	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1	K3,K2,M1,M2
	C842	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1	K2
	C843	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1	K2
	C860	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C861	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C863	CK73HXR0J224K	C CAPACITOR	0.22uF 6.3V K	1	
	C864	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	C865	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C867	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C868	CE32CC0J331M	E CAPACITOR	330uF 6.3V M	1	
	C872	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C873	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C874	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C875	CK73HXR0J224K	C CAPACITOR	0.22uF 6.3V K	1	
	C890	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C891	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C900	CK73FXR1H224K	C CAPACITOR	0.22uF 50V K	1	
	C901	CE32BY1C221M	E CAPACITOR	220uF 16V M	1	
	C902	CK73FXR1H224K	C CAPACITOR	0.22uF 50V K	1	
	C903	CE32BY1E101M	E CAPACITOR	100uF 25V M	1	
	C904	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C905	CK73EXR1A476K	C CAPACITOR	47uF 10V K	1	
	C906	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	
	C907	CE32CL0J331M	E CAPACITOR	330uF 6.3V M	1	
	C908	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C909	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	
	C910	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C911	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C912	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C913	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C914	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C915	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C916	CE32BY1C221M	E CAPACITOR	220uF 16V M	1	
	C920	CK73FXR1H334K	C CAPACITOR	0.33uF 50V K	1	
	C930	CC73HCH1H331J	C CAPACITOR	330pF 50V J	1	
	C931	CC73HCH1H331J	C CAPACITOR	330pF 50V J	1	
	C932	CK73HXR1C103K	C CAPACITOR	0.01uF 16V K	1	
	C950	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C951	CK73HXR1A334K	C CAPACITOR	0.33uF 10V K	1	
	C1016	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	A1,M1,R1,M2
	C1017	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	A1,M1,R1,M2
	C1018	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	A1,M1,R1,M2
	C1019	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	A1,M1,R1,M2
	C1025	CC73HCH1H050C	C CAPACITOR	5pF 50V C	1	
	C1026	CC73HCH1H050C	C CAPACITOR	5pF 50V C	1	
	C1027	CC73HCH1H050C	C CAPACITOR	5pF 50V C	1	
	C1031	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C1032	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C1033	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	
	C1034	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	
	C1035	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	
	C1036	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX26BT	K3	DDX276BT	K2	DDX419BT	A1	DDX419BT	M1
DDX419BT	R1	DDX419BTM	M2				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C1037	CC73HCH1H0R5C	C CAPACITOR	0.5pF 50V C	1	
	C1038	CC73HCH1H0R5C	C CAPACITOR	0.5pF 50V C	1	
	C1043	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1	
	C1045	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C1046	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1047	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1051	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1	
	C1052	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C1055	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C1058	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1060	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1061	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C1062	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C1065	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	C1067	CC73HCH1H221J	C CAPACITOR	220pF 50V J	1	
	C1068	CK73HXR1E223K	C CAPACITOR	0.022uF 25V K	1	
	C1069	CK73HXR1E223K	C CAPACITOR	0.022uF 25V K	1	
	C1074	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C1077	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	K3,K2,A1,M1,R1
	C1078	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1080	CK73GXR1H471K	C CAPACITOR	470pF 50V K	1	
	C1081	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1	
	C1082	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C1083	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	K3,K2,A1,M1,R1
	C1086	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1087	CC73HCH1H0R5C	C CAPACITOR	0.5pF 50V C	1	
	C1089	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	
	C1090	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C1091	CK73HXR1C473K	C CAPACITOR	0.047uF 16V K	1	
	C1092	CK73HXR1C333K	C CAPACITOR	0.033uF 16V K	1	
	C1093	CK73HXR1C333K	C CAPACITOR	0.033uF 16V K	1	
	C1094	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	
	C1096	CC73HCH1H0R5C	C CAPACITOR	0.5pF 50V C	1	
	C1098	CC73HCH1H0R5C	C CAPACITOR	0.5pF 50V C	1	
	C1099	CC73HCH1H0R5C	C CAPACITOR	0.5pF 50V C	1	
	C1104	CK73HXR1H102K	C CAPACITOR	1000pF 50V K	1	
	C1105	CC73HCH1H0R5C	C CAPACITOR	0.5pF 50V C	1	M2
	C1106	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	
	C1108	CC73HCH1H0R5C	C CAPACITOR	0.5pF 50V C	1	
	C1202	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C1206	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	
	C1207	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1	
	C1208	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1212	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	R80	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R100	RK73HH1J750D	MG RESISTOR	75Ω 1/16W D	1	
	R101	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1	
	R102	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R103	RK73HB1J302J	MG RESISTOR	3kΩ 1/16W J	1	
	R105	RK73HB1J162J	MG RESISTOR	1.6kΩ 1/16W J	1	
	R106	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R107	RK73HB1J302J	MG RESISTOR	3kΩ 1/16W J	1	
	R108	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1	
	R113	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	
	R130	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	A1,M1,M2
	R131	RK73HH1J750D	MG RESISTOR	75Ω 1/16W D	1	A1,M1,M2
	R132	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	
	R134	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	
	R135	RK73HH1J750D	MG RESISTOR	75Ω 1/16W D	1	
	R136	RK73HH1J750D	MG RESISTOR	75Ω 1/16W D	1	
	R137	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	K3,K2,R1
	R162	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A1,M1,M2
	R163	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A1,M1,M2
	R164	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R165	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R166	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R173	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R175	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R177	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R179	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R182	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K3,K2,R1
	R183	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	
	R184	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	
	R185	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	
	R186	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	
	R187	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	
	R188	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	
	R190	RK73HH1J622D	MG RESISTOR	6.2kΩ 1/16W D	1	A1,M1,M2
	R191	RK73HH1J363D	MG RESISTOR	36kΩ 1/16W D	1	A1,M1,M2
	R199	RK73EB2E823J	MG RESISTOR	82kΩ 1/4W J	1	
	R200	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R201	RK73HB1J563J	MG RESISTOR	56kΩ 1/16W J	1	
	R202	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R210	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R225	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R226	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R229	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R231	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	
	R232	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	
	R233	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	
	R234	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	
	R235	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX26BT	K3	DDX276BT	K2	DDX419BT	A1	DDX419BT	M1
DDX419BT	R1	DDX419BTM	M2				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R236	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	
	R237	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R238	RK73HB1J752J	MG RESISTOR	7.5kΩ 1/16W J	1	
	R240	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R243	RK73HH1J303D	MG RESISTOR	30kΩ 1/16W D	1	
	R244	RK73HH1J562D	MG RESISTOR	5.6kΩ 1/16W D	1	
	R245	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R246	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R247	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R250	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R251	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R253	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R254	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R255	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R256	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R257	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R258	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R270	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	
	R301	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	
	R304	RK73EB2E160J	MG RESISTOR	16Ω 1/4W J	1	
	R305	RK73EB2E1R0J	MG RESISTOR	1Ω 1/4W J	1	
	R306	RK73HB1J432J	MG RESISTOR	4.3kΩ 1/16W J	1	
	R309	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	
	R320	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R321	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R322	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R323	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R330	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R331	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R332	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R333	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R340	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R341	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R342	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R343	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R350	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R351	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R352	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R353	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R360	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	
	R361	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	
	R362	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R363	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R364	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R381	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R382	RK73FB2B472J	MG RESISTOR	4.7kΩ 1/8W J	1	
	R400	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	1	
	R410	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R411	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R412	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R413	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R414	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R415	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R416	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R470	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K3,K2,A1,R1
	R471	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	M1,M2
	R473	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K3,K2,A1,R1
	R474	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K3,K2,A1,R1
	R475	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	M1,M2
	R479	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R480	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R481	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R483	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R484	RK73HH1J151D	MG RESISTOR	150Ω 1/16W D	1	
	R485	RK73HH1J151D	MG RESISTOR	150Ω 1/16W D	1	
	R486	RK73HH1J151D	MG RESISTOR	150Ω 1/16W D	1	
	R487	RK73HH1J151D	MG RESISTOR	150Ω 1/16W D	1	
	R488	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	1	A1
	R500	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R501	RK73HH1J302D	MG RESISTOR	3kΩ 1/16W D	1	K3,K2,M1,R1,M2
	R501	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	A1
	R502	RK73HB1J200J	MG RESISTOR	20Ω 1/16W J	1	
	R503	RK73HH1J562D	MG RESISTOR	5.6kΩ 1/16W D	1	K3,K2,M1,R1,M2
	R503	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	1	A1
	R504	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	A1
	R505	RK73HH1J513D	MG RESISTOR	51kΩ 1/16W D	1	K3,K2,M1,R1,M2
	R505	RK73HH1J683D	MG RESISTOR	68kΩ 1/16W D	1	A1
	R508	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R509	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A1
	R510	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K3,K2,M1,R1,M2
	R511	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K3,K2,M1,R1,M2
	R512	RK73GH2A133D	MG RESISTOR	13kΩ 1/10W D	1	K3,K2,M1,R1,M2
	R513	RK73GH2A202D	MG RESISTOR	2kΩ 1/10W D	1	K3,K2,M1,R1,M2
	R514	RK73GH2A433D	MG RESISTOR	43kΩ 1/10W D	1	K3,K2,M1,R1,M2
	R515	RK73GH2A822D	MG RESISTOR	8.2Ω 1/10W D	1	K3,K2,M1,R1,M2
	R540	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R541	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	
	R542	RK73HB1J200J	MG RESISTOR	20Ω 1/16W J	1	
	R543	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	1	
	R544	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX26BT	K3	DDX276BT	K2	DDX419BT	A1	DDX419BT	M1
DDX419BT	R1	DDX419BTM	M2				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R545	RK73HH1J683D	MG RESISTOR	68kΩ 1/16W D	1	
	R548	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1	
	R549	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R580	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	
	R581	RK73HH1J152D	MG RESISTOR	1.5kΩ 1/16W D	1	
	R582	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	
	R583	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1	
	R585	RK73HH1J394D	MG RESISTOR	390kΩ 1/16W D	1	
	R586	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R587	RK73HH1J164D	MG RESISTOR	160kΩ 1/16W D	1	
	R588	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R589	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	1	
	R590	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R591	RK73HH1J563D	MG RESISTOR	56kΩ 1/16W D	1	
	R592	RZ73F0AK62LJ	RESISTOR	0.062Ω 1/3W J	1	
	R593	RK73EB2E560J	MG RESISTOR	56Ω 1/4W J	1	
	R601	RK73HB1J240J	MG RESISTOR	24Ω 1/16W J	1	
	R602	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	1	
	R603	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	1	
	R608	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R609	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R610	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R611	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R613	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	
	R614	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R615	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R617	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K3,K2 A1,M1,R1,M2
	R617	RK73HB1J150J	MG RESISTOR	15Ω 1/16W J	1	
	R618	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R619	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R620	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R621	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R622	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R623	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R624	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R625	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R628	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R631	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R632	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R633	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R634	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R635	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R650	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	
	R651	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	
	R652	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	
	R720	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R721	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	1	
	R722	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R723	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R725	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	
	R726	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	
	R728	RK73HB1J753J	MG RESISTOR	75kΩ 1/16W J	1	
	R731	RK73HH1J753D	MG RESISTOR	75kΩ 1/16W D	1	A1,M2 K3,K2,M1,R1
	R732	RK73HH1J753D	MG RESISTOR	75kΩ 1/16W D	1	
	R732	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1	
	R733	RK73HH1J154D	MG RESISTOR	150kΩ 1/16W D	1	K3
	R733	RK73HH1J753D	MG RESISTOR	75kΩ 1/16W D	1	K2,M1,M2 R1
	R733	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1	
	R734	RK73HH1J753D	MG RESISTOR	75kΩ 1/16W D	1	
	R734	RK73HH1J223D	MG RESISTOR	22kΩ 1/16W D	1	K3,A1,R1 K2 M2
	R734	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1	
	R735	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R736	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R738	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1	
	R741	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R742	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R743	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R744	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R745	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R746	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R747	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R748	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	
	R749	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R750	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	
	R751	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R752	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R753	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R754	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R755	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R756	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R757	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R758	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K2
	R759	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	
	R760	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R761	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R762	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R763	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R764	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R765	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R766	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R767	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R768	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX26BT	K3	DDX276BT	K2	DDX419BT	A1	DDX419BT	M1
DDX419BT	R1	DDX419BTM	M2				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R769	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R771	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R772	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R773	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R776	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R777	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R778	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R780	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R781	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R784	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R787	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K3,K2,M1,M2
	R788	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R789	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K3,K2,M1,M2
	R790	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R791	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K3,K2,M1,M2
	R792	RK73GB2A272J	MG RESISTOR	2.7kΩ 1/10W J	1	
	R793	RK73GB2A272J	MG RESISTOR	2.7kΩ 1/10W J	1	
	R794	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R795	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R799	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R801	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R802	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	
	R803	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R809	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R811	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R812	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	1	
	R814	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R815	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R816	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R818	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R819	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R820	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R821	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R822	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R823	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R824	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R825	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R826	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R827	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R828	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R830	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R831	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R832	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R840	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K3,K2,M1,M2
	R841	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K3,K2,M1,M2
	R842	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K3,K2
	R843	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K3,K2
	R844	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K2
	R845	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K2
	R846	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K2
	R847	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K2
	R860	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R861	RK73HH1J513D	MG RESISTOR	51kΩ 1/16W D	1	
	R862	RK73HB1J200J	MG RESISTOR	20Ω 1/16W J	1	
	R863	RK73HH1J163D	MG RESISTOR	16kΩ 1/16W D	1	
	R864	RK73HH1J513D	MG RESISTOR	51kΩ 1/16W D	1	
	R866	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R890	RK73HH1J163D	MG RESISTOR	16kΩ 1/16W D	1	
	R900	RK73HH1J303D	MG RESISTOR	30kΩ 1/16W D	1	
	R901	RK73HH1J243D	MG RESISTOR	24kΩ 1/16W D	1	K3,K2,R1
	R901	RK73HH1J273D	MG RESISTOR	27kΩ 1/16W D	1	A1,M1,M2
	R902	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1	
	R903	RK73HH1J392D	MG RESISTOR	3.9kΩ 1/16W D	1	K3,K2,R1
	R903	RK73HH1J332D	MG RESISTOR	3.3kΩ 1/16W D	1	A1,M1,M2
	R904	RK73EB2E100J	MG RESISTOR	10Ω 1/4W J	1	
	R921	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R922	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	
	R923	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	
	R924	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R930	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	
	R931	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	
	R932	RK73HB1J912J	MG RESISTOR	9.1kΩ 1/16W J	1	
	R933	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	M1,M2
	R934	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R936	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R950	RK73HH1J224D	MG RESISTOR	220kΩ 1/16W D	1	
	R951	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	
	R952	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	
	R953	RK73EB2E153J	MG RESISTOR	15kΩ 1/4W J	1	
	R954	RK73HB1J304J	MG RESISTOR	300kΩ 1/16W J	1	
	R955	RK73HB1J304J	MG RESISTOR	300kΩ 1/16W J	1	
	R956	RK73EB2E102J	MG RESISTOR	1kΩ 1/4W J	1	
	R957	RK73EB2E102J	MG RESISTOR	1kΩ 1/4W J	1	
	R958	RK73EB2E102J	MG RESISTOR	1kΩ 1/4W J	1	
	R959	RK73HB1J623J	MG RESISTOR	62kΩ 1/16W J	1	
	R960	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R970	RK73HH1J513D	MG RESISTOR	51kΩ 1/16W D	1	
	R971	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	
	R972	RK73GH2A333D	MG RESISTOR	33kΩ 1/10W D	1	
	R973	RK73HH1J304D	MG RESISTOR	300kΩ 1/16W D	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX26BT	K3	DDX276BT	K2	DDX419BT	A1	DDX419BT	M1
DDX419BT	R1	DDX419BTM	M2				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R974	RK73GH2A304D	MG RESISTOR	300kΩ 1/10W D	1	
	R975	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	
	R976	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R977	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	
	R978	RK73HH1J154D	MG RESISTOR	150kΩ 1/16W D	1	
	R979	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	
	R980	RK73GB2A224J	MG RESISTOR	220kΩ 1/10W J	1	
	R981	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	
	R990	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	A1,M1,R1,M2
	R991	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	A1,M1,R1,M2
	R992	RK73GH2A472D	MG RESISTOR	4.7kΩ 1/10W D	1	A1,M1,R1,M2
	R993	RK73GH2A472D	MG RESISTOR	4.7kΩ 1/10W D	1	A1,M1,R1,M2
	R994	RK73EB2E511J	MG RESISTOR	510Ω 1/4W J	1	A1,M1,R1,M2
	R995	RK73EB2E511J	MG RESISTOR	510Ω 1/4W J	1	A1,M1,R1,M2
	R996	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	1	A1,M1,R1,M2
	R997	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	1	A1,M1,R1,M2
	R998	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	A1,M1,R1,M2
	R999	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	A1,M1,R1,M2
	R1000	RK73GB2A681J	MG RESISTOR	680Ω 1/10W J	1	A1,M1,R1,M2
	R1001	RK73GB2A681J	MG RESISTOR	680Ω 1/10W J	1	A1,M1,R1,M2
	R1016	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	1	K3,K2
	R1017	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	1	K3,K2
	R1018	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	1	K3,K2
	R1019	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	1	K3,K2
	R1034	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R1035	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	
	R1047	RK73HH1J100D	MG RESISTOR	10Ω 1/16W D	1	
	R1056	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R1057	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R1059	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R1063	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R1068	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R1100	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1209	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	L60	L3D-0044-00	CHOKE COIL		1	
	L480	LR73Z0AD4R7M	CHIP INDUCTOR	4.7uH	1	
	L481	LR73Z0AD4R7M	CHIP INDUCTOR	4.7uH	1	K3,K2,M1,R1,M2
	L482	LR79Z0AG100M	CHIP INDUCTOR	10uH	1	
	L500	LR79Z0JM150M	CHIP INDUCTOR		1	
	L540	LR79Z0FF100M	CHIP INDUCTOR		1	
	L580	LR79Z0DE470M	CHIP INDUCTOR		1	
	L581	LB73G0ED-005	CHIP FERRITE		1	
	L582	LB73G0ED-005	CHIP FERRITE		1	
	L600	LR73Z0AD4R7M	CHIP INDUCTOR	4.7uH	1	
	L601	LR73Z0AD4R7M	CHIP INDUCTOR	4.7uH	1	
	L602	LK73G0BER12K	M.CHIP INDUCTOR		1	
	L604	LK73G0BE1R8K	M.CHIP INDUCTOR		1	
	L605	LK73G0BER39K	M.CHIP INDUCTOR		1	
	L607	L1K-0001-00	BALUN TRANS		1	
	L609	LK73G0BE100K	M.CHIP INDUCTOR		1	
	L610	LK73G0BER15K	M.CHIP INDUCTOR		1	
	L611	LK73G0BE82NK	M.CHIP INDUCTOR	82nF	1	
	L612	LR73Z0AD4R7M	CHIP INDUCTOR	4.7uH	1	
	L720	LB73G0BD-006	CHIP FERRITE		1	
	L783	LB73H0BG-003	CHIP FERRITE		1	
	L786	LB73H0BG-003	CHIP FERRITE		1	
	L860	LR79Z0JM150M	CHIP INDUCTOR		1	
	L1010	LB73H0FJ-003	CHIP FERRITE		1	
	L1011	LB73H0FJ-003	CHIP FERRITE		1	
	L1012	LR73Z0AD4R7M	CHIP INDUCTOR	4.7uH	1	
	L1016	LK73Z0AK4R7M	M.CHIP INDUCTOR	4.7uH	1	A1,M1,R1,M2
	L1017	LK73Z0AK4R7M	M.CHIP INDUCTOR	4.7uH	1	A1,M1,R1,M2
	L1018	LK73Z0AK4R7M	M.CHIP INDUCTOR	4.7uH	1	A1,M1,R1,M2
	L1019	LK73Z0AK4R7M	M.CHIP INDUCTOR	4.7uH	1	A1,M1,R1,M2
	AT601	E6J-0006-00	JACK OTHERS		1	
	CN60	QGA2501C1-02	W TO B CONNE	W-B (1-2)	1	K3,K2
	CN80	EA710AP-2005A	W TO B CONNE		1	
	CN81	EA710AQ-1503A	W TO B CONNE	3P	1	
	CN130	QGA2001C1-02	W TO B CONNE	W-B (1-2)	1	A1,M1,M2
	CN220	EC720AA-0508A	FFC FPC CONNE		1	
	CN410	QGA2501C1-02	W TO B CONNE	W-B (1-2)	1	
	CN480	EC720AA-0535A	FFC FPC CONNE		1	
	CN650	EC720AA-0560A	FFC FPC CONNE	60P	1	
	CN652	EC720AA-0526A	FFC FPC CONNE		1	K2
	CN654	EC720AA-0522A	FFC FPC CONNE		1	K3,A1,M1,R1,M2
△	F100	F53-0513-08	PATTERN FUSE	4A	1	
△	F130	F53-0513-08	PATTERN FUSE	4A	1	
△	F131	F53-0513-08	PATTERN FUSE	4A	1	
△	F270	F53-0513-08	PATTERN FUSE	4A	1	
△	F580	FZA10BF-1R0	FUSE (CC)	1A	1	
△	F920	FZA10BF-4R0	FUSE (CC)		1	
	FL80	L7K-0038-00	FILTER		1	
	J60	E5J-0139-00	R.RECEPTACLE		1	
	J100	QNS0291-001	3.5 JACK		1	
	J130	QNN0890-001	PIN JACK		1	
	J220	QNS0307-001	3.5 JACK		1	
	J270	QNN0889-001	PIN JACK		1	
	J600	G0K-0013-00	SPRING		1	
	VA100	SDV1005E18//1	VARISTOR		1	
	VA101	SDV1005E18//1	VARISTOR		1	
	VA102	SDV1005A14//0	VARISTOR		1	
	VA103	SDV1005A14//0	VARISTOR		1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX26BT	K3	DDX276BT	K2	DDX419BT	A1	DDX419BT	M1
DDX419BT	R1	DDX419BTM	M2				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	VA130	SDV1005E18//1	VARISTOR		1	A1,M1,M2
	VA131	SDV1005E18//1	VARISTOR		1	
	VA132	SDV1005E18//1	VARISTOR		1	
	VA220	SDV1005A14//0	VARISTOR		1	
	VA221	SDV1005A14//0	VARISTOR		1	
	VA250	SDV1005A14//0	VARISTOR		1	
	VA251	SDV1005A14//0	VARISTOR		1	
	VA320	SDV1005A14//0	VARISTOR		1	
	VA330	SDV1005A14//0	VARISTOR		1	
	VA340	SDV1005A14//0	VARISTOR		1	
	VA350	SDV1005A14//0	VARISTOR		1	
	VA410	SDV1005E18//1	VARISTOR		1	
	VA411	SDV1005A14//0	VARISTOR		1	
	VA606	NAF0024-001X	ESD SUPPRESSOR		1	
	VA721	SDV1005H26//0	VARISTOR		1	
	VA722	SDV1005H26//0	VARISTOR		1	
	VA723	SDV1005H26//0	VARISTOR		1	
	VA724	SDV1005H26//0	VARISTOR		1	
	VA1010	F0K-0145-00	SURGE ABSORBER		1	
	X600	L7J-0021-00	QUARTZ CRYSTAL		1	
	X721	L7J-0099-00	QUARTZ CRYSTAL		1	

BT PWB ASSY (XJ5-001K-00) <XJ5>

C1301	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
C1302	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
C1304	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
C1305	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
C1306	CK73HXR1C103K	C CAPACITOR	0.01uF 16V K	1	
C1317	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
R1302	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
R1304	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
R1305	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
R1306	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
R1307	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
R1308	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
R1309	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
R1310	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
R1311	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
R1312	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
R1313	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
R1316	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
R1317	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	
R1318	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	
R1319	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	
L1302	LR7320AD4R7M	CHIP INDUCTOR	4.7uH	1	
A1301	W0C-0167-00	CIRCUIT MODULE		1	
CN1301	EC720AA-0522A	FFC FPC CONNE		1	
CN1302	EC720AA-0508A	FFC FPC CONNE		1	

OPERATION PWB ASSY (XJ7-050M-0x) <XJ7>

IC2751	PICA38603-NV	IR DETECT UNIT		1	A1,M1,R1,M2
Q2751	KTC4075P/Y/	TRANSISTOR		1	A1,M1,R1,M2
Q2752	KTC4075P/Y/	TRANSISTOR		1	A1,M1,R1,M2
Q2753	KTC4075P/Y/	TRANSISTOR		1	A1,M1,R1,M2
D2751	NSSM124	LED		1	A1,M1,R1,M2
D2752	NSSM124	LED		1	A1,M1,R1,M2
D2753	NSSM124	LED		1	A1,M1,R1,M2
C2651	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1	A1,M1
C2751	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	A1,M1,R1,M2
C2755	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	A1,M1,R1,M2
C2756	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	A1,M1,R1,M2
R2751	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A1,M1,R1,M2
R2752	RK73HB1J182J	MG RESISTOR	1.8kΩ 1/16W J	1	A1,M1,R1,M2
R2753	RK73HB1J242J	MG RESISTOR	2.4kΩ 1/16W J	1	A1,M1,R1,M2
R2754	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A1,M1,R1,M2
R2755	RK73HB1J182J	MG RESISTOR	1.8kΩ 1/16W J	1	A1,M1,R1,M2
R2756	RK73HB1J242J	MG RESISTOR	2.4kΩ 1/16W J	1	A1,M1,R1,M2
R2758	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1	A1,M1,R1,M2
R2760	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	A1,M1,R1,M2
R2762	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	A1,M1,R1,M2
R2763	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	A1,M1,R1,M2
R2764	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	A1,M1,R1,M2
R2765	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	A1,M1,R1,M2
R2766	RK73GH2A621D	MG RESISTOR	620Ω 1/10W D	1	A1,M1,R1,M2
R2768	RK73GH2A621D	MG RESISTOR	620Ω 1/10W D	1	A1,M1,R1,M2
R2770	RK73GH2A621D	MG RESISTOR	620Ω 1/10W D	1	A1,M1,R1,M2
CN2651	EC720AT-0506A	FFC FPC CONNE	6P	1	A1,M1
CN2751	EC720AA-0515A	FFC FPC CONNE	15P	1	A1,M1,R1,M2
MC2651	T9B-0052-00	MIC ELEMENT		1	A1,M1
S2751	S7A-0001-00	TACTILE PUSH SW		1	A1,M1,R1,M2
S2752	S7A-0001-00	TACTILE PUSH SW		1	A1,M1,R1,M2
S2753	S7A-0001-00	TACTILE PUSH SW		1	A1,M1,R1,M2
S2754	S7A-0001-00	TACTILE PUSH SW		1	A1,M1,R1,M2
S2755	S7A-0001-00	TACTILE PUSH SW		1	A1,M1,R1,M2
S2756	S7A-0001-00	TACTILE PUSH SW		1	A1,M1,R1,M2
S2757	S7A-0001-00	TACTILE PUSH SW		1	A1,M1,R1,M2

OPERATION PWB ASSY (XJ7-051K-00) <XJ7>

IC1800	PICA38603-NV	IR DETECT UNIT		1	K3,K2
Q1800	KTC4075P/Y/	TRANSISTOR		1	K3,K2
D1800	QSMPCWH1ZCEB2	LED		1	K3,K2
D1801	QSMPCWH1ZCEB2	LED		1	K3,K2
D1802	QSMPCWH1ZCEB2	LED		1	K3,K2
C1800	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	K3,K2

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX26BT	K3	DDX276BT	K2	DDX419BT	A1	DDX419BT	M1
DDX419BT	R1	DDX419BTM	M2				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C1802	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	K3,K2
	C1803	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	K3,K2
	R1800	RK73HB1J182J	MG RESISTOR	1.8kΩ 1/16W J	1	K3,K2
	R1801	RK73HB1J242J	MG RESISTOR	2.4kΩ 1/16W J	1	K3,K2
	R1802	RK73HB1J182J	MG RESISTOR	1.8kΩ 1/16W J	1	K3,K2
	R1803	RK73HB1J242J	MG RESISTOR	2.4kΩ 1/16W J	1	K3,K2
	R1804	RK73FB2B751J	MG RESISTOR	750Ω 1/8W J	1	K3,K2
	R1805	RK73GH2A301D	MG RESISTOR	300Ω 1/10W D	1	K3,K2
	R1807	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K3,K2
	CN1800	EC720AA-0515A	FFC FPC CONNE	15P	1	K3,K2
	S1800	S7A-0001-00	TACTILE PUSH SW		1	K3,K2
	S1801	S7A-0001-00	TACTILE PUSH SW		1	K3,K2
	S1802	S7A-0001-00	TACTILE PUSH SW		1	K3,K2
	S1803	S7A-0001-00	TACTILE PUSH SW		1	K3,K2
	S1804	S7A-0001-00	TACTILE PUSH SW		1	K3,K2
	S1805	S7A-0001-00	TACTILE PUSH SW		1	K3,K2
	S1806	S7A-0001-00	TACTILE PUSH SW		1	K3,K2
VIDEO PWB ASSY (XJ8-056x-0x) <XJ8>						
	IC1400	MF1337S395901	MCU IC		1	
	IC1500	MM3411A15NE	ANALOG IC		1	
	IC1550	BD001A5WEFJ	ANALOG IC		1	
	IC1560	MM3411A33NE	ANALOG IC		1	
	IC1600	ML86250LAZ07F	MOS IC	BGA	1	
	IC1880	BA2904FVM	MOS IC		1	
	IC1881	NJM11100F1	ANALOG IC		1	
	IC1901	M12L25116A6T2	DRAM IC		1	
	IC1902	M12L25116A6T2	DRAM IC		1	
	IC1940	W3F-0405-00	ROM IC		1	
	IC2000	STA1090	MPU IC	BGA	1	
	IC2661	TS5A2053DCTR	MOS IC		1	A1,M1
	IC2662	NJM2904CV	ANALOG IC		1	A1,M1
	IC2663	NJM11100F1	ANALOG IC		1	A1,M1
	Q1400	KTA2014P/Y/	TRANSISTOR		1	
	Q1580	KTA2014P/Y/	TRANSISTOR		1	
	Q1581	KRC407E-P	DIGI TRANSISTOR		1	
	Q1619	KRC402P	DIGI TRANSISTOR		1	
	Q1800	KTC4075P/Y/	TRANSISTOR		1	
	Q1801	KTC4075P/Y/	TRANSISTOR		1	
	Q1802	KTC4075P/Y/	TRANSISTOR		1	
	Q1803	KTC4075P/Y/	TRANSISTOR		1	
	Q1804	KTC4075P/Y/	TRANSISTOR		1	
	Q1805	KTC4075P/Y/	TRANSISTOR		1	
	Q1806	KTC4075P/Y/	TRANSISTOR		1	
	Q1807	KTC4075P/Y/	TRANSISTOR		1	
	Q1808	KTC4075P/Y/	TRANSISTOR		1	
	Q1810	KRC407E-P	DIGI TRANSISTOR		1	
	Q1811	KRC407E-P	DIGI TRANSISTOR		1	
	Q1812	KRC407E-P	DIGI TRANSISTOR		1	
	Q1813	KRC407E-P	DIGI TRANSISTOR		1	
	Q1814	KTA2014P/Y/	TRANSISTOR		1	
	Q1815	KTC4075P/Y/	TRANSISTOR		1	
	Q1821	KTC4075P/Y/	TRANSISTOR		1	
	Q1880	KTC4075P/Y/	TRANSISTOR		1	
	Q1881	KTA2014P/Y/	TRANSISTOR		1	
	Q1882	KTC4075P/Y/	TRANSISTOR		1	
	Q1883	KRC407E-P	DIGI TRANSISTOR		1	
	Q1884	KRA307E-P	TRANSISTOR		1	
	Q1885	KRC407E-P	DIGI TRANSISTOR		1	
	Q1886	KTC4075P/Y/	TRANSISTOR		1	
	Q1887	KTC4075P/Y/	TRANSISTOR		1	
	Q1888	KRC407E-P	DIGI TRANSISTOR		1	
	D1550	SM5818PL	SCHOTTKY DIODE		1	
	D1794	RSB6.8SM	ZENER DIODE		1	
	D1795	RSB6.8SM	ZENER DIODE		1	
	D1796	RSB6.8SM	ZENER DIODE		1	
	D1797	RSB6.8SM	ZENER DIODE		1	
	D1881	UDZV13B	ZENER DIODE		1	
	D1882	UDZV18B	ZENER DIODE		1	
	D1883	1SS355VM	DIODE		1	
	D1994	RSB6.8SM	ZENER DIODE		1	
	C1400	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1500	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C1501	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C1550	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C1551	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C1553	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C1554	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C1555	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C1561	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1562	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C1563	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C1580	CK73GXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C1632	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1633	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1634	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1635	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1637	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1638	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1640	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1641	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1642	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX26BT	K3	DDX276BT	K2	DDX419BT	A1	DDX419BT	M1
DDX419BT	R1	DDX419BTM	M2				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C1643	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1644	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1646	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C1647	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C1649	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C1650	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C1651	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C1652	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C1653	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C1654	CC73HCH1H102J	C CAPACITOR	1000pF 50V J	1	
	C1656	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C1663	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C1664	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C1665	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C1666	CC73HCH1H120J	C CAPACITOR	12pF 50V J	1	
	C1667	CC73HCH1H120J	C CAPACITOR	12pF 50V J	1	
	C1668	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C1669	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C1671	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C1672	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C1673	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C1674	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C1675	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C1677	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1678	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C1679	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C1790	CC73HCH1H102J	C CAPACITOR	1000pF 50V J	1	
	C1791	CC73HCH1H102J	C CAPACITOR	1000pF 50V J	1	
	C1792	CC73HCH1H102J	C CAPACITOR	1000pF 50V J	1	
	C1793	CC73HCH1H102J	C CAPACITOR	1000pF 50V J	1	
	C1829	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C1830	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C1840	CK73FXR1E475K	C CAPACITOR	4.7uF 25V K	1	
	C1841	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1844	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	C1845	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	C1846	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	C1872	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C1873	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C1874	CK73GXR1E105K	C CAPACITOR	1uF 25V K	1	
	C1875	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C1880	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C1881	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C1882	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C1883	CK73FXR1E475K	C CAPACITOR	4.7uF 25V K	1	
	C1884	CK73GXR1E105K	C CAPACITOR	1uF 25V K	1	
	C1885	CK73GXR1E105K	C CAPACITOR	1uF 25V K	1	
	C1886	CK73GXR1E105K	C CAPACITOR	1uF 25V K	1	
	C1887	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C1888	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C1889	CK73GXR1E105K	C CAPACITOR	1uF 25V K	1	
	C1890	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C1891	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C1892	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1893	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1894	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1895	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C1896	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1897	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C1898	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1899	CK73FXR1E475K	C CAPACITOR	4.7uF 25V K	1	
	C1901	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C1902	CK73GXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C1903	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C1904	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C1905	CK73GXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C1906	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C1907	CK73GXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C1908	CK73GXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C1909	CK73GXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C1911	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C1912	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C1913	CK73GXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C1915	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C1916	CK73GXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C1917	CK73GXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C1918	CK73GXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C1940	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C1941	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1942	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1943	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1944	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C2001	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C2003	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C2004	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C2005	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C2006	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C2007	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C2009	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C2010	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX26BT	K3	DDX276BT	K2	DDX419BT	A1	DDX419BT	M1
DDX419BT	R1	DDX419BTM	M2				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C2011	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C2012	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C2013	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C2014	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C2015	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C2017	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C2019	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C2020	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C2021	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C2023	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C2024	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C2025	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C2026	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C2027	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C2028	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C2029	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C2030	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C2031	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C2032	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C2033	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C2035	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C2036	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C2037	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1	K3,K2,R1,M2
	C2038	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1	K3,K2,R1,M2
	C2039	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C2040	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C2042	CC73HCH1H080D	C CAPACITOR	8pF 50V D	1	
	C2043	CC73HCH1H070D	C CAPACITOR	7pF 50V D	1	
	C2044	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C2045	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C2046	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C2047	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C2048	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C2049	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C2050	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C2051	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C2056	CK73HXR1H222K	C CAPACITOR	2200pF 50V K	1	
	C2057	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C2058	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C2059	CK73HXR0J474K	C CAPACITOR	0.47uF 6.3V K	1	
	C2060	CK73HXR0J474K	C CAPACITOR	0.47uF 6.3V K	1	
	C2063	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C2064	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C2067	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C2072	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C2073	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C2081	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C2083	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C2095	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C2099	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	A1,M1
	C2100	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	A1,M1
	C2101	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	
	C2102	CK73GXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C2103	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C2104	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C2661	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	A1,M1
	C2662	CK73FXR1A106K	C CAPACITOR	10uF 10V K	1	A1,M1
	C2665	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C2666	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	A1,M1
	C2671	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	A1,M1
	C2672	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	A1,M1
	C2673	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	A1,M1
	C2674	CC73HCH1H331J	C CAPACITOR	330pF 50V J	1	A1,M1
	C2675	CC73HCH1H150J	C CAPACITOR	15pF 50V J	1	A1,M1
	C2676	CC73HCH1H331J	C CAPACITOR	330pF 50V J	1	A1,M1
	C2677	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	A1,M1
	C2678	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1	A1,M1
	C2679	CK73HXR1C333K	C CAPACITOR	0.033uF 16V K	1	A1,M1
	C2680	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	A1,M1
	C2681	CK73HXR1C333K	C CAPACITOR	0.033uF 16V K	1	A1,M1
	C2682	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1	A1,M1
	C2683	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	A1,M1
	C2684	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	A1,M1
	C2685	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	A1,M1
	R1401	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1402	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1403	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R1404	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R1405	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R1406	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R1407	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R1408	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R1550	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1552	RK73HH1J123D	MG RESISTOR	12kΩ 1/16W D	1	
	R1553	RK73HH1J243D	MG RESISTOR	24kΩ 1/16W D	1	
	R1554	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1555	RK73EB2E101J	MG RESISTOR	100Ω 1/4W J	1	
	R1560	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1583	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	
	R1600	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1601	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R1602	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX26BT	K3	DDX276BT	K2	DDX419BT	A1	DDX419BT	M1
DDX419BT	R1	DDX419BTM	M2				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R1603	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R1604	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R1605	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R1606	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R1607	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R1608	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R1609	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R1610	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R1611	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1612	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R1613	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R1614	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R1615	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R1616	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R1617	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R1618	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R1619	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R1620	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1621	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1622	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1623	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1624	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1625	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1626	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1627	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R1628	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1645	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R1646	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1647	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R1653	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1654	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1655	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1656	RK73HB1J121J	MG RESISTOR	120Ω 1/16W J	1	
	R1665	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	1	
	R1666	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	
	R1668	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1671	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1	
	R1672	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R1674	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R1677	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R1771	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R1773	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R1794	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R1800	RK73PB2H5R1J	MG RESISTOR	5.1Ω 1/2W J	1	
	R1801	RK73PB2H5R1J	MG RESISTOR	5.1Ω 1/2W J	1	
	R1802	RK73PB2H5R1J	MG RESISTOR	5.1Ω 1/2W J	1	
	R1803	RK73PB2H5R1J	MG RESISTOR	5.1Ω 1/2W J	1	
	R1804	RK73PB2H5R1J	MG RESISTOR	5.1Ω 1/2W J	1	
	R1805	RK73PB2H5R1J	MG RESISTOR	5.1Ω 1/2W J	1	
	R1806	RK73PB2H5R1J	MG RESISTOR	5.1Ω 1/2W J	1	
	R1807	RK73PB2H5R1J	MG RESISTOR	5.1Ω 1/2W J	1	
	R1808	RK73PB2H5R1J	MG RESISTOR	5.1Ω 1/2W J	1	
	R1809	RK73PB2H5R1J	MG RESISTOR	5.1Ω 1/2W J	1	
	R1810	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1811	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1812	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1813	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1814	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1815	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1816	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1817	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1818	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1820	RK73GH2A101D	MG RESISTOR	100Ω 1/10W D	1	
	R1821	RK73GH2A101D	MG RESISTOR	100Ω 1/10W D	1	
	R1822	RK73GH2A101D	MG RESISTOR	100Ω 1/10W D	1	
	R1823	RK73GH2A101D	MG RESISTOR	100Ω 1/10W D	1	
	R1824	RK73GH2A101D	MG RESISTOR	100Ω 1/10W D	1	
	R1825	RK73GH2A101D	MG RESISTOR	100Ω 1/10W D	1	
	R1826	RK73GH2A101D	MG RESISTOR	100Ω 1/10W D	1	
	R1827	RK73GH2A101D	MG RESISTOR	100Ω 1/10W D	1	
	R1828	RK73GH2A101D	MG RESISTOR	100Ω 1/10W D	1	
	R1830	RK73HH1J433D	MG RESISTOR	43kΩ 1/16W D	1	
	R1831	RK73HH1J913D	MG RESISTOR	91kΩ 1/16W D	1	
	R1832	RK73HH1J184D	MG RESISTOR	180kΩ 1/16W D	1	
	R1833	RK73HH1J434D	MG RESISTOR	430kΩ 1/16W D	1	
	R1834	RK73HH1J153D	MG RESISTOR	15kΩ 1/16W D	1	
	R1835	RK73HH1J153D	MG RESISTOR	15kΩ 1/16W D	1	
	R1836	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R1837	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R1838	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R1839	RK73HH1J620D	MG RESISTOR	62Ω 1/16W D	1	
	R1840	RK73HH1J161D	MG RESISTOR	160Ω 1/16W D	1	
	R1841	RK73HH1J430D	MG RESISTOR	43Ω 1/16W D	1	
	R1842	RK73HH1J360D	MG RESISTOR	36Ω 1/16W D	1	
	R1843	RK73HH1J101D	MG RESISTOR	100Ω 1/16W D	1	
	R1844	RK73HH1J161D	MG RESISTOR	160Ω 1/16W D	1	
	R1845	RK73HH1J101D	MG RESISTOR	100Ω 1/16W D	1	
	R1846	RK73HH1J360D	MG RESISTOR	36Ω 1/16W D	1	
	R1847	RK73HH1J430D	MG RESISTOR	43Ω 1/16W D	1	
	R1848	RK73HH1J161D	MG RESISTOR	160Ω 1/16W D	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX26BT	K3	DDX276BT	K2	DDX419BT	A1	DDX419BT	M1
DDX419BT	R1	DDX419BTM	M2				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R1849	RK73HH1J101D	MG RESISTOR	100Ω 1/16W D	1	
	R1850	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R1852	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1857	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R1875	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1	
	R1876	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R1877	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	
	R1878	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R1879	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R1880	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	
	R1881	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1	
	R1882	RK73GH2A123D	MG RESISTOR	12kΩ 1/10W D	1	
	R1883	RK73GH2A753D	MG RESISTOR	75kΩ 1/10W D	1	
	R1884	RK73GH2A132D	MG RESISTOR	1.3kΩ 1/10W D	1	
	R1885	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R1887	RK73PB2H820J	MG RESISTOR	82Ω 1/2W J	1	
	R1888	RK73PB2H820J	MG RESISTOR	82Ω 1/2W J	1	
	R1889	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R1890	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	
	R1891	RK73HH1J472D	MG RESISTOR	4.7kΩ 1/16W D	1	
	R1892	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R1893	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1	
	R1894	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R1895	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R1896	RK73EB2E392J	MG RESISTOR	3.9kΩ 1/4W J	1	
	R1897	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R1898	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	1	
	R1899	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	1	
	R1900	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1901	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1902	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1903	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1904	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1905	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1906	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1907	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1908	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1909	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1910	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1911	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1912	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1913	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1914	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	
	R1915	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	
	R1916	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1917	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1918	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1919	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1920	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1921	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1922	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1923	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1924	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1925	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1926	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1927	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1928	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1929	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1930	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1931	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1932	RK73HH1J470D	MG RESISTOR	47Ω 1/16W D	1	
	R1933	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R1934	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R1936	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1958	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1959	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1960	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1961	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1962	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1963	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1964	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1965	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1966	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1967	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1968	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1969	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1970	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1971	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1972	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1973	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1974	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1975	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1976	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1977	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1978	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1979	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1980	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1981	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1982	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1983	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1984	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1985	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX26BT	K3	DDX276BT	K2	DDX419BT	A1	DDX419BT	M1
DDX419BT	R1	DDX419BTM	M2				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R1986	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1987	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1988	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1989	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1990	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2001	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R2002	RK73HB1J390J	MG RESISTOR	39Ω 1/16W J	1	
	R2003	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2004	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2005	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R2006	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2007	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2010	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R2011	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R2013	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R2014	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R2015	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	
	R2016	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R2017	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R2022	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R2023	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J	1	
	R2024	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J	1	
	R2025	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R2029	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R2030	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2032	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2035	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2036	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2038	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R2040	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2041	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R2042	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R2048	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2058	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R2061	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R2062	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R2063	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R2064	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R2065	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R2066	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R2067	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R2068	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R2069	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R2074	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R2075	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R2076	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R2077	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R2081	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R2082	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R2083	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R2084	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R2086	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1	
	R2087	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1	
	R2088	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1	
	R2090	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2091	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2092	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1	
	R2093	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R2094	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R2099	RK73HB1J393J	MG RESISTOR	39kΩ 1/16W J	1	
	R2100	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1	
	R2101	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R2102	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R2103	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R2104	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2105	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2106	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2107	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R2108	RK73HB1J302J	MG RESISTOR	3kΩ 1/16W J	1	
	R2109	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2114	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R2115	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R2117	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	
	R2118	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R2120	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2121	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2126	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J	1	
	R2127	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R2128	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R2129	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R2130	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R2131	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R2133	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2134	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R2136	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R2137	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R2138	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R2139	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R2140	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R2141	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX26BT	K3	DDX276BT	K2	DDX419BT	A1	DDX419BT	M1
DDX419BT	R1	DDX419BTM	M2				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R2142	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R2143	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R2145	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2147	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R2150	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R2151	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R2152	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R2153	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R2154	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R2155	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R2157	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R2160	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2161	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2164	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R2661	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R2662	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	A1,M1
	R2663	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R2664	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	A1,M1
	R2665	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R2666	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K3,K2,R1,M2
	R2667	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A1,M1
	R2669	RK73HB1J182J	MG RESISTOR	1.8kΩ 1/16W J	1	A1,M1
	R2670	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R2671	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	A1,M1
	R2673	RK73HB1J122D	MG RESISTOR	1.2kΩ 1/16W D	1	A1,M1
	R2674	RK73HB1J202D	MG RESISTOR	2kΩ 1/16W D	1	A1,M1
	R2675	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A1,M1
	R2677	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A1,M1
	R2678	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	A1,M1
	R2679	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	A1,M1
	R2680	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	A1,M1
	R2681	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	A1,M1
	R2682	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	A1,M1
	R2683	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	A1,M1
	R2684	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	A1,M1
	R2685	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A1,M1
	R2686	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	A1,M1
	R2687	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	A1,M1
	R2688	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A1,M1
	R2690	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A1,M1
	R2692	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A1,M1
	R2694	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A1,M1
	R2696	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A1,M1
	R2699	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A1,M1
	R2700	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	A1,M1
	R2701	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	A1,M1
	R2703	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R2705	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A1,M1
	R2706	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A1,M1
	L1551	LB73G0ED-002	CHIP FERRITE		1	
	L1601	LB73G0ED-004	CHIP FERRITE		1	
	L1602	LB73G0ED-004	CHIP FERRITE		1	
	L1603	LB73G0ED-004	CHIP FERRITE		1	
	L1604	LB73G0ED-004	CHIP FERRITE		1	
	L1626	LB73H0FJ-003	CHIP FERRITE		1	
	L1627	LB73H0CC-004	CHIP FERRITE		1	
	L2003	LB73H0FJ-003	CHIP FERRITE		1	
	L2070	LB73H0BG-003	CHIP FERRITE		1	
	L2071	LB73H0BG-003	CHIP FERRITE		1	
	L2072	LB73H0BG-003	CHIP FERRITE		1	
	L2073	LB73H0BG-003	CHIP FERRITE		1	
	CN1771	EC720AA-0515A	FFC FPC CONNE	15P	1	
	CN1779	EC720AA-0506A	FFC FPC CONNE		1	A1,M1
	CN1790	EC710AU-1004A	FFC FPC CONNE		1	
	CN1800	EC720AA-0560A	FFC FPC CONNE	60P	1	
	CN1805	QGA3501F1-02X	CONNECTOR	W-B (1-2)	1	
	CN1981	EC720AA-0522A	FFC FPC CONNE		1	
	CN2000	EC720CF-0560A	FFC FPC CONNE		1	
	VA2080	SDV1005E18//2	VARISTOR		1	
	X1600	L7J-0101-00	QUARTZ CRYSTAL		1	
	X2000	L7J-0092-00	QUARTZ CRYSTAL		1	
DAUGHTER PWB ASSY (XJF-016x-0x) <XJF>						
	D1	UDZV6.8B	ZENER DIODE		1	K3,K2,M1,M2
	C9	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	C18	CK73HXR1H102K	C CAPACITOR	1000pF 50V K	1	K3,K2,M1,M2
	C19	CK73HXR1H102K	C CAPACITOR	1000pF 50V K	1	K3,K2,M1,M2
	C20	CK73HXR1H102K	C CAPACITOR	1000pF 50V K	1	K3,K2,M1,M2
	C21	CK73HXR1H102K	C CAPACITOR	1000pF 50V K	1	K3,K2,M1,M2
	C22	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	K3,K2,M1,M2
	C23	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	K3,K2,M1,M2
	C24	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	K3,K2,M1,M2
	C25	CK73GXR1C104K	C CAPACITOR	0.1uF 16V K	1	M1,M2
	R20	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K3,K2,M1,M2
	R21	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K2
	R22	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K2
	R23	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K3,K2,M1,M2
	R24	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	K3,K2,M1,M2
	R25	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K3,K2,M1,M2
	R26	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	K3,K2,M1,M2
	R27	RK73GB2A4R7J	MG RESISTOR	4.7Ω 1/10W J	1	K3,K2,M1,M2
	R28	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	K3,K2,M1,M2
	R29	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	M1,M2

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX26BT	K3	DDX276BT	K2	DDX419BT	A1	DDX419BT	M1
DDX419BT	R1	DDX419BTM	M2				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R31	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	M1,M2
	R33	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	M1,M2
	R35	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	M1,M2
	R36	RK73HH1J750D	MG RESISTOR	75Ω 1/16W D	1	M1,M2
	R37	RK73HH1J750D	MG RESISTOR	75Ω 1/16W D	1	M1,M2
	R38	RK73HH1J750D	MG RESISTOR	75Ω 1/16W D	1	M1,M2
	R39	RK73HH1J750D	MG RESISTOR	75Ω 1/16W D	1	M1,M2
	R41	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K2
	R42	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K2
	R43	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K2
	R44	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	A1,M1,R1,M2
	R45	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	A1,M1,R1,M2
	R46	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	K3,K2
	R46	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A1,M1,R1,M2
	R47	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K2
	R48	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K2
	CN1	QGA2501C1-02	W TO B CONNE	W-B (1-2)	1	K3,K2
	CN3	EC720AA-0526A	FFC FPC CONNE		1	K2
	CN4	EC720AA-0522A	FFC FPC CONNE		1	K3,A1,M1,R1,M2
	CN5	EA120CK-2004A	W TO B CONNE		1	K2
△	F1	F53-0513-08	PATTERN FUSE	4A	1	
△	F3	F53-0513-08	PATTERN FUSE	4A	1	
△	F4	F53-0513-08	PATTERN FUSE	4A	1	
	J2	QNZ0907-001	CIR CONNECTOR		1	K3,K2
	J3	QND0162-001	DIN CONNECTOR		1	M1,M2
	J4	QNS0307-001	3.5 JACK		1	K2,A1,M1,R1,M2
	VA2	SDV1005E18//1	VARIATOR		1	K2
	VA3	SDV1005E18//1	VARIATOR		1	K2
	VA4	SDV1005E18//1	VARIATOR		1	K3,K2,M1,M2
	VA5	SDV1005E18//1	VARIATOR		1	K3,K2,M1,M2
	VA6	SDV1005A14//0	VARIATOR		1	K3,K2,M1,M2
	VA7	SDV1005A14//0	VARIATOR		1	K3,K2,M1,M2
	VA8	SDV1005A14//0	VARIATOR		1	K3,K2,M1,M2
	VA9	SDV1005A14//0	VARIATOR		1	K3,K2,M1,M2
	VA10	SDV1005E18//1	VARIATOR		1	M1,M2
	VA11	SDV1005E18//1	VARIATOR		1	M1,M2
	VA12	SDV1005E18//1	VARIATOR		1	M1,M2
	VA13	SDV1005E18//1	VARIATOR		1	M1,M2
	VA14	SDV1005A14//0	VARIATOR		1	K2,A1,M1,R1,M2
	VA15	SDV1005A14//0	VARIATOR		1	K2,A1,M1,R1,M2
DVD MECHA PWB ASSY (XJE-034W-00) <XJE>						
	IC1	BD8205EFV-M	BIPOLAR IC		1	K3,K2,M1,R1,M2
	IC301	MN2DS0041MD	ANALOG IC		1	K3,K2,M1,R1,M2
	IC381	WZZ-0074-00	PROGRAMMED IC		1	K3,K2,M1,R1,M2
	IC391	M12L1281686TN	DRAM IC		1	K3,K2,M1,R1,M2
	IC921	BD12KA5FP	ANALOG IC		1	K3,K2,M1,R1,M2
	Q12	LTC044EEBFS8	DIGI TRANSISTOR		1	K3,K2,M1,R1,M2
	Q101	2SB1709MG	TRANSISTOR		1	K3,K2,M1,R1,M2
	Q102	2SB1709MG	TRANSISTOR		1	K3,K2,M1,R1,M2
	Q103	LTC014EEBFS8	DIGI TRANSISTOR		1	K3,K2,M1,R1,M2
	Q107	UMX1N	DUAL TRANSISTOR		1	K3,K2,M1,R1,M2
	Q108	SSM6N15AFEM	DUAL FET		1	K3,K2,M1,R1,M2
	Q302	LTC044EEBFS8	DIGI TRANSISTOR		1	K3,K2,M1,R1,M2
	C1	CK73EXR1C226M	C CAPACITOR	22uF 16V M	1	K3,K2,M1,R1,M2
	C4	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K3,K2,M1,R1,M2
	C5	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K3,K2,M1,R1,M2
	C6	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K3,K2,M1,R1,M2
	C7	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K3,K2,M1,R1,M2
	C8	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K3,K2,M1,R1,M2
	C9	CK73HXR1H222K	C CAPACITOR	2200pF 50V K	1	K3,K2,M1,R1,M2
	C10	CK73HXR1H222K	C CAPACITOR	2200pF 50V K	1	K3,K2,M1,R1,M2
	C11	CK73HXR1H222K	C CAPACITOR	2200pF 50V K	1	K3,K2,M1,R1,M2
	C12	CK73HXR1H222K	C CAPACITOR	2200pF 50V K	1	K3,K2,M1,R1,M2
	C14	CC73HCH1H471J	C CAPACITOR	470pF 50V J	1	K3,K2,M1,R1,M2
	C20	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1	K3,K2,M1,R1,M2
	C26	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1	K3,K2,M1,R1,M2
	C27	CC73HCH1H471J	C CAPACITOR	470pF 50V J	1	K3,K2,M1,R1,M2
	C28	CC73HCH1H471J	C CAPACITOR	470pF 50V J	1	K3,K2,M1,R1,M2
	C29	CC73HCH1H471J	C CAPACITOR	470pF 50V J	1	K3,K2,M1,R1,M2
	C30	CC73HCH1H471J	C CAPACITOR	470pF 50V J	1	K3,K2,M1,R1,M2
	C31	CC73HCH1H471J	C CAPACITOR	470pF 50V J	1	K3,K2,M1,R1,M2
	C32	CC73HCH1H471J	C CAPACITOR	470pF 50V J	1	K3,K2,M1,R1,M2
	C33	CC73HCH1H471J	C CAPACITOR	470pF 50V J	1	K3,K2,M1,R1,M2
	C34	CC73HCH1H471J	C CAPACITOR	470pF 50V J	1	K3,K2,M1,R1,M2
	C35	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1	K3,K2,M1,R1,M2
	C36	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1	K3,K2,M1,R1,M2
	C37	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1	K3,K2,M1,R1,M2
	C101	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	K3,K2,M1,R1,M2
	C102	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	1	K3,K2,M1,R1,M2
	C103	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	1	K3,K2,M1,R1,M2
	C105	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C106	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C107	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C108	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C109	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C110	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C111	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	K3,K2,M1,R1,M2
	C112	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K3,K2,M1,R1,M2
	C113	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C121	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C122	CK73HXR1C333K	C CAPACITOR	0.033uF 16V K	1	K3,K2,M1,R1,M2

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX26BT	K3	DDX276BT	K2	DDX419BT	A1	DDX419BT	M1
DDX419BT	R1	DDX419BTM	M2				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C123	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C124	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C133	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C134	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C135	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C136	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C137	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C138	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C151	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C170	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C201	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K3,K2,M1,R1,M2
	C202	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1	K3,K2,M1,R1,M2
	C203	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1	K3,K2,M1,R1,M2
	C204	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	K3,K2,M1,R1,M2
	C210	CK73HXR1H152K	C CAPACITOR	1500pF 50V K	1	K3,K2,M1,R1,M2
	C211	CC73HCH1H151J	C CAPACITOR	150pF 50V J	1	K3,K2,M1,R1,M2
	C241	CK73GBB1H392K	C CAPACITOR	3900pF 50V K	1	K3,K2,M1,R1,M2
	C291	CK73HXR1H332K	C CAPACITOR	3300pF 50V K	1	K3,K2,M1,R1,M2
	C294	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	K3,K2,M1,R1,M2
	C301	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C302	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C303	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C304	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C305	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C306	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C307	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C311	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C314	CC73HCH1H151J	C CAPACITOR	150pF 50V J	1	K3,K2,M1,R1,M2
	C315	CC73HCH1H102J	C CAPACITOR	1000pF 50V J	1	K3,K2,M1,R1,M2
	C316	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	K3,K2,M1,R1,M2
	C317	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	K3,K2,M1,R1,M2
	C318	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C319	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C320	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C322	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C324	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C325	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C326	CK73HXR1E103K	C CAPACITOR	0.01uF 25V K	1	K3,K2,M1,R1,M2
	C327	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C329	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C330	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C331	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C332	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C333	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C351	CC73HCH1H120J	C CAPACITOR	12pF 50V J	1	K3,K2,M1,R1,M2
	C352	CC73HCH1H120J	C CAPACITOR	12pF 50V J	1	K3,K2,M1,R1,M2
	C382	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C391	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	K3,K2,M1,R1,M2
	C392	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C396	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C398	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C511	CC73HCH1H471J	C CAPACITOR	470pF 50V J	1	K3,K2,M1,R1,M2
	C911	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	1	K3,K2,M1,R1,M2
	C912	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3,K2,M1,R1,M2
	C913	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	K3,K2,M1,R1,M2
	C921	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	K3,K2,M1,R1,M2
	C923	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	K3,K2,M1,R1,M2
	R12	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1	K3,K2,M1,R1,M2
	R17	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K3,K2,M1,R1,M2
	R19	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	K3,K2,M1,R1,M2
	R20	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	K3,K2,M1,R1,M2
	R21	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	K3,K2,M1,R1,M2
	R22	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	K3,K2,M1,R1,M2
	R23	RK73HH1J432D	MG RESISTOR	4.3kΩ 1/16W D	1	K3,K2,M1,R1,M2
	R24	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K3,K2,M1,R1,M2
	R26	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K3,K2,M1,R1,M2
	R34	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	1	K3,K2,M1,R1,M2
	R35	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	K3,K2,M1,R1,M2
	R36	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	1	K3,K2,M1,R1,M2
	R101	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	K3,K2,M1,R1,M2
	R102	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K3,K2,M1,R1,M2
	R103	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	K3,K2,M1,R1,M2
	R104	RK73HB1J2R2J	MG RESISTOR	2.2Ω 1/16W J	1	K3,K2,M1,R1,M2
	R106	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K3,K2,M1,R1,M2
	R107	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K3,K2,M1,R1,M2
	R108	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K3,K2,M1,R1,M2
	R111	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	K3,K2,M1,R1,M2
	R112	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K3,K2,M1,R1,M2
	R113	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	K3,K2,M1,R1,M2
	R114	RK73HB1J2R2J	MG RESISTOR	2.2Ω 1/16W J	1	K3,K2,M1,R1,M2
	R115	RZ73Z0AX180J	RESISTOR	18Ω 3/4W J	1	K3,K2,M1,R1,M2
	R116	RK73HB1J242J	MG RESISTOR	2.4kΩ 1/16W J	1	K3,K2,M1,R1,M2
	R117	RK73HB1J432J	MG RESISTOR	4.3kΩ 1/16W J	1	K3,K2,M1,R1,M2
	R122	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K3,K2,M1,R1,M2
	R123	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K3,K2,M1,R1,M2
	R124	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K3,K2,M1,R1,M2
	R138	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K3,K2,M1,R1,M2
	R151	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K3,K2,M1,R1,M2
	R165	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K3,K2,M1,R1,M2
	R170	RK73HH1J332D	MG RESISTOR	3.3kΩ 1/16W D	1	K3,K2,M1,R1,M2

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX26BT	K3	DDX276BT	K2	DDX419BT	A1	DDX419BT	M1
DDX419BT	R1	DDX419BTM	M2				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R171	RK73HH1J162D	MG RESISTOR	1.6kΩ 1/16W D	1	K3,K2,M1,R1,M2
	R182	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K3,K2,M1,R1,M2
	R212	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	K3,K2,M1,R1,M2
	R214	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	K3,K2,M1,R1,M2
	R215	RK73GB2A203J	MG RESISTOR	20kΩ 1/10W J	1	K3,K2,M1,R1,M2
	R216	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	K3,K2,M1,R1,M2
	R217	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	K3,K2,M1,R1,M2
	R218	RK73HB1J752J	MG RESISTOR	7.5kΩ 1/16W J	1	K3,K2,M1,R1,M2
	R219	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1	K3,K2,M1,R1,M2
	R220	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K3,K2,M1,R1,M2
	R221	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1	K3,K2,M1,R1,M2
	R230	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K3,K2,M1,R1,M2
	R241	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	1	K3,K2,M1,R1,M2
	R301	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K3,K2,M1,R1,M2
	R302	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K3,K2,M1,R1,M2
	R303	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K3,K2,M1,R1,M2
	R304	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K3,K2,M1,R1,M2
	R308	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	K3,K2,M1,R1,M2
	R310	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	1	K3,K2,M1,R1,M2
	R311	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K3,K2,M1,R1,M2
	R314	RK73GB2A393J	MG RESISTOR	39kΩ 1/10W J	1	K3,K2,M1,R1,M2
	R315	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	K3,K2,M1,R1,M2
	R319	RK73GH2A243D	MG RESISTOR	24kΩ 1/10W D	1	K3,K2,M1,R1,M2
	R323	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K3,K2,M1,R1,M2
	R327	RK73HB1J270J	MG RESISTOR	27Ω 1/16W J	1	K3,K2,M1,R1,M2
	R351	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	K3,K2,M1,R1,M2
	R352	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K3,K2,M1,R1,M2
	R386	RK73HB1J184J	MG RESISTOR	180kΩ 1/16W J	1	K3,K2,M1,R1,M2
	R702	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K3,K2,M1,R1,M2
	R911	RK73P0CMR18J	MG RESISTOR	0.18Ω 1/2W J	1	K3,K2,M1,R1,M2
	L1	LB73H0CT-002	CHIP FERRITE		1	K3,K2,M1,R1,M2
	L2	LB73H0CT-002	CHIP FERRITE		1	K3,K2,M1,R1,M2
	L3	LB73H0CT-002	CHIP FERRITE		1	K3,K2,M1,R1,M2
	L4	LB73H0CT-002	CHIP FERRITE		1	K3,K2,M1,R1,M2
	L5	LB73H0CT-002	CHIP FERRITE		1	K3,K2,M1,R1,M2
	L6	LB73H0CT-002	CHIP FERRITE		1	K3,K2,M1,R1,M2
	L7	LB73H0CT-002	CHIP FERRITE		1	K3,K2,M1,R1,M2
	CN101	EC720AA-0524A	FFC FPC CONNE		1	K3,K2,M1,R1,M2
	CN201	EA720AM-1206A	W TO B CONNE		1	K3,K2,M1,R1,M2
	CN202	EA720AM-1202A	W TO B CONNE		1	K3,K2,M1,R1,M2
	CN301	EA720AM-1202A	W TO B CONNE		1	K3,K2,M1,R1,M2
	CN401	EC720AA-0535A	FFC FPC CONNE		1	K3,K2,M1,R1,M2
	CN501	EA720AX-1503A	W TO B CONNE	3P	1	K3,K2,M1,R1,M2
	S1	S6J-0002-00	PUSH SWITCH		1	K3,K2,M1,R1,M2
	TH491	TH05-3H103F	N THERMISTOR		1	K3,K2,M1,R1,M2
	X351	NAX1135-001X	CRYSTAL		1	K3,K2,M1,R1,M2
DVD MECHA PWB ASSY (XJE-023J-02) <XJE>						
	IC201	AN41250A	ANALOG IC		1	A1
	IC301	MN2DS0041MD	IC		1	A1
	IC381	WZZ-0073-00	PROGRAMMED IC		1	A1
	IC391	M12L1281686TN	DRAM IC		1	A1
	IC921	BD12KA5FP	ANALOG IC		1	A1
	Q3	UMX1N	DUAL TRANSISTOR		1	A1
	Q4	RT3K11M-X	MOS FET ARRAY		1	A1
	Q5	2SC1623/56/	TRANSISTOR		1	A1
	Q11	2SC1623/56/	TRANSISTOR		1	A1
	Q12	LTC044EEBFS8	DIGI TRANSISTOR		1	A1
	Q101	2SB1709MG	TRANSISTOR		1	A1
	Q102	2SB1709MG	TRANSISTOR		1	A1
	Q103	LSCR523EBFS8	TRANSISTOR		1	A1
	Q302	LTC044EEBFS8	DIGI TRANSISTOR		1	A1
	D6	TAN1102W-22	INFRARED LED		1	A1
	D7	TAN1102W-22	INFRARED LED		1	A1
	C1	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	A1
	C2	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	A1
	C3	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	A1
	C4	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	A1
	C5	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	A1
	C8	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	A1
	C9	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	A1
	C10	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	A1
	C11	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	A1
	C101	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	A1
	C102	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	1	A1
	C103	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	1	A1
	C105	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C106	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C107	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C110	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C111	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	A1
	C112	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	A1
	C113	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C114	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	A1
	C121	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C122	CK73HBB1C333K	C CAPACITOR	0.033uF 16V K	1	A1
	C123	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	A1
	C124	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C131	CK73HBB1H272K	C CAPACITOR	2700pF 50V K	1	A1
	C133	NCJA1AK-684W-A	C CAPACITOR	0.68uF 10V K	1	A1
	C134	NCJA1AK-684W-A	C CAPACITOR	0.68uF 10V K	1	A1
	C135	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX26BT	K3	DDX276BT	K2	DDX419BT	A1	DDX419BT	M1
DDX419BT	R1	DDX419BTM	M2				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C136	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C137	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C138	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C139	CC73HCH1H150J	C CAPACITOR	15pF 50V J	1	A1
	C151	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C170	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C201	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	A1
	C202	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	A1
	C203	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	A1
	C204	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	A1
	C205	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	A1
	C206	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	A1
	C207	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	A1
	C208	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	A1
	C241	CK73HBB1E153K	C CAPACITOR	0.015uF 25V K	1	A1
	C242	CK73HBB1E153K	C CAPACITOR	0.015uF 25V K	1	A1
	C243	CK73HBB1E223K	C CAPACITOR	0.022uF 25V K	1	A1
	C244	CK73HBB1E223K	C CAPACITOR	0.022uF 25V K	1	A1
	C251	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	A1
	C261	CK73HBB1H472K	C CAPACITOR	4700pF 50V K	1	A1
	C291	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	A1
	C301	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C302	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C303	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C304	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C305	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C306	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C307	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C311	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C312	CK73GBB1H222K	C CAPACITOR	2200pF 50V K	1	A1
	C313	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	A1
	C314	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	A1
	C315	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	A1
	C316	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	A1
	C317	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	A1
	C318	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C319	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C320	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C322	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C324	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C325	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C326	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	A1
	C327	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C329	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C330	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C331	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C332	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C333	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C340	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1	A1
	C341	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1	A1
	C351	CC73HCH1H120J	C CAPACITOR	12pF 50V J	1	A1
	C352	CC73HCH1H120J	C CAPACITOR	12pF 50V J	1	A1
	C382	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C391	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	A1
	C392	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C396	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C398	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A1
	C911	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	A1
	C913	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	A1
	C921	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	A1
	C923	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	A1
	R11	RK73GB2A112J	MG RESISTOR	1.1kΩ 1/10W J	1	A1
	R12	RK73HB1J184J	MG RESISTOR	180kΩ 1/16W J	1	A1
	R13	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	A1
	R15	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1	A1
	R17	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	A1
	R21	RK73GB2A112J	MG RESISTOR	1.1kΩ 1/10W J	1	A1
	R22	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	A1
	R23	RK73HH1J432D	MG RESISTOR	4.3kΩ 1/16W D	1	A1
	R24	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	A1
	R26	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	A1
	R27	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	A1
	R28	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	A1
	R29	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	A1
	R101	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	A1
	R102	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	A1
	R103	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	A1
	R104	RK73HB1J2R2J	MG RESISTOR	2.2Ω 1/16W J	1	A1
	R111	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	A1
	R112	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	A1
	R113	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	A1
	R114	RK73HB1J2R2J	MG RESISTOR	2.2Ω 1/16W J	1	A1
	R115	RZ73Z0AX180J	RESISTOR	18Ω 3/4W J	1	A1
	R116	RK73HB1J242J	MG RESISTOR	2.4kΩ 1/16W J	1	A1
	R117	RK73HB1J432J	MG RESISTOR	4.3kΩ 1/16W J	1	A1
	R121	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	A1
	R122	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	A1
	R123	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	A1
	R124	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	A1
	R125	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	A1
	R131	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	1	A1
	R132	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	1	A1

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX26BT	K3	DDX276BT	K2	DDX419BT	A1	DDX419BT	M1
DDX419BT	R1	DDX419BTM	M2				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R139	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	A1
	R151	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	A1
	R165	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	A1
	R170	RK73HH1J332D	MG RESISTOR	3.3kΩ 1/16W D	1	A1
	R171	RK73HH1J162D	MG RESISTOR	1.6kΩ 1/16W D	1	A1
	R182	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A1
	R201	RK73POCMR22J	MG RESISTOR	0.22Ω 1/2W J	1	A1
	R202	RK73EB2E301J	MG RESISTOR	300Ω 1/4W J	1	A1
	R204	RK73GB2A271J	MG RESISTOR	270Ω 1/10W J	1	A1
	R212	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	A1
	R213	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A1
	R231	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	A1
	R232	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	A1
	R233	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	A1
	R241	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	A1
	R242	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	A1
	R243	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	A1
	R244	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	A1
	R251	RK73GH2A333D	MG RESISTOR	33kΩ 1/10W D	1	A1
	R252	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1	A1
	R261	RK73GH2A822D	MG RESISTOR	8.2Ω 1/10W D	1	A1
	R262	RK73GB2A242J	MG RESISTOR	2.4kΩ 1/10W J	1	A1
	R271	RK73HB1J163J	MG RESISTOR	16kΩ 1/16W J	1	A1
	R272	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A1
	R301	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	A1
	R302	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	A1
	R303	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	A1
	R304	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	A1
	R308	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	A1
	R309	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	A1
	R310	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	1	A1
	R311	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	A1
	R314	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	A1
	R315	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	A1
	R316	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A1
	R319	RK73GH2A243D	MG RESISTOR	24kΩ 1/10W D	1	A1
	R323	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	A1
	R327	RK73HB1J270J	MG RESISTOR	27Ω 1/16W J	1	A1
	R328	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	A1
	R329	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	A1
	R351	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	A1
	R352	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	A1
	R365	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	A1
	R376	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1	A1
	R386	RK73HB1J184J	MG RESISTOR	180kΩ 1/16W J	1	A1
	R400	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	A1
	R702	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	A1
	R911	RK73POCMR18J	MG RESISTOR	0.18Ω 1/2W J	1	A1
	L2	LB73H0CT-002	CHIP FERRITE		1	A1
	CN1	EA720AX-1503A	W TO B CONNE	3P	1	A1
	CN2	EC720AA-0535A	FFC FPC CONNE		1	A1
	CN101	EC720AA-0526A	FFC/FPC CONNE		1	A1
	CN201	EC720AA-0518A	FFC FPC CONNE		1	A1
	PH1	PS1192HB-22-X	OPT TRANSMITTER		1	A1
	PH2	PS1192HB-22-X	OPT TRANSMITTER		1	A1
	S1	NSW0351-001X	LEVER SWITCH		1	A1
	TH491	TH05-3H103F	N THERMISTOR		1	A1
	X351	NAX1135-001X	CRYSTAL		1	A1