


2.3 EXTERIOR(1)(AVX-MG2227ZF,AVX-MG2327ZF)

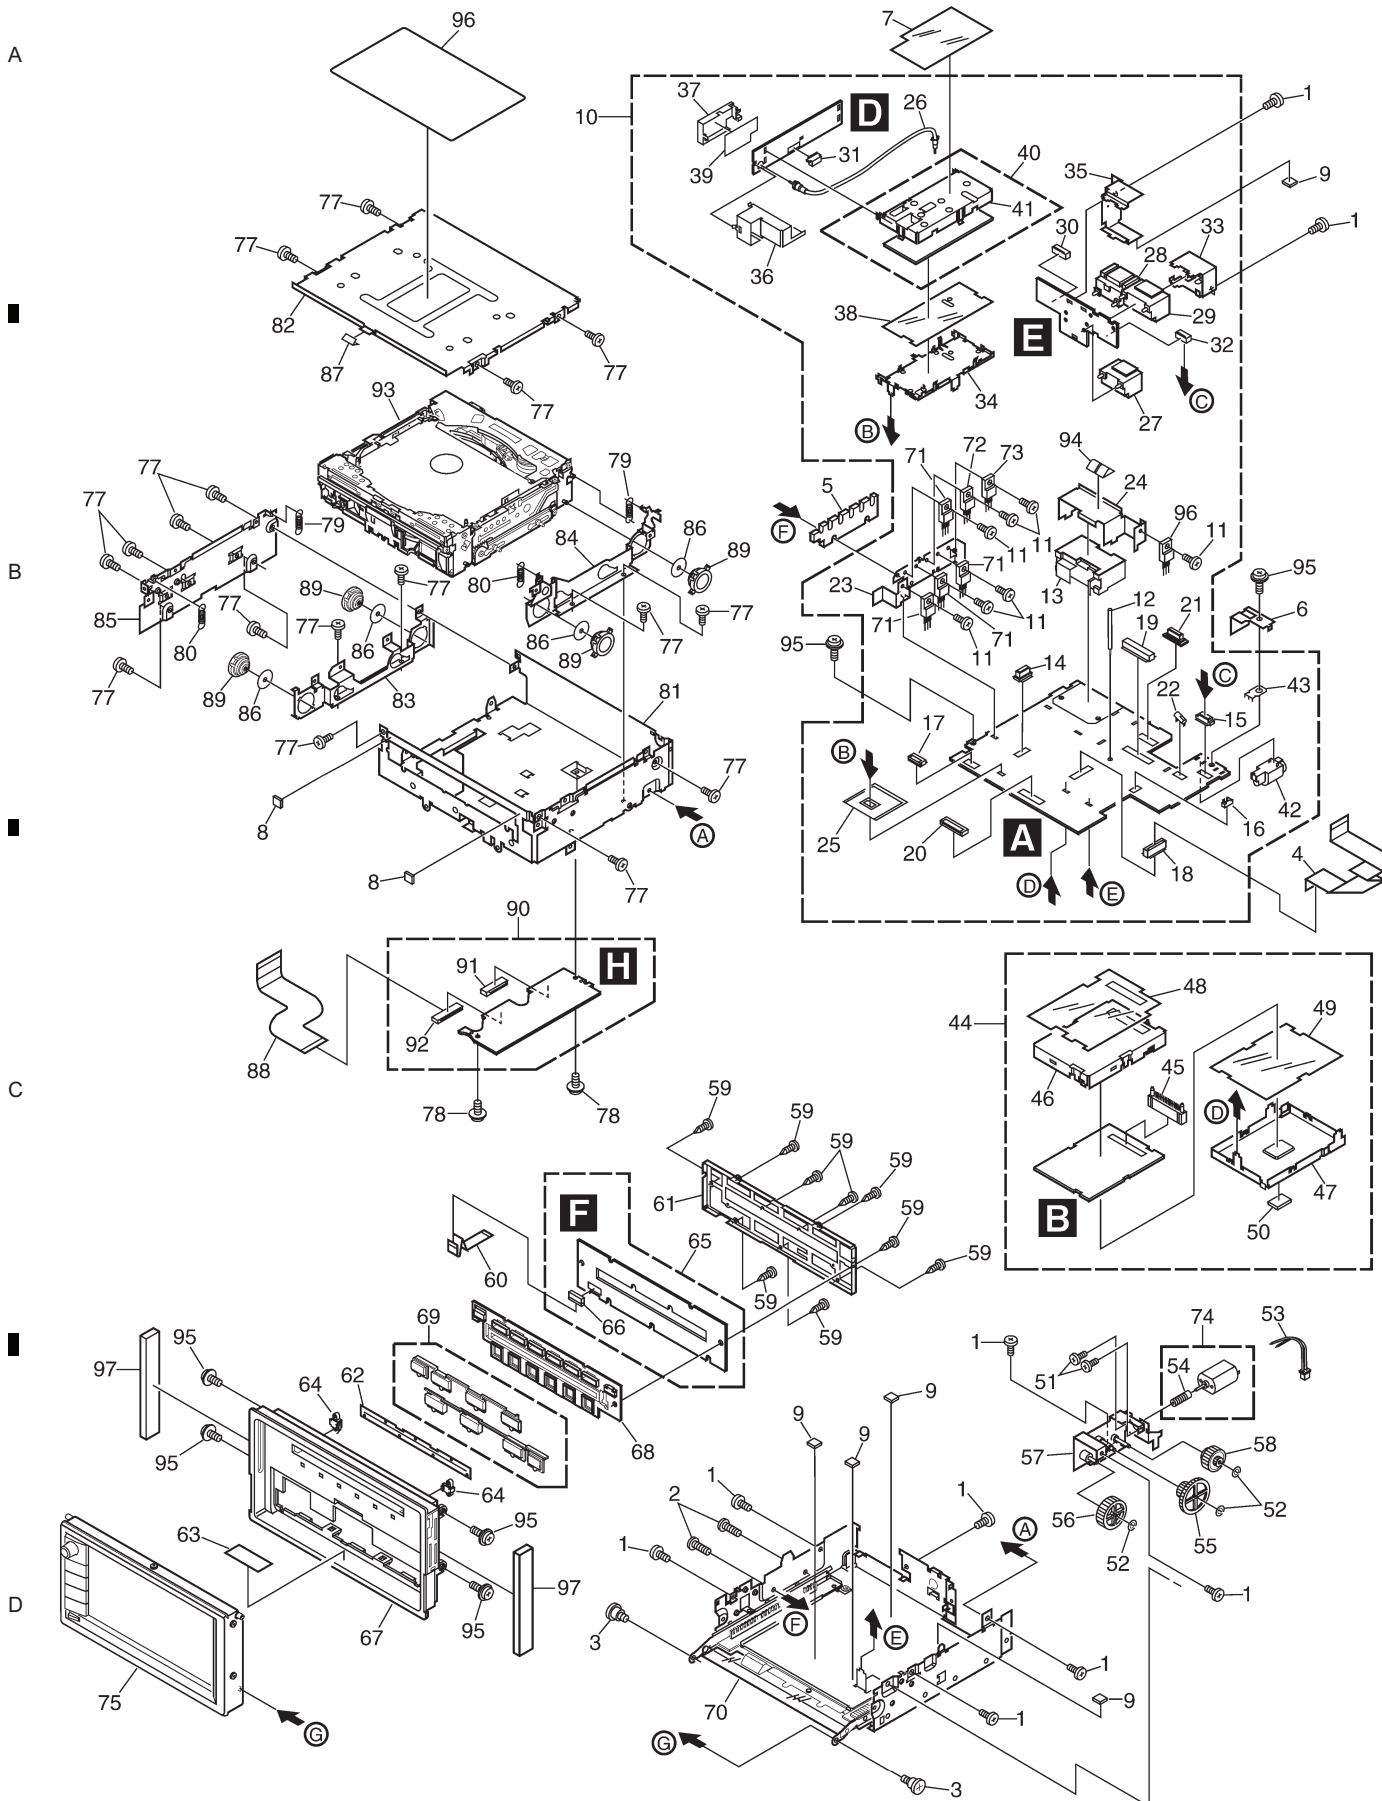

(1)EXTERIOR(1)(AVX-MG2227ZFAVX-MG2327ZF) SECTION PARTS LIST

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
	1	Screw	BMZ26P040FMC	50	Conductor	CNM7728	
	2	Screw	BMZ26P080FMC				
	3	Screw(M2x2)	CBA1437	51	Screw	BMZ20P025FMC	
	4	Connector	CDE6618	52	Washer	CBF1039	
	5	Heat Sink	CNC9449	53	Connector	CDE6704	
	6	Shield	CNC9995	54	Gear	CNV5296	
	7	Insulator	CNM7884	55	Gear	CNV5297	
	8	Spacer	CNM7885	56	Gear	CNV5298	
	9	Cushion	CNM7904	57	Holder Unit	CXB7342	
	10	Tuner Audio Unit	See Contrast table(2)	58	Torque Limiter Unit	CXB8742	
	11	Screw(M2.6x6)	CBA1014	59	Screw	BPZ20P060FMC	
	12	Clamper	CEF1007	60	Connector	CDE6619	
	13	Connector(CN901)	CKM1349	61	Holder	CNC9435	
	14	Connector(CN404)	CKS2811	62	Cover	CNM7367	
	15	Connector(CN904)	CKS2811	63	Cushion	CNM7905	
	16	Connector(CN905)	CKS3124	64	Lighting Conductor	CNV6802	
	17	Connector(CN751)	CKS3810	65	Panel PCB Unit	CWM7806	
	18	Connector(CN907)	CKS3859	66	Connector(CN1801)	CKS3965	
	19	Connector(CN551)	CKS3982	67	Panel Unit	CXB7758	
	20	Connector(CN771)	CKS4052	68	Housing Unit	CXB9194	
	21	Connector(CN906)	CKS4065	69	Button Unit	CXB9767	
	22	Connector(CN403)	CKX1044	70	Chassis Frame Assy	CXB7762	
	23	Holder	CNC9439	71	Transistor(Q351,751,905,909,913)	2SB1185	
	24	Holder	CNC9440	72	Transistor(Q902)	2SD2353	
	25	Shield	CNM7725	73	Transistor(Q912)	2SB1299	
	26	Connector	CDH1311	74	Motor Unit(M901)	CXC1191	
	27	Connector(CN2802)	CKM1346	* 75	Grille Assy	CXB7383	
	28	Connector(CN2803)	CKM1347	76			
	29	Connector(CN2804)	CKM1348	77	Screw	BMZ26P040FMC	
	30	Connector(CN2801)	CKS4066	78	Screw(M2x2.5)	CBA1076	
	31	Connector(CN1402)	CKS4515	79	Spring(Black)	CBH2482	
	32	Connector(CN2805)	CKS4515	80	Spring(Silver)	CBH2481	
	33	Holder	CNC9441	81	Chassis	CNA2414	
	34	Holder	CNC9442	82	Case	CNB2758	
	35	Holder	CNC9599	83	Bracket	CNC9443	
	36	Shield	CND1151	84	Bracket	See Contrast table(2)	
	37	Shield	CND1152	85	Holder	See Contrast table(2)	
	38	Insulator	CNM7291	86	Sheet	CNM5981	
	39	Insulator	CNM7860	87	Sheet	CNM7731	
	40	FM/AM Tuner Unit	CWE1561	88	Flexible PCB	CNP6438	
	41	Holder	CNC8855	89	Damper	CNV6608	
	42	Antenna Jack(CN401)	HKX1054	90	Control Unit(G2F)	CWX2589	
	43	Terminal(CN402)	VNF1084	91	Connector(CN601)	CKS1956	
	44	DSP Unit	CWM7805	92	Connector(CN101)	CKS4512	
	45	Connector(CN1001)	CKS3981	93	Service Mechanism Unit(G2AVX)	CXX1657	
	46	Shield	CNC9444	94	Stick Finger	DNB1092	
	47	Shield	CNC9445	95	Screw	IMS26P050FMC	
	48	Insulator	CNM7289	96	Label	CRW1462	
	49	Insulator	CNM7290	97	Insulator	See Contrast table(2)	

(2) CONTRAST TABLE

AVX-MG2227ZF and AVX-MG2327ZF are constructed the same except for the following:

Mark	NO	Symbol and Description	AVX-MG2227ZF	AVX-MG2327ZF
	10	Tuner Audio Unit	CWM8036	CWM8037
	84	Bracket	CNC9453	CNC9601
	85	Holder	CNC9438	CNC9612
	97	Insulator	CNM8126	Not used


2.5 EXTERIOR(2)(AVX-MG2227ZF,AVX-MG2327ZF)

A

B

C


D

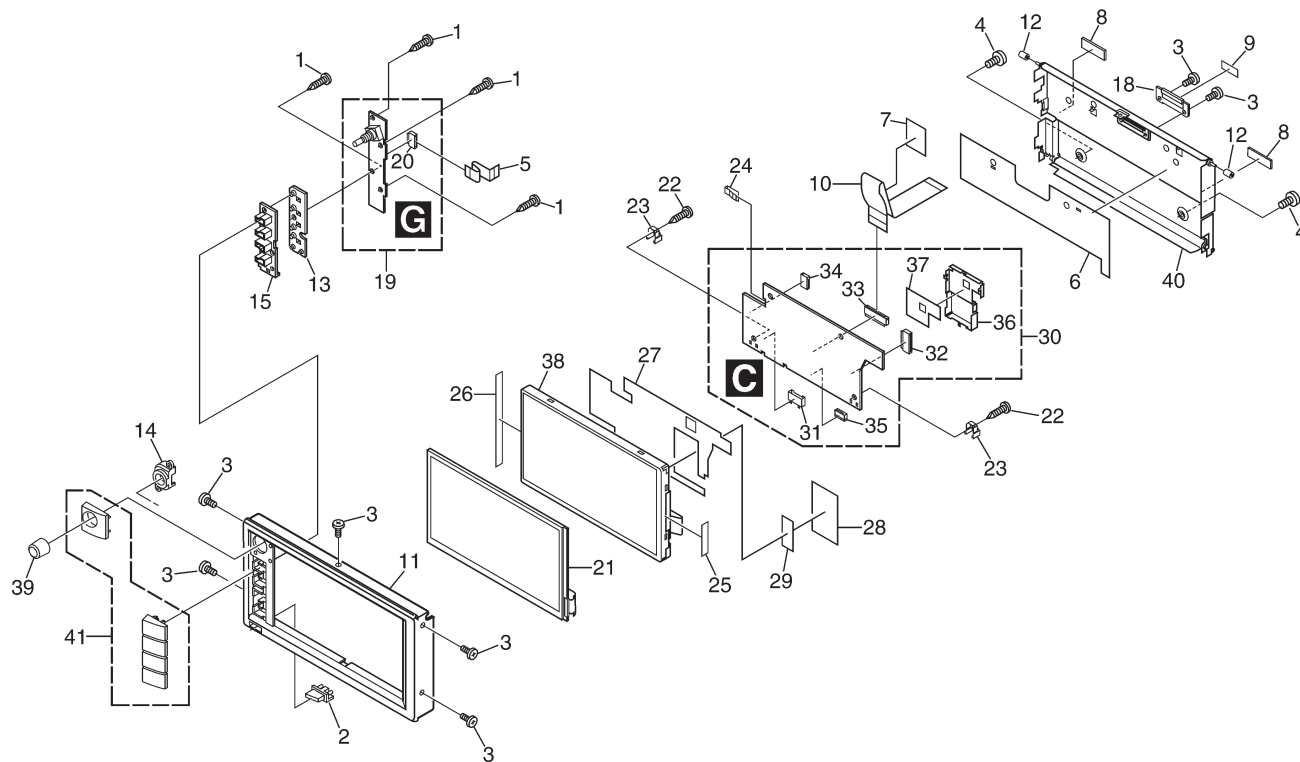

(1)EXTERIOR(2)(AVX-MG2227ZF,AVX-MG2327ZF) SECTION PARTS LIST


Mark No.	Description	Part No.
1	Screw	BPZ20P080FMC
2	Button(OPEN/CLOSE)	CAC7817
3	Screw(M2x1.925)	CBA1453
4	Screw	CBA1482
5	Connector	CDE6620
6	Insulator	CNM7302
7	Cover	CNM7720
8	Cushion	CNM7727
9	Sheet	CNM7886
10	Flexible PCB	CNP6330
11	Grille	CNS6613
12	Roller	CNV6198
13	Rubber	CNV6749
14	Lighting Conductor	CNV7596
15	Housing	CNV7287
16		
17		
18	Guide	CNV7234
19	Keyboard Unit	CWM7807
20	Connector(CN1851)	CKS4212
21	Touch Panel	CWX2710
22	Screw	BPZ20P050FMC
23	Holder	CNC9456
24	Earth	CND1003
25	Sheet	CNM7473
26	Sheet	CNM7648
27	Insulator	CNM7862
28	Insulator	CNM7863
* 29	Double Faced Tape	CNM7991
30	Module Unit	CWM7803
31	Connector(CN4161)	CKS3192
32	Connector(CN4301)	CKS3991
33	Connector(CN4001)	CKS4132
34	Connector(CN4201)	CKS4212
35	Connector(CN4202)	CKS4510
36	Shield	CNC9457
37	Insulator	CNM7303
38	LCD Module	CWX2448
39	Knob Unit	CXB7411
40	Case Unit	CXB8765
41	Button Unit	CXB9767

2.6 CD MECHANISM UNIT(G2)(1)

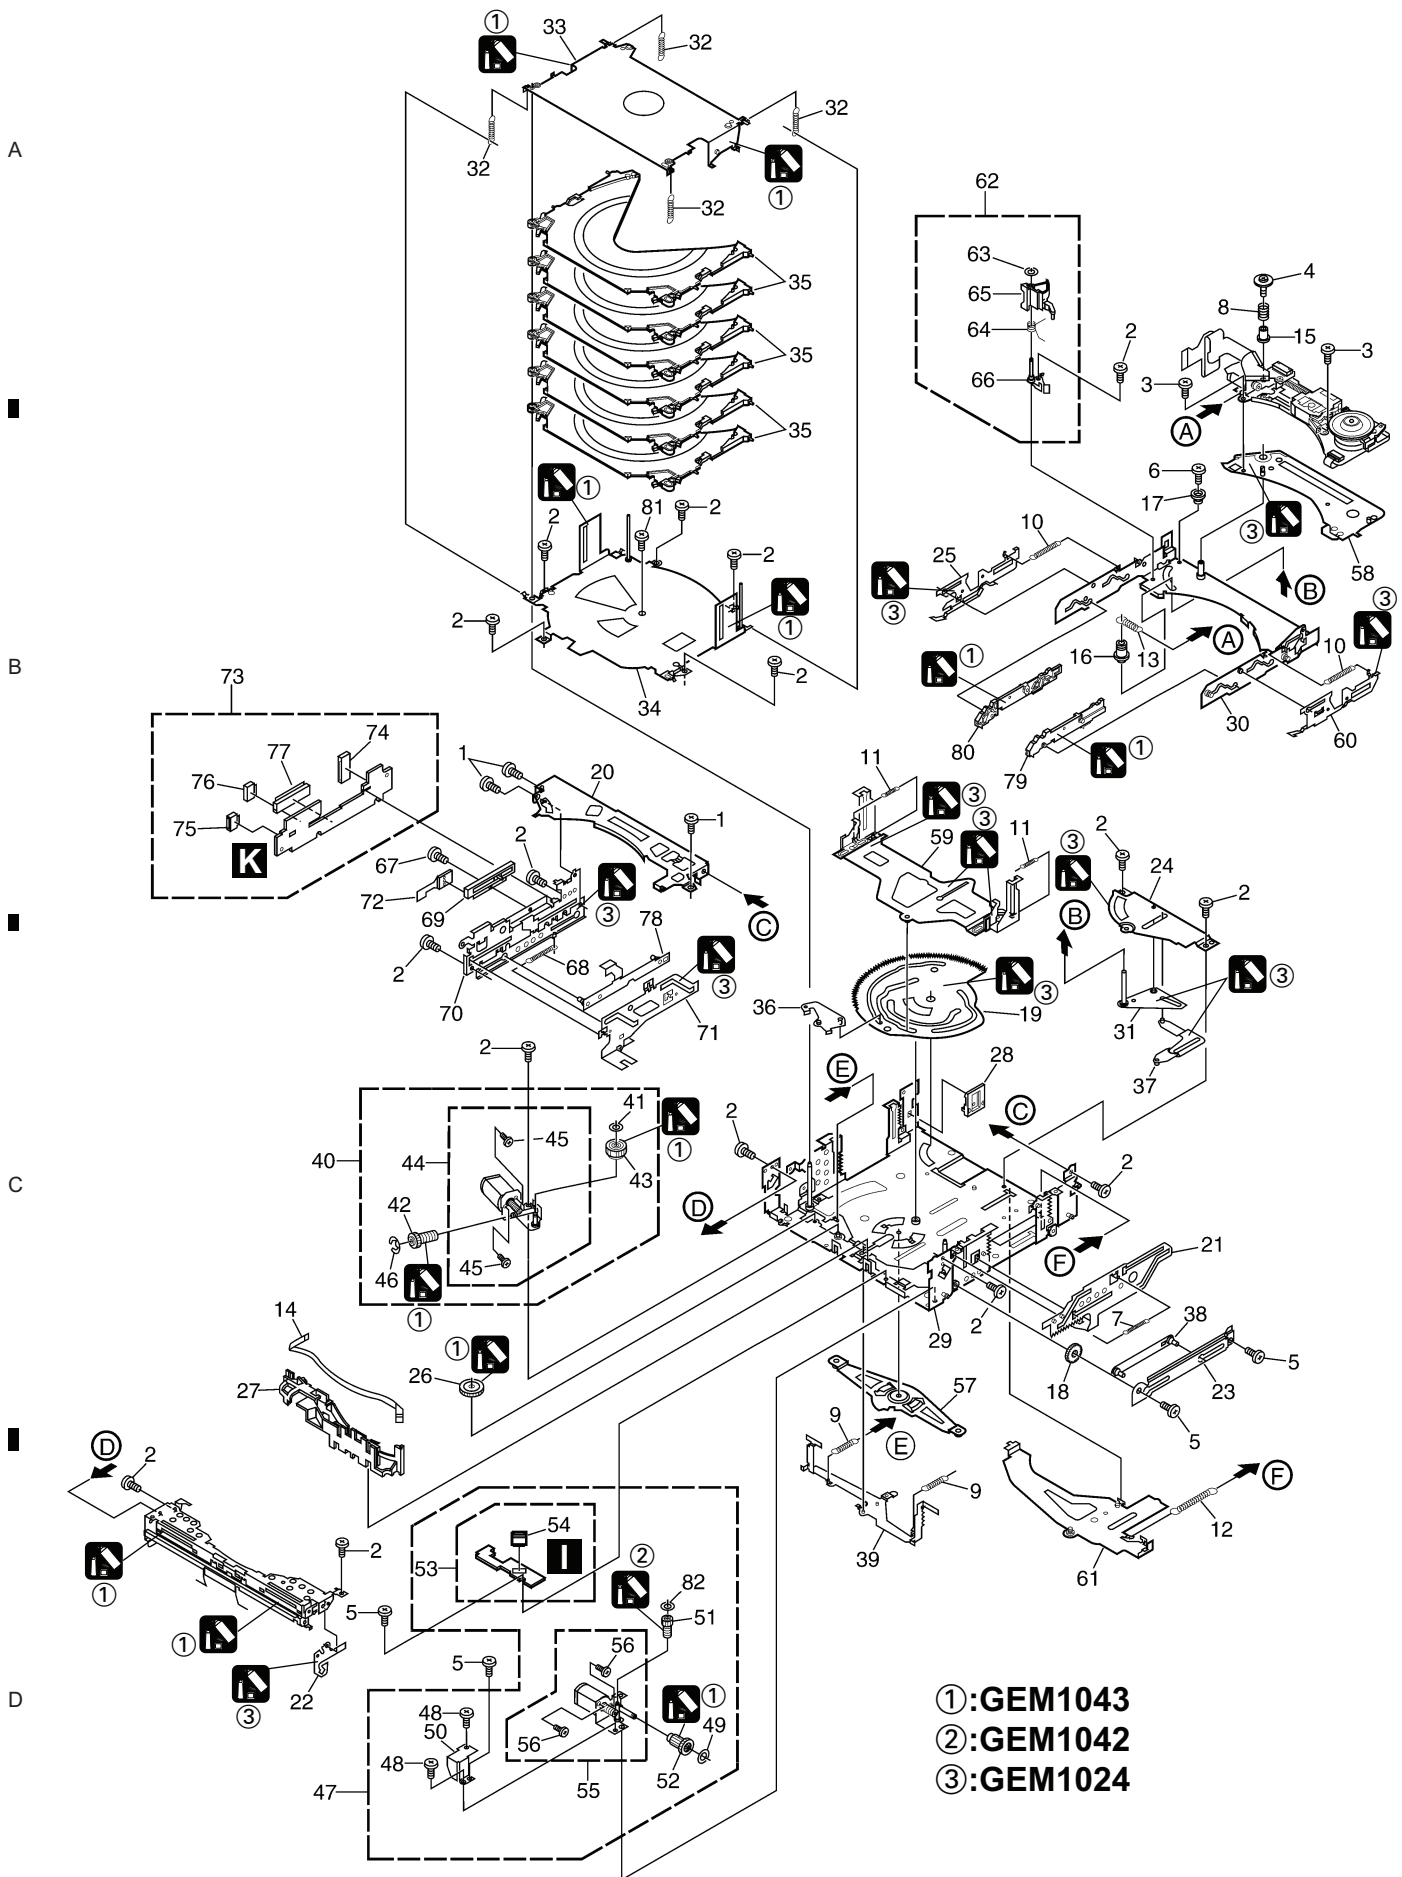

CD MECHANISM UNIT(G2)(1) SECTION PARTS LIST

Mark No.	Description	Part No.	Mark No.	Description	Part No.	
1	Screw	BMZ20P020FZB				
2	Screw	BMZ20P025FMC				
3	Screw(M2x2)	CBA1556				
4	Screw(M2x2.5)	CBA1557				
5	Screw(M2x2.5)	CBA1577	*	54	Connector(CN31)	CKS4523
				55	Motor Unit(-B)(M2)	CXB7526
6	Screw(M2x4.5)	CBA1607				
7	Spring	CBH2460		56	Screw	JFZ20P020FMC
8	Spring	CBH2461	*	57	Arm Unit	CXB7747
9	Spring	CBH2484		58	Bracket Unit	CXB7811
10	Spring	CBH2485	*	59	Lever Unit	CXB8653
			*	60	Lever Unit	CXB8724
11	Spring	CBH2486				
12	Spring	CBH2668	*	61	Lever Unit	CXB8821
13	Spring	CBH2500		62	Arm Assy	CXB8822
14	Connector	CDE6698		63	Washer	CBF1038
15	Collar	CLA3994		64	Spring	CBH2489
				65	Arm	CNV6735
16	Collar	CLA4039				
17	Collar	CLA4248		66	Bracket Unit	CXB7519
18	Gear	CNC9222		67	Screw	BMZ20P025FMC
*	19	Cam Gear		68	Spring	CBH2667
	20	Frame		69	Volume(VR1)	CCW1023
				70	Bracket	CNC9226
21	Steer	CNC9233				
22	Arm	CNC9242		71	Steer	CNC9235
23	Bracket	CNC9403		72	Flexible PCB	CNP6368
*	24	Bracket		73	PCB Unit(SIDE)	CWX2613
*	25	Lever		74	Connector(CN12)	CKS3991
			*	75	Connector(CN14)	CKS4404
26	Gear	CNV6612				
27	Holder	CNV6648		76	Connector(CN13)	CKS4525
28	Holder	CNV6738		77	Connector(CN11)	CKS4572
*	29	Chassis Unit		78	Lever Unit	CXB6883
*	30	Frame Unit		* 79	Lever Unit	CXB9121
			*	80	Lever Unit	CXB9122
*	31	Arm Unit				
	32	Spring		81	Screw	JFZ20P020FMC
	33	Holder Unit		82	Washer	CBF1037
	34	Holder Unit				
	35	Tray Unit				
36	Lever Unit	CXB6934				
*	37	Lever Unit				
	38	Lever Unit				
*	39	Lever Unit				
	40	Cam Motor Assy				
41	Washer	CBF1064				
42	Gear	CNV6610				
43	Gear	CNV6611				
44	Motor Unit(-A)(M1)	CXB9726				
45	Screw	JFZ20P020FMC				
46	Washer	YE20FUC				
47	ELV Motor Assy	CXB7523				
48	Screw	BMZ20P025FMC				
49	Washer	CBF1064				
50	Holder	CNC9799				

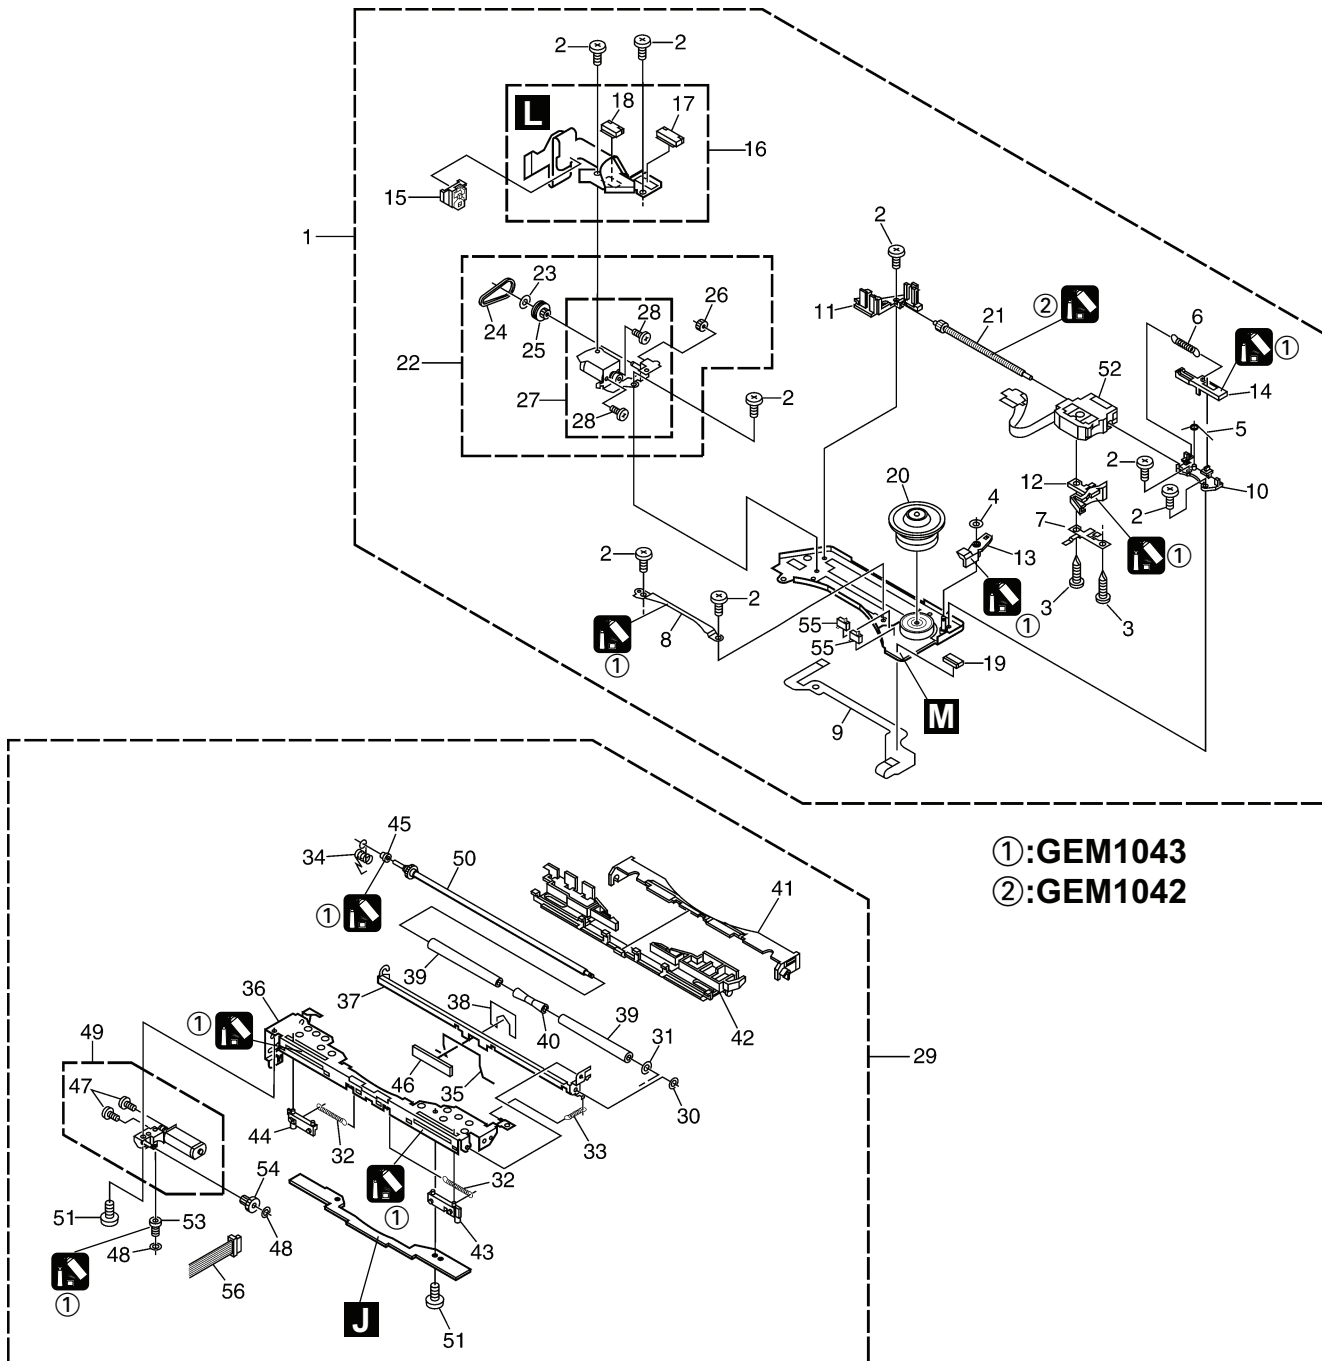

CD MECHANISM UNIT(G2)(2) SECTION PARTS LIST

Mark No.	Description	Part No.	Mark No.	Description	Part No.	
1	Carriage Mech. Assy(G2)	CXB7520				
2	Screw(M2x2)	CBA1556	51	Screw	JFZ20P020FMC	
3	Screw(M2x6)	CBA1582	52	PU Unit(PX1)(Service)	CXX1568	
4	Washer	CBF1038	* 53	Gear	CNV6620	
5	Spring	CBH2453	* 54	Gear	CNV6621	A
			55	Switch(S1,2)	CSN1057	
6	Spring	CBH2480				
7	Spring	CBL1521	* 56	Connector	CDE6674	
* 8	Guide	CNC9402				
9	Flexible PCB	CNP6217				
10	Holder	CNV6624				
11	Holder	CNV6625				
12	Rack	CNV6642				
13	Arm	CNV6731				
14	Lever	CNV6736				
15	Holder	CNV6737				
16	PCB Unit	CWX2611				
17	Connector(CN41)	CKS3785				
18	Connector(CN42)	CKS4508				B
19	Connector(CN1)	CKS4508				
20	Support Wheel Unit	CXB8486				
21	Screw Unit(-A)	CXB7518				
22	Carriage Motor Assy	CXB7521				
23	Washer	CBF1038				
24	Belt	CNT1088				
25	Pulley	CNV6627				
26	Gear	CNV6629				
27	Motor Unit(-A)(M3)	CXB7517				
28	Screw	JFZ14P020FMC				
29	Loading Mech. Assy	CXB7525				
30	Washer	CBF1037				
* 31	Washer	CBF1075				C
* 32	Spring	CBH2450				
33	Spring	CBH2672				
* 34	Spring	CBH2457				
* 35	Spring	CBH2580				
* 36	Frame	CNC9228				
* 37	Arm	CNC9229				
* 38	Sheet	CNM7295				
39	Roller	CNV6616				
40	Collar	CNV6617				
* 41	Guide	CNV6622				
* 42	Holder	CNV6636				
* 43	Lever	CNV6732				
* 44	Lever	CNV6733				
45	Collar	CNV6734				D
* 46	Holder	CNV7144				
47	Screw	JFZ12P018FMC				
48	Washer	CBF1037				
* 49	Motor Unit(-C)	CXB7529				
50	Shaft Unit(-B)	CXB7528				

5. ELECTRICAL PARTS LIST

NOTE:

- Parts whose parts numbers are omitted are subject to being not supplied.
- The part numbers shown below indicate chip components.

A

Chip Resistor

RS1/○S○○○○J,RS1/○○S○○○○J

Chip Capacitor (except for CQS.....)

CKS....., CCS....., CSZS.....

A

Unit Number:CWM7798(AVX-MG2027ZF)

Unit Name:Tuner Audio Unit

MISCELLANEOUS

B

IC 101	IC	PML011A
IC 151	IC	TC7S66F
IC 201	IC	BA4558F-P
IC 202	IC	BA4558F-P
IC 203	IC	BA4558F-P
IC 204	IC	BA4558F-P
IC 206	IC	BA4558F-P
IC 251	IC	NJM4558V
IC 252	IC	NJM4558V
IC 301	IC	DS36277
IC 302	IC	PCA82C250T
IC 303	IC	BA05SFP
IC 501	IC	PM4006B
IC 601	IC	S-29220A
IC 602	IC	PD5665A
IC 603	IC	BU2099FV
IC 604	IC	S-80942ANMP-DD6
IC 771	IC	TC7S86FU
IC 772	Photo-interrupter	GP1S94
IC 773	IC	TC7S14FU
IC 901	IC	TK11835M
IC 902	IC	BA6288FS
IC 903	IC	TK11818M
IC 904	IC	S-81250SGQD
IC 905	IC	PAJ002A

C

Q 151	Transistor	DTA114EK
Q 201	Transistor	2SC2712
Q 351	Transistor	2SB1185
Q 352	Transistor	IMX1
Q 401	Transistor	2SC2412K

D

Q 501	Transistor	DTA124EK
Q 602	Transistor	DTC124EU
Q 603	Transistor	DTA124EK
Q 604	Transistor	DTA124EK
Q 701	Transistor	2SC2412K
Q 702	Transistor	2SC2412K
Q 703	Transistor	2SC2412K
Q 704	Transistor	2SC2412K
Q 751	Transistor	IMX1
Q 752	Transistor	2SB1185
Q 753	Transistor	2SB1132

Circuit Symbol and No. Part Name Part No.

Q 754	Transistor	DTA114EK
Q 771	Transistor	2SB1238
Q 772	Transistor	DTC114EK
Q 801	Transistor	2SA1576
Q 802	Transistor	DTC124EK
Q 803	Transistor	2SA1674
Q 810	Transistor	2SA1576
Q 811	Transistor	DTC124EK
Q 812	Transistor	2SA1674
Q 821	Transistor	2SC2412K
Q 822	Transistor	2SA1162
Q 823	Transistor	2SC2412K
Q 841	Transistor	2SC2412K
Q 851	Transistor	DTA114EK
Q 852	Transistor	2SC2412K
Q 853	Transistor	DTC114TK
Q 901	Transistor	2SB1238
Q 902	Transistor	2SD2353
Q 903	Transistor	DTA143EK
Q 904	Transistor	IMX1
Q 905	Transistor	2SB1185
Q 906	Transistor	DTC114EK
Q 907	Transistor	IMX1
Q 908	Transistor	DTA124EK
Q 909	Transistor	2SB1185
Q 910	Transistor	IMX1
Q 911	Transistor	2SB1238
Q 912	Transistor	2SB1299
Q 913	Transistor	2SB1185
Q 914	Transistor	IMX1
Q 916	Transistor	DTA124EK
D 213	Diode	HZS5LL(B)
D 301	Diode	HZS20L(2)
D 302	Diode	HZS20L(2)
D 303	Diode	HZS20L(2)
D 304	Diode	HZS20L(2)
D 351	Diode	HZS9L(A1)
D 352	Diode	MA111
D 701	Diode	UDZ18(B)
D 702	Diode	UDZ18(B)
D 703	Diode	UDZ18(B)
D 704	Diode	UDZ18(B)
D 705	Diode	UDZ18(B)
D 706	Diode	UDZ18(B)
D 707	Diode	UDZ18(B)
D 708	Diode	UDZ18(B)
D 751	Diode	HZS6L(B2)
D 752	Diode	MA153
D 753	Diode	MA153
D 754	Diode	MA153
D 755	Diode	MA153

Circuit Symbol and No. Part Name Part No.		
D 756	Diode	MA153
D 757	Diode	MA153
D 758	Diode	MA153
D 759	Diode	UDZ10(B)
D 760	Diode	MA153
D 761	Diode	MA153
D 762	Diode	MA153
D 763	Diode	MA153
D 801	Diode	1SS133
D 802	Diode	1SS133
D 810	Diode	1SS133
D 811	Diode	1SS133
D 821	Diode	HZS5LL(C)
D 822	Diode	1SS133
D 823	Diode	HZS7L(B2)
D 841	Diode	HZS6L(B2)
D 842	Chip Diode	MA151WK
D 843	Diode	MA111
D 851	Diode	HZS12L(C1)
D 861	Diode	1SS133
D 862	Diode	1SS133
D 863	Diode	1SS133
D 864	Diode	1SS133
D 871	Diode	1SS133
D 872	Diode	1SS133
D 901	Diode	HZU7R5(B3)
D 902	Diode	RB500V-40
D 903	Diode	HZS5LL(B)
D 904	Diode	HZS18L(3)
D 905	Chip Diode	MA151WK
D 906	Diode	HZU8R2(B1)
D 908	Diode	UDZ8R2(B)
D 909	Diode	RM4Z-LFJ1
D 921	Diode	ERA15-02VH
D 922	Diode	1SS133
D 923	Diode	1SS133
D 924	Diode	MA111
L 351	Inductor	LCTA2R2J2520
L 403	Inductor	LAU1R0K
L 404	Inductor	LAU1R0K
L 501	Ferri-Inductor	LAU2R2K
L 502	Ferri-Inductor	LAU2R2K
L 551	Inductor	LAU1R0K
L 552	Inductor	LAU1R0K
L 601	Chip-Inductor	LCTA2R2J3225
L 602	Inductor	LCTA2R2J2520
L 603	Inductor	CTF1379
L 604	Inductor	CTF1379
L 605	Inductor	CTF1306
L 606	Inductor	CTF1306
L 701	Inductor	LCTB150K2125
L 751	Ferri-Inductor	LAU2R2K
L 901	Inductor	CTF1499
L 902	Choke Coil 100μH	CTH1196
L 903	Transformer	CTX1088
L 905	Choke Coil 1.4mH	CTH1129
TH901	Thermistor	CCX1051
X 501	Crystal Resonator 4.332MHz	CSS1056
X 601	Radiator 16MHz	CSS1571
X 602	Radiator 32.768kHz	CSS1319
S 751	Spring Switch(OPEN)	CSN1046
S 752	Spring Switch(CLOSE)	CSN1046
FU901	Fuse 2A	CEK1176

Circuit Symbol and No. Part Name Part No.		
FU902	Fuse 1.75A	CEK1177
FB901	Inductor	CTF1449
FB902	Inductor	CTF1449
RESISTORS		
R 101		RS1/16S103J
R 102		RS1/16S153J
R 103		RS1/16S103J
R 104		RS1/16S682J
R 105		RS1/16S0R0J
R 151		RS1/16S104J
R 152		RS1/16S473J
R 153		RS1/16S473J
R 154		RS1/16S473J
R 155		RS1/16S473J
R 156		RS1/16S104J
R 157		RS1/16S104J
R 158		RS1/16S472J
R 159		RS1/16S472J
R 160		RS1/16S104J
R 161		RS1/16S104J
R 162		RS1/16S472J
R 163		RS1/16S472J
R 164		RS1/16S391J
R 165		RS1/16S912J
R 201		RS1/16S822J
R 202		RS1/16S822J
R 203		RS1/16S472J
R 204		RS1/16S472J
R 205		RS1/16S470J
R 206		RS1/16S470J
R 207		RS1/16S472J
R 208		RS1/16S472J
R 209		RS1/16S470J
R 210		RS1/16S470J
R 211		RS1/16S822J
R 212		RS1/16S822J
R 213		RS1/16S470J
R 214		RS1/16S470J
R 215		RS1/16S472J
R 216		RS1/16S472J
R 217		RS1/16S472J
R 218		RS1/16S472J
R 219		RS1/16S470J
R 220		RS1/16S470J
R 226		RS1/16S822J
R 227		RS1/16S470J
R 228		RS1/16S472J
R 229		RS1/16S472J
R 230		RS1/16S470J
R 231		RS1/16S102J
R 232		RS1/16S272J
R 233		RS1/16S473J
R 234		RS1/16S473J
R 236		RS1/16S473J
R 237		RS1/16S472J
R 238		RS1/16S472J
R 240		RS1/16S472J
R 251		RS1/16S333J
R 252		RS1/16S333J
R 253		RS1/16S333J
R 254		RS1/16S333J
R 255		RS1/16S333J
R 256		RS1/16S333J

Circuit Symbol and No. Part Name Part No.

R 257	RS1/16S333J
R 258	RS1/16S333J
R 259	RS1/16S753J
R 260	RS1/16S753J
R 261	RS1/16S753J
R 262	RS1/16S753J
R 263	RS1/16S753J
R 264	RS1/16S753J
R 265	RS1/16S753J
R 266	RS1/16S753J
R 301	RS1/16S223J
R 302	RS1/16S472J
R 303	RS1/16S472J
R 304	RS1/16S273J
R 305	RS1/16S472J
R 306	RD1/4PU470J
R 307	RD1/4PU470J
R 308	RS1/16S102J
R 351	RS1/16S223J
R 352	RS1/16S223J
R 353	RS1/16S223J
R 354	RS1/16S332J
R 355	RS1/16S121J
R 356	RS1/16S121J
R 357	RS1/16S221J
R 358	RS1/16S221J
R 359	RS1/16S222J
R 404	RS1/16S473J
R 405	RS1/16S681J
R 406	RS1/16S103J
R 407	RS1/16S681J
R 408	RS1/16S681J
R 409	RS1/16S681J
R 410	RS1/16S473J
R 411	RS1/16S681J
R 412	RS1/16S681J
R 413	RS1/16S272J
R 414	RS1/16S272J
R 415	RS1/16S393J
R 416	RS1/16S162J
R 417	RS1/16S162J
R 418	RS1/16S472J
R 419	RS1/16S473J
R 420	RS1/16S473J
R 424	RS1/16S222J
R 425	RS1/16S473J
R 501	RS1/16S393J
R 503	RS1/16S681J
R 504	RAB4C102J
R 505	RS1/16S102J
R 602	RS1/16S473J
R 603	RS1/16S473J
R 605	RS1/16S102J
R 607	RS1/16S474J
R 608	RS1/16S474J
R 609	RS1/16S474J
R 610	RS1/16S0R0J
R 611	RS1/16S473J
R 612	RS1/16S471J
R 613	RS1/16S102J
R 614	RS1/16S102J
R 615	RAB4C471J
R 619	RS1/16S471J

Circuit Symbol and No. Part Name Part No.

R 620	RS1/16S471J
R 621	RS1/16S471J
R 622	RAB4C471J
R 623	RS1/16S102J
R 624	RS1/16S102J
R 625	RS1/16S102J
R 626	RAB4C471J
R 627	RS1/16S471J
R 628	RS1/16S474J
R 629	RS1/16S474J
R 630	RS1/16S274J
R 631	RS1/16S274J
R 632	RS1/16S473J
R 633	RS1/16S103J
R 634	RS1/16S102J
R 635	RS1/16S274J
R 636	RS1/16S102J
R 637	RS1/16S274J
R 638	RS1/16S102J
R 640	RS1/16S102J
R 641	RAB4C102J
R 642	RS1/16S102J
R 644	RS1/16S473J
R 649	RS1/16S0R0J
R 651	RS1/16S124J
R 652	RS1/16S102J
R 653	RS1/16S0R0J
R 654	RS1/16S473J
R 655	RAB4C102J
R 656	RS1/16S473J
R 657	RAB4C102J
R 659	RS1/16S471J
R 661	RS1/16S102J
R 662	RAB4C102J
R 663	RAB4C473J
R 664	RS1/16S472J
R 665	RS1/16S471J
R 666	RS1/16S102J
R 667	RS1/16S102J
R 668	RAB4C0R0J
R 669	RAB4C102J
R 680	RS1/16S473J
R 681	RS1/16S274J
R 685	RS1/16S102J
R 686	RS1/16S102J
R 688	RS1/16S471J
R 689	RS1/16S471J
R 693	RS1/16S102J
R 701	RS1/16S0R0J
R 702	RS1/16S0R0J
R 703	RS1/16S0R0J
R 704	RS1/16S0R0J
R 705	RS1/16S102J
R 706	RS1/16S102J
R 707	RS1/16S102J
R 708	RS1/16S102J
R 709	RS1/16S223J
R 710	RS1/16S223J
R 711	RS1/16S223J
R 712	RS1/16S223J
R 713	RS1/16S223J
R 714	RS1/16S223J
R 715	RS1/16S223J

<u>Circuit Symbol and No.</u>	<u>Part Name</u>	<u>Part No.</u>
R 716	RS1/16S223J	
R 751	RS1/16S222J	
R 752	RS1/16S222J	
R 753	RS1/16S681J	
R 754	RS1/16S105J	
R 755	RS1/16S821J	
R 757	RS1/16S223J	
R 758	RS1/16S222J	
R 759	RS1/16S222J	
R 761	RS1/16S681J	
R 762	RS1/16S473J	
R 763	RS1/16S681J	
R 764	RS1/16S681J	
R 771	RS1/16S222J	
R 772	RS1/16S222J	
R 773	RS1/16S473J	
R 774	RS1/16S103J	
R 775	RS1/16S103J	
R 776	RS1/16S473J	
R 777	RS1/16S681J	
R 778	RS1/16S681J	
R 779	RS1/16S332J	
R 801	RS1/16S220J	
R 802	RS1/16S103J	
R 803	RS1/16S103J	
R 804	RS1/16S822J	
R 805	RS1/16S103J	
R 806	RD1/4PU101J	
R 810	RS1/16S220J	
R 811	RS1/16S103J	
R 812	RS1/16S103J	
R 813	RS1/16S822J	
R 814	RS1/16S103J	
R 815	RD1/4PU101J	
R 821	RS1/16S822J	
R 822	RS1/16S471J	
R 823	RS1/16S473J	
R 824	RS1/16S473J	
R 825	RS1/16S473J	
R 826	RD1/4PU101J	
R 827	RD1/4PU102J	
R 828	RS1/16S103J	
R 829	RS1/16S471J	
R 830	RS1/16S333J	
R 831	RS1/16S472J	
R 832	RS1/16S223J	
R 833	RS1/16S223J	
R 841	RD1/4PU472J	
R 842	RS1/16S222J	
R 843	RS1/16S473J	
R 844	RS1/16S333J	
R 845	RS1/16S0R0J	
R 846	RS1/16S473J	
R 851	RS1/16S473J	
R 852	RS1/16S473J	
R 853	RS1/16S473J	
R 854	RS1/16S104J	
R 855	RS1/16S473J	
R 856	RS1/16S473J	
R 858	RD1/4PU102J	
R 860	RS1/16S473J	
R 862	RS1/16S103J	
R 863	RS1/8S362J	
R 864	RD1/4PU471J	

<u>Circuit Symbol and No.</u>	<u>Part Name</u>	<u>Part No.</u>
R 865	RS1/16S103J	
R 866	RS1/8S362J	
R 867	RS1/16S273J	
R 868	RD1/4PU471J	
R 871	RS1/16S102J	
R 872	RS1/16S102J	
R 873	RS1/16S102J	
R 874	RS1/16S102J	
R 875	RS1/16S102J	
R 876	RS1/16S102J	
R 901	RS1/10S470J	
R 902	RS1/10SR68J	
R 903	RN1/10SK3903D	
R 904	RS1/10S511J	
R 905	RS1/10S151J	
R 906	RN1/10SE3302D	
R 907	RN1/10SK4303D	
R 908	RS1/16S681J	
R 909	RS1/16S621J	
R 910	RS1/16S333J	
R 911	RS1/16S471J	
R 912	RS1/16S471J	
R 913	RS1/16S471J	
R 914	RS1/10S122J	
R 915	RS1/16S562J	
R 916	RS1/16S223J	
R 917	RS1/16S332J	
R 918	RS1/16S562J	
R 919	RS1/10S102J	
R 920	RS1/16S222J	
R 921	RS1/16S472J	
R 922	RS1/10S471J	
R 923	RS1/16S821J	
R 924	RS1/16S821J	
R 925	RS1/10S681J	
R 926	RS1/16S511J	
R 927	RS1/16S223J	
R 928	RS1/16S511J	
R 929	RS1/16S472J	
R 930	RS1/16S332J	
R 931	RS1/16S124J	
R 933	RS1/16S102J	
R 934	RD1/4PU2R2J	
R 935	RD1/4PU2R2J	
R 936	RS1/16S222J	
R 937	RS1/16S911J	
R 938	RS1/16S511J	
R 939	RS1/16S223J	
R 940	RS1/16S511J	
R 941	RS1/16S224J	
R 942	RS1/16S104J	
R 944	RS1/16S822J	
R 945	RS1/16S332J	
R 946	RS1/16S274J	
R 947	RS1/16S104J	
R 948	RS1/16S0R0J	
R 949	RS1/16S0R0J	
R 950	RS1/16S911J	
R 951	RS1/16S102J	
R 952	RS1/16S153J	
R 953	RS1/16S332J	
R 955	RS1/4SA101J	
R 956	RS1/16S0R0J	

A

B

C

D

Circuit Symbol and No. Part Name Part No.

Circuit Symbol and No. Part Name Part No.

CAPACITORS

A	C 101	CKSQYB225K10	C 263	CEAL100M16
	C 102	CKSQYB225K10	C 264	CEAL100M16
	C 103	CKSQYB225K10	C 265	CKSRYB105K10
	C 104	CKSQYB225K10	C 266	CKSRYB105K10
	C 105	CKSRYB224K16	C 301	CKSRYB223K50
	C 106	CKSRYB224K16	C 302	CEAL100M16
	C 107	CKSRYB474K10	C 303	CEAL220M10
	C 108	CKSRYB474K10	C 304	CKSRYB222K50
	C 109	CKSRYB104K16	C 305	CKSRYB222K50
	C 110	CEAL100M16	C 306	CCSQCH101J50
	C 111	CEAL100M16	C 307	CCSRCH181J50
	C 112	CKSRYB105K10	C 308	CCSQCH101J50
	C 113	CKSRYB104K16	C 309	CCSRCH181J50
	C 117	CEALNP100M10	C 351	CKSRYB102K50
	C 118	CEALNP100M10	C 352	CEJQ101M16
	C 120	CEALNP100M10	C 353	CKSRYB104K16
	C 121	CKSRYB472K50	C 354	CEAL100M16
	C 122	CKSRYB472K50	C 355	CASA4R7M16
	C 123	CCSRCH471J50	C 357	CKSRYB105K6R3
	C 124	CCSRCH471J50	C 358	CKSYB106K6R3
B	C 125	CKSRYB473K50	C 405	CKSRYB103K50
	C 151	CKSRYB103K50	C 406	CKSRYB183K50
	C 152	CEALNP100M10	C 407	CKSRYB183K50
	C 153	CEALNP100M10	C 408	CEJQ101M6R3
	C 154	CKSRYB105K10	C 409	CKSRYB103K50
	C 155	CKSRYB222K50	C 410	CEJQ101M16
	C 156	CKSRYB105K10	C 411	CKSRYB472K50
	C 201	CCSRCH101J50	C 412	CKSRYB103K50
	C 202	CCSRCH101J50	C 421	CKSRYB105K10
	C 203	CCSRCH101J50	C 501	CEAL100M16
	C 204	CCSRCH101J50	C 502	CKSRYB104K16
	C 207	CKSRYB102K50	C 503	CEJQ100M16
	C 208	CKSRYB102K50	C 504	CKSRYB104K16
	C 209	CKSRYB102K50	C 505	CKSRYB105K10
	C 210	CKSRYB102K50	C 506	CKSRYB104K16
C	C 213	CCSRCH101J50	C 507	CKSRYB472K50
	C 214	CCSRCH101J50	C 508	CCSRCH220J50
	C 215	CCSRCH101J50	C 509	CCSRCH220J50
	C 216	CCSRCH101J50	C 551	CKSRYB102K50
	C 219	CKSRYB102K50	C 552	CKSRYB102K50
	C 220	CKSRYB102K50	C 601	CKSRYB104K16
	C 221	CKSRYB102K50	C 602	CCSRCH180J50
	C 222	CKSRYB102K50	C 603	CKSYB106K6R3
	C 231	CCSRCH101J50	C 604	CCSRCH101J50
	C 232	CCSRCH101J50	C 605	CCSRCH180J50
	C 234	CKSRYB102K50	C 607	CCSRCH220J50
	C 235	CKSRYB102K50	C 608	CCSRCH180J50
	C 237	CEAT331M6R3	C 609	CKSRYB104K16
	C 238	CEAL100M16	C 610	CKSRYB102K50
	C 251	CCSRCH470J50	C 611	CKSRYB103K50
	C 252	CCSRCH470J50	C 612	CKSRYB103K50
	C 253	CCSRCH470J50	C 613	CKSRYB103K50
	C 254	CCSRCH470J50	C 614	CKSRYB102K50
	C 255	CCSRCH470J50	C 615	CKSRYB102K50
	C 256	CCSRCH470J50	C 616	CKSRYB104K16
D	C 257	CCSRCH470J50	C 617	CKSRYB104K16
	C 258	CCSRCH470J50	C 618	CCSRCH101J50
	C 259	CEAL100M16	C 619	CKSRYB104K16
	C 260	CEAL100M16	C 620	CCSRCH101J50
	C 261	CEAL100M16	C 702	CKSRYB103K50
	C 262	CEAL100M16	C 703	CEAL470M10
			C 704	CKSYB475K10
			C 705	CKSYB475K10
			C 706	CKSYB475K10

Circuit Symbol and No. Part Name Part No.

C 707		CKSYB475K10
C 751		CKSRYB104K16
C 752		CKSRYB104K16
C 771		CCSRCH681J50
C 772		CCSRCH681J50
C 801		CKSRYB103K50
C 810		CKSRYB103K50
C 811		CCSRCH101J50
C 841		CCSRCH221J50
C 842		CKSRYB103K50
C 852		CKSRYB102K50
C 853		CCSRCH181J50
C 861		CKSRYB473K50
C 862		CKSRYB473K50
C 871		CKSRYB103K50
C 901		CKSRYB105K10
C 902		CASA470M20
C 903		CKSRYB102K50
C 904		CKSRYB104K25
C 905		CKSRYB104K16
C 906		CKSRYB105K10
C 907		CEHAR470M16
C 908		CEJQ470M10
C 909		CEHAR101M10
C 910		CCSRCH101J50
C 911		CKSRYB103K50
C 912		CKSQYB104K25
C 913		CEJQ47M35
C 914		CCSRCH101J50
C 915		CKSRYB104K16
C 916		CEJQ100M25
C 917		CKSRYB102K50
C 918		CEHAT331M10
C 919		CKSRYB223K50
C 920		CKSRYB104K25
C 921		CEJQ220M10
C 922		CASA330M10
C 923		CKSRYB103K50
C 924		CEJQ470M6R3
C 925	470µF/6.3V	CCH1182
C 926	100µF/10V	CCH1323
C 927		CKSRYB103K50
C 928		CKSRYB105K10
C 929		CEHAR101M10
C 930	3300µF/16V	CCH1163
C 931		CKSRYB103K50
C 932		CKSRYB104K25
C 933		CKSRYB153K50
C 937		CEAT102M16
C 938		CKSRYB103K50
C 939		CKSRYB103K50
C 940	0.1F/5.5V	CCL1023
C 941		CKSRYB473K50
C 942		CKSRYB104K25
C 943		CKSYB105K16
C 944		CCSRCH102J50

Circuit Symbol and No. Part Name Part No.**MISCELLANEOUS**

IC 101	IC	PML011A
IC 151	IC	TC7S66F
IC 201	IC	BA4558F-P
IC 202	IC	BA4558F-P
IC 203	IC	BA4558F-P
IC 204	IC	BA4558F-P
IC 206	IC	BA4558F-P
IC 251	IC	NJM4558V
IC 252	IC	NJM4558V
IC 301	IC	DS36277
IC 302	IC	PCA82C250T
IC 303	IC	BA05SFP
IC 501	IC	PM4006B
IC 601	IC	S-29220A
IC 602	IC	PD5665A
IC 603	IC	BU2099FV
IC 604	IC	S-80942ANMP-DD6
IC 771	IC	TC7S86FU
IC 772	Photo-interrupter	GP1S94
IC 773	IC	TC7S14FU
IC 901	IC	TK11835M
IC 902	IC	BA6288FS
IC 903	IC	TK11818M
IC 904	IC	S-81250SGQD
IC 905	IC	PAJ002A
Q 151	Transistor	DTA114EK
Q 201	Transistor	2SC2712
Q 351	Transistor	2SB1185
Q 352	Transistor	IMX1
Q 401	Transistor	2SC2412K
Q 501	Transistor	DTA124EK
Q 602	Transistor	DTC124EU
Q 603	Transistor	DTA124EK
Q 604	Transistor	DTA124EK
Q 701	Transistor	2SC2412K
Q 702	Transistor	2SC2412K
Q 703	Transistor	2SC2412K
Q 704	Transistor	2SC2412K
Q 751	Transistor	IMX1
Q 752	Transistor	2SB1185
Q 753	Transistor	2SB1132
Q 754	Transistor	DTA114EK
Q 771	Transistor	2SB1238
Q 772	Transistor	DTC114EK
Q 810	Transistor	2SA1576
Q 811	Transistor	DTC124EK
Q 812	Transistor	2SA1674
Q 821	Transistor	2SC2412K
Q 822	Transistor	2SA1162
Q 823	Transistor	2SC2412K
Q 841	Transistor	2SC2412K
Q 851	Transistor	DTA114EK
Q 852	Transistor	2SC2412K
Q 853	Transistor	DTC114TK
Q 901	Transistor	2SB1238
Q 902	Transistor	2SD2353
Q 903	Transistor	DTA143EK
Q 904	Transistor	IMX1
Q 905	Transistor	2SB1185
Q 906	Transistor	DTC114EK
Q 907	Transistor	IMX1
Q 908	Transistor	DTA124EK

A

Unit Number: CWM7804(AVX-MG2127ZF)
Unit Name: Tuner Audio Unit

Circuit Symbol and No. Part Name Part No.

Q 909	Transistor	2SB1185
Q 910	Transistor	IMX1
Q 911	Transistor	2SB1238
Q 912	Transistor	2SB1299
Q 913	Transistor	2SB1185
Q 914	Transistor	IMX1
Q 916	Transistor	DTA124EK
D 213	Diode	HZS5LL(B)
D 301	Diode	HZS20L(2)
D 302	Diode	HZS20L(2)
D 303	Diode	HZS20L(2)
D 304	Diode	HZS20L(2)
D 351	Diode	HZS9L(A1)
D 352	Diode	MA111
D 701	Diode	UDZ18(B)
D 702	Diode	UDZ18(B)
D 703	Diode	UDZ18(B)
D 704	Diode	UDZ18(B)
D 705	Diode	UDZ18(B)
D 706	Diode	UDZ18(B)
D 707	Diode	UDZ18(B)
D 708	Diode	UDZ18(B)
D 751	Diode	HZS6L(B2)
D 752	Diode	MA153
D 753	Diode	MA153
D 754	Diode	MA153
D 755	Diode	MA153
D 756	Diode	MA153
D 757	Diode	MA153
D 758	Diode	MA153
D 759	Diode	UDZ10(B)
D 760	Diode	MA153
D 761	Diode	MA153
D 762	Diode	MA153
D 763	Diode	MA153
D 810	Diode	1SS133
D 811	Diode	1SS133
D 821	Diode	HZS5LL(C)
D 822	Diode	1SS133
D 823	Diode	HZS7L(B2)
D 841	Diode	HZS6L(B2)
D 842	Chip Diode	MA151WK
D 843	Diode	MA111
D 851	Diode	HZS12L(C1)
D 861	Diode	1SS133
D 862	Diode	1SS133
D 863	Diode	1SS133
D 864	Diode	1SS133
D 871	Diode	1SS133
D 872	Diode	1SS133
D 901	Diode	HZU7R5(B3)
D 902	Diode	RB500V-40
D 903	Diode	HZS5LL(B)
D 904	Diode	HZS18L(3)
D 905	Chip Diode	MA151WK
D 906	Diode	HZU8R2(B1)
D 908	Diode	UDZ8R2(B)
D 909	Diode	RM4Z-LFJ1
D 921	Diode	ERA15-02VH
D 922	Diode	1SS133
D 923	Diode	1SS133
D 924	Diode	MA111
L 351	Inductor	LCTA2R2J2520

Circuit Symbol and No. Part Name Part No.

L 403	Inductor	LAU1R0K
L 404	Inductor	LAU1R0K
L 501	Inductor	LAU2R2K
L 502	Inductor	LAU2R2K
L 551	Inductor	LAU1R0K
L 552	Inductor	LAU1R0K
L 601	Chip-Inductor	LCTA2R2J3225
L 602	Inductor	LCTA2R2J2520
L 603	Inductor	CTF1379
L 604	Inductor	CTF1379
L 605	Inductor	CTF1306
L 606	Inductor	CTF1306
L 701	Inductor	LCTB150K2125
L 751	Inductor	LAU2R2K
L 901	Inductor	CTF1499
L 902	Choke Coil 100μH	CTH1196
L 903	Transformer	CTX1088
L 905	Choke Coil 1.4mH	CTH1129
TH901	Thermistor	CCX1051
X 501	Crystal Resonator 4.332MHz	CSS1056
X 601	Radiator 16MHz	CSS1571
X 602	Radiator 32.768kHz	CSS1319
S 751	Spring Switch(OPEN)	CSN1046
S 752	Spring Switch(CLOSE)	CSN1046
FU901	Fuse 2A	CEK1176
FU902	Fuse 1.75A	CEK1177
FB902	Inductor	CTF1449
FB901	Inductor	CTF1449
RESISTORS		
R 101		RS1/16S103J
R 102		RS1/16S153J
R 103		RS1/16S103J
R 104		RS1/16S682J
R 105		RS1/16S0R0J
R 151		RS1/16S104J
R 152		RS1/16S473J
R 153		RS1/16S473J
R 154		RS1/16S473J
R 155		RS1/16S473J
R 156		RS1/16S104J
R 157		RS1/16S104J
R 158		RS1/16S472J
R 159		RS1/16S472J
R 160		RS1/16S104J
R 161		RS1/16S104J
R 162		RS1/16S472J
R 163		RS1/16S472J
R 164		RS1/16S391J
R 165		RS1/16S912J
R 201		RS1/16S822J
R 202		RS1/16S822J
R 203		RS1/16S472J
R 204		RS1/16S472J
R 205		RS1/16S470J
R 206		RS1/16S470J
R 207		RS1/16S472J
R 208		RS1/16S472J
R 209		RS1/16S470J
R 210		RS1/16S470J
R 211		RS1/16S822J
R 212		RS1/16S822J
R 213		RS1/16S470J
R 214		RS1/16S470J

Circuit Symbol and No. Part Name Part No.

R 215	RS1/16S472J
R 216	RS1/16S472J
R 217	RS1/16S472J
R 218	RS1/16S472J
R 219	RS1/16S470J
R 220	RS1/16S470J
R 226	RS1/16S822J
R 227	RS1/16S470J
R 228	RS1/16S472J
R 229	RS1/16S472J
R 230	RS1/16S470J
R 231	RS1/16S102J
R 232	RS1/16S272J
R 233	RS1/16S473J
R 234	RS1/16S473J
R 236	RS1/16S473J
R 237	RS1/16S472J
R 238	RS1/16S472J
R 240	RS1/16S472J
R 251	RS1/16S333J
R 252	RS1/16S333J
R 253	RS1/16S333J
R 254	RS1/16S333J
R 255	RS1/16S333J
R 256	RS1/16S333J
R 257	RS1/16S333J
R 258	RS1/16S333J
R 259	RS1/16S753J
R 260	RS1/16S753J
R 261	RS1/16S753J
R 262	RS1/16S753J
R 263	RS1/16S753J
R 264	RS1/16S753J
R 265	RS1/16S753J
R 266	RS1/16S753J
R 301	RS1/16S223J
R 302	RS1/16S472J
R 303	RS1/16S472J
R 304	RS1/16S273J
R 305	RS1/16S472J
R 306	RD1/4PU470J
R 307	RD1/4PU470J
R 308	RS1/16S102J
R 351	RS1/16S223J
R 352	RS1/16S223J
R 353	RS1/16S223J
R 354	RS1/16S332J
R 355	RS1/16S121J
R 356	RS1/16S121J
R 357	RS1/16S221J
R 358	RS1/16S221J
R 359	RS1/16S222J
R 404	RS1/16S473J
R 405	RS1/16S681J
R 406	RS1/16S103J
R 407	RS1/16S681J
R 408	RS1/16S681J
R 409	RS1/16S681J
R 410	RS1/16S473J
R 411	RS1/16S681J
R 412	RS1/16S681J
R 413	RS1/16S272J
R 414	RS1/16S272J

Circuit Symbol and No. Part Name Part No.

R 415	RS1/16S393J
R 416	RS1/16S162J
R 417	RS1/16S162J
R 418	RS1/16S472J
R 419	RS1/16S473J
R 420	RS1/16S473J
R 424	RS1/16S222J
R 425	RS1/16S473J
R 501	RS1/16S393J
R 503	RS1/16S681J
R 504	RAB4C102J
R 505	RS1/16S102J
R 602	RS1/16S473J
R 603	RS1/16S473J
R 605	RS1/16S102J
R 607	RS1/16S474J
R 608	RS1/16S474J
R 609	RS1/16S474J
R 610	RS1/16S0R0J
R 611	RS1/16S473J
R 612	RS1/16S471J
R 613	RS1/16S102J
R 614	RS1/16S102J
R 615	RAB4C471J
R 619	RS1/16S471J
R 620	RS1/16S471J
R 621	RS1/16S471J
R 622	RAB4C471J
R 623	RS1/16S102J
R 624	RS1/16S102J
R 625	RS1/16S102J
R 626	RAB4C471J
R 627	RS1/16S471J
R 628	RS1/16S474J
R 629	RS1/16S474J
R 631	RS1/16S473J
R 632	RS1/16S473J
R 633	RS1/16S103J
R 634	RS1/16S102J
R 635	RS1/16S274J
R 636	RS1/16S102J
R 637	RS1/16S274J
R 638	RS1/16S102J
R 640	RS1/16S102J
R 641	RAB4C102J
R 642	RS1/16S102J
R 644	RS1/16S473J
R 649	RS1/16S0R0J
R 651	RS1/16S124J
R 652	RS1/16S102J
R 653	RS1/16S0R0J
R 654	RS1/16S473J
R 655	RAB4C102J
R 656	RS1/16S473J
R 657	RAB4C102J
R 659	RS1/16S471J
R 661	RS1/16S102J
R 662	RAB4C102J
R 663	RAB4C473J
R 664	RS1/16S472J
R 665	RS1/16S471J
R 666	RS1/16S102J
R 667	RS1/16S102J

Circuit Symbol and No. Part Name Part No.

R 668	RAB4C0R0J
R 669	RAB4C102J
R 680	RS1/16S473J
R 681	RS1/16S274J
R 685	RS1/16S102J
A R 686	RS1/16S102J
R 688	RS1/16S471J
R 689	RS1/16S471J
R 693	RS1/16S102J
R 701	RS1/16S0R0J
R 702	RS1/16S0R0J
R 703	RS1/16S0R0J
R 704	RS1/16S0R0J
R 705	RS1/16S102J
R 706	RS1/16S102J
R 707	RS1/16S102J
R 708	RS1/16S102J
R 709	RS1/16S223J
R 710	RS1/16S223J
R 711	RS1/16S223J
R 712	RS1/16S223J
R 713	RS1/16S223J
B R 714	RS1/16S223J
R 715	RS1/16S223J
R 716	RS1/16S223J
R 751	RS1/16S222J
R 752	RS1/16S222J
R 753	RS1/16S681J
R 754	RS1/16S105J
R 755	RS1/16S821J
R 757	RS1/16S223J
R 758	RS1/16S222J
R 759	RS1/16S222J
R 761	RS1/16S681J
R 762	RS1/16S473J
R 763	RS1/16S681J
R 764	RS1/16S681J
R 771	RS1/16S222J
R 772	RS1/16S222J
R 773	RS1/16S473J
C R 774	RS1/16S103J
R 775	RS1/16S103J
R 776	RS1/16S473J
R 777	RS1/16S681J
R 778	RS1/16S681J
R 779	RS1/16S332J
R 810	RS1/16S220J
R 811	RS1/16S103J
R 812	RS1/16S103J
R 813	RS1/16S822J
R 814	RS1/16S103J
R 815	RD1/4PU101J
R 821	RS1/16S822J
R 822	RS1/16S471J
R 823	RS1/16S473J
R 824	RS1/16S473J
R 825	RS1/16S473J
D R 826	RD1/4PU101J
R 827	RD1/4PU102J
R 828	RS1/16S103J
R 829	RS1/16S471J
R 830	RS1/16S333J
R 831	RS1/16S472J
R 832	RS1/16S223J

Circuit Symbol and No. Part Name Part No.

R 833	RS1/16S223J
R 841	RD1/4PU472J
R 842	RS1/16S222J
R 843	RS1/16S473J
R 844	RS1/16S333J
R 845	RS1/16S0R0J
R 846	RS1/16S473J
R 851	RS1/16S473J
R 852	RS1/16S473J
R 853	RS1/16S473J
R 854	RS1/16S104J
R 855	RS1/16S473J
R 856	RS1/16S473J
R 858	RD1/4PU102J
R 860	RS1/16S473J
R 862	RS1/16S103J
R 863	RS1/8S362J
R 864	RD1/4PU471J
R 865	RS1/16S103J
R 866	RS1/8S362J
R 867	RS1/16S273J
R 868	RD1/4PU471J
R 871	RS1/16S102J
R 872	RS1/16S102J
R 873	RS1/16S102J
R 874	RS1/16S102J
R 875	RS1/16S102J
R 876	RS1/16S102J
R 901	RS1/10S470J
R 902	RS1/10SR68J
R 903	RN1/10SK3903D
R 904	RS1/10S511J
R 905	RS1/10S151J
R 906	RN1/10SE3302D
R 907	RN1/10SK4303D
R 908	RS1/16S681J
R 909	RS1/16S621J
R 910	RS1/16S333J
R 911	RS1/16S471J
R 912	RS1/16S471J
R 913	RS1/16S471J
R 914	RS1/10S122J
R 915	RS1/16S562J
R 916	RS1/16S223J
R 917	RS1/16S332J
R 918	RS1/16S562J
R 919	RS1/10S102J
R 920	RS1/16S222J
R 921	RS1/16S472J
R 922	RS1/10S471J
R 923	RS1/16S821J
R 924	RS1/16S821J
R 925	RS1/10S681J
R 926	RS1/16S511J
R 927	RS1/16S223J
R 928	RS1/16S511J
R 929	RS1/16S472J
R 930	RS1/16S332J
R 931	RS1/16S124J
R 933	RS1/16S102J
R 934	RD1/4PU2R2J
R 935	RD1/4PU2R2J
R 936	RS1/16S222J

Circuit Symbol and No. Part Name Part No.

R 937	RS1/16S911J
R 938	RS1/16S511J
R 939	RS1/16S223J
R 940	RS1/16S511J
R 941	RS1/16S224J
R 942	RS1/16S104J
R 944	RS1/16S822J
R 945	RS1/16S332J
R 946	RS1/16S274J
R 947	RS1/16S104J
R 948	RS1/16S0R0J
R 949	RS1/16S0R0J
R 950	RS1/16S911J
R 951	RS1/16S102J
R 952	RS1/16S153J
R 953	RS1/16S332J
R 955	RS1/4SA101J
R 956	RS1/16S0R0J

CAPACITORS

C 101	CKSQYB225K10
C 102	CKSQYB225K10
C 103	CKSQYB225K10
C 104	CKSQYB225K10
C 105	CKSRYB224K16
C 106	CKSRYB224K16
C 107	CKSRYB474K10
C 108	CKSRYB474K10
C 109	CKSRYB104K16
C 110	CEAL100M16
C 111	CEAL100M16
C 112	CKSRYB105K10
C 113	CKSRYB104K16
C 117	CEALNP100M10
C 118	CEALNP100M10
C 120	CEALNP100M10
C 121	CKSRYB472K50
C 122	CKSRYB472K50
C 123	CCSRCH471J50
C 124	CCSRCH471J50
C 125	CKSRYB473K50
C 151	CKSRYB103K50
C 152	CEALNP100M10
C 153	CEALNP100M10
C 154	CKSRYB105K10
C 155	CKSRYB222K50
C 156	CKSRYB105K10
C 201	CCSRCH101J50
C 202	CCSRCH101J50
C 203	CCSRCH101J50
C 204	CCSRCH101J50
C 207	CKSRYB102K50
C 208	CKSRYB102K50
C 209	CKSRYB102K50
C 210	CKSRYB102K50
C 213	CCSRCH101J50
C 214	CCSRCH101J50
C 215	CCSRCH101J50
C 216	CCSRCH101J50
C 219	CKSRYB102K50
C 220	CKSRYB102K50
C 221	CKSRYB102K50
C 222	CKSRYB102K50

Circuit Symbol and No. Part Name Part No.

C 231	CCSRCH101J50
C 232	CCSRCH101J50
C 234	CKSRYB102K50
C 235	CKSRYB102K50
C 237	CEAT331M6R3
C 238	CEAL100M16
C 251	CCSRCH470J50
C 252	CCSRCH470J50
C 253	CCSRCH470J50
C 254	CCSRCH470J50
C 255	CCSRCH470J50
C 256	CCSRCH470J50
C 257	CCSRCH470J50
C 258	CCSRCH470J50
C 259	CEAL100M16
C 260	CEAL100M16
C 261	CEAL100M16
C 262	CEAL100M16
C 263	CEAL100M16
C 264	CEAL100M16
C 265	CKSRYB105K10
C 266	CKSRYB105K10
C 301	CKSRYB223K50
C 302	CEAL100M16
C 303	CEAL220M10
C 304	CKSRYB222K50
C 305	CKSRYB222K50
C 306	CCSQCH101J50
C 307	CCSRCH181J50
C 308	CCSQCH101J50
C 309	CCSRCH181J50
C 351	CKSRYB102K50
C 352	CEJQ101M16
C 353	CKSRYB104K16
C 354	CEAL100M16
C 355	CASA4R7M16
C 357	CKSRYB105K6R3
C 358	CKSYB106K6R3
C 405	CKSRYB103K50
C 406	CKSRYB183K50
C 407	CKSRYB183K50
C 408	CEJQ101M6R3
C 409	CKSRYB103K50
C 410	CEJQ101M16
C 411	CKSRYB472K50
C 412	CKSRYB103K50
C 421	CKSRYB105K10
C 501	CEAL100M16
C 502	CKSRYB104K16
C 503	CEJQ100M16
C 504	CKSRYB104K16
C 505	CKSRYB105K10
C 506	CKSRYB104K16
C 507	CKSRYB472K50
C 508	CCSRCH220J50
C 509	CCSRCH220J50
C 551	CKSRYB102K50
C 552	CKSRYB102K50
C 601	CKSRYB104K16
C 602	CCSRCH180J50
C 603	CKSYB106K6R3
C 604	CCSRCH101J50
C 605	CCSRCH180J50

Circuit Symbol and No. Part Name Part No.

C 607		CCSRCH220J50
C 608		CCSRCH180J50
C 609		CKSRYB104K16
C 610		CKSRYB102K50
C 611		CKSRYB103K50
C 612		CKSRYB103K50
C 613		CKSRYB103K50
C 614		CKSRYB102K50
C 615		CKSRYB102K50
C 616		CKSRYB104K16
C 617		CKSRYB104K16
C 618		CCSRCH101J50
C 619		CKSRYB104K16
C 620		CCSRCH101J50
C 702		CKSRYB103K50
C 703		CEAL470M10
C 704		CKSYB475K10
C 705		CKSYB475K10
C 706		CKSYB475K10
C 707		CKSYB475K10
C 751		CKSRYB104K16
C 752		CKSRYB104K16
C 771		CCSRCH681J50
C 772		CCSRCH681J50
C 810		CKSRYB103K50
C 811		CCSRCH101J50
C 841		CCSRCH221J50
C 842		CKSRYB103K50
C 852		CKSRYB102K50
C 853		CCSRCH181J50
C 861		CKSRYB473K50
C 862		CKSRYB473K50
C 871		CKSRYB103K50
C 901		CKSRYB105K10
C 902		CASA470M20
C 903		CKSRYB102K50
C 904		CKSRYB104K25
C 905		CKSRYB104K16
C 906		CKSRYB105K10
C 907		CEHAR470M16
C 908		CEJQ470M10
C 909		CEHAR101M10
C 910		CCSRCH101J50
C 911		CKSRYB103K50
C 912		CKSQYB104K25
C 913		CEJQ4R7M35
C 914		CCSRCH101J50
C 915		CKSRYB104K16
C 916		CEJQ100M25
C 917		CKSRYB102K50
C 918		CEHAT331M10
C 919		CKSRYB223K50
C 920		CKSRYB104K25
C 921		CEJQ220M10
C 922		CASA330M10
C 923		CKSRYB103K50
C 924		CEJQ470M6R3
C 925	470μF/6.3V	CCH1182
C 926	100μF/10V	CCH1323
C 927		CKSRYB103K50
C 928		CKSRYB105K10
C 929		CEHAR101M10
C 930		CCH1163
C 931	3300μF/16V	CKSRYB103K50

470μF/6.3V
100μF/10V

3300μF/16V

Circuit Symbol and No. Part Name Part No.

C 932		CKSRYB104K25
C 933		CKSRYB153K50
C 937		CEAT102M16
C 938		CKSRYB103K50
C 939		CKSRYB103K50
C 940	0.1F/5.5V	CCL1023
C 941		CKSRYB473K50
C 942		CKSRYB104K25
C 943		CKSYB105K16
C 944		CCSRCH102J50

**Unit Number: CWM8036(AVX-MG2227ZF)****Unit Name: Tuner Audio Unit****MISCELLANEOUS**

IC 101	IC	PML011A
IC 151	IC	TC7S66F
IC 201	IC	BA4558F-P
IC 202	IC	BA4558F-P
IC 203	IC	BA4558F-P
IC 204	IC	BA4558F-P
IC 206	IC	BA4558F-P
IC 251	IC	NJM4558V
IC 252	IC	NJM4558V
IC 301	IC	DS36277
IC 302	IC	PCA82C250T
IC 303	IC	BA05SFP
IC 501	IC	PM4006B
IC 601	IC	S-29220A
IC 602	IC	PD5665A
IC 603	IC	BU2099FV
IC 604	IC	S-80942ANMP-DD6
IC 771	IC	TC7S86FU
IC 772	Photo-interrupter	GP1S94
IC 773	IC	TC7S14FU
IC 901	IC	TK11835M
IC 902	IC	BA6288FS
IC 903	IC	TK11818M
IC 904	IC	S-81250SGQD
IC 905	IC	PAJ002A
Q 151	Transistor	DTA114EK
Q 201	Transistor	2SC2712
Q 351	Transistor	2SB1185
Q 352	Transistor	IMX1
Q 401	Transistor	2SC2412K
Q 501	Transistor	DTA124EK
Q 602	Transistor	DTC124EU
Q 603	Transistor	DTA124EK
Q 604	Transistor	DTA124EK
Q 701	Transistor	2SC2412K
Q 702	Transistor	2SC2412K
Q 703	Transistor	2SC2412K
Q 704	Transistor	2SC2412K
Q 751	Transistor	IMX1
Q 752	Transistor	2SB1185
Q 753	Transistor	2SB1132
Q 771	Transistor	2SB1238
Q 772	Transistor	DTC114EK
Q 810	Transistor	2SA1576
Q 811	Transistor	DTC124EK
Q 812	Transistor	2SA1674

Circuit Symbol and No. Part Name Part No.

Q 821	Transistor	2SC2412K
Q 822	Transistor	2SA1162
Q 823	Transistor	2SC2412K
Q 841	Transistor	2SC2412K
Q 851	Transistor	DTA114EK
Q 852	Transistor	2SC2412K
Q 853	Transistor	DTC114TK
Q 854	Transistor	DTA114EK
Q 901	Transistor	2SB1238
Q 902	Transistor	2SD2353
Q 903	Transistor	DTA143EK
Q 904	Transistor	IMX1
Q 905	Transistor	2SB1185
Q 906	Transistor	DTC114EK
Q 907	Transistor	IMX1
Q 908	Transistor	DTA124EK
Q 909	Transistor	2SB1185
Q 910	Transistor	IMX1
Q 911	Transistor	2SB1238
Q 912	Transistor	2SB1299
Q 913	Transistor	2SB1185
Q 914	Transistor	IMX1
Q 916	Transistor	DTA124EK
D 213	Diode	HZS5LL(B)
D 301	Diode	HZS20L(2)
D 302	Diode	HZS20L(2)
D 303	Diode	HZS20L(2)
D 304	Diode	HZS20L(2)
D 351	Diode	HZS9L(A1)
D 352	Diode	MA111
D 701	Diode	UDZ18(B)
D 702	Diode	UDZ18(B)
D 703	Diode	UDZ18(B)
D 704	Diode	UDZ18(B)
D 705	Diode	UDZ18(B)
D 706	Diode	UDZ18(B)
D 707	Diode	UDZ18(B)
D 708	Diode	UDZ18(B)
D 751	Diode	HZS6L(B2)
D 752	Diode	MA153
D 753	Diode	MA153
D 754	Diode	MA153
D 755	Diode	MA153
D 756	Diode	MA153
D 757	Diode	MA153
D 758	Diode	MA153
D 759	Diode	UDZ10(B)
D 760	Diode	MA153
D 761	Diode	MA153
D 762	Diode	MA153
D 763	Diode	MA153
D 810	Diode	1SS133
D 811	Diode	1SS133
D 821	Diode	HZS5LL(C)
D 822	Diode	1SS133
D 823	Diode	HZS7L(B2)
D 831	Diode	1SS133
D 832	Diode	1SS133
D 841	Diode	HZS6L(B2)
D 842	Chip Diode	MA151WK
D 843	Diode	MA111
D 851	Diode	HZS12L(C1)
D 861	Diode	1SS133
D 862	Diode	1SS133

Circuit Symbol and No. Part Name Part No.

D 863	Diode	1SS133
D 864	Diode	1SS133
D 871	Diode	1SS133
D 872	Diode	1SS133
D 901	Diode	HZU7R5(B3)
D 902	Diode	RB500V-40
D 903	Diode	HZS5LL(B)
D 904	Diode	HZS18L(3)
D 905	Chip Diode	MA151WK
D 906	Diode	HZU8R2(B1)
D 908	Diode	UDZ8R2(B)
D 909	Diode	RM4Z-LFJ1
D 921	Diode	ERA15-02VH
D 922	Diode	1SS133
D 923	Diode	1SS133
D 924	Diode	MA111
L 351	Inductor	LCTA2R2J2520
L 403	Inductor	LAU1R0K
L 404	Inductor	LAU1R0K
L 501	Inductor	LAU2R2K
L 502	Inductor	LAU2R2K
L 551	Inductor	LAU1R0K
L 552	Inductor	LAU1R0K
L 601	Chip-Inductor	LCTA2R2J3225
L 602	Inductor	LCTA2R2J2520
L 603	Inductor	CTF1379
L 604	Inductor	CTF1379
L 605	Inductor	CTF1306
L 606	Inductor	CTF1306
L 701	Inductor	LCTB150K2125
L 751	Inductor	LAU2R2K
L 901	Inductor	CTF1499
L 902	Choke Coil 100μH	CTH1196
L 903	Transformer	CTX1088
L 905	Choke Coil 1.4mH	CTH1129
TH901	Thermistor	CCX1051
X 501	Crystal Resonator 4.332MHz	CSS1056
X 601	Radiator 16MHz	CSS1571
X 602	Radiator 32.768kHz	CSS1319
S 751	Spring Switch(OPEN)	CSN1046
S 752	Spring Switch(CLOSE)	CSN1046
FU901	Fuse 2A	CEK1176
FU902	Fuse 1.75A	CEK1177
FB902	Inductor	CTF1449
FB901	Inductor	CTF1449

RESISTORS

R 101	RS1/16S103J
R 102	RS1/16S153J
R 103	RS1/16S103J
R 104	RS1/16S682J
R 105	RS1/16S0R0J
R 151	RS1/16S104J
R 152	RS1/16S473J
R 153	RS1/16S473J
R 154	RS1/16S473J
R 155	RS1/16S473J
R 156	RS1/16S104J
R 157	RS1/16S104J
R 158	RS1/16S472J
R 159	RS1/16S472J
R 160	RS1/16S104J
R 161	RS1/16S104J

Circuit Symbol and No. Part Name Part No.

R 162	RS1/16S472J
R 163	RS1/16S472J
R 164	RS1/16S391J
R 165	RS1/16S912J
A	R 201 RS1/16S822J
	R 202 RS1/16S822J
	R 203 RS1/16S472J
	R 204 RS1/16S472J
	R 205 RS1/16S470J
	R 206 RS1/16S470J
	R 207 RS1/16S472J
	R 208 RS1/16S472J
	R 209 RS1/16S470J
	R 210 RS1/16S470J
	R 211 RS1/16S822J
	R 212 RS1/16S822J
	R 213 RS1/16S470J
	R 214 RS1/16S470J
	R 215 RS1/16S472J
B	R 216 RS1/16S472J
	R 217 RS1/16S472J
	R 218 RS1/16S472J
	R 219 RS1/16S470J
	R 220 RS1/16S470J
	R 226 RS1/16S822J
	R 227 RS1/16S470J
	R 228 RS1/16S472J
	R 229 RS1/16S472J
	R 230 RS1/16S470J
	R 231 RS1/16S102J
	R 232 RS1/16S272J
	R 233 RS1/16S473J
	R 234 RS1/16S473J
	R 236 RS1/16S473J
	R 237 RS1/16S472J
	R 238 RS1/16S472J
	R 240 RS1/16S472J
	R 251 RS1/16S333J
	R 252 RS1/16S333J
C	R 253 RS1/16S333J
	R 254 RS1/16S333J
	R 255 RS1/16S333J
	R 256 RS1/16S333J
	R 257 RS1/16S333J
	R 258 RS1/16S333J
	R 259 RS1/16S753J
	R 260 RS1/16S753J
	R 261 RS1/16S753J
	R 262 RS1/16S753J
	R 263 RS1/16S753J
	R 264 RS1/16S753J
	R 265 RS1/16S753J
	R 266 RS1/16S753J
	R 301 RS1/16S223J
	R 302 RS1/16S472J
	R 303 RS1/16S472J
	R 304 RS1/16S273J
	R 305 RS1/16S472J
	R 306 RD1/4PU470J
D	R 307 RD1/4PU470J
	R 308 RS1/16S102J
	R 351 RS1/16S223J
	R 352 RS1/16S223J
	R 353 RS1/16S223J

Circuit Symbol and No. Part Name Part No.

R 354	RS1/16S332J
R 355	RS1/16S121J
R 356	RS1/16S121J
R 357	RS1/16S221J
R 358	RS1/16S221J
	R 359 RS1/16S222J
	R 404 RS1/16S473J
	R 405 RS1/16S681J
	R 406 RS1/16S103J
	R 407 RS1/16S681J
	R 408 RS1/16S681J
	R 409 RS1/16S681J
	R 410 RS1/16S473J
	R 411 RS1/16S681J
	R 412 RS1/16S681J
	R 413 RS1/16S272J
	R 414 RS1/16S272J
	R 415 RS1/16S393J
	R 416 RS1/16S162J
	R 417 RS1/16S162J
	R 418 RS1/16S472J
	R 419 RS1/16S473J
	R 420 RS1/16S473J
	R 424 RS1/16S222J
	R 425 RS1/16S473J
	R 501 RS1/16S393J
	R 503 RS1/16S681J
	R 504 RAB4C102J
	R 505 RS1/16S102J
	R 602 RS1/16S473J
	R 603 RS1/16S473J
	R 605 RS1/16S102J
	R 607 RS1/16S474J
	R 608 RS1/16S474J
	R 609 RS1/16S474J
	R 610 RS1/16S0R0J
	R 611 RS1/16S473J
	R 612 RS1/16S471J
	R 613 RS1/16S102J
	R 614 RS1/16S102J
	R 615 RAB4C471J
	R 619 RS1/16S471J
	R 620 RS1/16S471J
	R 621 RS1/16S471J
	R 622 RAB4C471J
	R 623 RS1/16S102J
	R 624 RS1/16S102J
	R 625 RS1/16S102J
	R 626 RAB4C471J
	R 627 RS1/16S471J
	R 628 RS1/16S474J
	R 629 RS1/16S474J
	R 630 RS1/16S124J
	R 631 RS1/16S274J
	R 632 RS1/16S473J
	R 633 RS1/16S103J
	R 634 RS1/16S102J
	R 635 RS1/16S274J
	R 636 RS1/16S102J
	R 637 RS1/16S274J
	R 638 RS1/16S102J
	R 640 RS1/16S102J
	R 641 RAB4C102J

<u>Circuit Symbol and No.</u>	<u>Part Name</u>	<u>Part No.</u>
R 642	RS1/16S102J	
R 644	RS1/16S473J	
R 649	RS1/16S0R0J	
R 651	RS1/16S124J	
R 652	RS1/16S102J	
R 653	RS1/16S0R0J	
R 654	RS1/16S473J	
R 655	RAB4C102J	
R 656	RS1/16S473J	
R 657	RAB4C102J	
R 659	RS1/16S471J	
R 661	RS1/16S102J	
R 662	RAB4C102J	
R 663	RAB4C473J	
R 664	RS1/16S472J	
R 665	RS1/16S471J	
R 666	RS1/16S102J	
R 667	RS1/16S102J	
R 668	RAB4C0R0J	
R 669	RAB4C102J	
R 680	RS1/16S473J	
R 681	RS1/16S274J	
R 685	RS1/16S102J	
R 686	RS1/16S102J	
R 688	RS1/16S471J	
R 689	RS1/16S471J	
R 693	RS1/16S102J	
R 701	RS1/16S0R0J	
R 702	RS1/16S0R0J	
R 703	RS1/16S0R0J	
R 704	RS1/16S0R0J	
R 705	RS1/16S102J	
R 706	RS1/16S102J	
R 707	RS1/16S102J	
R 708	RS1/16S102J	
R 709	RS1/16S223J	
R 710	RS1/16S223J	
R 711	RS1/16S223J	
R 712	RS1/16S223J	
R 713	RS1/16S223J	
R 714	RS1/16S223J	
R 715	RS1/16S223J	
R 716	RS1/16S223J	
R 751	RS1/16S152J	
R 752	RS1/16S222J	
R 753	RS1/16S681J	
R 754	RS1/16S105J	
R 757	RS1/16S223J	
R 758	RS1/16S222J	
R 759	RS1/16S222J	
R 761	RS1/16S681J	
R 762	RS1/16S473J	
R 763	RS1/16S681J	
R 764	RS1/16S681J	
R 771	RS1/16S222J	
R 772	RS1/16S222J	
R 773	RS1/16S473J	
R 774	RS1/16S103J	
R 775	RS1/16S103J	
R 776	RS1/16S473J	
R 777	RS1/16S681J	
R 778	RS1/16S681J	
R 779	RS1/16S332J	

<u>Circuit Symbol and No.</u>	<u>Part Name</u>	<u>Part No.</u>
R 810	RS1/16S220J	
R 811	RS1/16S103J	
R 812	RS1/16S103J	
R 813	RS1/16S822J	
R 814	RS1/16S103J	
R 815	RD1/4PU101J	
R 821	RS1/16S822J	
R 822	RS1/16S471J	
R 823	RS1/16S473J	
R 824	RS1/16S473J	
R 825	RS1/16S473J	
R 826	RD1/4PU101J	
R 827	RD1/4PU102J	
R 828	RS1/16S103J	
R 829	RS1/16S471J	
R 830	RS1/16S333J	
R 831	RS1/16S472J	
R 832	RS1/16S223J	
R 833	RS1/16S223J	
R 834	RD1/4PU471J	
R 841	RD1/4PU472J	
R 842	RS1/16S222J	
R 843	RS1/16S473J	
R 844	RS1/16S333J	
R 845	RS1/16S0R0J	
R 846	RS1/16S473J	
R 851	RS1/16S473J	
R 852	RS1/16S473J	
R 853	RS1/16S682J	
R 854	RS1/16S104J	
R 855	RS1/16S473J	
R 856	RS1/16S473J	
R 858	RD1/4PU102J	
R 860	RS1/16S473J	
R 861	RS1/16S103J	
R 862	RS1/16S103J	
R 863	RS1/8S362J	
R 864	RD1/4PU471J	
R 865	RS1/16S103J	
R 866	RS1/8S362J	
R 867	RS1/16S273J	
R 868	RD1/4PU471J	
R 871	RS1/16S102J	
R 872	RS1/16S102J	
R 873	RS1/16S102J	
R 874	RS1/16S102J	
R 875	RS1/16S102J	
R 876	RS1/16S102J	
R 901	RS1/10S470J	
R 902	RS1/10SR68J	
R 903	RN1/10SK3903D	
R 904	RS1/10S511J	
R 905	RS1/10S151J	
R 906	RN1/10SE3302D	
R 907	RN1/10SK4303D	
R 908	RS1/16S681J	
R 909	RS1/16S621J	
R 910	RS1/16S333J	
R 911	RS1/16S471J	
R 912	RS1/16S471J	
R 913	RS1/16S471J	
R 914	RS1/10S122J	
R 915	RS1/16S562J	
R 916	RS1/16S223J	

A

B

C

D

Circuit Symbol and No. Part Name Part No.Circuit Symbol and No. Part Name Part No.

R 917 RS1/16S332J
 R 918 RS1/16S562J
 R 919 RS1/10S102J
 R 920 RS1/16S222J
 R 921 RS1/16S472J

C 154 CKSRYB105K10
 C 155 CKSRYB222K50
 C 156 CKSRYB105K10
 C 201 CCSRCH101J50
 C 202 CCSRCH101J50
 C 203 CCSRCH101J50

A R 922 RS1/10S471J
 R 923 RS1/16S821J
 R 924 RS1/16S821J
 R 925 RS1/10S681J
 R 926 RS1/16S511J

C 204 CCSRCH101J50
 C 207 CKSRYB102K50
 C 208 CKSRYB102K50
 C 209 CKSRYB102K50
 C 210 CKSRYB102K50

R 927 RS1/16S223J
 R 928 RS1/16S511J
 R 929 RS1/16S472J
 R 930 RS1/16S332J
 R 931 RS1/16S124J

C 213 CCSRCH101J50
 C 214 CCSRCH101J50
 C 215 CCSRCH101J50
 C 216 CCSRCH101J50
 C 219 CKSRYB102K50

R 933 RS1/16S102J
 R 934 RD1/4PU2R2J
 R 935 RD1/4PU2R2J
 R 936 RS1/16S222J
 R 937 RS1/16S911J

C 220 CKSRYB102K50
 C 221 CKSRYB102K50
 C 222 CKSRYB102K50
 C 231 CCSRCH101J50
 C 232 CCSRCH101J50

B R 938 RS1/16S511J
 R 939 RS1/16S223J
 R 940 RS1/16S511J
 R 941 RS1/16S224J
 R 942 RS1/16S104J

C 234 CKSRYB102K50
 C 235 CKSRYB102K50
 C 237 CEAT331M6R3
 C 238 CEAL100M16
 C 251 CCSRCH470J50

R 944 RS1/16S822J
 R 945 RS1/16S332J
 R 946 RS1/16S274J
 R 947 RS1/16S104J
 R 948 RS1/16S0R0J

C 252 CCSRCH470J50
 C 253 CCSRCH470J50
 C 254 CCSRCH470J50
 C 255 CCSRCH470J50
 C 256 CCSRCH470J50

R 949 RS1/16S0R0J
 R 950 RS1/16S911J
 R 951 RS1/16S102J
 R 952 RS1/16S153J
 R 953 RS1/16S332J

C 257 CCSRCH470J50
 C 258 CCSRCH470J50
 C 259 CEAL100M16
 C 260 CEAL100M16
 C 261 CEAL100M16

R 955 RS1/4SA101J
 R 956 RS1/16S0R0J

C 262 CEAL100M16
 C 263 CEAL100M16
 C 264 CEAL100M16
 C 265 CKSRYB105K10
 C 266 CKSRYB105K10

CAPACITORS

C 101 CKSQYB225K10
 C 102 CKSQYB225K10
 C 103 CKSQYB225K10
 C 104 CKSQYB225K10
 C 105 CKSRYB224K16

C 301 CKSRYB223K50
 C 302 CEAL100M16
 C 303 CEAL220M10
 C 304 CKSRYB222K50
 C 305 CKSRYB222K50

C 106 CKSRYB224K16
 C 107 CKSRYB474K10
 C 108 CKSRYB474K10
 C 109 CKSRYB104K16
 C 110 CEAL100M16

C 306 CCSQCH101J50
 C 307 CCSRCH181J50
 C 308 CCSQCH101J50
 C 309 CCSRCH181J50
 C 351 CKSRYB102K50

C 111 CEAL100M16
 C 112 CKSRYB105K10
 C 113 CKSRYB104K16
 C 117 CEALNP100M10
 C 118 CEALNP100M10

C 352 CEJQ101M16
 C 353 CKSRYB104K16
 C 354 CEAL100M16
 C 355 CASA4R7M16
 C 357 CKSRYB105K6R3

C 120 CEALNP100M10
 C 121 CKSRYB472K50
 C 122 CKSRYB472K50
 C 123 CCSRCH471J50
 C 124 CCSRCH471J50

C 358 CKSYB106K6R3
 C 405 CKSRYB103K50
 C 406 CKSRYB183K50
 C 407 CKSRYB183K50
 C 408 CEJQ101M6R3

C 125 CKSRYB473K50
 C 151 CKSRYB103K50
 C 152 CEALNP100M10
 C 153 CEALNP100M10

C 409 CKSRYB103K50
 C 410 CEJQ101M16

Circuit Symbol and No. Part Name Part No.

C 411	CKSRYB472K50
C 412	CKSRYB103K50
C 421	CKSRYB105K10
C 501	CEAL100M16
C 502	CKSRYB104K16
C 503	CEJQ100M16
C 504	CKSRYB104K16
C 505	CKSRYB105K10
C 506	CKSRYB104K16
C 507	CKSRYB472K50
C 508	CCSRCH220J50
C 509	CCSRCH220J50
C 551	CKSRYB102K50
C 552	CKSRYB102K50
C 601	CKSRYB104K16
C 602	CCSRCH180J50
C 603	CKSYB106K6R3
C 604	CCSRCH101J50
C 605	CCSRCH180J50
C 607	CCSRCH220J50
C 608	CCSRCH180J50
C 609	CKSRYB104K16
C 610	CKSRYB102K50
C 611	CKSRYB103K50
C 612	CKSRYB103K50
C 613	CKSRYB103K50
C 614	CKSRYB102K50
C 615	CKSRYB102K50
C 616	CKSRYB104K16
C 617	CKSRYB104K16
C 618	CCSRCH101J50
C 619	CKSRYB104K16
C 620	CCSRCH101J50
C 702	CKSRYB103K50
C 703	CEAL470M10
C 704	CKSYB475K10
C 705	CKSYB475K10
C 706	CKSYB475K10
C 707	CKSYB475K10
C 751	CKSRYB104K16
C 752	CKSRYB104K16
C 771	CCSRCH681J50
C 772	CCSRCH681J50
C 810	CKSRYB103K50
C 811	CCSRCH101J50
C 831	CKSRYB103K50
C 841	CCSRCH221J50
C 842	CKSRYB103K50
C 852	CKSRYB102K50
C 853	CCSRCH181J50
C 861	CKSRYB473K50
C 862	CKSRYB473K50
C 871	CKSRYB103K50
C 901	CKSRYB105K10
C 902	CASA470M20
C 903	CKSRYB102K50
C 904	CKSRYB104K25
C 905	CKSRYB104K16
C 906	CKSRYB105K10
C 907	CEHAR470M16
C 908	CEJQ470M10
C 909	CEHAR101M10
C 910	CCSRCH101J50

Circuit Symbol and No. Part Name Part No.

C 911	CKSRYB103K50
C 912	CKSQYB104K25
C 913	CEJQ4R7M35
C 914	CCSRCH101J50
C 915	CKSRYB104K16
C 916	CEJQ100M25
C 917	CKSRYB102K50
C 918	CEHAT331M10
C 919	CKSRYB223K50
C 920	CKSRYB104K25
C 921	CEJQ220M10
C 922	CASA330M10
C 923	CKSRYB103K50
C 924	CEJQ470M6R3
C 925	470μF/6.3V CCH1182
C 926	CCH1323
C 927	100μF/10V CKSRYB103K50
C 928	CKSRYB105K10
C 929	CEHAR101M10
C 930	3300μF/16V CCH1163
C 931	CKSRYB103K50
C 932	CKSRYB104K25
C 933	CKSRYB153K50
C 937	CEAT102M16
C 938	CKSRYB103K50
C 939	CKSRYB103K50
C 940	0.1F/5.5V CCL1023
C 941	CKSRYB473K50
C 942	CKSRYB104K25
C 943	CKSYB105K16
C 944	CCSRCH102J50

A

Unit Number: CWM8037(AVX-MG2327ZF)
Unit Name: Tuner Audio Unit

MISCELLANEOUS

IC 101	IC	PML011A
IC 151	IC	TC7S66F
IC 201	IC	BA4558F-P
IC 202	IC	BA4558F-P
IC 203	IC	BA4558F-P
IC 204	IC	BA4558F-P
IC 206	IC	BA4558F-P
IC 251	IC	NJM4558V
IC 252	IC	NJM4558V
IC 301	IC	DS36277
IC 302	IC	PCA82C250T
IC 303	IC	BA05SFP
IC 501	IC	PM4006B
IC 601	IC	S-29220A
IC 602	IC	PD5665A
IC 603	IC	BU2099FV
IC 604	IC	S-80942ANMP-DD6
IC 771	IC	TC7S86FU
IC 772	Photo-interrupter	GP1S94
IC 773	IC	TC7S14FU
IC 901	IC	TK11835M
IC 902	IC	BA6288FS
IC 903	IC	TK11818M
IC 904	IC	S-81250SGQD
IC 905	IC	PAJ002A

Circuit Symbol and No. Part Name Part No.

Q 151 Transistor DTA114EK
 Q 201 Transistor 2SC2712
 Q 351 Transistor 2SB1185
 Q 352 Transistor IMX1
 Q 401 Transistor 2SC2412K

A

Q 501 Transistor DTA124EK
 Q 602 Transistor DTC124EU
 Q 603 Transistor DTA124EK
 Q 604 Transistor DTA124EK
 Q 701 Transistor 2SC2412K

Q 702 Transistor 2SC2412K
 Q 703 Transistor 2SC2412K
 Q 704 Transistor 2SC2412K
 Q 751 Transistor IMX1
 Q 752 Transistor 2SB1185

Q 753 Transistor 2SB1132
 Q 771 Transistor 2SB1238
 Q 772 Transistor DTC114EK
 Q 810 Transistor 2SA1576
 Q 811 Transistor DTC124EK

B

Q 812 Transistor 2SA1674
 Q 821 Transistor 2SC2412K
 Q 822 Transistor 2SA1162
 Q 823 Transistor 2SC2412K
 Q 841 Transistor 2SC2412K

Q 851 Transistor DTA114EK
 Q 852 Transistor 2SC2412K
 Q 853 Transistor DTC114TK
 Q 854 Transistor DTA114EK
 Q 901 Transistor 2SB1238

■

Q 902 Transistor 2SD2353
 Q 903 Transistor DTA143EK
 Q 904 Transistor IMX1
 Q 905 Transistor 2SB1185
 Q 906 Transistor DTC114EK

Q 907 Transistor IMX1
 Q 908 Transistor DTA124EK
 Q 909 Transistor 2SB1185
 Q 910 Transistor IMX1
 Q 911 Transistor 2SB1238

C

Q 912 Transistor 2SB1299
 Q 913 Transistor 2SB1185
 Q 914 Transistor IMX1
 Q 916 Transistor DTA124EK
 D 213 Diode HZS5LL(B)

D 301 Diode HZS20L(2)
 D 302 Diode HZS20L(2)
 D 303 Diode HZS20L(2)
 D 304 Diode HZS20L(2)
 D 351 Diode HZS9L(A1)

D 352 Diode MA111
 D 701 Diode UDZ18(B)
 D 702 Diode UDZ18(B)
 D 703 Diode UDZ18(B)
 D 704 Diode UDZ18(B)

D

D 705 Diode UDZ18(B)
 D 706 Diode UDZ18(B)
 D 707 Diode UDZ18(B)
 D 708 Diode UDZ18(B)
 D 751 Diode HZS6L(B2)

D 752 Diode MA153
 D 753 Diode MA153
 D 754 Diode MA153

Circuit Symbol and No. Part Name Part No.

D 755 Diode MA153
 D 756 Diode MA153

D 757 Diode MA153
 D 758 Diode MA153
 D 759 Diode UDZ10(B)
 D 760 Diode MA153
 D 761 Diode MA153

D 762 Diode MA153
 D 763 Diode MA153
 D 810 Diode 1SS133
 D 811 Diode 1SS133
 D 821 Diode HZS5LL(C)

D 822 Diode 1SS133
 D 823 Diode HZS7L(B2)
 D 831 Diode 1SS133
 D 832 Diode 1SS133
 D 841 Diode HZS6L(B2)

D 842 Chip Diode MA151WK
 D 843 Diode MA111
 D 851 Diode HZS12L(C1)
 D 861 Diode 1SS133
 D 862 Diode 1SS133

D 863 Diode 1SS133
 D 864 Diode 1SS133
 D 871 Diode 1SS133
 D 872 Diode 1SS133
 D 901 Diode HZU7R5(B3)

D 902 Diode RB500V-40
 D 903 Diode HZS5LL(B)
 D 904 Diode HZS18L(3)
 D 905 Chip Diode MA151WK
 D 906 Diode HZU8R2(B1)

D 908 Diode UDZ8R2(B)
 D 909 Diode RM4Z-LFJ1
 D 921 Diode ERA15-02VH
 D 922 Diode 1SS133
 D 923 Diode 1SS133

D 924 Diode MA111
 L 351 Inductor LCTA2R2J2520
 L 403 Inductor LAU1R0K
 L 404 Inductor LAU1R0K
 L 501 Inductor LAU2R2K

L 502 Inductor LAU2R2K
 L 551 Inductor LAU1R0K
 L 552 Inductor LAU1R0K
 L 601 Chip-Inductor LCTA2R2J3225
 L 602 Inductor LCTA2R2J2520

L 603 Inductor CTF1379
 L 604 Inductor CTF1379
 L 605 Inductor CTF1306
 L 606 Inductor CTF1306
 L 701 Inductor LCTB150K2125

L 751 Inductor LAU2R2K
 L 901 Inductor CTF1499
 L 902 Choke Coil 100μH CTH1196
 L 903 Transformer CTX1088
 L 905 Choke Coil 1.4mH CTH1129

TH901 Thermistor CCX1051
 X 501 Crystal Resonator 4.332MHz CSS1056
 X 601 Radiator 16MHz CSS1571
 X 602 Radiator 32.768kHz CSS1319
 S 751 Spring Switch(OPEN) CSN1046

S 752 Spring Switch(CLOSE) CSN1046

Circuit Symbol and No. Part Name Part No.

FU901	Fuse 2A	CEK1176
FU902	Fuse 1.75A	CEK1177
FB902	Inductor	CTF1449
FB901	Inductor	CTF1449

RESISTORS

R 101	RS1/16S103J
R 102	RS1/16S153J
R 103	RS1/16S103J
R 104	RS1/16S682J
R 105	RS1/16S0R0J
R 151	RS1/16S104J
R 152	RS1/16S473J
R 153	RS1/16S473J
R 154	RS1/16S473J
R 155	RS1/16S473J
R 156	RS1/16S104J
R 157	RS1/16S104J
R 158	RS1/16S472J
R 159	RS1/16S472J
R 160	RS1/16S104J
R 161	RS1/16S104J
R 162	RS1/16S472J
R 163	RS1/16S472J
R 164	RS1/16S391J
R 165	RS1/16S912J
R 201	RS1/16S822J
R 202	RS1/16S822J
R 203	RS1/16S472J
R 204	RS1/16S472J
R 205	RS1/16S470J
R 206	RS1/16S470J
R 207	RS1/16S472J
R 208	RS1/16S472J
R 209	RS1/16S470J
R 210	RS1/16S470J
R 211	RS1/16S822J
R 212	RS1/16S822J
R 213	RS1/16S470J
R 214	RS1/16S470J
R 215	RS1/16S472J
R 216	RS1/16S472J
R 217	RS1/16S472J
R 218	RS1/16S472J
R 219	RS1/16S470J
R 220	RS1/16S470J
R 226	RS1/16S822J
R 227	RS1/16S470J
R 228	RS1/16S472J
R 229	RS1/16S472J
R 230	RS1/16S470J
R 231	RS1/16S102J
R 232	RS1/16S272J
R 233	RS1/16S473J
R 234	RS1/16S473J
R 236	RS1/16S473J
R 237	RS1/16S472J
R 238	RS1/16S472J
R 240	RS1/16S472J
R 251	RS1/16S333J
R 252	RS1/16S333J
R 253	RS1/16S333J
R 254	RS1/16S333J
R 255	RS1/16S333J

Circuit Symbol and No. Part Name Part No.

R 256	RS1/16S333J
R 257	RS1/16S333J
R 258	RS1/16S333J
R 259	RS1/16S753J
R 260	RS1/16S753J
R 261	RS1/16S753J
R 262	RS1/16S753J
R 263	RS1/16S753J
R 264	RS1/16S753J
R 265	RS1/16S753J
R 266	RS1/16S753J
R 301	RS1/16S223J
R 302	RS1/16S472J
R 303	RS1/16S472J
R 304	RS1/16S273J
R 305	RS1/16S472J
R 306	RD1/4PU470J
R 307	RD1/4PU470J
R 308	RS1/16S102J
R 351	RS1/16S223J
R 352	RS1/16S223J
R 353	RS1/16S223J
R 354	RS1/16S332J
R 355	RS1/16S121J
R 356	RS1/16S121J
R 357	RS1/16S221J
R 358	RS1/16S221J
R 359	RS1/16S222J
R 404	RS1/16S473J
R 405	RS1/16S681J
R 406	RS1/16S103J
R 407	RS1/16S681J
R 408	RS1/16S681J
R 409	RS1/16S681J
R 410	RS1/16S473J
R 411	RS1/16S681J
R 412	RS1/16S681J
R 413	RS1/16S272J
R 414	RS1/16S272J
R 415	RS1/16S393J
R 416	RS1/16S162J
R 417	RS1/16S162J
R 418	RS1/16S472J
R 419	RS1/16S473J
R 420	RS1/16S473J
R 424	RS1/16S222J
R 425	RS1/16S473J
R 501	RS1/16S393J
R 503	RS1/16S681J
R 504	RAB4C102J
R 505	RS1/16S102J
R 602	RS1/16S473J
R 603	RS1/16S473J
R 605	RS1/16S102J
R 607	RS1/16S474J
R 608	RS1/16S474J
R 609	RS1/16S474J
R 610	RS1/16S0R0J
R 611	RS1/16S473J
R 612	RS1/16S471J
R 613	RS1/16S102J
R 614	RS1/16S102J
R 615	RAB4C471J

Circuit Symbol and No. Part Name Part No.

R 619	RS1/16S471J
R 620	RS1/16S471J
R 621	RS1/16S471J
R 622	RAB4C471J
A	R 623 RS1/16S102J
	R 624 RS1/16S102J
	R 625 RS1/16S102J
	R 626 RAB4C471J
	R 627 RS1/16S471J
	R 628 RS1/16S474J
	R 629 RS1/16S474J
	R 630 RS1/16S473J
	R 632 RS1/16S473J
	R 633 RS1/16S103J
	R 634 RS1/16S102J
	R 635 RS1/16S274J
	R 636 RS1/16S102J
	R 637 RS1/16S274J
	R 638 RS1/16S102J
	R 640 RS1/16S102J
	R 641 RAB4C102J
	R 642 RS1/16S102J
	R 644 RS1/16S473J
	R 649 RS1/16S0R0J
B	R 651 RS1/16S124J
	R 652 RS1/16S102J
	R 653 RS1/16S0R0J
	R 654 RS1/16S473J
	R 655 RAB4C102J
	R 656 RS1/16S473J
	R 657 RAB4C102J
	R 659 RS1/16S471J
	R 661 RS1/16S102J
	R 662 RAB4C102J
	R 663 RAB4C473J
	R 664 RS1/16S472J
	R 665 RS1/16S471J
	R 666 RS1/16S102J
	R 667 RS1/16S102J
C	R 668 RAB4C0R0J
	R 669 RAB4C102J
	R 680 RS1/16S473J
	R 681 RS1/16S274J
	R 685 RS1/16S102J
	R 686 RS1/16S102J
	R 688 RS1/16S471J
	R 689 RS1/16S471J
	R 693 RS1/16S102J
	R 701 RS1/16S0R0J
	R 702 RS1/16S0R0J
	R 703 RS1/16S0R0J
	R 704 RS1/16S0R0J
	R 705 RS1/16S102J
	R 706 RS1/16S102J
	R 707 RS1/16S102J
	R 708 RS1/16S102J
	R 709 RS1/16S223J
	R 710 RS1/16S223J
	R 711 RS1/16S223J
D	R 712 RS1/16S223J
	R 713 RS1/16S223J
	R 714 RS1/16S223J
	R 715 RS1/16S223J
	R 716 RS1/16S223J

Circuit Symbol and No. Part Name Part No.

R 751	RS1/16S152J
R 752	RS1/16S222J
R 753	RS1/16S681J
R 754	RS1/16S105J
R 757	RS1/16S223J
	R 758 RS1/16S222J
	R 759 RS1/16S222J
	R 761 RS1/16S681J
	R 762 RS1/16S473J
	R 763 RS1/16S681J
	R 764 RS1/16S681J
	R 771 RS1/16S222J
	R 772 RS1/16S222J
	R 773 RS1/16S473J
	R 774 RS1/16S103J
	R 775 RS1/16S103J
	R 776 RS1/16S473J
	R 777 RS1/16S681J
	R 778 RS1/16S681J
	R 779 RS1/16S332J
	R 810 RS1/16S220J
	R 811 RS1/16S103J
	R 812 RS1/16S103J
	R 813 RS1/16S822J
	R 814 RS1/16S103J
	R 815 RD1/4PU101J
	R 821 RS1/16S822J
	R 822 RS1/16S471J
	R 823 RS1/16S473J
	R 824 RS1/16S473J
	R 825 RS1/16S473J
	R 826 RD1/4PU101J
	R 827 RD1/4PU102J
	R 828 RS1/16S103J
	R 829 RS1/16S471J
	R 830 RS1/16S333J
	R 831 RS1/16S472J
	R 832 RS1/16S223J
	R 833 RS1/16S223J
	R 834 RD1/4PU471J
	R 841 RD1/4PU472J
	R 842 RS1/16S222J
	R 843 RS1/16S473J
	R 844 RS1/16S333J
	R 845 RS1/16S0R0J
	R 846 RS1/16S473J
	R 851 RS1/16S473J
	R 852 RS1/16S473J
	R 853 RS1/16S682J
	R 854 RS1/16S104J
	R 855 RS1/16S473J
	R 856 RS1/16S473J
	R 858 RD1/4PU102J
	R 860 RS1/16S473J
	R 861 RS1/16S103J
	R 862 RS1/16S103J
	R 863 RS1/8S362J
	R 864 RD1/4PU471J
	R 865 RS1/16S103J
	R 866 RS1/8S362J
	R 867 RS1/16S273J
	R 868 RD1/4PU471J
	R 871 RS1/16S102J

Circuit Symbol and No. Part Name Part No.		Circuit Symbol and No. Part Name Part No.	
R 872	RS1/16S102J	C 104	CKSQYB225K10
R 873	RS1/16S102J	C 105	CKSRYB224K16
R 874	RS1/16S102J	C 106	CKSRYB224K16
R 875	RS1/16S102J	C 107	CKSRYB474K10
R 876	RS1/16S102J	C 108	CKSRYB474K10
R 901	RS1/10S470J	C 109	CKSRYB104K16
R 902	RS1/10SR68J	C 110	CEAL100M16
R 903	RN1/10SK3903D	C 111	CEAL100M16
R 904	RS1/10S511J	C 112	CKSRYB105K10
R 905	RS1/10S151J	C 113	CKSRYB104K16
R 906	RN1/10SE3302D	C 117	CEALNP100M10
R 907	RN1/10SK4303D	C 118	CEALNP100M10
R 908	RS1/16S681J	C 120	CEALNP100M10
R 909	RS1/16S621J	C 121	CKSRYB472K50
R 910	RS1/16S333J	C 122	CKSRYB472K50
R 911	RS1/16S471J	C 123	CCSRCH471J50
R 912	RS1/16S471J	C 124	CCSRCH471J50
R 913	RS1/16S471J	C 125	CKSRYB473K50
R 914	RS1/10S122J	C 151	CKSRYB103K50
R 915	RS1/16S562J	C 152	CEALNP100M10
R 916	RS1/16S223J	C 153	CEALNP100M10
R 917	RS1/16S332J	C 154	CKSRYB105K10
R 918	RS1/16S562J	C 155	CKSRYB222K50
R 919	RS1/10S102J	C 156	CKSRYB105K10
R 920	RS1/16S222J	C 201	CCSRCH101J50
R 921	RS1/16S472J	C 202	CCSRCH101J50
R 922	RS1/10S471J	C 203	CCSRCH101J50
R 923	RS1/16S821J	C 204	CCSRCH101J50
R 924	RS1/16S821J	C 207	CKSRYB102K50
R 925	RS1/10S681J	C 208	CKSRYB102K50
R 926	RS1/16S511J	C 209	CKSRYB102K50
R 927	RS1/16S223J	C 210	CKSRYB102K50
R 928	RS1/16S511J	C 213	CCSRCH101J50
R 929	RS1/16S472J	C 214	CCSRCH101J50
R 930	RS1/16S332J	C 215	CCSRCH101J50
R 931	RS1/16S124J	C 216	CCSRCH101J50
R 933	RS1/16S102J	C 219	CKSRYB102K50
R 934	RD1/4PU2R2J	C 220	CKSRYB102K50
R 935	RD1/4PU2R2J	C 221	CKSRYB102K50
R 936	RS1/16S222J	C 222	CKSRYB102K50
R 937	RS1/16S911J	C 231	CCSRCH101J50
R 938	RS1/16S511J	C 232	CCSRCH101J50
R 939	RS1/16S223J	C 234	CKSRYB102K50
R 940	RS1/16S511J	C 235	CKSRYB102K50
R 941	RS1/16S224J	C 237	CEAT331M6R3
R 942	RS1/16S104J	C 238	CEAL100M16
R 944	RS1/16S822J	C 251	CCSRCH470J50
R 945	RS1/16S332J	C 252	CCSRCH470J50
R 946	RS1/16S274J	C 253	CCSRCH470J50
R 947	RS1/16S104J	C 254	CCSRCH470J50
R 948	RS1/16S0R0J	C 255	CCSRCH470J50
R 949	RS1/16S0R0J	C 256	CCSRCH470J50
R 950	RS1/16S911J	C 257	CCSRCH470J50
R 951	RS1/16S102J	C 258	CCSRCH470J50
R 952	RS1/16S153J	C 259	CEAL100M16
R 953	RS1/16S332J	C 260	CEAL100M16
R 955	RS1/4SA101J	C 261	CEAL100M16
R 956	RS1/16S0R0J	C 262	CEAL100M16
		C 263	CEAL100M16
		C 264	CEAL100M16
		C 265	CKSRYB105K10
		C 266	CKSRYB105K10
C 101	CKSQYB225K10		
C 102	CKSQYB225K10		
C 103	CKSQYB225K10	C 301	CKSRYB223K50

CAPACITORS

Circuit Symbol and No. Part Name Part No.

C 302	CEAL100M16
C 303	CEAL220M10
C 304	CKSRYB222K50
C 305	CKSRYB222K50
C 306	CCSQCH101J50
C 307	CCSRCH181J50
C 308	CCSQCH101J50
C 309	CCSRCH181J50
C 351	CKSRYB102K50
C 352	CEJQ101M16
C 353	CKSRYB104K16
C 354	CEAL100M16
C 355	CASA4R7M16
C 357	CKSRYB105K6R3
C 358	CKSYB106K6R3
C 405	CKSRYB103K50
C 406	CKSRYB183K50
C 407	CKSRYB183K50
C 408	CEJQ101M6R3
C 409	CKSRYB103K50
C 410	CEJQ101M16
C 411	CKSRYB472K50
C 412	CKSRYB103K50
C 421	CKSRYB105K10
C 501	CEAL100M16
C 502	CKSRYB104K16
C 503	CEJQ100M16
C 504	CKSRYB104K16
C 505	CKSRYB105K10
C 506	CKSRYB104K16
C 507	CKSRYB472K50
C 508	CCSRCH220J50
C 509	CCSRCH220J50
C 551	CKSRYB102K50
C 552	CKSRYB102K50
C 601	CKSRYB104K16
C 602	CCSRCH180J50
C 603	CKSYB106K6R3
C 604	CCSRCH101J50
C 605	CCSRCH180J50
C 607	CCSRCH220J50
C 608	CCSRCH180J50
C 609	CKSRYB104K16
C 610	CKSRYB102K50
C 611	CKSRYB103K50
C 612	CKSRYB103K50
C 613	CKSRYB103K50
C 614	CKSRYB102K50
C 615	CKSRYB102K50
C 616	CKSRYB104K16
C 617	CKSRYB104K16
C 618	CCSRCH101J50
C 619	CKSRYB104K16
C 620	CCSRCH101J50
C 702	CKSRYB103K50
C 703	CEAL470M10
C 704	CKSYB475K10
C 705	CKSYB475K10
C 706	CKSYB475K10

Circuit Symbol and No. Part Name Part No.

C 810	CKSRYB103K50
C 811	CCSRCH101J50
C 831	CKSRYB103K50
C 841	CCSRCH221J50
C 842	CKSRYB103K50
C 852	CKSRYB102K50
C 853	CCSRCH181J50
C 861	CKSRYB473K50
C 862	CKSRYB473K50
C 871	CKSRYB103K50
C 901	CKSRYB105K10
C 902	CASA470M20
C 903	CKSRYB102K50
C 904	CKSRYB104K25
C 905	CKSRYB104K16
C 906	CKSRYB105K10
C 907	CEHAR470M16
C 908	CEJQ470M10
C 909	CEHAR101M10
C 910	CCSRCH101J50
C 911	CKSRYB103K50
C 912	CKSQYB104K25
C 913	CEJQ4R7M35
C 914	CCSRCH101J50
C 915	CKSRYB104K16
C 916	CEJQ100M25
C 917	CKSRYB102K50
C 918	CEHAT331M10
C 919	CKSRYB223K50
C 920	CKSRYB104K25
C 921	CEJQ220M10
C 922	CASA330M10
C 923	CKSRYB103K50
C 924	CEJQ470M6R3
C 925	470μF/6.3V
C 926	100μF/10V
C 927	CCH1323
C 928	CKSRYB103K50
C 929	CKSRYB105K10
C 930	3300μF/16V
C 931	CKSRYB103K50
C 932	CKSRYB104K25
C 933	CKSRYB153K50
C 937	CEAT102M16
C 938	CKSRYB103K50
C 939	CKSRYB103K50
C 940	0.1F/5.5V
C 941	CCL1023
C 942	CKSRYB473K50
C 943	CKSRYB104K25
C 944	CKSYB105K16
C 944	CCSRCH102J50

B**Unit Number:CWM7805****Unit Name:DSP Unit****MISCELLANEOUS**

IC 1001	IC	PD2071A
IC 1051	IC	PD2071A
IC 1101	IC	NJM4558MD
IC 1102	IC	NJM4558MD

<u>Circuit Symbol and No. Part Name Part No.</u>		
IC 1201	IC	NJM4558MD
IC 1202	IC	NJM4558MD
IC 1203	IC	NJM4558MD
D 1101	Diode	HZU4R3(B2)
L 1001	Inductor	LCTA2R2J2520
L 1002	Inductor	CTF1379
L 1003	Inductor	CTF1379
L 1004	Inductor	CTF1379
L 1005	Inductor	CTF1379
L 1006	Inductor	CTF1379
L 1007	Inductor	CTF1379
L 1009	Inductor	CTF1379
L 1010	Inductor	LCTA2R2J2520
L 1011	Inductor	CTF1379
L 1012	Inductor	CTF1379
L 1013	Inductor	CTF1379
L 1014	Inductor	CTF1379
L 1016	Inductor	CTF1379
L 1017	Inductor	CTF1379
L 1018	Inductor	CTF1379
L 1019	Inductor	CTF1379
L 1020	Inductor	CTF1379
L 1021	Inductor	CTF1379
L 1022	Inductor	CTF1379
L 1023	Inductor	CTF1378
L 1051	Inductor	LCTA2R2J2520
L 1052	Inductor	CTF1379
L 1053	Inductor	CTF1379
L 1054	Inductor	CTF1379
L 1055	Inductor	CTF1379
L 1056	Inductor	CTF1379
L 1058	Inductor	CTF1379
L 1059	Inductor	CTF1379
L 1060	Inductor	LCTA2R2J2520
L 1061	Inductor	CTF1379
L 1062	Inductor	CTF1379
L 1063	Inductor	CTF1379
L 1064	Inductor	CTF1379
L 1066	Inductor	CTF1379
L 1067	Inductor	CTF1379
L 1068	Inductor	CTF1379
L 1069	Inductor	CTF1379
L 1070	Inductor	CTF1379
L 1071	Inductor	CTF1379
L 1072	Inductor	CTF1379
X 1001	Radiator 22.5792MHz	CSS1406

RESISTORS

R 1001	RS1/16S221J
R 1002	RS1/16S221J
R 1004	RS1/16S473J
R 1005	RS1/16S471J
R 1006	RS1/16S221J
R 1007	RS1/16S471J
R 1008	RS1/16S471J
R 1009	RS1/16S471J
R 1011	RS1/16S471J
R 1012	RS1/16S471J
R 1013	RS1/16S471J
R 1014	RS1/16S473J
R 1015	RS1/16S473J
R 1016	RS1/16S473J
R 1017	RS1/16S473J

<u>Circuit Symbol and No. Part Name Part No.</u>		
R 1018	RS1/16S473J	A
R 1019	RS1/16S473J	
R 1020	RS1/16S225J	
R 1021	RS1/16S102J	
R 1022	RS1/16S473J	
R 1051	RS1/16S473J	
R 1052	RS1/16S471J	
R 1053	RS1/16S0R0J	
R 1054	RS1/16S0R0J	
R 1055	RS1/16S0R0J	
R 1056	RS1/16S471J	B
R 1057	RS1/16S471J	
R 1058	RS1/16S471J	
R 1060	RS1/16S471J	
R 1061	RS1/16S471J	
R 1062	RS1/16S471J	
R 1063	RS1/16S473J	
R 1064	RS1/16S473J	
R 1065	RS1/16S473J	
R 1066	RS1/16S473J	
R 1067	RS1/16S473J	C
R 1068	RS1/16S473J	
R 1069	RS1/16S225J	
R 1070	RS1/16S473J	
R 1101	RS1/16S224J	
R 1102	RS1/16S224J	
R 1103	RS1/16S103J	
R 1104	RS1/16S103J	
R 1107	RS1/16S103J	
R 1108	RS1/16S103J	
R 1109	RS1/16S123J	D
R 1110	RS1/16S123J	
R 1111	RS1/16S391J	
R 1112	RS1/16S224J	
R 1113	RS1/16S224J	
R 1114	RS1/16S103J	
R 1115	RS1/16S103J	
R 1118	RS1/16S103J	
R 1119	RS1/16S103J	
R 1120	RS1/16S123J	
R 1121	RS1/16S123J	
R 1201	RS1/16S224J	
R 1202	RS1/16S224J	
R 1203	RS1/16S472J	
R 1204	RS1/16S472J	
R 1207	RS1/16S472J	
R 1208	RS1/16S472J	
R 1209	RS1/16S472J	
R 1210	RS1/16S472J	
R 1211	RS1/16S224J	
R 1212	RS1/16S224J	
R 1213	RS1/16S472J	
R 1214	RS1/16S472J	
R 1217	RS1/16S472J	
R 1218	RS1/16S472J	
R 1219	RS1/16S472J	
R 1220	RS1/16S472J	
R 1221	RS1/16S224J	
R 1223	RS1/16S472J	
R 1227	RS1/16S472J	
R 1229	RS1/16S472J	
R 1231	RS1/16S103J	

CAPACITORS

Circuit Symbol and No. Part Name Part No.

C 1001 CEAL470M6R3
 C 1002 CEAL470M6R3
 C 1003 CKSRYB104K16
 C 1004 CKSRYB104K16
 C 1005 CEAL470M6R3

A

C 1006 CEAL470M6R3
 C 1007 CEAL470M6R3
 C 1008 CKSRYB104K16
 C 1009 CEAL470M6R3
 C 1010 CEAL470M6R3

C 1011 CEAL470M6R3
 C 1012 CKSRYB104K16
 C 1013 CKSRYB104K16
 C 1014 CEAL470M6R3
 C 1015 CKSRYB104K16

C 1016 CKSRYB104K16
 C 1017 CKSRYB104K16
 C 1018 CKSRYB104K16
 C 1019 CEAL470M6R3
 C 1020 CEAL470M6R3

B

C 1021 CEAL470M6R3
 C 1022 CEAL470M6R3
 C 1023 CKSRYB104K16
 C 1024 CCSRCH120J50
 C 1025 CCSRCH120J50

C 1027 CKSRYB104K16
 C 1031 CKSRYB104K16
 C 1032 CKSRYB104K16
 C 1051 CEAL470M6R3
 C 1052 CEAL470M6R3

■

C 1053 CKSRYB104K16
 C 1054 CKSRYB104K16
 C 1055 CEAL470M6R3
 C 1056 CEAL470M6R3
 C 1057 CEAL470M6R3

C 1058 CKSRYB104K16
 C 1059 CEAL470M6R3
 C 1060 CEAL470M6R3
 C 1061 CEAL470M6R3
 C 1062 CKSRYB104K16

C

C 1063 CKSRYB104K16
 C 1064 CEAL470M6R3
 C 1065 CKSRYB104K16
 C 1066 CKSRYB104K16
 C 1067 CKSRYB104K16

C 1068 CKSRYB104K16
 C 1069 CEAL470M6R3
 C 1070 CEAL470M6R3
 C 1071 CEAL470M6R3
 C 1072 CEAL470M6R3

■

C 1073 CKSRYB104K16
 C 1075 CKSRYB103K50
 C 1076 CKSRYB104K16
 C 1081 CKSRYB104K16
 C 1082 CKSRYB104K16

D

C 1101 CKSRYB105K10
 C 1102 CKSRYB105K10
 C 1103 CCSRCH220J50
 C 1104 CCSRCH220J50
 C 1105 CCSRCH221J50

C 1106 CCSRCH221J50
 C 1107 CKSRYB103K50
 C 1108 CKSRYB102K50

Circuit Symbol and No. Part Name Part No.

C 1109 CEAL101M6R3
 C 1110 CKSRYB105K10

C 1111 CKSRYB105K10
 C 1112 CCSRCH220J50
 C 1113 CCSRCH220J50
 C 1114 CCSRCH221J50
 C 1115 CCSRCH221J50

C 1116 CKSRYB103K50
 C 1117 CEALNP4R7M35
 C 1118 CEALNP4R7M35
 C 1119 CEALNP4R7M35
 C 1120 CEALNP4R7M35

C 1201 CKSRYB105K10
 C 1202 CKSRYB105K10
 C 1203 CCSRCH681J50
 C 1204 CCSRCH681J50
 C 1205 CKSRYB182K50

C 1206 CKSRYB182K50
 C 1207 CCSRCH101J50
 C 1208 CCSRCH101J50
 C 1209 CKSRYB103K50
 C 1210 CKSQYB225K10

C 1211 CKSQYB225K10
 C 1212 CKSRYB105K10
 C 1213 CKSRYB105K10
 C 1214 CCSRCH681J50
 C 1215 CCSRCH681J50

C 1216 CKSRYB182K50
 C 1217 CKSRYB182K50
 C 1218 CCSRCH101J50
 C 1219 CCSRCH101J50
 C 1220 CKSRYB103K50

C 1221 CKSQYB225K10
 C 1222 CKSQYB225K10
 C 1223 CKSRYB105K10
 C 1225 CCSRCH681J50
 C 1227 CKSRYB182K50

C 1229 CCSRCH101J50
 C 1231 CKSRYB103K50
 C 1232 CKSQYB225K10

F

Unit Number:CWM7801
(AVX-MG2027ZF,MG2127ZF)

Unit Name:Panel PCB Unit

MISCELLANEOUS

IC 1801	IC	BU2099FV
Q 1801	Transistor	DTC144EU
Q 1802	Transistor	DTC144EU
Q 1804	Transistor	2SB1132
D 1807	LED	CL170PGCD(AB)

D 1808	LED	CL170PGCD(AB)
D 1809	LED	CL170PGCD(AB)
D 1810	LED	CL170PGCD(AB)
D 1811	LED	CL170PGCD(AB)
D 1812	LED	CL170PGCD(AB)

D 1815	LED	CL170PGCD(AB)
D 1816	LED	CL170PGCD(AB)
D 1817	Diode	DAN202U
D 1820	Diode	RB751V40

Circuit Symbol and No. Part Name Part No.

D 1831	LED	CL170PGCD(AB)
D 1832	LED	CL170PGCD(AB)
D 1833	LED	CL170PGCD(AB)
D 1834	LED	CL170PGCD(AB)
D 1835	LED	CL170PGCD(AB)
D 1836	LED	CL170PGCD(AB)
D 1837	LED	CL170PGCD(AB)
D 1838	LED	CL170PGCD(AB)
D 1839	LED	CL170PGCD(AB)
S 1801	Push Switch	CSG1126
S 1802	Push Switch	CSG1126
S 1803	Push Switch	CSG1126
S 1804	Push Switch	CSG1126
S 1805	Push Switch	CSG1126
S 1806	Push Switch	CSG1126
S 1807	Push Switch	CSG1126
S 1808	Push Switch	CSG1126

RESISTORS

R 1801	RS1/16S561J
R 1802	RS1/16S561J
R 1803	RS1/16S561J
R 1804	RS1/16S561J
R 1806	RS1/10S201J
R 1807	RS1/10S181J
R 1808	RS1/10S201J
R 1809	RS1/10S181J
R 1810	RS1/10S201J
R 1811	RS1/10S181J
R 1812	RS1/10S201J
R 1813	RS1/10S181J
R 1814	RS1/10S201J
R 1815	RS1/10S181J
R 1816	RS1/10S201J
R 1817	RS1/10S181J
R 1818	RS1/16S223J
R 1819	RS1/16S222J
R 1820	RS1/10S221J
R 1821	RS1/10S221J
R 1822	RS1/10S221J
R 1823	RS1/10S221J
R 1824	RS1/10S221J
R 1825	RS1/10S221J
R 1826	RS1/10S221J
R 1827	RS1/10S221J
R 1828	RS1/10S221J
R 1829	RS1/10S221J
R 1830	RS1/10S221J
R 1831	RS1/10S221J
R 1832	RS1/16S221J
R 1833	RS1/16S221J
R 1834	RS1/10S221J
R 1835	RS1/10S221J
R 1836	RS1/10S331J
R 1837	RS1/10S331J
R 1838	RS1/10S331J
R 1839	RS1/10S331J
R 1840	RS1/16S221J
R 1841	RS1/16S221J

CAPACITORS

C 1801	CKSRYB104K25
C 1802	CKSRYB104K16

Circuit Symbol and No. Part Name Part No.

C 1821	CKSQYB104K25
C 1822	CKSQYB104K25
C 1823	CKSQYB104K25
C 1824	CKSQYB104K25
C 1825	CKSQYB104K25
C 1826	CKSQYB104K25

**Unit Number: CWM7806****(AVX-MG2227ZF, MG2327ZF)****Unit Name: Panel PCB Unit****MISCELLANEOUS**

IC 1801	IC	BU2099FV
Q 1801	Transistor	DTC144EU
Q 1802	Transistor	DTC144EU
Q 1804	Transistor	2SB1132
D 1807	Chip LED	LWM673(P)
D 1808	Chip LED	LWM673(P)
D 1809	Chip LED	LWM673(P)
D 1810	Chip LED	LWM673(P)
D 1811	Chip LED	LWM673(P)
D 1812	Chip LED	LWM673(P)
D 1815	Chip LED	LWM673(P)
D 1816	Chip LED	LWM673(P)
D 1817	Diode	DAN202U
D 1820	Diode	RB751V40
D 1831	Chip LED	LWM673(P)
D 1832	Chip LED	LWM673(P)
D 1833	Chip LED	LWM673(P)
D 1834	Chip LED	LWM673(P)
D 1835	Chip LED	LWM673(P)
D 1836	Chip LED	LWM673(P)
D 1837	Chip LED	LWM673(P)
D 1838	Chip LED	LWM673(P)
D 1839	Chip LED	LWM673(P)
S 1801	Push Switch	CSG1126
S 1802	Push Switch	CSG1126
S 1803	Push Switch	CSG1126
S 1804	Push Switch	CSG1126
S 1805	Push Switch	CSG1126
S 1806	Push Switch	CSG1126
S 1807	Push Switch	CSG1126
S 1808	Push Switch	CSG1126

RESISTORS

R 1801	RS1/16S561J
R 1802	RS1/16S561J
R 1803	RS1/16S561J
R 1804	RS1/16S561J
R 1806	RS1/10S391J
R 1807	RS1/10S681J
R 1808	RS1/10S391J
R 1809	RS1/10S681J
R 1810	RS1/10S391J
R 1811	RS1/10S681J
R 1812	RS1/10S391J
R 1813	RS1/10S681J
R 1814	RS1/10S391J
R 1815	RS1/10S681J
R 1816	RS1/10S391J

Circuit Symbol and No. Part Name Part No.

R 1817	RS1/10S681J
R 1818	RS1/16S223J
R 1819	RS1/16S222J
R 1820	RS1/10S681J
R 1821	RS1/10S391J
R 1822	RS1/10S681J
R 1823	RS1/10S391J
R 1824	RS1/10S681J
R 1825	RS1/10S391J
R 1826	RS1/10S681J
R 1827	RS1/10S391J
R 1828	RS1/10S681J
R 1829	RS1/10S391J
R 1830	RS1/10S681J
R 1831	RS1/10S391J
R 1832	RS1/16S391J
R 1833	RS1/16S331J
R 1834	RS1/10S102J
R 1835	RS1/10S561J
R 1836	RS1/10S391J
R 1837	RS1/10S681J
R 1838	RS1/10S391J
R 1839	RS1/10S681J
R 1840	RS1/16S391J
R 1841	RS1/16S331J

CAPACITORS

C 1801	CKSRYB104K25
C 1802	CKSRYB104K16
C 1803	CKSRYB104K16
C 1804	CKSQYB104K25
C 1805	CKSRYB104K16
C 1811	CKSQYB104K25
C 1812	CKSQYB104K25
C 1813	CKSQYB104K25
C 1814	CKSQYB104K25
C 1815	CKSQYB104K25
C 1816	CKSQYB104K25
C 1821	CKSQYB104K25
C 1822	CKSQYB104K25
C 1823	CKSQYB104K25
C 1824	CKSQYB104K25
C 1825	CKSQYB104K25
C 1826	CKSQYB104K25

C

Unit Number:CWM7803
Unit Name:Module Unit

MISCELLANEOUS

IC 4001	IC	IR3Y29B
IC 4062	IC	TC7S32FU
IC 4081	IC	NJM2286V
IC 4082	IC	NJM2235V
IC 4101	IC	NJM082BV

IC 4121	IC	M62354GP
IC 4171	IC	NJM062V
IC 4301	IC	TC160G11AF-1146
IC 4303	IC	NJM2107F
IC 4351	IC	TC7W02FU

Q 4101	Transistor	FMY3A
--------	------------	-------

Circuit Symbol and No. Part Name Part No.

Q 4102	Transistor	FMY4A
Q 4161	Transistor	2SA1577
Q 4162	Transistor	2SC3518-Z
Q 4163	Transistor	2SC3518-Z
Q 4164	Transistor	DTC114EU
Q 4201	Transistor	2SC4116
Q 4202	Transistor	2SC4116
Q 4203	Transistor	2SA1586
Q 4204	Transistor	2SA1586
Q 4301	Transistor	2SC4097
D 4181	Diode	MA728
D 4182	Diode	MA728
D 4183	Diode	MA728
D 4201	Diode	MA8051(M)
D 4202	Diode	MA8051(M)
D 4203	Diode	MA8051(M)
D 4204	Diode	MA8051(M)
D 4205	Diode	MA8051(M)
D 4206	Diode	MA8051(M)
D 4207	Diode	MA8051(M)
D 4212	Diode	MA8051(M)
D 4213	Diode	MA8051(M)
D 4301	Diode	MA111
D 4302	Diode	1SV231
D 4303	Diode	MA111
L 4001	Inductor	LCTA100J3225
L 4002	Inductor	LCTA100J3225
L 4081	Inductor	LCTA100J3225
L 4101	Inductor	LCTA101J3225
L 4102	Inductor	LCTA101J3225
L 4121	Inductor	LCTB100K2125
L 4122	Inductor	LCTB100K2125
L 4161	Coil	CTH1195
L 4162	Coil	CTH1195
L 4171	Inductor	LCTA101J3225
L 4301	Inductor	LCTA150J3225
L 4302	Coil	CTE1147
L 4303	Inductor	CTF1306
L 4304	Inductor	LCTB100K2125
L 4305	Chip-Inductor	LCTA2R2J3225
L 4306	Inductor	LCTB100K2125
L 4307	Inductor	CTF1306
L 4308	Inductor	CTF1306
L 4310	Inductor-Array	CTF1421
L 4311	Inductor-Array	CTF1421
L 4312	Inductor	CTF1306
L 4313	Inductor	CTF1306
T 4161	Transformer	CTT1096
T 4162	Transformer	CTT1096

VR4002	Semi-fixed 33kΩ(B)	CCP1426
VR4003	Semi-fixed 33kΩ(B)	CCP1426
VR4004	Semi-fixed 33kΩ(B)	CCP1426
VR4005	Semi-fixed 33kΩ(B)	CCP1426
VR4006	Semi-fixed 10kΩ(B)	CCP1423

VR4101	10kΩ(B)	CCP1423
FU4161	Fuse 1.6A	CEK1202
EF4305	Filter	CCG1060

RESISTORS

R 4014	RS1/16S6202D
R 4015	RS1/16S153J
R 4016	RS1/16S273J
R 4017	RS1/16S273J
R 4018	RS1/16S473J

Circuit Symbol and No. Part Name Part No.

R 4019	RS1/16S273J
R 4020	RS1/16S513J
R 4022	RS1/16S333J
R 4023	RS1/16S473J
R 4024	RS1/16S333J
R 4025	RS1/16S473J
R 4026	RS1/16S101J
R 4027	RS1/16S101J
R 4028	RS1/16S561J
R 4029	RS1/16S102J
R 4031	RS1/16S393J
R 4032	RS1/16S513J
R 4033	RS1/16S563J
R 4034	RS1/16S473J
R 4036	RS1/16S682J
R 4037	RS1/16S682J
R 4038	RS1/16S682J
R 4039	RS1/16S1802D
R 4040	RS1/16S124J
R 4041	RS1/16S2402D
R 4042	RS1/16S3602D
R 4047	RS1/16S101J
R 4048	RS1/16S101J
R 4049	RS1/16S101J
R 4061	RS1/16S473J
R 4081	RS1/16S105J
R 4082	RS1/16S105J
R 4083	RS1/16S105J
R 4084	RS1/16S104J
R 4085	RS1/16S473J
R 4087	RS1/16S473J
R 4101	RS1/16S303J
R 4102	RS1/16S913J
R 4103	RS1/16S113J
R 4104	RS1/16S473J
R 4105	RS1/16S363J
R 4106	RS1/16S473J
R 4107	RS1/16S101J
R 4108	RS1/16S153J
R 4109	RS1/16S100J
R 4110	RS1/16S153J
R 4111	RS1/16S100J
R 4123	CCN1131
R 4157	RS1/16S0R0J
R 4161	RS1/16S102J
R 4162	RS1/10S222J
R 4163	RS1/4S751J
R 4164	RS1/4S821J
R 4171	RS1/16S103J
R 4172	RS1/16S104J
R 4173	RS1/16S104J
R 4174	RS1/16S104J
R 4175	RS1/16S105J
R 4176	RS1/16S103J
R 4177	RS1/16S103J
R 4178	RS1/16S103J
R 4201	RS1/16S104J
R 4202	RS1/16S104J
R 4205	RS1/16S102J
R 4206	RS1/16S102J
R 4207	RS1/16S472J
R 4208	RS1/16S472J
R 4209	RS1/16S102J

Circuit Symbol and No. Part Name Part No.

R 4210	RS1/16S102J
R 4211	RS1/16S472J
R 4222	RS1/16S472J
R 4303	RS1/16S621J
R 4305	CCN1119
R 4306	CCN1119
R 4308	RS1/16S105J
R 4309	RS1/16S1R0J
R 4310	RS1/16S331J
R 4311	RS1/16S272J
R 4312	RS1/16S332J
R 4314	RS1/16S153J
R 4315	RS1/16S105J
R 4316	RS1/16S103J
R 4317	RS1/16S123J
R 4318	RS1/16S683J
R 4319	RS1/16S472J
R 4320	RS1/16S563J
R 4321	RS1/16S332J
R 4322	RS1/16S221J
R 4325	RS1/16S220J
R 4326	RS1/16S750J
R 4328	RS1/16S0R0J
R 4329	RS1/16S0R0J
R 4332	CCN1120
R 4333	CCN1120
R 4334	RS1/16S0R0J
R 4335	RS1/16S0R0J
R 4351	RS1/16S222J
CAPACITORS	
C 4001	CKSRYB103K50
C 4002	CKSRYB104K25
C 4003	CKSRYB103K50
C 4004	CKSRYB473K50
C 4005	CKSRYB104K25
C 4007	CKSRYB103K50
C 4008	CKSRYB103K50
C 4010	CKSRYB105K10
C 4011	CKSRYB105K10
C 4012	CKSQYB105K16
C 4013	CSZSR330M10
C 4014	CKSRYB105K10
C 4015	CKSRYB103K50
C 4016	CKSRYB103K50
C 4017	CKSRYB103K50
C 4018	CKSRYB105K10
C 4019	CKSRYB103K50
C 4020	CKSRYB103K50
C 4023	CKSRYB103K50
C 4024	CKSRYB103K50
C 4026	CKSRYB104K25
C 4027	CKSRYB104K25
C 4028	CKSRYB104K25
C 4029	CKSRYB105K10
C 4030	CSZSR330M10
C 4031	CKSRYB682K50
C 4032	CKSQYB105K16
C 4033	CKSRYB105K10
C 4034	CCSRCH821J50
C 4063	CKSRYB104K25
C 4081	CSZSR330M10
C 4082	CKSRYB104K25

47kΩ

Circuit Symbol and No. Part Name Part No.

C 4083	CCSRCH101J50
C 4084	CCSRCH101J50
C 4085	CCSRCH101J50
C 4086	CKSRYB105K10
C 4087	CKSRYB105K10
C 4088	CKSRYB105K10
C 4089	CKSRYB104K25
C 4090	CCSRCH101J50
C 4091	CKSRYB105K10
C 4092	CKSRYB104K25
C 4101	CSZSR330M10
C 4102	CKSRYB103K50
C 4103	CSZSR4R7M25
C 4104	CKSRYB103K50
C 4105	CKSQYB105K16
C 4106	CKSQYB105K16
C 4107	CKSRYB104K25
C 4108	CSZSR4R7M25
C 4121	CSZS100M10
C 4122	CKSRYB104K25
C 4123	CKSRYB104K25
C 4124	CSZS100M10
C 4125	CKSRYB104K25
C 4130	CKSRYB104K25
C 4136	CKSRYB105K10
C 4161	CKSRYB104K25
C 4162	CKSRYB473K50
C 4163	CKSRYB104K25
C 4164	100μF/10V CCH1332
C 4165	CKSQYB225K10
C 4166	CFHSN104J50
C 4167	22pF CCG1140
C 4168	22pF CCG1140
C 4171	CSZSR330M10
C 4172	CKSRYB104K25
C 4173	CFHS473J16
C 4174	CKSRYB105K10
C 4175	CKSRYB472K50
C 4180	CKSRYB102K50
C 4181	CKSRYB102K50
C 4182	CKSRYB102K50
C 4183	CKSRYB102K50
C 4184	CCSRCH101J50
C 4185	CCSRCH101J50
C 4186	CCSRCH101J50
C 4187	CCSRCH101J50
C 4190	CKSRYB102K50
C 4205	CKSRYB102K50
C 4206	CKSRYB102K50
C 4207	CKSRYB102K50
C 4208	CKSRYB102K50
C 4209	CKSRYB102K50
C 4210	CKSRYB102K50
C 4211	CKSRYB102K50
C 4212	CKSRYB102K50
C 4213	CKSRYB102K50
C 4214	CKSRYB102K50
C 4215	CKSRYB102K50
C 4216	CKSRYB102K50
C 4217	CKSRYB102K50
C 4302	CCSRCH561J50
C 4303	CKSRYB104K25
C 4304	CSZSR330M10

Circuit Symbol and No. Part Name Part No.

C 4305	CKSRYB104K25
C 4306	CKSRYB104K25
C 4307	CCSRCH391J50
C 4308	CCSRCH221J50
C 4309	CKSRYB102K50
C 4310	CCSRCH221J50
C 4311	CKSRYB104K25
C 4312	CKSRYB184K10
C 4313	CKSRYB472K50
C 4314	CKSRYB102K50
C 4315	CKSRYB104K25
C 4316	CKSRYB104K25
C 4317	CKSRYB104K25
C 4318	CKSRYB104K25
C 4321	CKSRYB104K25
C 4323	CKSRYB104K25
C 4324	CSZSR4R7M25
C 4325	CKSRYB103K50
C 4326	100μF/10V CCH1332
C 4327	CKSRYB103K50
C 4328	CSZSR4R7M25
C 4329	CKSRYB103K50
C 4351	CKSRYB104K25
C 4352	CCSRCH102J50



Unit Number: CWM7802
(AVX-MG2027ZF, MG2127ZF)

Unit Name: Keyboard Unit

MISCELLANEOUS

Q 1851	Transistor	DTC144EU
Q 1852	Transistor	DTC144EU
D 1851	LED	CL170PGCD(AB)
D 1852	LED	CL170PGCD(AB)
D 1853	LED	CL170PGCD(AB)
D 1854	LED	CL170PGCD(AB)
D 1855	LED	CL170PGCD(AB)
D 1856	LED	CL170PGCD(AB)
D 1857	LED	CL170PGCD(AB)
D 1858	Diode	DAN202U
D 1859	Diode	RB751V40
D 1860	Diode	RB751V40
VR1851	Switch(Power/Volume)	CSD1064

RESISTORS

R 1851	RS1/10S101J
R 1852	RS1/10S101J
R 1853	RS1/10S101J
R 1854	RS1/10S101J
R 1855	RS1/10S101J
R 1856	RS1/10S101J
R 1857	RS1/10S101J
R 1858	RS1/10S101J
R 1859	RS1/10S101J
R 1860	RS1/10S101J
R 1861	RS1/10S101J
R 1862	RS1/10S101J
R 1863	RS1/10S101J
R 1864	RS1/10S101J

Circuit Symbol and No. Part Name Part No.**G****Unit Number:CWM7807****(AVX-MG2227ZF,MG2327ZF)****Unit Name:Keyboard Unit****MISCELLANEOUS**

Q 1851	Transistor	DTC144EU
Q 1852	Transistor	DTC144EU
D 1851	Chip LED	LWM673(P)
D 1852	Chip LED	LWM673(P)
D 1853	Chip LED	LWM673(P)
D 1854	Chip LED	LWM673(P)
D 1855	Chip LED	LWM673(P)
D 1856	Chip LED	LWM673(P)
D 1857	Chip LED	LWM673(P)
D 1858	Diode	DAN202U
D 1859	Diode	RB751V40
D 1860	Diode	RB751V40
VR1851	Switch(Power/Volume)	CSD1064

RESISTORS

R 1851	RS1/10S391J
R 1852	RS1/10S391J
R 1853	RS1/10S101J
R 1854	RS1/10S221J
R 1855	RS1/10S101J
R 1856	RS1/10S221J
R 1857	RS1/10S101J
R 1858	RS1/10S221J
R 1859	RS1/10S101J
R 1860	RS1/10S221J
R 1861	RS1/10S121J
R 1862	RS1/10S151J
R 1863	RS1/10S121J
R 1864	RS1/10S151J

Tuner Connector Unit
Consists of
Tuner PCB
Connector PCB

DE**Unit Number:****Unit Name:Tuner Connector Unit****MISCELLANEOUS**

L 1401	Inductor	LCTA4R7J3225
L 1402	Coil	CTB1103
L 2801	Inductor	CTF1379
L 2802	Inductor	CTF1379
L 2803	Inductor	CTF1379
L 2804	Inductor	CTF1379
L 2806	Inductor	CTF1379
L 2807	Inductor	CTF1379
L 2808	Inductor	CTF1379
L 2809	Inductor	CTF1379
L 2810	Inductor	CTF1379
L 2811	Inductor	CTF1379
L 2813	Inductor	CTF1379
L 2816	Inductor	CTF1306
L 2817	Inductor	CTF1306

Circuit Symbol and No. Part Name Part No.

L 2820	Inductor	CTF1379
L 2821	Inductor	CTF1379
L 2822	Inductor	CTF1306
L 2823	Inductor	CTF1306
L 2824	Inductor	CTF1379
L 2825	Inductor	CTF1379
L 2826	Inductor	CTF1379
AR1401	FM/AM Tuner Unit Surge Protector	CWE1561 DSP-201M

RESISTORS

R 1401	RS1/16S222J
R 1403	RS1/16S473J
R 1404	RS1/16S473J
R 2801	RS1/16S750J
R 2802	RS1/16S750J
R 2803	RS1/16S750J
R 2804	RS1/16S750J
R 2806	RS1/16S0R0J
R 2809	RS1/16S0R0J

CAPACITORS

C 1401	CKSQYB103K50
C 1402	CKSRYB103K50
C 1403	CKSRYB682K50
C 1404	CKSRYB332K50
C 1405	CCSRCH820J50
C 1406	CKSYB105K16
C 1407	CCSRCH101J50
C 2816	CKSRYB102K50
C 2817	CKSRYB102K50
C 2818	CKSRYB102K50
C 2819	CKSRYB102K50

H**Unit Number:CWX2589****Unit Name:Control Unit(G2F)****MISCELLANEOUS**

C 201	IC	UPD63711GC
IC 301	IC	BD7962FM
IC 302	IC	S-818A33AUC-BGN
IC 303	IC	BA05SFP
IC 501	IC	SM5903BFP
IC 503	IC	PD4501B
IC 504	IC	TC74VHCT08AFT
IC 505	IC	TC74VHC541FT
IC 507	IC	MSM51V17400F6TFT
IC 702	IC	PD5705B
Q 101	Transistor	2SB1132
Q 601	Transistor	DTC114EK
Q 602	Transistor	DTA123JK
Q 603	Transistor	DTC314TK
Q 604	Transistor	DTC314TK
Q 702	Transistor	UMD3N
D 101	Diode	1SS355
D 301	Diode	S1G-6904G2P
D 303	Diode	S1G-6904G2P
D 601	Chip Diode	MA151WA
L 201	Inductor	CTF1306

Circuit Symbol and No. Part Name Part No.

L 601	Inductor	CTF1295
TH701	Thermistor	CCX1015
X 201	Radiator 16.93MHz	CSS1581
X 701	Radiator 10.00MHz	CSS1428

RESISTORS

A	R 101	RS1/8S120J
	R 102	RS1/8S100J
	R 103	RS1/16S222J
	R 104	RS1/16S102J
	R 105	RS1/16S0R0J
	R 201	RS1/16S104J
	R 202	RAB4CQ681J
	R 203	RS1/16S0R0J
	R 204	RS1/16S0R0J
	R 205	RS1/16S103J
	R 206	RS1/16S393J
	R 207	RS1/16S0R0J
	R 209	RS1/16S0R0J
	R 210	RS1/16S0R0J
	R 211	RS1/16S0R0J
B	R 212	RS1/16S562J
	R 213	RS1/16S153J
	R 214	RS1/16S123J
	R 216	RS1/16S0R0J
	R 217	RS1/16S0R0J
	R 220	RS1/16S471J
	R 221	RS1/16S681J
	R 298	RS1/16S0R0J
	R 301	RS1/16S103J
	R 302	RS1/16S153J
	R 303	RS1/16S103J
	R 304	RS1/16S103J
	R 305	RS1/16S272J
	R 306	RS1/16S272J
	R 307	RS1/16S182J
	R 308	RS1/16S272J
	R 309	RS1/16S682J
	R 310	RS1/16S822J
	R 311	RS1/16S103J
	R 312	RS1/16S681J
C	R 313	RS1/16S103J
	R 314	RS1/16S153J
	R 315	RS1/16S153J
	R 316	RS1/16S153J
	R 317	RS1/16S103J
	R 318	RS1/16S103J
	R 319	RS1/16S102J
	R 320	RS1/16S392J
	R 322	RS1/16S103J
	R 323	RS1/16S103J
	R 324	RS1/16S103J
	R 325	RS1/16S103J
	R 502	RS1/16S102J
	R 503	RAB4CQ681J
	R 504	RS1/16S331J
D	R 508	RS1/16S392J
	R 511	RS1/16S0R0J
	R 512	RS1/16S333J
	R 513	RS1/16S473J
	R 516	RS1/16S331J
	R 601	RS1/16S102J
	R 602	RS1/16S102J
	R 603	RS1/16S223J
	100	

Circuit Symbol and No. Part Name Part No.RESISTORS

R 604	RS1/16S223J
R 605	RS1/16S102J
R 606	RS1/16S681J
R 607	RS1/16S681J
R 608	RS1/16S102J
R 609	RAB4CQ681J
R 701	RAB4CQ104J
R 702	RS1/16S222J
R 703	RS1/16S681J
R 704	RAB4CQ222J
R 705	RAB4CQ681J
R 706	RS1/16S473J
R 707	RS1/16S473J
R 708	RS1/16S222J
R 709	RS1/16S222J
R 711	RAB4CQ104J
R 712	RS1/16S473J
R 713	RS1/16S681J
R 714	RS1/16S473J
R 715	RAB4CQ222J
R 716	RS1/16S103J
R 718	RS1/16S473J
R 719	RS1/16S104J
R 720	RS1/16S103J
R 724	RS1/16S104J
R 727	RS1/16S0R0J
R 734	RS1/16S104J
R 736	RS1/16S681J
R 739	RS1/16S473J
R 741	RS1/16S104J
R 742	RS1/16S222J
R 743	RS1/16S681J
R 758	RS1/16S822J
R 759	RS1/16S103J
R 760	RS1/16S433J
R 767	RS1/16S154J
R 775	RAB4CQ681J

CAPACITORS

C 101	CKSRYB103K25
C 102	CKSRYB104K25
C 103	CEVL101M10
C 104	CEVL470M6R3
C 105	CKSRYB224K16
C 106	CKSRYB224K16
C 107	CKSRYB224K16
C 201	CKSRYB104K25
C 202	CEVL220M16
C 203	CKSRYB473K25
C 204	CKSRYB182K50
C 205	CKSRYB104K25
C 206	CKSRYB152K50
C 207	CKSRYB224K16
C 208	CCSRCH180J50
C 209	CCSRCK2R0C50
C 210	CCSRCH181J50
C 211	CCSRCH510J50
C 212	CKSRYB682K50
C 213	CKSRYB104K25
C 214	CKSRYB104K25
C 215	CKSRYB103K25

Circuit Symbol and No. Part Name Part No.

C 216		CKSRYB104K25
C 217		CKSRYB104K25
C 218		CKSRYB104K25
C 219		CKSRYB104K25
C 220		CKSRYB104K25
C 221		CEVL470M6R3
C 222		CKSRYB104K25
C 223		CKSRYB102K50
C 224		CKSRYB104K25
C 225		CKSRYB103K25
C 226		CCSRCH510J50
C 301		CEVL101M10
C 302		CKSRYB224K16
C 303		CKSRYB224K16
C 304	10μF/10V	CCH1349
C 305		CKSRYB224K16
C 306	10μF/10V	CCH1349
C 307		CKSRYB224K16
C 309		CKSYB475K16
C 501		CKSRYB102K50
C 502		CKSRYB104K25
C 503		CKSRYB104K25
C 504		CKSRYB104K25
C 505		CKSRYB104K25
C 506		CKSRYB104K25
C 508		CKSRYB104K25
C 509		CKSRYB104K25
C 601		CEVL220M6R3
C 602		CEVL220M6R3
C 701		CKSRYB104K25
C 702		CKSRYB104K25
C 703		CKSRYB103K25
C 704		CKSRYB103K25
C 705		CKSRYB104K25
C 706		CKSRYB104K25
C 707		CKSRYB103K25
C 708		CKSRYB473K25

J

Unit Number:
Unit Name:PCB Unit(Load)

Q 21	Photo-transistor	CPT231SCTU
Q 22	Photo-transistor	CPT231SCTU
L 21	Inductor	LCYBR15J1608
L 22	Inductor	LCYBR15J1608
S 21	Spring Switch(LOAD1)	CSN1051
S 22	Spring Switch(LOAD2)	CSN1052

I

Unit Number:CWX2614
Unit Name:PCB Unit(LED)

D 31	Chip LED	CL205IRXTU
D 32	Chip LED	CL205IRXTU
S 31	Spring Switch(CAMLOAD)	CSN1052
S 32	Spring Switch(CAMEOK)	CSN1052
R 31		RS1/16S0R0J

Circuit Symbol and No. Part Name Part No.**L**

Unit Number:CWX2611
Unit Name:PCB Unit

L 1	Inductor	CTF1389
S 41	Spring Switch(LOAD3)	CSN1051

K

Unit Number:CWX2613
Unit Name:PCB Unit(Side)

MISCELLANEOUS

S 11	Spring Switch(CAMCLMP)	CSN1052
VR11	Semi-fixed 1kΩ(B)	CCP1338

RESISTORS

R 11	RS1/16S562J
R 12	RS1/16S562J
R 13	RS1/10S391J
R 14	RS1/10S391J
R 15	RS1/16S0R0J
R 16	RS1/16S0R0J

CAPACITORS

C 12	CKSRYB104K25
------	--------------

M

Unit Number:
Unit Name:PCB Unit(M2 Unit)

IC 1	IC	BA6849FS
S 1	Switch(HOME)	CSN1057
S 2	Switch(CLAMP)	CSN1057

RESISTORS

R 1	RS1/16S221J
R 2	RS1/16S221J
R 3	RS1/16S4R7J
R 4	RS1/16S1R0J

CAPACITORS

C 1	CKSRYB104K16
-----	--------------

Miscellaneous Parts List

M 1	Motor Unit(-A)(CAMGEAR)	CXB7527
M 2	Motor Unit(-B)(ELEVATION)	CXB7526
M 3	Motor Unit(-A)(CRG)	CXB7517
VR1	Variable Resistor 10kΩ	CCW1023
	PU Unit(Service)(PX1)	CXX1568
M 901	Motor Unit(FLAP)	CXC1191