


## Exploded View (Cabinet)

NOTE : ☐ General Foreign Model, Chinese Model Only.

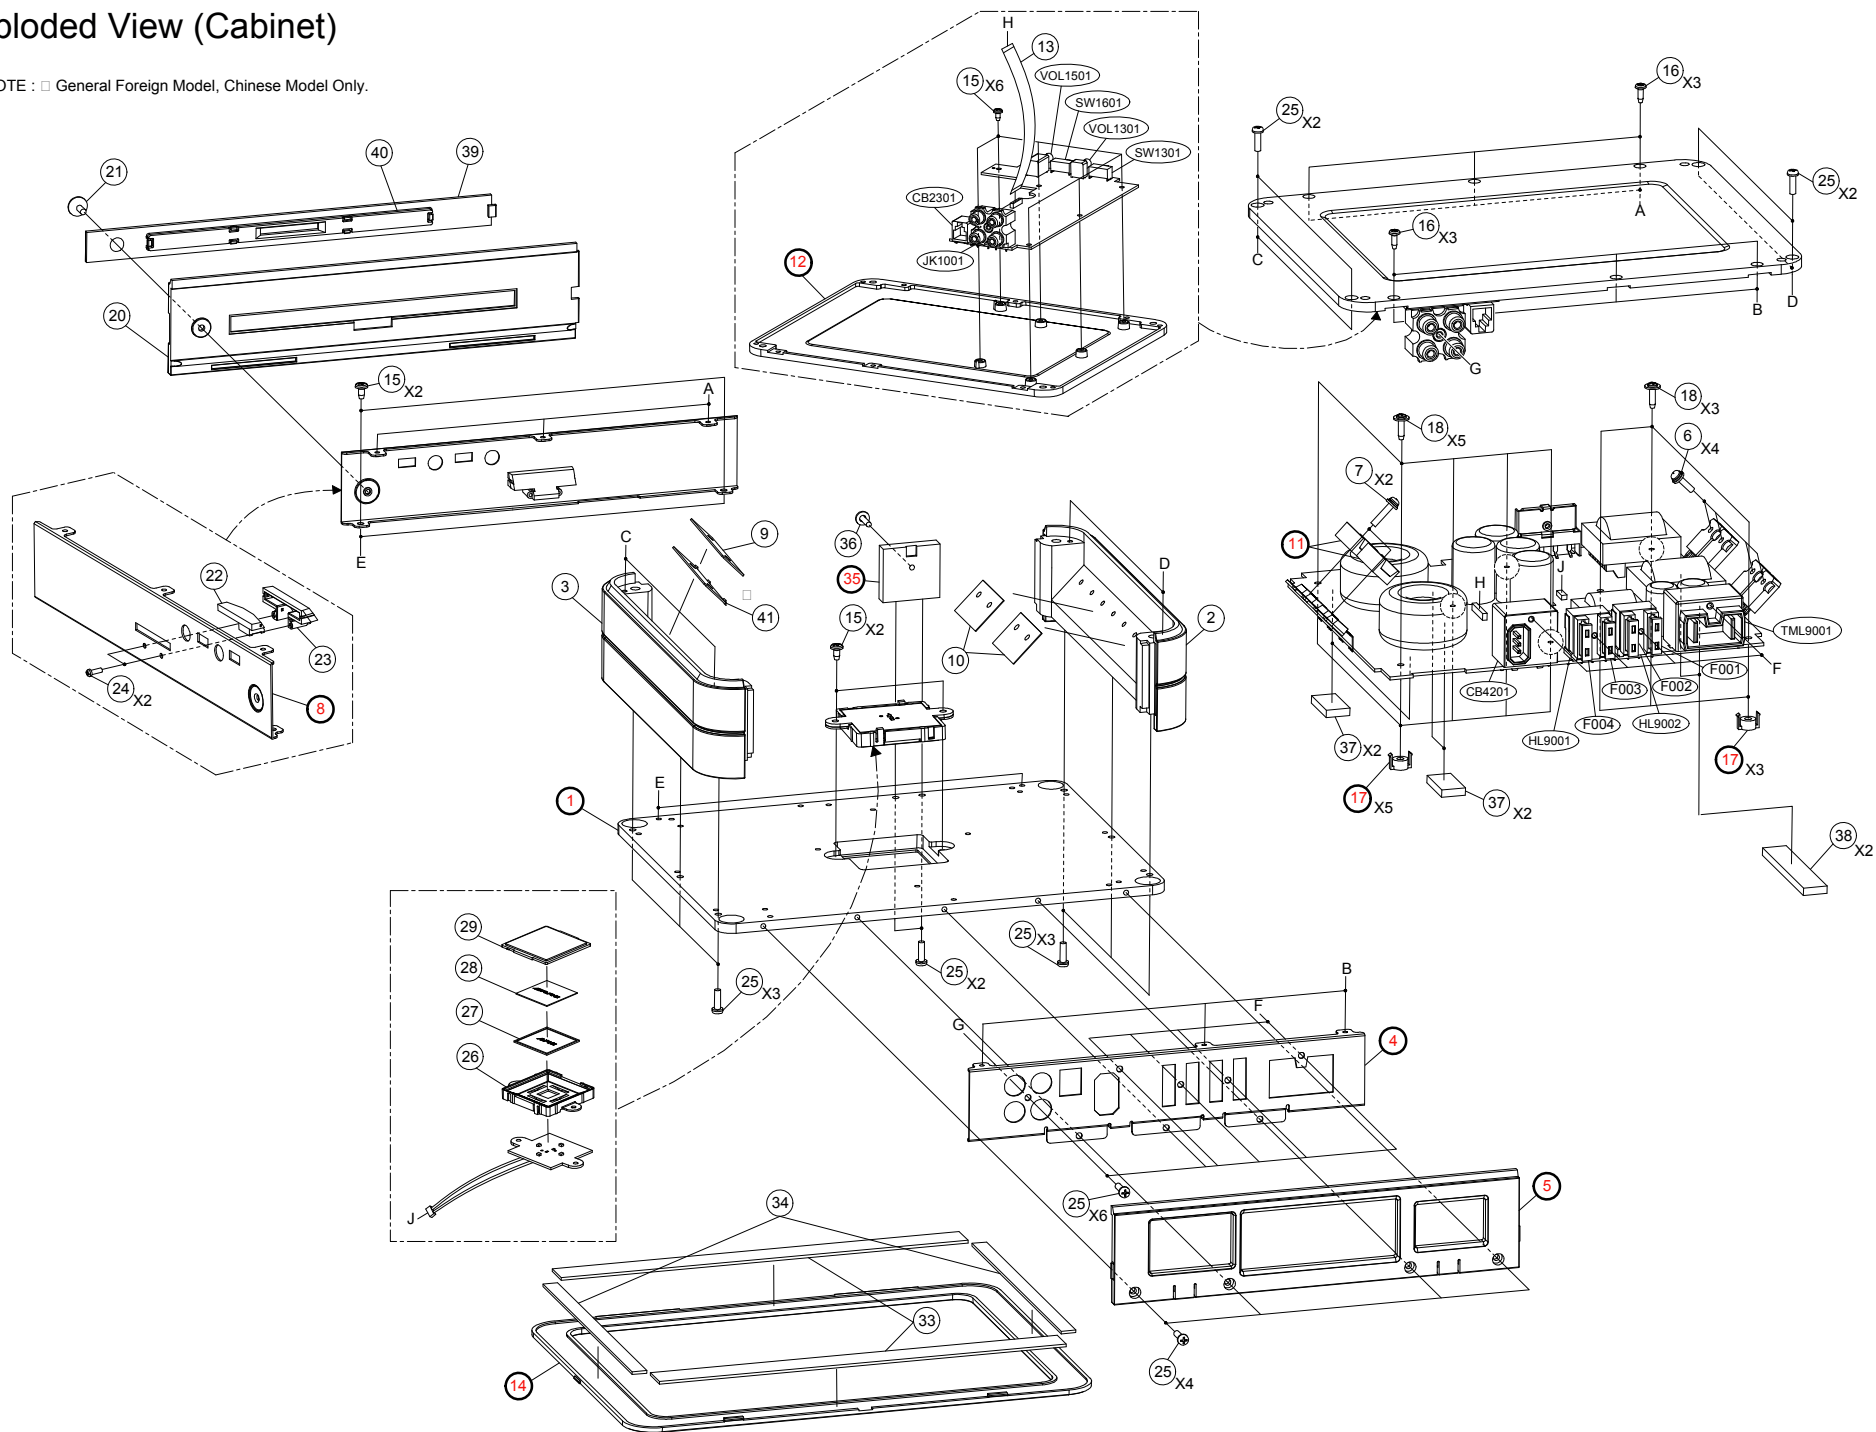

| MODEL | Symbol No.             | Parts No.   | Description            |
|-------|------------------------|-------------|------------------------|
|       | <a href="#">1</a>      | -----       | HEAT,SINK MAIN         |
|       | <a href="#">2</a>      | 13E41484S01 | PANEL,SIDE-R           |
|       | <a href="#">3</a>      | 13E41483S01 | PANEL,SIDE-L           |
|       | <a href="#">4</a>      | -----       | CHAS,REAR              |
|       | <a href="#">5</a>      | -----       | COVER,REAR             |
|       | <a href="#">6</a>      | 03E37973S01 | SCR,M3X12(WS)          |
|       | <a href="#">7</a>      | 03E38094S01 | SCR,M3X15.5(WS)        |
|       | <a href="#">8</a>      | -----       | CHAS,FRONT             |
|       | <a href="#">9</a>      | 14E41450S01 | INSULATOR,SILPAD-2H    |
|       | <a href="#">10</a>     | 14E41482S01 | INSULATOR,SILPAD-2H(M) |
|       | <a href="#">11</a>     | -----       | HEAT,SINK BAR          |
|       | <a href="#">12</a>     | -----       | COVER,BOTTOM           |
|       | <a href="#">13</a>     | 30E41443S01 | CABLE,FLAT 20P         |
|       | <a href="#">14</a>     | -----       | COVER,STACKING         |
|       | <a href="#">15</a>     | 03E38671S01 | SCR,M3X6(B)            |
|       | <a href="#">16</a>     | 03E41471S01 | SCR,M2.6X8(P)(BLK)     |
|       | <a href="#">17</a>     | -----       | SUPPORT,PWB            |
|       | <a href="#">18</a>     | 03E39165S01 | SCR,M3X11(WP)(WHT)     |
|       | <a href="#">20</a>     | 15E41452S01 | COVER,DOOR             |
|       | <a href="#">21</a>     | 03E39505S01 | SCR,M3X10(F)(BLK)      |
|       | <a href="#">22</a>     | 34E41467S01 | IND,COVER DOOR         |
|       | <a href="#">23</a>     | 09E41464S01 | HOLDER,IND             |
|       | <a href="#">24</a>     | 03E39164S01 | SCR,M2X6(P)(BLK)       |
|       | <a href="#">25</a>     | 03E38698S01 | SCR,M3X8(P)(BLK)       |
|       | <a href="#">26</a>     | 09E41463S01 | HOLDER,LED-TOP         |
|       | <a href="#">27</a>     | 61E41457S01 | LENS,LED               |
|       | <a href="#">28</a>     | 33E41456S01 | PLATE,LENS             |
|       | <a href="#">29</a>     | 33E41454S01 | PLATE,SCALE-TOP        |
|       | <a href="#">33</a>     | 75E41465S01 | CUSHION,CR SPONGE      |
|       | <a href="#">34</a>     | 75E41466S01 | CUSHION,CR SPONGE      |
|       | <a href="#">35</a>     | -----       | HEAT,SINK SUB          |
|       | <a href="#">36</a>     | 03E41469S01 | SCR,M2.6X12(PS/W)(WHT) |
|       | <a href="#">37</a>     | 14E39754S01 | INSULATOR,GAPPAD-COIL  |
|       | <a href="#">38</a>     | 14E41481S01 | INS,GAP PAD            |
|       | <a href="#">39</a>     | 33E41455S01 | PLATE,COVER DOOR       |
|       | <a href="#">40</a>     | 34E41473S01 | IND,PLATE COVER DOOR   |
| %1    | <a href="#">41</a>     | 07E41485S01 | BKT,SHIELD-M           |
| &1    | <a href="#">41</a>     | 07E41485S01 | BKT,SHIELD-M           |
|       | <a href="#">CB2301</a> | 09E40583S01 | CONN,JACK 6P           |
|       | <a href="#">CB4201</a> | 09E41445S01 | CONN,SPK-CON 2P        |
|       | <a href="#">F001</a>   | 65E36552S01 | FUSE,AUTO 20A          |
|       | <a href="#">F002</a>   | 65E36552S01 | FUSE,AUTO 20A          |

Mark Model Code

#1 PDX-M6(North American) Only,

\$1 PDX-M6(European) Only,


%1 PDX-M6(General Foreign) Only,

&1 PDX-M6(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

# Packing Method View

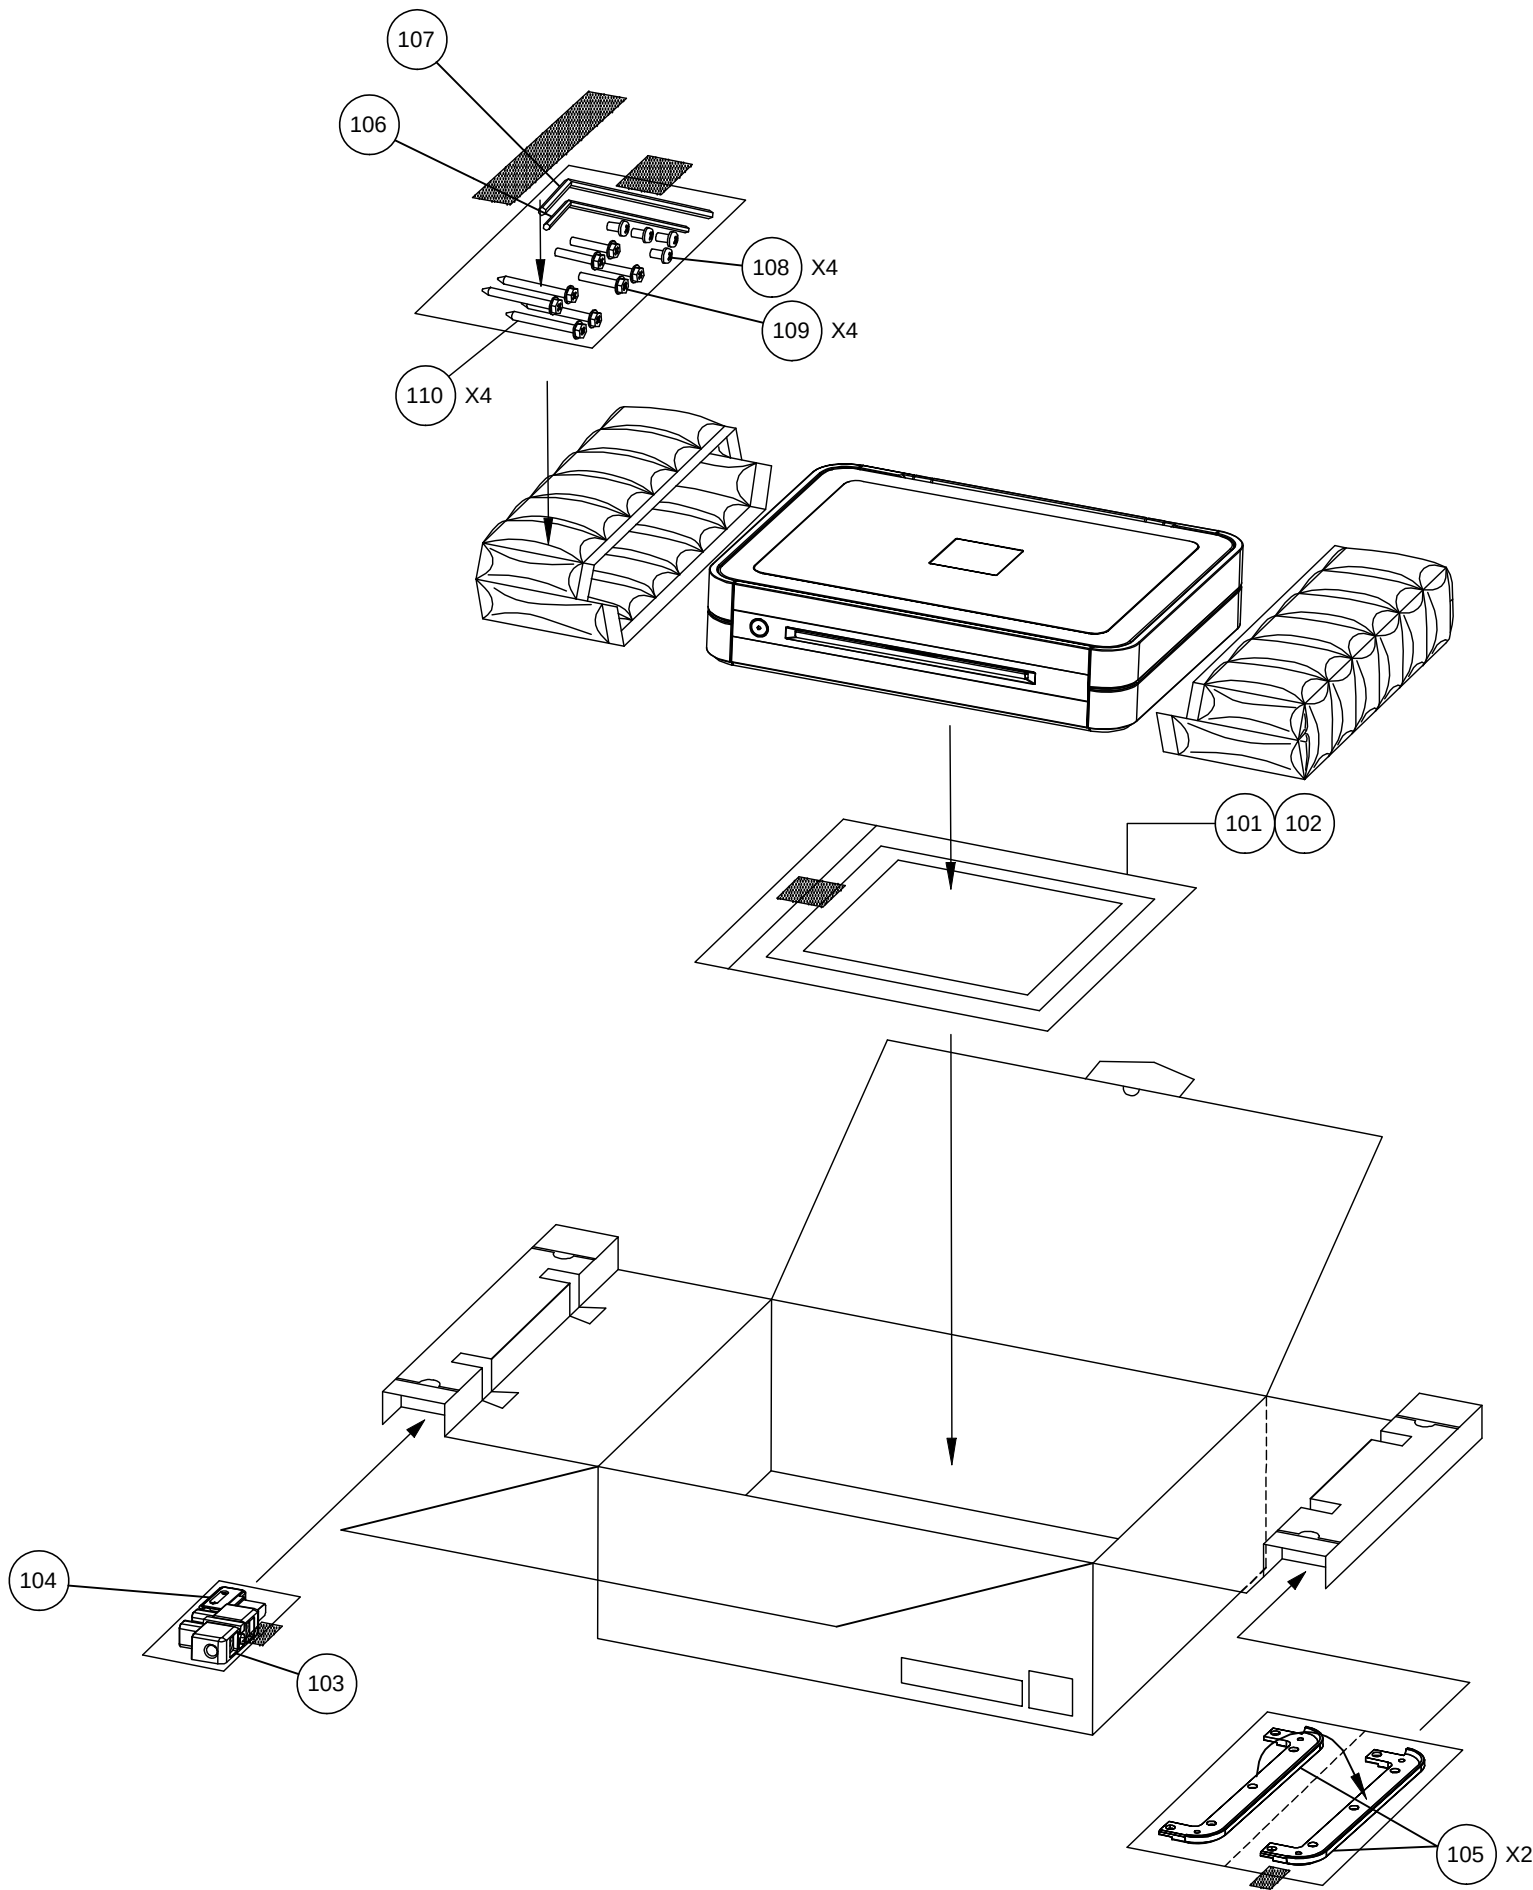

| MODEL | Symbol No.          | Parts No.   | Description             |
|-------|---------------------|-------------|-------------------------|
| #1    | <a href="#">101</a> | 68-13530Z47 | MANUAL,OWNER'S(AO),(GO) |
| \$1   | <a href="#">101</a> | 68-13530Z47 | MANUAL,OWNER'S(AO),(GO) |
| %1    | <a href="#">101</a> | 68-13530Z47 | MANUAL,OWNER'S(AO),(GO) |
| &1    | <a href="#">101</a> | 68-16909Z18 | MANUAL,OWNER'S(AOCHR)   |
| \$1   | <a href="#">102</a> | 68-13530Z48 | MANUAL,OWNER'S(I,G,S)   |
|       | <a href="#">103</a> | 09E41475S01 | CONN,P-PLUG             |
|       | <a href="#">104</a> | 09E41474S01 | CONN,SPK-PLUG           |
|       | <a href="#">105</a> | 43E41458S01 | SPACER,STACKING         |
|       | <a href="#">106</a> | 03E36691S01 | WRENCH,2X2.3            |
|       | <a href="#">107</a> | 47E35195S01 | WRENCH,4X4.6            |
|       | <a href="#">108</a> | 03E41468S01 | SCR,M3X7(B)(BLK)        |
|       | <a href="#">109</a> | 03E41470S01 | SCR,M4X24(HW)(BLK)      |
|       | <a href="#">110</a> | 03E41472S01 | SCR,M4X36(HW)(BLK)      |

Mark Model Code

#1 PDX-M6(North American) Only,

\$1 PDX-M6(European) Only,

%1 PDX-M6(General Foreign) Only,

&1 PDX-M6(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board      | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|----------------|-----|-------|-----------------------|-------------|----------------------|
| MAIN-P.W.Board |     |       | <a href="#">C2101</a> | 08E41028S01 | CAP,CER. 22pF/50V    |
| MAIN-P.W.Board |     |       | <a href="#">C3001</a> | 08E37267S01 | CAP,CER. 0.047uF/25V |
| MAIN-P.W.Board |     |       | <a href="#">C3002</a> | 08E37267S01 | CAP,CER. 0.047uF/25V |
| MAIN-P.W.Board |     |       | <a href="#">C3003</a> | 08E41029S01 | CAP,CER. 330pF/50V   |
| MAIN-P.W.Board |     |       | <a href="#">C3004</a> | 08E41029S01 | CAP,CER. 330pF/50V   |
| MAIN-P.W.Board |     |       | <a href="#">C3005</a> | 08E41029S01 | CAP,CER. 330pF/50V   |
| MAIN-P.W.Board |     |       | <a href="#">C3006</a> | 08E41029S01 | CAP,CER. 330pF/50V   |
| MAIN-P.W.Board |     |       | <a href="#">C3007</a> | 08E36114S01 | CAP,CER. 0.22uF/16V  |
| MAIN-P.W.Board |     |       | <a href="#">C3008</a> | 08E36114S01 | CAP,CER. 0.22uF/16V  |
| MAIN-P.W.Board |     |       | <a href="#">C3101</a> | 08E38105S01 | CAP,CER. 270pF/50V   |
| MAIN-P.W.Board |     |       | <a href="#">C3102</a> | 08E38105S01 | CAP,CER. 270pF/50V   |
| MAIN-P.W.Board |     |       | <a href="#">C3103</a> | 08E41393S01 | CAP,CER.1200pF/50V   |
| MAIN-P.W.Board |     |       | <a href="#">C3104</a> | 08E41393S01 | CAP,CER.1200pF/50V   |
| MAIN-P.W.Board |     |       | <a href="#">C3105</a> | 08E41392S01 | CAP,CER.2200pF/50V   |
| MAIN-P.W.Board |     |       | <a href="#">C3106</a> | 08E41392S01 | CAP,CER.2200pF/50V   |
| MAIN-P.W.Board |     |       | <a href="#">C3107</a> | 08E37123S01 | CAP,CER. 0.33uF/16V  |
| MAIN-P.W.Board |     |       | <a href="#">C3108</a> | 08E37123S01 | CAP,CER. 0.33uF/16V  |
| MAIN-P.W.Board |     |       | <a href="#">C3109</a> | 08E41392S01 | CAP,CER.2200pF/50V   |
| MAIN-P.W.Board |     |       | <a href="#">C3110</a> | 08E41392S01 | CAP,CER.2200pF/50V   |
| MAIN-P.W.Board |     |       | <a href="#">C3111</a> | 08E41392S01 | CAP,CER.2200pF/50V   |
| MAIN-P.W.Board |     |       | <a href="#">C3112</a> | 08E41392S01 | CAP,CER.2200pF/50V   |
| MAIN-P.W.Board |     |       | <a href="#">C3113</a> | 08E41392S01 | CAP,CER.2200pF/50V   |
| MAIN-P.W.Board |     |       | <a href="#">C3114</a> | 08E41392S01 | CAP,CER.2200pF/50V   |
| MAIN-P.W.Board |     |       | <a href="#">C3115</a> | 08E36114S01 | CAP,CER. 0.22uF/16V  |
| MAIN-P.W.Board |     |       | <a href="#">C3116</a> | 08E36114S01 | CAP,CER. 0.22uF/16V  |
| MAIN-P.W.Board |     |       | <a href="#">C3117</a> | 08E36114S01 | CAP,CER. 0.22uF/16V  |
| MAIN-P.W.Board |     |       | <a href="#">C3118</a> | 08E36114S01 | CAP,CER. 0.22uF/16V  |
| MAIN-P.W.Board |     |       | <a href="#">C3119</a> | 08E41395S01 | CAP,CER.1500pF/50V   |
| MAIN-P.W.Board |     |       | <a href="#">C3120</a> | 08E41395S01 | CAP,CER.1500pF/50V   |
| MAIN-P.W.Board |     |       | <a href="#">C3121</a> | 08E41395S01 | CAP,CER.1500pF/50V   |
| MAIN-P.W.Board |     |       | <a href="#">C3122</a> | 08E41395S01 | CAP,CER.1500pF/50V   |
| MAIN-P.W.Board |     |       | <a href="#">C3201</a> | 08E37267S01 | CAP,CER. 0.047uF/25V |
| MAIN-P.W.Board |     |       | <a href="#">C3202</a> | 08E37267S01 | CAP,CER. 0.047uF/25V |
| MAIN-P.W.Board |     |       | <a href="#">C3203</a> | 08E41036S01 | CAP,CER. 1uF/16V     |
| MAIN-P.W.Board |     |       | <a href="#">C3204</a> | 08E41036S01 | CAP,CER. 1uF/16V     |
| MAIN-P.W.Board |     |       | <a href="#">C3623</a> | 08E41391S01 | CAP,CER. 0.47uF/25V  |
| MAIN-P.W.Board |     |       | <a href="#">C3624</a> | 08E41391S01 | CAP,CER. 0.47uF/25V  |
| MAIN-P.W.Board |     |       | <a href="#">C3629</a> | 08E37123S01 | CAP,CER. 0.33uF/16V  |
| MAIN-P.W.Board |     |       | <a href="#">C3630</a> | 08E38604S01 | CAP,CER. 1uF/50V     |
| MAIN-P.W.Board |     |       | <a href="#">C3631</a> | 08E38604S01 | CAP,CER. 1uF/50V     |
| MAIN-P.W.Board |     |       | <a href="#">C3632</a> | 08E37123S01 | CAP,CER. 0.33uF/16V  |
| MAIN-P.W.Board |     |       | <a href="#">C3701</a> | 08E37123S01 | CAP,CER. 0.33uF/16V  |

Mark Model Code

#1 PDX-M6(North American) Only,

\$1 PDX-M6(European) Only,

%1 PDX-M6(General Foreign) Only,

&1 PDX-M6(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board      | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|----------------|-----|-------|-----------------------|-------------|----------------------|
| MAIN-P.W.Board |     |       | <a href="#">C3702</a> | 08E37123S01 | CAP,CER. 0.33uF/16V  |
| MAIN-P.W.Board |     |       | <a href="#">C3703</a> | 08E37123S01 | CAP,CER. 0.33uF/16V  |
| MAIN-P.W.Board |     |       | <a href="#">C3704</a> | 08E37123S01 | CAP,CER. 0.33uF/16V  |
| MAIN-P.W.Board |     |       | <a href="#">C3709</a> | 08E39856S01 | CAP,CER.0.33uF/250V  |
| MAIN-P.W.Board |     |       | <a href="#">C3710</a> | 08E39856S01 | CAP,CER.0.33uF/250V  |
| MAIN-P.W.Board |     |       | <a href="#">C3711</a> | 08E39107S01 | CAP,CER.0.33uF/100V  |
| MAIN-P.W.Board |     |       | <a href="#">C3712</a> | 08E39107S01 | CAP,CER.0.33uF/100V  |
| MAIN-P.W.Board |     |       | <a href="#">C3713</a> | 08E39107S01 | CAP,CER.0.33uF/100V  |
| MAIN-P.W.Board |     |       | <a href="#">C3714</a> | 08E39107S01 | CAP,CER.0.33uF/100V  |
| MAIN-P.W.Board |     |       | <a href="#">C3721</a> | 08E39856S01 | CAP,CER.0.33uF/250V  |
| MAIN-P.W.Board |     |       | <a href="#">C3722</a> | 08E39856S01 | CAP,CER.0.33uF/250V  |
| MAIN-P.W.Board |     |       | <a href="#">C3723</a> | 08E39107S01 | CAP,CER.0.33uF/100V  |
| MAIN-P.W.Board |     |       | <a href="#">C3724</a> | 08E39107S01 | CAP,CER.0.33uF/100V  |
| MAIN-P.W.Board |     |       | <a href="#">C3725</a> | 08E39107S01 | CAP,CER.0.33uF/100V  |
| MAIN-P.W.Board |     |       | <a href="#">C3726</a> | 08E39107S01 | CAP,CER.0.33uF/100V  |
| MAIN-P.W.Board |     |       | <a href="#">C3801</a> | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| MAIN-P.W.Board |     |       | <a href="#">C3802</a> | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| MAIN-P.W.Board |     |       | <a href="#">C3851</a> | 08E37267S01 | CAP,CER. 0.047uF/25V |
| MAIN-P.W.Board |     |       | <a href="#">C4001</a> | 08E39103S01 | CAP,CER.1000pF/500V  |
| MAIN-P.W.Board |     |       | <a href="#">C4002</a> | 08E39103S01 | CAP,CER.1000pF/500V  |
| MAIN-P.W.Board |     |       | <a href="#">C4003</a> | 08E41404S01 | CAP,MYL. 2.2uF/250V  |
| MAIN-P.W.Board |     |       | <a href="#">C4004</a> | 08E41404S01 | CAP,MYL. 2.2uF/250V  |
| MAIN-P.W.Board |     |       | <a href="#">C4005</a> | 08E39103S01 | CAP,CER.1000pF/500V  |
| MAIN-P.W.Board |     |       | <a href="#">C4006</a> | 08E39105S01 | CAP,CER.1500pF/500V  |
| MAIN-P.W.Board |     |       | <a href="#">C4007</a> | 08E39103S01 | CAP,CER.1000pF/500V  |
| MAIN-P.W.Board |     |       | <a href="#">C4208</a> | 08E39188S01 | CAP,CER.2200pF/500V  |
| MAIN-P.W.Board |     |       | <a href="#">C4209</a> | 08E39188S01 | CAP,CER.2200pF/500V  |
| MAIN-P.W.Board |     |       | <a href="#">C4210</a> | 08E39103S01 | CAP,CER.1000pF/500V  |
| MAIN-P.W.Board |     |       | <a href="#">C4211</a> | 08E39103S01 | CAP,CER.1000pF/500V  |
| MAIN-P.W.Board |     |       | <a href="#">C4701</a> | 08E37267S01 | CAP,CER. 0.047uF/25V |
| MAIN-P.W.Board |     |       | <a href="#">C4702</a> | 08E35412S01 | CAP,CER. 1500pF/50V  |
| MAIN-P.W.Board |     |       | <a href="#">C4703</a> | 08E35412S01 | CAP,CER. 1500pF/50V  |
| MAIN-P.W.Board |     |       | <a href="#">C4705</a> | 08E37267S01 | CAP,CER. 0.047uF/25V |
| MAIN-P.W.Board |     |       | <a href="#">C4706</a> | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| MAIN-P.W.Board |     |       | <a href="#">C4707</a> | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| MAIN-P.W.Board |     |       | <a href="#">C4708</a> | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| MAIN-P.W.Board |     |       | <a href="#">C4709</a> | 08E41389S01 | CAP,CER. 3300pF/50V  |
| MAIN-P.W.Board |     |       | <a href="#">C4901</a> | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| MAIN-P.W.Board |     |       | <a href="#">C4902</a> | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| MAIN-P.W.Board |     |       | <a href="#">C4903</a> | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| MAIN-P.W.Board |     |       | <a href="#">C4904</a> | 08E41394S01 | CAP,CER.470pF/630V   |
| MAIN-P.W.Board |     |       | <a href="#">C5001</a> | 08E37122S01 | CAP,CER. 0.1uF/25V   |

Mark Model Code

#1 PDX-M6(North American) Only,

\$1 PDX-M6(European) Only,

%1 PDX-M6(General Foreign) Only,

&1 PDX-M6(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board      | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|----------------|-----|-------|-----------------------|-------------|----------------------|
| MAIN-P.W.Board |     |       | <a href="#">C5002</a> | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| MAIN-P.W.Board |     |       | <a href="#">C5003</a> | 08E37121S01 | CAP,CER. 0.022uF/50V |
| MAIN-P.W.Board |     |       | <a href="#">C5004</a> | 08E40362S01 | CAP,CER. 6800pF/50V  |
| MAIN-P.W.Board |     |       | <a href="#">C5005</a> | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| MAIN-P.W.Board |     |       | <a href="#">C5006</a> | 08E41031S01 | CAP,CER. 0.01uF/50V  |
| MAIN-P.W.Board |     |       | <a href="#">C5007</a> | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| MAIN-P.W.Board |     |       | <a href="#">C5009</a> | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| MAIN-P.W.Board |     |       | <a href="#">C5010</a> | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| MAIN-P.W.Board |     |       | <a href="#">C5011</a> | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| MAIN-P.W.Board |     |       | <a href="#">C5012</a> | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| MAIN-P.W.Board |     |       | <a href="#">C5013</a> | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| MAIN-P.W.Board |     |       | <a href="#">C5014</a> | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| MAIN-P.W.Board |     |       | <a href="#">C5015</a> | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| MAIN-P.W.Board |     |       | <a href="#">C5016</a> | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| MAIN-P.W.Board |     |       | <a href="#">C5017</a> | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| MAIN-P.W.Board |     |       | <a href="#">C5018</a> | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| MAIN-P.W.Board |     |       | <a href="#">C5019</a> | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| MAIN-P.W.Board |     |       | <a href="#">C5501</a> | 08E35412S01 | CAP,CER. 1500pF/50V  |
| MAIN-P.W.Board |     |       | <a href="#">C5502</a> | 08E35412S01 | CAP,CER. 1500pF/50V  |
| MAIN-P.W.Board |     |       | <a href="#">C5531</a> | 08E37266S01 | CAP,CER. 0.015uF/50V |
| MAIN-P.W.Board |     |       | <a href="#">C6551</a> | 08E41030S01 | CAP,CER. 1000pF/50V  |
| MAIN-P.W.Board |     |       | <a href="#">C8001</a> | 08E37118S01 | CAP,CER. 220pF/50V   |
| MAIN-P.W.Board |     |       | <a href="#">C8002</a> | 08E37118S01 | CAP,CER. 220pF/50V   |
| MAIN-P.W.Board |     |       | <a href="#">C8003</a> | 08E37118S01 | CAP,CER. 220pF/50V   |
| MAIN-P.W.Board |     |       | <a href="#">C8901</a> | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| MAIN-P.W.Board |     |       | <a href="#">C8902</a> | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| MAIN-P.W.Board |     |       | <a href="#">C9001</a> | 08E39106S01 | CAP,CER.100pF/500V   |
| MAIN-P.W.Board |     |       | <a href="#">C9004</a> | 08E39106S01 | CAP,CER.100pF/500V   |
| MAIN-P.W.Board |     |       | <a href="#">C9005</a> | 08E39104S01 | CAP,CER.0.01uF/500V  |
| MAIN-P.W.Board |     |       | <a href="#">C9161</a> | 08E41031S01 | CAP,CER. 0.01uF/50V  |
| MAIN-P.W.Board |     |       | <a href="#">C9351</a> | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| MAIN-P.W.Board |     |       | <a href="#">C9352</a> | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| MAIN-P.W.Board |     |       | <a href="#">C9353</a> | 08E41392S01 | CAP,CER.2200pF/50V   |
| MAIN-P.W.Board |     |       | <a href="#">C9354</a> | 08E41031S01 | CAP,CER. 0.01uF/50V  |
| MAIN-P.W.Board |     |       | <a href="#">C9355</a> | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| MAIN-P.W.Board |     |       | <a href="#">C9356</a> | 08E39188S01 | CAP,CER.2200pF/500V  |
| MAIN-P.W.Board |     |       | <a href="#">C9357</a> | 08E39188S01 | CAP,CER.2200pF/500V  |
| MAIN-P.W.Board |     |       | <a href="#">C9358</a> | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| MAIN-P.W.Board |     |       | <a href="#">C9359</a> | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| MAIN-P.W.Board |     |       | <a href="#">C9701</a> | 08E41030S01 | CAP,CER. 1000pF/50V  |
| MAIN-P.W.Board |     |       | <a href="#">C9702</a> | 08E41391S01 | CAP,CER. 0.47uF/25V  |
| MAIN-P.W.Board |     |       | <a href="#">C9703</a> | 08E41390S01 | CAP,CER. 0.01uF/50V  |

Mark Model Code

#1 PDX-M6(North American) Only,

\$1 PDX-M6(European) Only,

%1 PDX-M6(General Foreign) Only,

&1 PDX-M6(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board      | MIS                                                                               | MODEL | Ref.                   | Parts No.   | Parts Name          |
|----------------|-----------------------------------------------------------------------------------|-------|------------------------|-------------|---------------------|
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C9704</a>  | 08E41031S01 | CAP,CER. 0.01uF/50V |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C9705</a>  | 08E37122S01 | CAP,CER. 0.1uF/25V  |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C9706</a>  | 08E41030S01 | CAP,CER. 1000pF/50V |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C9801</a>  | 08E37122S01 | CAP,CER. 0.1uF/25V  |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C9802</a>  | 08E37122S01 | CAP,CER. 0.1uF/25V  |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C9803</a>  | 08E41391S01 | CAP,CER. 0.47uF/25V |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C9804</a>  | 08E41391S01 | CAP,CER. 0.47uF/25V |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C9809</a>  | 08E41391S01 | CAP,CER. 0.47uF/25V |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C9810</a>  | 08E41391S01 | CAP,CER. 0.47uF/25V |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C9811</a>  | 08E41391S01 | CAP,CER. 0.47uF/25V |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C9812</a>  | 08E41391S01 | CAP,CER. 0.47uF/25V |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C9901</a>  | 08E39104S01 | CAP,CER.0.01uF/500V |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C9903</a>  | 08E39104S01 | CAP,CER.0.01uF/500V |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C9906</a>  | 08E40759S01 | CAP,CER.1000pF/100V |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C9907</a>  | 08E40759S01 | CAP,CER.1000pF/100V |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C9908</a>  | 08E40759S01 | CAP,CER.1000pF/100V |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C9909</a>  | 08E40759S01 | CAP,CER.1000pF/100V |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C9911</a>  | 08E39105S01 | CAP,CER.1500pF/500V |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C9912</a>  | 08E39105S01 | CAP,CER.1500pF/500V |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C9913</a>  | 08E39105S01 | CAP,CER.1500pF/500V |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C9914</a>  | 08E39105S01 | CAP,CER.1500pF/500V |
| MAIN-P.W.Board |  |       | <a href="#">CB4201</a> | 09E41445S01 | CONN,SPK-CON 2P     |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">CB8001</a> | 09E41441S01 | CONN,WTB 2P         |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">CH6551</a> | 09E41444S01 | CONN,20P            |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">CL5001</a> | 91E40781S01 | RESONATOR,7.7MHz    |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">D3001</a>  | 48E41411S01 | DIODE,DAP202U       |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">D3002</a>  | 48E41411S01 | DIODE,DAP202U       |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">D3608</a>  | 48E41409S01 | DIODE,1SR159        |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">D3609</a>  | 48E41409S01 | DIODE,1SR159        |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">D3610</a>  | 48E41409S01 | DIODE,1SR159        |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">D3611</a>  | 48E41409S01 | DIODE,1SR159        |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">D3709</a>  | 48E41413S01 | DIODE,SA10LA03      |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">D3710</a>  | 48E41413S01 | DIODE,SA10LA03      |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">D3711</a>  | 48E41413S01 | DIODE,SA10LA03      |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">D3712</a>  | 48E41413S01 | DIODE,SA10LA03      |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">D4901</a>  | 48E41414S01 | DIODE,RF071M2S      |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">D4902</a>  | 48E41414S01 | DIODE,RF071M2S      |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">D4903</a>  | 48E41414S01 | DIODE,RF071M2S      |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">D4904</a>  | 48E41414S01 | DIODE,RF071M2S      |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">D5001</a>  | 48E40338S01 | DIODE,KDR720E       |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">D5002</a>  | 48E39121S01 | DIODE,GN1D          |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">D5003</a>  | 48E36568S01 | DIODE,DAN202K       |

Mark Model Code

#1 PDX-M6(North American) Only,

\$1 PDX-M6(European) Only,

%1 PDX-M6(General Foreign) Only,

&1 PDX-M6(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board      | MIS                                                                                 | MODEL | Ref.                  | Parts No.   | Parts Name         |
|----------------|-------------------------------------------------------------------------------------|-------|-----------------------|-------------|--------------------|
| MAIN-P.W.Board |                                                                                     |       | <a href="#">D9161</a> | 48E39121S01 | DIODE,GN1D         |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">D9501</a> | 48E41046S01 | DIODE,1SS355       |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">D9502</a> | 48E36568S01 | DIODE,DAN202K      |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">D9801</a> | 48E39388S01 | DIODE,MURA110      |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">D9802</a> | 48E39388S01 | DIODE,MURA110      |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">D9913</a> | 48E41410S01 | DIODE,D30XBN20     |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">E3701</a> | 23E39862S01 | CAP,ELY. 10uF/200V |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">E3702</a> | 23E39862S01 | CAP,ELY. 10uF/200V |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">E3703</a> | 23E39862S01 | CAP,ELY. 10uF/200V |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">E3704</a> | 23E39862S01 | CAP,ELY. 10uF/200V |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">E4701</a> | 23E41396S01 | CAP,ELY.100uF/6.3V |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">E4901</a> | 23E40369S01 | CAP,ELY.470uF/16V  |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">E4902</a> | 23E40369S01 | CAP,ELY.470uF/16V  |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">E5001</a> | 23E40237S01 | CAP,ELY. 33uF/16V  |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">E5002</a> | 23E40237S01 | CAP,ELY. 33uF/16V  |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">E8901</a> | 23E40368S01 | CAP,ELY.10uF/25V   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">E8902</a> | 23E40369S01 | CAP,ELY.470uF/16V  |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">E9001</a> | 23E38013S01 | CAP,ELY. 470uF/25V |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">E9002</a> | 23E41401S01 | CAP,ELY.3300uF/25V |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">E9003</a> | 23E41401S01 | CAP,ELY.3300uF/25V |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">E9351</a> | 23E41397S01 | CAP,ELY.47uF/16V   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">E9352</a> | 23E41398S01 | CAP,ELY.22uF/16V   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">E9353</a> | 23E41398S01 | CAP,ELY.22uF/16V   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">E9354</a> | 23E38013S01 | CAP,ELY. 470uF/25V |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">E9355</a> | 23E40369S01 | CAP,ELY.470uF/16V  |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">E9356</a> | 23E40369S01 | CAP,ELY.470uF/16V  |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">E9357</a> | 23E40364S01 | CAP,ELY.100uF/25V  |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">E9358</a> | 23E38013S01 | CAP,ELY. 470uF/25V |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">E9702</a> | 23E41398S01 | CAP,ELY.22uF/16V   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">E9703</a> | 23E40333S01 | CAP,ELY. 330uF/10V |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">E9704</a> | 23E41398S01 | CAP,ELY.22uF/16V   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">E9705</a> | 23E40762S01 | CAP,ELY.100uF/16V  |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">E9901</a> | 23E41477S01 | CAP,ELY.2700uF/63V |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">E9902</a> | 23E41477S01 | CAP,ELY.2700uF/63V |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">E9903</a> | 23E41477S01 | CAP,ELY.2700uF/63V |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">E9904</a> | 23E41477S01 | CAP,ELY.2700uF/63V |
| MAIN-P.W.Board |  |       | <a href="#">F001</a>  | 65E36552S01 | FUSE,AUTO 20A      |
| MAIN-P.W.Board |  |       | <a href="#">F002</a>  | 65E36552S01 | FUSE,AUTO 20A      |
| MAIN-P.W.Board |  |       | <a href="#">F003</a>  | 65E36552S01 | FUSE,AUTO 20A      |
| MAIN-P.W.Board |  |       | <a href="#">F004</a>  | 65E36552S01 | FUSE,AUTO 20A      |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">F9902</a> | 65E41480S01 | FUSE,20A           |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">F9904</a> | 65E41480S01 | FUSE,20A           |

Mark Model Code

#1 PDX-M6(North American) Only,

\$1 PDX-M6(European) Only,

%1 PDX-M6(General Foreign) Only,

&1 PDX-M6(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board      | MIS                                                                               | MODEL | Ref.                   | Parts No.   | Parts Name          |
|----------------|-----------------------------------------------------------------------------------|-------|------------------------|-------------|---------------------|
| MAIN-P.W.Board |                                                                                   |       | <a href="#">F9905</a>  | 65E41480S01 | FUSE,20A            |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">F9907</a>  | 65E41480S01 | FUSE,20A            |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">F9910</a>  | 65E41480S01 | FUSE,20A            |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">F9911</a>  | 65E41480S01 | FUSE,20A            |
| MAIN-P.W.Board |  |       | <a href="#">HL9001</a> | 09E39445S01 | HOLDER,FUSE         |
| MAIN-P.W.Board |  |       | <a href="#">HL9002</a> | 09E39445S01 | HOLDER,FUSE         |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">IC3001</a> | 51E41429S01 | IC,BA4580RF         |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">IC3101</a> | 51E41430S01 | IC,BA4580RF         |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">IC3201</a> | 51E38067S01 | IC,KIC7S00FU        |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">IC3202</a> | 51E38067S01 | IC,KIC7S00FU        |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">IC3605</a> | 51E41426S01 | IC,98-1036TR        |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">IC3606</a> | 51E41426S01 | IC,98-1036TR        |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">IC3851</a> | 51E39597S01 | IC,BA2903FVM        |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">IC4701</a> | 51E39596S01 | IC,BA2901FV         |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">IC4702</a> | 51E40343S01 | IC,74VHC74MTCX      |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">IC4901</a> | 51E41428S01 | IC,BAJ2CC0FP        |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">IC5001</a> | 51E36635S01 | IC,NJU7222U50       |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">IC5002</a> | 51E39139S01 | IC,BD5243G          |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">IC5003</a> | 51E40344S01 | IC,BD5240G          |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">IC5004</a> | 51-04615Z01 | IC,TMP87C847UG -QT  |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">IC5005</a> | 51E40773S01 | IC,KIC7SH04FU       |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">IC5006</a> | 51E39456S01 | IC,KIC7SZ32FU       |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">IC8901</a> | 51E41428S01 | IC,BAJ2CC0FP        |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">IC9351</a> | 51E39585S01 | IC,NCV494BDR2G      |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">IC9702</a> | 51E39585S01 | IC,NCV494BDR2G      |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">IC9801</a> | 51E41427S01 | IC,LM5109B          |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">IC9802</a> | 51E41427S01 | IC,LM5109B          |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">L4001</a>  | 24E41436S01 | COIL,CHOKE 12uH     |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">L4002</a>  | 24E41436S01 | COIL,CHOKE 12uH     |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">L4901</a>  | 24E41433S01 | COIL,IND. 3.3uH     |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">L9001</a>  | 24E39739S01 | COIL,IND. 10uH      |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">L9351</a>  | 24E41434S01 | COIL,IND. 470uH     |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">L9352</a>  | 24E41434S01 | COIL,IND. 470uH     |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">LD8001</a> | 48E41405S01 | LED,SML512BC5T BLUE |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">LD8002</a> | 48E41405S01 | LED,SML512BC5T BLUE |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">LD8003</a> | 48E41406S01 | LED,SML-512UW RED   |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">Q3001</a>  | 48E41420S01 | TR,IMT4             |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">Q3002</a>  | 48E41420S01 | TR,IMT4             |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">Q3003</a>  | 48E40339S01 | TR,2N5400S          |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">Q3004</a>  | 48E40339S01 | TR,2N5400S          |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">Q3005</a>  | 48E41420S01 | TR,IMT4             |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">Q3006</a>  | 48E41420S01 | TR,IMT4             |

Mark Model Code

#1 PDX-M6(North American) Only,

\$1 PDX-M6(European) Only,

%1 PDX-M6(General Foreign) Only,

&1 PDX-M6(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board      | MIS | MODEL | Ref.                  | Parts No.   | Parts Name      |
|----------------|-----|-------|-----------------------|-------------|-----------------|
| MAIN-P.W.Board |     |       | <a href="#">Q3007</a> | 48E41425S01 | TR,IMX2         |
| MAIN-P.W.Board |     |       | <a href="#">Q3008</a> | 48E41425S01 | TR,IMX2         |
| MAIN-P.W.Board |     |       | <a href="#">Q3009</a> | 48E41420S01 | TR,IMT4         |
| MAIN-P.W.Board |     |       | <a href="#">Q3010</a> | 48E41051S01 | TR,2SC2412K     |
| MAIN-P.W.Board |     |       | <a href="#">Q3011</a> | 48E41051S01 | TR,2SC2412K     |
| MAIN-P.W.Board |     |       | <a href="#">Q3012</a> | 48E41420S01 | TR,IMT4         |
| MAIN-P.W.Board |     |       | <a href="#">Q3101</a> | 48E41422S01 | TR,UMX2N        |
| MAIN-P.W.Board |     |       | <a href="#">Q3102</a> | 48E41422S01 | TR,UMX2N        |
| MAIN-P.W.Board |     |       | <a href="#">Q3103</a> | 48E41424S01 | TR,UMT2N        |
| MAIN-P.W.Board |     |       | <a href="#">Q3104</a> | 48E41424S01 | TR,UMT2N        |
| MAIN-P.W.Board |     |       | <a href="#">Q3105</a> | 48E41423S01 | TR,UMY1N        |
| MAIN-P.W.Board |     |       | <a href="#">Q3106</a> | 48E41423S01 | TR,UMY1N        |
| MAIN-P.W.Board |     |       | <a href="#">Q3201</a> | 48E40770S01 | TR,DTA144EE     |
| MAIN-P.W.Board |     |       | <a href="#">Q3202</a> | 48E40770S01 | TR,DTA144EE     |
| MAIN-P.W.Board |     |       | <a href="#">Q3203</a> | 48E37097S01 | TR,DTC114EE     |
| MAIN-P.W.Board |     |       | <a href="#">Q3204</a> | 48E37097S01 | TR,DTC114EE     |
| MAIN-P.W.Board |     |       | <a href="#">Q3701</a> | 48E41418S01 | TR,2SC5866      |
| MAIN-P.W.Board |     |       | <a href="#">Q3703</a> | 48E41418S01 | TR,2SC5866      |
| MAIN-P.W.Board |     |       | <a href="#">Q3706</a> | 48E41418S01 | TR,2SC5866      |
| MAIN-P.W.Board |     |       | <a href="#">Q3708</a> | 48E41418S01 | TR,2SC5866      |
| MAIN-P.W.Board |     |       | <a href="#">Q3709</a> | 48E41416S01 | FET,IRFB5615    |
| MAIN-P.W.Board |     |       | <a href="#">Q3710</a> | 48E41416S01 | FET,IRFB5615    |
| MAIN-P.W.Board |     |       | <a href="#">Q3715</a> | 48E41416S01 | FET,IRFB5615    |
| MAIN-P.W.Board |     |       | <a href="#">Q3716</a> | 48E41416S01 | FET,IRFB5615    |
| MAIN-P.W.Board |     |       | <a href="#">Q3717</a> | 48E41419S01 | TR,2SA2094      |
| MAIN-P.W.Board |     |       | <a href="#">Q3718</a> | 48E41419S01 | TR,2SA2094      |
| MAIN-P.W.Board |     |       | <a href="#">Q3723</a> | 48E41419S01 | TR,2SA2094      |
| MAIN-P.W.Board |     |       | <a href="#">Q3724</a> | 48E41419S01 | TR,2SA2094      |
| MAIN-P.W.Board |     |       | <a href="#">Q4702</a> | 48E40770S01 | TR,DTA144EE     |
| MAIN-P.W.Board |     |       | <a href="#">Q4703</a> | 48E40770S01 | TR,DTA144EE     |
| MAIN-P.W.Board |     |       | <a href="#">Q4704</a> | 48E40770S01 | TR,DTA144EE     |
| MAIN-P.W.Board |     |       | <a href="#">Q5001</a> | 48E37097S01 | TR,DTC114EE     |
| MAIN-P.W.Board |     |       | <a href="#">Q5002</a> | 48E37097S01 | TR,DTC114EE     |
| MAIN-P.W.Board |     |       | <a href="#">Q8002</a> | 48E40340S01 | TR,DTC143XKA    |
| MAIN-P.W.Board |     |       | <a href="#">Q8003</a> | 48E40340S01 | TR,DTC143XKA    |
| MAIN-P.W.Board |     |       | <a href="#">Q9161</a> | 48E41051S01 | TR,2SC2412K     |
| MAIN-P.W.Board |     |       | <a href="#">Q9162</a> | 48E39125S01 | TR,KTB1241      |
| MAIN-P.W.Board |     |       | <a href="#">Q9351</a> | 48E40769S01 | TR,DTA124EE     |
| MAIN-P.W.Board |     |       | <a href="#">Q9352</a> | 48E41412S01 | DIODE,RF051UA1D |
| MAIN-P.W.Board |     |       | <a href="#">Q9353</a> | 48E41421S01 | TR,IMT17        |
| MAIN-P.W.Board |     |       | <a href="#">Q9354</a> | 48E41415S01 | FET,SP8K31      |
| MAIN-P.W.Board |     |       | <a href="#">Q9355</a> | 48E41412S01 | DIODE,RF051UA1D |

Mark Model Code

#1 PDX-M6(North American) Only,

\$1 PDX-M6(European) Only,

%1 PDX-M6(General Foreign) Only,

&1 PDX-M6(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board      | MIS | MODEL | Ref.                  | Parts No.   | Parts Name         |
|----------------|-----|-------|-----------------------|-------------|--------------------|
| MAIN-P.W.Board |     |       | <a href="#">Q9356</a> | 48E41412S01 | DIODE,RF051UA1D    |
| MAIN-P.W.Board |     |       | <a href="#">Q9501</a> | 48E37188S01 | TR,DTC144EE        |
| MAIN-P.W.Board |     |       | <a href="#">Q9502</a> | 48E39883S01 | TR,2SC4102         |
| MAIN-P.W.Board |     |       | <a href="#">Q9503</a> | 48E39883S01 | TR,2SC4102         |
| MAIN-P.W.Board |     |       | <a href="#">Q9706</a> | 48E40769S01 | TR,DTA124EE        |
| MAIN-P.W.Board |     |       | <a href="#">Q9803</a> | 48E41418S01 | TR,2SC5866         |
| MAIN-P.W.Board |     |       | <a href="#">Q9804</a> | 48E41419S01 | TR,2SA2094         |
| MAIN-P.W.Board |     |       | <a href="#">Q9807</a> | 48E41419S01 | TR,2SA2094         |
| MAIN-P.W.Board |     |       | <a href="#">Q9808</a> | 48E41418S01 | TR,2SC5866         |
| MAIN-P.W.Board |     |       | <a href="#">Q9809</a> | 48E41418S01 | TR,2SC5866         |
| MAIN-P.W.Board |     |       | <a href="#">Q9810</a> | 48E41419S01 | TR,2SA2094         |
| MAIN-P.W.Board |     |       | <a href="#">Q9813</a> | 48E41419S01 | TR,2SA2094         |
| MAIN-P.W.Board |     |       | <a href="#">Q9814</a> | 48E41418S01 | TR,2SC5866         |
| MAIN-P.W.Board |     |       | <a href="#">Q9902</a> | 48E41417S01 | FET,IRFP4004       |
| MAIN-P.W.Board |     |       | <a href="#">Q9904</a> | 48E41417S01 | FET,IRFP4004       |
| MAIN-P.W.Board |     |       | <a href="#">Q9905</a> | 48E41417S01 | FET,IRFP4004       |
| MAIN-P.W.Board |     |       | <a href="#">Q9907</a> | 48E41417S01 | FET,IRFP4004       |
| MAIN-P.W.Board |     |       | <a href="#">R3001</a> | 06E36622S01 | RES,CF. 100K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R3002</a> | 06E36622S01 | RES,CF. 100K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R3003</a> | 06E41373S01 | RES,CF. 100-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3004</a> | 06E41373S01 | RES,CF. 100-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3005</a> | 06E41381S01 | RES,CF. 24K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3006</a> | 06E40187S01 | RES,CF. 1K-1/16    |
| MAIN-P.W.Board |     |       | <a href="#">R3007</a> | 06E40187S01 | RES,CF. 1K-1/16    |
| MAIN-P.W.Board |     |       | <a href="#">R3008</a> | 06E40229S01 | RES,CF. 1.5K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R3009</a> | 06E40229S01 | RES,CF. 1.5K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R3010</a> | 06E40229S01 | RES,CF. 1.5K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R3011</a> | 06E40229S01 | RES,CF. 1.5K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R3012</a> | 06E40229S01 | RES,CF. 1.5K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R3013</a> | 06E40229S01 | RES,CF. 1.5K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R3014</a> | 06E40229S01 | RES,CF. 1.5K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R3015</a> | 06E40229S01 | RES,CF. 1.5K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R3016</a> | 06E35133S01 | RES,CF. 5.6K-1/4W  |
| MAIN-P.W.Board |     |       | <a href="#">R3017</a> | 06E36583S01 | RES,CF. 0-1/4W     |
| MAIN-P.W.Board |     |       | <a href="#">R3018</a> | 06E36583S01 | RES,CF. 0-1/4W     |
| MAIN-P.W.Board |     |       | <a href="#">R3019</a> | 06E35133S01 | RES,CF. 5.6K-1/4W  |
| MAIN-P.W.Board |     |       | <a href="#">R3020</a> | 06E35133S01 | RES,CF. 5.6K-1/4W  |
| MAIN-P.W.Board |     |       | <a href="#">R3021</a> | 06E36583S01 | RES,CF. 0-1/4W     |
| MAIN-P.W.Board |     |       | <a href="#">R3022</a> | 06E36583S01 | RES,CF. 0-1/4W     |
| MAIN-P.W.Board |     |       | <a href="#">R3023</a> | 06E35133S01 | RES,CF. 5.6K-1/4W  |
| MAIN-P.W.Board |     |       | <a href="#">R3024</a> | 06E39850S01 | RES,CF. 2K-1/4W    |
| MAIN-P.W.Board |     |       | <a href="#">R3025</a> | 06E39850S01 | RES,CF. 2K-1/4W    |

Mark Model Code

#1 PDX-M6(North American) Only,

\$1 PDX-M6(European) Only,

%1 PDX-M6(General Foreign) Only,

&1 PDX-M6(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board      | MIS | MODEL | Ref.                  | Parts No.   | Parts Name         |
|----------------|-----|-------|-----------------------|-------------|--------------------|
| MAIN-P.W.Board |     |       | <a href="#">R3026</a> | 06E39850S01 | RES,CF. 2K-1/4W    |
| MAIN-P.W.Board |     |       | <a href="#">R3027</a> | 06E39850S01 | RES,CF. 2K-1/4W    |
| MAIN-P.W.Board |     |       | <a href="#">R3036</a> | 06E40736S01 | RES,CF. 680-1/10W  |
| MAIN-P.W.Board |     |       | <a href="#">R3037</a> | 06E40736S01 | RES,CF. 680-1/10W  |
| MAIN-P.W.Board |     |       | <a href="#">R3038</a> | 06E40231S01 | RES,CF. 2.7K-1/10W |
| MAIN-P.W.Board |     |       | <a href="#">R3039</a> | 06E40231S01 | RES,CF. 2.7K-1/10W |
| MAIN-P.W.Board |     |       | <a href="#">R3040</a> | 06E40736S01 | RES,CF. 680-1/10W  |
| MAIN-P.W.Board |     |       | <a href="#">R3041</a> | 06E40736S01 | RES,CF. 680-1/10W  |
| MAIN-P.W.Board |     |       | <a href="#">R3042</a> | 06E40734S01 | RES,CF. 560-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3043</a> | 06E40734S01 | RES,CF. 560-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3044</a> | 06E36463S01 | RES,CF. 10K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3045</a> | 06E36463S01 | RES,CF. 10K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3046</a> | 06E40736S01 | RES,CF. 680-1/10W  |
| MAIN-P.W.Board |     |       | <a href="#">R3047</a> | 06E40736S01 | RES,CF. 680-1/10W  |
| MAIN-P.W.Board |     |       | <a href="#">R3048</a> | 06E40229S01 | RES,CF. 1.5K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R3049</a> | 06E40229S01 | RES,CF. 1.5K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R3050</a> | 06E40983S01 | RES,CF. 220-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3051</a> | 06E40983S01 | RES,CF. 220-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3052</a> | 06E31680S01 | RES,CF. 680-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3053</a> | 06E31680S01 | RES,CF. 680-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3056</a> | 06E41381S01 | RES,CF. 24K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3057</a> | 06E41381S01 | RES,CF. 24K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3101</a> | 06E40737S01 | RES,CF. 820-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3102</a> | 06E40737S01 | RES,CF. 820-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3103</a> | 06E40737S01 | RES,CF. 820-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3104</a> | 06E40737S01 | RES,CF. 820-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3105</a> | 06E40737S01 | RES,CF. 820-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3106</a> | 06E40737S01 | RES,CF. 820-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3107</a> | 06E40737S01 | RES,CF. 820-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3108</a> | 06E40737S01 | RES,CF. 820-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3109</a> | 06E40315S01 | RES,CF. 1.2K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R3110</a> | 06E40315S01 | RES,CF. 1.2K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R3111</a> | 06E40315S01 | RES,CF. 1.2K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R3112</a> | 06E40315S01 | RES,CF. 1.2K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R3113</a> | 06E41386S01 | RES,CF. 10K-1/4W   |
| MAIN-P.W.Board |     |       | <a href="#">R3114</a> | 06E41386S01 | RES,CF. 10K-1/4W   |
| MAIN-P.W.Board |     |       | <a href="#">R3115</a> | 06E41386S01 | RES,CF. 10K-1/4W   |
| MAIN-P.W.Board |     |       | <a href="#">R3116</a> | 06E41386S01 | RES,CF. 10K-1/4W   |
| MAIN-P.W.Board |     |       | <a href="#">R3117</a> | 06E36463S01 | RES,CF. 10K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3118</a> | 06E36463S01 | RES,CF. 10K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3119</a> | 06E40745S01 | RES,CF. 47K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3120</a> | 06E40230S01 | RES,CF. 1.8K-1/10W |

Mark Model Code

#1 PDX-M6(North American) Only,

\$1 PDX-M6(European) Only,

%1 PDX-M6(General Foreign) Only,

&1 PDX-M6(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board      | MIS | MODEL | Ref.                  | Parts No.   | Parts Name         |
|----------------|-----|-------|-----------------------|-------------|--------------------|
| MAIN-P.W.Board |     |       | <a href="#">R3121</a> | 06E40745S01 | RES,CF. 47K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3122</a> | 06E40230S01 | RES,CF. 1.8K-1/10W |
| MAIN-P.W.Board |     |       | <a href="#">R3123</a> | 06E40745S01 | RES,CF. 47K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3124</a> | 06E40745S01 | RES,CF. 47K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3125</a> | 06E36463S01 | RES,CF. 10K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3126</a> | 06E36463S01 | RES,CF. 10K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3127</a> | 06E36616S01 | RES,CF. 100-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3128</a> | 06E36616S01 | RES,CF. 100-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3201</a> | 06E36463S01 | RES,CF. 10K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3202</a> | 06E36463S01 | RES,CF. 10K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3203</a> | 06E36463S01 | RES,CF. 10K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3204</a> | 06E36463S01 | RES,CF. 10K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3205</a> | 06E36616S01 | RES,CF. 100-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3206</a> | 06E36616S01 | RES,CF. 100-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3653</a> | 06E36585S01 | RES,CF. 2.2K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R3654</a> | 06E36585S01 | RES,CF. 2.2K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R3655</a> | 06E40738S01 | RES,CF. 3.3K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R3656</a> | 06E40320S01 | RES,CF. 8.2K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R3657</a> | 06E40320S01 | RES,CF. 8.2K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R3658</a> | 06E40738S01 | RES,CF. 3.3K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R3663</a> | 06E40738S01 | RES,CF. 3.3K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R3664</a> | 06E40320S01 | RES,CF. 8.2K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R3665</a> | 06E40320S01 | RES,CF. 8.2K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R3666</a> | 06E40738S01 | RES,CF. 3.3K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R3668</a> | 06E40321S01 | RES,CF. 10K-1/10W  |
| MAIN-P.W.Board |     |       | <a href="#">R3669</a> | 06E40321S01 | RES,CF. 10K-1/10W  |
| MAIN-P.W.Board |     |       | <a href="#">R3673</a> | 06E36559S01 | RES,CF. 47K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3674</a> | 06E40320S01 | RES,CF. 8.2K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R3675</a> | 06E40316S01 | RES,CF. 2K-1/10W   |
| MAIN-P.W.Board |     |       | <a href="#">R3676</a> | 06E40316S01 | RES,CF. 2K-1/10W   |
| MAIN-P.W.Board |     |       | <a href="#">R3677</a> | 06E40320S01 | RES,CF. 8.2K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R3678</a> | 06E36559S01 | RES,CF. 47K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R3679</a> | 06E41388S01 | RES,CF. 4.7-1/4W   |
| MAIN-P.W.Board |     |       | <a href="#">R3680</a> | 06E41388S01 | RES,CF. 4.7-1/4W   |
| MAIN-P.W.Board |     |       | <a href="#">R3701</a> | 06E41388S01 | RES,CF. 4.7-1/4W   |
| MAIN-P.W.Board |     |       | <a href="#">R3702</a> | 06E41388S01 | RES,CF. 4.7-1/4W   |
| MAIN-P.W.Board |     |       | <a href="#">R3703</a> | 06E41388S01 | RES,CF. 4.7-1/4W   |
| MAIN-P.W.Board |     |       | <a href="#">R3704</a> | 06E41388S01 | RES,CF. 4.7-1/4W   |
| MAIN-P.W.Board |     |       | <a href="#">R3705</a> | 06E37280S01 | RES,CF. 10-1/4W    |
| MAIN-P.W.Board |     |       | <a href="#">R3706</a> | 06E37280S01 | RES,CF. 10-1/4W    |
| MAIN-P.W.Board |     |       | <a href="#">R3707</a> | 06E37280S01 | RES,CF. 10-1/4W    |
| MAIN-P.W.Board |     |       | <a href="#">R3708</a> | 06E37280S01 | RES,CF. 10-1/4W    |

Mark Model Code

#1 PDX-M6(North American) Only,

\$1 PDX-M6(European) Only,

%1 PDX-M6(General Foreign) Only,

&1 PDX-M6(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board      | MIS | MODEL | Ref.                  | Parts No.   | Parts Name         |
|----------------|-----|-------|-----------------------|-------------|--------------------|
| MAIN-P.W.Board |     |       | <a href="#">R3709</a> | 06E37280S01 | RES,CF. 10-1/4W    |
| MAIN-P.W.Board |     |       | <a href="#">R3710</a> | 06E37280S01 | RES,CF. 10-1/4W    |
| MAIN-P.W.Board |     |       | <a href="#">R3715</a> | 06E37280S01 | RES,CF. 10-1/4W    |
| MAIN-P.W.Board |     |       | <a href="#">R3716</a> | 06E37280S01 | RES,CF. 10-1/4W    |
| MAIN-P.W.Board |     |       | <a href="#">R3717</a> | 06E36622S01 | RES,CF. 100K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R3718</a> | 06E36622S01 | RES,CF. 100K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R3739</a> | 06E36622S01 | RES,CF. 100K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R3740</a> | 06E36622S01 | RES,CF. 100K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R3851</a> | 06E40321S01 | RES,CF. 10K-1/10W  |
| MAIN-P.W.Board |     |       | <a href="#">R3852</a> | 06E40321S01 | RES,CF. 10K-1/10W  |
| MAIN-P.W.Board |     |       | <a href="#">R3853</a> | 06E40318S01 | RES,CF. 5.6K-1/10W |
| MAIN-P.W.Board |     |       | <a href="#">R4001</a> | 06E36559S01 | RES,CF. 47K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R4002</a> | 06E36559S01 | RES,CF. 47K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R4003</a> | 06E36583S01 | RES,CF. 0-1/4W     |
| MAIN-P.W.Board |     |       | <a href="#">R4004</a> | 06E36583S01 | RES,CF. 0-1/4W     |
| MAIN-P.W.Board |     |       | <a href="#">R4005</a> | 06E36583S01 | RES,CF. 0-1/4W     |
| MAIN-P.W.Board |     |       | <a href="#">R4006</a> | 06E36583S01 | RES,CF. 0-1/4W     |
| MAIN-P.W.Board |     |       | <a href="#">R4701</a> | 06E36600S01 | RES,CEMENT 0.01-5W |
| MAIN-P.W.Board |     |       | <a href="#">R4702</a> | 06E36600S01 | RES,CEMENT 0.01-5W |
| MAIN-P.W.Board |     |       | <a href="#">R4704</a> | 06E40315S01 | RES,CF. 1.2K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R4705</a> | 06E40976S01 | RES,CF. 10K-1/4W   |
| MAIN-P.W.Board |     |       | <a href="#">R4706</a> | 06E40976S01 | RES,CF. 10K-1/4W   |
| MAIN-P.W.Board |     |       | <a href="#">R4707</a> | 06E40976S01 | RES,CF. 10K-1/4W   |
| MAIN-P.W.Board |     |       | <a href="#">R4709</a> | 06E36586S01 | RES,CF. 22K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R4710</a> | 06E36586S01 | RES,CF. 22K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R4711</a> | 06E40357S01 | RES,CF. 82K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R4712</a> | 06E40736S01 | RES,CF. 680-1/10W  |
| MAIN-P.W.Board |     |       | <a href="#">R4713</a> | 06E40746S01 | RES,CF. 75K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R4714</a> | 06E40736S01 | RES,CF. 680-1/10W  |
| MAIN-P.W.Board |     |       | <a href="#">R4716</a> | 06E36463S01 | RES,CF. 10K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R4717</a> | 06E36463S01 | RES,CF. 10K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R4718</a> | 06E40976S01 | RES,CF. 10K-1/4W   |
| MAIN-P.W.Board |     |       | <a href="#">R4719</a> | 06E41384S01 | RES,CF. 160K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R4720</a> | 06E31680S01 | RES,CF. 680-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R4901</a> | 06E40355S01 | RES,CF. 22-1/4W    |
| MAIN-P.W.Board |     |       | <a href="#">R4903</a> | 06E28551S01 | RES,CF. 270K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R5001</a> | 06E40327S01 | RES,CF. 56K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R5002</a> | 06E40323S01 | RES,CF. 20K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R5003</a> | 06E40312S01 | RES,CF. 470-1/10W  |
| MAIN-P.W.Board |     |       | <a href="#">R5004</a> | 06E36463S01 | RES,CF. 10K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R5005</a> | 06E40317S01 | RES,CF. 3.9K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R5006</a> | 06E40318S01 | RES,CF. 5.6K-1/10W |

Mark Model Code

#1 PDX-M6(North American) Only,

\$1 PDX-M6(European) Only,

%1 PDX-M6(General Foreign) Only,

&1 PDX-M6(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board      | MIS | MODEL | Ref.                  | Parts No.   | Parts Name         |
|----------------|-----|-------|-----------------------|-------------|--------------------|
| MAIN-P.W.Board |     |       | <a href="#">R5007</a> | 06E40321S01 | RES,CF. 10K-1/10W  |
| MAIN-P.W.Board |     |       | <a href="#">R5008</a> | 06E40312S01 | RES,CF. 470-1/10W  |
| MAIN-P.W.Board |     |       | <a href="#">R5009</a> | 06E40315S01 | RES,CF. 1.2K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R5010</a> | 06E36463S01 | RES,CF. 10K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R5011</a> | 06E36463S01 | RES,CF. 10K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R5013</a> | 06E36464S01 | RES,CF. 0-1/16W    |
| MAIN-P.W.Board |     |       | <a href="#">R5014</a> | 06E36463S01 | RES,CF. 10K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R5015</a> | 06E41376S01 | RES,CF. 220-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R5016</a> | 06E39631S01 | RES,CF. 11K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R5017</a> | 06E40321S01 | RES,CF. 10K-1/10W  |
| MAIN-P.W.Board |     |       | <a href="#">R5018</a> | 06E40189S01 | RES,CF. 15K-1/10W  |
| MAIN-P.W.Board |     |       | <a href="#">R5019</a> | 06E36463S01 | RES,CF. 10K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R5020</a> | 06E36462S01 | RES,CF. 4.7K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R5021</a> | 06E36463S01 | RES,CF. 10K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R5022</a> | 06E36463S01 | RES,CF. 10K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R5501</a> | 06E39732S01 | RES,CF. 4.7-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R5502</a> | 06E41476S01 | RES,CF. 10-1/8W    |
| MAIN-P.W.Board |     |       | <a href="#">R5531</a> | 06E36464S01 | RES,CF. 0-1/16W    |
| MAIN-P.W.Board |     |       | <a href="#">R8003</a> | 06E41387S01 | RES,CF. 680-1/4W   |
| MAIN-P.W.Board |     |       | <a href="#">R8006</a> | 06E39850S01 | RES,CF. 2K-1/4W    |
| MAIN-P.W.Board |     |       | <a href="#">R8007</a> | 06E40750S01 | RES,CF. 1.1K-1/4W  |
| MAIN-P.W.Board |     |       | <a href="#">R9161</a> | 06E36581S01 | RES,CF. 30K-1/4W   |
| MAIN-P.W.Board |     |       | <a href="#">R9162</a> | 06E36559S01 | RES,CF. 47K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R9163</a> | 06E23694S01 | RES,CF. 2.7K-1/4W  |
| MAIN-P.W.Board |     |       | <a href="#">R9164</a> | 06E23694S01 | RES,CF. 2.7K-1/4W  |
| MAIN-P.W.Board |     |       | <a href="#">R9165</a> | 06E36102S01 | RES,CF. 30K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R9166</a> | 06E23694S01 | RES,CF. 2.7K-1/4W  |
| MAIN-P.W.Board |     |       | <a href="#">R9167</a> | 06E23694S01 | RES,CF. 2.7K-1/4W  |
| MAIN-P.W.Board |     |       | <a href="#">R9351</a> | 06E36464S01 | RES,CF. 0-1/16W    |
| MAIN-P.W.Board |     |       | <a href="#">R9352</a> | 06E40192S01 | RES,CF. 22K-1/10W  |
| MAIN-P.W.Board |     |       | <a href="#">R9353</a> | 06E40316S01 | RES,CF. 2K-1/10W   |
| MAIN-P.W.Board |     |       | <a href="#">R9354</a> | 06E36464S01 | RES,CF. 0-1/16W    |
| MAIN-P.W.Board |     |       | <a href="#">R9355</a> | 06E40740S01 | RES,CF. 5.1K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R9356</a> | 06E36583S01 | RES,CF. 0-1/4W     |
| MAIN-P.W.Board |     |       | <a href="#">R9357</a> | 06E36464S01 | RES,CF. 0-1/16W    |
| MAIN-P.W.Board |     |       | <a href="#">R9358</a> | 06E40192S01 | RES,CF. 22K-1/10W  |
| MAIN-P.W.Board |     |       | <a href="#">R9359</a> | 06E41385S01 | RES,CF. 360K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R9360</a> | 06E37246S01 | RES,CF. 27K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R9361</a> | 06E36585S01 | RES,CF. 2.2K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R9362</a> | 06E40230S01 | RES,CF. 1.8K-1/10W |
| MAIN-P.W.Board |     |       | <a href="#">R9363</a> | 06E36462S01 | RES,CF. 4.7K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R9364</a> | 06E36584S01 | RES,CF. 820-1/16W  |

Mark Model Code

#1 PDX-M6(North American) Only,

\$1 PDX-M6(European) Only,

%1 PDX-M6(General Foreign) Only,

&1 PDX-M6(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board      | MIS | MODEL | Ref.                  | Parts No.   | Parts Name         |
|----------------|-----|-------|-----------------------|-------------|--------------------|
| MAIN-P.W.Board |     |       | <a href="#">R9365</a> | 06E35237S01 | RES,CF. 1K-1/4W    |
| MAIN-P.W.Board |     |       | <a href="#">R9366</a> | 06E35237S01 | RES,CF. 1K-1/4W    |
| MAIN-P.W.Board |     |       | <a href="#">R9367</a> | 06E36555S01 | RES,CF. 33-1/4W    |
| MAIN-P.W.Board |     |       | <a href="#">R9368</a> | 06E36555S01 | RES,CF. 33-1/4W    |
| MAIN-P.W.Board |     |       | <a href="#">R9369</a> | 06E28546S01 | RES,CF. 18-1/4W    |
| MAIN-P.W.Board |     |       | <a href="#">R9370</a> | 06E28546S01 | RES,CF. 18-1/4W    |
| MAIN-P.W.Board |     |       | <a href="#">R9371</a> | 06E36622S01 | RES,CF. 100K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R9372</a> | 06E36622S01 | RES,CF. 100K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R9373</a> | 06E31807S01 | RES,CF. 330K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R9374</a> | 06E31807S01 | RES,CF. 330K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R9501</a> | 06E36462S01 | RES,CF. 4.7K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R9502</a> | 06E36463S01 | RES,CF. 10K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R9503</a> | 06E36559S01 | RES,CF. 47K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R9504</a> | 06E36559S01 | RES,CF. 47K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R9505</a> | 06E36559S01 | RES,CF. 47K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R9506</a> | 06E36463S01 | RES,CF. 10K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R9507</a> | 06E36559S01 | RES,CF. 47K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R9508</a> | 06E36559S01 | RES,CF. 47K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R9601</a> | 06E40741S01 | RES,CF. 6.8K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R9602</a> | 06E40734S01 | RES,CF. 560-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R9711</a> | 06E40315S01 | RES,CF. 1.2K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R9712</a> | 06E41376S01 | RES,CF. 220-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R9721</a> | 06E40312S01 | RES,CF. 470-1/10W  |
| MAIN-P.W.Board |     |       | <a href="#">R9722</a> | 06E40317S01 | RES,CF. 3.9K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R9723</a> | 06E31808S01 | RES,CF. 360K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R9726</a> | 06E36660S01 | RES,CF. 20K-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R9727</a> | 06E40316S01 | RES,CF. 2K-1/10W   |
| MAIN-P.W.Board |     |       | <a href="#">R9728</a> | 06E36585S01 | RES,CF. 2.2K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R9729</a> | 06E36584S01 | RES,CF. 820-1/16W  |
| MAIN-P.W.Board |     |       | <a href="#">R9730</a> | 06E36462S01 | RES,CF. 4.7K-1/16W |
| MAIN-P.W.Board |     |       | <a href="#">R9731</a> | 06E36579S01 | RES,CF. 1K-1/4W    |
| MAIN-P.W.Board |     |       | <a href="#">R9732</a> | 06E36579S01 | RES,CF. 1K-1/4W    |
| MAIN-P.W.Board |     |       | <a href="#">R9801</a> | 06E36583S01 | RES,CF. 0-1/4W     |
| MAIN-P.W.Board |     |       | <a href="#">R9802</a> | 06E36583S01 | RES,CF. 0-1/4W     |
| MAIN-P.W.Board |     |       | <a href="#">R9803</a> | 06E36583S01 | RES,CF. 0-1/4W     |
| MAIN-P.W.Board |     |       | <a href="#">R9804</a> | 06E36583S01 | RES,CF. 0-1/4W     |
| MAIN-P.W.Board |     |       | <a href="#">R9805</a> | 06E37280S01 | RES,CF. 10-1/4W    |
| MAIN-P.W.Board |     |       | <a href="#">R9806</a> | 06E37280S01 | RES,CF. 10-1/4W    |
| MAIN-P.W.Board |     |       | <a href="#">R9807</a> | 06E37280S01 | RES,CF. 10-1/4W    |
| MAIN-P.W.Board |     |       | <a href="#">R9808</a> | 06E37280S01 | RES,CF. 10-1/4W    |
| MAIN-P.W.Board |     |       | <a href="#">R9811</a> | 06E37280S01 | RES,CF. 10-1/4W    |
| MAIN-P.W.Board |     |       | <a href="#">R9812</a> | 06E37280S01 | RES,CF. 10-1/4W    |

Mark Model Code

#1 PDX-M6(North American) Only,

\$1 PDX-M6(European) Only,

%1 PDX-M6(General Foreign) Only,

&1 PDX-M6(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board      | MIS                                                                                 | MODEL | Ref.                    | Parts No.   | Parts Name           |
|----------------|-------------------------------------------------------------------------------------|-------|-------------------------|-------------|----------------------|
| MAIN-P.W.Board |                                                                                     |       | <a href="#">R9815</a>   | 06E37280S01 | RES,CF. 10-1/4W      |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">R9816</a>   | 06E37280S01 | RES,CF. 10-1/4W      |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">R9817</a>   | 06E37280S01 | RES,CF. 10-1/4W      |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">R9818</a>   | 06E37280S01 | RES,CF. 10-1/4W      |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">R9821</a>   | 06E37280S01 | RES,CF. 10-1/4W      |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">R9822</a>   | 06E37280S01 | RES,CF. 10-1/4W      |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">R9902</a>   | 06E36622S01 | RES,CF. 100K-1/16W   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">R9904</a>   | 06E36622S01 | RES,CF. 100K-1/16W   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">R9905</a>   | 06E36622S01 | RES,CF. 100K-1/16W   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">R9907</a>   | 06E36622S01 | RES,CF. 100K-1/16W   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">R9909</a>   | 06E31163S01 | RES,CF. 220K-1/16W   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">R9910</a>   | 06E31163S01 | RES,CF. 220K-1/16W   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">R9911</a>   | 06E31163S01 | RES,CF. 220K-1/16W   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">R9912</a>   | 06E31163S01 | RES,CF. 220K-1/16W   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">R9913</a>   | 06E36555S01 | RES,CF. 33-1/4W      |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">R9914</a>   | 06E36555S01 | RES,CF. 33-1/4W      |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">R9915</a>   | 06E36555S01 | RES,CF. 33-1/4W      |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">R9916</a>   | 06E36555S01 | RES,CF. 33-1/4W      |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">R9917</a>   | 06E36555S01 | RES,CF. 33-1/4W      |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">R9918</a>   | 06E36555S01 | RES,CF. 33-1/4W      |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">R9919</a>   | 06E36555S01 | RES,CF. 33-1/4W      |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">R9920</a>   | 06E36555S01 | RES,CF. 33-1/4W      |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">R9937</a>   | 06E37280S01 | RES,CF. 10-1/4W      |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">R9939</a>   | 06E37280S01 | RES,CF. 10-1/4W      |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">R9940</a>   | 06E37280S01 | RES,CF. 10-1/4W      |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">R9942</a>   | 06E37280S01 | RES,CF. 10-1/4W      |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">RA5001</a>  | 06E39855S01 | RES,ARRAY. 10K-1/16W |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">RA5002</a>  | 06E39855S01 | RES,ARRAY. 10K-1/16W |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">RA5003</a>  | 06E39855S01 | RES,ARRAY. 10K-1/16W |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">RA5005</a>  | 06E39855S01 | RES,ARRAY. 10K-1/16W |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">T9001</a>   | 25E41478S01 | COIL,CHOKE 10uH      |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">T9351</a>   | 25E41437S01 | TRANS,AP92110        |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">T9901</a>   | 25E41479S01 | TRANS,POWER AP9210D  |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">T9903</a>   | 25E41479S01 | TRANS,POWER AP9210D  |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">TH2101</a>  | 48E40530S01 | THERMISTOR,100K      |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">TH3801</a>  | 48E40346S01 | THERMISTOR,10K       |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">TH3802</a>  | 48E40346S01 | THERMISTOR,10K       |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">TH3851</a>  | 48E40530S01 | THERMISTOR,100K      |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">TH5001</a>  | 48E40530S01 | THERMISTOR,100K      |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">TH9602</a>  | 48E40530S01 | THERMISTOR,100K      |
| MAIN-P.W.Board |  |       | <a href="#">TML9001</a> | 09E41446S01 | CONN,P-CON           |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">ZD3101</a>  | 48E41408S01 | DIO,ZENER MMSZ4684T1 |

Mark Model Code

#1 PDX-M6(North American) Only,

\$1 PDX-M6(European) Only,

%1 PDX-M6(General Foreign) Only,

&1 PDX-M6(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board      | MIS | MODEL | Ref.                   | Parts No.   | Parts Name           |
|----------------|-----|-------|------------------------|-------------|----------------------|
| MAIN-P.W.Board |     |       | <a href="#">ZD3102</a> | 48E41408S01 | DIO,ZENER MMSZ4684T1 |
| MAIN-P.W.Board |     |       | <a href="#">ZD3601</a> | 48E41407S01 | DIODE,ZENER VDZ15B   |
| MAIN-P.W.Board |     |       | <a href="#">ZD3602</a> | 48E41407S01 | DIODE,ZENER VDZ15B   |
| MAIN-P.W.Board |     |       | <a href="#">ZD4001</a> | 48E41407S01 | DIODE,ZENER VDZ15B   |
| MAIN-P.W.Board |     |       | <a href="#">ZD4002</a> | 48E41407S01 | DIODE,ZENER VDZ15B   |
| MAIN-P.W.Board |     |       | <a href="#">ZD5001</a> | 48E39118S01 | DIODE,ZENER HZK15-2L |
| MAIN-P.W.Board |     |       | <a href="#">ZD9001</a> | 48E41047S01 | DIO,ZENER Z5W27V     |
| MAIN-P.W.Board |     |       | <a href="#">ZD9161</a> | 48E39101S01 | DIODE,ZENER HZK6A1L  |
| MAIN-P.W.Board |     |       | <a href="#">ZD9501</a> | 48E41407S01 | DIODE,ZENER VDZ15B   |
| MAIN-P.W.Board |     |       | <a href="#">ZD9502</a> | 48E41407S01 | DIODE,ZENER VDZ15B   |
| SUB-P.W.Board  |     |       | <a href="#">C1006</a>  | 08E37117S01 | CAP,CER. 100pF/50V   |
| SUB-P.W.Board  |     |       | <a href="#">C1008</a>  | 08E37117S01 | CAP,CER. 100pF/50V   |
| SUB-P.W.Board  |     |       | <a href="#">C1009</a>  | 08E37117S01 | CAP,CER. 100pF/50V   |
| SUB-P.W.Board  |     |       | <a href="#">C1010</a>  | 08E37117S01 | CAP,CER. 100pF/50V   |
| SUB-P.W.Board  |     |       | <a href="#">C1101</a>  | 08E41030S01 | CAP,CER. 1000pF/50V  |
| SUB-P.W.Board  |     |       | <a href="#">C1102</a>  | 08E41030S01 | CAP,CER. 1000pF/50V  |
| SUB-P.W.Board  |     |       | <a href="#">C1103</a>  | 08E41030S01 | CAP,CER. 1000pF/50V  |
| SUB-P.W.Board  |     |       | <a href="#">C1104</a>  | 08E41030S01 | CAP,CER. 1000pF/50V  |
| SUB-P.W.Board  |     |       | <a href="#">C1105</a>  | 08E37267S01 | CAP,CER. 0.047uF/25V |
| SUB-P.W.Board  |     |       | <a href="#">C1106</a>  | 08E37267S01 | CAP,CER. 0.047uF/25V |
| SUB-P.W.Board  |     |       | <a href="#">C1107</a>  | 08E37267S01 | CAP,CER. 0.047uF/25V |
| SUB-P.W.Board  |     |       | <a href="#">C1108</a>  | 08E37267S01 | CAP,CER. 0.047uF/25V |
| SUB-P.W.Board  |     |       | <a href="#">C1201</a>  | 08E41030S01 | CAP,CER. 1000pF/50V  |
| SUB-P.W.Board  |     |       | <a href="#">C1202</a>  | 08E41030S01 | CAP,CER. 1000pF/50V  |
| SUB-P.W.Board  |     |       | <a href="#">C1203</a>  | 08E37115S01 | CAP,CER. 33pF/50V    |
| SUB-P.W.Board  |     |       | <a href="#">C1204</a>  | 08E37115S01 | CAP,CER. 33pF/50V    |
| SUB-P.W.Board  |     |       | <a href="#">C1205</a>  | 08E41030S01 | CAP,CER. 1000pF/50V  |
| SUB-P.W.Board  |     |       | <a href="#">C1206</a>  | 08E41030S01 | CAP,CER. 1000pF/50V  |
| SUB-P.W.Board  |     |       | <a href="#">C1207</a>  | 08E36114S01 | CAP,CER. 0.22uF/16V  |
| SUB-P.W.Board  |     |       | <a href="#">C1208</a>  | 08E36114S01 | CAP,CER. 0.22uF/16V  |
| SUB-P.W.Board  |     |       | <a href="#">C1301</a>  | 08E35408S01 | CAP,CER. 10pF/50V    |
| SUB-P.W.Board  |     |       | <a href="#">C1302</a>  | 08E37267S01 | CAP,CER. 0.047uF/25V |
| SUB-P.W.Board  |     |       | <a href="#">C1303</a>  | 08E37267S01 | CAP,CER. 0.047uF/25V |
| SUB-P.W.Board  |     |       | <a href="#">C1401</a>  | 08E41030S01 | CAP,CER. 1000pF/50V  |
| SUB-P.W.Board  |     |       | <a href="#">C1406</a>  | 08E37267S01 | CAP,CER. 0.047uF/25V |
| SUB-P.W.Board  |     |       | <a href="#">C1407</a>  | 08E37267S01 | CAP,CER. 0.047uF/25V |
| SUB-P.W.Board  |     |       | <a href="#">C1501</a>  | 08E39113S01 | CAP,FILM.0.33uF/50V  |
| SUB-P.W.Board  |     |       | <a href="#">C1502</a>  | 08E39112S01 | CAP,FILM.0.12uF/50V  |
| SUB-P.W.Board  |     |       | <a href="#">C1503</a>  | 08E39649S01 | CAP,CER. 47pF/50V    |
| SUB-P.W.Board  |     |       | <a href="#">C1504</a>  | 08E39649S01 | CAP,CER. 47pF/50V    |
| SUB-P.W.Board  |     |       | <a href="#">C1505</a>  | 08E38083S01 | CAP,FILM 0.047uF/50V |
| SUB-P.W.Board  |     |       | <a href="#">C1506</a>  | 08E36114S01 | CAP,CER. 0.22uF/16V  |

Mark Model Code

#1 PDX-M6(North American) Only,

\$1 PDX-M6(European) Only,

%1 PDX-M6(General Foreign) Only,

&1 PDX-M6(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board     | MIS                                                                                 | MODEL | Ref.                   | Parts No.   | Parts Name           |
|---------------|-------------------------------------------------------------------------------------|-------|------------------------|-------------|----------------------|
| SUB-P.W.Board |                                                                                     |       | <a href="#">C1507</a>  | 08E36114S01 | CAP,CER. 0.22uF/16V  |
| SUB-P.W.Board |                                                                                     |       | <a href="#">C1508</a>  | 08E38621S01 | CAP,FILM 0.1uF/50V   |
| SUB-P.W.Board |                                                                                     |       | <a href="#">C1601</a>  | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| SUB-P.W.Board |                                                                                     |       | <a href="#">C1602</a>  | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| SUB-P.W.Board |                                                                                     |       | <a href="#">C1603</a>  | 08E37117S01 | CAP,CER. 100pF/50V   |
| SUB-P.W.Board |                                                                                     |       | <a href="#">C1604</a>  | 08E37117S01 | CAP,CER. 100pF/50V   |
| SUB-P.W.Board |                                                                                     |       | <a href="#">C1605</a>  | 08E38081S01 | CAP,MYL. 0.56uF/50V  |
| SUB-P.W.Board |                                                                                     |       | <a href="#">C1606</a>  | 08E38081S01 | CAP,MYL. 0.56uF/50V  |
| SUB-P.W.Board |                                                                                     |       | <a href="#">C1607</a>  | 08E38081S01 | CAP,MYL. 0.56uF/50V  |
| SUB-P.W.Board |                                                                                     |       | <a href="#">C1608</a>  | 08E38081S01 | CAP,MYL. 0.56uF/50V  |
| SUB-P.W.Board |                                                                                     |       | <a href="#">C1609</a>  | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| SUB-P.W.Board |                                                                                     |       | <a href="#">C1610</a>  | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| SUB-P.W.Board |                                                                                     |       | <a href="#">C1611</a>  | 08E37117S01 | CAP,CER. 100pF/50V   |
| SUB-P.W.Board |                                                                                     |       | <a href="#">C1612</a>  | 08E37117S01 | CAP,CER. 100pF/50V   |
| SUB-P.W.Board |                                                                                     |       | <a href="#">C1613</a>  | 08E38081S01 | CAP,MYL. 0.56uF/50V  |
| SUB-P.W.Board |                                                                                     |       | <a href="#">C1614</a>  | 08E38081S01 | CAP,MYL. 0.56uF/50V  |
| SUB-P.W.Board |                                                                                     |       | <a href="#">C1615</a>  | 08E38081S01 | CAP,MYL. 0.56uF/50V  |
| SUB-P.W.Board |                                                                                     |       | <a href="#">C1616</a>  | 08E38081S01 | CAP,MYL. 0.56uF/50V  |
| SUB-P.W.Board |                                                                                     |       | <a href="#">C1801</a>  | 08E38084S01 | CAP,FILM 0.15uF/50V  |
| SUB-P.W.Board |                                                                                     |       | <a href="#">C1802</a>  | 08E38082S01 | CAP,FILM 0.068uF/50V |
| SUB-P.W.Board |                                                                                     |       | <a href="#">C1803</a>  | 08E39649S01 | CAP,CER. 47pF/50V    |
| SUB-P.W.Board |                                                                                     |       | <a href="#">C1804</a>  | 08E36114S01 | CAP,CER. 0.22uF/16V  |
| SUB-P.W.Board |                                                                                     |       | <a href="#">C1805</a>  | 08E36114S01 | CAP,CER. 0.22uF/16V  |
| SUB-P.W.Board |                                                                                     |       | <a href="#">C2102</a>  | 08E37267S01 | CAP,CER. 0.047uF/25V |
| SUB-P.W.Board |                                                                                     |       | <a href="#">C2103</a>  | 08E41028S01 | CAP,CER. 22pF/50V    |
| SUB-P.W.Board |                                                                                     |       | <a href="#">C2104</a>  | 08E41028S01 | CAP,CER. 22pF/50V    |
| SUB-P.W.Board |                                                                                     |       | <a href="#">C2105</a>  | 08E37267S01 | CAP,CER. 0.047uF/25V |
| SUB-P.W.Board |                                                                                     |       | <a href="#">C2201</a>  | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| SUB-P.W.Board |                                                                                     |       | <a href="#">C2202</a>  | 08E37122S01 | CAP,CER. 0.1uF/25V   |
| SUB-P.W.Board |                                                                                     |       | <a href="#">C9301</a>  | 08E41031S01 | CAP,CER. 0.01uF/50V  |
| SUB-P.W.Board |                                                                                     |       | <a href="#">C9302</a>  | 08E41031S01 | CAP,CER. 0.01uF/50V  |
| SUB-P.W.Board |                                                                                     |       | <a href="#">C9303</a>  | 08E41031S01 | CAP,CER. 0.01uF/50V  |
| SUB-P.W.Board |                                                                                     |       | <a href="#">C9304</a>  | 08E41031S01 | CAP,CER. 0.01uF/50V  |
| SUB-P.W.Board |  |       | <a href="#">CB2301</a> | 09E40583S01 | CONN,JACK 6P         |
| SUB-P.W.Board |                                                                                     |       | <a href="#">CH6501</a> | 09E41444S01 | CONN,20P             |
| SUB-P.W.Board |                                                                                     |       | <a href="#">D1101</a>  | 48E38037S01 | DIODE,1PS226         |
| SUB-P.W.Board |                                                                                     |       | <a href="#">D1102</a>  | 48E38037S01 | DIODE,1PS226         |
| SUB-P.W.Board |                                                                                     |       | <a href="#">D1103</a>  | 48E38037S01 | DIODE,1PS226         |
| SUB-P.W.Board |                                                                                     |       | <a href="#">D1104</a>  | 48E38037S01 | DIODE,1PS226         |
| SUB-P.W.Board |                                                                                     |       | <a href="#">D2101</a>  | 48E38037S01 | DIODE,1PS226         |
| SUB-P.W.Board |                                                                                     |       | <a href="#">D2102</a>  | 48E36568S01 | DIODE,DAN202K        |
| SUB-P.W.Board |                                                                                     |       | <a href="#">D2201</a>  | 48E38037S01 | DIODE,1PS226         |

Mark Model Code

#1 PDX-M6(North American) Only,

\$1 PDX-M6(European) Only,

%1 PDX-M6(General Foreign) Only,

&1 PDX-M6(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board     | MIS                                                                                 | MODEL | Ref.                   | Parts No.   | Parts Name         |
|---------------|-------------------------------------------------------------------------------------|-------|------------------------|-------------|--------------------|
| SUB-P.W.Board |                                                                                     |       | <a href="#">E1101</a>  | 23E41399S01 | CAP,ELY.47uF/16V   |
| SUB-P.W.Board |                                                                                     |       | <a href="#">E1102</a>  | 23E41399S01 | CAP,ELY.47uF/16V   |
| SUB-P.W.Board |                                                                                     |       | <a href="#">E1103</a>  | 23E41399S01 | CAP,ELY.47uF/16V   |
| SUB-P.W.Board |                                                                                     |       | <a href="#">E1104</a>  | 23E41399S01 | CAP,ELY.47uF/16V   |
| SUB-P.W.Board |                                                                                     |       | <a href="#">E1401</a>  | 23E41400S01 | CAP,ELY.10uF/16V   |
| SUB-P.W.Board |                                                                                     |       | <a href="#">E1402</a>  | 23E41400S01 | CAP,ELY.10uF/16V   |
| SUB-P.W.Board |                                                                                     |       | <a href="#">E9354</a>  | 23E39760S01 | CAP,ELY. 22uF/25V  |
| SUB-P.W.Board |                                                                                     |       | <a href="#">E9363</a>  | 23E39760S01 | CAP,ELY. 22uF/25V  |
| SUB-P.W.Board |                                                                                     |       | <a href="#">E9364</a>  | 23E41397S01 | CAP,ELY.47uF/16V   |
| SUB-P.W.Board |                                                                                     |       | <a href="#">E9365</a>  | 23E41397S01 | CAP,ELY.47uF/16V   |
| SUB-P.W.Board |                                                                                     |       | <a href="#">E9366</a>  | 23E39180S01 | CAP,ELY. 1uF/50V   |
| SUB-P.W.Board |                                                                                     |       | <a href="#">E9367</a>  | 23E39180S01 | CAP,ELY. 1uF/50V   |
| SUB-P.W.Board |                                                                                     |       | <a href="#">IC1101</a> | 51E41429S01 | IC,BA4580RF        |
| SUB-P.W.Board |                                                                                     |       | <a href="#">IC1102</a> | 51E41429S01 | IC,BA4580RF        |
| SUB-P.W.Board |                                                                                     |       | <a href="#">IC1201</a> | 51E41429S01 | IC,BA4580RF        |
| SUB-P.W.Board |                                                                                     |       | <a href="#">IC1301</a> | 51E40776S01 | IC,BA4580RFVM      |
| SUB-P.W.Board |                                                                                     |       | <a href="#">IC1401</a> | 51E40776S01 | IC,BA4580RFVM      |
| SUB-P.W.Board |                                                                                     |       | <a href="#">IC1501</a> | 51E40776S01 | IC,BA4580RFVM      |
| SUB-P.W.Board |                                                                                     |       | <a href="#">IC1601</a> | 51E40776S01 | IC,BA4580RFVM      |
| SUB-P.W.Board |                                                                                     |       | <a href="#">IC1602</a> | 51E40776S01 | IC,BA4580RFVM      |
| SUB-P.W.Board |                                                                                     |       | <a href="#">IC1801</a> | 51E40776S01 | IC,BA4580RFVM      |
| SUB-P.W.Board |                                                                                     |       | <a href="#">IC2101</a> | 51E39598S01 | IC,BA4560RFVM      |
| SUB-P.W.Board |                                                                                     |       | <a href="#">IC2201</a> | 51E39598S01 | IC,BA4560RFVM      |
| SUB-P.W.Board |  |       | <a href="#">JK1001</a> | 09E41442S01 | CONN,RCA 4P        |
| SUB-P.W.Board |                                                                                     |       | <a href="#">Q1701</a>  | 48E39389S01 | TR,KTC2875         |
| SUB-P.W.Board |                                                                                     |       | <a href="#">Q1702</a>  | 48E37893S01 | TR,DTA114EE        |
| SUB-P.W.Board |                                                                                     |       | <a href="#">Q1703</a>  | 48E37097S01 | TR,DTC114EE        |
| SUB-P.W.Board |                                                                                     |       | <a href="#">Q1704</a>  | 48E37097S01 | TR,DTC114EE        |
| SUB-P.W.Board |                                                                                     |       | <a href="#">Q1705</a>  | 48E39389S01 | TR,KTC2875         |
| SUB-P.W.Board |                                                                                     |       | <a href="#">Q1706</a>  | 48E37893S01 | TR,DTA114EE        |
| SUB-P.W.Board |                                                                                     |       | <a href="#">Q1707</a>  | 48E37097S01 | TR,DTC114EE        |
| SUB-P.W.Board |                                                                                     |       | <a href="#">Q1708</a>  | 48E37097S01 | TR,DTC114EE        |
| SUB-P.W.Board |                                                                                     |       | <a href="#">Q2101</a>  | 48E37188S01 | TR,DTC144EE        |
| SUB-P.W.Board |                                                                                     |       | <a href="#">Q2102</a>  | 48E37188S01 | TR,DTC144EE        |
| SUB-P.W.Board |                                                                                     |       | <a href="#">Q2103</a>  | 48E37188S01 | TR,DTC144EE        |
| SUB-P.W.Board |                                                                                     |       | <a href="#">Q2201</a>  | 48E37188S01 | TR,DTC144EE        |
| SUB-P.W.Board |                                                                                     |       | <a href="#">Q2202</a>  | 48E37188S01 | TR,DTC144EE        |
| SUB-P.W.Board |                                                                                     |       | <a href="#">R1101</a>  | 06E40187S01 | RES,CF. 1K-1/16    |
| SUB-P.W.Board |                                                                                     |       | <a href="#">R1102</a>  | 06E40315S01 | RES,CF. 1.2K-1/16W |
| SUB-P.W.Board |                                                                                     |       | <a href="#">R1103</a>  | 06E40315S01 | RES,CF. 1.2K-1/16W |
| SUB-P.W.Board |                                                                                     |       | <a href="#">R1104</a>  | 06E40187S01 | RES,CF. 1K-1/16    |
| SUB-P.W.Board |                                                                                     |       | <a href="#">R1105</a>  | 06E40311S01 | RES,CF. 120-1/16W  |

Mark Model Code

#1 PDX-M6(North American) Only,

\$1 PDX-M6(European) Only,

%1 PDX-M6(General Foreign) Only,

&1 PDX-M6(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board     | MIS | MODEL | Ref.                  | Parts No.   | Parts Name         |
|---------------|-----|-------|-----------------------|-------------|--------------------|
| SUB-P.W.Board |     |       | <a href="#">R1106</a> | 06E40311S01 | RES,CF. 120-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R1107</a> | 06E40328S01 | RES,CF. 100K-1/16W |
| SUB-P.W.Board |     |       | <a href="#">R1108</a> | 06E40328S01 | RES,CF. 100K-1/16W |
| SUB-P.W.Board |     |       | <a href="#">R1109</a> | 06E41381S01 | RES,CF. 24K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R1110</a> | 06E41381S01 | RES,CF. 24K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R1111</a> | 06E41381S01 | RES,CF. 24K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R1112</a> | 06E41381S01 | RES,CF. 24K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R1113</a> | 06E36618S01 | RES,CF. 1K-1/16W   |
| SUB-P.W.Board |     |       | <a href="#">R1114</a> | 06E36618S01 | RES,CF. 1K-1/16W   |
| SUB-P.W.Board |     |       | <a href="#">R1115</a> | 06E36618S01 | RES,CF. 1K-1/16W   |
| SUB-P.W.Board |     |       | <a href="#">R1116</a> | 06E36618S01 | RES,CF. 1K-1/16W   |
| SUB-P.W.Board |     |       | <a href="#">R1201</a> | 06E40322S01 | RES,CF. 18K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R1202</a> | 06E40322S01 | RES,CF. 18K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R1203</a> | 06E40322S01 | RES,CF. 18K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R1204</a> | 06E40322S01 | RES,CF. 18K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R1205</a> | 06E40322S01 | RES,CF. 18K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R1206</a> | 06E40322S01 | RES,CF. 18K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R1207</a> | 06E40322S01 | RES,CF. 18K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R1208</a> | 06E40322S01 | RES,CF. 18K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R1301</a> | 06E41378S01 | RES,CF. 3.6K-1/16W |
| SUB-P.W.Board |     |       | <a href="#">R1302</a> | 06E41378S01 | RES,CF. 3.6K-1/16W |
| SUB-P.W.Board |     |       | <a href="#">R1303</a> | 06E41381S01 | RES,CF. 24K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R1304</a> | 06E41381S01 | RES,CF. 24K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R1305</a> | 06E40318S01 | RES,CF. 5.6K-1/10W |
| SUB-P.W.Board |     |       | <a href="#">R1306</a> | 06E40745S01 | RES,CF. 47K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R1307</a> | 06E40327S01 | RES,CF. 56K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R1308</a> | 06E36623S01 | RES,CF. 1M-1/16W   |
| SUB-P.W.Board |     |       | <a href="#">R1309</a> | 06E40314S01 | RES,CF. 1.1K-1/16W |
| SUB-P.W.Board |     |       | <a href="#">R1310</a> | 06E40825S01 | RES,CF. 4.7K-1/10W |
| SUB-P.W.Board |     |       | <a href="#">R1311</a> | 06E36464S01 | RES,CF. 0-1/16W    |
| SUB-P.W.Board |     |       | <a href="#">R1401</a> | 06E37108S01 | RES,CF. 330-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R1402</a> | 06E37108S01 | RES,CF. 330-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R1403</a> | 06E36622S01 | RES,CF. 100K-1/16W |
| SUB-P.W.Board |     |       | <a href="#">R1404</a> | 06E36622S01 | RES,CF. 100K-1/16W |
| SUB-P.W.Board |     |       | <a href="#">R1405</a> | 06E36618S01 | RES,CF. 1K-1/16W   |
| SUB-P.W.Board |     |       | <a href="#">R1406</a> | 06E36618S01 | RES,CF. 1K-1/16W   |
| SUB-P.W.Board |     |       | <a href="#">R1407</a> | 06E36618S01 | RES,CF. 1K-1/16W   |
| SUB-P.W.Board |     |       | <a href="#">R1408</a> | 06E36618S01 | RES,CF. 1K-1/16W   |
| SUB-P.W.Board |     |       | <a href="#">R1501</a> | 06E40738S01 | RES,CF. 3.3K-1/16W |
| SUB-P.W.Board |     |       | <a href="#">R1502</a> | 06E40738S01 | RES,CF. 3.3K-1/16W |
| SUB-P.W.Board |     |       | <a href="#">R1503</a> | 06E40738S01 | RES,CF. 3.3K-1/16W |
| SUB-P.W.Board |     |       | <a href="#">R1506</a> | 06E36464S01 | RES,CF. 0-1/16W    |

Mark Model Code

#1 PDX-M6(North American) Only,

\$1 PDX-M6(European) Only,

%1 PDX-M6(General Foreign) Only,

&1 PDX-M6(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board     | MIS | MODEL | Ref.                  | Parts No.   | Parts Name         |
|---------------|-----|-------|-----------------------|-------------|--------------------|
| SUB-P.W.Board |     |       | <a href="#">R1602</a> | 06E40323S01 | RES,CF. 20K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R1603</a> | 06E41379S01 | RES,CF. 13K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R1604</a> | 06E36621S01 | RES,CF. 6.8K-1/16W |
| SUB-P.W.Board |     |       | <a href="#">R1605</a> | 06E33277S01 | RES,CF. 4.3K-1/16W |
| SUB-P.W.Board |     |       | <a href="#">R1607</a> | 06E31681S01 | RES,CF. 36K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R1608</a> | 06E37246S01 | RES,CF. 27K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R1609</a> | 06E36659S01 | RES,CF. 15K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R1610</a> | 06E40231S01 | RES,CF. 2.7K-1/10W |
| SUB-P.W.Board |     |       | <a href="#">R1611</a> | 06E28791S01 | RES,CF. 9.1K-1/16W |
| SUB-P.W.Board |     |       | <a href="#">R1701</a> | 06E31680S01 | RES,CF. 680-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R1702</a> | 06E31680S01 | RES,CF. 680-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R1703</a> | 06E36615S01 | RES,CF. 5.6K-1/4W  |
| SUB-P.W.Board |     |       | <a href="#">R1704</a> | 06E36463S01 | RES,CF. 10K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R1705</a> | 06E36463S01 | RES,CF. 10K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R1706</a> | 06E36615S01 | RES,CF. 5.6K-1/4W  |
| SUB-P.W.Board |     |       | <a href="#">R1707</a> | 06E36463S01 | RES,CF. 10K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R1708</a> | 06E36463S01 | RES,CF. 10K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R1709</a> | 06E36463S01 | RES,CF. 10K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R1711</a> | 06E36464S01 | RES,CF. 0-1/16W    |
| SUB-P.W.Board |     |       | <a href="#">R1801</a> | 06E40229S01 | RES,CF. 1.5K-1/16W |
| SUB-P.W.Board |     |       | <a href="#">R1802</a> | 06E41382S01 | RES,CF. 51K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R1803</a> | 06E40316S01 | RES,CF. 2K-1/10W   |
| SUB-P.W.Board |     |       | <a href="#">R1805</a> | 06E40316S01 | RES,CF. 2K-1/10W   |
| SUB-P.W.Board |     |       | <a href="#">R1806</a> | 06E40324S01 | RES,CF. 27K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R1807</a> | 06E40324S01 | RES,CF. 27K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R2101</a> | 06E40745S01 | RES,CF. 47K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R2102</a> | 06E40743S01 | RES,CF. 9.1K-1/16W |
| SUB-P.W.Board |     |       | <a href="#">R2103</a> | 06E40745S01 | RES,CF. 47K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R2104</a> | 06E40320S01 | RES,CF. 8.2K-1/16W |
| SUB-P.W.Board |     |       | <a href="#">R2105</a> | 06E39631S01 | RES,CF. 11K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R2106</a> | 06E40320S01 | RES,CF. 8.2K-1/16W |
| SUB-P.W.Board |     |       | <a href="#">R2107</a> | 06E40324S01 | RES,CF. 27K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R2108</a> | 06E40744S01 | RES,CF. 36K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R2109</a> | 06E36464S01 | RES,CF. 0-1/16W    |
| SUB-P.W.Board |     |       | <a href="#">R2110</a> | 06E40231S01 | RES,CF. 2.7K-1/10W |
| SUB-P.W.Board |     |       | <a href="#">R2201</a> | 06E40826S01 | RES,CF. 33K-1/10W  |
| SUB-P.W.Board |     |       | <a href="#">R2202</a> | 06E40327S01 | RES,CF. 56K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R2203</a> | 06E40743S01 | RES,CF. 9.1K-1/16W |
| SUB-P.W.Board |     |       | <a href="#">R2204</a> | 06E36559S01 | RES,CF. 47K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R2205</a> | 06E36559S01 | RES,CF. 47K-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R2206</a> | 06E40735S01 | RES,CF. 620-1/16W  |
| SUB-P.W.Board |     |       | <a href="#">R2207</a> | 06E41381S01 | RES,CF. 24K-1/16W  |

Mark Model Code

#1 PDX-M6(North American) Only,

\$1 PDX-M6(European) Only,

%1 PDX-M6(General Foreign) Only,

&1 PDX-M6(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board     | MIS                                                                               | MODEL | Ref.                    | Parts No.   | Parts Name           |
|---------------|-----------------------------------------------------------------------------------|-------|-------------------------|-------------|----------------------|
| SUB-P.W.Board |                                                                                   |       | <a href="#">R2301</a>   | 06E36623S01 | RES,CF. 1M-1/16W     |
| SUB-P.W.Board |                                                                                   |       | <a href="#">R2302</a>   | 06E41375S01 | RES,CF. 150-1/16W    |
| SUB-P.W.Board |  |       | <a href="#">SW1301</a>  | 40E41432S01 | SW,SLIDE SK-22D15-G6 |
| SUB-P.W.Board |  |       | <a href="#">SW1601</a>  | 40E40956S01 | SW,SLIDE SK-23D55-G6 |
| SUB-P.W.Board |  |       | <a href="#">VOL1301</a> | 18E41439S01 | VOL,ROTARY 50KX1     |
| SUB-P.W.Board |  |       | <a href="#">VOL1501</a> | 18E41440S01 | VOL,ROTARY 20KX4     |
| SUB-P.W.Board |                                                                                   |       | <a href="#">ZD2101</a>  | 48E39101S01 | DIODE,ZENER HZK6A1L  |
| LED-P.W.Board |                                                                                   |       | <a href="#">C8021</a>   | 08E38707S01 | CAP,CER. 220pF/50V   |
| LED-P.W.Board |                                                                                   |       | <a href="#">C8022</a>   | 08E38707S01 | CAP,CER. 220pF/50V   |
| LED-P.W.Board |                                                                                   |       | <a href="#">C8023</a>   | 08E38707S01 | CAP,CER. 220pF/50V   |
| LED-P.W.Board |                                                                                   |       | <a href="#">C8024</a>   | 08E38707S01 | CAP,CER. 220pF/50V   |
| LED-P.W.Board |                                                                                   |       | <a href="#">LD8021</a>  | 48E41405S01 | LED,SML512BC5T BLUE  |
| LED-P.W.Board |                                                                                   |       | <a href="#">LD8022</a>  | 48E41405S01 | LED,SML512BC5T BLUE  |
| LED-P.W.Board |                                                                                   |       | <a href="#">LD8023</a>  | 48E41405S01 | LED,SML512BC5T BLUE  |
| LED-P.W.Board |                                                                                   |       | <a href="#">LD8024</a>  | 48E41405S01 | LED,SML512BC5T BLUE  |
| LED-P.W.Board |                                                                                   |       | <a href="#">R8021</a>   | 06E38034S01 | RES,CF. 1K-1/4W      |
| LED-P.W.Board |                                                                                   |       | <a href="#">R8023</a>   | 06E38034S01 | RES,CF. 1K-1/4W      |
| Miscellaneous |                                                                                   |       | <a href="#">CH8001</a>  | 01E41447S01 | CONN,ASSY 2P         |

Mark Model Code

#1 PDX-M6(North American) Only,

\$1 PDX-M6(European) Only,

%1 PDX-M6(General Foreign) Only,

&1 PDX-M6(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| MODEL | Symbol No.              | Parts No.   | Description          |
|-------|-------------------------|-------------|----------------------|
|       | <a href="#">F003</a>    | 65E36552S01 | FUSE,AUTO 20A        |
|       | <a href="#">F004</a>    | 65E36552S01 | FUSE,AUTO 20A        |
|       | <a href="#">HL9001</a>  | 09E39445S01 | HOLDER,FUSE          |
|       | <a href="#">HL9002</a>  | 09E39445S01 | HOLDER,FUSE          |
|       | <a href="#">JK1001</a>  | 09E41442S01 | CONN,RCA 4P          |
|       | <a href="#">SW1301</a>  | 40E41432S01 | SW,SLIDE SK-22D15-G6 |
|       | <a href="#">SW1601</a>  | 40E40956S01 | SW,SLIDE SK-23D55-G6 |
|       | <a href="#">TML9001</a> | 09E41446S01 | CONN,P-CON           |
|       | <a href="#">VOL1301</a> | 18E41439S01 | VOL,ROTARY 50KX1     |
|       | <a href="#">VOL1501</a> | 18E41440S01 | VOL,ROTARY 20KX4     |

Mark Model Code

#1 PDX-M6(North American) Only,

\$1 PDX-M6(European) Only,

%1 PDX-M6(General Foreign) Only,

&1 PDX-M6(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.