


EXPLODED VIEW (UNIT)

Block No.M1MM

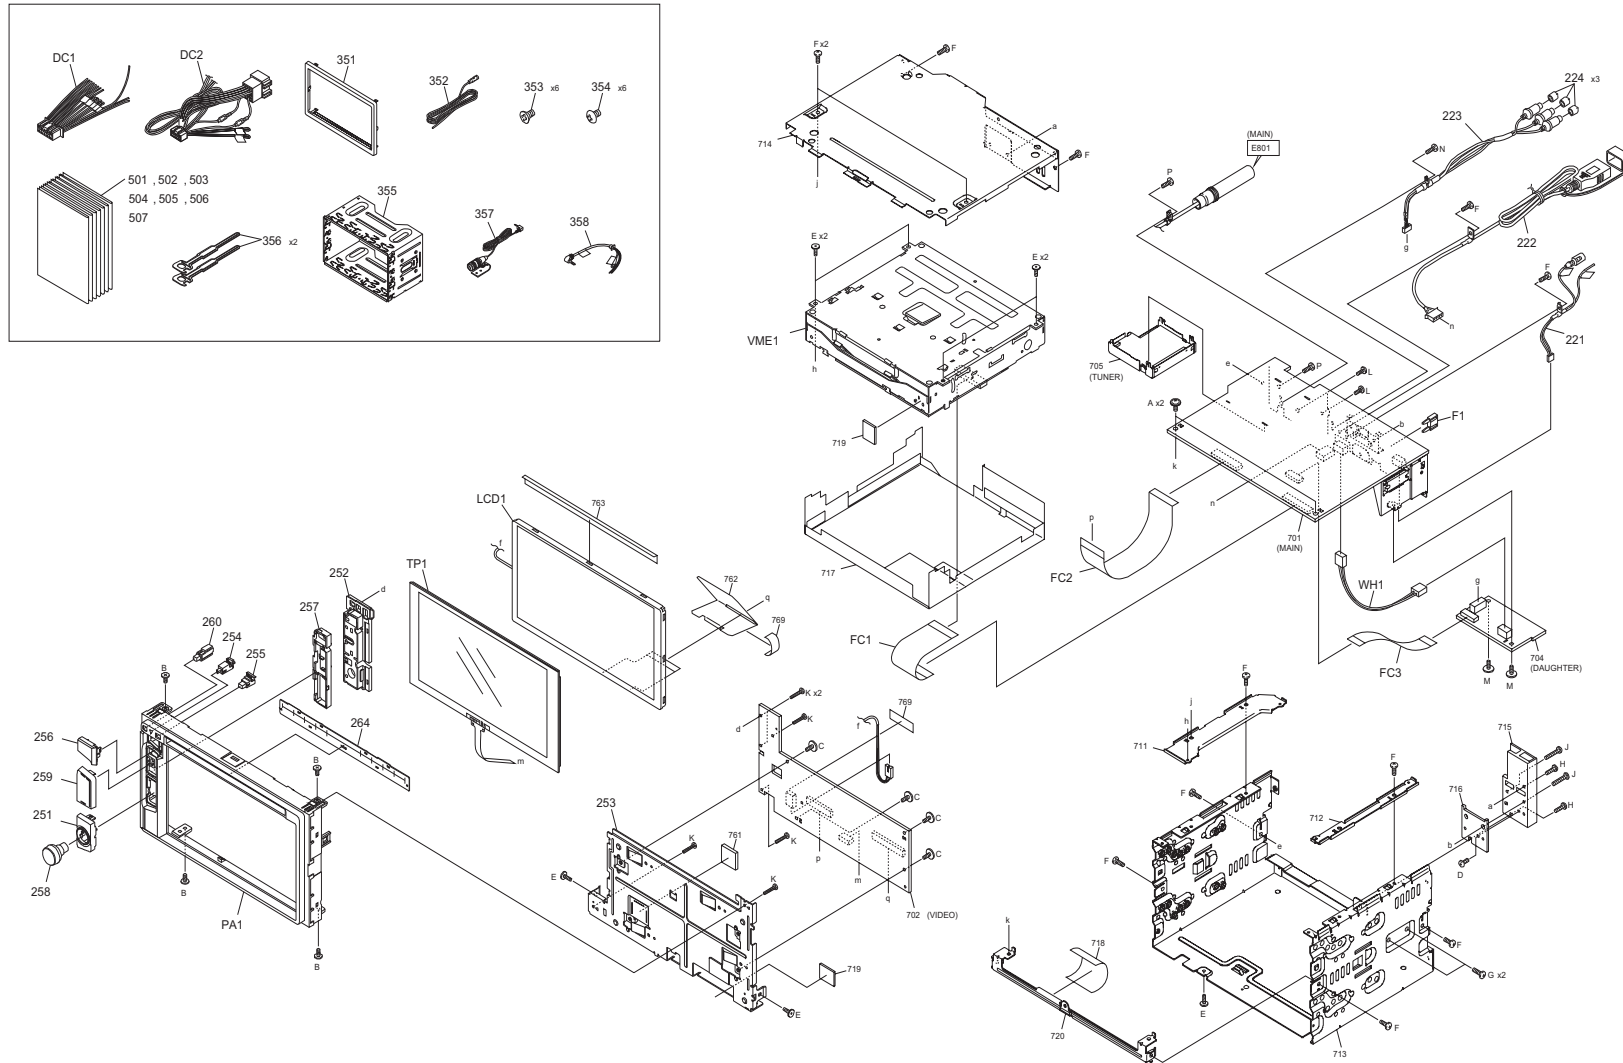

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		


Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
------	------------	-----------	------------	-------------	-----	-------

EXPLODED VIEW (UNIT) <M1MM>

Δ	DC1	QAM1572-001	DC CORD		1	K0,K1,K2,K3,K4,X2
	DC2	QAM1354-001	DC CORD		1	E1,E2,E3,Q1,Q2
	F1	FZB10BT-100	BLADE FUSE		1	
	FC1	EF0AA055007BC	FFC WIRE		1	
	FC2	EF0AA054509BC	FFC WIRE		1	
	FC3	EF0AA052208BC	FFC WIRE		1	K0,K1,K2,K3,K4,X2,E1,E2,E3
	LCD1	B3H-0014-10	LCD		1	
	PA1	A6C-0005-00	PANEL		1	K0
	PA1	A6C-0005-06	PANEL		1	K1
	PA1	A6C-0005-02	PANEL		1	K2
	PA1	A6C-0005-03	PANEL		1	K3
	PA1	A6C-0005-04	PANEL		1	K4
	PA1	A6C-0005-05	PANEL		1	X2,E3,Q2
	PA1	A6C-0005-01	PANEL		1	E1
	PA1	A6C-0005-07	PANEL		1	E2,Q1
	TP1	W0C-0063-00	TOUCH PANEL		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	TP1	W0C-0063-10	TOUCH PANEL		1	K4
	VME1	XJJ-0140-00	DVD MECHANISM		1	
	WH1	WJJ1273-001A-E	E-SI C WIRE C-C		1	K0,K1,K2,K3,K4
	A	GE40377-002A	SCREW		2	
	B	LV44159-005A	MINI SCREW		4	
	C	LV44615-003A	SPECIAL SCREW		4	
	D	QYSDSP2610ZA	SCREW	M2.6 x 10mm	1	
	E	QYSDST2006ZA	TAP SCREW	M2 x 6mm	7	
	F	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	12	
	G	QYSDST2610ZA	TAP SCREW	M2.6 x 10mm	2	
	H	QYSDST2614ZA	TAP SCREW	M2.6 x 14mm	2	
	J	QYSDST2620ZA	TAP SCREW	M2.6 x 20mm	2	
	K	VKZ4777-015	MINI SCREW		6	
	L	QYSDSF2608ZA	TAP SCREW	M2.6 x 8mm	2	
	M	GE40377-002A	SCREW		2	K0,K1,K2,K3,K4,X2,E1,E2,E3
	N	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	1	X2
	P	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	2	E1
	221	E3A-0045-00	CORD W.CON.	REVERSE/PARKING	1	
	222	E3A-0046-00	USB CORD		1	K0,K1,K2,K3,K4,X2
	222	E3A-0046-01	USB CORD		1	E1,E2,E3,Q1,Q2
	223	QAM1566-001	AV-IN1 CABLE		1	X2
	224	GE40101-001A	PIN CAP		3	X2
	251	A2B-0008-10	DRESSING PANEL		1	K0,K2
	251	A2B-0008-13	DRESSING PANEL		1	K1,E2,Q1
	251	A2B-0008-11	DRESSING PANEL		1	K3,K4,X2,E1,E3,Q2
	252	B1K-0027-10	LIGHTING B ASSY		1	
	253	J2B-0029-00	BRACKET ASSY		1	
	254	K2A-0001-00	RESET BUTTON		1	
	255	K2A-0002-00	EJECT BUTTON		1	
	256	K2A-0003-10	MENU BUTTON		1	
	257	K2K-0112-11	BUTTON BASE		1	
	258	K2K-0120-10	VOL KNOB ASSY		1	
	259	K2K-0140-10	AV BUTTON ASSY		1	K0,K2
	259	K2K-0140-14	AV BUTTON ASSY		1	K1
	259	K2K-0140-11	AV BUTTON ASSY		1	K3,K4
	259	K2K-0140-13	AV BUTTON ASSY		1	X2,E1,E3,Q2
	259	K2K-0140-16	AV BUTTON ASSY		1	E2,Q1
	260	W1A-0003-00	LENS		1	
	264	F1K-0005-00	BLIND PLATE		1	
	351	B9H-0001-00	ESCUTCHEON		1	
	352	QAM1355-002	CAR CABLE		1	
	353	QYSSSP5008ZA	SCREW	M5 x 8mm	6	K0,K1,K2,K3,K4,X2
	354	QYSTSP5008ZA	SCREW	M5 x 8mm	6	K0,K1,K2,K3,K4,X2
	355	J2C-0006-00	MOUNTING ASSY		1	K0,K1,K2,K3,K4,E1,E2,E3,Q1,Q2
	356	D1A-0007-00	LEVER		2	K0,K1,K2,K3,K4,E1,E2,E3,Q1,Q2
	357	QAN0137-001	MICROPHONE		1	K0,K2,K3,K4,X2,E1,E3,Q2
	358	QAM1419-001	CAR CABLE		1	X2
	501	B5A-0214-00	INST.MANUAL	ENG	1	K0,K1,K2,K3,K4
	501	B5A-0215-00	INST.MANUAL	ENG	1	X2
	501	B5A-0217-00	INST.MANUAL	ENG	1	E1,E2,E3,Q1,Q2
	502	B5A-0214-01	INST.MANUAL	FRE	1	K0,K1,K2,K3,K4
	502	B5A-0217-01	INST.MANUAL	FRE	1	E1,E2,E3
	502	B5A-0217-07	INST.MANUAL	RUS	1	Q1,Q2
	503	B5A-0214-02	INST.MANUAL	SPA	1	K0,K1,K2,K3,K4
	503	B5A-0217-02	INST.MANUAL	GER	1	E1,E2,E3
	503	B5A-0217-08	INST.MANUAL	UKR	1	Q1,Q2
	504	B5A-0217-03	INST.MANUAL	DUT	1	E1,E2,E3
	505	B5A-0217-04	INST.MANUAL	ITA	1	E1,E2,E3
	506	B5A-0217-05	INST.MANUAL	SPA	1	E1,E2,E3
	507	B5A-0217-06	INST.MANUAL	POR	1	E1,E2,E3

EXPLODED VIEW (DVD MECHANISM: FD3-1A00NXN)

Block No.MJMM

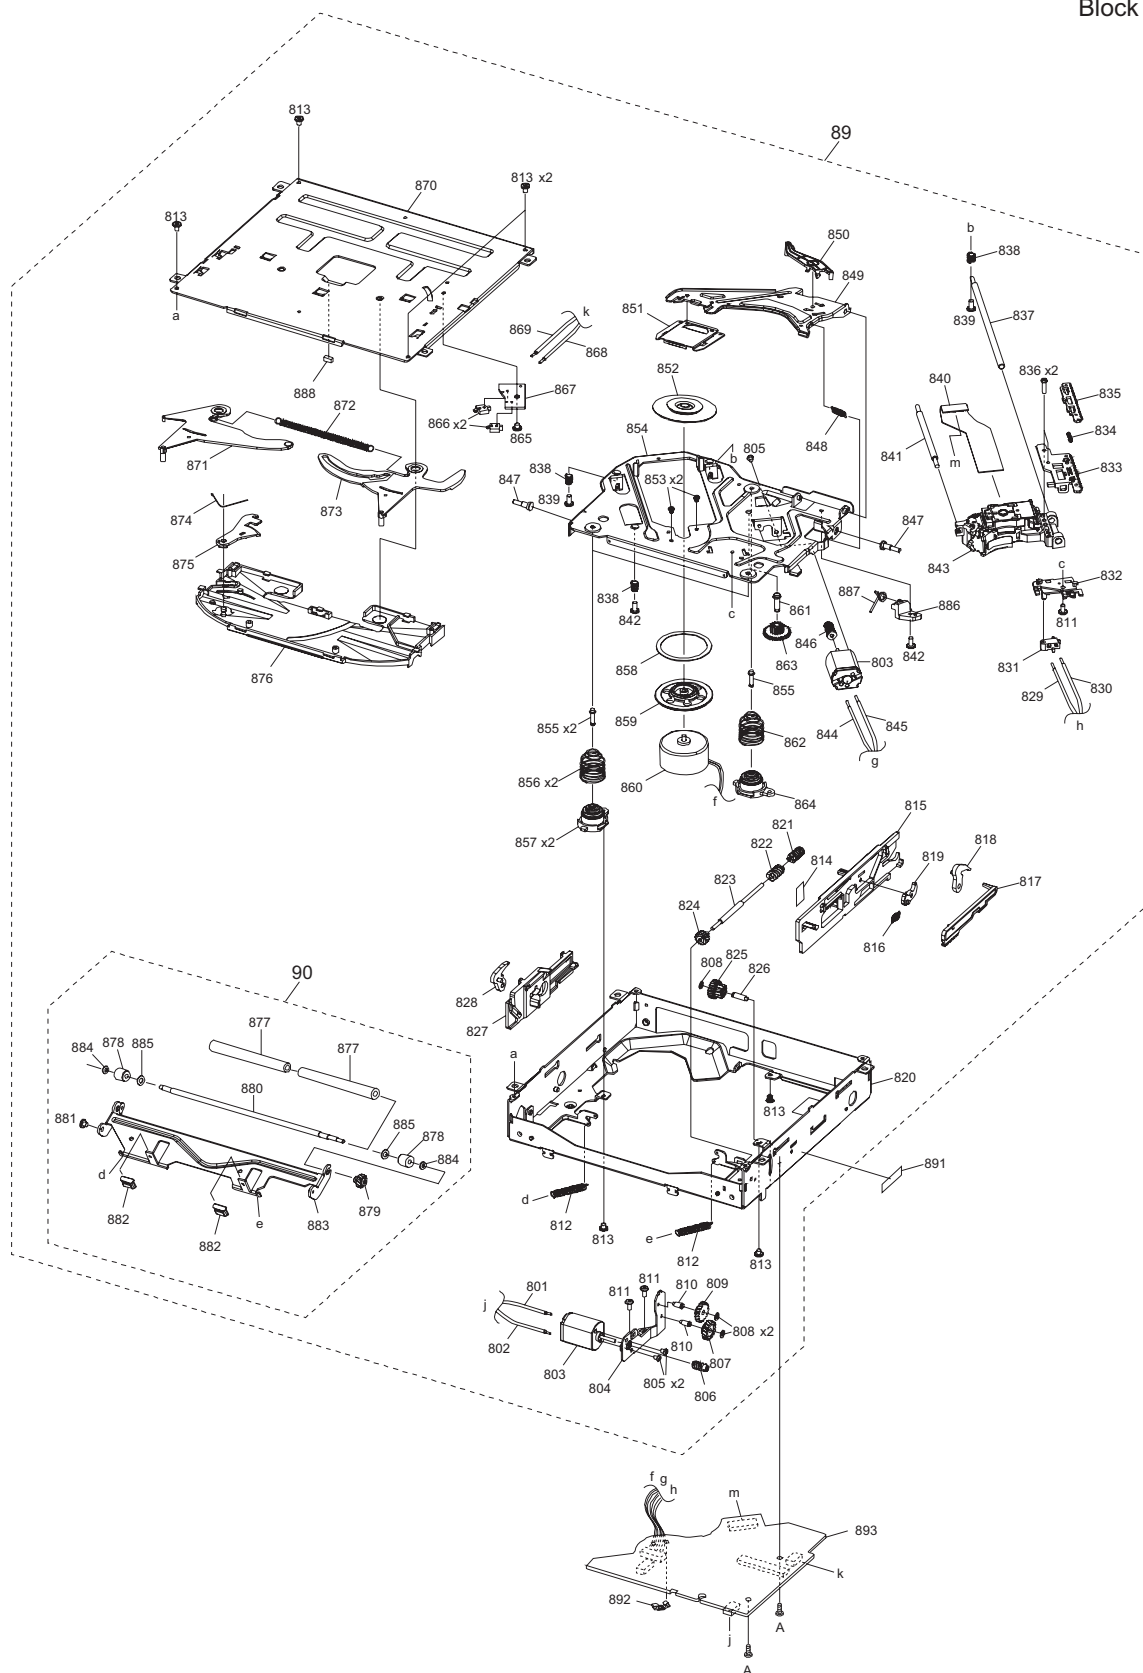

Parts with the exploded numbers larger than 800 are not supplied.

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (DVD MECHANISM : FD3-1A00NXN) <MJMM>						
A		LV44615-001A	SPECIAL SCREW		2	
89		D4A-0010-00	DVD DRIVE		1	
90		D4A-0011-00	ROLLAR ASSY		1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
------	------------	-----------	------------	-------------	-----	-------

MAIN PWB ASSY (XJ1-017x-xx) Except DDX320BT <01>

IC1	LV5684NPVD	IC	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
IC111	MP9942GJ	ANALOG IC	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
IC131	MP9942GJ	ANALOG IC	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
IC151	LM3481MMX-X	IC	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
IC171	MP9942GJ	ANALOG IC	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
IC172	TPS2065CDBV-X	IC	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
IC173	NJM2819ADL352X	IC	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
IC174	XC6503D501PG-X	IC	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
IC201	JCV8034	IC	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
IC301	TDA7721-X	IC	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
IC341	BH7673G-W	IC	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
IC351	NJM2535V-X	IC	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
IC361	NJM2535V-X	IC	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
IC362	NJM2561F1	BIPOLAR IC	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
IC401	SI4763-A42-GM	MOS IC	1	K1,K2,K3,X2,E2,E3,Q1 ,Q2
IC471	XC6201P502PR-X	IC	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
IC501	W3F-0017-00	MCU IC	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
IC502	BU4824F-W	IC	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
IC503	R1EX24016ATAA-X	IC	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
IC711	TC7SET08FU-J-X	IC(DIGITAL)	1	K0,K1,K2,K3,X2,E1,E2 ,E3
IC721	TC7SH17FUF	MOS IC	1	K0,K1,K2,K3,X2,E1,E2 ,E3
IC731	NJM2584AM-X	SV-ANALOGUE IC	1	X2,E1,E2,E3
IC751	TC7SET08FU-J-X	IC(DIGITAL)	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
IC801	W3F-0018-00	IC(MCU)	1	E1
Q31	LSCR523EBFS8	TRANSISTOR	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
Q32	LSAR523EBFS8	TRANSISTOR	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
Q33	LTA014TUB-X	DIGI TRANSISTOR	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
Q34	LTC014YEBFS8	DIGI TRANSISTOR	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
Q35	LTC014YEBFS8	DIGI TRANSISTOR	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
Q36	LSCR523EBFS8	TRANSISTOR	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
Q37	LSAR523EBFS8	TRANSISTOR	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
Q41	LTC014YEBFS8	DIGI TRANSISTOR	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
Q42	LSCR523UBFS8	TRANSISTOR	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
Q43	LSAR523UBFS8	TRANSISTOR	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
Q51	LSCR523EBFS8	TRANSISTOR	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
Q91	LSAR523EBFS8	TRANSISTOR	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
Q92	LTA014YEBFS8	DIGI TRANSISTOR	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
Q93	LSCR523EBFS8	TRANSISTOR	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
Q94	LTC024EEB-X	DIGI TRANSISTOR	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
Q101	MTM98140-X	TRANSISTOR	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
Q102	LTA014EEBFS8	DIGI TRANSISTOR	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
Q105	LTC044EEBFS8	DIGI TRANSISTOR	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
Q151	RTQ035N03-W	MOS FET	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
Q252	LTA043ZUB-X	DIGI TRANSISTOR	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
Q261	LTC043TUB-X	DIGI TRANSISTOR	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
Q262	LTC043TUB-X	DIGI TRANSISTOR	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
Q263	LTC043TUB-X	DIGI TRANSISTOR	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	Q264	LTC043TUB-X	DIGI TRANSISTOR		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	Q265	LTC043TUB-X	DIGI TRANSISTOR		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	Q511	LTA014EEBFS8	DIGI TRANSISTOR		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	Q512	LTC014YEBFS8	DIGI TRANSISTOR		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	Q513	LTC014YEBFS8	DIGI TRANSISTOR		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	Q521	DSA2001/R/-X	TRANSISTOR		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	Q591	RE1C002ZP-X	MOS FET		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	Q592	LTC044EEBFS8	DIGI TRANSISTOR		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	Q601	LTA043ZEBFS8	DIGI TRANSISTOR		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	Q611	LTC043ZEBFS8	DIGI TRANSISTOR		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	Q612	LTC043ZEBFS8	DIGI TRANSISTOR		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	Q613	LTA043ZEBFS8	DIGI TRANSISTOR		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	Q614	LTA043ZEBFS8	DIGI TRANSISTOR		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	Q761	RE1C002ZP-X	MOS FET		1	X2,E1,E2,E3	
	Q762	LTC014YEBFS8	DIGI TRANSISTOR		1	X2,E1,E2,E3	
	Q771	RE1C002ZP-X	MOS FET		1	X2,E1,E2,E3	
	D1	1N5402-BPC07	DIODE		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	D2	GS1J-LTP-X	SI DIODE		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	D17	SK34A-L-X	SB DIODE		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	D18	MBRX130	SCHOTTKY DIODE		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	D31	DZ2J062M	ZENER DIODE		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	D41	DZ2J180M	ZENER DIODE		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	D42	DZ2J062M	ZENER DIODE		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	D61	DAP202U-X	SI DIODE		1	E1,E2,E3,Q1,Q2	
	D71	DZ2J062M	ZENER DIODE		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	D81	MBRX130	SCHOTTKY DIODE		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	D82	MBRX130	SCHOTTKY DIODE		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	D83	MBRX130	SCHOTTKY DIODE		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	D84	MBRX130	SCHOTTKY DIODE		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	D91	DA2J101	DIODE		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	D92	DA2J101	DIODE		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	D101	DZ2J180M	ZENER DIODE		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	D161	RB160L-40	SCHOTTKY DIODE		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	D162	DA2J101	DIODE		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	D164	DA2J101	DIODE		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	D183	DA2J101	DIODE		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	D184	DA2J101	DIODE		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	D241	DAP202U-X	SI DIODE		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	D251	DAP202U-X	SI DIODE		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	D301	DAP202U-X	SI DIODE		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	D511	DA2J101	DIODE		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	D761	DA2J101	DIODE		1	X2,E1,E2,E3	
	D771	DA2J101	DIODE		1	X2,E1,E2,E3	
	D821	DZ2J033M	ZENER DIODE		1	E1	
	C1	QE20934-338	E CAPACITOR	3300uF	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	C11	CK730BY1E106K	C CAPACITOR	10uF 25V K	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	C12	CK730BY1E106K	C CAPACITOR	10uF 25V K	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	C13	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	C14	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	C15	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	C16	CE32CB1C470M	E CAPACITOR	47uF 16V M	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	C17	CD04CZ1E101M	E CAPACITOR	100uF 25V M	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C18	CD04AZ1C471M	E CAPACITOR	470uF 16V M	1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C21	QE20852-337Z	E CAPACITOR	330uF	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C23	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C25	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C27	CK73FBB1H224K	C CAPACITOR	0.22uF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C28	CK73FBB1H224K	C CAPACITOR	0.22uF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C41	CK73FBB1H334K	C CAPACITOR	0.33uF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C42	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C51	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C52	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C61	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C91	CK73GBB0J225K	C CAPACITOR	2.2uF 6.3V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C92	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C101	CK73FBB1H334K	C CAPACITOR	0.33uF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C112	CK730BY1E106K	C CAPACITOR	10uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C118	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C121	QE20852-337Z	E CAPACITOR	330uF	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C123	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C124	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C125	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C126	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C127	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C132	CK730BY1E106K	C CAPACITOR	10uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C138	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C141	CE32BY1C221M	E CAPACITOR		1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C143	CC73HCH1H120J	C CAPACITOR	12pF 50V J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C144	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C145	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C146	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C147	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C151	CK730BY1E106K	C CAPACITOR	10uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C152	CK730BY1E106K	C CAPACITOR	10uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C153	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C154	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C155	CK73HBB1H391K	C CAPACITOR	390pF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C161	CD04CZ1E101M	E CAPACITOR	100uF 25V M	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C162	CK730BY1E106K	C CAPACITOR	10uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C163	CK730BY1E106K	C CAPACITOR	10uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C164	CK73HBB1H821K	C CAPACITOR	820pF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C165	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C166	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C172	CK730BY1E106K	C CAPACITOR	10uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C178	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C181	CE32BY1C221M	E CAPACITOR		1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C183	CC73HCH1H120J	C CAPACITOR	12pF 50V J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C184	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C185	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C186	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C187	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C188	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C189	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C190	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C191	CE32BY1C221M	E CAPACITOR		1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C192	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C193	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C194	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C200	CE32CB1C100M	E CAPACITOR	10uF 16V M	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C201	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C202	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C203	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C204	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C206	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C207	CK73GBB1A684K	C CAPACITOR	0.68uF 10V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C221	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C222	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C223	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C224	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C225	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C226	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C227	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C228	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C241	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C245	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C251	CK730DK1E106K	C CAPACITOR	10uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C252	CK730DK1E106K	C CAPACITOR	10uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C253	CK730DK1E106K	C CAPACITOR	10uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C254	CK730DK1E106K	C CAPACITOR	10uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C255	CK730DK1E106K	C CAPACITOR	10uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C271	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C272	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C273	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C274	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C275	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C301	CE32CB1C470M	E CAPACITOR	47uF 16V M	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C302	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C303	CE32CB1C470M	E CAPACITOR	47uF 16V M	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C304	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C305	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C306	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C307	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C308	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C313	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C314	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C335	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C336	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C341	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C342	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C343	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C345	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C346	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C347	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C351	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C352	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C354	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C361	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	X2,E1,E2,E3
	C362	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C363	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C364	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C365	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C366	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C367	CD04AZ0J471M	E CAPACITOR	470uF 6.3V M	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C402	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	K1,K2,K3,X2,E2,E3,Q1 ,Q2
	C403	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	K1,K2,K3,X2,E2,E3,Q1 ,Q2
	C404	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	K1,K2,K3,X2,E2,E3,Q1 ,Q2
	C405	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	K1,K2,K3,X2,E2,E3,Q1 ,Q2
	C406	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K1,K2,K3,X2,E2,E3,Q1 ,Q2
	C407	CK73GBB1H222K	C CAPACITOR	2200pF 50V K	1	K1,K2,K3,X2,E2,E3,Q1 ,Q2
	C408	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	K1,K2,K3,X2,E2,E3,Q1 ,Q2
	C409	CC73GCH1H390J	C CAPACITOR	39pF 50V J	1	K1,K2,K3,X2,E2,E3,Q1 ,Q2
	C410	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	K1,K2,K3,X2,E2,E3,Q1 ,Q2
△	C415	CC73GCH1H010C	C CAPACITOR	1pF 50V C	1	K1,K2,K3,X2,E2,E3,Q1 ,Q2
	C416	CC73GCH1H050C	C CAPACITOR	5pF 50V C	1	K1,K2,K3,X2,E2,E3,Q1 ,Q2
	C418	CK73GBB1C104K	C CAPACITOR	0.1uF 16V K	1	K1,K2,K3,X2,E2,E3,Q1 ,Q2
	C419	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	K1,K2,K3,X2,E2,E3,Q1 ,Q2
	C420	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K1,K2,K3,X2,E2,E3,Q1 ,Q2
	C421	CK73GBB1C104K	C CAPACITOR	0.1uF 16V K	1	K1,K2,K3,X2,E2,E3,Q1 ,Q2
	C422	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	K1,K2,K3,X2,E2,E3,Q1 ,Q2
	C425	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	K1,K2,K3,X2,E2,E3,Q1 ,Q2
	C426	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	K1,K2,K3,X2,E2,E3,Q1 ,Q2
	C427	CK73GBB1A105K	C CAPACITOR	1uF 10V K	1	K1,K2,K3,X2,E2,E3,Q1 ,Q2
	C428	CK73GBB1A105K	C CAPACITOR	1uF 10V K	1	K1,K2,K3,X2,E2,E3,Q1 ,Q2
	C431	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K1,K2,K3,X2,E2,E3,Q1 ,Q2
	C432	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K1,K2,K3,X2,E2,E3,Q1 ,Q2
	C435	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	K1,K2,K3,X2,E2,E3,Q1 ,Q2
	C436	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	K1,K2,K3,X2,E2,E3,Q1 ,Q2
	C451	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C452	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C453	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C461	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C462	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C463	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	K0,K1,K2,K3,X2,E1,E2

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
						,E3,Q1,Q2
	C471	CK73GGB1C105K	C CAPACITOR	1uF 16V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C472	CK73GGB1C105K	C CAPACITOR	1uF 16V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C503	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C504	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C505	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C506	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C507	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C508	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C509	CK73GGB1H104K	C CAPACITOR	0.1uF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C510	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C511	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C513	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C516	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C520	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C522	CK73GGB1H103K	C CAPACITOR	0.01uF 50V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C523	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C524	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C525	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C527	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C530	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C531	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C532	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C533	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C534	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C536	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C541	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C542	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C544	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C551	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C552	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C561	CC73GCH1H220J	C CAPACITOR	22pF 50V J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C562	CC73GCH1H220J	C CAPACITOR	22pF 50V J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C564	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C571	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C592	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C593	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C594	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C652	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C653	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C654	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C656	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C657	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C658	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C659	CD04AZ1C101M	E CAPACITOR	100uF 16V M	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C660	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	C661	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	C662	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	C671	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	C672	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	C673	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	C674	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	C682	CK73HBB1C103K	C CAPACITOR	0.01uF 16V K	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	C692	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	C693	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	C711	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	K0,K1,K2,K3,X2,E1,E2,E3	
	C721	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	K0,K1,K2,K3,X2,E1,E2,E3	
	C731	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	X2,E1,E2,E3	
	C732	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	X2,E1,E2,E3	
	C733	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	X2,E1,E2,E3	
	C734	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	X2,E1,E2,E3	
	C735	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	X2,E1,E2,E3	
	C736	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	X2,E1,E2,E3	
	C737	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	C738	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	X2,E1,E2,E3	
	C751	CC73HCH1H331J	C CAPACITOR	330pF 50V J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	C752	CC73HCH1H331J	C CAPACITOR	330pF 50V J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	C753	CK73HBB1C103K	C CAPACITOR	0.01uF 16V K	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	C801	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	E1	
	C802	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	E1	
	C803	CK73HXR0J474K	C CAPACITOR	0.47uF 6.3V K	1	E1	
	C811	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	E1	
	C903	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	K0,K2,K3,X2,E1,E3,Q2	
	C904	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K0,K2,K3,X2,E1,E3,Q2	
	C905	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K0,K2,K3,X2,E1,E3,Q2	
	C906	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K0,K2,K3,X2,E1,E3,Q2	
	C909	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K0,K2,K3,X2,E1,E3,Q2	
	C910	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K0,K2,K3,X2,E1,E3,Q2	
	C911	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	K0,K2,K3,X2,E1,E3,Q2	
	C912	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	C951	CC73HCH1H050C	C CAPACITOR	5pF 50V C	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	C952	CC73HCH1H050C	C CAPACITOR	5pF 50V C	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	C953	CC73HCH1H050C	C CAPACITOR	5pF 50V C	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R18	RK73GH2A303D	MG RESISTOR	30kΩ 1/10W D	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R19	RK73GH2A103D	MG RESISTOR	10kΩ 1/10W D	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R20	RK73GH2A433D	MG RESISTOR	43kΩ 1/10W D	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R22	RK73GH2A512D	MG RESISTOR	5.1kΩ 1/10W D	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R29	RK73HH1J513D	MG RESISTOR	51kΩ 1/16W D	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R30	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R31	RK73HH1J333D	MG RESISTOR	33kΩ 1/16W D	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R32	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R33	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R34	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R35	RK73HH1J753D	MG RESISTOR	75kΩ 1/16W D	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R36	RK73HH1J304D	MG RESISTOR	300kΩ 1/16W D	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R37	RK73HH1J304D	MG RESISTOR	300kΩ 1/16W D	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R38	RK73HH1J154D	MG RESISTOR	150kΩ 1/16W D	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R39	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R40	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R41	RK73EB2E153J	MG RESISTOR	15kΩ 1/4W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R42	RK73HB1J304J	MG RESISTOR	300kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R43	RK73HB1J304J	MG RESISTOR	300kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R44	RK73GB2A623J	MG RESISTOR	62kΩ 1/10W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R45	RK73EB2E102J	MG RESISTOR	1kΩ 1/4W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R46	RK73EB2E102J	MG RESISTOR	1kΩ 1/4W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R47	RK73EB2E102J	MG RESISTOR	1kΩ 1/4W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R48	RK73HH1J224D	MG RESISTOR	220kΩ 1/16W D	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R49	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R50	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R51	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R52	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R53	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R54	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R55	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R56	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R61	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	.E3,Q1,Q2 E1,E2,E3,Q1,Q2
	R62	RK73HB1J683J	MG RESISTOR	68kΩ 1/16W J	1	.E3,Q1,Q2 E1,E2,E3,Q1,Q2
	R63	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	.E3,Q1,Q2 E1,E2,E3,Q1,Q2
	R71	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R80	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	.E3,Q1,Q2 E1,E2,E3,Q1,Q2
	R81	RK73FB2B472J	MG RESISTOR	4.7kΩ 1/8W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R82	RK73FB2B472J	MG RESISTOR	4.7kΩ 1/8W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2
	R91	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R93	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R94	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R95	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R96	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R97	RK73GB2A272J	MG RESISTOR	2.7kΩ 1/10W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R98	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R101	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R102	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R103	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R112	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R121	RK73HH1J513D	MG RESISTOR	51kΩ 1/16W D	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R122	RK73HH1J163D	MG RESISTOR	16kΩ 1/16W D	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R123	RK73HH1J513D	MG RESISTOR	51kΩ 1/16W D	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R124	RK73HB1J200J	MG RESISTOR	20Ω 1/16W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R125	RK73PB2H100J	MG RESISTOR	10Ω 1/2W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R132	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R141	RK73HH1J513D	MG RESISTOR	51kΩ 1/16W D	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R142	RK73HH1J562D	MG RESISTOR	5.6kΩ 1/16W D	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R143	RK73HH1J302D	MG RESISTOR	3kΩ 1/16W D	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R144	RK73HB1J200J	MG RESISTOR	20Ω 1/16W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R145	RK73PB2H100J	MG RESISTOR	10Ω 1/2W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R151	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R152	RK73HH1J563D	MG RESISTOR	56kΩ 1/16W D	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R153	RK73PB2H100J	MG RESISTOR	10Ω 1/2W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R154	RK73HH1J152D	MG RESISTOR	1.5kΩ 1/16W D	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R155	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R156	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R157	RK73HH1J164D	MG RESISTOR	160kΩ 1/16W D	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2
	R158	RK73EB2E560J	MG RESISTOR	56Ω 1/4W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R161	RK73HH1J394D	MG RESISTOR	390kΩ 1/16W D	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R162	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R163	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R164	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R165	NRZ0126-R062X	MG RESISTOR	0.062Ω 1/3W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R166	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R172	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R181	RK73HH1J473D	MG RESISTOR	47kΩ 1/16W D	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R182	RK73HH1J752D	MG RESISTOR	7.5kΩ 1/16W D	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R183	RK73HH1J302D	MG RESISTOR	3kΩ 1/16W D	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R184	RK73HB1J200J	MG RESISTOR	20Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R185	RK73PB2H100J	MG RESISTOR	10Ω 1/2W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R187	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R188	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R205	RK73HB1J6R8J	MG RESISTOR	6.8Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R240	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R241	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R242	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R243	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R244	RK73HB1J182J	MG RESISTOR	1.8kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R245	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R246	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R248	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R251	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R252	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R253	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R254	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R255	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R261	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R262	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R263	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R264	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R265	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R271	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R272	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R273	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R274	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R275	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R301	RK73GB2A2R2J	MG RESISTOR	2.2Ω 1/10W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R302	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R304	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R305	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R306	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R331	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R332	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R333	RK73GB2A620J	MG RESISTOR	62Ω 1/10W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R334	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	R335	RK73GB2A332J	MG RESISTOR	3.3kΩ 1/10W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R336	RK73GB2A332J	MG RESISTOR	3.3kΩ 1/10W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R337	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R338	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R339	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R340	RK73HB1J302J	MG RESISTOR	3kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R341	RK73HB1J302J	MG RESISTOR	3kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R352	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R361	RK73GH2A750D	MG RESISTOR	75Ω 1/10W D	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R362	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	K0,K1,K2,K3,Q1,Q2	
	R371	RK73HH1J750D	MG RESISTOR	75Ω 1/16W D	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R372	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R401	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K1,K2,K3,X2,E2,E3,Q1,Q2	
	R403	RK73GB2A240J	MG RESISTOR	24Ω 1/10W J	1	K1,K2,K3,X2,E2,E3,Q1,Q2	
	R404	RK73GB2A474J	MG RESISTOR	470kΩ 1/10W J	1	K1,K2,K3,X2,E2,E3,Q1,Q2	
	R405	RK73GB2A474J	MG RESISTOR	470kΩ 1/10W J	1	K1,K2,K3,X2,E2,E3,Q1,Q2	
	R410	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	K1,K2,K3,X2,E2,E3,Q1,Q2	
	R411	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	K1,K2,K3,X2,E2,E3,Q1,Q2	
	R412	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	K1,K2,K3,X2,E2,E3,Q1,Q2	
	R414	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	K1,K2,K3,X2,E2,E3,Q1,Q2	
	R416	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K1,K2,K3,X2,E2,E3,Q1,Q2	
	R417	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K1,K2,K3,X2,E2,E3,Q1,Q2	
	R418	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K1,K2,K3,X2,E2,E3,Q1,Q2	
	R426	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K1,K2,K3,X2,E2,E3,Q1,Q2	
	R429	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K1,K2,K3	
	R429	RK73GB2A150J	MG RESISTOR	15Ω 1/10W J	1	X2,E2,E3,Q1,Q2	
	R430	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K1,K2,K3,X2,E2,E3,Q1,Q2	
	R435	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K1,K2,K3,X2,E2,E3,Q1,Q2	
	R436	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K1,K2,K3,X2,E2,E3,Q1,Q2	
	R437	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R438	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K1,K2,K3,X2,E2,E3,Q1,Q2	
	R439	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	K1,K2,K3,X2,E2,E3,Q1,Q2	
	R440	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K1,K2,K3,X2,E2,E3,Q1,Q2	
	R441	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K1,K2,K3,X2,E2,E3,Q1,Q2	
	R442	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K1,K2,K3,X2,E2,E3,Q1,Q2	
	R443	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K1,K2,K3,X2,E2,E3,Q1,Q2	
	R444	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K1,K2,K3,X2,E2,E3,Q1,Q2	
	R445	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	K1,K2,K3,X2,E2,E3,Q1,Q2	
	R471	RK73EB2E100J	MG RESISTOR	10Ω 1/4W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R497	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K1,K2,K3,X2,E2,E3,Q1,Q2	
	R498	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K1,K2,K3,X2,E2,E3,Q1,Q2	
	R499	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K0	
	R501	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R502	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R503	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R504	RK73HB1J154J	MG RESISTOR	150kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R505	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R507	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2	
	R509	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	R510	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	.E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R511	RK73HB1J753J	MG RESISTOR	75kΩ 1/16W J	1	X2,E1,E2,E3	
	R512	RK73HB1J753J	MG RESISTOR	75kΩ 1/16W J	1	K0,K1,K2,K3,Q1,Q2	
	R513	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0,K2	
	R514	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K1,K3,X2,E1,E2,E3,Q1 .Q2	
	R515	RK73HB1J753J	MG RESISTOR	75kΩ 1/16W J	1	K0	
	R515	RK73HB1J154J	MG RESISTOR	150kΩ 1/16W J	1	K1,K2,K3,X2,E2,E3,Q1 .Q2	
	R516	RK73HB1J124J	MG RESISTOR	120kΩ 1/16W J	1	K1,K2,K3,X2,E2,E3,Q1 .Q2	
	R516	RK73HB1J753J	MG RESISTOR	75kΩ 1/16W J	1	E1	
	R517	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R518	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R519	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R520	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R521	RK73HB1J753J	MG RESISTOR	75kΩ 1/16W J	1	X2,E1,E2,E3	
	R521	RK73HB1J154J	MG RESISTOR	150kΩ 1/16W J	1	Q1,Q2	
	R522	RK73HB1J753J	MG RESISTOR	75kΩ 1/16W J	1	K0,K1,K2,K3,Q1,Q2	
	R522	RK73HB1J154J	MG RESISTOR	150kΩ 1/16W J	1	X2	
	R522	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	E1,E2,E3	
	R523	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R524	RK73HB1J753J	MG RESISTOR	75kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R526	RK73HB1J753J	MG RESISTOR	75kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R527	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R528	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R529	RK73HB1J106J	MG RESISTOR	10MΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R530	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R531	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R532	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R533	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R534	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R535	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R536	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R537	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R538	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R539	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R540	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R541	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	X2,E1,E2,E3,Q1,Q2	
	R542	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0,K1,K2,K3	
	R545	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R546	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R547	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R548	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R549	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R550	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R551	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R552	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R553	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R557	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R559	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R561	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R562	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R563	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R564	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 .E3,Q1,Q2	
	R565	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
						,E3,Q1,Q2
	R566	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R568	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R570	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R571	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R572	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R575	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R576	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R578	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R579	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R581	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R582	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R583	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R584	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R585	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R586	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R587	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R588	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R589	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R590	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R592	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0,K1,K2,K3,Q1,Q2
	R593	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	X2,E1,E2,E3
	R594	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R595	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R596	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R611	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R612	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R621	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R622	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R623	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R661	RK73GH2A151D	MG RESISTOR	150Ω 1/10W D	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R662	RK73GH2A151D	MG RESISTOR	150Ω 1/10W D	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R663	RK73GH2A151D	MG RESISTOR	150Ω 1/10W D	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R664	RK73GH2A151D	MG RESISTOR	150Ω 1/10W D	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R671	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R672	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R673	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R674	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R681	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R682	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R683	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R714	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0,K1,K2,K3
	R715	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3
	R716	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0,K1,K2,K3
	R721	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3
	R722	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R723	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R724	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2 ,E3,Q1,Q2
	R725	RK73HB1J753J	MG RESISTOR	75kΩ 1/16W J	1	K0,K1,K2,K3
	R725	RK73HB1J124J	MG RESISTOR	120kΩ 1/16W J	1	Q1,Q2

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R726	RK73HB1J753J	MG RESISTOR	75kΩ 1/16W J	1	X2,E1,E2,E3
	R726	RK73HB1J154J	MG RESISTOR	150kΩ 1/16W J	1	Q1,Q2
	R731	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	X2,E1,E2,E3
	R732	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	X2,E1,E2,E3
	R733	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	X2,E1,E2,E3
	R734	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	X2,E1,E2,E3
	R735	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	X2,E1,E2,E3
	R736	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	X2,E1,E2,E3
	R737	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0,K1,K2,K3,Q1,Q2
	R738	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0,K1,K2,K3,Q1,Q2
	R739	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0,K1,K2,K3,Q1,Q2
	R751	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	R752	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	R755	RK73HB1J912J	MG RESISTOR	9.1kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	R756	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	R757	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	R758	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	R759	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	X2,E1,E2,E3
	R762	RK73GH2A472D	MG RESISTOR	4.7kΩ 1/10W D	1	X2,E1,E2,E3
	R763	RK73EB2E511J	MG RESISTOR	510Ω 1/4W J	1	X2,E1,E2,E3
	R764	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	1	X2,E1,E2,E3
	R765	RK73GB2A681J	MG RESISTOR	680Ω 1/10W J	1	X2,E1,E2,E3
	R766	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	X2,E1,E2,E3
	R767	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	X2,E1,E2,E3
	R772	RK73GH2A472D	MG RESISTOR	4.7kΩ 1/10W D	1	X2,E1,E2,E3
	R773	RK73EB2E511J	MG RESISTOR	510Ω 1/4W J	1	X2,E1,E2,E3
	R774	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	1	X2,E1,E2,E3
	R775	RK73GB2A681J	MG RESISTOR	680Ω 1/10W J	1	X2,E1,E2,E3
	R776	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	X2,E1,E2,E3
	R777	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	X2,E1,E2,E3
	R786	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	R793	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	R795	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	R796	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	R797	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	R798	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	R801	RK73GB2A2R2J	MG RESISTOR	2.2Ω 1/10W J	1	E1
	R802	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	E1
	R803	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	E1
	R804	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	E1
	R805	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	E1
	R806	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	E1
	R807	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	E1
	R808	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	E1
	R811	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0,E1
	R813	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0,E1
	R814	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0,E1
	R815	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	E1
	R816	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R817	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	E1
	R818	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	E1
	R821	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	E1
	R822	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	E1
	R823	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	E1
	R824	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	E1
	R825	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	E1
	R827	RK73HB1J562J	MG RESISTOR	5.6kΩ 1/16W J	1	E1
	R831	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K0
	R832	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K0
	R833	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K0
	R834	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K0
	R835	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K0
	R843	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	R844	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	R845	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	R846	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	R881	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	E1
	R891	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	R892	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	R893	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	R894	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	R895	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K0,K1,K2,K3,X2,E1,E2

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	R896	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2	
	R897	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2	
	R903	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	1	,E3,Q1,Q2 K0,K2,K3,X2,E1,E3,Q2	
	R907	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	,E3,Q1,Q2 K0,K2,K3,X2,E1,E3,Q2	
	R909	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	,E3,Q1,Q2 K0,K2,K3,X2,E1,E3,Q2	
	R913	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	,E3,Q1,Q2 K0,K2,K3,X2,E1,E3,Q2	
	R914	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	,E3,Q1,Q2 K1,E2,Q1	
	R917	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2	
	R941	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	,E3,Q1,Q2 K0,K2,K3,X2,E1,E3,Q2	
	R942	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	,E3,Q1,Q2 K0,K2,K3,X2,E1,E3,Q2	
	R951	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2	
	R952	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2	
	R953	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2	
	RA561	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2	
	RA581	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2	
	RA781	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2	
	RA841	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2	
	L1	QQR1883-002	CHOKO COIL		1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2	
	L121	LR79Z0DE220M	CHIP INDUCTOR	22uH	1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2	
	L141	LR79Z0DE220M	CHIP INDUCTOR	22uH	1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2	
	L151	NQLL8EM-470X	INDUCTOR	47uH M	1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2	
	L181	NQLL8EM-100X	INDUCTOR	10uH M	1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2	
	L401	LK73G0BER15K	M.CHIP INDUCTOR		1	,E3,Q1,Q2 K1,K2,K3,X2,E2,E3,Q1	
	L402	LK73G0BE82NK	M.CHIP INDUCTOR		1	,E3,Q1,Q2 K1,K2,K3,X2,E2,E3,Q1	
	L403	LK73G0BER12K	M.CHIP INDUCTOR		1	,E3,Q1,Q2 K1,K2,K3,X2,E2,E3,Q1	
	L405	LK73G0BE1R8K	M.CHIP INDUCTOR		1	,E3,Q1,Q2 K1,K2,K3,X2,E2,E3,Q1	
	L408	LK73G0BER39K	M.CHIP INDUCTOR		1	,E3,Q1,Q2 K1,K2,K3,X2,E2,E3,Q1	
	L410	L1K-0001-00	BALUN TRANS		1	,E3,Q1,Q2 K1,K2,K3,X2,E2,E3,Q1	
	L414	LK73G0BE100K	M.CHIP INDUCTOR		1	,E3,Q1,Q2 K1,K2,K3,X2,E2,E3,Q1	
	L451	LR73Z0AD4R7M	CHIP INDUCTOR	4.7uH	1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2	
	L461	LR73Z0AD4R7M	CHIP INDUCTOR	4.7uH	1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2	
	L501	NQR0199-003X	FERRITE BEADS		1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2	
	L601	NQR0154-005X	FERRITE CORE		1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2	
	L602	NQR0154-005X	FERRITE CORE		1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2	
	L651	LR73Z0AD4R7M	CHIP INDUCTOR	4.7uH	1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2	
	L652	LR73Z0AD4R7M	CHIP INDUCTOR	4.7uH	1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2	
	L653	LR79Z0AG100M	CHIP INDUCTOR	10uH	1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2	
	L681	NQR0704-001X	CHOKO COIL		1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2	
	L902	LR73Z0AD470M	CHIP INDUCTOR	47uH	1	,E3,Q1,Q2 K0,K2,K3,X2,E1,E3,Q2	
	A901	QAU0559-001	RF MODULE		1	,E3,Q1,Q2 K0,K2,K3,X2,E1,E3,Q2	
	CN1	QGA2501C1-02	W TO B CONNE	W-B (1-2)	1	,E3,Q1,Q2 K0,K1,K2,K3	
	CN91	QGA2501C1-02	W TO B CONNE	W-B (1-2)	1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2	
	CN501	QGF0534F7-22X	FFC/FPC CONNE	FFC/FPC (1-22)	1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2	
	CN601	QGF0534F7-45X	FFC/FPC CONNE	FFC/FPC (1-45)	1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2	
	CN651	QGF0534F7-50X	FFC/FPC CONNE	FFC/FPC (1-50)	1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2	
	CN681	QGA2001F1-05	W TO B CONNE	W-B (1-5)	1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2	
△	E801	QAM1484-001	CAR CABLE		1	,E3,Q1,Q2 E1	
△	F101	NMFZ032-4R0X-H	FUSE	4A	1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2	
△	F271	F53-0513-08	PATTERN FUSE	4A	1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2	
△	F331	F53-0513-08	PATTERN FUSE	4A	1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2	
△	F371	F53-0513-08	PATTERN FUSE	4A	1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2	
	J1	QNZ0607-001	CAR CONNECTOR		1	,E3,Q1,Q2 K0,K1,K2,K3,X2,E1,E2	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	J271	QNN0889-001	PIN JACK		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	J331	QNS0291-001	3.5 JACK		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	J371	QNN0890-001	PIN JACK		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	J401	QNB0356-001	ANT TERMINAL		1	K0,K1,K2,K3,X2,E2,E3,Q1,Q2
	J941	QNS0307-001	3.5 JACK	470Ω	1	K0,K2,K3,X2,E1,E3,Q2
	TH241	NAD0052-471X	P THERMISTOR		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	VA91	NAF0044-270X	VARISTOR(ZNR)		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	VA92	NAF0045-180X	VARISTOR(ZNR)		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	VA271	NAF0045-180X	VARISTOR(ZNR)		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	VA272	NAF0045-180X	VARISTOR(ZNR)		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	VA273	NAF0045-180X	VARISTOR(ZNR)		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	VA274	NAF0045-180X	VARISTOR(ZNR)		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	VA275	NAF0045-180X	VARISTOR(ZNR)		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	VA277	NAF0045-180X	VARISTOR(ZNR)		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	VA331	NAF0044-270X	VARISTOR(ZNR)		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	VA332	NAF0044-270X	VARISTOR(ZNR)		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	VA335	NAF0045-180X	VARISTOR(ZNR)		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	VA336	NAF0045-180X	VARISTOR(ZNR)		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	VA361	NAF0044-270X	VARISTOR(ZNR)		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	VA371	NAF0044-270X	VARISTOR(ZNR)		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	VA400	NAF0024-001X	ESD SUPPRESSOR		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	VA941	NAF0045-180X	VARISTOR(ZNR)		1	K0,K2,K3,X2,E1,E3,Q2
	VA942	NAF0045-180X	VARISTOR(ZNR)		1	K0,K2,K3,X2,E1,E3,Q2
	X401	L7J-0021-00	QUARTZ CRYSTAL		1	K1,K2,K3,X2,E2,E3,Q1,Q2
	X501	NAX1253-001X	CRYSTAL		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2
	X502	L7J-0059-00	QUARTZ CRYSTAL		1	K0,K1,K2,K3,X2,E1,E2,E3,Q1,Q2

MAIN PWB ASSY (XJ1-0170-12) DDX320BT <04>

IC1	LV5684NPVD	IC	1	K4
IC111	MP9942GJ	ANALOG IC	1	K4
IC131	MP9942GJ	ANALOG IC	1	K4
IC151	LM3481MMX-X	IC	1	K4
IC171	MP9942GJ	ANALOG IC	1	K4
IC172	TPS2065CDBV	MOS IC	1	K4
IC173	NJM2819ADL352X	IC	1	K4
IC174	XC6503D501PG-X	IC	1	K4
IC201	JCV8034	IC	1	K4
IC301	TDA7721-X	IC	1	K4
IC341	BH7673G-W	IC	1	K4
IC351	NJM2535V-X	IC	1	K4
IC361	NJM2535V-X	IC	1	K4
IC362	NJM2561F1	BIPOLAR IC	1	K4
IC401	SI4763-A42-GM	MOS IC	1	K4
IC471	XC6201P502PR-X	IC	1	K4
IC501	W3F-0017-00	MCU IC	1	K4
IC502	BU4824F-W	IC	1	K4
IC503	R1EX24016ATAA-X	IC	1	K4
IC711	TC7SET08FU-J-X	IC(DIGITAL)	1	K4
IC721	TC7SH17FUF	MOS IC	1	K4
IC751	TC7SET08FU-J-X	IC(DIGITAL)	1	K4
Q31	LSCR523EBFS8	TRANSISTOR	1	K4
Q32	LSAR523EBFS8	TRANSISTOR	1	K4
Q33	LTA014TUB-X	DIGI TRANSISTOR	1	K4
Q34	LTC014YEBFS8	DIGI TRANSISTOR	1	K4
Q35	LTC014YEBFS8	DIGI TRANSISTOR	1	K4
Q36	LSCR523EBFS8	TRANSISTOR	1	K4
Q37	LSAR523EBFS8	TRANSISTOR	1	K4
Q41	LTC014YEBFS8	DIGI TRANSISTOR	1	K4
Q42	LSCR523UBFS8	TRANSISTOR	1	K4
Q43	LSAR523UBFS8	TRANSISTOR	1	K4
Q51	LSCR523EBFS8	TRANSISTOR	1	K4
Q91	LSAR523EBFS8	TRANSISTOR	1	K4
Q92	LTA014YEBFS8	DIGI TRANSISTOR	1	K4
Q93	LSCR523EBFS8	TRANSISTOR	1	K4
Q94	LTC024EEB-X	DIGI TRANSISTOR	1	K4
Q101	MTM98140-X	TRANSISTOR	1	K4
Q102	LTA014EEBFS8	DIGI TRANSISTOR	1	K4
Q105	LTC044EEBFS8	DIGI TRANSISTOR	1	K4
Q151	RTQ035N03-W	MOS FET	1	K4

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	Q252	LTA043ZUB-X	DIGI TRANSISTOR		1	K4	
	Q261	LTC043TUB-X	DIGI TRANSISTOR		1	K4	
	Q262	LTC043TUB-X	DIGI TRANSISTOR		1	K4	
	Q263	LTC043TUB-X	DIGI TRANSISTOR		1	K4	
	Q264	LTC043TUB-X	DIGI TRANSISTOR		1	K4	
	Q265	LTC043TUB-X	DIGI TRANSISTOR		1	K4	
	Q511	LTA014EEBFS8	DIGI TRANSISTOR		1	K4	
	Q512	LTC014YEBFS8	DIGI TRANSISTOR		1	K4	
	Q513	LTC014YEBFS8	DIGI TRANSISTOR		1	K4	
	Q521	DSA2001/R-X	TRANSISTOR		1	K4	
	Q591	RE1C002ZP-X	MOS FET		1	K4	
	Q592	LTC044EEBFS8	DIGI TRANSISTOR		1	K4	
	Q601	LTA043ZEBFS8	DIGI TRANSISTOR		1	K4	
	Q611	LTC043ZEBFS8	DIGI TRANSISTOR		1	K4	
	Q612	LTC043ZEBFS8	DIGI TRANSISTOR		1	K4	
	Q613	LTA043ZEBFS8	DIGI TRANSISTOR		1	K4	
	Q614	LTA043ZEBFS8	DIGI TRANSISTOR		1	K4	
	D1	1N5402-BPC07	DIODE		1	K4	
	D2	GS1J-LTP-X	SI DIODE		1	K4	
	D17	SK34A-L-X	SB DIODE		1	K4	
	D18	MBRX130	SCHOTTKY DIODE		1	K4	
	D31	DZ2J062M	ZENER DIODE		1	K4	
	D41	DZ2J180M	ZENER DIODE		1	K4	
	D42	DZ2J062M	ZENER DIODE		1	K4	
	D71	DZ2J062M	ZENER DIODE		1	K4	
	D81	MBRX130	SCHOTTKY DIODE		1	K4	
	D82	MBRX130	SCHOTTKY DIODE		1	K4	
	D83	MBRX130	SCHOTTKY DIODE		1	K4	
	D84	MBRX130	SCHOTTKY DIODE		1	K4	
	D91	DA2J101	DIODE		1	K4	
	D92	DA2J101	DIODE		1	K4	
	D101	DZ2J180M	ZENER DIODE		1	K4	
	D161	RB160L-40	SCHOTTKY DIODE		1	K4	
	D162	DA2J101	DIODE		1	K4	
	D164	DA2J101	DIODE		1	K4	
	D183	DA2J101	DIODE		1	K4	
	D184	DA2J101	DIODE		1	K4	
	D241	DAP202U-X	SI DIODE		1	K4	
	D251	DAP202U-X	SI DIODE		1	K4	
	D301	DAP202U-X	SI DIODE		1	K4	
	D511	DA2J101	DIODE		1	K4	
	C1	QE20934-338	E CAPACITOR	3300uF	1	K4	
	C11	CK730BY1E106K	C CAPACITOR	10uF 25V K	1	K4	
	C12	CK730BY1E106K	C CAPACITOR	10uF 25V K	1	K4	
	C13	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K4	
	C14	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K4	
	C15	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K4	
	C16	CE32CB1C470M	E CAPACITOR	47uF 16V M	1	K4	
	C17	CD04CZ1E101M	E CAPACITOR	100uF 25V M	1	K4	
	C18	CD04AZ1C471M	E CAPACITOR	470uF 16V M	1	K4	
	C21	QE20852-337Z	E CAPACITOR	330uF	1	K4	
	C23	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	K4	
	C25	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K4	
	C27	CK73FBB1H224K	C CAPACITOR	0.22uF 50V K	1	K4	
	C28	CK73FBB1H224K	C CAPACITOR	0.22uF 50V K	1	K4	
	C41	CK73FBB1H334K	C CAPACITOR	0.33uF 50V K	1	K4	
	C42	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	K4	
	C51	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K4	
	C52	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	K4	
	C61	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	K4	
	C91	CK73GBB0J225K	C CAPACITOR	2.2uF 6.3V K	1	K4	
	C92	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K4	
	C101	CK73FBB1H334K	C CAPACITOR	0.33uF 50V K	1	K4	
	C112	CK730BY1E106K	C CAPACITOR	10uF 25V K	1	K4	
	C118	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	K4	
	C121	QE20852-337Z	E CAPACITOR	330uF	1	K4	
	C123	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	K4	
	C124	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	K4	
	C125	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	K4	
	C126	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	K4	
	C127	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	K4	
	C132	CK730BY1E106K	C CAPACITOR	10uF 25V K	1	K4	
	C138	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	K4	
	C141	CE32BY1C221M	E CAPACITOR		1	K4	
	C143	CC73HCH1H120J	C CAPACITOR	12pF 50V J	1	K4	
	C144	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K4	
	C145	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	K4	
	C146	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	K4	
	C147	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	K4	
	C151	CK730BY1E106K	C CAPACITOR	10uF 25V K	1	K4	
	C152	CK730BY1E106K	C CAPACITOR	10uF 25V K	1	K4	
	C153	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	K4	
	C154	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	K4	
	C155	CK73HBB1H391K	C CAPACITOR	390pF 50V K	1	K4	
	C161	CD04CZ1E101M	E CAPACITOR	100uF 25V M	1	K4	
	C162	CK730BY1E106K	C CAPACITOR	10uF 25V K	1	K4	
	C163	CK730BY1E106K	C CAPACITOR	10uF 25V K	1	K4	
	C164	CK73HBB1H821K	C CAPACITOR	820pF 50V K	1	K4	
	C165	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	K4	
	C166	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K4	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C172	CK730BY1E106K	C CAPACITOR	10uF 25V K	1	K4
	C178	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	K4
	C181	CE32BY1C221M	E CAPACITOR		1	K4
	C183	CC73HCH1H120J	C CAPACITOR	12pF 50V J	1	K4
	C184	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K4
	C185	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	K4
	C186	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	K4
	C187	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	K4
	C188	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	K4
	C189	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	K4
	C190	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K4
	C191	CE32BY1C221M	E CAPACITOR		1	K4
	C192	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K4
	C193	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K4
	C194	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K4
	C200	CE32CB1C100M	E CAPACITOR	10uF 16V M	1	K4
	C201	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	K4
	C202	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	K4
	C203	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	K4
	C204	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	K4
	C206	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	K4
	C207	CK73GBB1A684K	C CAPACITOR	0.68uF 10V K	1	K4
	C221	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	K4
	C222	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	K4
	C223	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	K4
	C224	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	K4
	C225	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	K4
	C226	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	K4
	C227	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	K4
	C228	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	K4
	C241	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K4
	C245	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K4
	C251	CK730DK1E106K	C CAPACITOR	10uF 25V K	1	K4
	C252	CK730DK1E106K	C CAPACITOR	10uF 25V K	1	K4
	C253	CK730DK1E106K	C CAPACITOR	10uF 25V K	1	K4
	C254	CK730DK1E106K	C CAPACITOR	10uF 25V K	1	K4
	C255	CK730DK1E106K	C CAPACITOR	10uF 25V K	1	K4
	C271	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	K4
	C272	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	K4
	C273	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	K4
	C274	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	K4
	C275	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	K4
	C301	CE32CB1C470M	E CAPACITOR	47uF 16V M	1	K4
	C302	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K4
	C303	CE32CB1C470M	E CAPACITOR	47uF 16V M	1	K4
	C304	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K4
	C305	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K4
	C306	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K4
	C307	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K4
	C308	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K4
	C313	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	K4
	C314	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	K4
	C335	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	K4
	C336	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	K4
	C341	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K4
	C342	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K4
	C343	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	K4
	C345	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	K4
	C346	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K4
	C347	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K4
	C351	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K4
	C352	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K4
	C354	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	K4
	C362	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K4
	C363	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K4
	C364	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	K4
	C365	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	K4
	C366	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	K4
	C367	CD04A20J471M	E CAPACITOR	470uF 6.3V M	1	K4
	C402	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	K4
	C403	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	K4
	C404	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	K4
	C405	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	K4
	C406	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K4
	C407	CK73GBB1H222K	C CAPACITOR	2200pF 50V K	1	K4
	C408	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	K4
	C409	CC73GCH1H390J	C CAPACITOR	39pF 50V J	1	K4
	C410	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	K4
	C415	CC73GCH1H010C	C CAPACITOR	1pF 50V C	1	K4
	C416	CC73GCH1H050C	C CAPACITOR	5pF 50V C	1	K4
	C418	CK73GBB1C104K	C CAPACITOR	0.1uF 16V K	1	K4
	C419	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	K4
	C420	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K4
	C421	CK73GBB1C104K	C CAPACITOR	0.1uF 16V K	1	K4
	C422	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	K4
	C425	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	K4
	C426	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	K4
	C427	CK73GBB1A105K	C CAPACITOR	1uF 10V K	1	K4
	C428	CK73GBB1A105K	C CAPACITOR	1uF 10V K	1	K4

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	C431	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K4	
	C432	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K4	
	C435	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	K4	
	C436	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	K4	
	C451	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	K4	
	C452	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	K4	
	C453	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	K4	
	C461	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	K4	
	C462	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	K4	
	C463	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	K4	
	C471	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K4	
	C472	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K4	
	C503	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	K4	
	C504	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	K4	
	C505	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	K4	
	C506	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	K4	
	C507	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	K4	
	C508	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	K4	
	C509	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	K4	
	C510	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K4	
	C511	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K4	
	C513	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K4	
	C516	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K4	
	C520	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K4	
	C522	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	K4	
	C523	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K4	
	C524	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K4	
	C525	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K4	
	C527	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K4	
	C530	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K4	
	C531	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K4	
	C532	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K4	
	C533	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K4	
	C534	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K4	
	C536	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K4	
	C541	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	K4	
	C542	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K4	
	C544	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K4	
	C551	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1	K4	
	C552	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1	K4	
	C561	CC73GCH1H220J	C CAPACITOR	22pF 50V J	1	K4	
	C562	CC73GCH1H220J	C CAPACITOR	22pF 50V J	1	K4	
	C564	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K4	
	C571	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K4	
	C592	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	K4	
	C593	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	K4	
	C594	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K4	
	C652	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K4	
	C653	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	K4	
	C654	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	K4	
	C656	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K4	
	C657	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	K4	
	C658	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	K4	
	C659	CD04AZ1C101M	E CAPACITOR	100uF 16V M	1	K4	
	C660	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K4	
	C661	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	K4	
	C662	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K4	
	C671	CK73HBB1H821K	C CAPACITOR	820pF 50V K	1	K4	
	C672	CK73HBB1H821K	C CAPACITOR	820pF 50V K	1	K4	
	C673	CK73HBB1H681K	C CAPACITOR	680pF 50V K	1	K4	
	C674	CK73HBB1H681K	C CAPACITOR	680pF 50V K	1	K4	
	C682	CK73HBB1C103K	C CAPACITOR	0.01uF 16V K	1	K4	
	C692	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K4	
	C693	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	1	K4	
	C711	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	K4	
	C721	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	K4	
	C737	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	K4	
	C751	CC73HCH1H331J	C CAPACITOR	330pF 50V J	1	K4	
	C752	CC73HCH1H331J	C CAPACITOR	330pF 50V J	1	K4	
	C753	CK73HBB1C103K	C CAPACITOR	0.01uF 16V K	1	K4	
	C903	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	K4	
	C904	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K4	
	C905	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K4	
	C906	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K4	
	C909	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K4	
	C910	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K4	
	C911	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	K4	
	C912	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	K4	
	C951	CC73HCH1H050C	C CAPACITOR	5pF 50V C	1	K4	
	C952	CC73HCH1H050C	C CAPACITOR	5pF 50V C	1	K4	
	C953	CC73HCH1H050C	C CAPACITOR	5pF 50V C	1	K4	
	R18	RK73GH2A303D	MG RESISTOR	30kΩ 1/10W D	1	K4	
	R19	RK73GH2A103D	MG RESISTOR	10kΩ 1/10W D	1	K4	
	R20	RK73GH2A433D	MG RESISTOR	43kΩ 1/10W D	1	K4	
	R22	RK73GH2A512D	MG RESISTOR	5.1kΩ 1/10W D	1	K4	
	R29	RK73HH1J513D	MG RESISTOR	51kΩ 1/16W D	1	K4	
	R30	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	K4	
	R31	RK73HH1J333D	MG RESISTOR	33kΩ 1/16W D	1	K4	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	R32	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	K4	
	R33	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	K4	
	R34	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4	
	R35	RK73HH1J753D	MG RESISTOR	75kΩ 1/16W D	1	K4	
	R36	RK73HH1J304D	MG RESISTOR	300kΩ 1/16W D	1	K4	
	R37	RK73HH1J304D	MG RESISTOR	300kΩ 1/16W D	1	K4	
	R38	RK73HH1J154D	MG RESISTOR	150kΩ 1/16W D	1	K4	
	R39	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	K4	
	R40	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	K4	
	R41	RK73EB2E153J	MG RESISTOR	15kΩ 1/4W J	1	K4	
	R42	RK73HB1J304J	MG RESISTOR	300kΩ 1/16W J	1	K4	
	R43	RK73HB1J304J	MG RESISTOR	300kΩ 1/16W J	1	K4	
	R44	RK73GB2A623J	MG RESISTOR	62kΩ 1/10W J	1	K4	
	R45	RK73EB2E102J	MG RESISTOR	1kΩ 1/4W J	1	K4	
	R46	RK73EB2E102J	MG RESISTOR	1kΩ 1/4W J	1	K4	
	R47	RK73EB2E102J	MG RESISTOR	1kΩ 1/4W J	1	K4	
	R48	RK73HH1J224D	MG RESISTOR	220kΩ 1/16W D	1	K4	
	R49	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	K4	
	R50	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	K4	
	R51	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	K4	
	R52	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	K4	
	R53	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	K4	
	R54	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	K4	
	R55	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K4	
	R56	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K4	
	R71	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	1	K4	
	R81	RK73FB2B472J	MG RESISTOR	4.7kΩ 1/8W J	1	K4	
	R82	RK73FB2B472J	MG RESISTOR	4.7kΩ 1/8W J	1	K4	
	R91	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	K4	
	R93	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K4	
	R94	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K4	
	R95	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4	
	R96	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4	
	R97	RK73GB2A272J	MG RESISTOR	2.7kΩ 1/10W J	1	K4	
	R98	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K4	
	R101	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K4	
	R102	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K4	
	R103	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K4	
	R112	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K4	
	R121	RK73HH1J513D	MG RESISTOR	51kΩ 1/16W D	1	K4	
	R122	RK73HH1J163D	MG RESISTOR	16kΩ 1/16W D	1	K4	
	R123	RK73HH1J513D	MG RESISTOR	51kΩ 1/16W D	1	K4	
	R124	RK73HB1J200J	MG RESISTOR	20Ω 1/16W J	1	K4	
	R125	RK73PB2H100J	MG RESISTOR	10Ω 1/2W J	1	K4	
	R132	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K4	
	R141	RK73HH1J513D	MG RESISTOR	51kΩ 1/16W D	1	K4	
	R142	RK73HH1J562D	MG RESISTOR	5.6kΩ 1/16W D	1	K4	
	R143	RK73HH1J302D	MG RESISTOR	3kΩ 1/16W D	1	K4	
	R144	RK73HB1J200J	MG RESISTOR	20Ω 1/16W J	1	K4	
	R145	RK73PB2H100J	MG RESISTOR	10Ω 1/2W J	1	K4	
	R151	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K4	
	R152	RK73HH1J563D	MG RESISTOR	56kΩ 1/16W D	1	K4	
	R153	RK73PB2H100J	MG RESISTOR	10Ω 1/2W J	1	K4	
	R154	RK73HH1J152D	MG RESISTOR	1.5kΩ 1/16W D	1	K4	
	R155	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1	K4	
	R156	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4	
	R157	RK73HH1J164D	MG RESISTOR	160kΩ 1/16W D	1	K4	
	R158	RK73EB2E560J	MG RESISTOR	56Ω 1/4W J	1	K4	
	R161	RK73HH1J394D	MG RESISTOR	390kΩ 1/16W D	1	K4	
	R162	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	K4	
	R163	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	K4	
	R164	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4	
	R165	NRZ0126-R062X	MG RESISTOR	0.062Ω 1/3W J	1	K4	
	R166	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	1	K4	
	R172	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K4	
	R181	RK73HH1J473D	MG RESISTOR	47kΩ 1/16W D	1	K4	
	R182	RK73HH1J752D	MG RESISTOR	7.5kΩ 1/16W D	1	K4	
	R183	RK73HH1J302D	MG RESISTOR	3kΩ 1/16W D	1	K4	
	R184	RK73HB1J200J	MG RESISTOR	20Ω 1/16W J	1	K4	
	R185	RK73PB2H100J	MG RESISTOR	10Ω 1/2W J	1	K4	
	R187	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K4	
	R188	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K4	
	R205	RK73HB1J6R8J	MG RESISTOR	6.8Ω 1/16W J	1	K4	
	R240	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K4	
	R241	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	1	K4	
	R242	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	K4	
	R243	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K4	
	R244	RK73HB1J182J	MG RESISTOR	1.8kΩ 1/16W J	1	K4	
	R245	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	K4	
	R246	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4	
	R248	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4	
	R251	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K4	
	R252	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K4	
	R253	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K4	
	R254	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K4	
	R255	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K4	
	R261	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K4	
	R262	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K4	
	R263	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K4	
	R264	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K4	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R265	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K4
	R271	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K4
	R272	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K4
	R273	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K4
	R274	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K4
	R275	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K4
	R301	RK73GB2A2R2J	MG RESISTOR	2.2Ω 1/10W J	1	K4
	R302	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K4
	R304	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K4
	R305	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K4
	R306	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K4
	R331	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	K4
	R332	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	K4
	R333	RK73GB2A620J	MG RESISTOR	62Ω 1/10W J	1	K4
	R334	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	1	K4
	R335	RK73GB2A332J	MG RESISTOR	3.3kΩ 1/10W J	1	K4
	R336	RK73GB2A332J	MG RESISTOR	3.3kΩ 1/10W J	1	K4
	R337	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	K4
	R338	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K4
	R339	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K4
	R340	RK73HB1J302J	MG RESISTOR	3kΩ 1/16W J	1	K4
	R341	RK73HB1J302J	MG RESISTOR	3kΩ 1/16W J	1	K4
	R352	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	K4
	R361	RK73GH2A750D	MG RESISTOR	75Ω 1/10W D	1	K4
	R362	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	K4
	R371	RK73HH1J750D	MG RESISTOR	75Ω 1/16W D	1	K4
	R372	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	K4
	R401	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K4
	R403	RK73GB2A240J	MG RESISTOR	24Ω 1/10W J	1	K4
	R404	RK73GB2A474J	MG RESISTOR	470kΩ 1/10W J	1	K4
	R405	RK73GB2A474J	MG RESISTOR	470kΩ 1/10W J	1	K4
	R410	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	K4
	R411	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	K4
	R412	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	K4
	R414	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	K4
	R416	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K4
	R417	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K4
	R418	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K4
	R426	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4
	R429	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K4
	R430	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K4
	R435	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K4
	R436	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K4
	R437	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	K4
	R438	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K4
	R439	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	K4
	R440	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K4
	R441	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K4
	R442	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K4
	R443	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K4
	R444	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K4
	R445	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	K4
	R471	RK73EB2E100J	MG RESISTOR	10Ω 1/4W J	1	K4
	R497	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4
	R498	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4
	R501	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	K4
	R502	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K4
	R503	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K4
	R504	RK73HB1J154J	MG RESISTOR	150kΩ 1/16W J	1	K4
	R505	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K4
	R507	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K4
	R509	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4
	R510	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K4
	R512	RK73HB1J753J	MG RESISTOR	75kΩ 1/16W J	1	K4
	R514	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4
	R515	RK73HB1J154J	MG RESISTOR	150kΩ 1/16W J	1	K4
	R516	RK73HB1J124J	MG RESISTOR	120kΩ 1/16W J	1	K4
	R517	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K4
	R518	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K4
	R519	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K4
	R520	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4
	R522	RK73HB1J753J	MG RESISTOR	75kΩ 1/16W J	1	K4
	R523	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K4
	R524	RK73HB1J753J	MG RESISTOR	75kΩ 1/16W J	1	K4
	R526	RK73HB1J753J	MG RESISTOR	75kΩ 1/16W J	1	K4
	R527	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4
	R528	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K4
	R529	RK73HB1J106J	MG RESISTOR	10MΩ 1/16W J	1	K4
	R530	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K4
	R531	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K4
	R532	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K4
	R533	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	K4
	R534	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	K4
	R535	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K4
	R536	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K4
	R537	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4
	R538	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4
	R539	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	R540	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	1	K4	
	R542	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4	
	R545	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K4	
	R546	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4	
	R547	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K4	
	R548	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K4	
	R549	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K4	
	R550	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4	
	R551	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4	
	R552	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K4	
	R553	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K4	
	R557	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K4	
	R559	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K4	
	R561	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K4	
	R562	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4	
	R563	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K4	
	R564	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	K4	
	R565	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K4	
	R566	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K4	
	R568	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4	
	R570	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K4	
	R571	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K4	
	R572	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K4	
	R575	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K4	
	R576	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K4	
	R578	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K4	
	R579	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K4	
	R581	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K4	
	R582	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4	
	R583	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4	
	R584	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K4	
	R585	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	K4	
	R586	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K4	
	R587	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	K4	
	R588	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K4	
	R589	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4	
	R590	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4	
	R592	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4	
	R594	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4	
	R595	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K4	
	R596	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	K4	
	R611	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	K4	
	R612	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	K4	
	R621	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K4	
	R622	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K4	
	R623	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K4	
	R661	RK73GH2A151D	MG RESISTOR	150Ω 1/10W D	1	K4	
	R662	RK73GH2A151D	MG RESISTOR	150Ω 1/10W D	1	K4	
	R663	RK73GH2A151D	MG RESISTOR	150Ω 1/10W D	1	K4	
	R664	RK73GH2A151D	MG RESISTOR	150Ω 1/10W D	1	K4	
	R671	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	1	K4	
	R672	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	1	K4	
	R673	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	K4	
	R674	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	K4	
	R681	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4	
	R682	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4	
	R683	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	K4	
	R714	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K4	
	R715	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K4	
	R716	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K4	
	R721	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4	
	R722	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K4	
	R723	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K4	
	R724	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4	
	R725	RK73HB1J753J	MG RESISTOR	75kΩ 1/16W J	1	K4	
	R737	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4	
	R738	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4	
	R739	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4	
	R751	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K4	
	R752	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K4	
	R755	RK73HB1J912J	MG RESISTOR	9.1kΩ 1/16W J	1	K4	
	R756	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K4	
	R757	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K4	
	R758	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	K4	
	R786	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4	
	R793	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K4	
	R795	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	K4	
	R796	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	K4	
	R797	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K4	
	R798	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K4	
	R843	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4	
	R844	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K4	
	R845	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K4	
	R846	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4	
	R891	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K4	
	R892	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K4	
	R893	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	K4	
	R894	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K4	
	R895	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K4	
	R896	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K4	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	R897	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K4	
	R903	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	1	K4	
	R907	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	K4	
	R909	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	K4	
	R913	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4	
	R917	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K4	
	R941	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K4	
	R942	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K4	
	R951	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	K4	
	R952	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	K4	
	R953	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K4	
	RA561	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	1	K4	
	RA581	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	1	K4	
	RA781	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	1	K4	
	RA841	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	1	K4	
	L1	QQR1883-002	CHOKE COIL		1	K4	
	L121	LR7920DE220M	CHIP INDUCTOR	22uH	1	K4	
	L141	LR7920DE220M	CHIP INDUCTOR	22uH	1	K4	
	L151	NQLL8EM-470X	INDUCTOR	47uH M	1	K4	
	L181	NQLL8EM-100X	INDUCTOR	10uH M	1	K4	
	L401	LK73G0BER15K	M.CHIP INDUCTOR		1	K4	
	L402	LK73G0BE82NK	M.CHIP INDUCTOR		1	K4	
	L403	LK73G0BER12K	M.CHIP INDUCTOR		1	K4	
	L405	LK73G0BE1R8K	M.CHIP INDUCTOR		1	K4	
	L408	LK73G0BER39K	M.CHIP INDUCTOR		1	K4	
	L410	L1K-0001-00	BALUN TRANS		1	K4	
	L414	LK73G0BE100K	M.CHIP INDUCTOR		1	K4	
	L451	LR7320AD4R7M	CHIP INDUCTOR	4.7uH	1	K4	
	L461	LR7320AD4R7M	CHIP INDUCTOR	4.7uH	1	K4	
	L501	NQR0199-003X	FERRITE BEADS		1	K4	
	L601	NQR0154-005X	FERRITE CORE		1	K4	
	L602	NQR0154-005X	FERRITE CORE		1	K4	
	L651	LR7320AD4R7M	CHIP INDUCTOR	4.7uH	1	K4	
	L652	LR7320AD4R7M	CHIP INDUCTOR	4.7uH	1	K4	
	L653	LR7920AG100M	CHIP INDUCTOR	10uH	1	K4	
	L681	NQR0704-001X	CHOKE COIL		1	K4	
	L902	LR7320AD470M	CHIP INDUCTOR	47uH	1	K4	
	A901	QAU0559-001	RF MODULE		1	K4	
	CN1	QGA2501C1-02	W TO B CONNE	W-B (1-2)	1	K4	
	CN91	QGA2501C1-02	W TO B CONNE	W-B (1-2)	1	K4	
	CN501	QGF0534F7-22X	FFC/FPC CONNE	FFC/FPC (1-22)	1	K4	
	CN601	QGF0534F7-45X	FFC/FPC CONNE	FFC/FPC (1-45)	1	K4	
	CN651	QGF0534F7-50X	FFC/FPC CONNE	FFC/FPC (1-50)	1	K4	
	CN681	QGA2001F1-05	W TO B CONNE	W-B (1-5)	1	K4	
△	F101	NMFZ032-4R0X-H	FUSE	4A	1	K4	
△	F271	F53-0513-08	PATTERN FUSE	4A	1	K4	
△	F331	F53-0513-08	PATTERN FUSE	4A	1	K4	
△	F371	F53-0513-08	PATTERN FUSE	4A	1	K4	
	J1	QNZ0607-001	CAR CONNECTOR		1	K4	
	J271	QNN0889-001	PIN JACK		1	K4	
	J331	QNS0291-001	3.5 JACK		1	K4	
	J371	QNN0890-001	PIN JACK		1	K4	
	J401	QNB0356-001	ANT TERMINAL		1	K4	
	J941	QNS0307-001	3.5 JACK		1	K4	
	TH241	NAD0052-471X	P THERMISTOR	470Ω	1	K4	
	VA91	NAF0044-270X	VARISTOR(ZNR)		1	K4	
	VA92	NAF0045-180X	VARISTOR(ZNR)		1	K4	
	VA271	NAF0045-180X	VARISTOR(ZNR)		1	K4	
	VA272	NAF0045-180X	VARISTOR(ZNR)		1	K4	
	VA273	NAF0045-180X	VARISTOR(ZNR)		1	K4	
	VA274	NAF0045-180X	VARISTOR(ZNR)		1	K4	
	VA275	NAF0045-180X	VARISTOR(ZNR)		1	K4	
	VA277	NAF0045-180X	VARISTOR(ZNR)		1	K4	
	VA331	NAF0044-270X	VARISTOR(ZNR)		1	K4	
	VA332	NAF0044-270X	VARISTOR(ZNR)		1	K4	
	VA335	NAF0045-180X	VARISTOR(ZNR)		1	K4	
	VA336	NAF0045-180X	VARISTOR(ZNR)		1	K4	
	VA361	NAF0044-270X	VARISTOR(ZNR)		1	K4	
	VA371	NAF0044-270X	VARISTOR(ZNR)		1	K4	
	VA400	NAF0024-001X	ESD SUPPRESSOR		1	K4	
	VA941	NAF0045-180X	VARISTOR(ZNR)		1	K4	
	VA942	NAF0045-180X	VARISTOR(ZNR)		1	K4	
	X401	L7J-0021-00	QUARTZ CRYSTAL		1	K4	
	X501	NAX1253-001X	CRYSTAL		1	K4	
	X502	L7J-0059-00	QUARTZ CRYSTAL		1	K4	
VIDEO PWB ASSY (XJ8-006x-xx) <02>							
	IC101	MN103SH23	SVMCU IC		1		
	IC102	A3V28S40FTP-G6	IC		1		
	IC103	WZZ-0003-00	PROGRAMMED IC		1		
	IC104	WZZ-0004-00	PROGRAMMED IC		1		
	IC105	XC6213B122N-G	MOS IC		1		
	IC301	NJM2831F92-X	SV-ANALOGUE IC		1		
	IC302	BA2904FVM	MOS IC		1		
	IC701	PIC95603-X	IR DETECT UNIT		1		
	Q101	LTC014YEBFS8	DIGI TRANSISTOR		1	X2,E1,E2,E3	
	Q201	LSAR523UBFS8	TRANSISTOR		1		
	Q202	LSAR523UBFS8	TRANSISTOR		1		
	Q203	LSAR523UBFS8	TRANSISTOR		1		
	Q204	LSAR523UBFS8	TRANSISTOR		1		

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	Q205	LTC014YEBFS8	DIGI TRANSISTOR		1		
	Q206	LSAR523UBFS8	TRANSISTOR		1		
	Q302	LSCR523UBFS8	TRANSISTOR		1		
	Q305	LSCR523UBFS8	TRANSISTOR		1		
	Q306	LSCR523UBFS8	TRANSISTOR		1		
	Q307	LTC014YEBFS8	DIGI TRANSISTOR		1		
	Q308	LSAR523UBFS8	TRANSISTOR		1		
	Q309	LSCR523UBFS8	TRANSISTOR		1		
	Q310	LTC014YEBFS8	DIGI TRANSISTOR		1		
	Q311	LTA014YEBFS8	DIGI TRANSISTOR		1		
	Q312	LTC014YEBFS8	DIGI TRANSISTOR		1		
	Q401	LSCR523UBFS8	TRANSISTOR		1		
	Q402	LSCR523UBFS8	TRANSISTOR		1		
	Q403	LSCR523UBFS8	TRANSISTOR		1		
	Q404	LSCR523UBFS8	TRANSISTOR		1		
	Q405	LSCR523UBFS8	TRANSISTOR		1		
	Q406	LSCR523UBFS8	TRANSISTOR		1		
	Q407	LSCR523UBFS8	TRANSISTOR		1		
	Q408	LSCR523UBFS8	TRANSISTOR		1		
	Q409	LSCR523UBFS8	TRANSISTOR		1		
	Q701	LSCR523UBFS8	TRANSISTOR		1		
	Q702	LSCR523UBFS8	TRANSISTOR		1		
	Q703	LSCR523UBFS8	TRANSISTOR		1		
	Q704	LTC014YEBFS8	DIGI TRANSISTOR		1		
	D102	DA2J101	DIODE		1	X2,E1,E2,E3	
	D301	DZ2J130M	ZENER DIODE		1		
	D303	DA2J101	DIODE		1		
	D304	DZ2J180M	ZENER DIODE		1		
	D451	DZ2J051M	ZENER DIODE		1		
	D452	DZ2J051M	ZENER DIODE		1		
	D453	DZ2J051M	ZENER DIODE		1		
	D454	DZ2J051M	ZENER DIODE		1		
	D701	SML-D12V8WSPQ	LED		1		
	D702	SML-D12V8WSPQ	LED		1		
	D704	LTRBR8SF/Z1Z1X	LED		1		
	D705	LTRBR8SF/Z1Z1X	LED		1		
	C101	CC73HCH1H060D	C CAPACITOR	6pF 50V D	1		
	C102	CC73HCH1H060D	C CAPACITOR	6pF 50V D	1		
	C103	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C104	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C105	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1		
	C106	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C107	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C108	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1		
	C109	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C110	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C111	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C112	CK73FBB0J106K	C CAPACITOR	10uF 6.3V K	1		
	C113	CK73FBB0J106K	C CAPACITOR	10uF 6.3V K	1		
	C114	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C115	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1		
	C116	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C117	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C118	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C119	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1		
	C120	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C121	CK73HBB1C103K	C CAPACITOR	0.01uF 16V K	1		
	C122	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C123	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C124	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C125	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C126	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C131	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C132	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C133	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C134	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C135	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	X2,E1,E2,E3	
	C136	CC73HCH1H560J	C CAPACITOR	56pF 50V J	1	X2,E1,E2,E3	
	C137	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C138	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C139	CK73FBB0J106K	C CAPACITOR	10uF 6.3V K	1		
	C141	CC73HCH1H330J	C CAPACITOR	33pF 50V J	1		
	C142	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C143	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C144	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C145	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C146	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C147	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C148	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C149	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C150	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C151	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C152	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1		
	C153	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C154	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C155	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C156	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C157	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1		

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	C158	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C159	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1		
	C160	CK73FBB0J106K	C CAPACITOR	10uF 6.3V K	1		
	C161	CK73FBB0J106K	C CAPACITOR	10uF 6.3V K	1		
	C162	CC73HCH1H270J	C CAPACITOR	27pF 50V J	1		
	C171	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C172	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C173	CK73FBB0J106K	C CAPACITOR	10uF 6.3V K	1		
	C181	CK73FBB0J106K	C CAPACITOR	10uF 6.3V K	1		
	C182	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C183	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C184	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C185	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C186	CK73FBB0J106K	C CAPACITOR	10uF 6.3V K	1		
	C187	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C188	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C189	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C201	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1		
	C202	CC73HCH1H560J	C CAPACITOR	56pF 50V J	1		
	C203	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1		
	C204	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1		
	C205	CC73HCH1H560J	C CAPACITOR	56pF 50V J	1		
	C206	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1		
	C207	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1		
	C208	CC73HCH1H560J	C CAPACITOR	56pF 50V J	1		
	C209	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1		
	C210	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C211	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C212	CC73HCH1H680J	C CAPACITOR	68pF 50V J	1		
	C214	CC73HCH1H180J	C CAPACITOR	18pF 50V J	1		
	C215	CK73FBB0J106K	C CAPACITOR	10uF 6.3V K	1		
	C301	CK730BW1C106K	C CAPACITOR	10uF 16V K	1		
	C302	CK73FBB0J106K	C CAPACITOR	10uF 6.3V K	1		
	C303	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C304	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C305	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1		
	C306	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1		
	C307	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1		
	C308	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C309	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1		
	C310	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C311	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1		
	C321	CK730BF1E475K	C CAPACITOR	4.7uF 25V K	1		
	C322	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1		
	C325	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C326	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C327	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1		
	C351	CK73FBB1E105K	C CAPACITOR	1uF 25V K	1		
	C352	CK730BF1E475K	C CAPACITOR	4.7uF 25V K	1		
	C353	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1		
	C354	CK73FBB1E105K	C CAPACITOR	1uF 25V K	1		
	C361	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1		
	C362	CK73FBB1E105K	C CAPACITOR	1uF 25V K	1		
	C363	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1		
	C371	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1		
	C372	CK73FBB1E105K	C CAPACITOR	1uF 25V K	1		
	C373	CK73FBB1E105K	C CAPACITOR	1uF 25V K	1		
	C381	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1		
	C451	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1		
	C452	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1		
	C453	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1		
	C454	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1		
	C701	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1		
	R101	RK73HB1J681J	MG RESISTOR	680Ω 1/16W J	1		
	R102	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1		
	R103	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1		
	R111	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R112	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1		
	R113	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1		
	R114	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R115	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1		
	R116	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R117	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1		
	R118	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R119	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1		
	R120	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R121	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R122	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R123	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1		
	R124	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1		
	R125	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1		
	R126	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1		
	R127	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1		
	R129	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1		
	R131	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1		
	R132	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R133	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1		
	R134	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1		
	R135	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1		
	R136	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	R138	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R139	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1		
	R140	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1		
	R141	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1		
	R143	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1		
	R144	RK73HB1J560J	MG RESISTOR	56Ω 1/16W J	1		
	R145	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1		
	R146	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R147	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R148	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R149	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1		
	R150	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1		
	R151	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1		
	R152	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1		
	R153	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1		
	R154	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1		
	R155	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1		
	R156	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1		
	R157	RK73HB1J241J	MG RESISTOR	240Ω 1/16W J	1		
	R201	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1		
	R202	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1		
	R203	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1		
	R204	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1		
	R205	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1		
	R206	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1		
	R207	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1		
	R208	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1		
	R209	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1		
	R210	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1		
	R211	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1		
	R212	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1		
	R213	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1		
	R214	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1		
	R215	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1		
	R221	RK73HB1J391J	MG RESISTOR	390Ω 1/16W J	1		
	R225	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	1		
	R227	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1		
	R228	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1		
	R301	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1		
	R302	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R303	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1		
	R311	RK73HH1J820D	MG RESISTOR	82Ω 1/16W D	1		
	R312	RK73HH1J161D	MG RESISTOR	160Ω 1/16W D	1		
	R313	RK73HH1J430D	MG RESISTOR	43Ω 1/16W D	1		
	R314	RK73HH1J390D	MG RESISTOR	39Ω 1/16W D	1		
	R315	RK73HH1J101D	MG RESISTOR	100Ω 1/16W D	1		
	R316	RK73HH1J161D	MG RESISTOR	160Ω 1/16W D	1		
	R317	RK73HH1J101D	MG RESISTOR	100Ω 1/16W D	1		
	R318	RK73HH1J390D	MG RESISTOR	39Ω 1/16W D	1		
	R319	RK73HH1J430D	MG RESISTOR	43Ω 1/16W D	1		
	R320	RK73HH1J161D	MG RESISTOR	160Ω 1/16W D	1		
	R321	RK73HH1J620D	MG RESISTOR	62Ω 1/16W D	1		
	R353	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1		
	R354	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R356	RK73EB2E102J	MG RESISTOR	1kΩ 1/4W J	1		
	R357	RK73PB2H101J	MG RESISTOR	100Ω 1/2W J	1		
	R358	RK73PB2H101J	MG RESISTOR	100Ω 1/2W J	1		
	R361	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1		
	R362	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	1		
	R363	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	1		
	R364	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1		
	R365	RK73EB2E392J	MG RESISTOR	3.9kΩ 1/4W J	1		
	R371	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1		
	R372	RK73HH1J472D	MG RESISTOR	4.7kΩ 1/16W D	1		
	R373	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1		
	R374	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1		
	R376	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1		
	R377	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1		
	R381	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1		
	R382	RK73HH1J392D	MG RESISTOR	3.9kΩ 1/16W D	1		
	R383	RK73HH1J302D	MG RESISTOR	3kΩ 1/16W D	1		
	R401	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R402	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R403	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R404	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R405	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R406	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R407	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R408	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R409	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R410	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1		
	R411	RK73GH2A101D	MG RESISTOR	100Ω 1/10W D	1		
	R412	RK73GH2A101D	MG RESISTOR	100Ω 1/10W D	1		
	R413	RK73GH2A101D	MG RESISTOR	100Ω 1/10W D	1		
	R414	RK73GH2A101D	MG RESISTOR	100Ω 1/10W D	1		
	R415	RK73GH2A101D	MG RESISTOR	100Ω 1/10W D	1		
	R416	RK73GH2A101D	MG RESISTOR	100Ω 1/10W D	1		
	R417	RK73GH2A101D	MG RESISTOR	100Ω 1/10W D	1		
	R418	RK73GH2A101D	MG RESISTOR	100Ω 1/10W D	1		

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R419	RK73GH2A101D	MG RESISTOR	100Ω 1/10W D	1	
	R431	RK73PB2H5R1J	MG RESISTOR	5.1Ω 1/2W J	1	
	R432	RK73PB2H5R1J	MG RESISTOR	5.1Ω 1/2W J	1	
	R433	RK73PB2H5R1J	MG RESISTOR	5.1Ω 1/2W J	1	
	R434	RK73PB2H5R1J	MG RESISTOR	5.1Ω 1/2W J	1	
	R435	RK73PB2H5R1J	MG RESISTOR	5.1Ω 1/2W J	1	
	R436	RK73PB2H5R1J	MG RESISTOR	5.1Ω 1/2W J	1	
	R437	RK73PB2H5R1J	MG RESISTOR	5.1Ω 1/2W J	1	
	R438	RK73PB2H5R1J	MG RESISTOR	5.1Ω 1/2W J	1	
	R439	RK73PB2H5R1J	MG RESISTOR	5.1Ω 1/2W J	1	
	R440	RK73PB2H5R1J	MG RESISTOR	5.1Ω 1/2W J	1	
	R701	RK73HB1J241J	MG RESISTOR	240Ω 1/16W J	1	
	R702	RK73HB1J161J	MG RESISTOR	160Ω 1/16W J	1	
	R704	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R711	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R712	RK73GH2A181D	MG RESISTOR	180Ω 1/10W D	1	
	R714	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R715	RK73GH2A181D	MG RESISTOR	180Ω 1/10W D	1	
	R717	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R718	RK73GH2A181D	MG RESISTOR	180Ω 1/10W D	1	
	R731	RK73HB1J182J	MG RESISTOR	1.8kΩ 1/16W J	1	
	R732	RK73HB1J242J	MG RESISTOR	2.4kΩ 1/16W J	1	
	R733	RK73HB1J182J	MG RESISTOR	1.8kΩ 1/16W J	1	
	R901	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R911	RK73GB2A2R2J	MG RESISTOR	2.2Ω 1/10W J	1	
	R912	RK73GB2A4R7J	MG RESISTOR	4.7Ω 1/10W J	1	
	RA101	RK74HB1J680J	NET RESISTOR	68Ω 1/16W J	1	
	RA102	RK74HB1J680J	NET RESISTOR	68Ω 1/16W J	1	
	RA103	RK74HB1J680J	NET RESISTOR	68Ω 1/16W J	1	
	RA104	RK74HB1J680J	NET RESISTOR	68Ω 1/16W J	1	
	RA105	RK74HB1J680J	NET RESISTOR	68Ω 1/16W J	1	
	RA106	RK74HB1J680J	NET RESISTOR	68Ω 1/16W J	1	
	RA107	RK74HB1J680J	NET RESISTOR	68Ω 1/16W J	1	
	RA108	RK74HB1J680J	NET RESISTOR	68Ω 1/16W J	1	
	RA109	RK74HB1J680J	NET RESISTOR	68Ω 1/16W J	1	
	RA110	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	1	
	RA111	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	1	
	RA112	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	1	
	RA113	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	1	
	RA115	RK74HB1J680J	NET RESISTOR	68Ω 1/16W J	1	
	RA701	RK74HB1J222J	NET RESISTOR	2.2kΩ 1/16W J	1	
	RA702	RK74HB1J222J	NET RESISTOR	2.2kΩ 1/16W J	1	
	RA703	RK74HB1J222J	NET RESISTOR	2.2kΩ 1/16W J	1	
	L101	LR7320AD470M	CHIP INDUCTOR	47uH	1	
	L103	NQR0269-021X	FERRITE BEADS		1	
	L201	NQLD8DJ-470X	INDUCTOR	47uH J	1	
	CN201	QGF0534F7-45X	FFC/FPC CONNE	FFC/FPC (1-45)	1	
	CN301	QGF0534F7-60X	FFC/FPC CONNE	FFC/FPC (1-60)	1	
	CN401	QGA3501F1-02X	CONNECTOR	W-B (1-2)	1	
	CN402	EC710AU-1004A	FFC FPC CONNE		1	
	JS701	QSW1279-001	ROTARY ENCODER		1	
	S701	NSW0246-001X	TACT SWITCH		1	
	S702	NSW0246-001X	TACT SWITCH		1	
	S703	NSW0246-001X	TACT SWITCH		1	
	S704	NSW0246-001X	TACT SWITCH		1	
	S705	NSW0246-001X	TACT SWITCH		1	
	X101	NAX1038-001X	CRYSTAL		1	
DAUGHTER PWB ASSY (XJF-004x-x1) <03>						
	IC951	TC74HCT4053FT	MOS IC		1	X2,E1,E2,E3
	D401	DZ2J068M	ZENER DIODE		1	X2,E1,E2,E3
	C112	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	X2,E1,E2,E3
	C113	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	X2,E1,E2,E3
	C114	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	X2
	C122	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	X2,E1,E2,E3
	C123	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	X2,E1,E2,E3
	C124	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	X2,E1,E2,E3
	C401	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	K0,K1,K2,K3,K4,X2,E1,E2,E3
	C412	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	K0,K1,K2,K3,K4,X2,E1,E2,E3
	C413	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	K0,K1,K2,K3,K4,X2,E1,E2,E3
	C414	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	K0,K1,K2,K3,K4,X2,E1,E2,E3
	C416	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K0,K1,K2,K3,K4,X2,E1,E2,E3
	C417	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K0,K1,K2,K3,K4,X2,E1,E2,E3
	C418	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	K0,K1,K2,K3,K4,X2,E1,E2,E3
	C761	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	X2,E1,E2,E3
	C951	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	X2,E1,E2,E3
	C952	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	X2,E1,E2,E3
	C953	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	X2,E1,E2,E3
	C954	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	X2,E1,E2,E3
	C955	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	X2,E1,E2,E3
	R101	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	X2,E1,E2,E3
	R104	RK73HH1J750D	MG RESISTOR	75Ω 1/16W D	1	X2,E1,E2,E3
	R110	RK73HB1J302J	MG RESISTOR	3kΩ 1/16W J	1	X2,E1,E2,E3
	R111	RK73HB1J302J	MG RESISTOR	3kΩ 1/16W J	1	X2,E1,E2,E3

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R112	RK73GB2A332J	MG RESISTOR	3.3kΩ 1/10W J	1	X2,E1,E2,E3
	R113	RK73GB2A332J	MG RESISTOR	3.3kΩ 1/10W J	1	X2,E1,E2,E3
	R114	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	X2,E1,E2,E3
	R115	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	X2,E1,E2,E3
	R116	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	X2,E1,E2,E3
	R117	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1,E2,E3
	R119	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	X2
	R401	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K0,K1,K2,K3,K4,X2,E1,E2,E3
	R412	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	K0,K1,K2,K3,K4,X2,E1,E2,E3
	R413	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	K0,K1,K2,K3,K4,X2,E1,E2,E3
	R414	RK73GB2A4R7J	MG RESISTOR	4.7Ω 1/10W J	1	K0,K1,K2,K3,K4,X2,E1,E2,E3
	R421	RK73HH1J750D	MG RESISTOR	75Ω 1/16W D	1	X2,E1,E2,E3
	R422	RK73HH1J750D	MG RESISTOR	75Ω 1/16W D	1	X2,E1,E2,E3
	R423	RK73HH1J750D	MG RESISTOR	75Ω 1/16W D	1	X2,E1,E2,E3
	R425	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	X2,E1,E2,E3
	R426	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	X2,E1,E2,E3
	R427	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	X2,E1,E2,E3
	R428	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	X2,E1,E2,E3
	R704	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	K0,K1,K2,K3,K4,X2,E1,E2,E3
	R711	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K0,K1,K2,K3,K4,X2,E1,E2,E3
	R712	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K0,K1,K2,K3,K4,X2,E1,E2,E3
	R761	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	X2,E1,E2,E3
	R771	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	X2,E1,E2,E3
	R954	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0,K1,K2,K3,K4
	R955	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0,K1,K2,K3,K4
	R956	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0,K1,K2,K3,K4
	R957	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	X2,E1,E2,E3
	R958	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	X2,E1,E2,E3
	R961	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	X2,E1,E2,E3
	R962	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	X2,E1,E2,E3
	R963	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	X2,E1,E2,E3
	R964	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	X2,E1,E2,E3
	R965	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	X2,E1,E2,E3
	R966	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	X2,E1,E2,E3
	CN1	QG0534F7-22X	FFC/FPC CONNE	FFC/FPC (1-22)	1	K0,K1,K2,K3,K4,X2,E1,E2,E3
	CN101	QGA2001C1-05	W TO B CONNE	W-B (1-5)	1	X2
	CN502	QGA2501C1-02	W TO B CONNE	W-B (1-2)	1	K0,K1,K2,K3,K4
△	F1	F53-0513-08	PATTERN FUSE	4A	1	K0,K1,K2,K3,K4,X2,E1,E2,E3
△	F501	F53-0513-08	PATTERN FUSE	4A	1	K0,K1,K2,K3,K4,X2,E1,E2,E3
△	F761	F53-0513-08	PATTERN FUSE	4A	1	K0,K1,K2,K3,K4,X2,E1,E2,E3
	J101	QNS0291-001	3.5 JACK		1	E1,E2,E3
	J401	QND0162-001	DIN CONNECTOR		1	X2,E1,E2,E3
	J701	QNZ0907-001	CIR CONNECTOR		1	K0,K1,K2,K3,K4
	J761	QNS0307-001	3.5 JACK		1	X2,E1,E2,E3
	VA101	NAF0044-270X	VARISTOR(ZNR)		1	X2,E1,E2,E3
	VA102	NAF0044-270X	VARISTOR(ZNR)		1	X2,E1,E2,E3
	VA112	NAF0045-180X	VARISTOR(ZNR)		1	X2,E1,E2,E3
	VA113	NAF0045-180X	VARISTOR(ZNR)		1	X2,E1,E2,E3
	VA114	NAF0045-180X	VARISTOR(ZNR)		1	X2
	VA401	NAF0045-180X	VARISTOR(ZNR)		1	K0,K1,K2,K3,K4,X2,E1,E2,E3
	VA412	NAF0045-180X	VARISTOR(ZNR)		1	K0,K1,K2,K3,K4,X2,E1,E2,E3
	VA413	NAF0045-180X	VARISTOR(ZNR)		1	K0,K1,K2,K3,K4,X2,E1,E2,E3
	VA414	NAF0045-180X	VARISTOR(ZNR)		1	K0,K1,K2,K3,K4,X2,E1,E2,E3
	VA421	NAF0044-270X	VARISTOR(ZNR)		1	X2,E1,E2,E3
	VA422	NAF0044-270X	VARISTOR(ZNR)		1	X2,E1,E2,E3
	VA423	NAF0044-270X	VARISTOR(ZNR)		1	X2,E1,E2,E3
	VA424	NAF0044-270X	VARISTOR(ZNR)		1	X2,E1,E2,E3
	VA711	NAF0044-270X	VARISTOR(ZNR)		1	K0,K1,K2,K3,K4,X2,E1,E2,E3
	VA712	NAF0044-270X	VARISTOR(ZNR)		1	K0,K1,K2,K3,K4,X2,E1,E2,E3
	VA761	NAF0045-180X	VARISTOR(ZNR)		1	X2,E1,E2,E3
	VA762	NAF0045-180X	VARISTOR(ZNR)		1	X2,E1,E2,E3
	VA771	NAF0045-180X	VARISTOR(ZNR)		1	X2,E1,E2,E3
HD TUNER PWB ASSY (XJM-0120-12) <05>						
	IC1	SI4763-A42-GM	MOS IC		1	K0
	IC2	SI4613-A10-GM	MOS IC		1	K0
	IC3	W3F-0022-00	ROM IC		1	K0
	IC4	XC6213B182N-G	MOS IC		1	K0
	C2	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	K0
	C3	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	K0
	C4	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	K0
	C5	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	K0
	C6	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K0
	C7	CK73GBB1H222K	C CAPACITOR	2200pF 50V K	1	K0
	C8	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	K0
	C9	CC73GCH1H390J	C CAPACITOR	39pF 50V J	1	K0

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
△	C10	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	K0	
	C15	CC73GCH1H010C	C CAPACITOR	1pF 50V C	1	K0	
	C16	CC73GCH1H050C	C CAPACITOR	5pF 50V C	1	K0	
	C18	CK73GBB1C104K	C CAPACITOR	0.1uF 16V K	1	K0	
	C19	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	K0	
	C20	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K0	
	C21	CK73GBB1C104K	C CAPACITOR	0.1uF 16V K	1	K0	
	C22	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	K0	
	C25	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	K0	
	C26	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	K0	
C27	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	K0		
C28	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	K0		
C29	CC73HCH1H060D	C CAPACITOR	6pF 50V D	1	K0		
C30	CC73HCH1H060D	C CAPACITOR	6pF 50V D	1	K0		
C32	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	K0		
C33	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	K0		
C101	CC73GCH1H220J	C CAPACITOR	22pF 50V J	1	K0		
C102	CC73GCH1H220J	C CAPACITOR	22pF 50V J	1	K0		
C103	CC73GCH1H220J	C CAPACITOR	22pF 50V J	1	K0		
C120	CC73GCH1H020C	C CAPACITOR	2pF 50V C	1	K0		
C121	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	K0		
C122	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	K0		
C123	CC73HCH1H180J	C CAPACITOR	18pF 50V J	1	K0		
C124	CC73HCH1H180J	C CAPACITOR	18pF 50V J	1	K0		
C125	CC73HCH1H180J	C CAPACITOR	18pF 50V J	1	K0		
C127	CK73GBB1C104K	C CAPACITOR	0.1uF 16V K	1	K0		
C128	CC73GCH1H020C	C CAPACITOR	2pF 50V C	1	K0		
C129	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	K0		
C131	CC73HCH1H180J	C CAPACITOR	18pF 50V J	1	K0		
C143	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	K0		
C144	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	K0		
C146	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	K0		
R1	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K0		
R3	RK73GB2A240J	MG RESISTOR	24Ω 1/10W J	1	K0		
R4	RK73GB2A474J	MG RESISTOR	470kΩ 1/10W J	1	K0		
R5	RK73GB2A474J	MG RESISTOR	470kΩ 1/10W J	1	K0		
R10	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	K0		
R11	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	K0		
R12	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0		
R14	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	K0		
R16	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K0		
R17	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K0		
R18	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K0		
R20	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K0		
R26	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0		
R29	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K0		
R30	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K0		
R31	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K0		
R39	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	K0		
R40	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K0		
R41	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K0		
R42	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K0		
R43	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K0		
R44	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K0		
R51	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0		
R52	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0		
R53	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0		
R54	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0		
R103	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K0		
R104	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K0		
R105	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K0		
R107	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0		
R108	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0		
R109	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K0		
R110	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K0		
R111	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K0		
R112	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K0		
R114	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K0		
R115	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	K0		
R116	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	K0		
R121	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	K0		
R122	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	K0		
R123	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	K0		
R124	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	K0		
R127	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	K0		
R129	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K0		
R140	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K0		
R141	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0		
R142	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0		
R143	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0		
R144	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0		
R145	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	K0		
R155	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	K0		
R166	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	K0		
L1	LK73G0BER15K	M.CHIP INDUCTOR		1	K0		
L2	LK73G0BE82NK	M.CHIP INDUCTOR		1	K0		
L3	LK73G0BER12K	M.CHIP INDUCTOR		1	K0		
L4	LK73G0BER82K	M.CHIP INDUCTOR		1	K0		

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	L5	LK73G0BE1R8K	M.CHIP INDUCTOR		1	K0
	L8	LK73G0BER39K	M.CHIP INDUCTOR		1	K0
	L10	L1K-0001-00	BALUN TRANS		1	K0
	L14	LK73G0BE100K	M.CHIP INDUCTOR		1	K0
	L21	NQR0592-004X	FERRITE BEADS		1	K0
	L22	NQR0592-004X	FERRITE BEADS		1	K0
	L101	NQR0713-001X	FERRITE BEADS		1	K0
	CN1	EA110AD-2017B	W TO B CONNE		1	K0
	CN2	EA110AD-2003B	W TO B CONNE		1	K0
	X1	L7J-0021-00	QUARTZ CRYSTAL		1	K0
DAB TUNER PWB ASSY (XJM-0132-72) <06>						
	IC1	SI4763-A42-GM	MOS IC		1	E1
	IC2	MTV301CQ	MOS IC		1	E1
	IC3	GL3511SB169	MOS IC		1	E1
	IC4	W3F-0021-00	ROM IC		1	E1
	IC5	XC6213B122N-G	MOS IC		1	E1
	IC6	XC6213B182N-G	MOS IC		1	E1
	IC7	XC6213B182N-G	MOS IC		1	E1
	C1	CC73HCH1H270J	C CAPACITOR	27pF 50V J	1	E1
	C2	CC73HCH1H390J	C CAPACITOR	39pF 50V J	1	E1
	C3	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	E1
	C4	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	E1
	C5	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	1	E1
	C6	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	E1
	C7	CC73HCH1H050C	C CAPACITOR	5pF 50V C	1	E1
	C10	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C13	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	E1
	C14	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	E1
	C15	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	E1
	C16	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	E1
	C17	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	E1
	C18	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	E1
	C19	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	E1
	C20	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C21	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	E1
	C22	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	E1
	C23	CK73HBB1H682K	C CAPACITOR	6800pF 50V K	1	E1
	C24	CK73HBB1H682K	C CAPACITOR	6800pF 50V K	1	E1
	C25	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	E1
	C26	CC73HCH1H150J	C CAPACITOR	15pF 50V J	1	E1
	C27	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1	E1
	C28	CC73HCH1H180J	C CAPACITOR	18pF 50V J	1	E1
	C29	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C30	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C31	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C32	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C33	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C36	CC73HCH1H060D	C CAPACITOR	6pF 50V D	1	E1
	C37	CC73HCH1H060D	C CAPACITOR	6pF 50V D	1	E1
	C38	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C39	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	E1
	C41	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C42	CC73HCH1H080D	C CAPACITOR	8pF 50V D	1	E1
	C43	CC73HCH1H030C	C CAPACITOR	3pF 50V C	1	E1
	C44	CC73HCH1H330J	C CAPACITOR	33pF 50V J	1	E1
	C45	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C46	CC73HCH1H680J	C CAPACITOR	68pF 50V J	1	E1
	C47	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	E1
	C48	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C49	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C50	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C51	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C52	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C53	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C54	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C55	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C56	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C57	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C58	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C59	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C60	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C61	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C62	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C63	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C64	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C65	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C66	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C67	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C68	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C69	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C70	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C71	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C72	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C73	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C74	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1
	C75	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	E1
	C76	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	E1
	C77	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	E1
	C78	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	1	E1
	C79	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	E1
	C80	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	1	E1

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C81	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	E1
	C82	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1	E1
	C86	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1	E1
	C96	CC73HCH1H221J	C CAPACITOR	220pF 50V J	1	E1
	C97	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1	E1
	R1	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	1	E1
	R2	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	1	E1
	R3	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	E1
	R5	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R6	RK73HB1J240J	MG RESISTOR	24Ω 1/16W J	1	E1
	R13	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	E1
	R14	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	E1
	R15	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	E1
	R16	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	E1
	R17	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	E1
	R18	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	E1
	R19	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	E1
	R20	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	E1
	R21	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	E1
	R22	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	E1
	R23	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	E1
	R24	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	E1
	R25	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R26	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R27	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R28	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R29	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R30	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R31	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R32	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R33	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1
	R34	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1
	R35	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	E1
	R36	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	E1
	R37	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	E1
	R38	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R39	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	E1
	R40	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	E1
	R41	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	E1
	R44	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R45	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R46	RK73HH1J433D	MG RESISTOR	43kΩ 1/16W D	1	E1
	R47	RK73HH1J433D	MG RESISTOR	43kΩ 1/16W D	1	E1
	R48	RK73HH1J623D	MG RESISTOR	62kΩ 1/16W D	1	E1
	R49	RK73HH1J623D	MG RESISTOR	62kΩ 1/16W D	1	E1
	R50	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1
	R51	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1
	R52	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	E1
	R53	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	E1
	R54	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	E1
	R55	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	E1
	R56	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	E1
	R57	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	E1
	R58	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	E1
	R59	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1
	R60	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1
	R61	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1
	R62	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1
	R63	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1
	R64	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1
	R65	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	E1
	R66	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	E1
	R67	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	E1
	R68	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	E1
	R69	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1
	R70	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1
	R71	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1
	R72	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1
	R73	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1
	R74	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1
	R79	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	E1
	R80	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	E1
	R81	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	E1
	R82	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	E1
	R83	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	E1
	R84	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	E1
	R88	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	E1
	R89	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	E1
	R90	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	E1
	R91	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	E1
	R92	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	E1
	R93	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	E1
	R95	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	E1
	R96	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R97	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R98	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R99	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R100	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R102	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R105	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	E1
	L2	LK73G0BER12K	M.CHIP INDUCTOR		1	E1
	L3	LK73G0BE82NK	M.CHIP INDUCTOR		1	E1
	L4	LK73G0BER12K	M.CHIP INDUCTOR		1	E1
	L5	L1K-0001-00	BALUN TRANS		1	E1
	L6	LK73G0BE1R8K	M.CHIP INDUCTOR		1	E1
	L7	LK73G0BER39K	M.CHIP INDUCTOR		1	E1
	L8	LK73G0BE100K	M.CHIP INDUCTOR		1	E1
	L10	LK73G0BF33NJ	M.CHIP INDUCTOR		1	E1
	L11	LK73G0BF68NJ	M.CHIP INDUCTOR		1	E1
	L12	LK73G0BFR15J	M.CHIP INDUCTOR		1	E1
	L13	LK73G0BFR15J	M.CHIP INDUCTOR		1	E1
	L14	LK73G0BF3N3S	M.CHIP INDUCTOR		1	E1
	L15	LK73G0BF5N6S	M.CHIP INDUCTOR		1	E1
	L16	LK73G0BF10NJ	M.CHIP INDUCTOR		1	E1
	L17	LK73G0BF10NJ	M.CHIP INDUCTOR		1	E1
	L18	LK73G0BF82NJ	M.CHIP INDUCTOR		1	E1
	L20	LK73G0BFR22J	M.CHIP INDUCTOR		1	E1
	L21	LK73G0BFR22J	M.CHIP INDUCTOR		1	E1
	L22	NQR0592-004X	FERRITE BEADS		1	E1
	L23	NQR0592-004X	FERRITE BEADS		1	E1
	L24	NQR0592-004X	FERRITE BEADS		1	E1
	L26	NQR0592-004X	FERRITE BEADS		1	E1
	L29	LB73H0CG-001	CHIP FERRITE		1	E1
	L30	LB73H0CG-001	CHIP FERRITE		1	E1
	CN1	EA110AD-2017B	W TO B CONNE		1	E1
	CN2	EA110AD-2007B	W TO B CONNE		1	E1
	J1	QNB0353-001	ANT TERMINAL		1	E1
	TH1	FSMD035-R	P THERMISTOR		1	E1
	VA1	F0K-0014-00	SURGE ABSORBER		1	E1
	X1	L7J-0028-00	QUARTZ CRYSTAL		1	E1
	X2	L7J-0027-00	QUARTZ CRYSTAL		1	E1
DVD MECHA PWB ASSY (XJE-0020-00) <08>						
	IC201	AM5820FM	BIPOLAR IC		1	
	IC301	MN2DS0041MD	IC		1	
	IC381	WZZ-0011-20	PROGRAMMED IC		1	
	IC391	M12L128168A6TG	SV-DRAM IC		1	
	IC401	AK4387ET	ANALOG IC		1	
	IC551	MFI337S395901	IC		1	
	IC921	BD12KA5FF-X	IC		1	
	Q12	LTC044EEBFS8	DIGI TRANSISTOR		1	
	Q101	2SB1709MG	TRANSISTOR		1	
	Q102	2SB1709MG	TRANSISTOR		1	
	Q103	LTC014EEBFS8	DIGI TRANSISTOR		1	
	Q107	UMX1N-W	PAIR TRANSISTOR		1	
	Q108	SSM6N15AFEM	DUAL FET		1	
	Q302	LTC044EEBFS8	DIGI TRANSISTOR		1	
	Q341	LTC044EEBFS8	DIGI TRANSISTOR		1	
	C101	CK730BS0J105K	C CAPACITOR	1uF 6.3V K	1	
	C102	CK730BY0J476M	C CAPACITOR	47uF 6.3V M	1	
	C103	CK730BY0J476M	C CAPACITOR	47uF 6.3V M	1	
	C105	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C106	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C107	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C108	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C109	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C110	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C111	CK730BS0J105K	C CAPACITOR	1uF 6.3V K	1	
	C112	CK730BW0J226M	C CAPACITOR	22uF 6.3V M	1	
	C113	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C121	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C122	CK73HBB1C333K	C CAPACITOR	0.033uF 16V K	1	
	C123	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C124	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C133	NCJA1AK-684W-A	C CAPACITOR	0.68uF 10V K	1	
	C134	NCJA1AK-684W-A	C CAPACITOR	0.68uF 10V K	1	
	C135	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C136	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C137	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C138	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C151	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C170	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C201	CK73EXR1C226M	C CAPACITOR	22uF 16V M	1	
	C206	CK730BU0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C241	CK73GBB1H122K	C CAPACITOR	1200pF 50V K	1	
	C251	CK73GBB1H391K	C CAPACITOR	390pF 50V K	1	
	C253	CK73GBB1H391K	C CAPACITOR	390pF 50V K	1	
	C256	CK730BW0J226M	C CAPACITOR	22uF 6.3V M	1	
	C259	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C291	CK73GBB1H272K	C CAPACITOR	2700pF 50V K	1	
	C294	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C301	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C302	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C303	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C304	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C305	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C306	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C307	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C311	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C314	CK73HBB1H391K	C CAPACITOR	390pF 50V K	1	
	C315	CK73HBB1H561K	C CAPACITOR	560pF 50V K	1	
	C316	CK730BS0J105K	C CAPACITOR	1uF 6.3V K	1	
	C317	CK730BS0J105K	C CAPACITOR	1uF 6.3V K	1	
	C318	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C319	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C320	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C322	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C324	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C325	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C326	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C327	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C329	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C330	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C331	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C332	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C333	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C351	CC73HCH1H120J	C CAPACITOR	12pF 50V J	1	
	C352	CC73HCH1H120J	C CAPACITOR	12pF 50V J	1	
	C382	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C391	CK730AX0J106K	C CAPACITOR	10uF 6.3V K	1	
	C392	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C396	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C398	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C401	CK730BW0J226M	C CAPACITOR	22uF 6.3V M	1	
	C402	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C404	CK730BW0J226M	C CAPACITOR	22uF 6.3V M	1	
	C405	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C406	CK73HBB1H331K	C CAPACITOR	330pF 50V K	1	
	C511	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C911	CK730BY0J476M	C CAPACITOR	47uF 6.3V M	1	
	C912	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C913	CK730AX0J106K	C CAPACITOR	10uF 6.3V K	1	
	C921	CK730BS0J105K	C CAPACITOR	1uF 6.3V K	1	
	C923	CK730BS0J105K	C CAPACITOR	1uF 6.3V K	1	
	R12	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1	
	R15	RK73GB2A303J	MG RESISTOR	30kΩ 1/10W J	1	
	R16	RK73GB2A183J	MG RESISTOR	18kΩ 1/10W J	1	
	R17	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R101	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R102	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R103	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R104	RK73HB1J2R2J	MG RESISTOR	2.2Ω 1/16W J	1	
	R106	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R107	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R108	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R111	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R112	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R113	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R114	RK73HB1J2R2J	MG RESISTOR	2.2Ω 1/16W J	1	
	R115	NR20122-180X	MG RESISTOR	18Ω	1	
	R116	RK73HB1J242J	MG RESISTOR	2.4kΩ 1/16W J	1	
	R117	RK73HB1J432J	MG RESISTOR	4.3kΩ 1/16W J	1	
	R122	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R123	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R124	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R138	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R151	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R165	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R170	RK73HH1J332D	MG RESISTOR	3.3kΩ 1/16W D	1	
	R171	RK73HH1J162D	MG RESISTOR	1.6kΩ 1/16W D	1	
	R182	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R205	RK73GH2A333D	MG RESISTOR	33kΩ 1/10W D	1	
	R206	RK73GB2A133J	MG RESISTOR	13kΩ 1/10W J	1	
	R208	RK73GB2A133J	MG RESISTOR	13kΩ 1/10W J	1	
	R209	RK73GB2A363J	MG RESISTOR	36kΩ 1/10W J	1	
	R212	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	1	
	R214	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	
	R215	RK73GB2A203J	MG RESISTOR	20kΩ 1/10W J	1	
	R216	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	
	R231	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R233	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	
	R241	RK73GB2A163J	MG RESISTOR	16kΩ 1/10W J	1	
	R244	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R271	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R302	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R303	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R304	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R306	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	
	R307	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	
	R308	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	
	R309	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R310	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	1	
	R311	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R313	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R314	RK73GB2A203J	MG RESISTOR	20kΩ 1/10W J	1	
	R315	RK73GB2A203J	MG RESISTOR	20kΩ 1/10W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX492	K0	DDX272	K1	DDX392	K2	DDX372BT	K3
DDX320BT	K4	DDX4015BT	X2	DDX4015DAB	E1	DDX3015	E2
DDX4015BT	E3	DDX3015R	Q1	DDX4015BTR	Q2		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R318	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R319	RK73GH2A243D	MG RESISTOR	24kΩ 1/10W D	1	
	R323	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	
	R327	RK73HB1J270J	MG RESISTOR	27Ω 1/16W J	1	
	R341	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R351	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	
	R352	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R386	RK73HB1J184J	MG RESISTOR	180kΩ 1/16W J	1	
	R401	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R402	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	
	R404	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R511	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R512	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R515	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R601	RK73GH2A330D	MG RESISTOR	33Ω 1/10W D	1	
	R602	RK73GH2A330D	MG RESISTOR	33Ω 1/10W D	1	
	R611	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	
	R612	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	
	R702	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R911	NRZ0098-R18X	MG RESISTOR	0.18Ω	1	
	CN101	EC720AA-0524A	FFC FPC CONNE		1	
	CN201	EA720AM-1206A	W TO B CONNE		1	
	CN202	EA720AM-1202A	W TO B CONNE		1	
	CN301	EA720AM-1202A	W TO B CONNE		1	
	CN401	EC720AA-0550A	FFC FPC CONNE		1	
	S1	S6J-0002-00	PUSH SWITCH		1	
	TH491	NAD0055-103X	N THERMISTOR	10kΩ	1	
	X351	NAX1135-001X	CRYSTAL		1	