
EXPLODED VIEW / PARTS LIST

DCP section

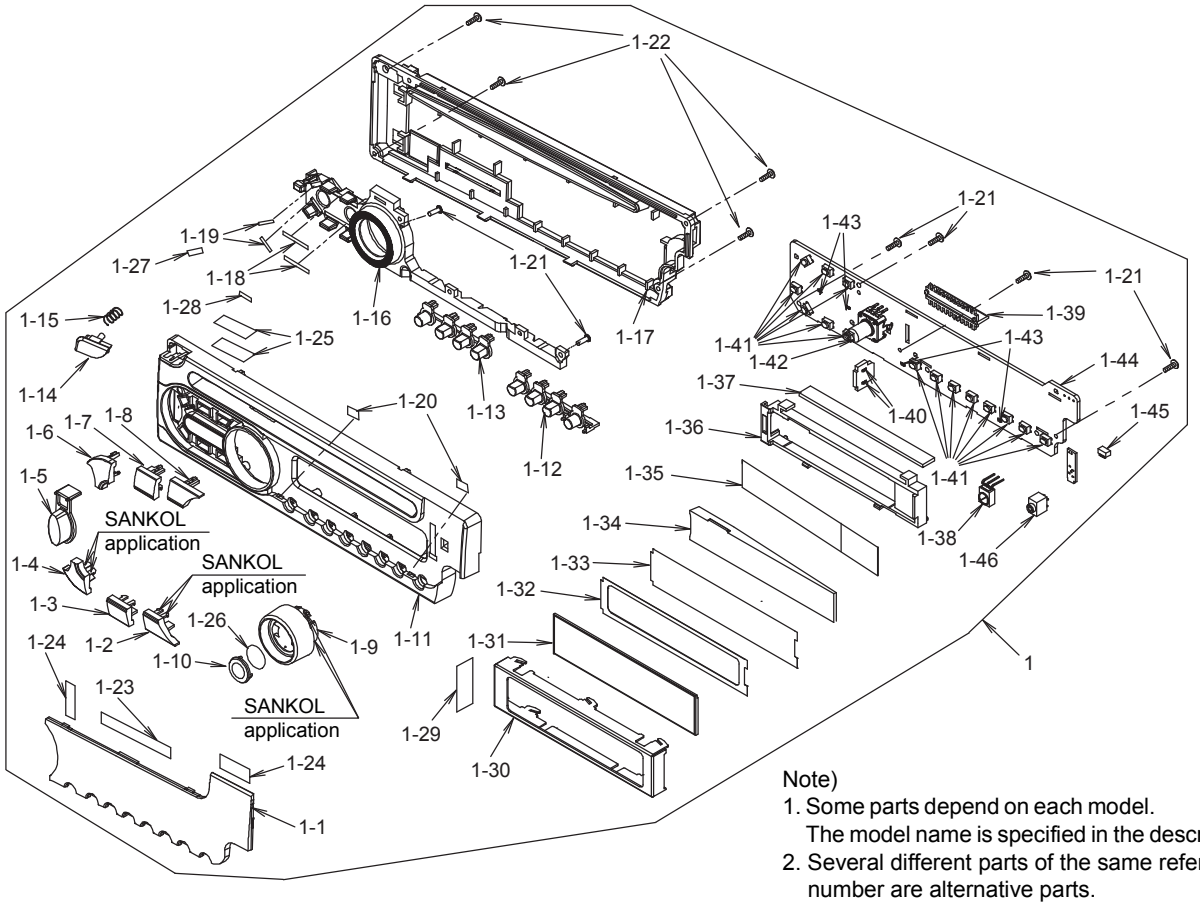


Note)

1. Some parts depend on each model.
   The model name is specified in the description.
2. Several different parts of the same reference number are alternative parts.
   One of those parts is used in the set.
3. SANKOL uses CFD-409Z.

NO.	PART NO.	DESCRIPTION	Q'TY
1	DCP-641-600	DCP ASSY(PE-3157B-A)	1
	DCP-653-800	DCP ASSY(PE-3157K-A)	1
1-1	373-1182-00	DIAL-CVR(PE-3157B-A)	1
	373-1182-05	DIAL-CVR(PE-3157K-A/B)	1
1-2	382-9095-00	BUTTON(ISR)	1
1-3	382-9093-00	BUTTON(SRC)	1
1-4	382-9097-00	BUTTON(FW)	1
1-5	382-9091-00	BUTTON(EJECT)	1
1-6	382-9096-00	BUTTON(FF)	1
1-7	382-9098-00	BUTTON(ENT)	1
1-8	382-9092-00	BUTTON(BAND)	1
1-9	380-5753-00	KNOB	1
1-10	335-8547-00	KNOB CVR	1
1-11	370-6395-00	ESCUTCHEON	1
1-12	382-9090-00	BUTTON(4/5/6/S)	1
1-13	382-9089-00	BUTTON(1/2/3/D)	1
1-14	382-9094-00	BUTTON(REL)	1
1-15	750-6858-00	SPRING	1
1-16	335-8550-01	ILLUMI PLATE	1
1-17	335-8551-00	REAR CVR	1
1-18	345-6345-00	RUBBER PART	2
1-19	345-6344-00	RUBBER PART	2
1-20	347-8655-00	FILM	2
1-21	716-0872-51	SCREW(M1.7x6)	6
1-22	716-0872-62	SCREW(M1.7x8)	4

NO.	PART NO.	DESCRIPTION	Q'TY
1-23	347-7549-00	DOUBLE FACE	1
1-24	347-8658-00	DOUBLE FACE	2
1-25	347-8667-00	FILM	2
1-26	347-8661-00	DOUBLE FACE	1
1-27	347-8657-00	FILM	1
1-28	347-8659-00	FILM	1
1-29	347-8660-00	FILM	1
1-30	331-4717-00	LCD-CVR	1
1-31	379-1426-41	INDICATOR(LCD)	1
1-32	347-8653-00	BLACK FILM	1
1-33	347-8654-00	WHITE FILM	1
1-34	335-8549-00	LCD-ILLUMI	1
1-35	347-8652-00	REFLECTOR	1
1-36	335-8548-00	LCD-HOLDER	1
1-37	345-6277-00	RUBBER PART	1
1-38	060-4021-00	IR-RECEIVER	1
1-39	076-0615-50	PLUG(16P)	1
1-40	001-7114-91	DIODE	2
1-41	013-6312-50	SWITCH	15
1-42	016-9901-02	VR W/SHAFT	1
1-43	001-7097-91	DIODE	4
1-44	----------	SWITCH PWB	1
1-45	076-0502-55	PLUG	1
1-46	075-9021-50	JACK	1

Main section

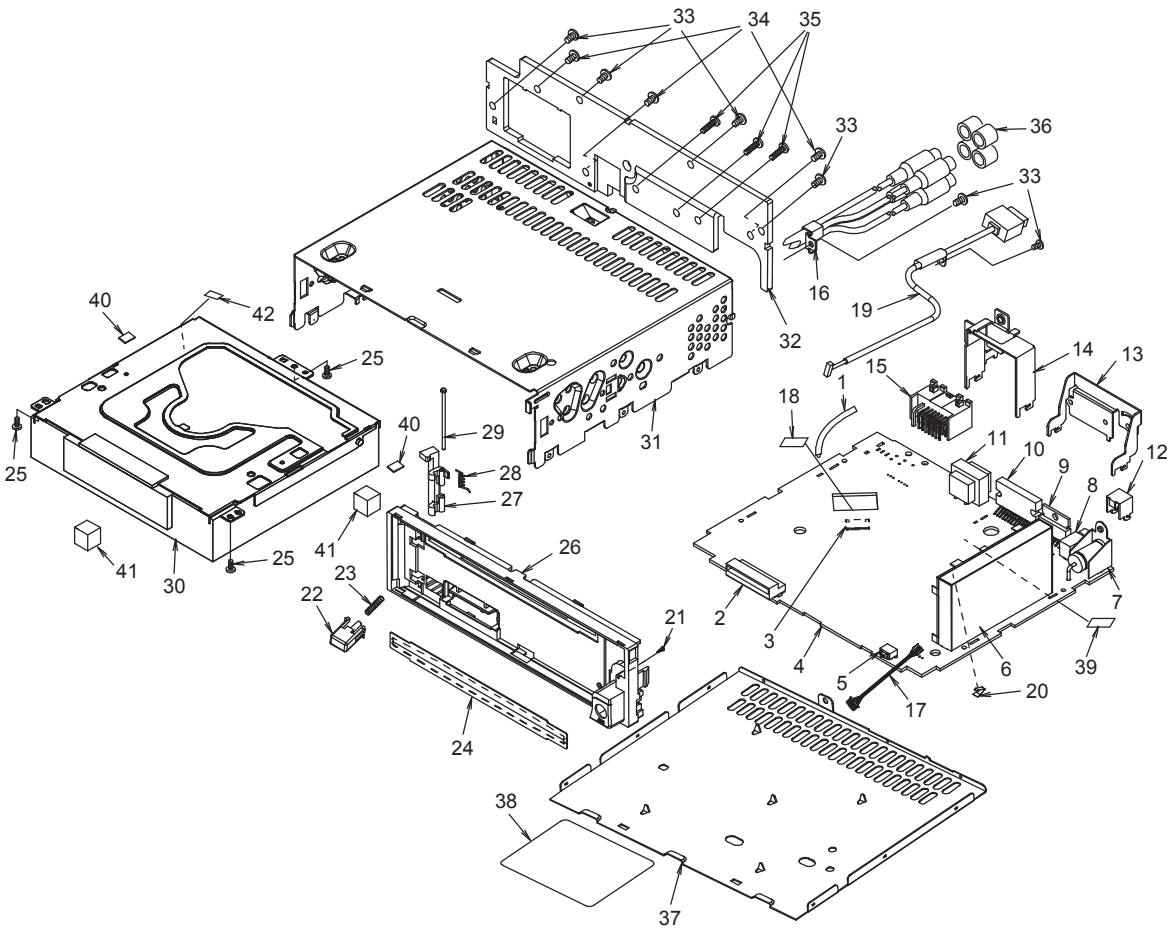

Note) CD MECHANISM 929-4002-00 is exchanged
correspondence, it is not being possible to repair.

NO.	PART NO.	DESCRIPTION	Q'TY
1	321-0969-00	CLAMP	1
2	074-1217-50	OUTLET SOCKET(12P)	1
3	074-2246-67	OUTLET SOCKET	1
4	----------	MAIN PWB	1
5	013-6100-00	SWITCH	1
6	941-0227-02	TUNER PACK	1
7	092-4000-51	ANT-RECEPT	1
8	075-0393-50	JACK	1
9	051-3349-00	IC	1
10	051-2060-00	IC	1
11	009-9006-60	CHOKE	1
	009-9006-70	CHOKE	1
12	331-4533-00	JACK HOLDER	1
13	331-3935-02	IC HOLDER	1
14	331-3561-03	CONNECTOR-HOLD	1
15	074-1214-50	OUTLET SOCKET(16P)	1
16	855-5563-50	RCA PIN CORD	1
17	854-4619-50	EXTENSION LEAD	1
18	347-8489-00	FILM	1
19	855-0642-50	USB CABLE	1
20	331-4312-01	EARTH PLATE	1
21	716-0872-61	PAD SCREW(M1.7 x 6)	1
22	382-8567-01	PICK UP BUTTON	1

NO.	PART NO.	DESCRIPTION	Q'TY
23	750-6861-00	SPRING	1
24	346-0194-00	LEATHER SHEET	1
25	731-2606-8B	TAPTIGHT(M2.6 x 6)	3
26	370-6394-00	INNER ESC	1
27	335-5915-01	HOOK	1
28	750-3219-00	SPRING(F-HOOK)	1
29	341-1627-00	SHAFT	1
30	929-4002-00	DIGITAL-MECH	1
31	310-1871-00	UPPER CASE	1
32	313-2006-02	HEAT SINK	1
33	731-3008-89	TAPTIGHT(M3x8)	6
34	714-3006-85	MACHINE SCREW(M3 x 6)	3
35	714-2610-85	MACHINE SCREW(M2.6x10)	3
36	345-3799-20	RUBBER PART	4
37	311-1859-05	LOWER CASE	1
38	276-0497-00	SETPLATE(PE-3157B-A)	1
	276-0557-00	SETPLATE(PE-3157K-A)	1
	276-0558-00	SETPLATE(PE-3157K-B)	1
39	347-8427-00	FILM	1
40	345-6195-00	CUSHION	2
41	345-6201-00	CUSHION	2
42	347-8490-00	FILM	1

ELECTRICAL PARTS LIST

Note)1. Several different parts of the same reference number are alternative parts. One of those parts is used in the set.
2. Some parts depend on each model. The model name is specified in the description.

Main PWB(B1) section

REF No.	PART No.	DESCRIPTION
ANT2	092-4000-51	ANT-RECEPT
BL1	941-0227-02	FAE391-AC1
C118	043-1608-90	0.1uF
C119	043-1608-90	0.1uF
C120	187-1073-15	6.3V 100uF
C121	043-1608-90	0.1uF
C122	187-1073-35	16V 100uF
C123	043-1608-90	0.1uF
C124	187-1073-35	16V 100uF
C125	043-1608-90	0.1uF
C126	043-1608-90	0.1uF
C164	187-1063-35	16V 10uF
C202	043-1727-90	47pF
C203	043-1827-90	0.027uF
C204	043-1827-90	0.027uF
C209	187-1073-25	10V 100uF
C210	187-1073-25	10V 100uF
C211	043-1804-90	0.1uF
C212	043-1804-90	0.1uF
C213	187-1073-25	10V 100uF
C214	043-1804-90	0.1uF
C217	043-1607-90	0.01uF
C218	043-1601-90	100pF
C222	043-1719-90	22pF
C224	187-1073-25	10V 100uF
C227	043-1804-90	0.1uF
C229	043-1607-90	0.01uF
C230	043-1607-90	0.01uF
C241	042-9102-01	50V 3.3uF LZ
C250	187-4763-35	16V 47uF
C307	187-1053-65	50V 1uF
C308	187-1053-65	50V 1uF
C309	187-1053-65	50V 1uF
C310	187-1053-65	50V 1uF
C311	187-1053-65	50V 1uF
C312	187-1053-65	50V 1uF
C313	187-4763-15	6.3V 47uF
C314	187-1063-35	16V 10uF
C315	043-1735-90	100pF
C316	043-1735-90	100pF
C317	043-1804-90	0.1uF
C318	187-4763-35	16V 47uF
C319	043-1735-90	100pF
C320	043-1735-90	100pF
C321	187-1063-35	16V 10uF
C322	187-1063-35	16V 10uF
C323	187-1063-35	16V 10uF
C324	187-1063-35	16V 10uF
C325	043-1802-90	0.01uF
C337	187-1063-35	16V 10uF
C338	187-1063-35	16V 10uF
C339	187-1063-35	16V 10uF
C340	187-1063-35	16V 10uF
C346	043-1841-90	0.047uF
C401	042-4416-00	3000uF
C413	178-4742-78	0.47uF
C414	178-4742-78	0.47uF
C415	178-4742-78	0.47uF
C416	178-4742-78	0.47uF
C421	043-1620-90	4700pF
C428	187-1063-35	16V 10uF
C435	178-4742-78	0.47uF
C442	187-1053-65	50V 1uF
C445	172-1041-15	0.1uF
C447	043-1614-90	470pF
C449	043-1614-90	470pF
C450	043-1614-90	470pF
C451	043-1614-90	470pF
C452	043-1614-90	470pF
C453	043-1614-90	470pF
C454	043-1614-90	470pF
C455	043-1614-90	470pF
C500	187-3363-45	10V 33uF
C501	043-1806-90	1uF
C502	043-1608-90	0.1uF
C503	043-1608-90	0.1uF
C504	043-1806-90	1uF
C505	043-1804-90	0.1uF
C506	043-6200-90	10uF
C507	165-1063-35	16V 10uF
C508	043-1710-90	9pF
C509	043-1710-90	9pF
C510	043-1719-90	22pF
C511	043-1719-90	22pF
C512	043-1607-90	0.01uF
C513	043-1601-90	100pF
C514	042-1577-00	6.3V 100uF
C515	043-1607-90	0.01uF
C516	189-1083-12	6.3V 1000uF
C517	043-1607-90	0.01uF
C518	043-1802-90	0.01uF
C519	043-1617-90	6800pF
C520	043-1802-90	0.01uF
C521	043-1607-90	0.01uF
C522	043-1607-90	0.01uF
C523	043-1601-90	100pF
C599	043-1802-90	0.01uF
C600	043-1804-90	0.1uF
C601	043-1609-90	1500pF
C602	043-1715-90	15pF
C603	043-1715-90	15pF
C604	043-1706-90	5pF
C605	043-1706-90	5pF
C606	043-1609-90	1500pF
C607	043-1804-90	0.1uF
C608	187-1073-15	6.3V 100uF
C609	043-1804-90	0.1uF
C610	043-1608-90	0.1uF
C611	043-1806-90	1uF
C612	043-1608-90	0.1uF
C613	043-1608-90	0.1uF
C614	043-1607-90	0.01uF
C620	187-2253-65	50V 2.2uF
C621	187-4753-65	50V 4.7uF
C623	187-2253-65	50V 2.2uF
C624	189-4773-22	10V 470uF
C633	187-4763-15	6.3V 47uF
C800	187-1073-15	6.3V 100uF
C801	043-1620-90	4700pF
C802	043-1802-90	0.01uF
C803	043-1804-90	0.1uF
C804	043-1804-90	0.1uF
C805	187-3363-25	6.3V 33uF
C806	043-1804-90	0.1uF
C807	187-1073-15	6.3V 100uF
C809	043-1804-90	0.1uF
C810	043-1804-90	0.1uF
C811	043-1802-90	0.01uF
C812	043-1606-90	1000pF
C813	043-1804-90	0.1uF
C814	043-1607-90	0.01uF
C815	187-1073-15	6.3V 100uF
C816	043-1806-90	1uF
C817	043-1606-90	1000pF
C818	043-1608-90	0.1uF
C819	187-1073-15	6.3V 100uF
C820	043-1608-90	0.1uF
C821	043-1804-90	0.1uF
C822	043-1802-90	0.01uF
C824	043-1804-90	0.1uF
C825	043-1824-90	0.22uF
C826	043-1625-90	0.022uF
C827	043-1608-90	0.1uF
C828	187-1073-15	6.3V 100uF
C829	043-1608-90	0.1uF
C830	043-1804-90	0.1uF
C831	187-1073-15	6.3V 100uF
C833	189-3373-11	6.3V 330uF
C834	189-4773-22	10V 470uF
C835	043-1804-90	0.1uF
C836	165-4753-55	35V 4.7uF
C837	165-4753-55	35V 4.7uF
C838	043-1800-90	1000pF
C839	043-1800-90	1000pF
C840	043-1800-90	1000pF
C841	043-1800-90	1000pF
C842	043-1731-90	68pF
C843	043-1731-90	68pF
C844	043-1608-90	0.1uF
C845	043-1608-90	0.1uF
C846	043-1608-90	0.1uF
C847	187-1053-65	50V 1uF
C848	187-1073-15	6.3V 100uF
C849	043-1804-90	0.1uF
C850	043-1804-90	0.1uF
C853	189-4773-22	10V 470uF
C854	043-1841-90	0.047uF
C855	043-1608-90	0.1uF
C856	043-1804-90	0.1uF
C857	187-1073-15	6.3V 100uF
C858	043-1804-90	0.1uF
C859	187-1073-15	6.3V 100uF
C860	187-1073-15	6.3V 100uF
C861	043-1608-90	0.1uF
C870	187-1073-35	16V 100uF
C903	043-1804-90	0.1uF
D100	001-0592-61	1N5404
D109	001-0466-61	1A4
D110	001-0466-61	1A4
D163	001-0504-32	HZS6 A3L
D302	001-4316-17	LM3Z4V3T1G
D401	001-4316-24	LM3Z8V2T1G
D402	001-1323-90	L1SS355T1G
D403	001-1323-90	L1SS355T1G
D500	001-1323-90	L1SS355T1G
D502	001-4301-26	HZU4.7B2
D503	001-1323-90	L1SS355T1G
D504	001-1323-90	L1SS355T1G
D505	001-1323-90	L1SS355T1G

REF No.	PART No.	DESCRIPTION
D506	001-1323-90	L1SS355T1G
D507	001-1323-90	L1SS355T1G
D508	001-1323-90	L1SS355T1G
D601	001-4301-41	HZU 7.5B2
D602	060-8078-00	EZAEG3A50AV
D603	060-8078-00	EZAEG3A50AV
D604	001-1323-90	L1SS355T1G
D801	001-1323-90	L1SS355T1G
D802	001-0644-90	MA113
IC105	051-3349-00	HA13166E
IC302	051-5028-90	TDA7409DTR
IC305	051-3060-90	AZ4558C
IC402	051-2060-00	LA47201-N-E
IC501	052-3996-00	LC8783G0PA-5AE8-E
IC502	051-5443-38	S80850CNMC
IC503	051-5437-58	R3111N211A
IC600	052-3995-90	LC87F1HC8A-F5AF1-E
IC601	051-6926-90	BD2051AFJ-TR
IC801	051-6743-00	LC786920E
IC802	051-6096-90	LA6242H
IC901	051-6928-90	341S2094
J401	074-1214-50	16P
J501	074-1217-50	12P
J502	075-0393-50	JACK
J801	074-2246-67	17P
L201	010-2003-04	30uH(Variable)
L202	010-3105-67	1.5k ohm/100kHz
L203	010-3105-67	1.5k ohm/100kHz
L206	010-6009-57	0.56uH
L301	010-6009-84	100uH J
L302	119-0000-05	1/10W 0 ohm JW
L303	119-0000-05	1/10W 0 ohm JW
L304	119-0000-05	1/10W 0 ohm JW
L305	119-0000-05	1/10W 0 ohm JW
L501	010-3112-90	1k ohm/100MHz
L502	010-3123-90	2.2uH
L503	010-3123-90	2.2uH
L504	010-3123-90	2.2uH
L601	010-6009-81	56uH J
L801	010-6009-76	22uH J
L802	010-6009-76	22uH J
Q119	125-4026-00	3DA2026
Q123	125-9026-90	IMF29
Q201	125-0025-93	RN2303
Q201	125-0034-93	RT1P241M
Q202	125-0025-93	RN2303
Q202	125-0034-93	RT1P241M
Q203	125-2027-92	DTC124EUA-T106
Q203	125-2041-93	RT1N241M
Q206	125-2027-92	DTC124EUA-T106
Q206	125-2041-93	RT1N241M
Q208	125-4011-90	KTD863
Q211	192-4116-51	2SC4116 G,L
Q211	192-4155-51	2SC4155
Q212	192-4116-51	2SC4116 G,L
Q212	192-4155-51	2SC4155
Q403	125-4024-90	3DG3875
Q404	125-2027-95	DTC143ZU
Q404	125-2041-96	RT1N436M
Q405	125-2198-90	KRC110S
Q409	125-0021-95	DTA143ZUA-T106
Q409	125-0034-96	RT1P436M
Q410	125-4012-90	KTD1304

REF No.	PART No.	DESCRIPTION
Q411	125-4012-90	KTD1304
Q413	125-4012-90	KTD1304
Q414	125-4012-90	KTD1304
Q500	125-4024-90	3DG3875
Q501	125-3014-90	ISA1602AM1
Q501	190-1576-00	2SA1576A T106
Q502	125-3014-90	ISA1602AM1
Q502	190-1576-00	2SA1576A T106
Q503	125-2027-91	DTC114EUA
Q503	125-2041-92	RT1N141M
Q504	125-2027-92	DTC124EUA-T106
Q504	125-2041-93	RT1N241M
Q505	125-0034-97	RT1P136M-T111
Q515	125-2027-92	DTC124EUA-T106
Q515	125-2041-93	RT1N241M
Q516	125-0034-97	RT1P136M-T111
Q801	190-2060-00	2SA2060
Q802	101-0941-00	2SB941
Q901	125-0021-91	DTA114EUA
Q902	125-2027-92	DTC124EUA-T106
Q902	125-2041-93	RT1N241M
R108	033-1031-15	1/10W 10k ohm
R154	116-1521-15	1/4W 1.5k ohm
R156	119-1241-15	1/10W 120k ohm
R159	116-1221-15	1/4W 1.2k ohm
R169	119-2211-15	1/10W 220 ohm
R200	119-1031-15	1/10W 10k ohm
R201	119-5631-15	1/10W 56k ohm
R207	119-0000-05	1/10W 0 ohm JW
R209	119-2711-15	1/10W 270 ohm
R212	119-0000-05	1/10W 0 ohm JW
R225	033-1031-15	1/10W 10k ohm
R230	033-1021-15	1/10W 1k ohm
R233	119-4741-15	1/10W 470k ohm
R236	119-3311-15	1/10W 330 ohm
R238	033-2221-15	1/10W 2.2k ohm
R239	033-2221-15	1/10W 2.2k ohm
R313	033-2711-15	1/10W 270 ohm
R314	033-2711-15	1/10W 270 ohm
R315	033-2711-15	1/10W 270 ohm
R316	033-2711-15	1/10W 270 ohm
R317	119-3311-15	1/10W 330 ohm
R325	032-0140-89	1/10W 47k ohm F
R326	032-0140-89	1/10W 47k ohm F
R328	032-0140-89	1/10W 47k ohm F
R329	032-0140-89	1/10W 47k ohm F
R332	032-0140-89	1/10W 47k ohm F
R333	032-0140-89	1/10W 47k ohm F
R334	032-0140-89	1/10W 47k ohm F
R335	032-0140-89	1/10W 47k ohm F
R344	119-1021-15	1/10W 1k ohm
R346	119-1041-15	1/10W 100k ohm
R347	119-1041-15	1/10W 100k ohm
R408	033-8221-15	1/10W 8.2k ohm
R409	119-1021-15	1/10W 1k ohm
R410	033-1021-15	1/10W 1k ohm
R411	033-4711-15	1/10W 470 ohm
R412	033-2231-15	1/10W 22k ohm
R413	033-4721-15	1/10W 4.7k ohm
R424	033-1231-15	1/10W 12k ohm
R425	119-0000-05	1/10W 0 ohm JW
R427	033-1021-15	1/10W 1k ohm
R428	033-1021-15	1/10W 1k ohm
R429	033-1021-15	1/10W 1k ohm
R430	033-1021-15	1/10W 1k ohm

REF No.	PART No.	DESCRIPTION
R446	033-1031-15	1/10W 10k ohm
R448	119-2231-15	1/10W 22k ohm
R449	119-2231-15	1/10W 22k ohm
R452	119-3311-15	1/10W 330 ohm
R453	119-3311-15	1/10W 330 ohm
R454	119-2231-15	1/10W 22k ohm
R455	119-3311-15	1/10W 330 ohm
R456	119-3311-15	1/10W 330 ohm
R457	119-2231-15	1/10W 22k ohm
R458	033-1021-15	1/10W 1k ohm
R459	033-1021-15	1/10W 1k ohm
R500	116-4721-15	1/4W 4.7k ohm
R501	119-4731-15	1/10W 47k ohm
R502	033-4721-15	1/10W 4.7k ohm
R503	033-4731-15	1/10W 47k ohm
R504	033-4721-15	1/10W 4.7k ohm
R505	033-1031-15	1/10W 10k ohm
R506	033-1041-15	1/10W 100k ohm
R507	033-6831-15	1/10W 68k ohm
R508	119-1021-15	1/10W 1k ohm
R509	119-1031-15	1/10W 10k ohm
R510	119-1021-15	1/10W 1k ohm
R511	119-0000-05	1/10W 0 ohm JW
R512	119-1021-15	1/10W 1k ohm
R513	033-4731-15	1/10W 47k ohm
R514	033-4731-15	1/10W 47k ohm
R515	119-1841-15	1/10W 180k ohm
R516	033-4731-15	1/10W 47k ohm
R517	033-2221-15	1/10W 2.2k ohm
R518	033-1031-15	1/10W 10k ohm
R519	033-3921-15	1/10W 3.9k ohm
R521	033-5641-15	1/10W 560k ohm
R522	119-1021-15	1/10W 1k ohm
R526	033-1031-15	1/10W 10k ohm
R527	033-1031-15	1/10W 10k ohm
R528	033-5621-15	1/10W 5.6k ohm
R529	119-4721-15	1/10W 4.7k ohm
R530	033-1031-15	1/10W 10k ohm
R531	033-4721-15	1/10W 4.7k ohm
R532	119-4721-15	1/10W 4.7k ohm
R533	033-1041-15	1/10W 100k ohm
R534	033-1031-15	1/10W 10k ohm
R535	033-4731-15	1/10W 47k ohm
R536	033-2231-15	1/10W 22k ohm
R537	033-1041-15	1/10W 100k ohm
R538	119-4711-15	1/10W 470 ohm
R539	119-4711-15	1/10W 470 ohm
R540	119-0000-05	1/10W 0 ohm JW
R541	119-1021-15	1/10W 1k ohm
R542	119-1021-15	1/10W 1k ohm
R543	033-4721-15	1/10W 4.7k ohm
R544	119-1021-15	1/10W 1k ohm
R546	119-0000-05	1/10W 0 ohm JW (PE-3157K-A/B)
R547	119-0000-05	1/10W 0 ohm JW (PE-3157B-A)
R548	119-0000-05	1/10W 0 ohm JW
R550	119-0000-05	1/10W 0 ohm JW
R553	119-0000-05	1/10W 0 ohm JW
R554	119-1021-15	1/10W 1k ohm
R557	119-1021-15	1/10W 1k ohm
R633	033-1511-15	1/10W 150 ohm
R634	033-1031-15	1/10W 10k ohm
R635	033-1041-15	1/10W 100k ohm
R636	033-1041-15	1/10W 100k ohm

REF No.	PART No.	DESCRIPTION
R637	033-1031-15	1/10W 10k ohm
R638	119-1031-15	1/10W 10k ohm
R639	033-1031-15	1/10W 10k ohm
R640	033-3921-15	1/10W 3.9k ohm
R641	033-1031-15	1/10W 10k ohm
R643	033-1531-15	1/10W 15k ohm
R644	033-1531-15	1/10W 15k ohm
R645	033-3301-15	1/10W 33 ohm
R646	033-3301-15	1/10W 33 ohm
R647	033-1011-15	1/10W 100 ohm
R648	033-1011-15	1/10W 100 ohm
R649	033-1011-15	1/10W 100 ohm
R650	033-1011-15	1/10W 100 ohm
R652	119-0000-05	1/10W 0 ohm JW
R653	119-0000-05	1/10W 0 ohm JW
R654	033-2221-15	1/10W 2.2k ohm
R655	119-0000-05	1/10W 0 ohm JW
R656	119-0000-05	1/10W 0 ohm JW
R657	119-0000-05	1/10W 0 ohm JW
R658	119-0000-05	1/10W 0 ohm JW
R659	119-0000-05	1/10W 0 ohm JW
R660	119-0000-05	1/10W 0 ohm JW
R661	119-0000-05	1/10W 0 ohm JW
R663	119-0000-05	1/10W 0 ohm JW
R801	033-3311-15	1/10W 330 ohm
R802	119-1031-15	1/10W 10k ohm
R804	033-4711-15	1/10W 470 ohm
R805	033-4721-15	1/10W 4.7k ohm
R806	033-4721-15	1/10W 4.7k ohm
R807	116-3391-15	1/4W 3.3 ohm
R808	119-0000-05	1/10W 0 ohm JW
R809	119-0000-05	1/10W 0 ohm JW
R810	119-2231-15	1/10W 22k ohm

REF No.	PART No.	DESCRIPTION
R811	119-1531-15	1/10W 15k ohm
R812	119-2231-15	1/10W 22k ohm
R813	119-2231-15	1/10W 22k ohm
R815	033-6811-15	1/10W 680 ohm
R817	033-6811-15	1/10W 680 ohm
R818	033-6831-15	1/10W 68k ohm
R820	119-1011-15	1/10W 100 ohm
R821	119-1011-15	1/10W 100 ohm
R825	119-3921-15	1/10W 3.9k ohm
R826	119-3921-15	1/10W 3.9k ohm
R827	119-3921-15	1/10W 3.9k ohm
R828	033-2731-15	1/10W 27k ohm
R829	033-1021-15	1/10W 1k ohm
R830	033-1011-15	1/10W 100 ohm
R831	033-2221-15	1/10W 2.2k ohm
R832	033-2221-15	1/10W 2.2k ohm
R833	033-2221-15	1/10W 2.2k ohm
R834	119-2201-15	1/10W 22 ohm
R835	033-3321-15	1/10W 3.3k ohm
R836	033-1511-15	1/10W 150 ohm
R837	033-2231-15	1/10W 22k ohm
R839	119-4701-15	1/10W 47 ohm
R840	119-3301-15	1/10W 33 ohm
R841	119-1511-15	1/10W 150 ohm
R842	119-1511-15	1/10W 150 ohm
R845	033-0000-05	1/10W 0 ohm
R846	033-0000-05	1/10W 0 ohm
R847	033-0000-05	1/10W 0 ohm
R848	033-0000-05	1/10W 0 ohm
R853	119-2721-15	1/10W 2.7k ohm
R854	119-1021-15	1/10W 1k ohm
R855	119-1021-15	1/10W 1k ohm
R856	119-1021-15	1/10W 1k ohm

REF No.	PART No.	DESCRIPTION
R857	119-1021-15	1/10W 1k ohm
R858	033-1031-15	1/10W 10k ohm
R859	033-1031-15	1/10W 10k ohm
R860	033-1031-15	1/10W 10k ohm
R861	033-1031-15	1/10W 10k ohm
R862	119-6831-15	1/10W 68k ohm
R863	119-2231-15	1/10W 22k ohm
R865	119-3351-15	1/10W 3.3M ohm
R866	033-1031-15	1/10W 10k ohm
R867	119-1031-15	1/10W 10k ohm
R870	032-0140-54	1/10W 22k ohm F
R871	032-0140-50	1/10W 10k ohm F
R872	119-6221-15	1/10W 6.2k ohm
R873	119-1031-15	1/10W 10k ohm
R874	119-6221-15	1/10W 6.2k ohm
R875	119-6821-15	1/10W 6.8k ohm
R876	033-3331-15	1/10W 33k ohm
R877	033-3331-15	1/10W 33k ohm
R907	119-1031-15	1/10W 10k ohm
R911	032-0140-88	1/10W100 k ohm F
R936	033-1021-15	1/10W 1k ohm
S501	013-6100-00	SWITCH
SUP202	060-0122-20	DSP-141N-S00B
T101	009-9006-60	CHOKE 0.23mH
T101	009-9006-70	CHOKE 0.23mH
X501	061-1056-00	32.768kHz
X502	061-3562-90	13.5MHz
X601	061-1081-50	12MHz
X801	060-1535-90	16.934MHz
PWB	039-3386-00	PWB(WITHOUT COMPONENT)

Switch PWB(B2) section

REF No.	PART No.	DESCRIPTION
C701	043-1841-90	0.047uF
C702	043-1841-90	0.047uF
C703	043-1841-90	0.047uF
C704	043-1800-90	1000pF
C705	042-0423-97	16V 10uF
C706	042-0423-97	16V 10uF
C707	043-1841-90	0.047uF
D702	001-4907-90	PG05GBUSU
D705	001-4301-29	HZU5.1B2
D706	001-4301-29	HZU5.1B2
D707	001-4907-90	PG05GBUSU
D708	001-4907-90	PG05GBUSU
D711	001-7097-91	DIODE
D712	001-7097-91	DIODE
D713	001-7097-91	DIODE
D714	001-7097-91	DIODE
D715	001-7114-91	DIODE
D716	001-7114-91	DIODE
D717	001-4301-29	HZU5.1B2
D718	001-4301-41	HZU7.5B2
D720	001-4301-51	HZU10B3
IC701	051-6095-00	LC75857
IR701	060-4021-00	GPIUX51
J701	076-0615-50	12P

REF No.	PART No.	DESCRIPTION
J702	075-9021-50	5P
LCD701	379-1426-41	INDICATOR(LCD)
P701	076-0502-55	5P
Q713	125-2027-92	DTC124EUA
Q713	125-2041-93	RT1N241M
Q714	125-2027-92	DTC124EUA
Q714	125-2041-93	RT1N241M
R701	119-3311-15	1/10W 330 ohm
R702	119-3931-15	1/10W 39k ohm
R703	119-1041-15	1/10W 100k ohm
R704	119-3921-15	1/10W 3.9k ohm
R705	119-2221-15	1/10W 2.2k ohm
R706	119-1021-15	1/10W 1k ohm
R707	119-1021-15	1/10W 1k ohm
R708	119-1011-15	1/10W 100 ohm
R709	119-4721-15	1/10W 4.7k ohm
R713	119-6811-15	1/10W 680 ohm
R714	119-6811-15	1/10W 680 ohm
R715	119-1811-15	1/10W 180 ohm
R716	119-1811-15	1/10W 180 ohm
R717	119-1811-15	1/10W 180 ohm
R718	119-1811-15	1/10W 180 ohm
R719	119-6811-15	1/10W 680 ohm
R720	119-6811-15	1/10W 680 ohm

REF No.	PART No.	DESCRIPTION
R722	119-5621-15	1/10W 5.6k ohm
R724	119-2221-15	1/10W 2.2k ohm
R725	119-1021-15	1/10W 1k ohm
R726	119-5621-15	1/10W 5.6k ohm
S701	013-6312-50	SWITCH
S702	013-6312-50	SWITCH
S703	013-6312-50	SWITCH
S704	013-6312-50	SWITCH
S705	013-6312-50	SWITCH
S706	013-6312-50	SWITCH
S707	013-6312-50	SWITCH
S709	013-6312-50	SWITCH
S710	013-6312-50	SWITCH
S711	013-6312-50	SWITCH
S713	013-6312-50	SWITCH
S714	013-6312-50	SWITCH
S715	013-6312-50	SWITCH
S716	013-6312-50	SWITCH
S717	013-6312-50	SWITCH
S718	016-9901-02	VR W/SHAFT
PWB	039-3388-00	PWB(WITHOUT COMPONENT)