


EXPLODED VIEW • PARTS LIST


Main section

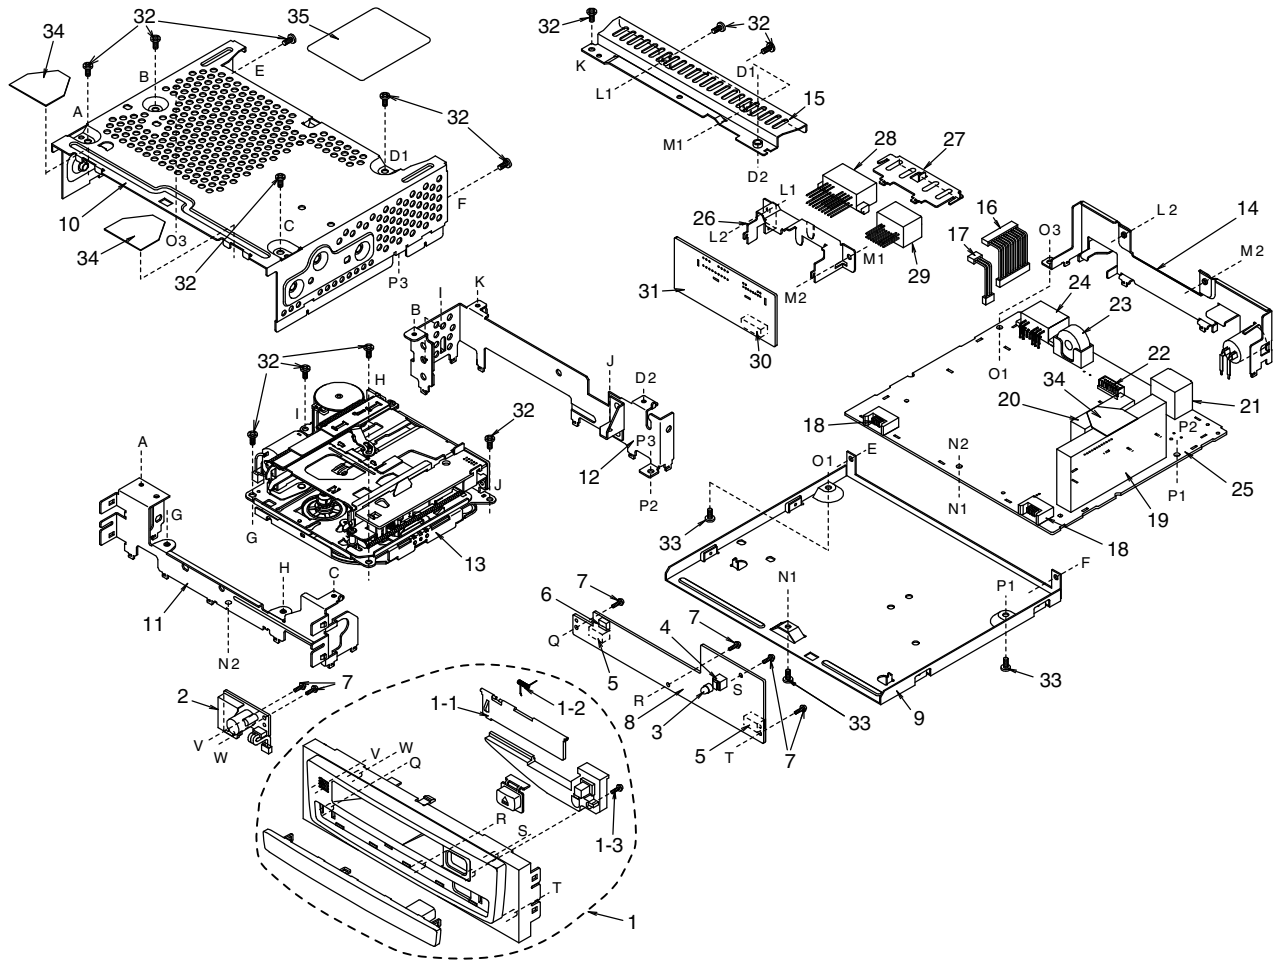

Note) Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.
Some parts depend on each model. The model name is specified in the description.

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	940-7944-12 940-7944-32	ESCUTCHEON ASSY(1702K) ESCUTCHEON ASSY(1709K)	1	17	854-4458-00	EXTENSION LEAD(3P)	1
1-1	320-0457-45 320-0457-47	DUSTPROOF COVER(1702K) DUSTPROOF COVER(1709K)	1	18	076-0540-06	PLUG(6P)	2
1-2	750-2626-00	SPRING	1	19	880-1728F	TUNER PACK(FM)	1
1-3	716-0778-00	WAVE SCREW($\phi 2 \times 6$)	1	20	880-1518J	TUNER PACK(AM)	1
2	948-0602-00	MIC ASSY	1	21	074-0850-08	OUTLET SOCKET(DIN 8P)	1
3	017-0420-31	PILOT LAMP(14V40mA)	1	22	076-0368-14	PLUG(14P)	1
4	013-3934-02	SWITCH	1	23	010-8028-00	COIL	1
5	074-1151-06	OUTLET SOCKET(6P)	2	24	074-1284-00	OUTLET SOCKET	1
6	076-0526-03	PLUG(3P)	1	25	039-1904-00	MAIN PWB (WITHOUT COMPONENT)	1
7	716-0778-00	WAVE SCREW($\phi 2 \times 6$)	6	26	331-3041-00	OUTLET HOLDER A	1
8	039-1826-00	SWITCH PWB (WITHOUT COMPONENT)	1	27	331-3042-00	OUTLET HOLDER B	1
9	311-1758-02	LOWER CASE	1	28	074-1268-10	OUTLET SOCKET	1
10	310-1663-01	UPPER CASE	1	29	074-1013-30	OUTLET SOCKET	1
11	309-0732-01	FRONT PLATE	1	30	074-0898-14	OUTLET SOCKET(14P)	1
12	331-2471-20	MECHANISM BRACKET	1	31	039-1903-00	SUB PWB (WITHOUT COMPONENT)	1
13	930-0797-81	TAPE MECHANISM 930-0797-01	1	32	714-2606-81	MACHINE SCREW(M2.6 $\times$ 6)	13
14	331-3040-00	REAR PLATE	1	33	716-1494-00	IT SCREW(M2.6 $\times$ 6)	3
15	307-0672-00	REAR COVER	1	34	347-6521-00	SHIELD PART	3
16	854-4457-01	EXTENSION LEAD(12P)	1	35	286-9233-29 286-9607-00	SETPLATE(1702K) SETPLATE(1709K)	1

Tape mechanism section

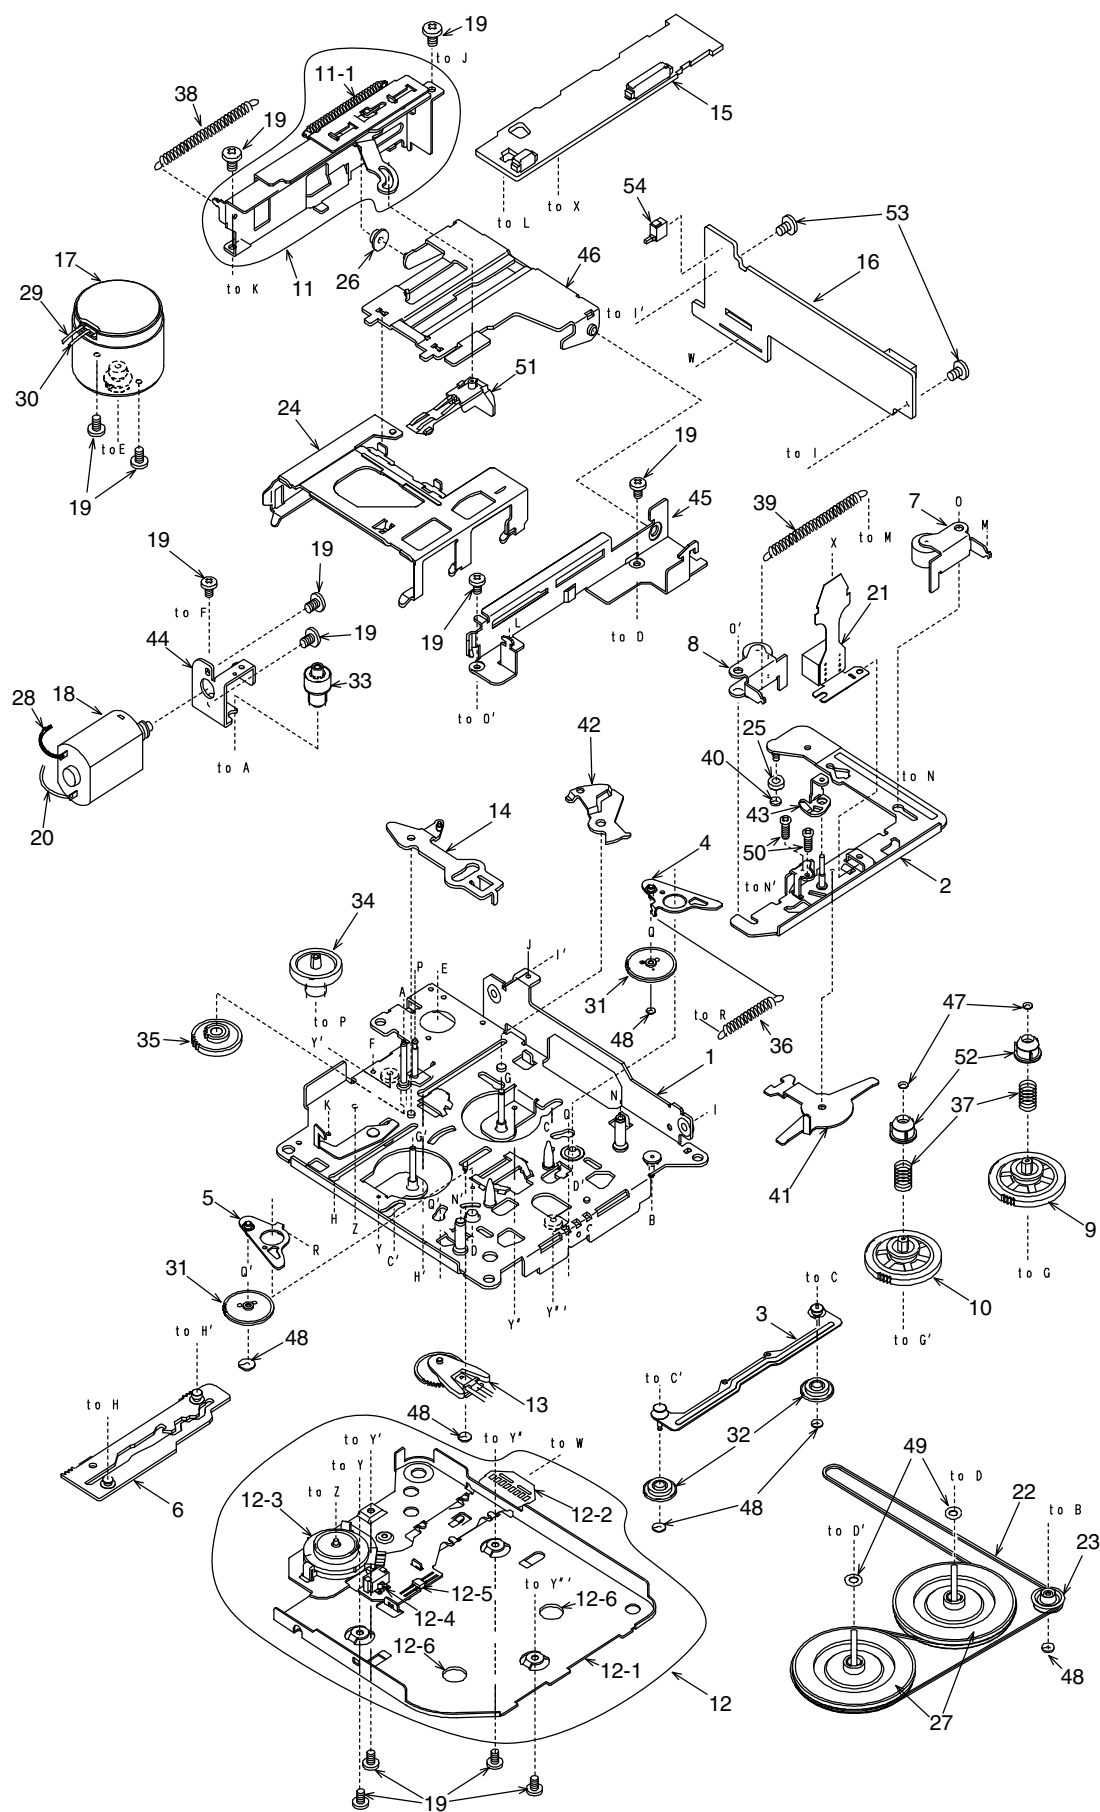

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	960-4294-22	DECK PLATE ASSY	1	24	606-0093-06	PACK GUIDE	1
2	960-4261-20	HEAD PLATE ASSY	1	25	610-0342-01	HEAD-P-ROLLER	1
3	960-4262-03	FF/REW-P-ASSY	1	26	610-0343-00	GUIDE-A-ROLLER	1
4	960-4263-03	IDLER-P-ASSY F	1	27	611-0091-02	FLYWHEEL	2
5	960-4264-03	IDLER-P-ASSY R	1	28	806-4914-60	WIRE(BLU)	1
6	960-4266-05	MODE PLATE ASSY	1	29	802-4911-60	WIRE(RED)	1
7	960-4269-05	ROLLER ASSY F	1	30	800-4911-60	WIRE(BLK)	1
8	960-4270-05	ROLLER ASSY R	1	31	613-0662-00	IDLER GEAR	2
9	960-4348-03	REEL ASSY F	1	32	613-0286-03	FF/REW GEAR	2
10	960-4349-03	REEL ASSY R	1	33	613-0288-01	HELICAL GEAR	1
11	960-4389-03	EJECT SUB ASSY	1	34	613-0289-01	GEAR A	1
11-1	750-3020-01	SWITCH PLATE SPRING	1	35	613-0337-00	POWER GEAR	1
12	960-4338-09	BOTTOM SUB ASSY	1	36	750-3017-02	IDLER-P-SPRING	1
12-1	960-4295-02	BOTTOM-P-ASSY	1	37	750-2949-00	SLIDE SPRING	2
12-2	099-9926-01	FLEXIBLE PWB (WITHOUT COMPONENT)	1	38	750-2947-02	EJECT-P-SPRING	1
12-3	013-3951-32	SWITCH(MODE)	1	39	750-2946-02	PINCH SPRING	1
12-4	013-3953-01	SWITCH(METAL)	1	40	746-0762-00	WASHER	1
12-5	051-1776-00	IC	1	41	630-2597-01	CHANGE LINK	1
12-6	746-0767-00	WASHER	2	42	630-2598-05	EJECT LINK	1
13	960-4282-06	DETECT SUB ASSY	1	43	630-2600-01	ADJUST LINK	1
14	960-4301-02	PLAY LINK ASSY	1	44	630-2601-02	MOTOR PLATE	1
15	039-1365-00	SIDE PWB (WITHOUT COMPONENT)	1	45	630-2626-06	PWB FRAME	1
16	990-0698-00	REAR PWB ASSY (WITH COMPONENT)	1	46	630-2642-01	GUIDE ARM	1
17	SMA-178-100	MAIN MOTOR ASSY	1	47	746-0761-00	WASHER	2
18	SMA-177-100	POWER MOTOR ASSY	1	48	746-0724-00	WASHER	6
19	716-0484-00	SCREW(M2×2.5)	13	49	746-0624-00	WASHER	2
20	809-4914-60	WIRE(WHT)	1	50	716-0833-10	SCREW(M2×5.6)	2
21	011-0328-01	HEAD	1	51	631-1992-02	PACK STOPPER	1
22	602-0118-00	BELT	1	52	631-1993-01	SLIDE BUSH	2
23	604-0046-00	TENSION PULLEY	1	53	716-1676-00	PWB SCREW(M2.6×6)	2
				54	013-3906-00	SWITCH(SPPB51)	1

■ ELECTRICAL PARTS LIST

Sub PWB section(B1)

Note) Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

Some parts depend on each model. The model name is specified in the description.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C801	166-5096-00	5pF CH	C813	168-2222-05	2200pF	R805	032-0106-65	1/10W 100kΩ ± 0.5%
C803	166-5096-00	5pF CH	IC801	051-3020-90	NJM4565V	R806	032-0106-65	1/10W 100kΩ ± 0.5%
C805	166-2201-00	22pF CH	J801	074-0898-14	14P	R807	032-0106-65	1/10W 100kΩ ± 0.5%
C806	166-2201-00	22pF CH	J802	074-1268-10	16P	R808	032-0106-65	1/10W 100kΩ ± 0.5%
C807	166-5096-00	5pF CH	J803	074-1013-30	OUTLET	R809	119-3011-15	1/16W 300Ω
C808	166-5096-00	5pF CH			SOCKET(A12MW)	R810	119-3011-15	1/16W 300Ω
C809	042-0562-17	16V10μF	R801	032-0106-64	1/10W 56kΩ ± 0.5%			
C810	042-0562-17	16V10μF	R802	032-0106-64	1/10W 56kΩ ± 0.5%			
C811	042-0562-17	16V10μF	R803	032-0106-64	1/10W 56kΩ ± 0.5%			
C812	042-0562-17	16V10μF	R804	032-0106-64	1/10W 56kΩ ± 0.5%			

Main PWB section(B2)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C102	043-0277-01	0.022μF	C112	166-1011-00	100pF CH	C302	178-1542-78	0.15μF
C103	168-1042-78	16V 0.1μF	C201	166-1511-00	150pF CH	C303	178-1542-78	0.15μF
C104	183-4763-32	16V47μF	C202	166-1007-00	10pF CH	C401	183-2263-32	16V22μF
C105	168-5632-78	16V 0.056μF	C203	183-4763-32	16V47μF	C402	043-0277-01	0.022μF
C106	168-5632-78	16V 0.056μF	C204	168-1042-78	16V 0.1μF	C403	042-0458-00	50V1μF
C107	183-4763-32	16V47μF	C226	168-4732-78	0.047μF	C404	166-1801-00	18pF CH
C108	183-3363-22	10V33μF	C227	168-1042-78	16V 0.1μF	C405	168-1022-05	1000pF
C109	168-1042-78	16V 0.1μF	C229	168-8232-78	0.082μF	C406	166-1801-00	18pF CH
C111	168-3322-05	3300pF	C301	168-1042-78	16V 0.1μF	C407	166-1011-00	100pF CH

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C408	168-1022-05	1000pF	C734	042-0562-20	16V47 μ F	Q101	125-9003-02	IMD3
C409	166-1011-00	100pF CH	C735	166-5601-00	56pF CH	Q102	125-2005-01	UN2211
C410	166-1011-00	100pF CH	C736	166-2201-00	22pF CH	Q103	125-2005-01	UN2211
C411	168-2232-05	0.022 μ F	C737	166-2201-00	22pF CH	Q104	100-1298-00	2SA1298
C412	166-1011-00	100pF CH	C738	166-5601-00	56pF CH	Q105	125-2005-01	UN2211
C413	183-4763-12	6.3V47 μ F	C739	168-2222-05	2200pF	Q106	100-1298-00	2SA1298
C414	166-1501-00	15pF CH	C740	168-2222-05	2200pF	Q401	102-2712-51	2SC2712G,L
C415	166-1801-00	18pF CH	C741	168-2222-05	2200pF	Q402	102-2712-51	2SC2712G,L
C501	183-4763-12	6.3V47 μ F(1702K)	C742	168-2222-05	2200pF	Q501	102-2712-00	2SC2712(1702K)
C502	168-1042-78	16V 0.1 μ F(1702K)	C743	042-0563-15	10V220 μ F	Q601	125-2005-01	UN2211
C503	168-5612-05	560pF(1702K)	C744	042-0563-15	10V220 μ F	Q602	102-2712-00	2SC2712
C504	168-1022-05	1000pF(1702K)	C745	042-0563-15	10V220 μ F	Q603	125-2005-01	UN2211
C506	166-4701-00	47pF CH(1702K)	C746	042-0563-15	10V220 μ F	Q604	125-0001-01	UN2111
C507	168-3312-05	330pF(1702K)	C747	168-2222-05	2200pF	Q605	125-9006-00	IMX1
C508	166-8201-50	82pF CH(1702K)	C748	172-1041-11	0.1 μ F	Q606	102-2712-00	2SC2712
C509	183-2253-62	50V2.2 μ F(1702K)	C749	042-0551-02	16V1000 μ F	Q607	125-0006-00	UN2110(1702K)
C510	168-1042-78	16V 0.1 μ F(1702K)	C750	183-1063-32	16V10 μ F	Q608	125-2005-01	UN2211(1702K)
C601	168-1022-05	1000pF	C751	183-1053-62	50V1 μ F	Q609	190-1052-03	2SA1052-C-TL
C602	168-2232-05	0.022 μ F	C752	172-1041-11	0.1 μ F	Q610	192-2462-03	2SC2462-C-TL
C603	168-1022-05	1000pF	C753	172-1041-11	0.1 μ F	Q701	125-2005-01	UN2211
C604	168-1022-05	1000pF	C754	168-1022-05	1000pF	Q702	103-2118-00	2SD2118
C605	168-1022-05	1000pF	C755	168-1042-78	16V 0.1 μ F(1702K)	Q703	103-1858-00	2SD1858
C606	168-1042-78	16V 0.1 μ F	C757	042-0562-36	50V1 μ F	Q704	125-9003-02	IMD3
C607	168-1042-78	16V 0.1 μ F	C758	042-0562-36	50V1 μ F	Q705	102-2712-00	2SC2712
C608	168-1022-05	1000pF	C759	168-1022-05	1000pF	Q706	125-2005-01	UN2211
C609	168-1022-05	1000pF	C760	168-2222-05	2200pF	Q707	100-1048-00	2SA1048
C610	168-1042-78	16V 0.1 μ F	C762	168-2222-05	2200pF	Q708	125-0001-01	UN2111
C611	168-1022-05	1000pF	D601	001-0421-38	MTZJ36	Q709	101-0709-00	2SB709A-Q.R.S
C612	168-1022-05	1000pF	D602	001-0528-44	MA8082-M	Q710	101-0709-00	2SB709A-Q.R.S
C613	166-2201-00	22pF CH	D603	001-0589-00	1SS145	Q711	103-1858-00	2SD1858
C614	168-1042-78	16V 0.1 μ F	D604	001-0589-00	1SS145	Q714	101-0709-00	2SB709A-Q.R.S
C615	183-1073-12	6.3V100 μ F	D606	001-0528-36	MA8062-H	Q715	125-2005-01	UN2211
C616	168-1022-05	1000pF	D607	001-0528-36	MA8062-H	Q716	100-1359-00	2SA1359
C617	166-1511-00	150pF CH	D701	001-0528-48	MA8091-H	Q717	125-2005-01	UN2211
C618	166-1801-00	18pF CH	D702	001-0356-00	1SS184	Q718	125-9003-02	IMD3
C619	168-1022-05	1000pF	D705	001-0626-00	1A2	Q719	125-9003-02	IMD3
C620	183-1053-62	50V1 μ F	D706	001-0516-00	MA111	R101	119-2221-10	1/16W 2.2k Ω
C621	166-1511-00	150pF CH	D707	001-2015-00	RL253	R102	119-4731-10	1/16W 47k Ω
C622	168-1042-78	16V 0.1 μ F	D708	001-0626-00	1A2	R103	119-3321-10	1/16W 3.3k Ω
C623	183-1063-32	16V10 μ F	D709	001-0503-31	HZS6 A2L	R105	119-1021-10	1/16W 1k Ω
C624	168-1022-05	1000pF	D710	001-0330-00	1SS119	R106	119-1021-10	1/16W 1k Ω
C626	168-1022-05	1000pF	D711	001-0330-00	1SS119	R107	119-2221-10	1/16W 2.2k Ω
C627	168-4712-05	470pF	FIL601	060-3113-93	22 μ H	R108	119-2221-10	1/16W 2.2k Ω
C631	168-4712-05	470pF	FIL602	060-3113-93	22 μ H	R109	119-1031-10	1/16W 10k Ω
C632	168-4712-05	470pF	IC401	051-6201-00	LC72146M	R110	119-1031-10	1/16W 10k Ω
C701	166-5096-00	5pF CH	IC501	051-1819-00	SAA6579T(1702K)	R111	119-2221-10	1/16W 2.2k Ω
C702	166-2201-00	22pF CH	IC601	051-7201-28	TC7W00FK	R112	119-1041-10	1/16W 100k Ω
C703	166-5096-00	5pF CH	IC602	051-7203-48	SN74LV74APW	R113	119-3311-10	1/16W 330 Ω
C704	166-2201-00	22pF CH	IC603	052-3160-01	MB90583CPFV-G-117	R201	119-1031-10	1/16W 10k Ω
C705	166-5096-00	5pF CH				R210	119-2221-10	1/16W 2.2k Ω
C706	166-5096-00	5pF CH	IC604	051-0869-55	NJM2103M	R211	119-2221-10	1/16W 2.2k Ω
C709	042-0562-17	16V10 μ F	IC605	051-6604-18	MSM6636BGS-AKR1	R401	119-2221-10	1/16W 2.2k Ω
C710	042-0562-17	16V10 μ F				R402	119-4721-10	1/16W 4.7k Ω
C711	042-0562-17	16V10 μ F	IC701	051-3020-90	NJM4565V	R403	119-2721-10	1/16W 2.7k Ω
C712	042-0562-17	16V10 μ F	IC702	051-7704-08	LC7821M-TLM	R404	119-2221-10	1/16W 2.2k Ω
C713	042-0562-20	16V47 μ F	IC703	051-3020-90	NJM4565V	R406	119-3321-10	1/16W 3.3k Ω
C714	042-0562-20	16V47 μ F	IC704	051-3020-90	NJM4565V	R407	119-3321-10	1/16W 3.3k Ω
C715	042-0548-02	10V220 μ F	IC705	051-1407-00	NJM4556AL	R408	119-4731-10	1/16W 47k Ω
C716	042-0548-03	16V100 μ F	IC707	051-1292-00	NJM4565M-D	R409	119-1031-10	1/16W 10k Ω
C717	168-1042-78	16V 0.1 μ F	IC708	051-1407-00	NJM4556AL	R501	119-2221-10	1/16W 2.2k Ω
C718	166-2201-00	22pF CH	J702	074-1284-00	12P			(1702K)
C719	166-2201-00	22pF CH	J703	074-0850-08	8P	R502	119-1021-10	1/16W 1k Ω (1702K)
C720	042-0548-03	16V100 μ F	L101	010-2230-76	22 μ H	R503	119-1021-10	1/16W 1k Ω (1702K)
C721	042-0562-20	16V47 μ F	L102	010-2230-76	22 μ H	R505	119-1031-10	1/16W 10k Ω (1702K)
C722	042-0562-20	16V47 μ F	L103	010-2230-64	2.2 μ H	R506	119-1031-10	1/16W 10k Ω (1702K)
C723	042-0562-17	16V10 μ F	L201	010-2003-04	COIL	R601	119-4721-10	1/16W 4.7k Ω
C724	042-0562-17	16V10 μ F	L202	010-2230-76	22 μ H	R602	119-5621-10	1/16W 5.6k Ω
C725	183-1053-62	50V1 μ F	L401	010-2230-88	220 μ H	R603	119-5621-10	1/16W 5.6k Ω
C727	042-0563-15	10V220 μ F	L501	010-2230-88	220 μ H(1702K)	R604	119-2231-10	1/16W 22k Ω
C728	166-5601-00	56pF CH	L602	010-2230-76	22 μ H	R605	119-5631-10	1/16W 56k Ω
C729	166-2201-00	22pF CH	L701	010-8028-00	520 μ H	R606	119-5631-10	1/16W 56k Ω
C731	183-4753-52	35V4.7 μ F	P403	076-0368-14	14P	R607	119-4731-10	1/16W 47k Ω
C732	166-2201-00	22pF CH	P701	076-0540-06	6P	R608	119-1031-10	1/16W 10k Ω
C733	166-5601-00	56pF CH	P702	076-0540-06	6P	R609	119-1031-10	1/16W 10k Ω

PN-1702K
PN-1709K

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R610	119-1021-10	1/16W 1kΩ	R695	119-2231-10	1/16W 22kΩ	R751	119-1021-10	1/16W 1kΩ
R611	119-4721-10	1/16W 4.7kΩ	R696	119-1001-10	1/16W 10Ω	R752	119-3331-10	1/16W 33kΩ
R612	119-5631-10	1/16W 56kΩ	R697	119-1041-10	1/16W 100kΩ	R753	119-1001-10	1/16W 10Ω
R613	119-1031-10	1/16W 10kΩ	R701	032-0106-64	1/10W 56kΩ±0.5%	R754	119-2231-10	1/16W 22kΩ
R614	119-1031-10	1/16W 10kΩ	R702	032-0106-64	1/10W 56kΩ±0.5%	R755	119-2231-10	1/16W 22kΩ
R615	119-1031-10	1/16W 10kΩ	R703	032-0106-64	1/10W 56kΩ±0.5%	R756	119-1831-10	1/16W 18kΩ
R616	119-1031-10	1/16W 10kΩ	R704	032-0106-64	1/10W 56kΩ±0.5%	R757	119-1041-10	1/16W 100kΩ
R617	119-1031-10	1/16W 10kΩ	R705	119-3931-10	1/16W 39kΩ	R760	119-2231-10	1/16W 22kΩ
R618	119-4731-10	1/16W 47kΩ	R706	119-1831-10	1/16W 18kΩ	R761	119-1001-10	1/16W 10Ω
R619	119-6821-15	1/16W 6.8kΩ (1702K)	R707	119-1241-10	1/16W 120kΩ	R765	119-4731-10	1/16W 47kΩ
R620	119-4731-10	1/16W 47kΩ	R708	119-1241-10	1/16W 120kΩ	R766	119-4731-10	1/16W 47kΩ
R621	119-4731-10	1/16W 47kΩ	R709	119-1241-10	1/16W 120kΩ	R767	119-1001-10	1/16W 10Ω
R622	050-0140-54	1/32W 1kΩ×4J	R710	119-1241-10	1/16W 120kΩ	R768	119-2231-10	1/16W 22kΩ
R623	119-4731-10	1/16W 47kΩ	R711	119-1831-10	1/16W 18kΩ	R769	119-2231-10	1/16W 22kΩ
R626	050-0140-54	1/32W 1kΩ×4J	R712	119-3931-10	1/16W 39kΩ	R770	119-1831-10	1/16W 18kΩ
R630	050-0140-54	1/32W 1kΩ×4J	R713	032-0106-65	1/10W 100kΩ±0.5%	R771	119-1041-10	1/16W 100kΩ
R633	119-3301-10	1/16W 33Ω	R714	032-0106-65	1/10W 100kΩ±0.5%	R772	119-4721-10	1/16W 4.7kΩ
R634	119-4731-10	1/16W 47kΩ	R715	032-0106-65	1/10W 100kΩ±0.5%	R773	119-2231-10	1/16W 22kΩ
R635	050-0140-54	1/32W 1kΩ×4J	R716	032-0106-65	1/10W 100kΩ±0.5%	R774	119-1001-10	1/16W 10Ω
R636	050-0140-54	1/32W 1kΩ×4J	R717	119-3011-15	1/16W 300Ω	R775	111-5691-91	1/4WS 5.6Ω
R637	119-4721-10	1/16W 4.7kΩ	R718	119-3011-15	1/16W 300Ω	R776	111-5691-91	1/4WS 5.6Ω
R644	050-0140-54	1/32W 1kΩ×4J	R721	119-1041-10	1/16W 100kΩ	R777	111-1221-91	1/4WS 1.2kΩ
R649	050-0140-54	1/32W 1kΩ×4J	R722	119-1041-10	1/16W 100kΩ	R778	111-1221-91	1/4WS 1.2kΩ
R650	119-1021-10	1/16W 1kΩ	R725	119-1041-10	1/16W 100kΩ	R779	111-4721-91	1/4WS 4.7kΩ
R651	050-0140-59	1/32W 33Ω×4J	R726	119-1041-10	1/16W 100kΩ	R780	111-1531-91	1/4WS 15kΩ
R655	050-0140-54	1/32W 1kΩ×4J	R727	119-1041-10	1/16W 100kΩ	R781	111-6801-91	1/4WS 68Ω
R660	119-3301-10	1/16W 33Ω	R728	119-1041-10	1/16W 100kΩ	R782	119-1031-10	1/16W 10kΩ(1702K)
R661	119-1021-10	1/16W 1kΩ	R729	119-4731-10	1/16W 47kΩ	R783	111-1531-91	1/4WS 15kΩ
R663	119-4731-10	1/16W 47kΩ	R730	119-4731-10	1/16W 47kΩ	R784	119-4731-10	1/16W 47kΩ
R664	119-4731-10	1/16W 47kΩ	R731	119-1041-10	1/16W 100kΩ	R785	111-8211-91	1/4WS 820Ω
R666	050-0140-54	1/32W 1kΩ×4J	R732	119-1041-10	1/16W 100kΩ	R786	111-8211-91	1/4WS 820Ω
R668	119-4731-10	1/16W 47kΩ	R733	119-2231-10	1/16W 22kΩ	R787	111-8211-91	1/4WS 820Ω
R670	119-4731-10	1/16W 47kΩ(1709K)	R736	119-8231-10	1/16W 82kΩ	R788	111-8211-91	1/4WS 820Ω
R671	119-4731-10	1/16W 47kΩ(1702K)	R737	119-8231-10	1/16W 82kΩ	R789	119-0000-00	1/16W 0Ω JW(1709K)
R673	050-0140-59	1/32W 33Ω×4J	R738	111-3311-91	1/4WS 330Ω	R790	119-5621-10	1/16W 5.6kΩ
R678	119-1041-10	1/16W 100kΩ	R739	119-1031-10	1/16W 10kΩ	R791	119-5621-10	1/16W 5.6kΩ
R680	050-0140-59	1/32W 33Ω×4J	R740	119-4721-10	1/16W 4.7kΩ	R792	111-1021-91	1/4WS 1kΩ
R681	119-1041-10	1/16W 100kΩ	R741	111-3301-91	1/4WS 33Ω	R793	119-0000-00	1/16W 0Ω JW(1702K)
R683	119-2231-10	1/16W 22kΩ	R742	119-5621-10	1/16W 5.6kΩ	SUP101	060-0122-20	DSP-141N-S00B
R684	119-1001-10	1/16W 10Ω	R743	119-5621-10	1/16W 5.6kΩ	SUP102	060-0122-20	DSP-141N-S00B
R685	119-1031-10	1/16W 10kΩ	R744	119-1031-10	1/16W 10kΩ	VR101	012-5203-59	47kΩ
R686	111-3321-91	1/4WS 3.3kΩ	R745	119-3321-10	1/16W 3.3kΩ	VR102	012-5203-56	10kΩ
R687	032-0092-90	1/10W 10kΩ±1%	R746	119-4731-10	1/16W 47kΩ	VR103	012-5203-59	47kΩ
R688	111-3321-91	1/4WS 3.3kΩ	R747	119-1031-10	1/16W 10kΩ	X401	061-1066-00	7.2MHz
R689	119-1031-10	1/16W 10kΩ	R748	119-4731-10	1/16W 47kΩ	X501	061-3013-00	4.33MHz(1702K)
R690	032-0092-01	1/10W 33kΩ±1%	R749	119-3331-10	1/16W 33kΩ	X601	060-1025-90	8.0MHz
R691	032-0092-28	1/10W 62kΩ±1%	R750	119-1021-10	1/16W 1kΩ	X602	060-1506-50	CSTCC4.00MG0H6
R692	111-1001-91	1/4WS 10Ω				X603	061-3506-90	10MHz
R693	111-1001-91	1/4WS 10Ω						
R694	032-0092-79	1/10W 5.6kΩ±1%						

Switch PWB section(B3)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
J901	074-1151-06	6P	P901	076-0526-03	3P	S901	013-3934-02	
J902	074-1151-06	6P	PL901	017-0420-31	14V 40mA			

Side PWB section(B4) : Tape mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	166-3311-09	330pF	C14	178-1042-78	0.1μF	CN3	076-0478-53	3P
C2	166-3311-09	330pF	C15	178-1042-78	0.1μF	CN4	076-0478-12	12P
C3	178-1232-78	0.012μF	C16	163-1063-30	16V10μF	D1	001-0528-43	MA8082-L
C4	176-3311-59	330pF	C17	168-4722-05	4700pF	D2	001-0419-25	MA3100
C5	178-1232-78	0.012μF	C18	168-1032-05	0.01μF	D3	001-0419-24	MA3091
C6	176-3311-59	330pF	C19	163-2253-60	50V2.2μF	D4	001-0517-00	1SS355
C7	178-4732-78	0.047μF	C20	178-1042-78	0.1μF	IC1	051-1919-00	HA12166F
C8	178-4732-78	0.047μF	C21	163-2263-30	16V22μF	IC2	051-1014-05	TA7291F
C9	163-1053-60	50V1μF	C22	178-1032-78	0.01μF	IC3	052-4010-00	μPD75006GB-748-3B4
C10	166-5611-09	560pF	C23	163-1063-30	16V10μF	L1	010-2174-28	220μH
C11	166-5611-09	560pF	C24	163-3363-21	10V33μF	Q1	100-1213-00	2SA1213
C12	178-1042-78	0.1μF	C25	178-1042-78	0.1μF	Q2	125-2027-05	DTC143ZU
C13	163-1073-31	16V100μF	CN2	074-1225-14	14P			

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
Q3	192-3072-00	2SC3072(B)-A,B,C	R15	119-3341-10	1/16W 330k Ω	R35	119-2231-10	1/16W 22k Ω
Q4	102-2859-15	2SC2859O	R16	119-1531-10	1/16W 15k Ω	R36	119-1841-10	1/16W 180k Ω
Q5	125-2027-01	DTC114EU	R17	117-0000-00	1/10W 0 Ω JW	R37	117-1241-10	1/10W 120k Ω
Q6	125-0021-91	DTA114EU	R18	117-1031-10	1/10W 10k Ω	R38	032-0104-72	1/4W 33 Ω
Q7	190-1242-00	2SA1242O,Y	R19	116-1031-10	1/8W 10k Ω	R39	117-5611-10	1/10W 560 Ω
Q8	125-2027-05	DTC143ZU	R20	117-1031-10	1/10W 10k Ω	R40	117-4731-10	1/10W 47k Ω
R1	119-1241-10	1/16W 120k Ω	R21	117-1031-10	1/10W 10k Ω	R41	116-4711-10	1/8W 470 Ω
R2	119-1241-10	1/16W 120k Ω	R22	032-0092-23	1/10W 18k $\Omega \pm 1\%$	R42	119-2211-10	1/16W 220 Ω
R3	117-1811-10	1/10W 180 Ω	R23	119-1831-10	1/16W 18k Ω	R43	119-1021-10	1/16W 1k Ω
R4	117-1131-10	1/10W 11k Ω	R24	117-2231-10	1/10W 22k Ω	R44	119-1051-10	1/16W 1M Ω
R5	117-1031-10	1/10W 10k Ω	R25	117-3331-10	1/10W 33k Ω	R45	032-0104-75	1/4W 4.7 Ω
R6	117-1241-10	1/10W 120k Ω	R26	117-4731-10	1/10W 47k Ω	R46	032-0104-75	1/4W 4.7 Ω
R7	119-3341-10	1/16W 330k Ω	R27	032-0104-55	1/4W 10 Ω	R47	032-0104-69	1/4W 1.5k Ω
R8	117-1811-10	1/10W 180 Ω	R28	032-0104-55	1/4W 10 Ω	R48	117-1031-10	1/10W 10k Ω
R9	119-1131-15	1/16W 11k Ω	R29	032-0104-55	1/4W 10 Ω	R49	117-1031-10	1/10W 10k Ω
R10	032-0104-03	1/4W 1k Ω	R30	032-0104-55	1/4W 10 Ω	VR1	012-5123-06	10k Ω
R11	119-1531-10	1/16W 15k Ω	R31	032-0104-76	1/4W 620 Ω	VR2	012-5123-06	10k Ω
R12	032-0104-67	1/4W 1.2k Ω	R32	119-2231-10	1/16W 22k Ω	X1	060-0322-00	4.0MHz
R13	032-0104-67	1/4W 1.2k Ω	R33	117-2231-10	1/10W 22k Ω			
R14	117-1241-10	1/10W 120k Ω	R34	119-2231-10	1/16W 22k Ω			

Bottom PWB section(B5) : Tape mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
IC2	051-1776-00	NJL5801K	SW2	013-3953-01	CRO2	SW3	013-3951-11	MODE

Rear PWB section(B6) : Tape mechanism

REF No.	PART No.	DESCRIPTION
SW1	013-3906-00	TAPE-DETECT