



PACKING

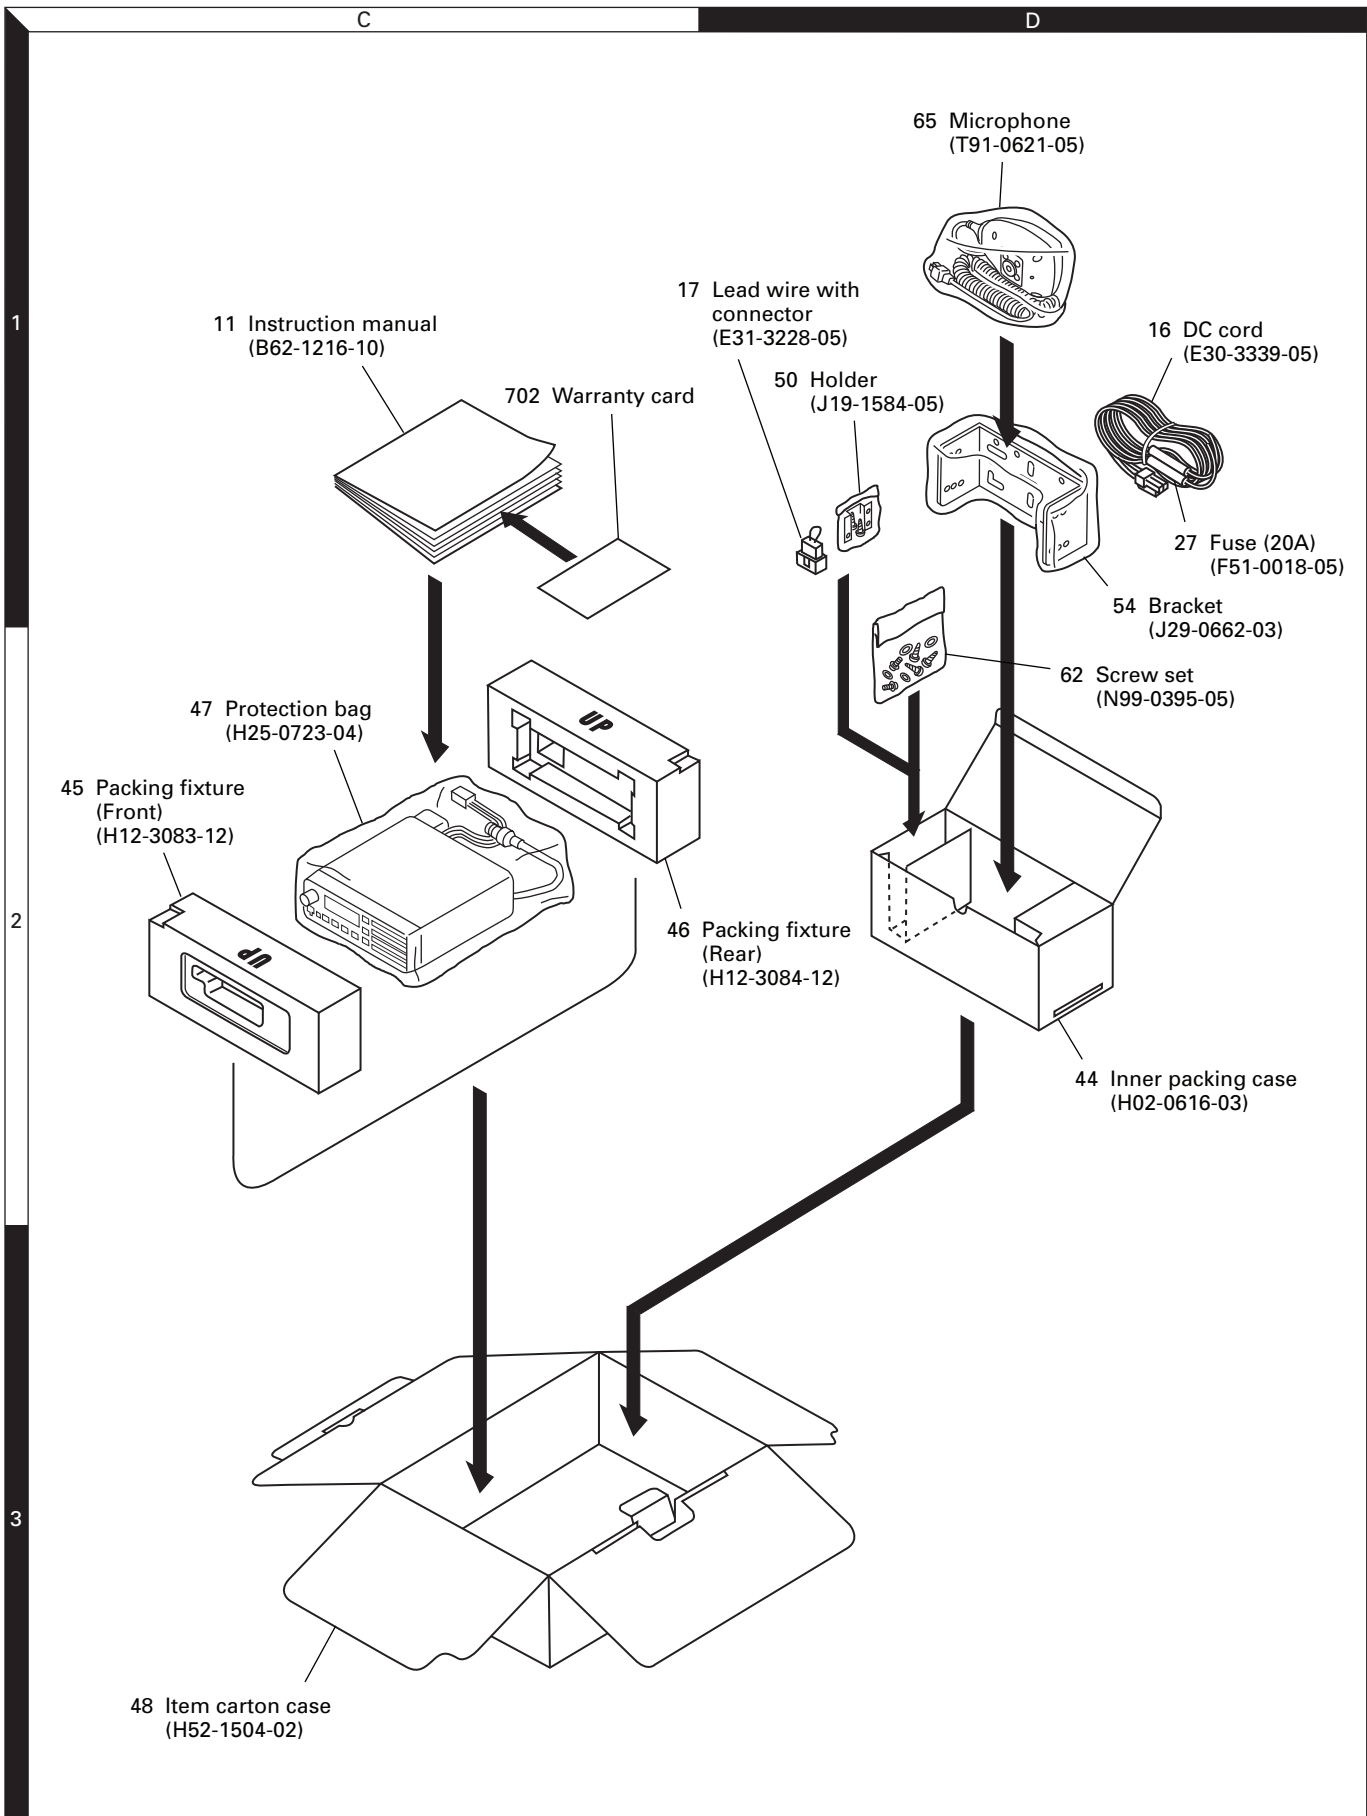

EXPLODED VIEW

The FFC (Flexible Flat Cable) could be inserted to the connector at an angle.
Make sure that the cable is inserted into the connector firmly to the end.

- | | | |
|---|-----------------------|---------------|
| A | M2.6 x 6 (OC) BLK | : N33-2606-45 |
| B | | : N67-3008-46 |
| C | M2.6 x 6 (Br-Tap) BLK | : N87-2606-45 |
| D | M2.6 x 6 (Br-Tap) | : N87-2606-46 |

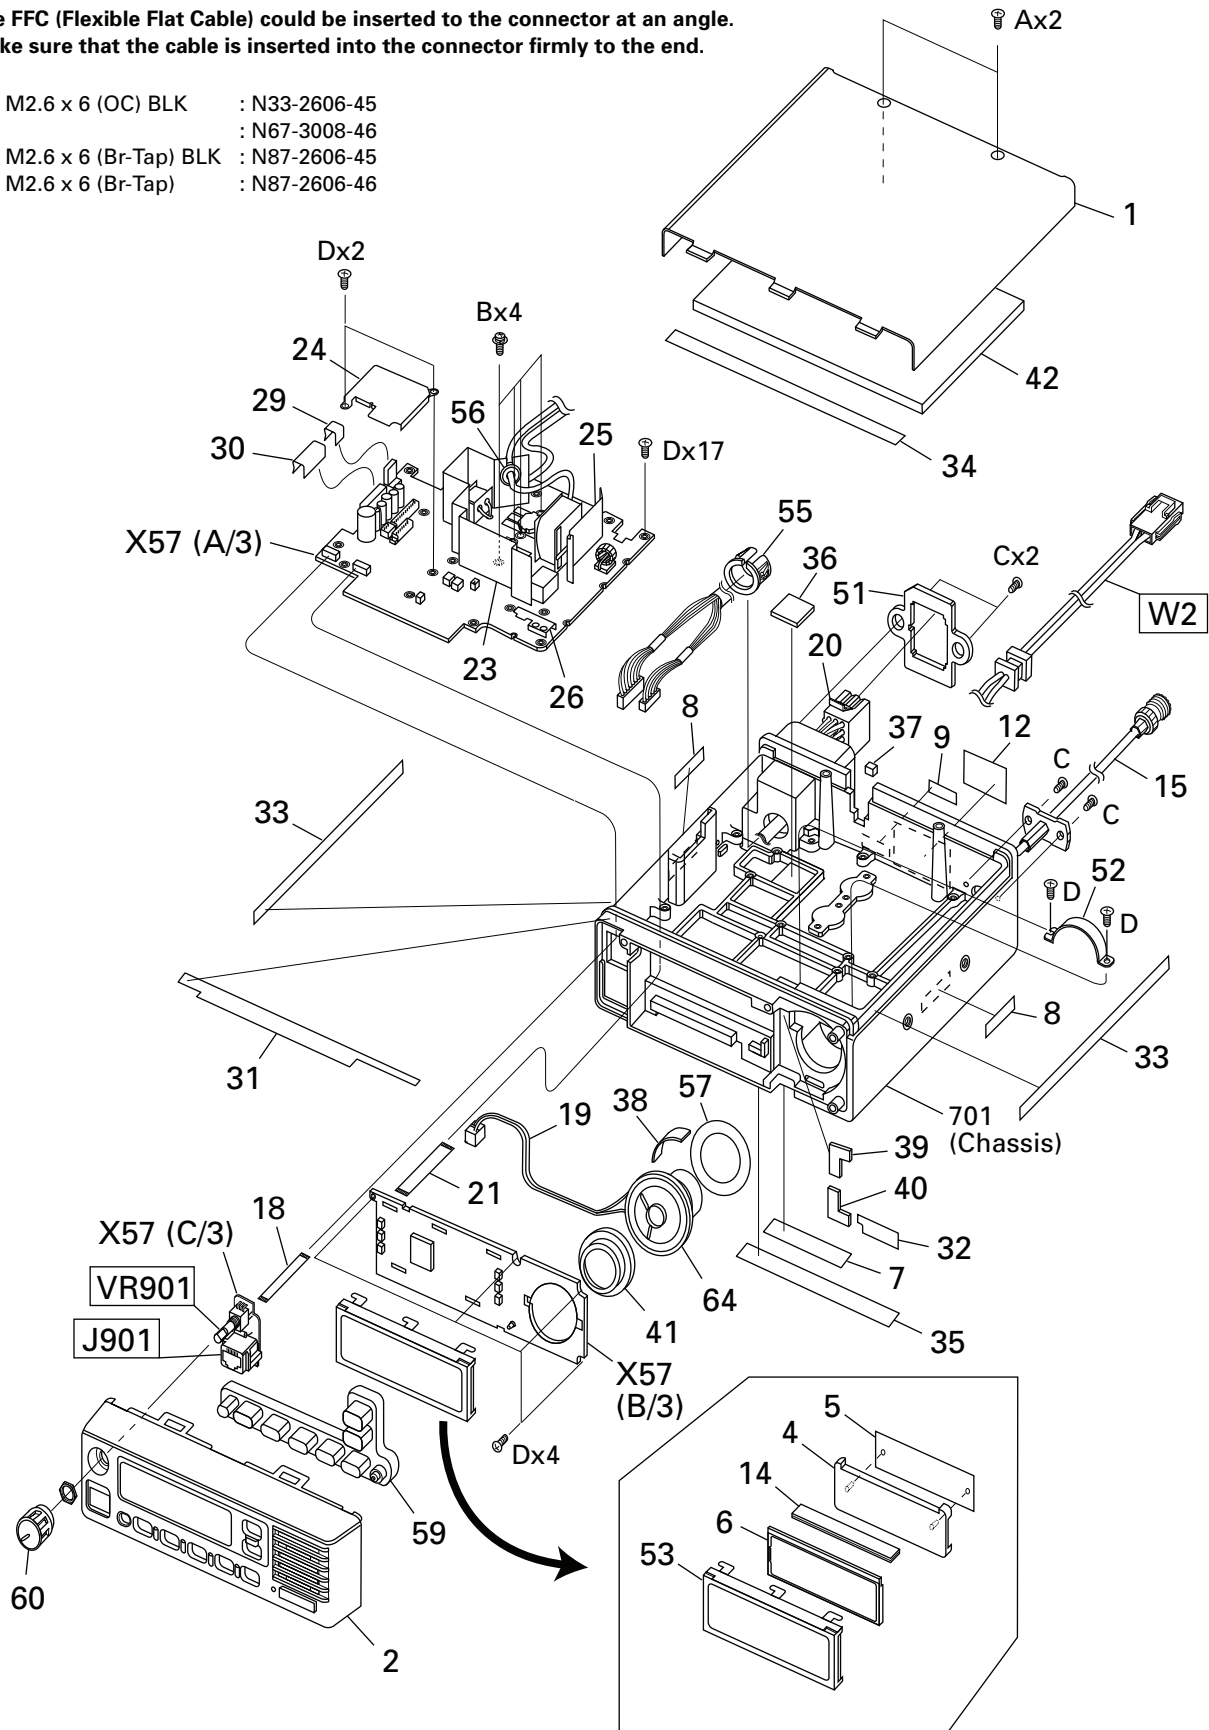

PARTS LIST

*New Parts. ⚠ indicates safety critical components.
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

L : Scandinavia **K** : USA
Y : PX (Far East, Hawaii) **T** : England
Y : AAFES (Europe) **X** : Australia **M** : Other Areas

TK-6110
TX-RX UNIT (X57-6100-XX)

Ref. No.	Address	New parts	Parts No.	Description	Desti-nation
TK-6110					
1	1B	*	A01-2170-03	CABINET	K K2
2	3A	*	A62-0761-13	PANEL ASSY	
4	3B		B11-1148-14	ILLUMINATION GUIDE (LCD)	
5	3B		B11-1149-04	FILTER (LCD)	
6	3B		B38-0800-05	LCD	
7	7B	*	B41-1837-04	CAUTION LABEL	
8	2B		B42-2455-04	STICKER (M4X8 MAX)	
9	2B		B42-5650-04	S/NO. LABEL	
11	1C	*	B62-1216-10	INSTRUCTION MANUAL ACSY	
12	2B	*	B72-1633-04	MODEL NAME PLATE	
12	2B	*	B72-1729-04	MODEL NAME PLATE	
14	3B	*	E29-1192-04	INTER CONNECTOR (LCD)	
15	2B		E30-2145-15	ANTENNA CABLE	
16	1D		E30-3339-05	DC CORD ACSY	
17	1D		E31-3228-05	LEAD WIRE WITH CONNECTOR ACSY	
18	3A	*	E37-0831-05	FLAT CABLE (MIC&VOL UNIT:13P)	
19	2A	*	E37-0833-15	LEAD WIRE WITH CONNECTOR (SP)	
20	2B	*	E37-0838-05	LEAD WIRE WITH CONNECTOR (15P)	
21	3A	*	E37-0899-05	FLAT CABLE (DISPLAY UNIT:17P)	
23	2A	*	F10-2326-13	SHIELDING PLATE (FINAL)	
24	1A	*	F10-2370-04	SHIELDING PLATE	
25	1A	*	F10-2380-04	SHIELDING PLATE (LPF)	
26	2A	*	F10-2386-04	SHIELDING PLATE (NB)	
27	1D		F51-0018-05	FUSE (6*30 20A) ACSY	
29	1A		G02-0715-04	FLAT SPRING (VOLTAGE REGULATOR:IC103)	
30	1A	*	G02-0861-04	FLAT SPRING (AUDIO POWER AMP:IC102)	
31	2A	*	G10-1242-04	FIBROUS SHEET (CHASSIS UPPER)	
32	3B	*	G10-1245-04	FIBROUS SHEET (CHASSIS SP)	
33	2A,2B	*	G10-1253-04	FIBROUS SHEET (CHASSIS SIDE)	
34	1B	*	G10-1270-04	FIBROUS SHEET (CASE)	
35	3B	*	G10-1271-04	FIBROUS SHEET (CHASSIS LOWER)	
36	2B	*	G11-2613-04	RUBBER SHEET	
37	2B		G13-1468-04	CUSHION (CHASSIS REAR)	
38	2B	*	G13-1752-04	CUSHION (SP)	
39	2B	*	G13-1788-04	CUSHION (CHASSIS SP UPPER)	
40	3B	*	G13-1799-04	CUSHION (CHASSIS SP LOWER)	
41	3B	*	G53-0893-03	PACKING (SP)	
42	1B	*	G53-1509-03	PACKING (CASE)	
44	2D	*	H02-0616-03	INNER PACKING CASE	K2 K
45	2C	*	H12-3083-12	PACKING FIXTURE (FRONT)	
46	2C	*	H12-3084-12	PACKING FIXTURE (REAR)	
47	2C		H25-0723-04	PROTECTION BAG (230X400:MAIN BODY)	
48	3C	*	H52-1504-02	ITEM CARTON CASE	K2 K
50	1D		J19-1584-05	HOLDER ACSY	
51	2B	*	J21-8387-04	HARDWARE FIXTURE (15P CONNECTOR)	
52	2B	*	J21-8388-04	HARDWARE FIXTURE (SP)	
53	3B	*	J21-8413-04	HARDWARE FIXTURE (LCD)	K2 K
54	1D	*	J29-0662-03	BRACKET ACSY	
55	1B	*	J42-0515-05	BUSHING (15P CONNECTOR)	
56	1A	*	J42-0702-05	BUSHING (W1)	
57	2B	*	J99-0356-04	ADHESIVE TAPE (SP)	K2 K
59	3A	*	K29-5388-02	KEY TOP	

Ref. No.	Address	New parts	Parts No.	Description	Desti-nation
60	3A	*	K29-5389-03	KNOB (VOL)	
A	1B		N33-2606-45	OVAL HEAD MACHINE SCREW (CASE)	
B	1A		N67-3008-46	PAN HEAD SEMS SCREW W (FINAL AMP)	
C	2B		N87-2606-45	BRAZIER HEAD TAPTITE SCREW (ANT,15P)	
D	1A,1B,2B		N87-2606-46	BRAZIER HEAD TAPTITE SCREW (PCB)	
62	2D		N99-0395-05	SCREW SET ACSY	
64	3B		T07-0265-05	SPEAKER	
65	1D		T91-0621-05	MICROPHONE ACSY	
TX-RX UNIT (X57-6100-XX) -10 : K -11 : K2					
D901			B30-2151-05	LED (RED/GREEN)	
D902-907			B30-2140-05	LED (Y/8)	
D908-911			B30-2050-05	LED	
C1			CK73GB1H103K	CHIP C 0.010UF K	
C3			CC73GCH1H270J	CHIP C 27PF J	K2
C3			CC73GCH1H470J	CHIP C 47PF J	K
C4			CK73GB1H103K	CHIP C 0.010UF K	
C5			CC73GCH1H101J	CHIP C 100PF J	K2
C6			CK73GB1H103K	CHIP C 0.010UF K	
C7			CK73GB1H102K	CHIP C 1000PF K	
C8			CK73GB1H103K	CHIP C 0.010UF K	
C9			CC73GCH1H101J	CHIP C 100PF J	K
C9			CC73GCH1H680J	CHIP C 68PF J	K2
C11			CC73GCH1H101J	CHIP C 100PF J	K
C11			CK73GB1H103K	CHIP C 0.010UF K	K2
C13			CK73GB1H472K	CHIP C 4700PF K	
C14			CK73GB1H103K	CHIP C 0.010UF K	
C15,16			CK73GB1H472K	CHIP C 4700PF K	
C17-19			CK73GB1H103K	CHIP C 0.010UF K	
C20			CC73GCH1H470J	CHIP C 47PF J	K2
C20			CC73GCH1H560J	CHIP C 56PF J	K
C21,22			CC73GCH1H101J	CHIP C 100PF J	K2
C21,22			CC73GCH1H121J	CHIP C 120PF J	K
C23			CC73GCH1H470J	CHIP C 47PF J	K2
C23			CC73GCH1H560J	CHIP C 56PF J	K
C24			CC73GCH1H390J	CHIP C 39PF J	K2
C24			CC73GCH1H680J	CHIP C 68PF J	K
C25			CK73GB1H103K	CHIP C 0.010UF K	
C28,29			CK73GB1H103K	CHIP C 0.010UF K	
C30		*	C93-0596-05	CHIP C 270PF K	K2
C30			C93-0600-05	CHIP C 560PF K	K
C31			CE04EW1E470M	ELECTRO 47UF 25WV	
C32			CK73GB1H103K	CHIP C 0.010UF K	
C33			CK73GB1H472K	CHIP C 4700PF K	
C34			CK73GB1H103K	CHIP C 0.010UF K	
C35			C92-0633-05	CHIP-TAN 22UF 10WV	
C36			CK73GB1H103K	CHIP C 0.010UF K	
C39,40		*	C93-0684-05	CERAMIC 6800PF K	
C45		*	C90-4085-05	ELECTRO 47UF 20WV	
C46			CK73FB1E104K	CHIP C 0.10UF K	
C47			CK73GB1H472K	CHIP C 4700PF K	
C48			CC73GCH1H101J	CHIP C 100PF J	

PARTS LIST

TX-RX UNIT (X57-6100-XX)

Ref. No.	Address	New parts	Parts No.	Description	Desti-nation	Ref. No.	Address	New parts	Parts No.	Description	Desti-nation
C49			CK73FB1E104K	CHIP C 0.10UF K		C111			CE04EW1E101M	ELECTRO 100UF 25WV	
C50			CK73GB1H103K	CHIP C 0.010UF K		C112			CE04EW1E470M	ELECTRO 47UF 25WV	
C51			CK73FB1E103K	CHIP C 0.010UF K		C113			C92-0560-05	CHIP-TAN 10UF 6.3WV	
C52			CK73GB1H103K	CHIP C 0.010UF K		C114,115			CK73FB1E224K	CHIP C 0.22UF K	
C54			CC73GCH1H020B	CHIP C 2.0PF B		C116,117			CK73GB1H102K	CHIP C 1000PF K	
C55			CC73GCH1H820J	CHIP C 82PF J		C118,119			CK73FB1E104K	CHIP C 0.10UF K	
C56			CK73GB1H103K	CHIP C 0.010UF K		C120			CE04EW1E470M	ELECTRO 47UF 25WV	
C58			CK73FB1E104K	CHIP C 0.10UF K		C121			CK73FF1C105Z	CHIP C 1.0UF Z	
C59-61			CK73GB1H103K	CHIP C 0.010UF K		C122			CK73GB1H471K	CHIP C 470PF K	
C62			CC73GCH1H680J	CHIP C 68PF J		C123-126			CK73GB1H103K	CHIP C 0.010UF K	
C63			CK73GB1H103K	CHIP C 0.010UF K		C128			CK73FF1C105Z	CHIP C 1.0UF Z	
C64			CC73GCH1H020B	CHIP C 2.0PF B		C129			CK73GB1H471K	CHIP C 470PF K	
C65,66			CC73GCH1H220J	CHIP C 22PF J	K2	C130			C92-0589-05	CHIP-TAN 47UF 6.3WV	
C65,66			CC73GCH1H390J	CHIP C 39PF J	K	C131			CK73GB1H102K	CHIP C 1000PF K	
C68,69			CK73GB1C473K	CHIP C 0.047UF K		C132,133			CK73GB1H103K	CHIP C 0.010UF K	
C70			CM73F2H470J	CHIP C 47PF J	K2	C134			CK73FB1E104K	CHIP C 0.10UF K	
C70			CM73F2H820J	CHIP C 82PF J	K	C135,136			C92-0560-05	CHIP-TAN 10UF 6.3WV	
C71			CM73F2H080D	CHIP C 8.0PF D	K	C137,138			CK73FB1E224K	CHIP C 0.22UF K	
C71			CM73F2H090D	CHIP C 9.0PF D	K2	C139			CK73GB1C104K	CHIP C 0.10UF K	
C72			CM73F2H101J	CHIP C 100PF J	K2	C140			CK73FB1E224K	CHIP C 0.22UF K	
C72			CM73F2H181J	CHIP C 180PF J	K	C141			CK73GB1C104K	CHIP C 0.10UF K	
C73			CK73GB1H103K	CHIP C 0.010UF K		C142			CK73GB1H471K	CHIP C 470PF K	
C75			CM73F2H180J	CHIP C 18PF J	K	C197,198			CM73F2H121J	CHIP C 120PF J	K
C75			CM73F2H220J	CHIP C 22PF J	K2	C196,199			CM73F2H181J	CHIP C 180PF J	K2
C76			CM73F2H470J	CHIP C 47PF J	K2	C196,199			CM73F2H330J	CHIP C 33PF J	K
C76,77			CM73F2H820J	CHIP C 82PF J	K	C197,198			CM73F2H331J	CHIP C 330PF J	K2
C77			CM73F2H390J	CHIP C 39PF J	K2	C203			CC73GCH1H101J	CHIP C 100PF J	
C78			CM73F2H510J	CHIP C 51PF J		C204			CC73GCH1H050C	CHIP C 5.0PF C	K2
C79			CM73F2H390J	CHIP C 39PF J	K2	C205			CC73GCH1H390J	CHIP C 39PF J	K
C79			CM73F2H820J	CHIP C 82PF J	K	C205			CC73GCH1H470J	CHIP C 47PF J	K2
C80			CK73GB1H103K	CHIP C 0.010UF K		C206			CK73GB1H103K	CHIP C 0.010UF K	
C81			CC73GCH1H470J	CHIP C 47PF J	K2	C208			CK73GB1H102K	CHIP C 1000PF K	
C81			CC73GCH1H560J	CHIP C 56PF J	K	C209			C92-0628-05	CHIP-TAN 10UF 10WV	
C82			CC73GCH1H101J	CHIP C 100PF J	K2	C210-212			CK73GB1H103K	CHIP C 0.010UF K	
C82			CC73GCH1H121J	CHIP C 120PF J	K	C213			CC73GCH1H050C	CHIP C 5.0PF C	K2
C83			CC73GCH1H470J	CHIP C 47PF J	K2	C214			CK73GB1H103K	CHIP C 0.010UF K	
C83			CC73GCH1H560J	CHIP C 56PF J	K	C215			CC73GCH1H390J	CHIP C 39PF J	K
C84,85			CC73GCH1H220J	CHIP C 22PF J	K2	C215			CC73GCH1H470J	CHIP C 47PF J	K2
C84,85			CC73GCH1H390J	CHIP C 39PF J	K	C217-219			CK73GB1H103K	CHIP C 0.010UF K	
C86			CC73GCH1H270J	CHIP C 27PF J	K2	C221			CC73GCH1H050C	CHIP C 5.0PF C	K2
C86			CC73GCH1H560J	CHIP C 56PF J	K	C222			CC73GCH1H101J	CHIP C 100PF J	
C87,88			CC73GCH1H220J	CHIP C 22PF J	K2	C225			CC73GCH1H270J	CHIP C 27PF J	
C87,88			CC73GCH1H390J	CHIP C 39PF J	K	C226			CK73GB1H102K	CHIP C 1000PF K	
C89			CC73GCH1H470J	CHIP C 47PF J	K2	C227			CC73GCH1H100D	CHIP C 10PF D	
C89			CC73GCH1H560J	CHIP C 56PF J	K	C228			CC73GCH1H180J	CHIP C 18PF J	
C90			CC73GCH1H101J	CHIP C 100PF J	K2	C229			CC73GCH1H040C	CHIP C 4.0PF C	
C90			CC73GCH1H121J	CHIP C 120PF J	K	C230			CC73GCH1H680J	CHIP C 68PF J	
C91			CC73GCH1H470J	CHIP C 47PF J	K2	C231,232			CK73GB1H103K	CHIP C 0.010UF K	
C91			CC73GCH1H560J	CHIP C 56PF J	K	C233			CK73GB1H471K	CHIP C 470PF K	
C92-96			CK73GB1H103K	CHIP C 0.010UF K		C235			CK73GB1H471K	CHIP C 470PF K	
C99			C93-0601-05	CHIP C 680PF K		C236-238			CK73GB1H102K	CHIP C 1000PF K	
C100			CM73F2H561J	CHIP C 560PF J		C239			CC73GCH1H030C	CHIP C 3.0PF C	
C101			CE04EW1E471M	ELECTRO 470UF 25WV		C240			CC73GCH1H180J	CHIP C 18PF J	
C102			CK73GB1H472K	CHIP C 4700PF K		C241			CK73GB1H102K	CHIP C 1000PF K	
C103			C92-0777-05	ELECTRO 1000UF 25WV		C242			CK73GB1C473K	CHIP C 0.047UF K	
C104			CE04NW1E4R7M	ELECTRO 4.7UF 25WV		C243			CK73GB1H102K	CHIP C 1000PF K	
C105,106			CK73FB1E104K	CHIP C 0.10UF K		C245			CC73GCH1H1R5B	CHIP C 1.5PF B	
C107			CK73FB1E224K	CHIP C 0.22UF K		C246			CK73GB1H102K	CHIP C 1000PF K	
C108			CE04EW1E470M	ELECTRO 47UF 25WV		C247,248			CK73GB1H103K	CHIP C 0.010UF K	
C109,110			CK73FB1E104K	CHIP C 0.10UF K		C249			CC73GCH1H010B	CHIP C 1.0PF B	

PARTS LIST

TX-RX UNIT (X57-6100-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
C250			CC73GCH1H020B	CHIP C 2.0PF B		C416			CK73GB1H102K	CHIP C 1000PF K	
C251			CC73GCH1H010B	CHIP C 1.0PF B		C417			CC73GCH1H221J	CHIP C 220PF J	
C252			CK73GB1H102K	CHIP C 1000PF K		C418			CC73GCH1H680J	CHIP C 68PF J	
C253			CK73GB1H103K	CHIP C 0.010UF K		C419-421			CK73GB1H103K	CHIP C 0.010UF K	
C255			CK73GB1H102K	CHIP C 1000PF K		C422			CC73GCH1H221J	CHIP C 220PF J	
C256			CK73GB1C104K	CHIP C 0.10UF K		C423			C92-0543-05	CHIP-TAN 3.3UF 10WV	
C257-259			CK73GB1H102K	CHIP C 1000PF K		C424			CK73GB1H102K	CHIP C 1000PF K	
C260			CC73GCH1H030C	CHIP C 3.0PF C		C425			CK73GB1H103K	CHIP C 0.010UF K	
C262			CK73GB1C104K	CHIP C 0.10UF K		C501			C92-0560-05	CHIP-TAN 10UF 6.3WV	
C263			CK73GB1H102K	CHIP C 1000PF K		C502			CC73GCH1H100D	CHIP C 10PF D	
C264			C92-0004-05	CHIP-TAN 1.0UF 16WV		C503			CK73GB1H103K	CHIP C 0.010UF K	
C266			CC73GCH1H270J	CHIP C 27PF J		C504,505			CK73GB1H102K	CHIP C 1000PF K	
C267,268			CK73GB1C104K	CHIP C 0.10UF K		C507			C92-0560-05	CHIP-TAN 10UF 6.3WV	
C269			CK73GB1H102K	CHIP C 1000PF K		C510			C92-0589-05	CHIP-TAN 47UF 6.3WV	
C270			CC73GCH1H221J	CHIP C 220PF J		C511,512			CK73GB1H103K	CHIP C 0.010UF K	
C271			CK73GB1H103K	CHIP C 0.010UF K		C513			CC73GCH1H100D	CHIP C 10PF D	
C272			CC73GCH1H221J	CHIP C 220PF J		C514			CK73GB1H102K	CHIP C 1000PF K	
C273			CK73GB1E223K	CHIP C 0.022UF K		C516			CC73GCH1H100D	CHIP C 10PF D	
C274			CK73GB1H472K	CHIP C 4700PF K		C517,518			CK73GB1H102K	CHIP C 1000PF K	
C275,276			CK73GB1H102K	CHIP C 1000PF K		C519			CK73GB1H103K	CHIP C 0.010UF K	
C277			CK73FB1H223K	CHIP C 0.022UF K		C521			CK73GB1H103K	CHIP C 0.010UF K	
C278			C92-0560-05	CHIP-TAN 10UF 6.3WV		C522			C92-0507-05	CHIP-TAN 4.7UF 6.3WV	
C279			CK73FB1C334K	CHIP C 0.33UF K		C523,524			CK73GB1H102K	CHIP C 1000PF K	
C280			CK73GB1H103K	CHIP C 0.010UF K		C525			CK73GB1H222K	CHIP C 2200PF K	
C281			C92-0560-05	CHIP-TAN 10UF 6.3WV		C526			CC73GCH1H101J	CHIP C 100PF J	
C282			CK73GB1H103K	CHIP C 0.010UF K		C527			C92-0507-05	CHIP-TAN 4.7UF 6.3WV	
C284			CC73GCH1H390J	CHIP C 39PF J	K	C528			CC73GCH1H120J	CHIP C 12PF J	
C284			CC73GCH1H470J	CHIP C 47PF J	K2	C529			CC73GCH1H470J	CHIP C 47PF J	
C285,286			CC73GCH1H150J	CHIP C 15PF J		C530			CK73GB1H102K	CHIP C 1000PF K	
C287			CC73GCH1H020B	CHIP C 2.0PF B		C531-533			CC73GCH1H101J	CHIP C 100PF J	
C288			CC73GCH1H150J	CHIP C 15PF J		C534,535			CK73GB1H102K	CHIP C 1000PF K	
C290			CC73GCH1H020B	CHIP C 2.0PF B		C536			CC73GCH1H101J	CHIP C 100PF J	
C291			CC73GCH1H101J	CHIP C 100PF J		C537			CK73GB1H102K	CHIP C 1000PF K	
C293			CC73GCH1H020B	CHIP C 2.0PF B		C538			CC73GCH1H180J	CHIP C 18PF J	
C294			CC73GCH1H150J	CHIP C 15PF J		C539			CK73GB1H103K	CHIP C 0.010UF K	
C296			CC73GCH1H020B	CHIP C 2.0PF B		C540			CK73GB1H102K	CHIP C 1000PF K	
C297			CC73GCH1H180J	CHIP C 18PF J		C541			CC73GCH1H101J	CHIP C 100PF J	
C299			CC73GCH1H020B	CHIP C 2.0PF B		C542			C92-0001-05	CHIP C 0.1UF 35WV	
C300			CC73GCH1H270J	CHIP C 27PF J		C543			C92-0560-05	CHIP-TAN 10UF 6.3WV	
C301			CC73GCH1H040C	CHIP C 4.0PF C		C544			C92-0004-05	CHIP-TAN 1.0UF 16WV	
C302			CC73GCH1H020B	CHIP C 2.0PF B		C545,546			C92-0589-05	CHIP-TAN 47UF 6.3WV	
C303			CC73GCH1H220J	CHIP C 22PF J		C547			CK73GB1C473K	CHIP C 0.047UF K	
C304			CC73GCH1H040C	CHIP C 4.0PF C		C548			CK73GB1H102K	CHIP C 1000PF K	K2
C305			CC73GCH1H020B	CHIP C 2.0PF B		C548,549			CK73GB1H102K	CHIP C 1000PF K	K
C306			CC73GCH1H330J	CHIP C 33PF J		C549			CC73GCH1H101J	CHIP C 100PF J	K2
C307,308			CK73GB1H102K	CHIP C 1000PF K		C550			CC73GCH1H070D	CHIP C 7.0PF D	K2
C309			CC73GCH1H010B	CHIP C 1.0PF B		C550			CC73GCH1H100D	CHIP C 10PF D	K
C401			C92-0543-05	CHIP-TAN 3.3UF 10WV		C551			C92-0004-05	CHIP-TAN 1.0UF 16WV	
C402			CC73GCH1H680J	CHIP C 68PF J		C552			CK73GB1H103K	CHIP C 0.010UF K	
C403			CK73GB1H103K	CHIP C 0.010UF K		C553			C92-0560-05	CHIP-TAN 10UF 6.3WV	
C404			CK73GB1C104K	CHIP C 0.10UF K		C554			CK73GB1H102K	CHIP C 1000PF K	
C405			C92-0543-05	CHIP-TAN 3.3UF 10WV		C555			CC73GCH1H060D	CHIP C 6.0PF D	
C406			CK73GB1H103K	CHIP C 0.010UF K		C557			CK73GB1H102K	CHIP C 1000PF K	
C407			CC73GCH1H220J	CHIP C 22PF J		C559			CC73GCH1H220J	CHIP C 22PF J	
C408			CC73GCH1H470J	CHIP C 47PF J		C560,561			CK73GB1H102K	CHIP C 1000PF K	
C409,410			CK73GB1H103K	CHIP C 0.010UF K		C564			CC73GCH1H180J	CHIP C 18PF J	
C411			CK73GB1H102K	CHIP C 1000PF K		C565			CC73GCH1H470J	CHIP C 47PF J	
C412,413			CK73GB1C104K	CHIP C 0.10UF K		C568			CK73GB1H102K	CHIP C 1000PF K	
C414			CK73GB1H103K	CHIP C 0.010UF K		C569			CC73GCH1H390J	CHIP C 39PF J	
C415			CC73GCH1H220J	CHIP C 22PF J		C570			CC73GCH1H220J	CHIP C 22PF J	

PARTS LIST

TX-RX UNIT (X57-6100-XX)

Ref. No.	Address	New parts	Parts No.	Description	Desti- nation	Ref. No.	Address	New parts	Parts No.	Description	Desti- nation
C571			CK73GB1H102K	CHIP C 1000PF K	K	C768			CK73GB1C333K	CHIP C 0.033UF K	
C573			CC73GCH1H090D	CHIP C 9.0PF D		C770			CC73GCH1H121J	CHIP C 120PF J	
C574			CC73GCH1H180J	CHIP C 18PF J		C771			CK73GB1H103K	CHIP C 0.010UF K	
C575,576			CK73GB1H102K	CHIP C 1000PF K		C772			CK73GB1C273K	CHIP C 0.027UF K	
C577			CC73GCH1H270J	CHIP C 27PF J		C773			CK73GB1H103K	CHIP C 0.010UF K	
C578			CC73GCH1H150J	CHIP C 15PF J		C774			CK73GB1H222K	CHIP C 2200PF K	
C579			CC73GCH1H070D	CHIP C 7.0PF D		C775			CC73GCH1H271J	CHIP C 270PF J	
C580			CC73GCH1H060D	CHIP C 6.0PF D		C776			CK73GB1H103K	CHIP C 0.010UF K	
C581			CC73GCH1H040C	CHIP C 4.0PF C		C777			CK73GB1H472K	CHIP C 4700PF K	
C582			CK73GB1H102K	CHIP C 1000PF K		C778			CK73GB1E123K	CHIP C 0.012UF K	
C583			CC73GCH1H270J	CHIP C 27PF J		C779			CK73GB1C683K	CHIP C 0.068UF K	
C584			CC73GCH1H150J	CHIP C 15PF J		C780			CK73GB1H103K	CHIP C 0.010UF K	
C585			CK73GB1H102K	CHIP C 1000PF K		C781			CC73GCH1H101J	CHIP C 100PF J	
C586			CC73GCH1H100D	CHIP C 10PF D		C782			C92-0003-05	CHIP-TAN 0.47UF 25WV	
C587			CC73GCH1H090D	CHIP C 9.0PF D		C783			CK73GB1H103K	CHIP C 0.010UF K	
C588-594			CK73GB1H102K	CHIP C 1000PF K		C784			CK73GB1C473K	CHIP C 0.047UF K	
C595			CC73GCH1H220J	CHIP C 22PF J		C785			CK73GB1C104K	CHIP C 0.10UF K	
C596			CK73GB1H103K	CHIP C 0.010UF K		C786-788			CK73GB1H103K	CHIP C 0.010UF K	
C598			CK73GB1H103K	CHIP C 0.010UF K		C789			C92-0507-05	CHIP-TAN 4.7UF 6.3WV	
C599			CC73GCH1H470J	CHIP C 47PF J		C791			CK73GB1C104K	CHIP C 0.10UF K	
C601			CK73GB1H102K	CHIP C 1000PF K		C792,793			CK73GB1H103K	CHIP C 0.010UF K	
C602			CK73FF1C105Z	CHIP C 1.0UF Z		C794			C92-0560-05	CHIP-TAN 10UF 6.3WV	
C603			CK73GB1H471K	CHIP C 470PF K		C795			CK73GB1C104K	CHIP C 0.10UF K	
C604			CK73GB1H103K	CHIP C 0.010UF K		C796			CC73GCH1H471J	CHIP C 470PF J	
C605			CK73GB1H222K	CHIP C 2200PF K		C797			CK73GB1H103K	CHIP C 0.010UF K	
C606			CK73FF1C105Z	CHIP C 1.0UF Z		C798			CK73GB1H102K	CHIP C 1000PF K	
C607			CK73GB1H222K	CHIP C 2200PF K		C800			CK73GB1H103K	CHIP C 0.010UF K	
C608			CK73GB1H471K	CHIP C 470PF K		C801			CK73GB1H122J	CHIP C 1200PF J	
C609			C92-0589-05	CHIP-TAN 47UF 6.3WV		C802			CK73GB1C104K	CHIP C 0.10UF K	
C610			CK73GB1H102K	CHIP C 1000PF K		C803-805			CK73GB1H103K	CHIP C 0.010UF K	
C611-639			CC73HCH1H101J	CHIP C 100PF J		C806,807			CK73GB1C104K	CHIP C 0.10UF K	
C640			CK73GB1H102K	CHIP C 1000PF K		C808			CK73GB1H103K	CHIP C 0.010UF K	
C641			C92-0560-05	CHIP-TAN 10UF 6.3WV		C809			CK73GB1C104K	CHIP C 0.10UF K	
C642			CK73GB1H102K	CHIP C 1000PF K		C810-812			CK73GB1H562J	CHIP C 5600PF J	
C643			CK73GB1C104K	CHIP C 0.10UF K		C813			CK73GB1H272J	CHIP C 2700PF J	
C703			CK73GB1C104K	CHIP C 0.10UF K		C814			CC73GCH1H470J	CHIP C 47PF J	
C704			C92-0560-05	CHIP-TAN 10UF 6.3WV		C815			CK73GB1C333K	CHIP C 0.033UF K	
C707			CC73GCH1H151J	CHIP C 150PF J		C816,817			CK73GB1H272J	CHIP C 2700PF J	
C711			CK73GB1C104K	CHIP C 0.10UF K		C818			CC73GCH1H090D	CHIP C 9.0PF D	
C715			CK73GB1C104K	CHIP C 0.10UF K		C819			C92-0560-05	CHIP-TAN 10UF 6.3WV	
C716			CK73GB1H471K	CHIP C 470PF K		C820			CC73GCH1H151J	CHIP C 150PF J	
C720			CK73GB1H103K	CHIP C 0.010UF K		C821			CC73GCH1H090D	CHIP C 9.0PF D	
C723			CK73GB1H103K	CHIP C 0.010UF K		C822			CK73GB1H122J	CHIP C 1200PF J	
C725,726			CC73GCH1H101J	CHIP C 100PF J		C823			CK73GB1H102K	CHIP C 1000PF K	
C728			CK73GB1H471K	CHIP C 470PF K		C824			C92-0560-05	CHIP-TAN 10UF 6.3WV	
C730,731			CC73GCH1H101J	CHIP C 100PF J		C825			CK73GB1C104K	CHIP C 0.10UF K	
C733			CK73GB1C104K	CHIP C 0.10UF K		C826			CC73GCH1H101J	CHIP C 100PF J	
C734,735			CC73GCH1H101J	CHIP C 100PF J		C827-830			CK73GB1C104K	CHIP C 0.10UF K	
C737			CK73GB1C104K	CHIP C 0.10UF K		C831			CK73GB1H103K	CHIP C 0.010UF K	
C738,739			CC73GCH1H101J	CHIP C 100PF J		C832			C92-0560-05	CHIP-TAN 10UF 6.3WV	
C741,742			CC73GCH1H101J	CHIP C 100PF J		C833			CK73GB1H472K	CHIP C 4700PF K	
C744,745			CC73GCH1H101J	CHIP C 100PF J		C834			CK73GB1H103K	CHIP C 0.010UF K	
C747,748			CC73GCH1H101J	CHIP C 100PF J		C836			CK73GB1H472K	CHIP C 4700PF K	
C750,751			CC73GCH1H101J	CHIP C 100PF J		C837			C92-0507-05	CHIP-TAN 4.7UF 6.3WV	
C753,754			CC73GCH1H101J	CHIP C 100PF J		C838			CK73GB1E153K	CHIP C 0.015UF K	
C756			CC73GCH1H101J	CHIP C 100PF J		C839			CC73GCH1H101J	CHIP C 100PF J	
C757			CK73GB1H102K	CHIP C 1000PF K		C840			CK73FB1H563K	CHIP C 0.056UF K	
C759			CC73GCH1H101J	CHIP C 100PF J		C841			C92-0507-05	CHIP-TAN 4.7UF 6.3WV	
C760			C92-0560-05	CHIP-TAN 10UF 6.3WV		C843			CK73GB1H102K	CHIP C 1000PF K	
C764-767			CK73GB1H102K	CHIP C 1000PF K		C844			CK73GB1H272K	CHIP C 2700PF K	

PARTS LIST

TX-RX UNIT (X57-6100-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
C845			CK73GB1C104K	CHIP C 0.10UF K		L216			L39-1272-05	TOROIDAL COIL	
C902,903			CK73GB1H102K	CHIP C 1000PF K		L217			L40-1885-92	SMALL FIXED INDUCTOR (180NH)	
C906			CK73GB1H102K	CHIP C 1000PF K		L218			L40-1295-34	SMALL FIXED INDUCTOR (1.2UH)	
C907			C92-0004-05	CHIP-TAN 1.0UF 16WV		L219			L34-4616-05	AIR-CORE COIL	
C908			CC73GCH1H101J	CHIP C 100PF J		L220			L40-1295-34	SMALL FIXED INDUCTOR (1.2UH)	
TC202			C05-0384-05	CERAMIC TRIMMER CAP (10PF)		L221			L40-2205-34	SMALL FIXED INDUCTOR (22UH)	
TC204			C05-0384-05	CERAMIC TRIMMER CAP (10PF)		L222	*		L34-4648-05	COIL	
CN1		*	E40-6053-05	FLAT CABLE CONNECTOR (17P)		L223			L34-4625-05	COIL	
CN2			E40-5737-05	PIN ASSY (8P)		L224	*		L34-4648-05	COIL	
CN3		*	E40-6050-05	FLAT CABLE CONNECTOR (13P)		L225			L34-4625-05	COIL	
CN4			E40-3242-05	PIN ASSY (7P)		L226,227			L40-1885-92	SMALL FIXED INDUCTOR (180NH)	
CN5			E40-3246-05	PIN ASSY (2P)		L228			L40-1585-92	SMALL FIXED INDUCTOR (150NH)	
CN201-204			E40-5538-05	PIN ASSY (2P)		L229-236			L34-4520-05	AIR-CORE COIL	
CN902		*	E40-6050-05	FLAT CABLE CONNECTOR (13P)		L237			L34-4530-05	COIL	
CN904		*	E40-6053-05	FLAT CABLE CONNECTOR (17P)		L401			L40-1005-34	SMALL FIXED INDUCTOR (10UH)	
J901	3A		E08-0877-05	MODULAR JACK		L402			L40-5695-34	SMALL FIXED INDUCTOR (5.6UH)	
W1		*	E37-0900-05	PROCESSED LEAD WIRE		L403			L40-1015-34	SMALL FIXED INDUCTOR (100UH)	
W2	2B		E30-3340-05	DC CORD		L404			L40-5695-34	SMALL FIXED INDUCTOR (5.6UH)	
F1			F53-0130-05	FUSE (3.0A)		L501,502			L92-0138-05	FERRITE CHIP	
F701			F53-0108-05	FUSE (1.8A)		L503			L40-4795-34	SMALL FIXED INDUCTOR (4.7UH)	
CF201			L72-0916-05	CERAMIC FILTER (455KHZ)		L504-510			L92-0138-05	FERRITE CHIP	
CF202			L72-0924-05	CERAMIC FILTER (455KHZ)		L511			L40-1285-92	SMALL FIXED INDUCTOR (120NH)	
L1			L40-4705-34	SMALL FIXED INDUCTOR (47UH)		L512			L40-2785-34	SMALL FIXED INDUCTOR (270NH)	
L2			L40-2285-34	SMALL FIXED INDUCTOR (220NH)	K2	L513			L92-0138-05	FERRITE CHIP	
L2			L40-3385-34	SMALL FIXED INDUCTOR (330NH)	K	L514			L40-5675-92	SMALL FIXED INDUCTOR (56NH)	
L3,4			L92-0148-05	FERRITE CHIP		L515			L92-0138-05	FERRITE CHIP	
L5			L40-1095-48	SMALL FIXED INDUCTOR (1UH)	K	L516			L40-2285-92	SMALL FIXED INDUCTOR (220NH)	
L5			L40-2285-48	SMALL FIXED INDUCTOR (220NH)	K2	L517			L78-0481-05	VCO	
L6-8			L40-1585-34	SMALL FIXED INDUCTOR (150NH)		L518			L40-2285-92	SMALL FIXED INDUCTOR (220NH)	
L9			L39-1439-05	TOROIDAL COIL		L519-522			L92-0138-05	FERRITE CHIP	
L10			L33-0666-05	CHOKE COIL		L523			L40-5675-92	SMALL FIXED INDUCTOR (56NH)	
L11		*	L39-1433-15	TOROIDAL COIL		L524			L40-4775-92	SMALL FIXED INDUCTOR (47NH)	
L12			L33-0625-15	TOROIDAL COIL		L525			L40-5675-92	SMALL FIXED INDUCTOR (56NH)	
L13		*	L39-1432-05	TOROIDAL COIL		L526			L40-4775-92	SMALL FIXED INDUCTOR (47NH)	
L14			L40-2205-34	SMALL FIXED INDUCTOR (22UH)		L527			L40-1285-92	SMALL FIXED INDUCTOR (120NH)	
L15			L39-1420-15	TOROIDAL COIL		L528			L40-4775-92	SMALL FIXED INDUCTOR (47NH)	
L16			L40-2205-34	SMALL FIXED INDUCTOR (22UH)		L529			L40-3975-92	SMALL FIXED INDUCTOR (39NH)	
L18			L34-1150-05	AIR-CORE COIL	K	L530			L40-8275-92	SMALL FIXED INDUCTOR (82NH)	
L18,19			L34-1151-05	AIR-CORE COIL	K2	L531,532			L40-1085-92	SMALL FIXED INDUCTOR (100NH)	
L19			L34-1241-05	AIR-CORE COIL	K	L533			L40-1285-92	SMALL FIXED INDUCTOR (120NH)	
L20			L34-1256-05	AIR-CORE COIL	K2	L534			L40-3375-92	SMALL FIXED INDUCTOR (33NH)	
L20			L34-1259-05	AIR-CORE COIL	K	L535			L40-8275-92	SMALL FIXED INDUCTOR (82NH)	
L21			L40-4785-34	SMALL FIXED INDUCTOR (470NH)		L536			L40-3375-92	SMALL FIXED INDUCTOR (33NH)	
L22,23			L40-1585-92	SMALL FIXED INDUCTOR (150NH)		L537			L40-1085-92	SMALL FIXED INDUCTOR (100NH)	
L24,25			L40-1585-34	SMALL FIXED INDUCTOR (150NH)		L538			L40-1585-92	SMALL FIXED INDUCTOR (150NH)	
L26			L40-6875-92	SMALL FIXED INDUCTOR (68NH)	K2	L602			L92-0138-05	FERRITE CHIP	
L202,203		*	L34-4639-05	COIL	K2	L604			L40-1005-34	SMALL FIXED INDUCTOR (10UH)	
L202,203		*	L34-4646-05	COIL	K	L701-703			L92-0138-05	FERRITE CHIP	
L204			L40-4775-92	SMALL FIXED INDUCTOR (47NH)		L704-706			L92-0140-05	FERRITE CHIP	
L205			L40-1005-34	SMALL FIXED INDUCTOR (10UH)		L901			L92-0138-05	FERRITE CHIP	
L206,207		*	L34-4639-05	COIL	K2	X501			L77-1832-05	VCXO (16.8MHZ)	
L206,207		*	L34-4646-05	COIL	K	X701			L77-1708-05	CRYSTAL RESONATOR (3.579545MHZ)	
L208			L40-6875-92	SMALL FIXED INDUCTOR (68NH)		XF201	*		L71-0560-05	MCF (128.55MHZ)	
L209,210			L40-8275-92	SMALL FIXED INDUCTOR (82NH)		CP601-609			R90-0741-05	MULTIPLE RESISTOR 1K X2	
L211			L40-1285-92	SMALL FIXED INDUCTOR (120NH)		CP610-624			R90-0740-05	MULTIPLE RESISTOR 100 X2	
L212			L40-2785-92	SMALL FIXED INDUCTOR (270NH)		CP625			R90-0743-05	MULTIPLE RESISTOR 47K X2	
L213,214			L39-1272-05	TOROIDAL COIL		CP626,627			R90-0741-05	MULTIPLE RESISTOR 1K X2	
L215			L92-0138-05	FERRITE CHIP		R1			RK73GB1J333J	CHIP R 33K J 1/16W	K2
						R1			RK73GB1J473J	CHIP R 47K J 1/16W	K

PARTS LIST

TX-RX UNIT (X57-6100-XX)

Ref. No.	Address	New parts	Parts No.	Description	Desti-nation	Ref. No.	Address	New parts	Parts No.	Description	Desti-nation
R2			RK73GB1J471J	CHIP R 470 J 1/16W		R118			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R3			RK73GB1J100J	CHIP R 10 J 1/16W		R119-121			RK73GB1J473J	CHIP R 47K J 1/16W	
R4			RK73GB1J122J	CHIP R 1.2K J 1/16W		R123			RK73GB1J152J	CHIP R 1.5K J 1/16W	
R5			RK73GB1J220J	CHIP R 22 J 1/16W		R124,125			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R6			RK73GB1J181J	CHIP R 180 J 1/16W		R127			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R8			RK73GB1J100J	CHIP R 10 J 1/16W	K2	R128			RK73GB1J104J	CHIP R 100K J 1/16W	
R8			R92-1252-05	CHIP R 0 OHM	K	R129-132			RK73GB1J103J	CHIP R 10K J 1/16W	
R10			RK73GB1J560J	CHIP R 56 J 1/16W		R133			RK73GB1J100J	CHIP R 10 J 1/16W	
R11			RK73GB1J123J	CHIP R 12K J 1/16W	K2	R134			RK73GB1J473J	CHIP R 47K J 1/16W	
R11			RK73GB1J183J	CHIP R 18K J 1/16W	K	R135			RK73GB1J103J	CHIP R 10K J 1/16W	
R12			RK73GB1J683J	CHIP R 68K J 1/16W		R136			RK73GB1J394J	CHIP R 390K J 1/16W	
R13			RK73GB1J223J	CHIP R 22K J 1/16W		R137			RK73GB1J104J	CHIP R 100K J 1/16W	
R14			RK73GB1J472J	CHIP R 4.7K J 1/16W		R138,139			RK73GB1J394J	CHIP R 390K J 1/16W	
R15-18			RK73FB2A101J	CHIP R 100 J 1/10W		R140,141			RK73GB1J104J	CHIP R 100K J 1/16W	
R19-22			R92-1264-05	CHIP R 5.6 J 1W		R142			RK73GB1J473J	CHIP R 47K J 1/16W	
R23,24			RS14DB3F101J	FL-PROOF RS 100 J 3W		R143,144			RK73GB1J103J	CHIP R 10K J 1/16W	
R25			RK73GB1J104J	CHIP R 100K J 1/16W		R145			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R26			RK73GB1J123J	CHIP R 12K J 1/16W		R201			RK73GB1J473J	CHIP R 47K J 1/16W	
R27			RK73GB1J105J	CHIP R 1.0M J 1/16W		R202,203			RK73GB1J103J	CHIP R 10K J 1/16W	
R28			RK73GB1J330J	CHIP R 33 J 1/16W		R204			RK73GB1J393J	CHIP R 39K J 1/16W	
R29			RK73GB1J103J	CHIP R 10K J 1/16W		R205			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R30,31			RK73GB1J270J	CHIP R 27 J 1/16W		R206-208			RK73GB1J103J	CHIP R 10K J 1/16W	
R32			RK73GB1J220J	CHIP R 22 J 1/16W		R211			RK73GB1J560J	CHIP R 56 J 1/16W	
R33			RK73GB1J183J	CHIP R 18K J 1/16W		R212			RK73GB1J330J	CHIP R 33 J 1/16W	
R35			RK73GB1J223J	CHIP R 22K J 1/16W		R215			R92-1252-05	CHIP R 0 OHM	
R36			RK73GB1J473J	CHIP R 47K J 1/16W		R216			RK73GB1J103J	CHIP R 10K J 1/16W	
R37			R92-1252-05	CHIP R 0 OHM		R218			R92-1252-05	CHIP R 0 OHM	
R38			RK73GB1J471J	CHIP R 470 J 1/16W		R221			R92-1252-05	CHIP R 0 OHM	
R39			RK73GB1J102J	CHIP R 1.0K J 1/16W		R223			R92-1252-05	CHIP R 0 OHM	
R42			R92-1252-05	CHIP R 0 OHM		R225			R92-1252-05	CHIP R 0 OHM	
R44,45			R92-1252-05	CHIP R 0 OHM		R226			RK73GB1J151J	CHIP R 150 J 1/16W	
R46			RK73GB1J153J	CHIP R 15K J 1/16W		R227			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R47			R92-1252-05	CHIP R 0 OHM		R228			RK73GB1J101J	CHIP R 100 J 1/16W	
R48			RK73GB1J103J	CHIP R 10K J 1/16W		R229			R92-1252-05	CHIP R 0 OHM	
R49			RK73GB1J472J	CHIP R 4.7K J 1/16W		R230			RK73GB1J680J	CHIP R 68 J 1/16W	
R50			RK73GB1J104J	CHIP R 100K J 1/16W		R231			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R52			R92-1252-05	CHIP R 0 OHM		R232			RK73GB1J104J	CHIP R 100K J 1/16W	
R53			RK73GB1J681J	CHIP R 680 J 1/16W		R233			R92-1252-05	CHIP R 0 OHM	
R54			RK73GB1J391J	CHIP R 390 J 1/16W		R234			RK73GB1J103J	CHIP R 10K J 1/16W	
R55			RK73GB1J104J	CHIP R 100K J 1/16W		R235			RK73GB1J822J	CHIP R 8.2K J 1/16W	
R56-59			RK73GB1J562J	CHIP R 5.6K J 1/16W		R236			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R60			RK73GB1J153J	CHIP R 15K J 1/16W		R237,238			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R61			RK73GB1J103J	CHIP R 10K J 1/16W		R239,240			RK73GB1J103J	CHIP R 10K J 1/16W	
R62			RK73GB1J473J	CHIP R 47K J 1/16W		R241			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R63			RK73GB1J152J	CHIP R 1.5K J 1/16W		R242			RK73GB1J100J	CHIP R 10 J 1/16W	
R101			RS14DB3D2R2J	FL-PROOF RS 2.2 J 2W		R243,244			R92-1252-05	CHIP R 0 OHM	
R102			RK73GB1J102J	CHIP R 1.0K J 1/16W		R245			RK73GB1J100J	CHIP R 10 J 1/16W	
R103			RK73GB1J104J	CHIP R 100K J 1/16W		R246			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R104			RK73GB1J473J	CHIP R 47K J 1/16W		R249			R92-1252-05	CHIP R 0 OHM	
R105			RK73GB1J104J	CHIP R 100K J 1/16W		R251			RK73GB1J223J	CHIP R 22K J 1/16W	
R106			RK73GB1J102J	CHIP R 1.0K J 1/16W		R252			RK73GB1J274J	CHIP R 270K J 1/16W	
R107			RK73GB1J473J	CHIP R 47K J 1/16W		R253			RK73GB1J334J	CHIP R 330K J 1/16W	
R108			RK73GB1J333J	CHIP R 33K J 1/16W		R254			R92-1252-05	CHIP R 0 OHM	
R109			RK73GB1J103J	CHIP R 10K J 1/16W		R255			RK73GB1J182J	CHIP R 1.8K J 1/16W	
R110			R92-0670-05	CHIP R 0 OHM		R256			RK73GB1J332J	CHIP R 3.3K J 1/16W	
R111			RK73GB1J103J	CHIP R 10K J 1/16W		R257			RK73GB1J153J	CHIP R 15K J 1/16W	
R112			RK73GB1J471J	CHIP R 470 J 1/16W		R258,259			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R113			RK73GB1J104J	CHIP R 100K J 1/16W		R260			RK73GB1J223J	CHIP R 22K J 1/16W	
R114			RK73GB1J333J	CHIP R 33K J 1/16W		R261			RK73GB1J474J	CHIP R 470K J 1/16W	
R115-117			RK73GB1J473J	CHIP R 47K J 1/16W		R262			RK73GB1J104J	CHIP R 100K J 1/16W	

PARTS LIST

TX-RX UNIT (X57-6100-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
R263			RK73GB1J823J	CHIP R 82K J 1/16W		R524			R92-1252-05	CHIP R 0 OHM	K2
R264			RK73GB1J104J	CHIP R 100K J 1/16W		R525			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R265			R92-1252-05	CHIP R 0 OHM		R526			RK73GB1J182J	CHIP R 1.8K J 1/16W	
R266			RK73GB1J271J	CHIP R 270 J 1/16W		R527			R92-1252-05	CHIP R 0 OHM	
R267			RK73GB1J180J	CHIP R 18 J 1/16W		R528			RK73GB1J154J	CHIP R 150K J 1/16W	
R268			RK73GB1J271J	CHIP R 270 J 1/16W		R529			RK73GB1J104J	CHIP R 100K J 1/16W	K
R269			RK73GB1J563J	CHIP R 56K J 1/16W		R529			RK73GB1J124J	CHIP R 120K J 1/16W	K2
R270			R92-1252-05	CHIP R 0 OHM		R530,531			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R401			R92-1252-05	CHIP R 0 OHM		R532			RK73GB1J104J	CHIP R 100K J 1/16W	
R402			RK73GB1J104J	CHIP R 100K J 1/16W		R533,534			RK73GB1J223J	CHIP R 22K J 1/16W	
R403			RK73GB1J333J	CHIP R 33K J 1/16W		R535			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R404			RK73GB1J104J	CHIP R 100K J 1/16W		R536			RK73GB1J223J	CHIP R 22K J 1/16W	
R405			RK73GB1J823J	CHIP R 82K J 1/16W		R537			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R406			RK73GB1J103J	CHIP R 10K J 1/16W		R538			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R407			RK73GB1J102J	CHIP R 1.0K J 1/16W		R539			RK73GB1J560J	CHIP R 56 J 1/16W	
R408			RK73GB1J101J	CHIP R 100 J 1/16W		R541			RK73GB1J331J	CHIP R 330 J 1/16W	K
R409			RK73GB1J471J	CHIP R 470 J 1/16W		R541			RK73GB1J391J	CHIP R 390 J 1/16W	K2
R410			RK73GB1J330J	CHIP R 33 J 1/16W		R542-545			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R411			RK73GB1J563J	CHIP R 56K J 1/16W		R546			R92-1252-05	CHIP R 0 OHM	
R412			RK73GB1J684J	CHIP R 680K J 1/16W		R547			RK73GB1J101J	CHIP R 100 J 1/16W	
R413			RK73GB1J104J	CHIP R 100K J 1/16W		R548			RK73GB1J561J	CHIP R 560 J 1/16W	
R414			RK73GB1J102J	CHIP R 1.0K J 1/16W		R549			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R415			RK73GB1J223J	CHIP R 22K J 1/16W		R550			RK73GB1J224J	CHIP R 220K J 1/16W	
R416			RK73GB1J562J	CHIP R 5.6K J 1/16W		R552			RK73GB1J331J	CHIP R 330 J 1/16W	
R417			RK73GB1J103J	CHIP R 10K J 1/16W		R553			RK73GB1J223J	CHIP R 22K J 1/16W	
R418			RK73GB1J562J	CHIP R 5.6K J 1/16W		R555			RK73GB1J470J	CHIP R 47 J 1/16W	
R419			RK73GB1J273J	CHIP R 27K J 1/16W		R556,557			RK73GB1J100J	CHIP R 10 J 1/16W	
R420			RK73GB1J102J	CHIP R 1.0K J 1/16W		R558			RK73GB1J473J	CHIP R 47K J 1/16W	
R421			RK73GB1J334J	CHIP R 330K J 1/16W		R559			RK73GB1J334J	CHIP R 330K J 1/16W	
R422			RK73GB1J104J	CHIP R 100K J 1/16W		R560			RK73GB1J470J	CHIP R 47 J 1/16W	
R423			RK73GB1J684J	CHIP R 680K J 1/16W		R561			R92-1252-05	CHIP R 0 OHM	
R424			RK73GB1J222J	CHIP R 2.2K J 1/16W		R562,563			RK73GB1J470J	CHIP R 47 J 1/16W	
R425			RK73GB1J103J	CHIP R 10K J 1/16W		R564			RK73GB1J101J	CHIP R 100 J 1/16W	
R426			RK73GB1J223J	CHIP R 22K J 1/16W		R565,566			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R427			RK73GB1J101J	CHIP R 100 J 1/16W		R567			R92-1252-05	CHIP R 0 OHM	
R428			RK73GB1J102J	CHIP R 1.0K J 1/16W		R570			R92-1252-05	CHIP R 0 OHM	
R429			RK73GB1J103J	CHIP R 10K J 1/16W		R572			RK73GB1J101J	CHIP R 100 J 1/16W	K
R430			RK73GB1J101J	CHIP R 100 J 1/16W		R572			R92-1252-05	CHIP R 0 OHM	K2
R431			RK73GB1J473J	CHIP R 47K J 1/16W		R601			RK73GB1J103J	CHIP R 10K J 1/16W	
R432,433			RK73GB1J102J	CHIP R 1.0K J 1/16W		R602			RK73GB1J474J	CHIP R 470K J 1/16W	
R434			RK73GB1J151J	CHIP R 150 J 1/16W		R603			RK73GB1J473J	CHIP R 47K J 1/16W	
R503			RK73GB1J473J	CHIP R 47K J 1/16W		R604			RK73GB1J103J	CHIP R 10K J 1/16W	
R504			RK73GB1J220J	CHIP R 22 J 1/16W		R605			RK73GB1J473J	CHIP R 47K J 1/16W	
R505			R92-1252-05	CHIP R 0 OHM		R606			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R506			RK73GB1J392J	CHIP R 3.9K J 1/16W		R607			RK73GB1J100J	CHIP R 10 J 1/16W	
R507			R92-1252-05	CHIP R 0 OHM		R608			RK73GB1J473J	CHIP R 47K J 1/16W	
R511			RK73GB1J560J	CHIP R 56 J 1/16W		R609			RK73GB1J103J	CHIP R 10K J 1/16W	
R512			RK73GB1J103J	CHIP R 10K J 1/16W		R610			RK73GB1J100J	CHIP R 10 J 1/16W	
R513,514			RK73GB1J100J	CHIP R 10 J 1/16W		R611-617			RK73GB1J473J	CHIP R 47K J 1/16W	
R515			RK73GB1J102J	CHIP R 1.0K J 1/16W		R618			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R516,517			RK73GB1J100J	CHIP R 10 J 1/16W		R619			RK73GB1J473J	CHIP R 47K J 1/16W	
R518			RK73GB1J102J	CHIP R 1.0K J 1/16W		R620			R92-1252-05	CHIP R 0 OHM	
R519			RK73GB1J103J	CHIP R 10K J 1/16W		R621			RK73GB1J103J	CHIP R 10K J 1/16W	
R520			RK73GB1J471J	CHIP R 470 J 1/16W		R622			RK73GB1J473J	CHIP R 47K J 1/16W	
R521			R92-1252-05	CHIP R 0 OHM	K2	R623-627			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R521,522			R92-1252-05	CHIP R 0 OHM	K	R628			RK73GB1J473J	CHIP R 47K J 1/16W	
R522			RK73GB1J100J	CHIP R 10 J 1/16W	K2	R629			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R523			RK73GB1J101J	CHIP R 100 J 1/16W	K2	R630,631			RK73GB1J473J	CHIP R 47K J 1/16W	
R523			RK73GB1J331J	CHIP R 330 J 1/16W	K	R632			R92-1252-05	CHIP R 0 OHM	
R524			RK73GB1J100J	CHIP R 10 J 1/16W	K	R634,635			R92-1252-05	CHIP R 0 OHM	

PARTS LIST

TX-RX UNIT (X57-6100-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
R637,638			R92-1252-05	CHIP R 0 OHM		R780			RK73GB1J104J	CHIP R 100K J 1/16W	
R700			RK73GB1J393J	CHIP R 39K J 1/16W		R781			RN73GH1J682D	CHIP R 6.8K D 1/16W	
R701-705			RK73GB1J102J	CHIP R 1.0K J 1/16W		R782			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R706			R92-1252-05	CHIP R 0 OHM		R783			RK73GB1J155J	CHIP R 1.5M J 1/16W	
R707			RK73GB1J104J	CHIP R 100K J 1/16W		R784,785			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R708			R92-0670-05	CHIP R 0 OHM		R786			RN73GH1J683D	CHIP R 68K D 1/16W	
R710			R92-1252-05	CHIP R 0 OHM		R787			RK73GB1J474J	CHIP R 470K J 1/16W	
R711			RK73GB1J473J	CHIP R 47K J 1/16W		R788			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R712			RK73GB1J104J	CHIP R 100K J 1/16W		R789			RN73GH1J682D	CHIP R 6.8K D 1/16W	
R713			RK73GB1J473J	CHIP R 47K J 1/16W		R790			RK73GB1J101J	CHIP R 100 J 1/16W	
R714			RK73GB1J104J	CHIP R 100K J 1/16W		R791,792			RK73GB1J104J	CHIP R 100K J 1/16W	
R715-720			RK73GB1J473J	CHIP R 47K J 1/16W		R793			RK73GB1J224J	CHIP R 220K J 1/16W	
R722			R92-0670-05	CHIP R 0 OHM		R794			RK73GB1J103J	CHIP R 10K J 1/16W	
R723			RK73GB1J473J	CHIP R 47K J 1/16W		R795			RK73GB1J223J	CHIP R 22K J 1/16W	
R725			R92-0670-05	CHIP R 0 OHM		R797			RK73GB1J104J	CHIP R 100K J 1/16W	
R726-728			RK73GB1J473J	CHIP R 47K J 1/16W		R798			RK73GB1J224J	CHIP R 220K J 1/16W	
R729			RK73GB1J154J	CHIP R 150K J 1/16W		R799			RK73GB1J393J	CHIP R 39K J 1/16W	
R730,731			RK73GB1J334J	CHIP R 330K J 1/16W		R800			RK73GB1J563J	CHIP R 56K J 1/16W	
R732,733			R92-1252-05	CHIP R 0 OHM		R801			RK73GB1J473J	CHIP R 47K J 1/16W	
R734,735			RK73GB1J103J	CHIP R 10K J 1/16W		R802			RK73GB1J394J	CHIP R 390K J 1/16W	
R737			R92-1252-05	CHIP R 0 OHM		R803,804			RK73GB1J271J	CHIP R 270 J 1/16W	
R738			RK73GB1J473J	CHIP R 47K J 1/16W		R805			RK73GB1J470J	CHIP R 47 J 1/16W	
R739			RK73GB1J103J	CHIP R 10K J 1/16W		R806			RK73GB1J220J	CHIP R 22 J 1/16W	
R740			RK73GB1J473J	CHIP R 47K J 1/16W		R807			RK73GB1J333J	CHIP R 33K J 1/16W	
R741			RK73GB1J223J	CHIP R 22K J 1/16W		R808			R92-1252-05	CHIP R 0 OHM	
R742,743			RK73GB1J184J	CHIP R 180K J 1/16W		R809			RK73GB1J473J	CHIP R 47K J 1/16W	
R744			RK73GB1J223J	CHIP R 22K J 1/16W		R810			RK73GB1J184J	CHIP R 180K J 1/16W	
R745			RK73GB1J153J	CHIP R 15K J 1/16W		R811			RK73GB1J224J	CHIP R 220K J 1/16W	
R746			RK73GB1J103J	CHIP R 10K J 1/16W		R812			RK73GB1J104J	CHIP R 100K J 1/16W	
R747			RK73GB1J394J	CHIP R 390K J 1/16W		R814			RK73GB1J103J	CHIP R 10K J 1/16W	
R748			RK73GB1J101J	CHIP R 100 J 1/16W		R815			R92-1252-05	CHIP R 0 OHM	
R749			RK73GB1J104J	CHIP R 100K J 1/16W		R901,902			RK73GB1J473J	CHIP R 47K J 1/16W	
R751			RK73GB1J153J	CHIP R 15K J 1/16W		R903,904			R92-2572-05	RESISTOR 330 1/2W	
R752			R92-1252-05	CHIP R 0 OHM		R905-907			R92-1252-05	CHIP R 0 OHM	
R754			RK73GB1J563J	CHIP R 56K J 1/16W		R908			R92-2572-05	RESISTOR 330 1/2W	
R755			RK73GB1J154J	CHIP R 150K J 1/16W		R909,910			R92-1201-05	CHIP R 220 1/2W	
R756			R92-1252-05	CHIP R 0 OHM		R911			R92-2572-05	RESISTOR 330 1/2W	
R757			RK73GB1J562J	CHIP R 5.6K J 1/16W		R912			RK73GB1J100J	CHIP R 10 J 1/16W	
R758			RK73GB1J474J	CHIP R 470K J 1/16W		R913			RK73GB1J473J	CHIP R 47K J 1/16W	
R759			RK73GB1J562J	CHIP R 5.6K J 1/16W		R914,915			R92-1201-05	CHIP R 220 1/2W	
R760			RK73GB1J472J	CHIP R 4.7K J 1/16W		R916-923			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R761			RK73GB1J333J	CHIP R 33K J 1/16W		R924			RK73GB1J104J	CHIP R 100K J 1/16W	
R762			R92-1252-05	CHIP R 0 OHM		R925			RK73GB1J274J	CHIP R 270K J 1/16W	
R763			RK73GB1J472J	CHIP R 4.7K J 1/16W		R926-928			RK73GB1J103J	CHIP R 10K J 1/16W	
R764			RK73GB1J223J	CHIP R 22K J 1/16W		R929			RK73GB1J100J	CHIP R 10 J 1/16W	
R765			RK73GB1J334J	CHIP R 330K J 1/16W		R930			R92-1281-05	RESISTOR 4.7 1/4W	
R766			RK73GB1J104J	CHIP R 100K J 1/16W		VR701	3A	*	R32-0635-05	SEMI FIXED VARIABLE RESISTOR (470)	
R767			RK73GB1J124J	CHIP R 120K J 1/16W		VR901		*	R31-0630-05	VARIABLE RESISTOR (10K)	
R768			RK73GB1J223J	CHIP R 22K J 1/16W		K1		*	S76-0425-05	RELAY	
R769			R92-1252-05	CHIP R 0 OHM		D1			HSM88AS	DIODE	
R770			RN73GH1J913D	CHIP R 91K D 1/16W		D3			HSM88AS	DIODE	
R771			RN73GH1J683D	CHIP R 68K D 1/16W		D4,5			1SS355	DIODE	
R772			RK73GB1J103J	CHIP R 10K J 1/16W		D101			DSA3A1-FK	DIODE	
R773			RN73GH1J333D	CHIP R 33K D 1/16W		D102			ZSA5A27	ZENER DIODE	
R774			RN73GH1J913D	CHIP R 91K D 1/16W		D103			02DZ15(X,Y)	ZENER DIODE	
R775			RN73GH1J274D	CHIP R 270K D 1/16W		D104			1SS355	DIODE	
R776			RK73GB1J564J	CHIP R 560K J 1/16W		D105			02DZ15(X,Y)	ZENER DIODE	
R777			RN73GH1J913D	CHIP R 91K D 1/16W		D106			1SS355	DIODE	
R778			R92-0670-05	CHIP R 0 OHM		D107			DA204U	DIODE	
R779			R92-1252-05	CHIP R 0 OHM							

PARTS LIST

TX-RX UNIT (X57-6100-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
D108			1SS355	DIODE		Q107			2SK1824	FET	
D109			02D218(X,Y)	ZENER DIODE		Q108			DTC114EE	DIGITAL TRANSISTOR	
D202-205		*	KV1470	VARIABLE CAPACITANCE DIODE		Q109			2SK1824	FET	
D206			MA742	DIODE		Q110			2SJ506(S)	FET	
D207			MA2S111	DIODE		Q111			DTA114YE	DIGITAL TRANSISTOR	
D208			02D25.1(Y)	ZENER DIODE		Q112			DTC114TE	DIGITAL TRANSISTOR	
D401			1SS301	DIODE		Q113-115			2SK1824	FET	
D501-504			MA2S077	DIODE		Q117			2SB1132(Q,R)	TRANSISTOR	
D701-710			DA204U	DIODE		Q118,119			2SA1362(Y)	TRANSISTOR	
D711			MA742	DIODE		Q121,122			2SK1824	FET	
D912-915			DAP202U	DIODE		Q201			2SK2596	FET	
D916			1SS373	DIODE		Q202-204			2SK508NV(K52)	FET	
IC2			TA75S01F	IC (APC COMPARATOR)		Q205			2SC4215(Y)	TRANSISTOR	
IC101			TC4013BF(N)	IC (D FLIP-FLOP)		Q206			2SC4617(S)	TRANSISTOR	
IC102		*	TDA1519A	IC (AUDIO POWER AMP)		Q401			3SK131(L)	FET	
IC103			TA7808S	IC (VOLTAGE REGULATOR)		Q402			2SA1832(GR)	TRANSISTOR	
IC104			TK11250BM	IC (VOLTAGE REGULATOR)		Q403-406			2SC4738(GR)	TRANSISTOR	
IC105			BU4066BCFV	IC (ANALOG SWITCH)		Q407			2SK1824	FET	
IC201			GN2011(Q)	IC (ACTIVE DBM)		Q408			2SA1832(GR)	TRANSISTOR	
IC202			TA31136FN	IC (FM IF SYSTEM)		Q501			2SC4617(S)	TRANSISTOR	
IC203			TC7S66FU	IC (ANALOG SWITCH)		Q503			3SK131(L)	FET	
IC401			MC1350D	IC (AGC AMP)		Q504			2SC4617(S)	TRANSISTOR	
IC501			LMX2332LTMX	IC (DUAL-PLL)		Q505,506			2SC4649(N,P)	TRANSISTOR	
IC601			PST9132NR	IC (VOLTAGE DETECTOR)		Q507			2SC4617(S)	TRANSISTOR	
IC602			TK11250BM	IC (VOLTAGE REGULATOR)		Q601,602			2SK1824	FET	
IC603			TC7WU04FU	IC (BUFFER AMP)		Q701,702			DTD114EK	DIGITAL TRANSISTOR	
IC604			784214GC0618EU	IC (MICROPROCESSOR)		Q703			2SJ243	FET	
IC605			AT2408N10SI2.5	IC (EEPROM)		Q704			2SK1824	FET	
IC606			TC7S02FU	IC (NOR GATE)		Q705			2SJ243	FET	
IC607			AT29C020-90TI	IC (FLASH ROM)		Q706-709			2SK1824	FET	
IC701-704			BU4094BCFV	IC (SHIFT REGISTER)		Q901,902			2SC4617(S)	TRANSISTOR	
IC705			TA75W01FU	IC (ACTIVE LOW PASS FILTER)		Q903-905			2SK1824	FET	
IC706,707			TC75W51FU	IC (ACTIVE LOW PASS FILTER)		TH1			157-503-65001	THERMISTOR	
IC708			LC73872M	IC (DTMF DECODER)		TH2,3			157-104-53001	THERMISTOR	
IC709			TC75W51FU	IC (BUFFER AMP/ACTIVE FILTER)		TH201			157-503-65001	THERMISTOR	
IC710			M62364FP	IC (D/A CONVERTER)							
IC711			TC75W51FU	IC (SUMMING/BUFFER AMP)							
IC712			BU4066BCFV	IC (ANALOG SWITCH)							
IC713			TC35453F	IC (AUDIO PROCESSOR)							
IC714			TA75W01FU	IC (AF/BUFFER AMP)							
IC715			M62354GP	IC (D/A CONVERTER)							
IC901			BU4094BCF	IC (SHIFT REGISTER)							
IC902			LC75824W	IC (LCD DRIVER)							
Q1			2SC4649(N,P)	TRANSISTOR							
Q2			2SC3357	TRANSISTOR							
Q3			2SK2596	FET							
Q4,5			2SK3075	FET							
Q6,7		*	2SC2540	TRANSISTOR							
Q8			2SK1824	FET							
Q9			2SA1362(Y)	TRANSISTOR							
Q10			2SK1824	FET							
Q11			DTC114TE	DIGITAL TRANSISTOR							
Q12			2SB1132(Q,R)	TRANSISTOR							
Q13			2SK1824	FET							
Q101			DTA114EE	DIGITAL TRANSISTOR							
Q102			DTA114YE	DIGITAL TRANSISTOR							
Q103			DTA114EE	DIGITAL TRANSISTOR							
Q104			DTC114YE	DIGITAL TRANSISTOR							
Q105			DTA144TE	DIGITAL TRANSISTOR							
Q106			DTC114EE	DIGITAL TRANSISTOR							