


■ EXPLODED VIEW • PART LIST

Main Section

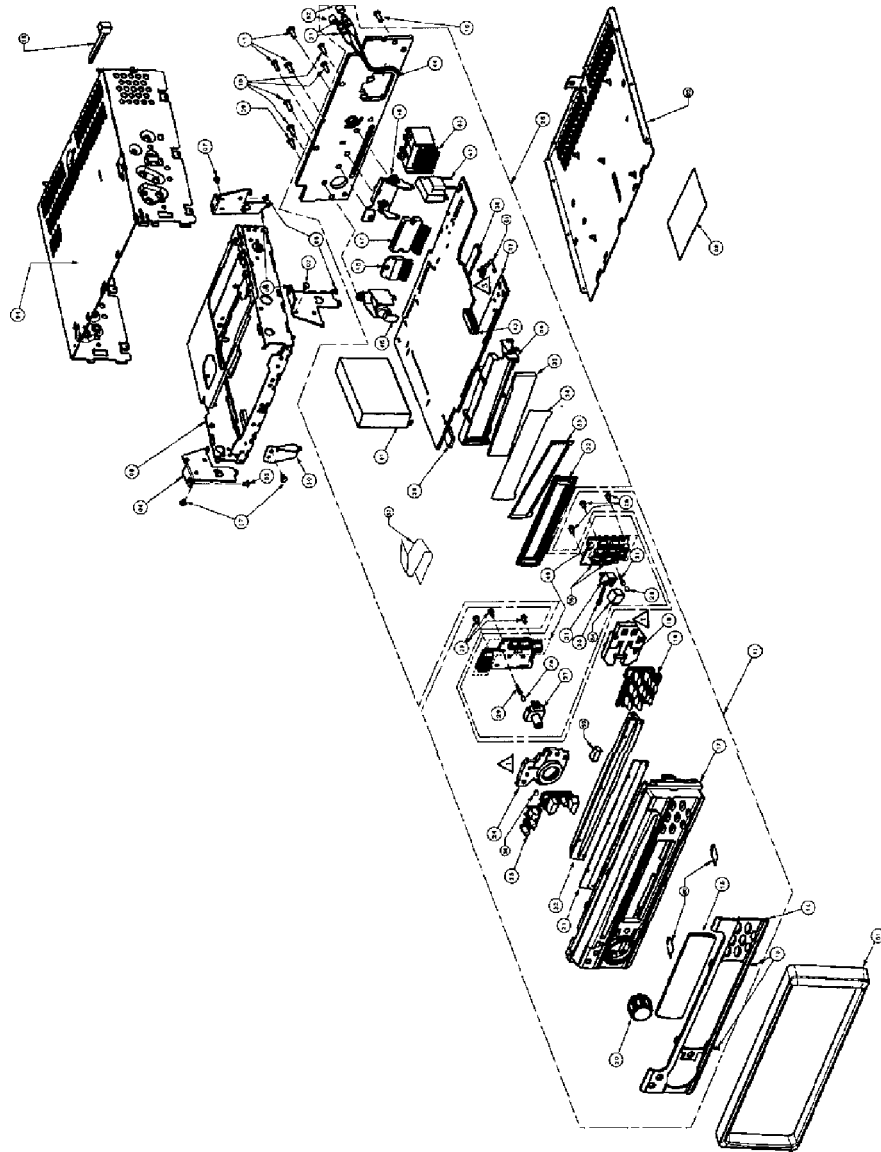


NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
01	370-9006-06	ESCUTCHEON	1	31	335-6723-00	LED HOLDER	1
02	286-9910-00	SET PLATE	1	32	379-1226-40	INDICATOR	1
03	311-1848-00	LOWER CASE	1	33	347-6634-00	FILM	1
04	310-1751-00	UPPER CASE	1	34	347-6633-00	SHADE	1
05	731-3004-80	TAPTIGHT	3	35	335-6722-00	LCD ILLUMI	1
06	331-3366-00	MECHA BRACKET	3	36	335-6721-00	LCD HOLDER	1
07	714-2604-81	MACHINE SCREW	4	37	039-2067-00	PWB	1
08	929-0220-80	CD MECHANISM	1	38	854-2571-60	EXTENSION LEAD	1
09	714-3006-81	MACHINE SCREW	1	39	854-2572-60	EXTENSION LEAD	1
10	731-3008-80	TAPTIGHT	5	40	074-1191-26	OUTLET SOCKET	1
11	731-3012-80	TAPTIGHT	3	41	80-2089-RI	TUNER	1
12	45-2504-AA	ES-ASSY	1	42	009-9006-60	CHOKE	1
13	778-2004-00	SPECIAL SCREW	2	43	074-1214-00	OUTLET SOCKET	1
14	371-5717-00	FACE PLATE	1	44	313-1838-00	HEAT SINK	1
15	373-0990-00	DIAL-CVR	1	45	092-4000-51	ANT-RECEPT	1
16	335-0833-01	CABLE TIE	1	46	051-3295-00	IC	1
17	370-9612-00	ESCUTCHEON	1	47	051-2031-31	POWER IC	1
18	382-6456-00	BUTTON ASSY	1	48	331-3367-00	IC HOLDER	1
19	335-6719-00	ILLUMI PLATE	1	49	013-6005-51	TACT SWITCH	12
20	380-5539-00	KNOB	1	50	331-3368-00	PWB HOLDER	1
21	346-0072-02	LEATHER SHEET	1	51	855-8000-08	RCA PIN CORD	1
22	335-4759-20	DISC GUIDE	1	52	345-3799-0L	RUBBER PART	1
23	382-6457-00	BUTTON ASSY	1	53	345-5164-00	RUBBER PART	1
24	335-6720-00	ILLUMI PLATE	1	54	347-6679-00	SHADE	1
25	716-0778-00	WAVE SCREW	6	55	013-6001-50	TACT SWITCH	2
26	53-2504-AH	MAIN PWB ASSY	1	56	345-8339-00	SPONGE	1
27	016-9900-84	VR W / SHAFT	1	57	816-2573-60	FLAT WIRE	1
28	345-7148-13	RUBBER PART	2	58	347-6750-00	COPPER TAPE	2
29	017-0414-00	PILOT LAMP	2				
30	001-7030-02	DIODE	1				

EXPLODED VIEW • PARTS LIST

CD mechanism section 929-0220-80

Drive unit section

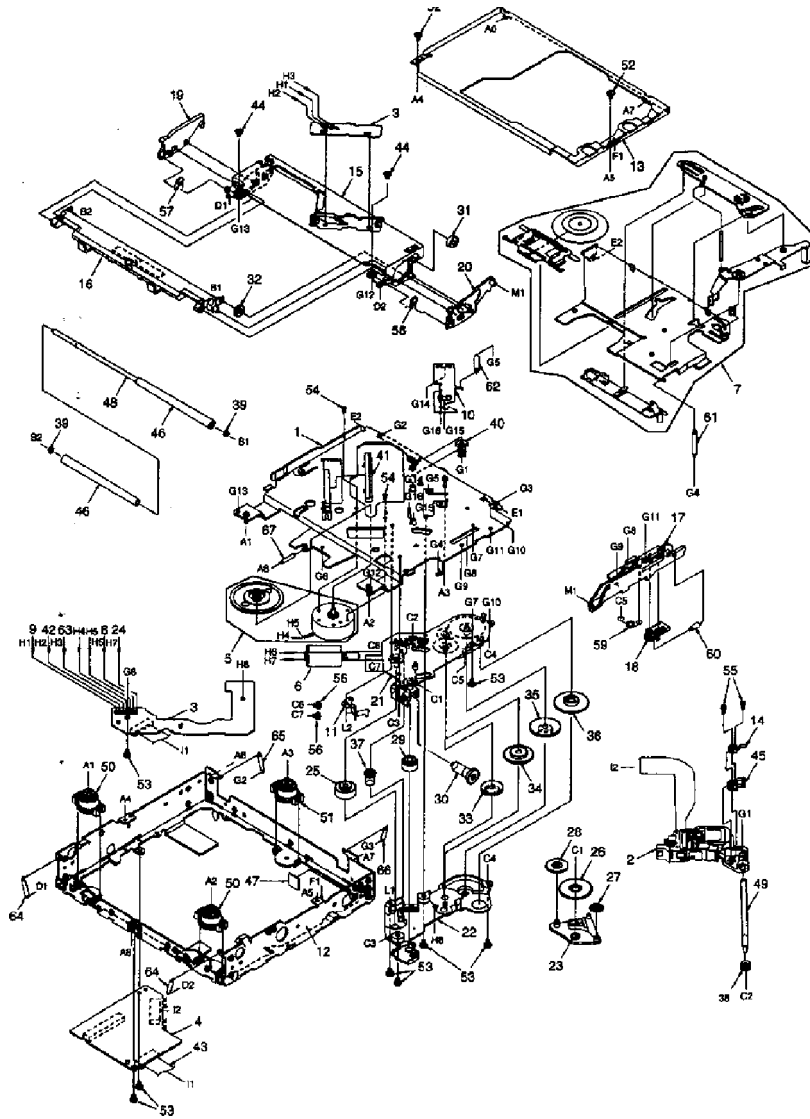

NO.	PART NO.	DESCRIPTION	QTY	NO.	PART NO.	DESCRIPTION	QTY
1	966-0595-24	DRIVE PLATE ASSY		34	621-0617-20	POWER GEAR B	1
1	966-0595-24	DRIVE PLATE ASSY	1	35	621-0618-20	POWER GEAR C	1
2	969-0060-30	PICK UP UNIT	1	36	621-0619-20	POWER GEAR D	1
3	039-1944-21	LED PWB (WITHOUT COMPONENT)	1	37	621-0620-20	THREAD GEAR A	1
4	039-1945-20	CD PWB(WITHOUT COMPONENT)	1	38	621-0621-20	THREAD GEAR B	1
5	SMA-182-100	MOTOR ASSY(SPINDLE)	1	39	621-0622-20	ROLLER SLEEVE	2
6	SMA-183-100	MOTOR ASSY(SLED)	1	40	621-0623-21	LS-HOLDER	1
7	HBT-516-100	CLAMPER SUB ASSY	1	41	621-0624-20	GUIDE RAIL	1
8	803-4906-60	VINYL COAT WIRE(ORG)	1	42	816-2566-52	LEAD WIRE(PUR)	1
9	816-2566-50	LEAD WIRE(YEL)	1	43	816-2542-01	FLAT WIRE(10P)	1
10	620-1025-21	ID-LOCK PLATE	1	44	716-3473-00	SCREW	2
11	620-1026-21	SPRING PLATE	1	45	621-0628-21	SH-BASE	1
12	620-1027-24	LOWER CHASSIS	1	46	621-0629-20	LOADING ROLLER	2
13	620-1028-21	UPPER CHASSIS	1	47	345-8704-20	CUSHION RUBBER	1
14	620-1029-21	SH-SPRING	1	48	622-1571-20	ROLLER SHAFT	1
15	621-0598-25	UPPER GUIDE	1	49	624-0018-01	LEAD SCREW	1
16	621-0599-25	ROLLER GUIDE	1	50	629-0081-20	DAMPER F	2
17	621-0600-23	SHIFT LEVER	1	51	629-0082-20	DAMPER R	1
18	621-0601-21	RACK	1	52	714-2003-81	MACHINE SCREW	2
19	621-0602-22	LOCK ARM L	1	53	716-1507-00	SCREW	8
20	621-0603-23	LOCK ARM R	1	54	716-1733-00	SCREW	2
21	621-0604-21	GEAR BASE	1	55	716-3469-00	SPECIAL SCREW	2
22	621-0605-21	GEAR COVER	1	56	716-3446-00	SCREW	2
23	621-0606-21	IDLE CASE	1	57	750-3465-21	ROLLER SPRING L	1
24	805-4906-60	VINYL COAT WIRE(GRN)	1	58	750-3466-20	ROLLER SPRING R	1
25	621-0608-21	SECOND GEAR	1	59	750-3467-20	SHIFT SPRING	1
26	621-0609-20	BASE GEAR	1	60	750-3468-20	RACK SPRING	1
27	621-0610-20	IDLE GEAR A	1	61	750-3469-20	CLAMPER SPRING	1
28	621-0611-20	IDLE GEAR B	1	62	750-3470-20	ID-LOCK SPRING	1
29	621-0612-21	ROLLER GEAR A	1	63	816-2566-51	LEAD WIRE(BLU)	1
30	621-0613-20	ROLLER GEAR B	1	64	750-3472-21	DR-SPRING F	2
31	621-0614-20	ROLLER GEAR C	1	65	750-3473-20	DR-SPRING RA	1
32	621-0615-21	ROLLER GEAR D	1	66	750-3474-20	DR-SPRING RB	1
33	621-0616-20	POWER GEAR A	1	67	750-3475-21	DR-SPRING C	1

■ ELECTRICAL PARTS LIST

Note: Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

Main PWB Section (B1)

* : for PE-2506K-A only # : for PE-2504B-A only

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C 101	166-2201-00	22pF	C 161	166-2201-00	22pF	C 223	168-1045-06	0.1μF
C 102	166-2201-00	22pF	C 162	172-1041-11	0.1μF	C 224	168-1045-06	0.1μF
C 103	182-4763-12	6.3V-47μF	C 163	172-1041-11	0.1μF	C 225	168-1022-05	1000pF
C 104	182-4763-32	16V-47μF	C 164	184-2283-32	16V-2200μF	C 226	168-1022-05	1000pF
C 106	168-1032-05	0.01μF	C 165	182-1053-62	50V-1μF	C 229	178-2242-08	0.22μF
C 107	168-1045-06	0.1μF	C 166	168-1045-06	0.1μF	C 232	182-1073-12	6.3V-100μF
C 108	182-1073-22	10V-100μF	C 167	168-1045-06	0.1μF	C 233	168-1045-06	0.1μF
C 110	182-1073-22	10V-100μF	C 168	168-1045-06	0.1μF	D 104	001-0466-00	S5688B
C 111	168-1032-05	0.01μF	C 169	168-1045-06	0.1μF	D 105	001-0466-01	S5688G
C 112	168-2732-05	0.027μF	C 170	168-1045-06	0.1μF	D 106	001-0466-00	S5688B
C 113	168-2732-05	0.027μF	C 171	168-1045-06	0.1μF	D 107	001-0592-00	RM4Z
C 114	168-2232-05	0.022μF	C 172	182-1053-62	50V-1μF	D 108	001-0466-00	S5688B
C 115	168-1022-05	1000pF	C 173	182-1053-62	50V-1μF	D 109	001-0376-26	MTZJ4.7B
C 116	178-1052-08	1μF	C 174	168-1032-05	0.01μF	D 110	001-0466-00	S5688B
C 117	178-1052-08	1μF	C 175	168-1032-05	0.01μF	D 111	001-0466-00	S5688B
C 118	178-1052-08	1μF	C 177	168-6822-05	6800pF	D 112	001-0466-00	S5688B
C 119	178-1052-08	1μF	C 178	168-1032-05	0.01μF	D 113	001-0466-00	S5688B
C 120	182-3353-62	50V-3.3μF	C 179	182-1053-62	50V-1μF	D 114	001-0466-00	S5688B
C 121	168-1032-05	0.01μF	C 180	168-1032-05	0.01μF	D 115	001-0466-00	S5688B
C 122	182-2263-32	16V-22μF	C 181	168-4722-05	4700pF	D 116	001-0466-00	S5688B
C 123	178-1052-08	1μF	C 183	182-1073-22	10V-100μF	D 117	001-0330-00	1SS119
C 124	178-1052-08	1μF	C 185	168-1022-05	1000pF	D 120	001-0376-35	MTZJ6.2B
C 125	168-1522-05	1500pF	C 186	168-1022-05	1000pF	D 121	001-0376-35	MTZJ6.2B
C 126	168-1522-05	1500pF	C 187	166-4711-00	470pF	D 122	001-0330-00	1SS119
C 127	168-8232-08	0.082μF	C 188	166-4711-00	470pF	D 123	001-0466-00	S5688B
C 128	168-8232-08	0.082μF	C 189	168-1022-05	1000pF	D 207	001-0330-00	1SS119
C 129	168-8232-08	0.082μF	C 190	168-1022-05	1000pF	D 208	001-0330-00	1SS119
C 130	168-8232-08	0.082μF	C 191	168-1022-05	1000pF	IC 101	051-5022-90	LC75421M
C 131	178-1842-08	0.18μF	C 192	168-1022-05	1000pF	IC 102	051-2031-31	LA4763
C 132	178-1842-08	0.18μF	C 193	168-1045-06	0.1μF	IC 103	052-1932-00	TC9324F-006
C 133	178-1842-08	0.18μF	C 195	168-1022-05	1000pF	IC 104	051-3295-00	HA13164A
C 134	178-1052-08	1μF	C 196	182-1073-22	10V-100μF	L 101	010-2003-04	COIL
C 135	178-1842-08	0.18μF	C 197	168-1032-05	0.01μF	L 102	010-2330-67	5.6μH
C 136	178-1052-08	1μF	C 199	168-1022-05	1000pF	L 103	010-2330-86	220μH
C 138	182-1063-33	16V-10μF	C 200	168-1045-06	0.1μF	L 104	010-2330-50	0.22μH
C 139	182-1063-33	16V-10μF	C 201	166-4711-00	470pF	Q 101	100-1048-00	2SA1048
C 140	182-1053-62	50V-1μF	C 202	182-1063-32	16V-10μF	Q 102	125-2004-02	RN1402
C 142	182-1053-62	50V-1μF	C 203	166-4711-00	470pF	Q 103	100-1298-00	2SA1298 O,Y
C 144	178-4742-08	0.47μF	C 207	166-4711-00	470pF	Q 104	125-2004-02	RN1402
C 145	178-4742-08	0.47μF	C 208	168-1022-05	1000pF	Q 105	102-2712-51	2SC2712GR
C 146	178-4742-08	0.47μF	C 209	182-3353-62	50V-3.3μF	Q 106	125-2004-03	RN1403
C 147	178-4742-08	0.47μF	C 210	168-1045-05	0.1μF	Q 107	102-2712-51	2SC2712GR
C 148	166-3311-00	330pF	C 211	178-2255-09	2.2μF	Q 108	125-0002-03	RN2403
C 149	166-1011-00	100pF	C 212	184-4773-12	6.3V-470μF	Q 109	103-1306-00	D1306
C 150	172-1041-11	0.1μF	C 213	182-2273-12	6.3V-220μF	Q 110	103-1306-00	D1306
C 151	166-1011-00	100pF	C 214	166-2211-00	220pF	Q 112	125-0002-04	RN2404
C 152	166-1011-00	100pF	C 215	166-2211-00	220pF	Q 113	102-2712-51	2SC2712GR
C 153	172-1041-11	0.1μF	C 216	166-2211-00	220pF	Q 114	100-1298-00	2SA1298 O,Y
C 154	182-4763-32	16V-47μF	C 217	166-2211-00	220pF	Q 117	125-2004-02	RN1402
C 155	184-4773-12	6.3V-470μF	C 218	166-2211-00	220pF	Q 118	102-2712-51	2SC2712GR
C 156	168-1045-06	0.1μF	C 219	166-2211-00	220pF	Q 119	102-2712-51	2SC2712GR
C 157	178-2255-09	2.2μF	C 220	166-2211-00	220pF	Q 120	100-1298-00	2SA1298 O,Y
C 160	166-2201-00	22pF	C 221	166-2211-00	220pF	Q 121	125-2004-03	RN1403
C 159	172-1041-11	0.1μF	C 222	168-1022-05	1000pF	Q 122	102-2712-51	2SC2712GR

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
Q 123	102-2712-51	2SC2712GR	R 129	119-1031-10	1/16W 10K	R 163	060-0108-90	1/4WS 0
R 101	119-2221-10	1/16W 2.2K	R 130	119-1031-10	1/16W 10K	R 165	119-4731-10	1/16W 47K
R 102	111-2221-91	1/4WS 2.2K	R 131	119-1031-10	1/16W 10K	R 167	119-2231-10	1/16W 22K
R 103	119-2231-10	1/16W 22K	R 132	119-2221-10	1/16W 2.2K	R 168	119-1031-10	1/16W 10K
R 104	111-1021-91	1/4WS 1K	R 133	119-2221-10	1/16W 2.2K	R 169	119-4731-10	1/16W 47K
R 105	119-1011-10	1/16W 100	R 134	119-2221-10	1/16W 2.2K	R 170	119-1831-10	1/16W 18K
R 106	111-2221-91	1/4WS 2.2K	R 135	119-2221-10	1/16W 2.2K	R 171	119-1031-10	1/16W 10K
R 107	119-2221-10	1/16W 2.2K	R 136	119-1031-10	1/16W 10K	R 172	111-1021-91	1/4WS 1K
R 108	119-2231-10	1/16W 22K	R 137	119-1031-10	1/16W 10K	R 173	119-4721-10	1/16W 4.7K
R 109	119-1021-10	1/16W 1K	R 138	119-1041-10	1/16W 100K	R 175	119-1231-10	1/16W 12K
R 110	119-1031-10	1/16W 10K	R 139	119-3311-10	1/16W 330	R 176	119-1031-10	1/16W 10K
R 112	119-3331-10	1/16W 33K	R 140	119-3311-10	1/16W 330	R 179	119-4731-10	1/16W 47K
R 113	119-3331-10	1/16W 33K	R 141	119-2221-10	1/16W 2.2K	R 180	119-3931-10	1/16W 39K
R 115	119-1231-10	1/16W 12K	R 142	119-1041-10	1/16W 100K	R 181	119-1041-10	1/16W 100K
R 116	111-4721-91	1/4WS 4.7K	R 143	119-1041-10	1/16W 100K	R 182	119-1021-10	1/16W 1K
R 117	119-1021-10	1/16W 1K	R 144	119-4731-10	1/16W 47K	R 183	119-1021-10	1/16W 1K
R 118	119-1021-10	1/16W 1K	R 145	119-4731-10	1/16W 47K	R 184	119-1031-10	1/16W 10K
R 119	119-4741-10	1/16W 470K	R 146	119-4731-10	1/16W 47K	R 186	119-4731-10	1/16W 47K
R 120	119-8221-10	1/16W 8.2K	R 147	119-5631-10	1/16W 56K	RCA101	855-8000-08	RCA PIN CORD
R 121	119-8221-10	1/16W 8.2K	R 150	119-1231-10	1/16W 12K	SUP 101	060-0122-20	DSP-141N-S00B
R 122	119-3921-10	1/16W 3.9K	R 151	111-2231-91	1/4WS 22K	T 101	009-9006-60	CHOKE
R 123	119-3921-10	1/16W 3.9K	R 154	119-8221-10	1/16W 8.2K	X 101	061-1064-00	4.5MHz
R 124	119-1031-10	1/16W 10K	R 155	119-2231-10	1/16W 22K			
R 125	119-1031-10	1/16W 10K	R 156	119-4731-10	1/16W 47K			
R 126	119-1031-10	1/16W 10K	R 157	119-1031-10	1/16W 10K *			
R 127	119-1031-10	1/16W 10K	R 158	119-1031-10	1/16W 10K #			
R 128	119-1031-10	1/16W 10K	R 159	119-1031-10	1/16W 10K			

Right ES-PWB (B2)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D 201	001-7030-02	LED	R 206	119-2721-10	1/16W 2.7K	S 206	013-6005-51	TACT SWITCH
J 104	816-2571-60	EXTENTION LEAD(4PIN)	R 208	119-3921-10	1/16W 3.9K	S 208	013-6005-51	TACT SWITCH
PL 201	017-0414-00	PILOT LAMP	R 210	119-6821-10	1/16W 6.8K	S 210	013-6005-51	TACT SWITCH
R 201	111-3911-91	1/4WS 390	R 212	119-1231-10	1/16W 12K	S 212	013-6005-51	TACT SWITCH
R 202	119-1521-10	1/16W 1.5K	R 214	119-3331-10	1/16W 33K	S 214	013-6005-51	TACT SWITCH
R 204	119-2221-10	1/16W 2.2K	S 202	013-6001-50	TACT SWITCH	S 216	013-6001-50	TACT SWITCH
			S 204	013-6005-51	TACT SWITCH			

Left ES-PWB (B3)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
J 103	816-2572-60	EXTENTION LEAD(7PIN)	R 211	119-6821-10	1/16W 6.8K	S 215	013-6005-51	TACT SWITCH
PL 202	017-0414-00	PILOT LAMP	R 213	119-1231-10	1/16W 12K	S 217	013-6005-51	TACT SWITCH
R 203	119-1521-10	1/16W 1.5K	R 215	119-3331-10	1/16W 33K	V R1	016-9900-84	VR W/SHAFT
R 205	119-2221-10	1/16W 2.2K	S 201	013-6005-51	TACT SWITCH			
R 207	119-2721-10	1/16W 2.7K	S 203	013-6005-51	TACT SWITCH			
R 209	119-3921-10	1/16W 3.9K	S 205	013-6005-51	TACT SWITCH			
			S 207	013-6005-51	TACT SWITCH			

CD PWB (B4), (B5), (B6)

Note: Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C 101	166-2201-00	22pF	C 208	046-6822-58	6800pF	R 108	033-1531-15	1/16W 15k
C 102	166-2201-00	22pF	C 209	168-1042-08	0.1μF	R 109	033-1031-15	1/16W 10k
C 101	168-1042-08	0.1μF	C 210	043-0533-50	0.047μF	R 110	033-1051-15	1/16W 1M
C 102	045-4701-50	47pF	C 211	168-1042-08	0.1μF	R 111	033-3321-15	1/16W 3.3k
C 103	046-4722-58	4700pF	C 212	168-1042-08	0.1μF	R 114	033-2211-15	1/16W 220
C 104	168-1042-08	0.1μF	C 213	045-5096-50	5pF	R 115	033-2211-15	1/16W 220
C 105	046-1532-78	0.015μF	C 214	045-5601-50	56pF	R 116	033-1031-15	1/16W 10k
C 106	046-1032-78	0.01μF	C 215	043-0533-50	0.047μF	R 117	033-1021-15	1/16W 1k
C 107	046-1032-78	0.01μF	C 216	178-1052-08	1μF	R 131	033-4711-15	1/16W 470
C 108	046-4722-58	4700pF	C 217	045-1011-50	100pF	R 132	033-2211-15	1/16W 220
C 109	046-1522-58	1500pF	C 301	163-1073-35	16V-100μF	R 201	117-2201-15	1/10W 22
C 110	046-3332-78	0.033μF	C 302	168-1042-08	0.1μF	R 202	117-2201-15	1/10W 22
C 111	168-1042-08	0.1μF	C 303	043-0533-50	0.047μF	R 203	033-1041-15	1/16W 100k
C 112	046-3332-78	0.033μF	D 1	001-7058-90	AN1105W-RR	R 204	033-1041-15	1/16W 100k
C 113	168-1042-08	0.1μF	D 2	001-7058-90	AN1105W-RR	R 205	033-1041-15	1/16W 100k
C 114	168-1042-08	0.1μF	D 201	001-0516-00	MA111	R 206	033-1041-15	1/16W 100k
C 115	046-4712-58	470pF	IC 101	051-6376-00	TC94A14FA	R 207	033-1041-15	1/16W 100k
C 116	046-4712-58	470pF	IC 102	051-3279-90	BA033LBSG	R 208	033-8231-15	1/16W 82k
C 117	043-0533-50	0.047μF	IC 201	051-5710-90	TA2157F	R 209	033-6811-15	1/16W 680
C 118	043-0533-50	0.047μF	IC 301	051-6049-08	BA5983FP-E2	R 210	033-6831-15	1/16W 68k
C 119	045-2701-50	27pF	J 1	074-1138-60	10P	R 211	033-1831-15	1/16W 18k
C 120	045-1801-50	18pF	J 101	074-1228-76	26P	R 212	033-2721-15	1/16W 2.7k
C 121	163-1063-35	16V-10μF	J 201	074-1138-65	15P	R 213	033-1011-15	1/16W 100
C 122	178-1052-08	1μF	J 301	074-1138-60	10P	R 214	033-1021-15	1/16W 1k
C 123	046-1032-78	0.01μF	L 101	010-2285-57	BLM21B102SPT	R 215	033-1031-15	1/16W 10k
C 124	163-1073-05	4V-100μF	L 102	010-2285-57	BLM21B102SPT	R 217	033-1041-15	1/16W 100k
C 125	168-1042-08	0.1μF	L 103	010-2285-57	BLM21B102SPT	R 218	033-2211-15	1/16W 220
C 126	168-1042-08	0.1μF	L 104	010-2285-57	BLM21B102SPT	R 301	117-6811-15	1/16W 680
C 129	178-1052-08	1μF	L 105	010-2285-57	BLM21B102SPT	R 304	033-3921-15	1/16W 3.9k
C 201	163-3363-05	4V-33μF	L 401	010-3050-93	10μH	R 305	033-3921-15	1/16W 3.9k
C 202	168-1042-08	0.1μF	Q 1	060-4015-90	PS1192H	R 306	033-1041-15	1/16W 100k
C 203	178-1052-08	1μF	Q 2	060-4015-90	PS1192H	R 307	033-2211-15	1/16W 220
C 204	163-1073-05	4V-100μF	Q 201	131-1188-50	2SB1188	S 1	013-7414-50	CHUCKING
C 205	163-3363-05	4V-33μF	R 102	033-5621-15	1/16W 5.6k	S 2	013-7413-50	LIMIT
C 206	168-1042-08	0.1μF	R 104	033-4731-15	1/16W 47k	X 102	060-1528-90	16.934M
C 207	043-0533-50	0.047μF	R 105	033-1041-15	1/16W 100k			

Step 1
Cut cable tie and remove all screw from Heat Sink,
(G), (H) & (I)

Step 2
Remove Heat Sink, (F)

Step 3
Remove Lower Case, (A)

Step 4
Unsolder extention lead 7 pin, (J)

Step 5
Unsolder extention lead 4 pin, (K)

Step 6
Remove Escutcheon, (L)


Step 7
Unsolder 3 point on the main PWB, (B)

Step 8
After unsolder main PWB remember to remove flat
wire (C) between main PWB (B), and Mechanism, (E)

Step 9
Remove Main PWB, (B)


Step 10
Unscrew the mechanism from the upper case, (D)

REMOVING MAIN PWB FOR REPAIR

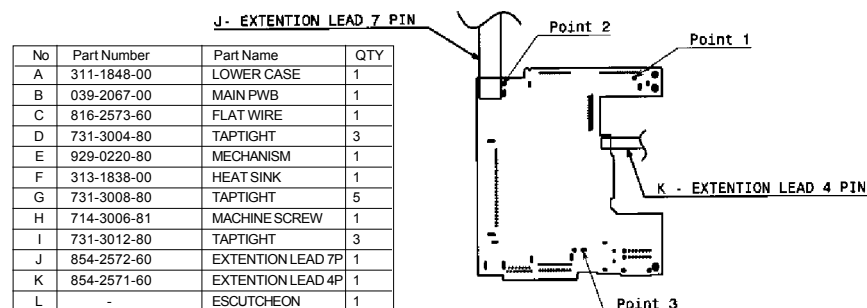

- 13 -

DB125

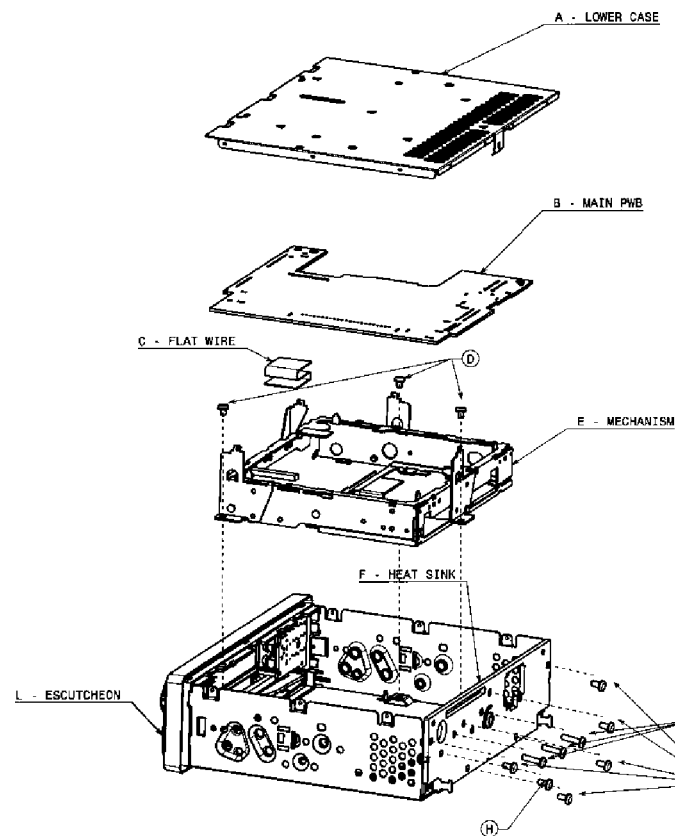

DB125

- 14 -