


DISASSEMBLY


* Please refer to next page for the reference numbers of parts.

Front Panel / Inner Escutchen

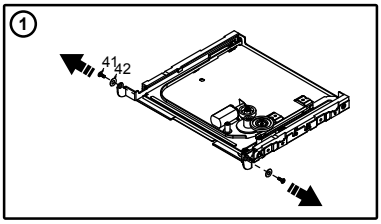


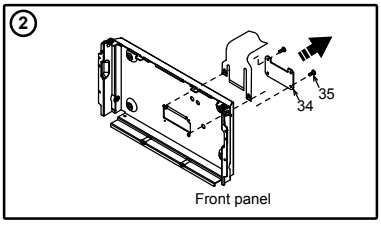


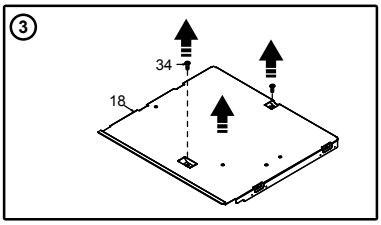


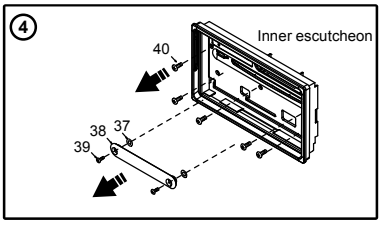


NAVI-PWB

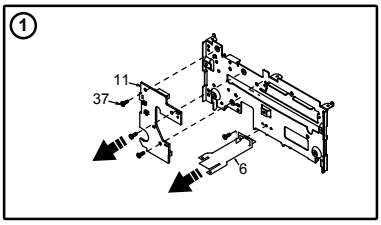


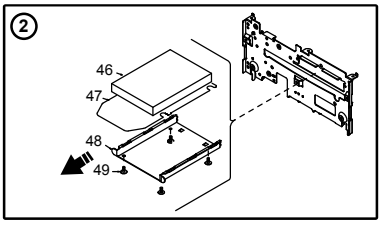


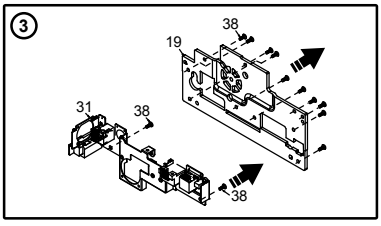

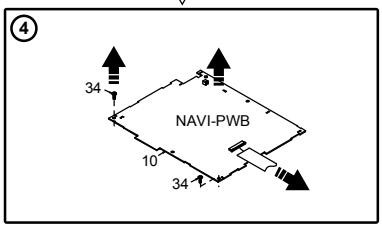


TV-SLIDE-MECH

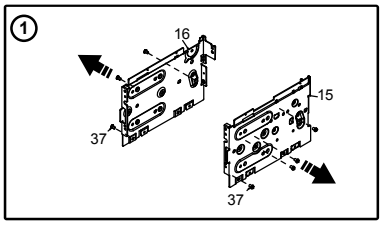


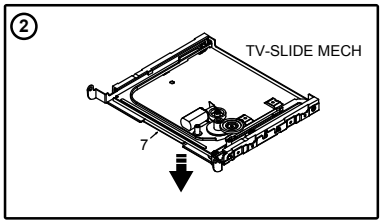



AUDIO-PWB

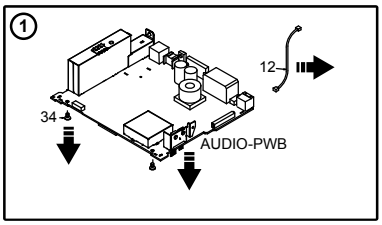


DIGITAL-MECH

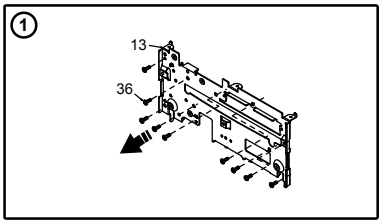

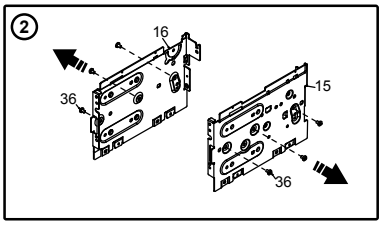


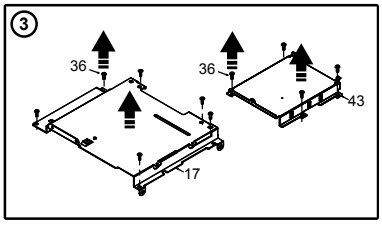

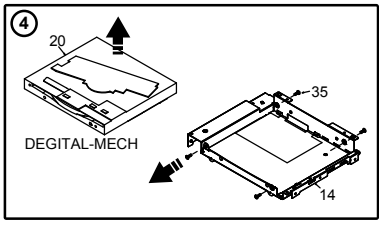

EXPLODED VIEW / PARTS LIST

Main section

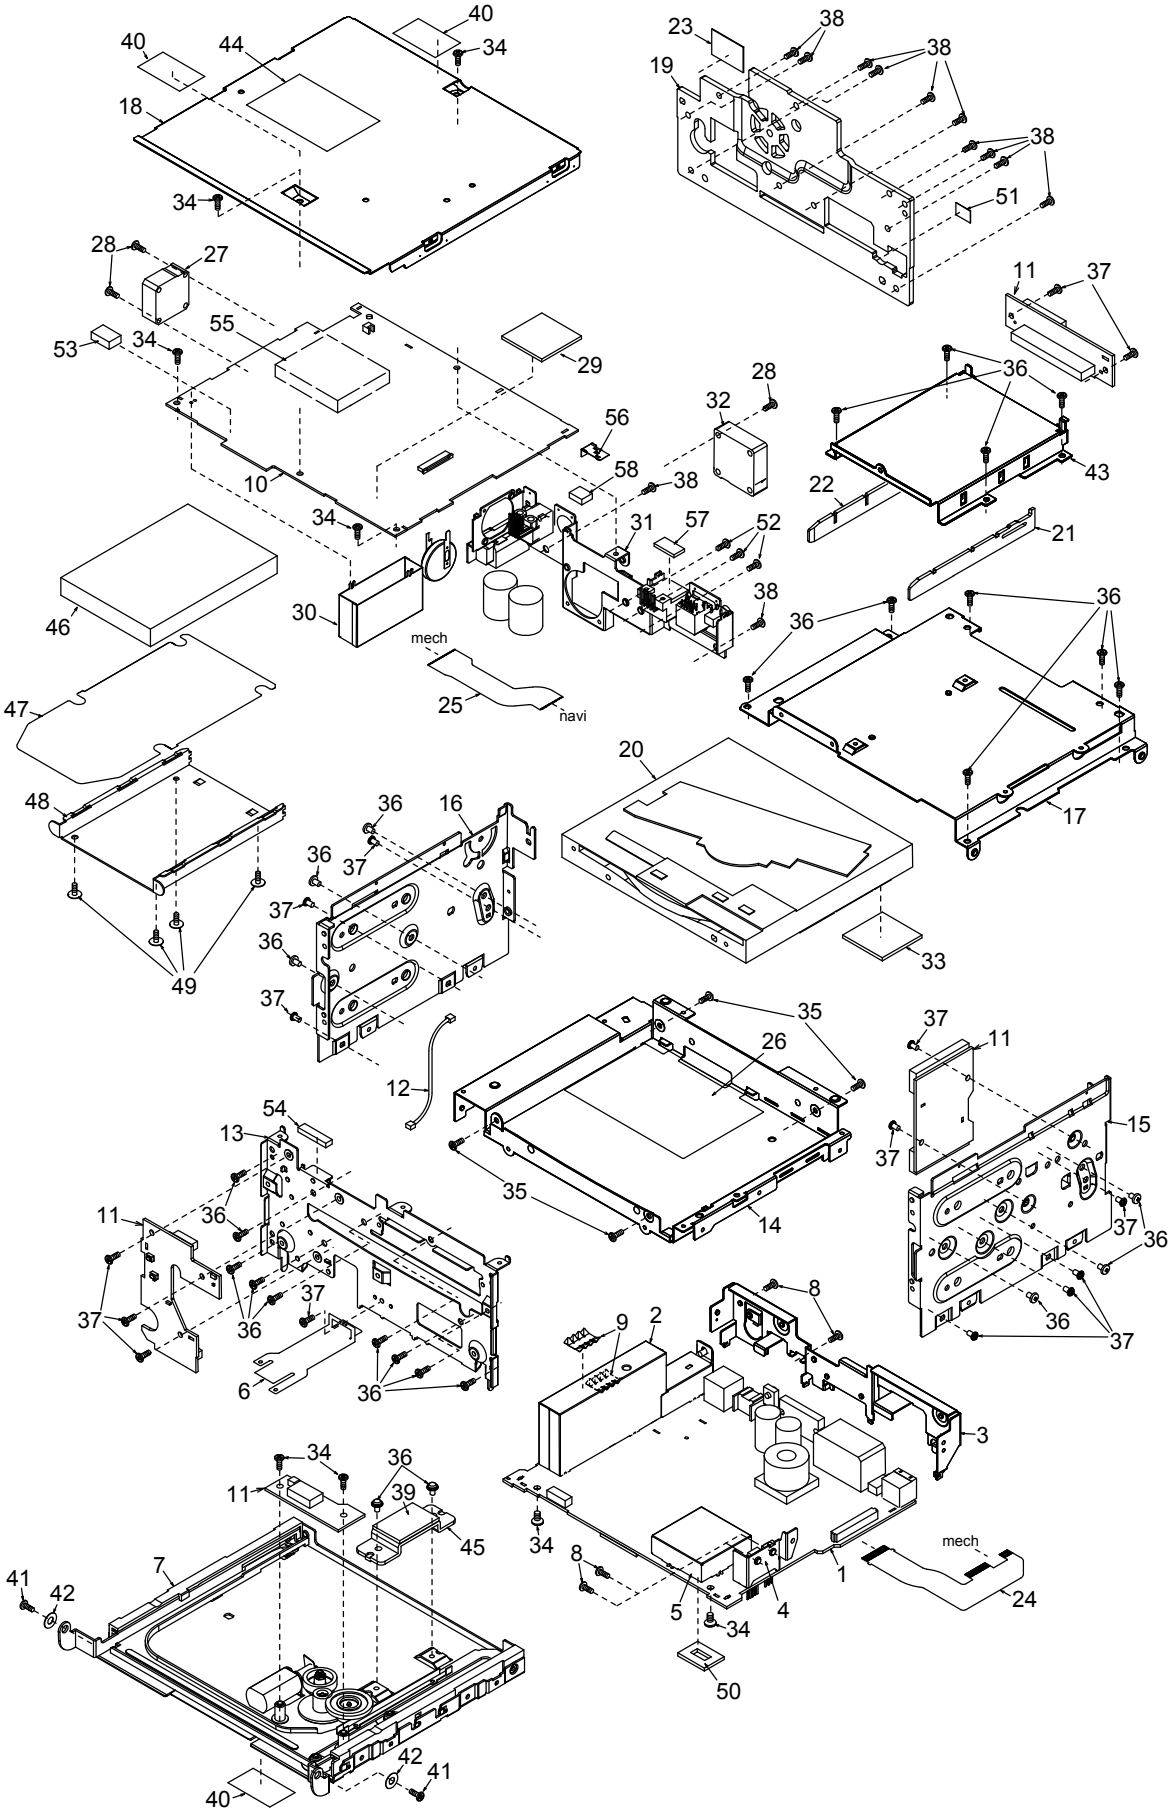


* Do not reuse the screw of SEALOCK.

NO.	PART NO.	DESCRIPTION	Q'TY
1	----------	AUDIO PWB	1
2	331-4416-80	SHIELD CASE	1
3	331-4401-81	PWB PLATE	1
4	331-4402-80	TR HOLDER	1
5	331-4417-80	SHIELD CASE	1
6	039-2808-05	FPC	1
7	948-0793-82	TV-SLIDE MECH	1
8	780-3006-51	SCREW(M3x6)	4
9	331-3038-00	EARTH PLATE	2
10	----------	NAVI PWB	1
11	----------	JOINT PWB	1
12	092-2211-00	ANT-RECEPT	1
13	309-0842-80	FRONT PLATE	1
14	312-0485-80	LOWER CHASSIS	1
15	312-0488-80	SIDE CHASSIS-R	1
16	312-0489-80	SIDE SHASSIS-L	1
17	312-0484-80	UPPER CHASSIS	1
18	310-1861-80	UPPER CASE	1
19	313-2010-81	HEAT SINK	1
20	929-2506-00	DIGITAL-MECH	1
21	335-7016-80	HDD GUIDE-R	1
22	335-7017-80	HDD GUIDE-L	1
23	347-8346-00	COVER FILM	1
24	039-2982-10	FPC	1
25	039-2983-00	FPC	1
26	347-8345-00	LOWER SHEET	1
27	020-3051-01	DC-MOTOR	1
28	780-2614-50	SCREW(M2.6x14 SEALOCK)	3
29	345-6120-00	HEAT RUBBER	1

NO.	PART NO.	DESCRIPTION	Q'TY
30	331-3664-01	SHIELD CASE	1
31	331-4400-00	PWB PLATE	1
32	020-3052-03	DC-MOTOR	1
33	345-6119-00	HEAT RUBBER	1
34	780-2604-50	IT SCREW(M2.6x4)	8
35	731-2608-8B	TAPTIGHT(M2.6x8)	4
36	714-2604-8B	MACHINE SCREW(2.6x4)	27
37	780-2604-51	SCREW(M2.6x4)	15
38	714-2610-8B	MACHINE SCREW(M2.6x10)	12
39	345-6121-00	HEAT RUBBER	1
40	347-7924-00	MASK PART	3
41	716-3577-00	DECORATIVE-SCREW	2
42	335-7903-00	BUSH	2
43	331-3659-80	HDD CASE	1
44	276-0487-00	SETPLATE	1
45	313-2011-80	HEAT SINK	1
46	----------	HARD DISC DRIVE(40GB)	1
47	347-7963-00	HDD PULL SHEET	1
48	331-3660-81	HDD BRKT	1
49	716-3503-50	SCREW(M3x4)	4
50	345-6124-00	CUSHION	1
51	347-8559-00	COVER FILM	1
52	780-3006-51	SCREW(M3x6)	3
53	345-6138-00	CUSHION	1
54	345-6137-00	CUSHION	1
55	331-4415-00	SHIELD CASE	1
56	331-2978-00	EARTH PLATE	1
57	345-6122-00	SPACER RUBBER	1
58	345-6123-00	SPACER RUBBER	1

Escutcheon section

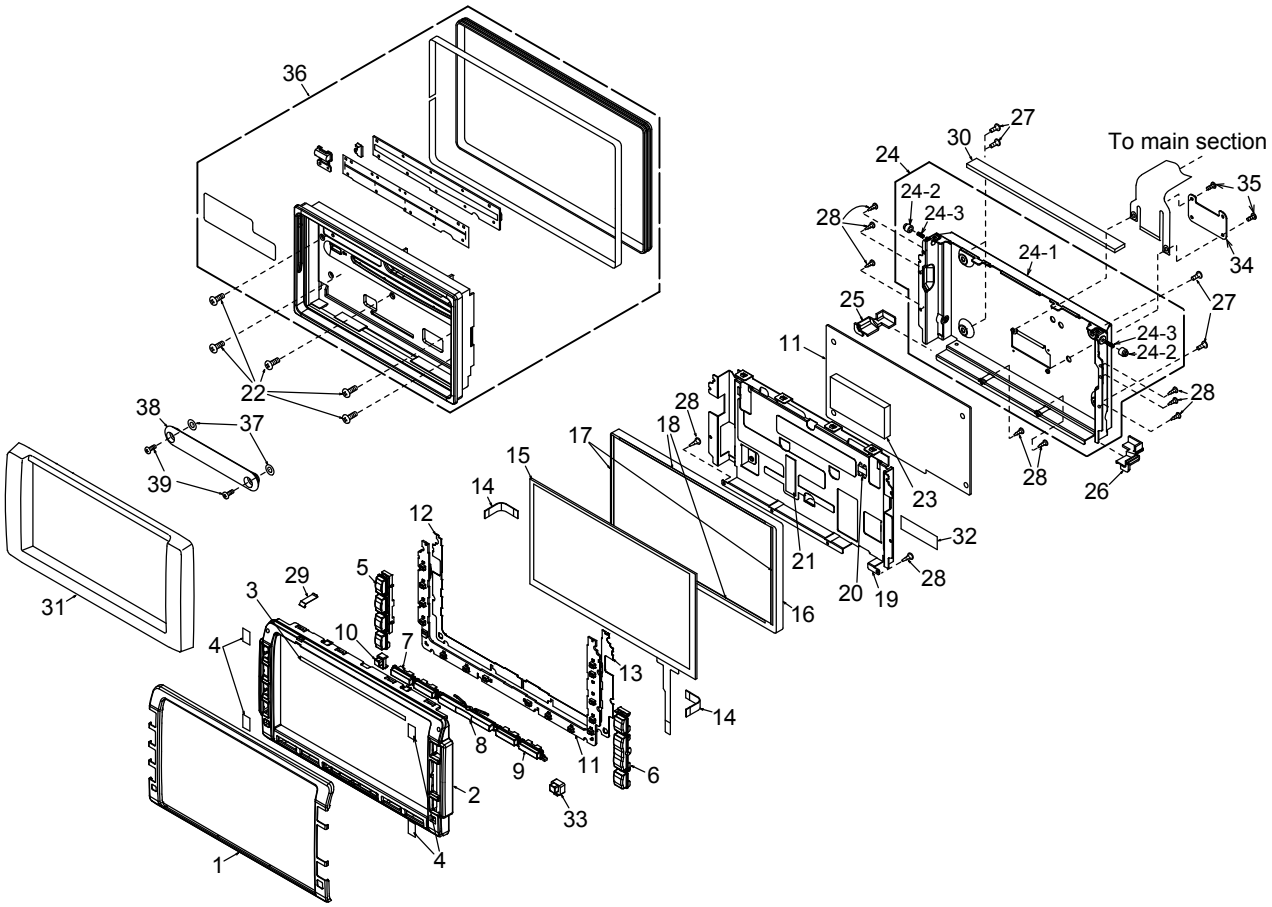

* Do not reuse the screw of SEALOCK.

NO.	PART NO.	DESCRIPTION	Q'TY
1	383-0747-30	TRIM PLATE	1
2	370-6220-31	ESCUTCHEON	1
3	347-8087-00	W-FACE L	1
4	347-8088-00	W-FACE S	4
5	382-7896-21	BUTTON(SRC/INF/SET/V)	1
6	382-7897-21	BUTTON(AUDIO/VOL/OP)	1
7	382-7898-20	BUTTON(MENU/MAP)	1
8	382-7899-20	BUTTON(IN/OUT)	1
9	382-7900-20	BUTTON(DN/UP)	1
10	335-7810-00	IR-FILTERRT	1
11	----------	LCD PWB	1
12	347-8089-00	INSULATOR	1
13	347-8090-00	INSULATOR	1
14	816-3030-55	FLAT WIRE	2
15	013-9718-00	SWITCH	1
16	379-0471-00	INDICATOR	1
17	347-7038-20	SPACER	2
18	347-7423-00	SPACER	2
19	331-4251-80	LCD HOLDER	1
20	331-3038-10	EARTH PLATE	1
21	347-8558-00	DOUBLE FACE	1

NO.	PART NO.	DESCRIPTION	Q'TY
22	780-2604-52	SCREW(M2.6x4 SEALOCK)	5
23	331-3672-11	SHIELD CASE	1
24	948-0769-80	REAR-CVR-ASSY	1
24-1	----------	REAR COVER	1
24-2	335-7306-00	ROLLER	2
24-3	750-6746-00	ROLLER SPRING	2
25	335-7811-00	PROTECTOR-L	1
26	335-7812-00	PROTECTOR-R	1
27	716-1611-50	SCREW(M2.6x4)	4
28	716-0872-52	PAD SCREW(M1.7x5)	10
29	331-4347-00	SURGE PLATE	1
30	345-5849-00	CUSHION RUBBER	1
31	347-8083-00	PROTECT PART	1
32	347-8091-00	TP SHEET	1
33	335-8381-00	INDICATOR	1
34	039-1742-00	PWB(REAR-CVR)	1
35	716-1851-00	SCREW(M2x3)	2
36	940-8452-00	IN-ES-ASSY	1
37	746-0942-00	WASHER	2
38	383-0762-80	HDD COVER	1
39	716-3620-00	SCREW(M3x10)	2

ELECTRICAL PARTS LIST

NAVI PWB(B1) section

Note) Several different parts of the same reference number are alternative parts. One of those parts is used in the set.

REF No.	PART No.	DESCRIPTION
ANT1101	092-2203-00	ANT-RECEPT
BAT1000	088-0060-00	CR2354/1VC
BL1001	060-8076-00	GPS RECEIVER
BL1101	880-1431E	RDS/TMC-TUNER-PACK
C101	046-1042-78	0.1uF
C102	043-0603-90	16V 10uF
C103	168-1052-78	16V 1uF
C104	042-1726-90	6.3V 100uF
C105	168-1052-78	16V 1uF
C106	042-1726-90	6.3V 100uF
C107	168-1052-78	16V 1uF
C108	046-1042-78	0.1uF
C109	168-1052-78	16V 1uF
C110	046-1042-78	0.1uF
C111	046-1042-78	0.1uF
C112	046-1042-78	0.1uF
C113	046-1042-78	0.1uF
C114	046-1042-78	0.1uF
C115	046-1042-78	0.1uF
C116	166-1011-50	100pF CH
C117	046-1042-78	0.1uF
C118	046-1042-78	0.1uF
C119	166-1011-50	100pF CH
C120	042-1726-90	6.3V 100uF
C121	168-1052-78	16V 1uF
C122	046-1042-78	0.1uF
C123	046-1042-78	0.1uF
C124	046-1042-78	0.1uF
C125	046-1042-78	0.1uF
C126	046-1042-78	0.1uF
C127	046-1042-78	0.1uF
C128	046-1042-78	0.1uF
C129	046-1042-78	0.1uF
C130	046-1042-78	0.1uF
C131	046-1042-78	0.1uF
C132	046-1042-78	0.1uF
C133	166-1011-50	100pF CH
C134	046-1042-78	0.1uF
C135	046-1042-78	0.1uF
C136	046-1042-78	0.1uF
C137	046-1042-78	0.1uF
C138	046-1042-78	0.1uF
C139	166-1011-50	100pF CH
C140	046-1042-78	0.1uF
C141	046-1042-78	0.1uF
C142	046-1042-78	0.1uF
C143	166-1011-50	100pF CH
C144	166-1011-50	100pF CH
C145	046-1042-78	0.1uF
C146	046-1042-78	0.1uF
C147	042-1726-90	6.3V 100uF
C148	046-1042-78	0.1uF
C149	166-2201-50	22pF CH
C150	046-1042-78	0.1uF
C151	043-0603-90	16V 10uF
C152	046-1042-78	0.1uF
C153	046-1042-78	0.1uF
C154	046-1042-78	0.1uF
C155	046-1042-78	0.1uF
C156	046-1042-78	0.1uF
C157	046-1042-78	0.1uF
C158	166-1011-50	100pF CH
C159	046-1042-78	0.1uF
C160	046-1042-78	0.1uF
C161	046-1042-78	0.1uF
C162	046-1042-78	0.1uF
C163	046-1042-78	0.1uF
C164	046-1042-78	0.1uF
C165	046-1042-78	0.1uF
C166	046-1042-78	0.1uF
C167	046-1042-78	0.1uF
C168	046-1042-78	0.1uF
C169	166-1011-50	100pF CH
C170	046-1042-78	0.1uF
C171	046-1042-78	0.1uF
C172	046-1042-78	0.1uF
C173	046-1042-78	0.1uF
C174	046-1042-78	0.1uF
C175	046-1042-78	0.1uF
C176	046-1042-78	0.1uF
C177	046-1042-78	0.1uF
C178	046-1042-78	0.1uF
C179	046-1042-78	0.1uF
C180	046-1042-78	0.1uF
C181	043-0603-90	16V 10uF
C182	168-1022-55	1000pF K
C183	046-1042-78	0.1uF
C185	166-1011-50	100pF CH
C188	168-1022-55	1000pF K
C189	166-1011-50	100pF CH
C190	166-1011-50	100pF CH
C191	046-1042-78	0.1uF
C192	046-1042-78	0.1uF
C193	166-1011-50	100pF CH
C194	046-1042-78	0.1uF
C195	046-1042-78	0.1uF
C196	046-1042-78	0.1uF
C197	046-1042-78	0.1uF
C198	046-1042-78	0.1uF
C200	168-1052-78	16V 1uF
C201	043-0603-90	16V 10uF
C202	043-0603-90	16V 10uF
C203	046-1042-78	0.1uF
C204	166-1011-50	100pF CH
C205	046-1042-78	0.1uF
C206	166-1011-50	100pF CH
C207	046-1042-78	0.1uF
C208	166-1011-50	100pF CH
C209	046-1042-78	0.1uF
C210	166-1011-50	100pF CH
C211	166-1011-50	100pF CH
C212	046-1042-78	0.1uF
C213	166-1011-50	100pF CH
C214	046-1042-78	0.1uF
C215	046-1042-78	0.1uF
C216	166-1011-50	100pF CH
C217	046-1042-78	0.1uF
C218	166-1011-50	100pF CH
C219	166-1011-50	100pF CH
C220	046-1042-78	0.1uF
C221	166-1011-50	100pF CH
C222	046-1042-78	0.1uF
C223	046-1042-78	0.1uF
C224	166-1011-50	100pF CH
C225	046-1042-78	0.1uF
C226	166-1011-50	100pF CH
C227	046-1042-78	0.1uF
C228	046-1042-78	0.1uF
C229	046-1042-78	0.1uF
C230	166-1011-50	100pF CH
C231	046-1042-78	0.1uF
C232	166-1011-50	100pF CH
C233	046-1042-78	0.1uF
C234	046-1042-78	0.1uF
C235	046-1042-78	0.1uF
C236	166-1011-50	100pF CH
C237	046-1042-78	0.1uF
C238	166-1011-50	100pF CH
C239	043-0603-90	16V 10uF
C240	043-0603-90	16V 10uF
C241	046-1042-78	0.1uF
C242	166-1011-50	100pF CH
C243	046-1042-78	0.1uF
C244	166-1011-50	100pF CH
C245	046-1042-78	0.1uF
C246	166-1011-50	100pF CH
C247	046-1042-78	0.1uF
C248	166-1011-50	100pF CH
C249	166-1011-50	100pF CH
C250	046-1042-78	0.1uF
C251	166-1011-50	100pF CH
C252	046-1042-78	0.1uF
C253	046-1042-78	0.1uF
C254	166-1011-50	100pF CH
C255	046-1042-78	0.1uF
C256	166-1011-50	100pF CH
C257	166-1011-50	100pF CH
C258	046-1042-78	0.1uF
C259	166-1011-50	100pF CH
C260	046-1042-78	0.1uF
C261	046-1042-78	0.1uF
C262	166-1011-50	100pF CH
C263	046-1042-78	0.1uF
C264	166-1011-50	100pF CH
C265	046-1042-78	0.1uF
C266	046-1042-78	0.1uF
C267	046-1042-78	0.1uF
C268	166-1011-50	100pF CH
C269	046-1042-78	0.1uF
C270	166-1011-50	100pF CH
C271	046-1042-78	0.1uF
C272	046-1042-78	0.1uF
C273	046-1042-78	0.1uF
C274	166-1011-50	100pF CH
C275	046-1042-78	0.1uF
C276	166-1011-50	100pF CH
C277	042-1726-90	6.3V 100uF
C278	046-1042-78	0.1uF
C401	043-0603-90	16V 10uF
C402	168-4745-79	0.47uF Z
C403	166-1011-50	100pF CH
C404	046-1042-78	0.1uF
C405	046-1042-78	0.1uF
C406	046-1042-78	0.1uF
C407	046-1042-78	0.1uF
C408	046-1042-78	0.1uF
C409	043-0603-90	16V 10uF
C410	046-1042-78	0.1uF
C411	168-4745-79	0.47uF Z
C412	166-1011-50	100pF CH
C413	166-1011-50	100pF CH
C414	166-1011-50	100pF CH
C415	166-1011-50	100pF CH
C416	166-1011-50	100pF CH
C417	166-1011-50	100pF CH
C424	166-1011-50	100pF CH
C425	046-1042-78	0.1uF
C427	166-1011-50	100pF CH
C429	168-1022-55	1000pF K
C440	046-1042-78	0.1uF
C450	168-1022-55	1000pF K
C452	046-1042-78	0.1uF
C454	046-1042-78	0.1uF
C455	046-1042-78	0.1uF
C502	046-1042-78	0.1uF
C503	046-1042-78	0.1uF
C504	046-1042-78	0.1uF
C505	046-1042-78	0.1uF
C506	046-1042-78	0.1uF
C507	046-1042-78	0.1uF
C508	046-1042-78	0.1uF
C509	046-1042-78	0.1uF

REF No.	PART No.	DESCRIPTION
C510	046-1042-78	0.1uF
C511	046-1042-78	0.1uF
C512	046-1042-78	0.1uF
C513	046-1042-78	0.1uF
C514	046-1042-78	0.1uF
C515	046-1042-78	0.1uF
C516	046-1042-78	0.1uF
C517	046-1042-78	0.1uF
C518	046-1042-78	0.1uF
C520	042-0416-57	10V 47uF M TAN
C521	046-1042-78	0.1uF
C522	042-0416-57	10V 47uF M TAN
C523	046-1042-78	0.1uF
C525	042-0416-57	10V 47uF M TAN
C529	168-1022-55	1000pF K
C538	166-1011-50	100pF CH
C539	166-1011-50	100pF CH
C540	166-1011-50	100pF CH
C541	166-1011-50	100pF CH
C542	166-1011-50	100pF CH
C543	166-1011-50	100pF CH
C544	166-1011-50	100pF CH
C545	166-1011-50	100pF CH
C546	166-1011-50	100pF CH
C547	166-1011-50	100pF CH
C548	166-1011-50	100pF CH
C549	166-1011-50	100pF CH
C550	166-1011-50	100pF CH
C551	166-1011-50	100pF CH
C552	166-1011-50	100pF CH
C553	166-1011-50	100pF CH
C601	046-1042-78	0.1uF
C602	166-1011-50	100pF CH
C603	166-1011-50	100pF CH
C604	046-1042-78	0.1uF
C605	043-0603-90	16V 10uF
C606	166-1011-50	100pF CH
C607	046-1042-78	0.1uF
C608	043-0603-90	16V 10uF
C609	046-1042-78	0.1uF
C610	042-1726-90	6.3V 100uF
C611	046-1042-78	0.1uF
C612	046-1042-78	0.1uF
C613	046-1042-78	0.1uF
C614	046-1042-78	0.1uF
C615	046-1042-78	0.1uF
C616	046-1042-78	0.1uF
C617	046-1042-78	0.1uF
C618	046-1042-78	0.1uF
C619	046-1042-78	0.1uF
C620	046-1042-78	0.1uF
C621	046-1042-78	0.1uF
C622	046-1042-78	0.1uF
C623	042-1726-90	6.3V 100uF
C624	046-1042-78	0.1uF
C625	046-1042-78	0.1uF
C626	046-1042-78	0.1uF
C627	046-1042-78	0.1uF
C628	046-1042-78	0.1uF
C629	046-1042-78	0.1uF
C630	046-1042-78	0.1uF
C631	046-1042-78	0.1uF
C632	046-1042-78	0.1uF
C633	046-1042-78	0.1uF
C634	046-1042-78	0.1uF
C635	046-1042-78	0.1uF
C636	046-1042-78	0.1uF
C637	046-1042-78	0.1uF
C638	046-1042-78	0.1uF
C639	046-1042-78	0.1uF
C640	046-1042-78	0.1uF
C641	046-1042-78	0.1uF
C642	046-1042-78	0.1uF

REF No.	PART No.	DESCRIPTION
C643	046-1042-78	0.1uF
C645	046-1042-78	0.1uF
C646	046-1042-78	0.1uF
C647	046-1042-78	0.1uF
C648	046-1042-78	0.1uF
C649	046-1042-78	0.1uF
C650	046-1042-78	0.1uF
C651	046-1042-78	0.1uF
C652	046-1042-78	0.1uF
C653	046-1042-78	0.1uF
C654	046-1042-78	0.1uF
C655	046-1042-78	0.1uF
C656	046-1042-78	0.1uF
C657	046-1042-78	0.1uF
C658	046-1042-78	0.1uF
C659	046-1042-78	0.1uF
C660	043-0603-90	16V 10uF
C661	046-1042-78	0.1uF
C662	046-1042-78	0.1uF
C663	046-1042-78	0.1uF
C664	046-1042-78	0.1uF
C665	046-1042-78	0.1uF
C666	046-1042-78	0.1uF
C667	046-1042-78	0.1uF
C668	046-1042-78	0.1uF
C669	046-1042-78	0.1uF
C670	046-1042-78	0.1uF
C671	046-1042-78	0.1uF
C672	046-1042-78	0.1uF
C673	046-1042-78	0.1uF
C674	046-1042-78	0.1uF
C675	046-1042-78	0.1uF
C676	046-1042-78	0.1uF
C677	046-1042-78	0.1uF
C678	046-1042-78	0.1uF
C680	046-1042-78	0.1uF
C681	043-0603-90	16V 10uF
C682	166-1011-50	100pF CH
C683	166-1011-50	100pF CH
C684	166-1011-50	100pF CH
C685	166-1011-50	100pF CH
C686	166-1011-50	100pF CH
C687	166-1011-50	100pF CH
C688	166-1011-50	100pF CH
C689	166-1011-50	100pF CH
C690	166-1011-50	100pF CH
C691	166-1011-50	100pF CH
C692	166-1011-50	100pF CH
C693	166-1011-50	100pF CH
C694	166-1011-50	100pF CH
C695	166-1011-50	100pF CH
C696	166-1011-50	100pF CH
C697	166-1011-50	100pF CH
C698	166-1011-50	100pF CH
C699	166-1011-50	100pF CH
C702	168-4745-79	0.47uF Z
C703	043-0603-90	16V 10uF
C706	046-1042-78	0.1uF
C709	046-1042-78	0.1uF
C710	046-1042-78	0.1uF
C711	046-1042-78	0.1uF
C713	046-1042-78	0.1uF
C715	168-1045-56	25V 0.1uF
C718	168-1032-55	0.01uF K
C719	165-1063-35	16V 10uF
C720	168-1022-55	1000pF K
C730	168-4745-79	0.47uF Z
C731	046-1042-78	0.1uF
C732	166-1011-50	100pF CH
C733	046-1042-78	0.1uF
C734	046-1042-78	0.1uF
C735	168-4745-79	0.47uF Z
C736	168-4745-79	0.47uF Z

REF No.	PART No.	DESCRIPTION
C737	046-1042-78	0.1uF
C739	043-0603-90	16V 10uF
C801	043-0603-90	16V 10uF
C802	043-0603-90	16V 10uF
C803	046-1042-78	0.1uF
C804	046-1042-78	0.1uF
C805	046-1042-78	0.1uF
C806	046-1042-78	0.1uF
C807	166-1201-50	12pF CH
C808	166-1201-50	12pF CH
C809	046-1042-78	0.1uF
C810	046-1042-78	0.1uF
C811	168-1032-55	0.01uF K
C812	168-8232-78	0.082uF K
C813	043-0603-90	16V 10uF
C814	168-1045-56	25V 0.1uF
C815	046-1042-78	0.1uF
C816	168-1042-78	16V 0.1uF
C817	046-1042-78	0.1uF
C819	168-1042-78	16V 0.1uF
C820	168-1042-78	16V 0.1uF
C831	168-1045-56	25V 0.1uF
C832	043-0603-90	16V 10uF
C833	168-1042-78	16V 0.1uF
C834	168-1042-78	16V 0.1uF
C835	166-1011-50	100pF CH
C836	166-1011-50	100pF CH
C837	166-1011-50	100pF CH
C838	168-1022-55	1000pF K
C839	166-1011-50	100pF CH
C840	166-1011-50	100pF CH
C841	166-1011-50	100pF CH
C901	046-1042-78	0.1uF
C902	046-1042-78	0.1uF
C903	046-1042-78	0.1uF
C904	046-1042-78	0.1uF
C905	043-0603-90	16V 10uF
C906	046-1042-78	0.1uF
C907	046-1042-78	0.1uF
C908	165-1073-35	16V 100uF
C909	168-1045-56	25V 0.1uF
C950	168-1022-55	1000pF K
C990	168-1022-55	1000pF K
C991	166-1011-50	100pF CH
C1001	166-1011-50	100pF CH
C1002	168-1045-56	25V 0.1uF
C1003	166-1011-50	100pF CH
C1004	168-1045-56	25V 0.1uF
C1005	043-0603-90	16V 10uF
C1006	166-1011-50	100pF CH
C1007	168-1045-56	25V 0.1uF
C1008	165-1063-35	16V 10uF
C1009	168-1045-56	25V 0.1uF
C1010	168-4745-79	0.47uF Z
C1011	168-1045-56	25V 0.1uF
C1012	043-0603-90	16V 10uF
C1013	168-1045-56	25V 0.1uF
C1014	168-1032-55	0.01uF K
C1015	168-1032-55	0.01uF K
C1016	168-1032-55	0.01uF K
C1017	168-1032-55	0.01uF K
C1022	046-1042-78	0.1uF
C1023	168-1045-56	25V 0.1uF
C1024	166-2211-50	220pF CH
C1025	166-2211-50	220pF CH
C1026	166-2211-50	220pF CH
C1044	168-1045-56	25V 0.1uF
C1101	166-1801-50	18pF CH
C1102	168-1045-56	25V 0.1uF
C1103	166-1011-50	100pF CH
C1104	168-1032-55	0.01uF K
C1106	168-1045-56	25V 0.1uF
C1107	166-1011-50	100pF CH

REF No.	PART No.	DESCRIPTION
C1108	168-1045-56	25V 0.1uF
C1109	168-1045-56	25V 0.1uF
C1110	166-1011-50	100pF CH
C1111	168-1022-55	1000pF K
C1112	165-1073-35	16V 100uF
C1113	043-0603-90	16V 10uF
C1117	168-1045-56	25V 0.1uF
C1118	168-1045-56	25V 0.1uF
C1119	165-1063-35	16V 10uF
C1120	166-6811-50	680pF
C1121	168-1045-56	25V 0.1uF
C1122	166-8211-50	820pF
C1123	168-1032-55	0.01uF K
C1124	043-0603-90	16V 10uF
C1125	168-2232-55	0.022uF K
C1126	168-1032-55	0.01uF K
C1127	043-0603-90	16V 10uF
C1128	043-0603-90	16V 10uF
C1129	043-0603-90	16V 10uF
C1130	166-4701-50	47pF CH
C1131	166-4701-50	47pF CH
C1132	166-4701-50	47pF CH
C1133	166-5601-50	56pF CH
C1136	168-1045-56	25V 0.1uF
C1137	166-5611-50	560pF CH
C1138	168-1045-56	25V 0.1uF
C1139	166-3311-50	330pF CH
C1140	043-0605-90	10V 2.2uF
C1141	166-1011-50	100pF CH
C1142	043-0603-90	16V 10uF
C1147	043-0603-90	16V 10uF
C1201	043-0548-50	10V 2.2uF
C1202	168-1045-56	25V 0.1uF
C1203	043-0603-90	16V 10uF
C1204	168-1045-56	25V 0.1uF
C1205	168-1045-56	25V 0.1uF
C1206	168-1045-56	25V 0.1uF
C1207	043-0603-90	16V 10uF
C1208	043-0603-90	16V 10uF
C1209	168-1045-56	25V 0.1uF
C1210	043-0603-90	16V 10uF
C1211	043-0603-90	16V 10uF
C1212	168-1045-56	25V 0.1uF
C1213	168-4745-79	0.47uF Z
C1214	043-0603-90	16V 10uF
C1215	043-0548-50	10V 2.2uF
C1216	165-1063-35	16V 10uF
C1217	168-1045-56	25V 0.1uF
C1218	166-2721-50	2700pFJ CH
C1219	168-1045-56	25V 0.1uF
C1220	166-2221-50	2200pF CH
C1221	168-1032-55	0.01uF K
C1222	166-2211-50	220pF CH
C1223	043-0603-90	16V 10uF
C1224	168-6822-55	6800pF K
C1225	166-1211-50	120pF CH
C1226	043-0548-50	10V 2.2uF
C1227	168-1042-78	16V 0.1uF
C1229	168-1042-78	16V 0.1uF
C1230	165-1063-35	16V 10uF
C1231	165-1063-35	16V 10uF
C1232	168-1032-55	0.01uF K
C1233	043-0548-50	10V 2.2uF
C1234	166-1011-50	100pF CH
C1236	165-1063-35	16V 10uF
C1237	043-0603-90	16V 10uF
C1238	168-1032-55	0.01uF K
C1301	165-1063-35	16V 10uF
C1302	168-1022-55	1000pF K
C1304	168-1045-56	25V 0.1uF
C1305	165-1063-35	16V 10uF
C1306	189-4783-31	16V 4700uF
C1307	042-0423-97	16V 10uF

REF No.	PART No.	DESCRIPTION
C1308	168-1045-56	25V 0.1uF
C1310	168-1045-56	25V 0.1uF
C1311	166-1211-50	120pF CH
C1312	165-1073-35	16V 100uF
C1313	043-0605-90	10V 2.2uF
C1314	168-1045-56	25V 0.1uF
C1315	043-0604-90	25V 10uF B
C1316	043-0605-90	10V 2.2uF
C1317	043-0604-90	25V 10uF B
C1318	042-0423-97	16V 10uF
C1319	043-0604-90	25V 10uF B
C1320	043-0604-90	25V 10uF B
C1321	043-0604-90	25V 10uF B
C1322	168-1022-55	1000pF K
C1323	043-0604-90	25V 10uF B
C1324	042-1750-90	16V 100uF M
C1325	168-1032-55	0.01uF K
C1326	168-1045-56	25V 0.1uF
C1327	043-0574-90	25V 1.0uF
C1328	043-0568-90	25V 2.2uF
C1331	168-1022-55	1000pF K
C1332	166-1211-50	120pF CH
C1333	165-1073-35	16V 100uF
C1334	168-1045-56	25V 0.1uF
C1335	166-3321-50	3300pFJ CH
C1336	168-3322-55	3300pF K
C1337	166-6811-50	680pF
C1338	168-1032-55	0.01uF K
C1339	166-6801-50	68pF CH
C1340	168-1045-56	25V 0.1uF
C1341	168-1045-56	25V 0.1uF
C1342	168-1032-55	0.01uF K
C1343	166-6811-50	680pF
C1344	168-3922-55	3900pF K
C1345	166-5601-50	56pF CH
C1346	166-2221-50	2200pF CH
C1347	166-1221-50	1200pF CH
C1348	042-1726-90	6.3V 100uF
C1349	043-0568-90	25V 2.2uF
C1350	168-1045-56	25V 0.1uF
C1351	168-1045-56	25V 0.1uF
C1352	168-1045-56	25V 0.1uF
C1353	168-1045-56	25V 0.1uF
C1355	168-1052-78	16V 1uF
C1356	168-1045-56	25V 0.1uF
C1357	168-1045-56	25V 0.1uF
C1358	168-1045-56	25V 0.1uF
C1359	042-0423-97	16V 10uF
C1360	168-1045-56	25V 0.1uF
C1361	042-1726-90	6.3V 100uF
C1362	043-0603-90	16V 10uF
C1363	042-1726-90	6.3V 100uF
C1364	168-1045-56	25V 0.1uF
C1366	042-1726-90	6.3V 100uF
C1368	043-0574-90	25V 1.0uF
C1369	043-0574-90	25V 1.0uF
C1370	168-1045-56	25V 0.1uF
C1372	043-0603-90	16V 10uF
C1373	043-0603-90	16V 10uF
C1374	043-0605-90	10V 2.2uF
C1375	043-0605-90	10V 2.2uF
C1402	168-1045-56	25V 0.1uF
C1407	043-0604-90	25V 10uF B
C1410	166-4711-50	470pF CH
C1411	166-4711-50	470pF CH
C1413	168-1045-56	25V 0.1uF
C1414	046-1042-78	0.1uF
C1415	046-1042-78	0.1uF
C1416	043-0603-90	16V 10uF
C1417	043-0603-90	16V 10uF
C1424	043-0603-90	16V 10uF
C1425	043-0603-90	16V 10uF
C1426	168-1045-56	25V 0.1uF

REF No.	PART No.	DESCRIPTION
C1431	043-0603-90	16V 10uF
C1433	168-1045-56	25V 0.1uF
C1434	168-1045-56	25V 0.1uF
C1437	168-1045-56	25V 0.1uF
C1443	168-1045-56	25V 0.1uF
C1448	189-2283-32	16V 2200uF
C1450	168-1045-56	25V 0.1uF
C1487	166-1011-50	100pF CH
C1488	166-1011-50	100pF CH
C1491	168-1045-56	25V 0.1uF
C1492	168-1045-56	25V 0.1uF
C1495	168-1045-56	25V 0.1uF
C1496	043-0603-90	16V 10uF
C1498	043-0603-90	16V 10uF
C1499	168-1045-56	25V 0.1uF
C1501	168-1032-55	0.01uF K
C1502	168-1045-56	25V 0.1uF
C1503	168-1045-56	25V 0.1uF
C1504	166-1011-50	100pF CH
C1505	168-3332-78	0.033uF K
C1506	168-1022-55	1000pF K
C1507	168-1045-56	25V 0.1uF
C1509	166-1011-50	100pF CH
C1511	168-1032-55	0.01uF K
C1512	168-1032-55	0.01uF K
C1513	168-1045-56	25V 0.1uF
C1514	168-1022-55	1000pF K
C1515	168-1022-55	1000pF K
C1516	168-1032-55	0.01uF K
C1517	168-1045-56	25V 0.1uF
C1518	046-1042-78	0.1uF
C1519	168-2232-55	0.022uF K
C1520	165-4763-15	6.3V 47uF
C1521	168-1045-56	25V 0.1uF
C1522	168-1045-56	25V 0.1uF
C1523	168-1045-56	25V 0.1uF
C1525	168-1022-55	1000pF K
C1526	165-4763-15	6.3V 47uF
C1527	165-4763-15	6.3V 47uF
CCT101	050-0140-66	1/32W 47 ohm x4J
CCT102	050-0140-69	1/32W 56 ohm x4J
CCT103	050-0140-69	1/32W 56 ohm x4J
CCT104	050-0140-69	1/32W 56 ohm x4J
CCT105	050-0140-69	1/32W 56 ohm x4J
CCT106	050-0140-69	1/32W 56 ohm x4J
CCT107	050-0140-69	1/32W 56 ohm x4J
CCT108	050-0140-69	1/32W 56 ohm x4J
CCT109	050-0140-69	1/32W 56 ohm x4J
CCT110	050-0140-69	1/32W 56 ohm x4J
CCT111	050-0140-69	1/32W 56 ohm x4J
CCT115	050-0140-57	1/32W 10k ohm x4J
CCT117	050-0140-57	1/32W 10k ohm x4J
CCT118	050-0140-57	1/32W 10k ohm x4J
CCT119	050-0140-57	1/32W 10k ohm x4J
CCT120	050-0140-57	1/32W 10k ohm x4J
CCT121	050-0140-56	1/32W 4.7k ohm x4J
CCT125	050-0140-51	1/32W 22 ohm x4J
CCT126	050-0140-51	1/32W 22 ohm x4J
CCT127	050-0140-52	1/32W 100 ohm x4J
CCT128	050-0140-57	1/32W 10k ohm x4J
CCT129	050-0140-57	1/32W 10k ohm x4J
CCT130	050-0140-52	1/32W 100 ohm x4J
CCT131	050-0140-57	1/32W 10k ohm x4J
CCT132	050-0140-52	1/32W 100 ohm x4J
CCT133	050-0140-52	1/32W 100 ohm x4J
CCT134	050-0140-57	1/32W 10k ohm x4J
CCT135	050-0140-57	1/32W 10k ohm x4J
CCT136	050-0140-57	1/32W 10k ohm x4J
CCT137	050-0140-59	1/32W 33 ohm x4J
CCT138	050-0140-57	1/32W 10k ohm x4J
CCT139	050-0140-66	1/32W 47 ohm x4J
CCT140	050-0140-52	1/32W 100 ohm x4J
CCT141	050-0140-57	1/32W 10k ohm x4J

REF No.	PART No.	DESCRIPTION
CCT300	050-0140-66	1/32W 47 ohm x4J
CCT301	050-0140-66	1/32W 47 ohm x4J
CCT302	050-0140-66	1/32W 47 ohm x4J
CCT303	050-0140-66	1/32W 47 ohm x4J
CCT304	050-0140-66	1/32W 47 ohm x4J
CCT305	050-0140-66	1/32W 47 ohm x4J
CCT306	050-0140-66	1/32W 47 ohm x4J
CCT307	050-0140-66	1/32W 47 ohm x4J
CCT308	050-0140-66	1/32W 47 ohm x4J
CCT309	050-0140-66	1/32W 47 ohm x4J
CCT310	050-0140-66	1/32W 47 ohm x4J
CCT311	050-0140-66	1/32W 47 ohm x4J
CCT312	050-0140-66	1/32W 47 ohm x4J
CCT313	050-0140-66	1/32W 47 ohm x4J
CCT314	050-0140-66	1/32W 47 ohm x4J
CCT315	050-0140-66	1/32W 47 ohm x4J
CCT332	050-0140-51	1/32W 22 ohm x4J
CCT333	050-0140-51	1/32W 22 ohm x4J
CCT334	050-0140-51	1/32W 22 ohm x4J
CCT335	050-0140-51	1/32W 22 ohm x4J
CCT336	050-0140-51	1/32W 22 ohm x4J
CCT401	050-0140-51	1/32W 22 ohm x4J
CCT402	050-0140-51	1/32W 22 ohm x4J
CCT403	050-0140-51	1/32W 22 ohm x4J
CCT404	050-0140-51	1/32W 22 ohm x4J
CCT405	050-0140-69	1/32W 56 ohm x4J
CCT406	050-0140-69	1/32W 56 ohm x4J
CCT407	050-0140-69	1/32W 56 ohm x4J
CCT408	050-0140-69	1/32W 56 ohm x4J
CCT501	050-0140-71	1/32W 82 ohm x4J
CCT601	050-0140-69	1/32W 56 ohm x4J
CCT602	050-0140-69	1/32W 56 ohm x4J
CCT603	050-0140-69	1/32W 56 ohm x4J
CCT604	050-0140-69	1/32W 56 ohm x4J
CCT605	050-0140-52	1/32W 100 ohm x4J
CCT606	050-0140-52	1/32W 100 ohm x4J
CCT607	050-0140-52	1/32W 100 ohm x4J
CCT608	050-0140-52	1/32W 100 ohm x4J
CCT609	050-0140-52	1/32W 100 ohm x4J
CCT610	050-0140-52	1/32W 100 ohm x4J
CCT611	050-0140-63	1/32W 47k ohm x4J
CCT612	050-0140-63	1/32W 47k ohm x4J
CCT613	050-0140-63	1/32W 47k ohm x4J
CCT614	050-0140-63	1/32W 47k ohm x4J
CCT615	050-0140-69	1/32W 56 ohm x4J
CCT616	050-0140-69	1/32W 56 ohm x4J
CCT617	050-0140-69	1/32W 56 ohm x4J
CCT618	050-0140-69	1/32W 56 ohm x4J
CCT619	050-0140-69	1/32W 56 ohm x4J
CCT620	050-0140-69	1/32W 56 ohm x4J
CCT621	050-0140-69	1/32W 56 ohm x4J
CCT622	050-0140-52	1/32W 100 ohm x4J
CCT623	050-0140-59	1/32W 33 ohm x4J
CCT624	050-0140-59	1/32W 33 ohm x4J
CCT625	050-0140-59	1/32W 33 ohm x4J
CCT626	050-0140-59	1/32W 33 ohm x4J
CCT627	050-0140-59	1/32W 33 ohm x4J
CCT630	050-0140-69	1/32W 56 ohm x4J
CCT631	050-0140-69	1/32W 56 ohm x4J
CCT632	050-0140-69	1/32W 56 ohm x4J
CCT633	050-0140-69	1/32W 56 ohm x4J
CCT701	050-0140-63	1/32W 47k ohm x4J
CCT702	050-0140-70	1/32W 10 ohm x4J
CCT703	050-0140-70	1/32W 10 ohm x4J
CCT704	050-0140-59	1/32W 33 ohm x4J
CCT705	050-0140-69	1/32W 56 ohm x4J
CCT706	050-0140-69	1/32W 56 ohm x4J
CCT707	050-0140-69	1/32W 56 ohm x4J
CCT708	050-0140-69	1/32W 56 ohm x4J
CCT709	050-0140-70	1/32W 10 ohm x4J
CCT710	050-0140-70	1/32W 10 ohm x4J
CCT801	050-0140-69	1/32W 56 ohm x4J
CCT802	050-0140-69	1/32W 56 ohm x4J

REF No.	PART No.	DESCRIPTION
CCT1001	050-0140-51	1/32W 22 ohm x4J
CCT1002	050-0140-51	1/32W 22 ohm x4J
CCT1003	050-0140-57	1/32W 10k ohm x4J
CCT1201	050-0140-59	1/32W 33 ohm x4J
CCT1202	050-0140-59	1/32W 33 ohm x4J
CCT1501	050-0140-54	1/32W 1k ohm x4J
CCT1502	050-0140-63	1/32W 47k ohm x4J
D601	001-2623-90	RB400VA-50TR
D602	001-0580-90	1SS352
D702	001-2630-90	1SS420-TPL3,F
D703	001-2630-90	1SS420-TPL3,F
D1005	001-0584-20	MA8056
D1006	001-4910-91	DF5A5.6F
D1011	001-0584-20	MA8056
D1103	001-2412-90	RR264M-400
D1104	001-0529-16	MA8033-L
D1105	001-0580-90	1SS352
D1106	001-0580-90	1SS352
D1111	001-0584-20	MA8056
D1112	001-0584-20	MA8056
D1113	001-0584-20	MA8056
D1201	001-0529-27	MA8047H
D1202	001-0529-27	MA8047H
D1301	001-2629-90	D1FM3-5063
D1302	001-0580-90	1SS352
D1303	001-2403-90	M1F60
D1304	001-2630-90	1SS420-TPL3,F
D1305	001-2630-90	1SS420-TPL3,F
D1306	001-2630-90	1SS420-TPL3,F
D1307	001-2629-90	D1FM3-5063
D1308	001-2630-90	1SS420-TPL3,F
D1309	001-2630-90	1SS420-TPL3,F
D1310	001-2629-90	D1FM3-5063
D1311	001-2629-90	D1FM3-5063
D1405	001-0367-91	1SS226
D1406	001-0367-91	1SS226
D1407	001-0584-20	MA8056
D1501	001-0580-90	1SS352
D1505	001-2630-90	1SS420-TPL3,F
FIL1001	060-3115-52	CKD310JB1C474ST
FIL1101	060-3114-52	LFA20-2A1
FIL1403	060-3114-52	LFA20-2A1
FIL1404	060-3114-52	LFA20-2A1
FIL1405	060-3114-52	LFA20-2A1
FIL1407	060-3114-52	LFA20-2A1
FIL1408	060-3114-52	LFA20-2A1
FIL1409	060-3114-52	LFA20-2A1
FIL1410	060-3117-51	CKD510JB1E223ST
FIL1411	060-3117-51	CKD510JB1E223ST
IC101	051-7524-38	TC7SZ08FU-TE85L
IC102	051-7522-08	SN74LVC1G32 DCKR
IC103	----------	R8A77700BDA01 BGV (Type BGA 042310-052) (impossible to exchange)
IC104	051-7534-90	SN74LVC1G97DCKR
IC105	051-7539-80	TC7WZ34FU-TE12L
IC106	----------	TC7SZ125F (Type pad 727208-051) (impossible to exchange)
IC107	051-7526-08	SN74LVC1G126 DCKR
IC109	051-7540-80	TC7WZ32FU-TE12L
IC110	051-7537-80	TC7SZ14FU-TH85L
IC200	051-9333-30	MT46V16M16P-6T-IT
IC200	051-9333-70	K4H561638H-UCB3

REF No.	PART No.	DESCRIPTION
IC201	051-9333-30	MT46V16M16P-6T-IT
IC201	051-9333-70	K4H561638H-UCB3
IC202	051-9333-30	MT46V16M16P-6T-IT
IC202	051-9333-70	K4H561638H-UCB3
IC203	051-9333-30	MT46V16M16P-6T-IT
IC203	051-9333-70	K4H561638H-UCB3
IC401	052-3583-00	S29JL032H70TFI320
IC403	051-7503-18	TC74VCXH16245FT-EL
IC404	051-7221-48	TC7SZ04FU
IC405	051-7534-90	SN74LVC1G97 DCKR
IC406	051-9120-50	LP62S16128BV-70LLIF
IC407	051-7539-80	TC7WZ34FU-TE12L
IC408	051-7505-18	SN74ALVC08PWR
IC501	051-6834-00	XC3S50-4VQG100I-0985
IC603	051-7536-90	SN74CBTLV16211 GR
IC604	051-7203-48	SN74LV74APW
IC606	----------	D610A003BPYPA225 (Type pad 671701-051) (impossible to exchange)
IC610	051-7529-90	SN74LVC541APW
IC611	051-9330-00	K4S641632F-TC60
IC612	051-7244-08	TC7WH125FU-TE12L
IC613	051-7503-58	SN74LVC16245 ADGGR
IC614	051-7221-48	TC7SZ04FU
IC615	051-7524-38	TC7SZ08FU-TE85L
IC616	051-7202-28	TC7SH32FU TE85L
IC620	051-7524-38	TC7SZ08FU-TE85L
IC710	051-6651-00	R5C807
IC801	051-6457-00	ADV7180BSTZ
IC901	051-7243-18	TC7SET08FU-TE85L,F
IC902	051-7539-80	TC7WZ34FU-TE12L
IC903	051-7503-78	SN74LVCHR16245A GR
IC0108	051-7505-58	TC74VHC08FT-EL
IC1001	051-6923-38	AD7476ARTZ-REEL7
IC1001	051-6923-58	ADC121S021CIMFX
IC1002	051-7524-38	TC7SZ08FU-TE85L
IC1003	948-0683-11	EWTS86KA11
IC1004	051-7539-80	TC7WZ34FU-TE12L
IC1005	051-7529-80	TC74LCX541FT-EL
IC1008	051-7539-80	TC7WZ34FU-TE12L
IC1101	051-3054-90	HA17558ATEL
IC1102	051-7538-80	TC7WG17FU-TE12L
IC1103	051-3026-90	NJM4580V
IC1104	051-4607-90	SAA6581T
IC1202	051-6718-90	AK5357VT-E2
IC1203	051-3053-90	NJM2058V
IC1204	051-3054-90	HA17558ATEL
IC1205	051-6736-90	WM8728EDS/R
IC1301	051-3304-90	LP2954IMX
IC1302	051-3337-90	BA09CC0WFP
IC1303	051-3298-90	TDA3664/N1
IC1304	051-3377-90	LM3485MM
IC1305	051-3260-00	BA05ST
IC1306	051-3380-90	TPS5120DBTRG4
IC1307	051-3340-00	LD1085P
IC1309	051-3500-90	R1173S001D-E2-F

REF No.	PART No.	DESCRIPTION
IC1402	051-3026-90	NJM4580V
IC1407	051-3407-90	TA75S393F
IC1410	051-7537-80	TC7SZ14FU-TH85L
IC1411	051-7272-08	TC7SZ125F
IC1412	051-6736-90	WM8728EDS/R
IC1501	051-5408-38	R3112N211A-TR
IC1502	052-7086-10	M30615FGAGP
IC1504	051-7505-58	TC74VHC08FT-EL
IC1505	051-7202-28	TC7SH32FU TE85L
IC1506	051-5436-38	BD5233G-TR
IC1508	051-7243-18	TC7SET08FU-TE85L,F
IC1509	051-7293-90	TC7SET125FU-TE85L
IC1510	051-7272-08	TC7SZ125F
J601	074-2201-83	33P
J701	074-8005-00	OUTLET SOCKET
J1101	074-4033-17	OUTLET SOCKET
J1201	075-0339-00	MINI JACK
J1402	074-3014-80	30P
J1403	074-3018-80	30P
J1410	074-1320-05	5P
L101	010-3105-58	120 ohm/100MHz
L102	010-3104-53	220 ohm/100MHz
L103	010-3104-53	220 ohm/100MHz
L104	010-3104-53	220 ohm/100MHz
L105	010-3104-54	600 ohm/100MHz
L106	010-3104-54	600 ohm/100MHz
L107	010-3104-54	600 ohm/100MHz
L108	010-3105-58	120 ohm/100MHz
L200	010-3104-53	220 ohm/100MHz
L401	010-3104-54	600 ohm/100MHz
L402	010-3104-54	600 ohm/100MHz
L509	010-3104-53	220 ohm/100MHz
L510	010-3104-53	220 ohm/100MHz
L511	010-3104-53	220 ohm/100MHz
L601	010-3104-53	220 ohm/100MHz
L602	010-3104-53	220 ohm/100MHz
L603	010-3105-62	1k ohm/100MHz
L604	010-3104-53	220 ohm/100MHz
L605	010-3104-53	220 ohm/100MHz
L701	010-3104-53	220 ohm/100MHz
L801	010-3104-53	220 ohm/100MHz
L802	010-3104-53	220 ohm/100MHz
L803	010-3104-53	220 ohm/100MHz
L805	010-3104-53	220 ohm/100MHz
L901	010-3104-53	220 ohm/100MHz
L902	010-3104-53	220 ohm/100MHz
L1001	010-3104-54	600 ohm/100MHz
L1002	010-3104-54	600 ohm/100MHz
L1003	010-3104-54	600 ohm/100MHz
L1004	010-3104-54	600 ohm/100MHz
L1005	010-3104-54	600 ohm/100MHz
L1006	010-3104-54	600 ohm/100MHz
L1007	010-3104-54	600 ohm/100MHz
L1008	010-3105-62	1k ohm/100MHz
L1009	010-3105-62	1k ohm/100MHz
L1010	010-3105-58	120 ohm/100MHz
L1011	010-3105-58	120 ohm/100MHz
L1012	010-3105-58	120 ohm/100MHz
L1013	010-3105-58	120 ohm/100MHz
L1101	010-3105-62	1k ohm/100MHz
L1102	010-3105-62	1k ohm/100MHz
L1103	010-3105-62	1k ohm/100MHz
L1104	010-3105-62	1k ohm/100MHz
L1105	010-3105-62	1k ohm/100MHz
L1106	010-3105-62	1k ohm/100MHz
L1107	010-3105-62	1k ohm/100MHz
L1108	010-3105-62	1k ohm/100MHz
L1109	010-3105-62	1k ohm/100MHz
L1110	010-3105-62	1k ohm/100MHz
L1111	010-3104-54	600 ohm/100MHz
L1112	010-3104-54	600 ohm/100MHz

REF No.	PART No.	DESCRIPTION
L1113	010-3104-54	600 ohm/100MHz
L1202	010-3104-53	220 ohm/100MHz
L1203	010-3104-53	220 ohm/100MHz
L1205	010-3104-53	220 ohm/100MHz
L1206	010-3104-53	220 ohm/100MHz
L1301	010-3104-53	220 ohm/100MHz
L1302	010-3104-54	600 ohm/100MHz
L1303	010-3104-54	600 ohm/100MHz
L1304	010-3500-92	10uH
L1305	010-3500-92	10uH
L1306	010-3104-54	600 ohm/100MHz
L1307	010-3500-92	10uH
L1308	010-3500-92	10uH
L1309	010-3500-92	10uH
L1401	010-3104-53	220 ohm/100MHz
L1408	010-3500-92	10uH
L1409	010-3105-62	1k ohm/100MHz
L1410	010-3103-50	1500 ohm/100MHz
L1411	010-3103-50	1500 ohm/100MHz
L1413	010-3103-50	1500 ohm/100MHz
L1414	010-3103-50	1500 ohm/100MHz
L1415	010-3103-50	1500 ohm/100MHz
L1416	010-3103-50	1500 ohm/100MHz
L1417	010-3103-50	1500 ohm/100MHz
L1418	010-3103-50	1500 ohm/100MHz
L1419	010-3103-50	1500 ohm/100MHz
L1420	010-3103-50	1500 ohm/100MHz
L1421	010-3103-50	1500 ohm/100MHz
L1422	010-3103-50	1500 ohm/100MHz
L1423	010-3103-50	1500 ohm/100MHz
L1424	010-3104-54	600 ohm/100MHz
L1425	010-3103-50	1500 ohm/100MHz
L1427	010-3103-50	1500 ohm/100MHz
L1428	010-3103-50	1500 ohm/100MHz
L1438	010-3103-50	1500 ohm/100MHz
L1439	010-3104-53	220 ohm/100MHz
L1496	010-3104-54	600 ohm/100MHz
L1497	010-3104-53	220 ohm/100MHz
L1498	010-3104-53	220 ohm/100MHz
L1501	010-3105-62	1k ohm/100MHz
L1502	010-3104-53	220 ohm/100MHz
L1503	010-3104-53	220 ohm/100MHz
L1504	010-3104-53	220 ohm/100MHz
L1505	010-3104-53	220 ohm/100MHz
P901	074-3032-50	50P
P1001	076-0714-10	10P
P1401	076-0478-52	2P
P1402	076-6001-52	PLUG(2P)
Q601	192-4081-00	2SC4081
Q602	131-1188-50	2SB1188 Q,R
Q701	131-1188-50	2SB1188 Q,R
Q705	192-4081-00	2SC4081
Q1104	125-2027-91	DTC114EUA
Q1201	125-0021-91	DTA114EUA
Q1203	192-3326-00	2SC3326
Q1210	192-4081-00	2SC4081
Q1301	190-2096-00	2SA2096
Q1302	193-1306-00	2SD1306
Q1303	190-1736-00	2SA1736
Q1304	192-4081-00	2SC4081
Q1305	125-7006-90	RSS075P03 TB
Q1306	125-8017-90	SP8K4-TB
Q1307	125-8017-90	SP8K4-TB
Q1308	131-1188-50	2SB1188 Q,R
Q1309	192-4081-00	2SC4081
Q1310	131-1188-50	2SB1188 Q,R
Q1311	192-4081-00	2SC4081
Q1401	125-0021-97	DTA113ZU
Q1402	192-4081-00	2SC4081
Q1403	060-4022-90	CPT-203S-C-TU
Q1406	125-2027-91	DTC114EUA
Q1407	190-1576-00	2SA1576A
Q1408	125-2027-91	DTC114EUA

REF No.	PART No.	DESCRIPTION
Q1413	125-2027-91	DTC114EUA
Q1414	125-2038-92	RN1902
Q1501	190-1576-00	2SA1576A
Q1507	125-2027-91	DTC114EUA
Q1510	125-2038-92	RN1902
Q1511	125-2038-92	RN1902
R101	119-1031-15	1/10W 10k ohm
R102	119-0000-05	1/10W 0 ohm JW
R103	119-0000-05	1/10W 0 ohm JW
R105	119-3301-15	1/10W 33 ohm
R110	119-1031-15	1/10W 10k ohm
R111	119-3301-15	1/10W 33 ohm
R112	119-1021-15	1/10W 1k ohm
R113	119-4701-15	1/10W 47 ohm
R114	119-3301-15	1/10W 33 ohm
R115	119-1031-15	1/10W 10k ohm
R116	119-1031-15	1/10W 10k ohm
R124	032-0140-79	1/10W 2.7k ohm F
R126	032-0140-24	1/10W 82 ohm F
R127	119-5601-15	1/10W 56 ohm
R128	119-1011-15	1/10W 100 ohm
R129	119-1011-15	1/10W 100 ohm
R132	119-4731-15	1/10W 47k ohm
R133	119-4731-15	1/10W 47k ohm
R139	119-0000-05	1/10W 0 ohm JW
R140	119-4731-15	1/10W 47k ohm
R144	119-3301-15	1/10W 33 ohm
R145	119-1011-15	1/10W 100 ohm
R147	119-3301-15	1/10W 33 ohm
R148	119-1021-15	1/10W 1k ohm
R149	119-1031-15	1/10W 10k ohm
R152	119-4721-15	1/10W 4.7k ohm
R154	119-1001-15	1/10W 10 ohm
R156	119-1031-15	1/10W 10k ohm
R157	119-3301-15	1/10W 33 ohm
R158	119-3301-15	1/10W 33 ohm
R159	119-3301-15	1/10W 33 ohm
R160	119-4731-15	1/10W 47k ohm
R161	119-1011-15	1/10W 100 ohm
R162	119-1001-15	1/10W 10 ohm
R163	119-1001-15	1/10W 10 ohm
R173	119-1211-15	1/10W 120 ohm
R176	119-1031-15	1/10W 10k ohm
R177	119-1011-15	1/10W 100 ohm
R178	119-1031-15	1/10W 10k ohm
R179	119-2221-15	1/10W 2.2k ohm
R180	119-1031-15	1/10W 10k ohm
R181	119-1011-15	1/10W 100 ohm
R182	032-0140-51	1/10W 15k ohm F
R183	119-1011-15	1/10W 100 ohm
R184	119-1001-15	1/10W 10 ohm
R185	119-1031-15	1/10W 10k ohm
R186	119-1031-15	1/10W 10k ohm
R187	119-3301-15	1/10W 33 ohm
R188	119-1031-15	1/10W 10k ohm
R189	119-1031-15	1/10W 10k ohm
R190	119-2221-15	1/10W 2.2k ohm
R191	119-3301-15	1/10W 33 ohm
R192	119-1011-15	1/10W 100 ohm
R193	119-1011-15	1/10W 100 ohm
R194	119-1031-15	1/10W 10k ohm
R196	119-1001-15	1/10W 10 ohm
R197	119-1001-15	1/10W 10 ohm
R198	032-0140-51	1/10W 15k ohm F
R199	119-1031-15	1/10W 10k ohm
R300	119-3301-15	1/10W 33 ohm
R301	119-3301-15	1/10W 33 ohm
R302	119-1511-15	1/10W 150 ohm
R303	119-2201-15	1/10W 22 ohm
R305	119-4701-15	1/10W 47 ohm
R306	119-4701-15	1/10W 47 ohm
R307	119-4701-15	1/10W 47 ohm
R308	119-4701-15	1/10W 47 ohm

REF No.	PART No.	DESCRIPTION
R309	119-4701-15	1/10W 47 ohm
R310	119-4701-15	1/10W 47 ohm
R311	119-4701-15	1/10W 47 ohm
R312	119-4701-15	1/10W 47 ohm
R313	119-4701-15	1/10W 47 ohm
R314	119-4701-15	1/10W 47 ohm
R315	119-4701-15	1/10W 47 ohm
R316	119-4701-15	1/10W 47 ohm
R317	119-4701-15	1/10W 47 ohm
R318	119-4701-15	1/10W 47 ohm
R319	119-4701-15	1/10W 47 ohm
R320	119-4701-15	1/10W 47 ohm
R401	119-3301-15	1/10W 33 ohm
R405	119-0000-05	1/10W 0 ohm JW
R406	119-3301-15	1/10W 33 ohm
R407	119-3301-15	1/10W 33 ohm
R408	119-8201-15	1/10W 82 ohm
R409	119-0000-05	1/10W 0 ohm JW
R410	119-0000-05	1/10W 0 ohm JW
R411	119-1001-15	1/10W 10 ohm
R413	119-1001-15	1/10W 10 ohm
R414	119-1001-15	1/10W 10 ohm
R415	119-1001-15	1/10W 10 ohm
R500	119-3311-15	1/10W 330 ohm
R503	119-4721-15	1/10W 4.7k ohm
R504	119-2201-15	1/10W 22 ohm
R601	119-1011-15	1/10W 100 ohm
R602	119-5601-15	1/10W 56 ohm
R603	119-5601-15	1/10W 56 ohm
R604	119-5601-15	1/10W 56 ohm
R605	119-1031-15	1/10W 10k ohm
R606	119-2221-15	1/10W 2.2k ohm
R607	119-6801-15	1/10W 68 ohm
R608	119-2211-15	1/10W 220 ohm
R609	119-1011-15	1/10W 100 ohm
R610	119-1011-15	1/10W 100 ohm
R611	119-3311-15	1/10W 330 ohm
R612	119-3321-15	1/10W 3.3k ohm
R614	119-4721-15	1/10W 4.7k ohm
R618	119-1011-15	1/10W 100 ohm
R619	119-5601-15	1/10W 56 ohm
R623	119-0000-05	1/10W 0 ohm JW
R624	119-1031-15	1/10W 10k ohm
R625	119-1031-15	1/10W 10k ohm
R626	119-1021-15	1/10W 1k ohm
R627	119-3321-15	1/10W 3.3k ohm
R629	119-0000-05	1/10W 0 ohm JW
R630	119-1031-15	1/10W 10k ohm
R631	119-1021-15	1/10W 1k ohm
R632	119-1031-15	1/10W 10k ohm
R633	119-2211-15	1/10W 220 ohm
R634	119-1031-15	1/10W 10k ohm
R639	119-1001-15	1/10W 10 ohm
R640	119-3301-15	1/10W 33 ohm
R644	119-3311-15	1/10W 330 ohm
R645	119-3311-15	1/10W 330 ohm
R646	119-3311-15	1/10W 330 ohm
R650	119-1031-15	1/10W 10k ohm
R651	119-1031-15	1/10W 10k ohm
R652	119-4721-15	1/10W 4.7k ohm
R656	119-1031-15	1/10W 10k ohm
R657	119-1031-15	1/10W 10k ohm
R658	119-1031-15	1/10W 10k ohm
R659	119-1031-15	1/10W 10k ohm
R660	119-1031-15	1/10W 10k ohm
R661	119-1031-15	1/10W 10k ohm
R662	119-1021-15	1/10W 1k ohm
R663	119-4731-15	1/10W 47k ohm
R664	119-5621-15	1/10W 5.6k ohm
R665	119-0000-05	1/10W 0 ohm JW
R666	119-1031-15	1/10W 10k ohm
R668	119-1031-15	1/10W 10k ohm
R669	119-4731-15	1/10W 47k ohm

REF No.	PART No.	DESCRIPTION
R670	119-8201-15	1/10W 82 ohm
R671	119-8201-15	1/10W 82 ohm
R672	119-4731-15	1/10W 47k ohm
R701	119-1011-15	1/10W 100 ohm
R702	119-5601-15	1/10W 56 ohm
R704	119-2231-15	1/10W 22k ohm
R705	119-1221-15	1/10W 1.2k ohm
R706	119-4731-15	1/10W 47k ohm
R710	119-1011-15	1/10W 100 ohm
R711	119-1031-15	1/10W 10k ohm
R713	119-3301-15	1/10W 33 ohm
R718	119-4731-15	1/10W 47k ohm
R719	119-1031-15	1/10W 10k ohm
R720	119-2221-15	1/10W 2.2k ohm
R721	119-2231-15	1/10W 22k ohm
R723	119-1031-15	1/10W 10k ohm
R730	119-1031-15	1/10W 10k ohm
R735	119-2201-15	1/10W 22 ohm
R736	119-2201-15	1/10W 22 ohm
R737	119-1031-15	1/10W 10k ohm
R738	119-1031-15	1/10W 10k ohm
R741	119-3301-15	1/10W 33 ohm
R744	119-1031-15	1/10W 10k ohm
R752	119-1011-15	1/10W 100 ohm
R753	119-0000-05	1/10W 0 ohm JW
R755	119-1011-15	1/10W 100 ohm
R801	119-5601-15	1/10W 56 ohm
R803	119-2221-15	1/10W 2.2k ohm
R804	119-0000-05	1/10W 0 ohm JW
R805	119-4731-15	1/10W 47k ohm
R806	119-0000-05	1/10W 0 ohm JW
R813	119-0000-05	1/10W 0 ohm JW
R816	032-0140-06	1/10W 100 ohm F
R817	032-0140-92	1/10W 1.6k ohm F
R820	119-1521-15	1/10W 1.5k ohm
R823	119-5601-15	1/10W 56 ohm
R827	119-1801-15	1/10W 18 ohm
R829	119-5611-15	1/10W 560 ohm
R901	119-2201-15	1/10W 22 ohm
R902	119-4731-15	1/10W 47k ohm
R903	119-2201-15	1/10W 22 ohm
R904	119-2201-15	1/10W 22 ohm
R905	119-0000-05	1/10W 0 ohm JW
R907	119-5621-15	1/10W 5.6k ohm
R908	119-1021-15	1/10W 1k ohm
R909	119-8201-15	1/10W 82 ohm
R910	119-8201-15	1/10W 82 ohm
R911	119-8201-15	1/10W 82 ohm
R912	119-1031-15	1/10W 10k ohm
R913	119-1011-15	1/10W 100 ohm
R914	119-0000-05	1/10W 0 ohm JW
R1001	119-4701-15	1/10W 47 ohm
R1003	119-1031-15	1/10W 10k ohm
R1004	119-1041-15	1/10W 100k ohm
R1005	119-1531-15	1/10W 15k ohm
R1006	119-1041-15	1/10W 100k ohm
R1010	119-4701-15	1/10W 47 ohm
R1013	119-0000-05	1/10W 0 ohm JW
R1016	119-1031-15	1/10W 10k ohm
R1017	119-1021-15	1/10W 1k ohm
R1018	119-1031-15	1/10W 10k ohm
R1019	119-1021-15	1/10W 1k ohm
R1020	119-1031-15	1/10W 10k ohm
R1021	119-1031-15	1/10W 10k ohm
R1036	119-0000-05	1/10W 0 ohm JW
R1038	119-4701-15	1/10W 47 ohm
R1101	119-1021-15	1/10W 1k ohm
R1102	119-1031-15	1/10W 10k ohm
R1103	119-0000-05	1/10W 0 ohm JW
R1104	119-5631-15	1/10W 56k ohm
R1105	032-0140-21	1/10W 549k ohm F
R1106	119-2231-15	1/10W 22k ohm
R1108	119-4711-15	1/10W 470 ohm

REF No.	PART No.	DESCRIPTION
R1109	119-4711-15	1/10W 470 ohm
R1110	119-4711-15	1/10W 470 ohm
R1111	119-4731-15	1/10W 47k ohm
R1112	119-1021-15	1/10W 1k ohm
R1113	119-4731-15	1/10W 47k ohm
R1115	119-3331-15	1/10W 33k ohm
R1116	119-3321-15	1/10W 3.3k ohm
R1117	119-1031-15	1/10W 10k ohm
R1118	119-1231-15	1/10W 12k ohm
R1119	119-2201-15	1/10W 22 ohm
R1120	119-2721-15	1/10W 2.7k ohm
R1121	119-1041-15	1/10W 100k ohm
R1122	119-4701-15	1/10W 47 ohm
R1123	032-0140-50	1/10W 10k ohm F
R1124	032-0140-50	1/10W 10k ohm F
R1125	032-0140-50	1/10W 10k ohm F
R1126	032-0140-50	1/10W 10k ohm F
R1127	032-0140-50	1/10W 10k ohm F
R1128	032-0140-50	1/10W 10k ohm F
R1129	119-1021-15	1/10W 1k ohm
R1130	032-0140-50	1/10W 10k ohm F
R1131	032-0140-50	1/10W 10k ohm F
R1132	119-1021-15	1/10W 1k ohm
R1133	119-4701-15	1/10W 47 ohm
R1134	119-1011-15	1/10W 100 ohm
R1142	119-0000-05	1/10W 0 ohm JW
R1216	119-3311-15	1/10W 330 ohm
R1217	119-2221-15	1/10W 2.2k ohm
R1218	119-4721-15	1/10W 4.7k ohm
R1219	119-1231-15	1/10W 12k ohm
R1220	119-2721-15	1/10W 2.7k ohm
R1221	119-1531-15	1/10W 15k ohm
R1222	119-1831-15	1/10W 18k ohm
R1223	119-4721-15	1/10W 4.7k ohm
R1224	119-4731-15	1/10W 47k ohm
R1225	119-1031-15	1/10W 10k ohm
R1226	119-3921-15	1/10W 3.9k ohm
R1227	119-8221-15	1/10W 8.2k ohm
R1231	119-1021-15	1/10W 1k ohm
R1232	119-3311-15	1/10W 330 ohm
R1234	119-3311-15	1/10W 330 ohm
R1235	119-2221-15	1/10W 2.2k ohm
R1236	119-4731-15	1/10W 47k ohm
R1237	119-1821-15	1/10W 1.8k ohm
R1238	119-1011-15	1/10W 100 ohm
R1260	119-1031-15	1/10W 10k ohm
R1261	119-1031-15	1/10W 10k ohm
R1262	119-2221-15	1/10W 2.2k ohm
R1263	119-4731-15	1/10W 47k ohm
R1301	119-1031-15	1/10W 10k ohm
R1302	119-1031-15	1/10W 10k ohm
R1303	116-1011-15	1/4W 100 ohm
R1304	116-1011-15	1/4W 100 ohm
R1305	116-1011-15	1/4W 100 ohm
R1306	116-1011-15	1/4W 100 ohm
R1307	116-1011-15	1/4W 100 ohm
R1308	116-1011-15	1/4W 100 ohm
R1309	116-1221-15	1/4W 1.2k ohm
R1310	119-1031-15	1/10W 10k ohm
R1311	119-3921-15	1/10W 3.9k ohm
R1312	032-0140-03	1/10W 220k ohm F
R1313	032-0140-88	1/10W 100k ohm F
R1314	032-0140-63	1/10W 27k ohm F
R1315	119-1031-15	1/10W 10k ohm
R1316	119-1021-15	1/10W 1k ohm
R1317	119-2241-15	1/10W 220k ohm
R1318	119-2201-15	1/10W 22 ohm
R1319	119-0000-05	1/10W 0 ohm JW
R1320	032-0140-51	1/10W 15k ohm F
R1321	032-0140-05	1/10W 82k ohm F
R1322	032-0140-67	1/10W 3.3k ohm F
R1323	119-0000-05	1/10W 0 ohm JW
R1324	119-1031-15	1/10W 10k ohm

REF No.	PART No.	DESCRIPTION
R1325	119-3321-15	1/10W 3.3k ohm
R1327	119-0000-05	1/10W 0 ohm JW
R1328	032-0140-52	1/10W 33k ohm F
R1329	032-0140-52	1/10W 33k ohm F
R1330	032-0140-05	1/10W 82k ohm F
R1331	032-0140-63	1/10W 27k ohm F
R1332	119-0000-05	1/10W 0 ohm JW
R1333	032-0140-62	1/10W 1k ohm F
R1334	032-0140-79	1/10W 2.7k ohm F
R1335	032-0140-79	1/10W 2.7k ohm F
R1336	032-0140-62	1/10W 1k ohm F
R1337	119-0000-05	1/10W 0 ohm JW
R1338	119-0000-05	1/10W 0 ohm JW
R1339	119-0000-05	1/10W 0 ohm JW
R1340	119-0000-05	1/10W 0 ohm JW
R1341	119-9121-15	1/10W 9.1k ohm
R1342	119-7521-15	1/10W 7.5k ohm
R1343	032-0140-66	1/10W 220 ohm F
R1344	032-0140-98	1/10W 330 ohm F
R1345	032-0140-13	1/10W 33 ohm F
R1346	119-2711-15	1/10W 270 ohm
R1347	119-1031-15	1/10W 10k ohm
R1348	119-1021-15	1/10W 1k ohm
R1350	032-0140-56	1/10W 12k ohm F
R1351	032-0140-51	1/10W 15k ohm F
R1352	119-1031-15	1/10W 10k ohm
R1353	119-2211-15	1/10W 220 ohm
R1354	119-1031-15	1/10W 10k ohm
R1355	119-1021-15	1/10W 1k ohm
R1356	119-0000-05	1/10W 0 ohm JW
R1360	119-1021-15	1/10W 1k ohm
R1363	119-1031-15	1/10W 10k ohm
R1364	119-0000-05	1/10W 0 ohm JW
R1409	119-4731-15	1/10W 47k ohm
R1410	119-4731-15	1/10W 47k ohm
R1411	119-1011-15	1/10W 100 ohm
R1412	119-3331-15	1/10W 33k ohm
R1413	119-4721-15	1/10W 4.7k ohm
R1417	119-1011-15	1/10W 100 ohm
R1418	119-4721-15	1/10W 4.7k ohm
R1419	119-1021-15	1/10W 1k ohm

REF No.	PART No.	DESCRIPTION
R1420	119-8211-15	1/10W 820 ohm
R1421	119-4731-15	1/10W 47k ohm
R1422	119-3311-15	1/10W 330 ohm
R1423	119-4731-15	1/10W 47k ohm
R1426	119-4721-15	1/10W 4.7k ohm
R1427	119-5641-15	1/10W 560k ohm
R1428	119-1021-15	1/10W 1k ohm
R1429	119-1031-15	1/10W 10k ohm
R1430	119-1031-15	1/10W 10k ohm
R1431	119-3331-15	1/10W 33k ohm
R1434	119-2231-15	1/10W 22k ohm
R1435	119-1531-15	1/10W 15k ohm
R1436	119-1531-15	1/10W 15k ohm
R1437	119-4731-15	1/10W 47k ohm
R1438	119-3321-15	1/10W 3.3k ohm
R1439	119-2231-15	1/10W 22k ohm
R1443	119-4721-15	1/10W 4.7k ohm
R1444	119-1021-15	1/10W 1k ohm
R1462	116-1021-15	1/4W 1k ohm
R1463	116-1021-15	1/4W 1k ohm
R1464	116-1021-15	1/4W 1k ohm
R1473	119-0000-05	1/10W 0 ohm JW
R1485	119-1011-15	1/10W 100 ohm
R1487	119-3331-15	1/10W 33k ohm
R1492	119-4731-15	1/10W 47k ohm
R1497	119-0000-05	1/10W 0 ohm JW
R1498	119-4731-15	1/10W 47k ohm
R1499	119-4731-15	1/10W 47k ohm
R1501	119-1021-15	1/10W 1k ohm
R1502	119-1021-15	1/10W 1k ohm
R1503	119-1031-15	1/10W 10k ohm
R1504	119-1031-15	1/10W 10k ohm
R1507	032-0140-67	1/10W 3.3k ohm F
R1508	032-0140-81	1/10W 3.9k ohm F
R1509	119-4731-15	1/10W 47k ohm
R1510	119-1011-15	1/10W 100 ohm
R1512	119-1011-15	1/10W 100 ohm
R1513	119-1031-15	1/10W 10k ohm
R1514	119-4731-15	1/10W 47k ohm
R1515	119-1021-15	1/10W 1k ohm
R1519	119-1021-15	1/10W 1k ohm

REF No.	PART No.	DESCRIPTION
R1520	119-4731-15	1/10W 47k ohm
R1525	119-1021-15	1/10W 1k ohm
R1526	119-1041-15	1/10W 100k ohm
R1527	119-1011-15	1/10W 100 ohm
R1533	119-1011-15	1/10W 100 ohm
R1534	119-1011-15	1/10W 100 ohm
R1535	119-1011-15	1/10W 100 ohm
R1536	119-1011-15	1/10W 100 ohm
R1538	119-2231-15	1/10W 22k ohm
R1539	119-1011-15	1/10W 100 ohm
R1540	119-1031-15	1/10W 10k ohm
R1541	119-1011-15	1/10W 100 ohm
R1542	119-4731-15	1/10W 47k ohm
R1543	119-3311-15	1/10W 330 ohm
R1544	119-4731-15	1/10W 47k ohm
R1545	119-4731-15	1/10W 47k ohm
R1546	119-1031-15	1/10W 10k ohm
R1548	119-4731-15	1/10W 47k ohm
R1549	119-4731-15	1/10W 47k ohm
R1550	119-0000-05	1/10W 0 ohm JW
TH1102	002-0328-90	miniSMDC050F-2
TM1301	073-0778-90	TERMINAL
TM1302	073-0778-90	TERMINAL
TM1303	073-0778-90	TERMINAL
TM1304	073-0778-90	TERMINAL
TM1305	073-0778-90	TERMINAL
TM1306	073-0778-90	TERMINAL
TM1307	073-0778-90	TERMINAL
TM1310	073-0778-90	TERMINAL
VR1101	012-4997-59	47k ohm VR
X101	061-4547-90	9.59790MHz
X102	061-4539-90	48MHz 2725T
X601	061-4537-90	22.5792MHz/2725T
X801	061-3557-90	28.63636MHz
X1101	061-3552-90	4.33MHz
X1501	060-1533-90	CSTCE10M0G52-R O
PWB	039-3134-01	PWB(WITHOUT CO MPONENTS)

AUDIO PWB(B2) section

REF No.	PART No.	DESCRIPTION
ANT101	092-0702-00	ANTENNA RECEPT
ANT202	092-2203-00	ANT-RECEPT
BL200	880-2091E	FM/AM-TUNER-PAC K
C100	168-1042-78	16V 0.1uF
C101	168-1042-78	16V 0.1uF
C102	166-1011-50	100pF CH
C103	166-1801-50	18pF CH
C104	166-2201-50	22pF CH
C105	043-0551-90	6.3V 4.7uF M
C106	168-1042-78	16V 0.1uF
C107	043-0603-90	16V 10uF
C108	168-1052-78	16V 1uF
C109	168-1042-78	16V 0.1uF
C110	043-0603-90	16V 10uF
C111	166-1011-50	100pF CH
C112	042-0416-56	10V 22uF M TAN
C113	168-1022-55	1000pF K
C114	168-1052-78	16V 1uF
C115	168-1032-55	0.01uF K
C116	042-0650-01	5.5V 0.22F
C117	168-1052-78	16V 1uF
C118	168-1232-55	0.012uF K
C119	168-1232-55	0.012uF K
C120	168-1022-55	1000pF K
C121	168-1042-78	16V 0.1uF
C122	042-0650-01	5.5V 0.22F
C123	168-1042-78	16V 0.1uF

REF No.	PART No.	DESCRIPTION
C124	042-0416-57	10V 47uF M TAN
C125	168-1042-78	16V 0.1uF
C126	165-1073-35	16V 100uF
C127	168-1042-78	16V 0.1uF
C129	177-2252-78	16V 2.2uF
C202	166-2201-50	22pF CH
C203	168-1042-78	16V 0.1uF
C204	168-1042-78	16V 0.1uF
C205	166-1511-50	150pF CH
C206	043-0603-90	16V 10uF
C207	043-0603-90	16V 10uF
C208	043-0603-90	16V 10uF
C209	043-0603-90	16V 10uF
C210	043-0603-90	16V 10uF
C211	043-0603-90	16V 10uF
C212	165-1073-35	16V 100uF
C213	168-1032-55	0.01uF K
C214	168-2232-55	0.022uF K
C215	166-1011-50	100pF CH
C216	168-1042-78	16V 0.1uF
C217	168-1022-55	1000pF K
C218	168-1042-78	16V 0.1uF
C219	165-4763-15	6.3V 47uF
C220	043-0603-90	16V 10uF
C221	043-0603-90	16V 10uF
C222	178-2242-78	0.22uF
C223	168-4712-55	470pF K
C224	168-4712-55	470pF K

REF No.	PART No.	DESCRIPTION
C225	168-1042-78	16V 0.1uF
C226	168-5612-55	560pF Z
C227	168-5612-55	560pF Z
C228	168-5612-55	560pF Z
C229	168-5612-55	560pF Z
C230	166-1011-50	100pF CH
C231	166-4701-50	47pF CH
C232	166-4701-50	47pF CH
C233	168-1022-55	1000pF K
C234	168-1042-78	16V 0.1uF
C235	042-1726-90	6.3V 100uF
C236	168-1042-78	16V 0.1uF
C237	042-0416-57	10V 47uF M TAN
C238	042-0416-56	10V 22uF M TAN
C239	168-1042-78	16V 0.1uF
C240	042-1726-90	6.3V 100uF
C241	168-4732-78	0.047uF K
C242	042-0423-20	10V 10uF
C243	166-1011-50	100pF CH
C244	168-1042-78	16V 0.1uF
C245	042-0618-50	10V 4.7uF TAN
C246	168-1042-78	16V 0.1uF
C247	168-1042-78	16V 0.1uF
C248	042-0618-50	10V 4.7uF TAN
C249	168-1042-78	16V 0.1uF
C250	166-1011-50	100pF CH
C251	168-1052-78	16V 1uF
C252	168-2232-55	0.022uF K

REF No.	PART No.	DESCRIPTION
C253	168-1042-78	16V 0.1uF
C254	168-3332-78	0.033uF K
C255	042-0618-50	10V 4.7uF TAN
C256	166-1811-50	180pF CH
C257	168-1022-55	1000pF K
C258	168-3322-55	3300pF K
C259	168-3322-55	3300pF K
C260	168-1022-55	1000pF K
C261	042-1726-90	6.3V 100uF
C262	168-1042-78	16V 0.1uF
C263	168-1042-78	16V 0.1uF
C264	042-0618-50	10V 4.7uF TAN
C265	166-1011-50	100pF CH
C266	168-1042-78	16V 0.1uF
C267	168-1022-55	1000pF K
C268	168-3322-55	3300pF K
C269	168-3322-55	3300pF K
C270	168-1022-55	1000pF K
C271	168-2232-55	0.022uF K
C273	166-1007-50	10pF CH
C274	168-4712-55	470pF K
C275	166-1007-50	10pF CH
C276	166-1011-50	100pF CH
C277	166-1011-50	100pF CH
C278	168-1042-78	16V 0.1uF
C280	042-1726-90	6.3V 100uF
C281	168-1042-78	16V 0.1uF
C282	166-1011-50	100pF CH
C283	178-3342-78	0.33uF
C284	168-2232-55	0.022uF K
C285	168-2232-55	0.022uF K
C286	166-1011-50	100pF CH
C288	166-1011-50	100pF CH
C289	166-1007-50	10pF CH
C295	168-1042-78	16V 0.1uF
C297	168-1042-78	16V 0.1uF
C298	166-1011-50	100pF CH
C299	168-1042-78	16V 0.1uF
C300	165-1063-35	16V 10uF
C301	168-1042-78	16V 0.1uF
C302	043-0603-90	16V 10uF
C304	165-4763-15	6.3V 47uF
C305	043-0603-90	16V 10uF
C306	043-0603-90	16V 10uF
C307	043-0603-90	16V 10uF
C308	165-4763-15	6.3V 47uF
C309	168-1022-55	1000pF K
C310	168-1022-55	1000pF K
C311	168-1022-55	1000pF K
C312	168-1022-55	1000pF K
C313	043-0547-50	16V 3.3uF
C314	168-1042-78	16V 0.1uF
C315	043-0603-90	16V 10uF
C316	043-0603-90	16V 10uF
C317	168-1042-78	16V 0.1uF
C318	168-1042-78	16V 0.1uF
C319	043-0603-90	16V 10uF
C320	043-0603-90	16V 10uF
C321	043-0603-90	16V 10uF
C322	043-0603-90	16V 10uF
C323	166-1007-50	10pF CH
C324	168-1042-78	16V 0.1uF
C325	168-1042-78	16V 0.1uF
C326	043-0603-90	16V 10uF
C327	168-5612-55	560pF Z
C328	168-5612-55	560pF Z
C329	168-4712-55	470pF K
C330	168-4712-55	470pF K
C331	168-6812-55	680pF K
C332	168-6812-55	680pF K
C333	168-8212-55	820pF K
C334	168-8212-55	820pF K
C335	043-0603-90	16V 10uF

REF No.	PART No.	DESCRIPTION
C336	043-0603-90	16V 10uF
C337	043-0603-90	16V 10uF
C338	043-0603-90	16V 10uF
C339	043-0603-90	16V 10uF
C340	043-0603-90	16V 10uF
C341	043-0603-90	16V 10uF
C342	168-1042-78	16V 0.1uF
C343	168-1042-78	16V 0.1uF
C344	168-1042-78	16V 0.1uF
C345	168-4712-55	470pF K
C346	168-4712-55	470pF K
C347	166-1011-50	100pF CH
C348	166-1011-50	100pF CH
C349	043-0559-90	6.3V 22uF
C350	043-0559-90	6.3V 22uF
C351	043-0559-90	6.3V 22uF
C352	043-0559-90	6.3V 22uF
C353	168-8212-55	820pF K
C354	168-8212-55	820pF K
C355	166-1011-50	100pF CH
C356	166-1011-50	100pF CH
C357	168-1042-78	16V 0.1uF
C358	168-1042-78	16V 0.1uF
C359	168-2232-55	0.022uF K
C360	168-2232-55	0.022uF K
C361	043-0264-56	270pF
C362	043-0264-56	270pF
C363	168-1042-78	16V 0.1uF
C364	165-1063-35	16V 10uF
C365	165-1063-35	16V 10uF
C366	165-1063-35	16V 10uF
C367	166-2701-50	27pF CH
C368	166-2701-50	27pF CH
C369	165-1073-15	6.3V 100uF
C370	166-4701-50	47pF CH
C371	166-4701-50	47pF CH
C372	043-0559-90	6.3V 22uF
C373	043-0559-90	6.3V 22uF
C374	166-1011-50	100pF CH
C375	168-1042-78	16V 0.1uF
C376	168-1042-78	16V 0.1uF
C377	168-1042-78	16V 0.1uF
C378	168-1052-78	16V 1uF
C379	168-1042-78	16V 0.1uF
C380	166-1021-50	1000pF CH
C381	166-1021-50	1000pF CH
C382	166-1011-50	100pF CH
C383	165-4763-35	16V 47uF
C384	168-1042-78	16V 0.1uF
C385	168-1042-78	16V 0.1uF
C386	168-1052-78	16V 1uF
C387	168-1052-78	16V 1uF
C388	168-1052-78	16V 1uF
C389	168-1052-78	16V 1uF
C390	165-4753-55	35V 4.7uF
C391	165-4753-55	35V 4.7uF
C392	165-1073-35	16V 100uF
C393	165-4763-15	6.3V 47uF
C394	165-4763-15	6.3V 47uF
C395	042-1754-90	6.3V 1000uF M
C396	165-1063-35	16V 10uF
C397	168-1042-78	16V 0.1uF
C398	168-1032-55	0.01uF K
C399	166-3096-50	3pF CJ
C400	168-1032-55	0.01uF K
C401	168-1032-55	0.01uF K
C402	168-1042-78	16V 0.1uF
C403	168-1052-78	16V 1uF
C404	165-4763-15	6.3V 47uF
C405	168-1052-78	16V 1uF
C450	043-0547-50	16V 3.3uF
C500	168-1042-78	16V 0.1uF
C501	168-1042-78	16V 0.1uF

REF No.	PART No.	DESCRIPTION
C502	168-1042-78	16V 0.1uF
C503	165-1073-35	16V 100uF
C504	168-1022-55	1000pF K
C507	042-0416-57	10V 47uF M TAN
C508	168-1042-78	16V 0.1uF
C509	042-0416-57	10V 47uF M TAN
C510	168-1042-38	50V 0.1uF
C511	043-0603-90	16V 10uF
C512	042-1750-90	16V 100uF M
C513	043-0603-90	16V 10uF
C516	042-1750-90	16V 100uF M
C517	168-1042-78	16V 0.1uF
C518	168-1042-78	16V 0.1uF
C521	168-3342-58	0.33uF
C522	168-3342-58	0.33uF
C524	168-1042-78	16V 0.1uF
C525	168-1022-55	1000pF K
C526	168-1022-55	1000pF K
C595	168-1042-78	16V 0.1uF
C600	178-2242-78	0.22uF
C601	178-2242-78	0.22uF
C602	178-2242-78	0.22uF
C603	178-2242-78	0.22uF
C604	168-1052-78	16V 1uF
C605	168-1042-78	16V 0.1uF
C606	042-1753-90	16V 100uF M
C607	042-1753-90	16V 100uF M
C608	166-1811-50	180pF CH
C609	166-1211-50	120pF CH
C610	168-1042-78	16V 0.1uF
C611	168-1042-78	16V 0.1uF
C612	168-1052-78	16V 1uF
C613	166-1211-50	120pF CH
C614	168-1042-78	16V 0.1uF
C615	168-1022-55	1000pF K
C616	042-1750-90	16V 100uF M
C617	165-1073-35	16V 100uF
C618	168-1032-55	0.01uF K
C619	165-1073-35	16V 100uF
C620	042-1753-90	16V 100uF M
C621	168-1042-78	16V 0.1uF
C622	165-2263-35	16V 22uF
C624	168-4732-78	0.047uF K
C625	168-1042-78	16V 0.1uF
C626	042-0423-20	10V 10uF
C627	165-1063-35	16V 10uF
C628	043-0566-90	50V 2.2uF K
C629	168-1042-38	50V 0.1uF
C630	178-4742-78	0.47uF
C631	042-0592-58	16V 10uF
C633	168-1052-78	16V 1uF
C634	168-1042-78	16V 0.1uF
C635	042-1746-00	16V 2200uF
C636	168-1042-78	16V 0.1uF
C637	168-1052-78	16V 1uF
C638	042-1750-90	16V 100uF M
C639	043-0499-51	0.1uF
C640	168-1052-78	16V 1uF
C641	168-1042-78	16V 0.1uF
C642	168-2222-55	2200pF K
C643	168-2222-55	2200pF K
C644	168-2222-55	2200pF K
C645	168-2222-55	2200pF K
C646	168-2222-55	2200pF K
C647	168-2222-55	2200pF K
C648	165-3363-45	25V 33uF
C649	168-2222-55	2200pF K
C650	168-2222-55	2200pF K
C653	042-1746-00	16V 2200uF
C654	168-1022-55	1000pF K
C680	168-1042-78	16V 0.1uF
C682	166-4711-50	470pF CH
C683	166-4711-50	470pF CH

REF No.	PART No.	DESCRIPTION
C684	166-4711-50	470pF CH
C685	166-4711-50	470pF CH
C691	168-1042-78	16V 0.1uF
C692	168-1042-78	16V 0.1uF
C693	168-1042-78	16V 0.1uF
C694	043-0563-90	16V 47uF
C695	165-1073-35	16V 100uF
C696	165-1073-35	16V 100uF
C699	165-2263-35	16V 22uF
D100	001-0529-43	MA8082-L
D102	001-0529-26	MA8047-M
D150	001-0517-90	1SS355
D180	001-2630-90	1SS420-TPL3,F
D200	001-0517-90	1SS355
D250	001-0529-21	MA8039-H
D251	001-1305-90	DAN217U-T106
D252	001-1305-90	DAN217U-T106
D300	001-0529-44	MA8082-M
D301	001-0517-90	1SS355
D302	001-0517-90	1SS355
D303	001-0529-27	MA8047H
D304	001-0517-90	1SS355
D305	001-0517-90	1SS355
D306	001-0517-90	1SS355
D307	001-0529-21	MA8039-H
D308	001-1305-90	DAN217U-T106
D309	001-1305-90	DAN217U-T106
D310	001-1305-90	DAN217U-T106
D311	001-1305-90	DAN217U-T106
D312	001-1305-90	DAN217U-T106
D313	001-1305-90	DAN217U-T106
D314	001-0517-90	1SS355
D460	001-0517-90	1SS355
D501	001-2630-90	1SS420-TPL3,F
D502	001-2630-90	1SS420-TPL3,F
D503	001-2630-90	1SS420-TPL3,F
D505	001-0529-32	MA8056-M
D506	001-0529-32	MA8056-M
D507	001-0529-32	MA8056-M
D509	001-2630-90	1SS420-TPL3,F
D600	001-0517-90	1SS355
D601	001-2629-90	D1FM3-5063
D602	001-0517-90	1SS355
D603	001-4100-50	PTZ TE25 9.1B
D604	001-0517-90	1SS355
D605	001-2403-90	M1F60
D606	001-0517-90	1SS355
D607	001-0517-90	1SS355
D608	001-2403-90	M1F60
D609	001-4310-00	RLZ TE-11 9.1B
D610	001-0517-90	1SS355
D611	001-0517-90	1SS355
D612	001-0517-90	1SS355
D613	001-0529-32	MA8056-M
D614	001-0517-90	1SS355
D615	001-0529-26	MA8047-M
D616	001-0517-90	1SS355
D618	001-4311-00	ST70-27F-7072
D619	001-2630-90	1SS420-TPL3,F
D620	001-2630-90	1SS420-TPL3,F
D621	001-2630-90	1SS420-TPL3,F
D655	001-0517-90	1SS355
D660	001-0517-90	1SS355
F400	060-8066-90	CHIP FUSE 4A
FIL300	060-3114-52	LFA20-2A1
FIL301	060-3114-52	LFA20-2A1
FIL501	060-3116-52	EMI-FILTER
FIL506	060-3114-52	LFA20-2A1
FIL507	060-3114-52	LFA20-2A1
FIL508	060-3114-52	LFA20-2A1
FIL509	060-3114-52	LFA20-2A1
FIL510	060-3116-52	EMI-FILTER
IC100	051-9402-68	BR93L56F-W

REF No.	PART No.	DESCRIPTION
IC101	051-9402-68	BR93L56F-W
IC102	052-7080-20	uPD70F3276YGJ-UEN-A
IC103	051-5408-08	S-80921ANMP-DDJ
IC104	051-5408-38	R3112N211A-TR
IC105	051-3406-90	NJM2078M
IC200	051-1905-91	AN77L05M
IC201	----------	SAF7730H/N116F (Type pad 670610-051) (impossible to exchange)
IC300	051-6736-90	WM8728EDS/R
IC301	051-6736-90	WM8728EDS/R
IC302	051-3054-90	HA17558ATEL
IC303	051-3026-90	NJM4580V
IC304	051-3026-90	NJM4580V
IC305	051-1811-90	BA3129F
IC306	051-3026-90	NJM4580V
IC307	051-3026-90	NJM4580V
IC308	051-5306-90	MM1117XF
IC309	051-5306-90	MM1117XF
IC310	051-3927-90	NJM2505F
IC311	051-5326-90	TK15420MTL
IC315	051-5336-90	MM1227XFBE
IC500	051-3513-90	PQ070XH02ZPH
IC501	051-3289-00	BA09ST
IC502	051-3513-90	PQ070XH02ZPH
IC504	051-7244-08	TC7WH125FU-TE12L
IC515	051-7202-28	TC7SH32FU TE85L
IC600	051-3294-90	TA78DS10F
IC601	051-3342-90	BA05CC0WFP-004EL
IC602	051-3377-90	LM3485MM
IC603	051-2057-00	TB2906HQ
IC604	----------	LP2951ACSD/NOPB (Type pad 352091-051) (impossible to exchange)
IC605	051-6600-58	HA12187FP
J101	074-3023-58	8P
J300	074-1148-05	5P
J500	074-2201-83	33P
J501	074-3014-80	30P
J502	074-3018-80	30P
J503	074-2225-92	42P
J600	074-1194-00	13P CE-NET
J601	074-4007-20	20P
L100	010-2279-50	4.7uH
L101	010-2279-50	4.7uH
L102	010-3105-62	1k ohm/100MHz
L103	010-3105-62	1k ohm/100MHz
L105	010-3104-53	220 ohm/100MHz
L106	010-3105-62	1k ohm/100MHz
L107	010-3105-62	1k ohm/100MHz
L109	010-2279-50	4.7uH
L202	010-2003-04	30uH
L205	010-2279-50	4.7uH
L206	010-2279-50	4.7uH
L207	010-3105-62	1k ohm/100MHz
L208	010-3109-63	1k ohm/100MHz
L209	010-3105-62	1k ohm/100MHz
L210	010-3105-62	1k ohm/100MHz
L211	010-3105-62	1k ohm/100MHz
L212	010-3105-62	1k ohm/100MHz
L213	010-3105-62	1k ohm/100MHz
L214	010-3103-64	1.5k ohm/100MHz
L215	010-3105-62	1k ohm/100MHz
L216	010-3105-62	1k ohm/100MHz
L299	010-3407-66	22uH J
L300	010-3105-62	1k ohm/100MHz

REF No.	PART No.	DESCRIPTION
L301	010-3105-62	1k ohm/100MHz
L302	010-3103-64	1.5k ohm/100MHz
L303	010-3103-64	1.5k ohm/100MHz
L304	010-3103-64	1.5k ohm/100MHz
L305	010-3103-64	1.5k ohm/100MHz
L306	010-3103-64	1.5k ohm/100MHz
L307	010-3103-64	1.5k ohm/100MHz
L312	010-2279-50	4.7uH
L313	010-3406-66	22uH J
L350	010-3105-62	1k ohm/100MHz
L500	010-3104-53	220 ohm/100MHz
L501	010-3104-53	220 ohm/100MHz
L502	010-3104-53	220 ohm/100MHz
L503	010-3104-53	220 ohm/100MHz
L504	010-3105-62	1k ohm/100MHz
L505	010-3105-62	1k ohm/100MHz
L506	010-3105-62	1k ohm/100MHz
L507	010-3407-26	0.01uH
L509	010-3104-53	220 ohm/100MHz
L510	010-3104-53	220 ohm/100MHz
L511	010-3104-53	220 ohm/100MHz
L512	010-3105-62	1k ohm/100MHz
L513	010-3105-62	1k ohm/100MHz
L515	010-3105-62	1k ohm/100MHz
L516	010-3105-62	1k ohm/100MHz
L521	010-3104-53	220 ohm/100MHz
L524	010-3105-62	1k ohm/100MHz
L526	010-3105-62	1k ohm/100MHz
L527	010-3105-62	1k ohm/100MHz
L528	010-3105-62	1k ohm/100MHz
L529	010-3105-62	1k ohm/100MHz
L530	010-3105-62	1k ohm/100MHz
L531	010-3105-62	1k ohm/100MHz
L532	010-3105-62	1k ohm/100MHz
L533	010-3105-62	1k ohm/100MHz
L534	010-3105-62	1k ohm/100MHz
L535	010-3104-53	220 ohm/100MHz
L536	010-3104-53	220 ohm/100MHz
L537	010-3104-53	220 ohm/100MHz
L538	010-3104-53	220 ohm/100MHz
L541	010-3105-62	1k ohm/100MHz
L542	010-3105-62	1k ohm/100MHz
L543	010-3105-62	1k ohm/100MHz
L544	010-3105-62	1k ohm/100MHz
L545	010-3105-62	1k ohm/100MHz
L547	010-3105-62	1k ohm/100MHz
L548	010-3105-62	1k ohm/100MHz
L550	010-3105-62	1k ohm/100MHz
L560	010-3105-62	1k ohm/100MHz
L561	010-3105-62	1k ohm/100MHz
L570	010-3105-62	1k ohm/100MHz
L571	010-3105-62	1k ohm/100MHz
L572	010-3105-62	1k ohm/100MHz
L573	010-3105-62	1k ohm/100MHz
L600	010-3104-54	600 ohm/100MHz
L601	010-3075-51	27uH
L602	010-3500-90	4.7uH
L603	010-8020-01	CHOKE
L604	010-3104-53	220 ohm/100MHz
L659	010-3103-50	1500 ohm/100MHz
L660	010-3015-58	4.7uH
L661	010-2275-55	4.7uH
L680	010-2279-50	4.7uH
L695	010-3104-53	220 ohm/100MHz
P300	076-0714-12	PLUG
Q100	125-2026-92	UNR5212
Q103	192-4081-00	2SC4081
Q104	125-0020-92	UN5112
Q105	192-4081-00	2SC4081
Q106	192-4081-00	2SC4081
Q107	192-4081-00	2SC4081
Q150	125-0020-92	UN5112
Q165	192-4081-00	2SC4081

REF No.	PART No.	DESCRIPTION
Q200	125-2026-95	UNR521N
Q201	190-1298-00	2SA1298
Q202	125-2026-95	UNR521N
Q203	190-1298-00	2SA1298
Q204	125-7005-90	PHK04P02T
Q300	192-4081-00	2SC4081
Q301	125-2026-96	UNR5210
Q302	125-2026-96	UNR5210
Q303	125-0020-91	UN5111
Q304	192-4081-00	2SC4081
Q305	125-2026-96	UNR5210
Q306	125-0021-95	DTA143ZUA-T106
Q307	125-0021-95	DTA143ZUA-T106
Q308	193-1306-00	2SD1306
Q309	193-1306-00	2SD1306
Q310	193-1306-00	2SD1306
Q311	193-1306-00	2SD1306
Q312	193-1306-00	2SD1306
Q313	193-1306-00	2SD1306
Q314	192-4081-00	2SC4081
Q315	193-1306-00	2SD1306
Q316	193-1306-00	2SD1306
Q465	190-1736-00	2SA1736
Q466	125-2026-95	UNR521N
Q502	125-2026-93	UNR5213
Q506	125-9017-92	UMD3N-TR
Q507	125-9017-92	UMD3N-TR
Q600	125-2026-95	UNR521N
Q601	190-1298-00	2SA1298
Q602	125-2026-95	UNR521N
Q603	190-1736-00	2SA1736
Q604	101-1143-00	2SB1143
Q605	125-2026-95	UNR521N
Q606	190-1736-00	2SA1736
Q607	125-7008-90	RSS050P03
Q608	125-2026-92	UNR5212
Q609	190-1298-00	2SA1298
Q610	102-3420-50	2SC3420 GR,BL
Q611	125-2026-95	UNR521N
Q612	190-1736-00	2SA1736
Q613	193-1306-00	2SD1306
Q614	190-2096-00	2SA2096
Q615	125-2026-92	UNR5212
Q616	190-1576-00	2SA1576A
Q618	125-2026-95	UNR521N
Q619	190-1736-00	2SA1736
Q620	125-2026-95	UNR521N
Q621	131-1188-00	2SB1188
Q622	193-2118-00	2SD2118F5
Q623	125-2026-95	UNR521N
Q624	190-1736-00	2SA1736
Q625	192-4081-00	2SC4081
Q626	190-1576-00	2SA1576A
Q627	125-2026-93	UNR5213
Q628	190-1298-00	2SA1298
Q629	125-2026-93	UNR5213
Q630	192-4081-00	2SC4081
R100	119-4731-15	1/10W 47k ohm
R101	119-4731-15	1/10W 47k ohm
R102	119-1021-15	1/10W 1k ohm
R103	119-1041-15	1/10W 100k ohm
R104	119-1021-15	1/10W 1k ohm
R105	119-1031-15	1/10W 10k ohm
R106	119-1031-15	1/10W 10k ohm
R107	119-1031-15	1/10W 10k ohm
R108	119-1031-15	1/10W 10k ohm
R109	119-1021-15	1/10W 1k ohm
R110	119-1031-15	1/10W 10k ohm
R111	119-1031-15	1/10W 10k ohm
R112	119-1031-15	1/10W 10k ohm
R113	119-1031-15	1/10W 10k ohm
R114	119-1031-15	1/10W 10k ohm
R117	119-1031-15	1/10W 10k ohm

REF No.	PART No.	DESCRIPTION
R120	119-1031-15	1/10W 10k ohm
R121	119-1031-15	1/10W 10k ohm
R122	119-0000-05	1/10W 0 ohm JW
R123	119-1031-15	1/10W 10k ohm
R125	119-2231-15	1/10W 22k ohm
R126	119-1031-15	1/10W 10k ohm
R127	119-1031-15	1/10W 10k ohm
R128	119-1031-15	1/10W 10k ohm
R129	119-3941-15	1/10W 390k ohm
R130	119-0000-05	1/10W 0 ohm JW
R131	119-1011-15	1/10W 100 ohm
R134	119-1031-15	1/10W 10k ohm
R136	119-1031-15	1/10W 10k ohm
R138	119-4711-15	1/10W 470 ohm
R139	119-1031-15	1/10W 10k ohm
R141	119-1011-15	1/10W 100 ohm
R142	119-1031-15	1/10W 10k ohm
R143	119-1231-15	1/10W 12k ohm
R144	119-1021-15	1/10W 1k ohm
R145	032-0140-62	1/10W 1k ohm F
R146	119-1031-15	1/10W 10k ohm
R147	032-0140-72	1/10W 470 ohm F
R148	119-4731-15	1/10W 47k ohm
R149	119-1031-15	1/10W 10k ohm
R150	119-2231-15	1/10W 22k ohm
R151	119-1031-15	1/10W 10k ohm
R152	119-1031-15	1/10W 10k ohm
R153	119-1031-15	1/10W 10k ohm
R154	119-1031-15	1/10W 10k ohm
R155	119-0000-05	1/10W 0 ohm JW
R156	119-1041-15	1/10W 100k ohm
R157	119-4741-15	1/10W 470k ohm
R158	032-0140-03	1/10W 220k ohm F
R159	119-4741-15	1/10W 470k ohm
R160	119-1041-15	1/10W 100k ohm
R161	119-1041-15	1/10W 100k ohm
R162	032-0140-66	1/10W 220 ohm F
R163	119-1031-15	1/10W 10k ohm
R164	119-1031-15	1/10W 10k ohm
R165	119-1031-15	1/10W 10k ohm
R166	119-4731-15	1/10W 47k ohm
R167	119-1041-15	1/10W 100k ohm
R168	119-1031-15	1/10W 10k ohm
R170	032-0140-67	1/10W 3.3k ohm F
R171	032-0140-51	1/10W 15k ohm F
R173	119-1051-15	1/10W 1M ohm
R174	032-0140-56	1/10W 12k ohm F
R175	032-0140-52	1/10W 33k ohm F
R176	032-0140-03	1/10W 220k ohm F
R177	119-1031-15	1/10W 10k ohm
R178	119-4731-15	1/10W 47k ohm
R179	119-4731-15	1/10W 47k ohm
R180	119-4731-15	1/10W 47k ohm
R181	119-1031-15	1/10W 10k ohm
R190	119-1031-15	1/10W 10k ohm
R191	032-0140-22	1/10W 68k ohm F
R192	032-0140-52	1/10W 33k ohm F
R193	032-0140-70	1/10W 1.8k ohm F
R194	119-1031-15	1/10W 10k ohm
R195	119-4731-15	1/10W 47k ohm
R196	119-4731-15	1/10W 47k ohm
R198	119-1811-15	1/10W 180 ohm
R199	119-1021-15	1/10W 1k ohm
R200	119-2231-15	1/10W 22k ohm
R201	119-1031-15	1/10W 10k ohm
R202	119-1021-15	1/10W 1k ohm
R203	119-1041-15	1/10W 100k ohm
R204	119-1011-15	1/10W 100 ohm
R205	119-1011-15	1/10W 100 ohm
R206	119-1011-15	1/10W 100 ohm
R207	119-1031-15	1/10W 10k ohm
R208	119-2231-15	1/10W 22k ohm
R209	119-1021-15	1/10W 1k ohm

REF No.	PART No.	DESCRIPTION
R212	119-1031-15	1/10W 10k ohm
R213	119-1031-15	1/10W 10k ohm
R214	119-4721-15	1/10W 4.7k ohm
R215	032-0140-80	1/10W 18k ohm F
R216	032-0140-51	1/10W 15k ohm F
R217	032-0140-80	1/10W 18k ohm F
R218	032-0140-51	1/10W 15k ohm F
R219	032-0140-51	1/10W 15k ohm F
R220	032-0140-80	1/10W 18k ohm F
R221	032-0140-51	1/10W 15k ohm F
R222	032-0140-80	1/10W 18k ohm F
R223	119-1041-15	1/10W 100k ohm
R224	119-8231-15	1/10W 82k ohm
R225	119-8231-15	1/10W 82k ohm
R226	119-1041-15	1/10W 100k ohm
R227	032-0140-51	1/10W 15k ohm F
R228	032-0140-80	1/10W 18k ohm F
R229	032-0140-51	1/10W 15k ohm F
R230	032-0140-80	1/10W 18k ohm F
R231	032-0140-80	1/10W 18k ohm F
R232	032-0140-51	1/10W 15k ohm F
R233	032-0140-80	1/10W 18k ohm F
R234	032-0140-51	1/10W 15k ohm F
R235	119-4721-15	1/10W 4.7k ohm
R236	119-1001-15	1/10W 10 ohm
R237	119-4721-15	1/10W 4.7k ohm
R238	119-4721-15	1/10W 4.7k ohm
R239	119-1011-15	1/10W 100 ohm
R240	119-1011-15	1/10W 100 ohm
R241	119-1011-15	1/10W 100 ohm
R242	119-1021-15	1/10W 1k ohm
R243	119-4721-15	1/10W 4.7k ohm
R244	119-1011-15	1/10W 100 ohm
R245	119-1011-15	1/10W 100 ohm
R246	119-1011-15	1/10W 100 ohm
R247	119-1011-15	1/10W 100 ohm
R248	119-1031-15	1/10W 10k ohm
R249	119-1011-15	1/10W 100 ohm
R250	119-1031-15	1/10W 10k ohm
R251	119-1011-15	1/10W 100 ohm
R252	119-1031-15	1/10W 10k ohm
R253	119-1031-15	1/10W 10k ohm
R254	119-1031-15	1/10W 10k ohm
R255	119-1011-15	1/10W 100 ohm
R256	119-1031-15	1/10W 10k ohm
R257	119-4721-15	1/10W 4.7k ohm
R258	119-1011-15	1/10W 100 ohm
R259	119-1011-15	1/10W 100 ohm
R260	119-4731-15	1/10W 47k ohm
R261	119-1031-15	1/10W 10k ohm
R262	119-1031-15	1/10W 10k ohm
R299	116-8291-15	1/4W 8.2 ohm
R300	119-4711-15	1/10W 470 ohm
R301	119-4711-15	1/10W 470 ohm
R302	119-4711-15	1/10W 470 ohm
R303	119-4711-15	1/10W 470 ohm
R304	119-4711-15	1/10W 470 ohm
R305	119-4711-15	1/10W 470 ohm
R306	119-4711-15	1/10W 470 ohm
R307	119-4711-15	1/10W 470 ohm
R308	119-1021-15	1/10W 1k ohm
R309	119-2231-15	1/10W 22k ohm
R310	119-1021-15	1/10W 1k ohm
R311	119-8221-15	1/10W 8.2k ohm
R312	119-1031-15	1/10W 10k ohm
R313	119-1021-15	1/10W 1k ohm
R314	119-8221-15	1/10W 8.2k ohm
R315	119-1021-15	1/10W 1k ohm
R316	119-2231-15	1/10W 22k ohm
R318	119-3311-15	1/10W 330 ohm
R319	119-3311-15	1/10W 330 ohm
R320	119-0000-05	1/10W 0 ohm JW
R321	119-2221-15	1/10W 2.2k ohm

REF No.	PART No.	DESCRIPTION
R322	119-2231-15	1/10W 22k ohm
R323	119-2231-15	1/10W 22k ohm
R324	119-1031-15	1/10W 10k ohm
R325	119-1031-15	1/10W 10k ohm
R326	119-1031-15	1/10W 10k ohm
R327	119-1031-15	1/10W 10k ohm
R328	119-3311-15	1/10W 330 ohm
R329	119-3311-15	1/10W 330 ohm
R330	119-2721-15	1/10W 2.7k ohm
R331	119-2721-15	1/10W 2.7k ohm
R332	119-2721-15	1/10W 2.7k ohm
R333	119-2721-15	1/10W 2.7k ohm
R334	119-1021-15	1/10W 1k ohm
R335	119-1021-15	1/10W 1k ohm
R336	119-4731-15	1/10W 47k ohm
R337	119-4731-15	1/10W 47k ohm
R338	119-4731-15	1/10W 47k ohm
R339	119-4731-15	1/10W 47k ohm
R340	119-1041-15	1/10W 100k ohm
R341	119-1041-15	1/10W 100k ohm
R342	032-0140-56	1/10W 12k ohm F
R343	032-0140-56	1/10W 12k ohm F
R344	119-2231-15	1/10W 22k ohm
R345	119-2231-15	1/10W 22k ohm
R346	119-1031-15	1/10W 10k ohm
R347	119-1031-15	1/10W 10k ohm
R348	119-1031-15	1/10W 10k ohm
R349	119-1031-15	1/10W 10k ohm
R350	119-1031-15	1/10W 10k ohm
R351	119-1031-15	1/10W 10k ohm
R352	119-1031-15	1/10W 10k ohm
R353	119-1031-15	1/10W 10k ohm
R354	119-1031-15	1/10W 10k ohm
R355	119-1031-15	1/10W 10k ohm
R356	119-3321-15	1/10W 3.3k ohm
R357	119-3321-15	1/10W 3.3k ohm
R358	119-2721-15	1/10W 2.7k ohm
R359	119-2721-15	1/10W 2.7k ohm
R360	032-0140-51	1/10W 15k ohm F
R361	032-0140-51	1/10W 15k ohm F
R362	119-4731-15	1/10W 47k ohm
R363	119-4731-15	1/10W 47k ohm
R364	119-2231-15	1/10W 22k ohm
R365	119-2231-15	1/10W 22k ohm
R366	032-0140-51	1/10W 15k ohm F
R367	032-0140-51	1/10W 15k ohm F
R368	119-2231-15	1/10W 22k ohm
R369	119-2231-15	1/10W 22k ohm
R370	119-2231-15	1/10W 22k ohm
R371	119-2231-15	1/10W 22k ohm
R372	119-2231-15	1/10W 22k ohm
R373	119-2231-15	1/10W 22k ohm
R374	119-3321-15	1/10W 3.3k ohm
R375	119-3321-15	1/10W 3.3k ohm
R376	119-3311-15	1/10W 330 ohm
R377	119-1021-15	1/10W 1k ohm
R378	119-1021-15	1/10W 1k ohm
R379	119-3311-15	1/10W 330 ohm
R380	119-2221-15	1/10W 2.2k ohm
R381	119-1021-15	1/10W 1k ohm
R382	119-1021-15	1/10W 1k ohm
R383	119-2221-15	1/10W 2.2k ohm
R384	119-4731-15	1/10W 47k ohm
R385	119-1041-15	1/10W 100k ohm
R386	119-1041-15	1/10W 100k ohm
R387	119-1041-15	1/10W 100k ohm
R388	119-2231-15	1/10W 22k ohm
R389	119-2231-15	1/10W 22k ohm
R390	119-4731-15	1/10W 47k ohm
R391	119-4731-15	1/10W 47k ohm
R392	119-4731-15	1/10W 47k ohm
R393	119-4731-15	1/10W 47k ohm
R394	119-3921-15	1/10W 3.9k ohm
R395	119-4731-15	1/10W 47k ohm
R396	119-3921-15	1/10W 3.9k ohm
R397	119-4731-15	1/10W 47k ohm
R398	119-3321-15	1/10W 3.3k ohm
R399	119-0000-05	1/10W 0 ohm JW
R401	119-3321-15	1/10W 3.3k ohm
R402	119-1031-15	1/10W 10k ohm
R403	119-4731-15	1/10W 47k ohm
R404	119-2231-15	1/10W 22k ohm
R405	119-2231-15	1/10W 22k ohm
R406	119-0000-05	1/10W 0 ohm JW
R408	119-2231-15	1/10W 22k ohm
R409	119-2231-15	1/10W 22k ohm
R410	119-1021-15	1/10W 1k ohm
R411	119-1021-15	1/10W 1k ohm
R412	119-2221-15	1/10W 2.2k ohm
R413	119-2221-15	1/10W 2.2k ohm
R419	032-0140-12	1/10W 75 ohm F
R420	119-4731-15	1/10W 47k ohm
R421	032-0140-12	1/10W 75 ohm F
R422	032-0140-12	1/10W 75 ohm F
R423	032-0140-12	1/10W 75 ohm F
R425	032-0140-12	1/10W 75 ohm F
R426	119-1031-15	1/10W 10k ohm
R427	119-1031-15	1/10W 10k ohm
R428	119-4721-15	1/10W 4.7k ohm
R429	119-2221-15	1/10W 2.2k ohm
R430	119-4721-15	1/10W 4.7k ohm
R431	119-2221-15	1/10W 2.2k ohm
R432	119-4731-15	1/10W 47k ohm
R433	119-4731-15	1/10W 47k ohm
R434	119-1011-15	1/10W 100 ohm
R450	119-4731-15	1/10W 47k ohm
R451	119-4731-15	1/10W 47k ohm
R452	119-4731-15	1/10W 47k ohm
R453	119-4731-15	1/10W 47k ohm
R465	032-0140-66	1/10W 220 ohm F
R466	032-0140-66	1/10W 220 ohm F
R501	116-1211-15	1/4W 120 ohm
R502	119-1031-15	1/10W 10k ohm
R503	116-1211-15	1/4W 120 ohm
R504	116-1211-15	1/4W 120 ohm
R505	119-4731-15	1/10W 47k ohm
R506	116-2211-15	1/4W 220 ohm
R507	119-0000-05	1/10W 0 ohm JW
R509	032-0140-75	1/10W 1.5k ohm F
R510	032-0140-71	1/10W 390 ohm F
R511	032-0140-62	1/10W 1k ohm F
R512	032-0140-83	1/10W 150 ohm F
R515	032-0140-23	1/10W 68 ohm F
R517	119-4731-15	1/10W 47k ohm
R518	119-1031-15	1/10W 10k ohm
R519	119-4731-15	1/10W 47k ohm
R520	119-1011-15	1/10W 100 ohm
R521	119-4731-15	1/10W 47k ohm
R523	119-1011-15	1/10W 100 ohm
R524	119-1221-15	1/10W 1.2k ohm
R526	032-0140-56	1/10W 12k ohm F
R528	119-1031-15	1/10W 10k ohm
R529	119-0000-05	1/10W 0 ohm JW
R531	119-0000-05	1/10W 0 ohm JW
R532	032-0140-62	1/10W 1k ohm F
R533	119-0000-05	1/10W 0 ohm JW
R581	119-1231-15	1/10W 12k ohm
R595	119-4731-15	1/10W 47k ohm
R596	119-0000-05	1/10W 0 ohm JW
R600	116-1221-15	1/4W 1.2k ohm
R601	119-1021-15	1/10W 1k ohm
R602	119-1021-15	1/10W 1k ohm
R603	119-1021-15	1/10W 1k ohm
R604	119-1021-15	1/10W 1k ohm
R605	119-1031-15	1/10W 10k ohm
R606	119-6811-15	1/10W 680 ohm
R607	119-6811-15	1/10W 680 ohm
R608	119-1031-15	1/10W 10k ohm
R610	032-0140-63	1/10W 27k ohm F
R611	032-0140-05	1/10W 82k ohm F
R612	119-2291-15	1/10W 2.2 ohm
R613	119-2701-15	1/10W 27 ohm
R614	116-6811-15	1/4W 680 ohm
R615	119-1031-15	1/10W 10k ohm
R616	119-0000-05	1/10W 0 ohm JW
R617	119-8221-15	1/10W 8.2k ohm
R618	116-6811-15	1/4W 680 ohm
R619	032-0140-03	1/10W 220k ohm F
R620	119-1031-15	1/10W 10k ohm
R621	116-3911-15	1/4W 390 ohm
R622	116-3911-15	1/4W 390 ohm
R623	119-1031-15	1/10W 10k ohm
R624	116-2211-15	1/4W 220 ohm
R625	116-1011-15	1/4W 100 ohm
R626	116-1011-15	1/4W 100 ohm
R627	116-1011-15	1/4W 100 ohm
R628	116-1011-15	1/4W 100 ohm
R629	116-1011-15	1/4W 100 ohm
R630	116-1011-15	1/4W 100 ohm
R631	119-1031-15	1/10W 10k ohm
R632	119-4721-15	1/10W 4.7k ohm
R633	119-3921-15	1/10W 3.9k ohm
R634	119-1031-15	1/10W 10k ohm
R635	119-1031-15	1/10W 10k ohm
R638	116-1811-15	1/4W 180 ohm
R640	119-1031-15	1/10W 10k ohm
R641	119-1031-15	1/10W 10k ohm
R642	116-1521-15	1/4W 1.5k ohm
R643	119-3321-15	1/10W 3.3k ohm
R644	116-3311-15	1/4W 330 ohm
R645	116-1521-15	1/4W 1.5k ohm
R646	116-1811-15	1/4W 180 ohm
R647	032-0140-63	1/10W 27k ohm F
R648	119-1031-15	1/10W 10k ohm
R649	116-2291-15	1/4W 2.2 ohm
R650	116-2291-15	1/4W 2.2 ohm
R651	116-2291-15	1/4W 2.2 ohm
R652	032-0140-50	1/10W 10k ohm F
R653	119-3321-15	1/10W 3.3k ohm
R654	119-2231-15	1/10W 22k ohm
R655	119-0000-05	1/10W 0 ohm JW
R656	116-2291-15	1/4W 2.2 ohm
R657	116-2291-15	1/4W 2.2 ohm
R658	116-2291-15	1/4W 2.2 ohm
R659	119-3321-15	1/10W 3.3k ohm
R660	119-1031-15	1/10W 10k ohm
R661	032-0209-50	1/4W 82 ohm D
R662	032-0140-51	1/10W 15k ohm F
R663	116-6801-15	1/4W 68 ohm
R664	119-1031-15	1/10W 10k ohm
R665	119-4731-15	1/10W 47k ohm
R666	119-4721-15	1/10W 4.7k ohm
R671	119-4731-15	1/10W 47k ohm
R672	119-4731-15	1/10W 47k ohm
R673	119-1031-15	1/10W 10k ohm
R674	119-1031-15	1/10W 10k ohm
R675	116-1811-15	1/4W 180 ohm
R676	116-1811-15	1/4W 180 ohm
R677	032-0140-03	1/10W 220k ohm F
R678	032-0140-88	1/10W 100k ohm F
R679	032-0140-56	1/10W 12k ohm F
R680	119-4731-15	1/10W 47k ohm
R681	119-1031-15	1/10W 10k ohm
R682	119-1031-15	1/10W 10k ohm
R683	032-0140-80	1/10W 18k ohm F
R684	119-1231-15	1/10W 12k ohm
R685	119-1031-15	1/10W 10k ohm
SUP201	060-0122-20	DSP-141N-S00B
TH100	002-0315-00	TN10-3U153JT

REF No.	PART No.	DESCRIPTION
TH301	002-0328-90	miniSMDC050F-2
X100	060-8045-00	PKLCS1212E4001-R
X101	061-3522-90	32.768KHz

REF No.	PART No.	DESCRIPTION
X102	060-1541-90	3.14MHz
X200	061-3537-90	41.6MHz

REF No.	PART No.	DESCRIPTION
PWB	039-3314-00	PWB(WITHOUT CO MPONENTS)

JOINT PWB(B3) section

REF No.	PART No.	DESCRIPTION
C700	166-1501-50	15pF CH
C701	166-2201-50	22pF CH
C702	166-6801-50	68pF CH
C703	166-8097-50	8pF C CH
C704	168-1022-55	1000pF K
C705	168-1042-78	16V 0.1uF
C706	166-2201-50	22pF CH
C707	168-4732-78	0.047uF K
C708	166-4096-50	4pF CH
C709	168-1222-55	1200pF K
C710	166-3301-50	33pF CH
C711	168-4732-78	0.047uF K
C712	166-1201-50	12pF CH
C713	168-4732-78	0.047uF K
C714	166-1201-50	12pF CH
C715	168-3932-78	0.039uF K
C716	168-1222-55	1200pF K
C717	168-1022-55	1000pF K
C718	168-1022-55	1000pF K
C719	166-1007-50	10pF CH
C720	166-1007-50	10pF CH
C750	166-3096-50	3pF CJ
C3002	168-1045-56	25V 0.1uF
C3003	168-1042-78	16V 0.1uF
C3004	168-1042-78	16V 0.1uF
C3005	043-0604-90	25V 10uF B
C3006	043-0604-90	25V 10uF B
D700	001-9006-90	HVM189S
D701	001-0530-90	1SS271
D702	001-0516-90	MA111
D3002	001-4305-20	UDZSTE-17 5.6B
D3004	001-7038-91	CL-221FG FRE-GRN
D3006	001-0584-24	MA8082
D3007	001-7043-90	CL-170FG F-GREEN
D3008	001-7036-90	CL-201R-X RED
D3009	001-7043-90	CL-170FG F-GREEN
D3010	001-4305-20	UDZSTE-17 5.6B
IC3000	051-5806-01	GP1S93

REF No.	PART No.	DESCRIPTION
IC3001	051-5806-01	GP1S93
IC3002	051-1014-08	TA7291FG-EL
J3000	076-3032-50	50P
L701	010-2198-50	0.15uH
L702	010-2198-61	0.12uH
L703	010-2198-62	0.27uH
L704	010-8037-00	0.545uH M
L705	010-8037-01	0.85uH M
L706	010-2198-84	0.68uH
L707	010-2198-62	0.27uH
L708	010-2198-62	0.27uH
L750	010-3406-29	0.018uH J
P700	076-0324-09	9P
P3000	076-3006-58	8P
P3001	076-3011-80	30P
P3002	076-3011-80	30P
P3003	076-0478-52	2P
P3004	076-3018-80	30P
P3005	074-1322-10	50P
P3006	076-3018-80	30P
Q700	192-2223-13	2SC2223-T1B
Q701	126-0222-90	3SK222 V221,22
Q702	192-2223-13	2SC2223-T1B
Q703	192-4703-50	2SC4703 SF,SE
Q704	192-4703-50	2SC4703 SF,SE
Q705	193-1306-00	2SD1306
Q706	193-1306-00	2SD1306
Q707	190-1162-00	2SA1162
Q3000	125-2026-95	UNR521N
R700	119-3921-15	1/10W 3.9k ohm
R701	119-5631-15	1/10W 56k ohm
R702	119-4731-15	1/10W 47k ohm
R703	119-3331-15	1/10W 33k ohm
R704	119-4711-15	1/10W 470 ohm
R705	119-4721-15	1/10W 4.7k ohm
R706	119-1511-15	1/10W 150 ohm
R707	119-5631-15	1/10W 56k ohm
R708	119-4301-15	1/10W 43 ohm

REF No.	PART No.	DESCRIPTION
R709	119-2221-15	1/10W 2.2k ohm
R710	119-1511-15	1/10W 150 ohm
R711	119-3321-15	1/10W 3.3k ohm
R712	119-6821-15	1/10W 6.8k ohm
R713	119-1531-15	1/10W 15k ohm
R714	119-6821-15	1/10W 6.8k ohm
R715	119-1531-15	1/10W 15k ohm
R716	119-1021-15	1/10W 1k ohm
R717	119-6811-15	1/10W 680 ohm
R718	119-6811-15	1/10W 680 ohm
R719	119-1011-15	1/10W 100 ohm
R720	119-3911-15	1/10W 390 ohm
R721	119-1011-15	1/10W 100 ohm
R722	119-3911-15	1/10W 390 ohm
R723	119-4701-15	1/10W 47 ohm
R724	119-4701-15	1/10W 47 ohm
R725	119-5611-15	1/10W 560 ohm
R726	119-4731-15	1/10W 47k ohm
R727	119-5611-15	1/10W 560 ohm
R729	119-2721-15	1/10W 2.7k ohm
R730	119-1011-15	1/10W 100 ohm
R750	119-3941-15	1/10W 390k ohm
R780	119-0000-05	1/10W 0 ohm JW
R3000	116-5611-15	1/4W 560 ohm
R3001	116-5611-15	1/4W 560 ohm
R3002	119-3321-15	1/10W 3.3k ohm
R3010	119-1021-15	1/10W 1k ohm
R3012	119-3911-15	1/10W 390 ohm
R3013	119-5611-15	1/10W 560 ohm
R3014	119-1021-15	1/10W 1k ohm
R3015	119-1021-15	1/10W 1k ohm
R3016	119-3311-15	1/10W 330 ohm
S3000	013-6312-50	SKRP-ABE-010
S3001	013-6312-50	SKRP-ABE-010
PWB	039-3136-00	PWB(WITHOUT CO MPONENTS)

LCD PWB(B4) section

REF No.	PART No.	DESCRIPTION
C501	168-1042-78	16V 0.1uF
C701	042-1760-90	16V 10uF M
C702	042-1760-90	16V 10uF M
C703	042-1760-90	16V 10uF M
C704	166-1007-50	10pF CH
C706	042-1764-90	16V 100uF M
C709	178-1055-79	1uF
C710	168-1032-55	0.01uF K
C712	168-1032-55	0.01uF K
C713	166-8211-50	820pF
C714	168-1032-55	0.01uF K
C715	168-1032-55	0.01uF K
C716	168-1032-55	0.01uF K
C717	168-1032-55	0.01uF K
C718	168-1032-55	0.01uF K
C719	168-1032-55	0.01uF K
C720	043-0547-50	16V 3.3uF
C721	168-1052-78	16V 1uF
C722	042-1764-90	16V 100uF M
C723	168-1052-78	16V 1uF
C724	168-1052-78	16V 1uF
C725	168-1032-55	0.01uF K
C726	168-1032-55	0.01uF K
C727	168-1052-78	16V 1uF

REF No.	PART No.	DESCRIPTION
C728	042-1764-90	16V 100uF M
C729	168-1032-55	0.01uF K
C730	168-1052-78	16V 1uF
C731	168-1032-55	0.01uF K
C733	168-2232-55	0.022uF K
C734	166-5601-50	56pF CH
C735	168-1042-78	16V 0.1uF
C736	168-4732-78	0.047uF K
C737	168-1042-78	16V 0.1uF
C738	168-1032-55	0.01uF K
C739	168-1052-78	16V 1uF
C750	168-1032-55	0.01uF K
C751	168-1045-56	25V 0.1uF
C752	042-1765-90	10V 33uF
C753	168-1045-56	25V 0.1uF
C754	042-1764-90	16V 100uF M
C755	168-1032-55	0.01uF K
C757	168-1045-56	25V 0.1uF
C758	042-1760-90	16V 10uF M
C759	168-1032-55	0.01uF K
C760	168-1045-56	25V 0.1uF
C761	042-1760-90	16V 10uF M
C762	042-1764-90	16V 100uF M
C763	178-2242-78	0.22uF

REF No.	PART No.	DESCRIPTION
C764	168-1045-56	25V 0.1uF
C765	168-1032-55	0.01uF K
C766	042-1760-90	16V 10uF M
C767	168-1045-56	25V 0.1uF
C768	168-1032-55	0.01uF K
C769	178-2242-78	0.22uF
C770	168-1045-56	25V 0.1uF
C771	168-6832-78	0.068uF K
C772	168-1032-55	0.01uF K
C773	166-1801-50	18pF CH
C774	168-1032-55	0.01uF K
C776	168-1032-55	0.01uF K
C777	168-1032-55	0.01uF K
C778	168-1045-56	25V 0.1uF
C779	168-1032-55	0.01uF K
C780	168-1032-55	0.01uF K
C781	168-1042-78	16V 0.1uF
C782	166-6811-50	680pF
C783	168-1045-56	25V 0.1uF
C784	168-1022-55	1000pF K
C785	168-1045-56	25V 0.1uF
C786	166-1011-50	100pF CH
C787	168-1045-56	25V 0.1uF
C788	166-4701-50	47pF CH

REF No.	PART No.	DESCRIPTION
C790	168-1045-56	25V 0.1uF
C791	168-1045-56	25V 0.1uF
C801	166-4711-50	470pF CH
C802	166-4711-50	470pF CH
C803	166-4711-50	470pF CH
C804	166-4711-50	470pF CH
C805	166-1021-50	1000pF CH
C806	166-1021-50	1000pF CH
C807	166-1021-50	1000pF CH
C808	166-1021-50	1000pF CH
C809	168-1042-78	16V 0.1uF
C810	042-1764-90	16V 100uF M
C811	168-1042-78	16V 0.1uF
C812	168-1042-78	16V 0.1uF
C813	168-1042-78	16V 0.1uF
C814	168-1042-78	16V 0.1uF
C815	166-4711-50	470pF CH
C816	168-1042-78	16V 0.1uF
C819	168-1042-78	16V 0.1uF
C850	168-1045-56	25V 0.1uF
C851	178-2255-79	2.2uF
C852	043-0549-50	3KV 10PF
C853	042-1727-90	16V 33uF TAN
C854	168-1045-56	25V 0.1uF
C855	168-1232-55	0.012uF K
C856	166-3911-50	390pF CH
C857	042-1763-90	25V 47uF M
C858	168-1022-55	1000pF K
C859	168-1032-55	0.01uF K
C860	166-3311-50	330pF CH
C861	168-4722-55	4700pF K
C862	168-6832-78	0.068uF K
C863	178-2255-79	2.2uF
C864	168-2232-55	0.022uF K
C865	178-1052-78	1uF
C866	043-0567-90	25V 22uF
C867	043-0567-90	25V 22uF
C868	168-1032-55	0.01uF K
C869	042-1763-90	25V 47uF M
C870	168-1045-56	25V 0.1uF
C873	042-1763-90	25V 47uF M
C875	042-1761-90	35V 22uF M
C876	042-1761-90	35V 22uF M
C877	168-1045-56	25V 0.1uF
C878	042-1761-90	35V 22uF M
C879	042-1764-90	16V 100uF M
C880	178-1055-79	1uF
C881	042-1763-90	25V 47uF M
C882	168-1042-78	16V 0.1uF
C883	042-1761-90	35V 22uF M
C884	042-1763-90	25V 47uF M
C885	042-1764-90	16V 100uF M
C886	178-1055-79	1uF
C887	168-1022-55	1000pF K
C888	042-1763-90	25V 47uF M
C889	042-1761-90	35V 22uF M
C890	042-1762-90	35V 4.7uF M
C891	042-1764-90	16V 100uF M
C893	042-1750-90	16V 100uF M
C894	042-1763-90	25V 47uF M
C895	042-1763-90	25V 47uF M
C896	178-1055-79	1uF
C897	168-2222-55	2200pF K
CCT750	050-0140-52	1/32W 100 ohm x4J
CCT751	050-0140-52	1/32W 100 ohm x4J
CCT752	050-0140-58	1/32W 470 ohm x4J
CCT801	050-0140-54	1/32W 1k ohm x4J
CCT802	050-0140-58	1/32W 470 ohm x4J
CCT803	050-0140-54	1/32W 1k ohm x4J
CCT804	050-0140-63	1/32W 47k ohm x4J
CCT805	050-0140-63	1/32W 47k ohm x4J
D507	001-4305-20	UDZSTE-17 5.6B
D508	001-7080-93	SML512BC5TT86

REF No.	PART No.	DESCRIPTION
D509	001-7080-93	SML512BC5TT86
D510	001-7080-93	SML512BC5TT86
D511	001-7080-93	SML512BC5TT86
D512	001-7080-93	SML512BC5TT86
D513	001-7080-93	SML512BC5TT86
D514	001-7080-93	SML512BC5TT86
D521	001-7094-91	VFR1112H-TR
D522	001-7080-93	SML512BC5TT86
D523	001-7080-93	SML512BC5TT86
D524	001-7080-93	SML512BC5TT86
D525	001-7080-93	SML512BC5TT86
D526	001-7080-93	SML512BC5TT86
D527	001-7080-93	SML512BC5TT86
D528	001-7080-93	SML512BC5TT86
D750	001-0535-90	MA729
D752	001-3218-90	1SV231
D753	001-0529-29	MA8051-M
D754	001-0529-29	MA8051-M
D801	001-0367-91	1SS226
D802	001-0367-91	1SS226
D803	001-0367-91	1SS226
D804	001-0367-91	1SS226
D805	001-0525-90	IMN10
D806	001-0580-90	1SS352
D807	001-4305-20	UDZSTE-17 5.6B
D808	001-4305-20	UDZSTE-17 5.6B
D809	001-4305-20	UDZSTE-17 5.6B
D810	001-4305-20	UDZSTE-17 5.6B
D811	001-4305-20	UDZSTE-17 5.6B
D812	001-4305-20	UDZSTE-17 5.6B
D813	001-4305-20	UDZSTE-17 5.6B
D814	001-4305-20	UDZSTE-17 5.6B
D816	001-4305-20	UDZSTE-17 5.6B
D851	001-0529-29	MA8051-M
D852	001-1315-90	HSM123TL-E
D853	001-1315-90	HSM123TL-E
D875	001-0517-90	1SS355
D876	001-0517-90	1SS355
D877	001-2606-90	M1FS4
D878	001-0517-90	1SS355
D879	001-0517-90	1SS355
F852	060-8058-92	1.0A ERBSE1R00U
FIL750	060-3118-50	FK2125T25
IC701	051-1292-90	NJM4565M-D
IC702	051-5313-10	IR3Y29BM
IC751	051-6443-00	TC200G02AF-0104Z
IC752	051-7262-48	TC7WH14FU-TE12L,F
IC754	051-3025-90	NJM2107F
IC755	051-7243-18	TC7SET08FU-TE85L,F
IC801	052-7066-01	M30102M2-561FP
IC851	125-9023-90	TPCF8402TE85L,F
IC852	051-3925-90	OZ9910ISN-T2
IC853	125-9023-90	TPCF8402TE85L,F
IC854	051-3351-90	BA033CC0FP-E2
IC875	051-3913-90	NJM2368E
IR501	060-4017-91	SR-671
J502	074-2212-62	SOCKET(12P)
J503	074-2212-62	SOCKET(12P)
J701	074-2225-92	42P
J750	074-2241-80	30P
J801	074-2219-54	4P
J803	074-2225-62	12P
J804	074-2225-62	12P
L701	010-3406-68	33uH J
L702	010-3406-68	33uH J
L750	010-3407-62	10uH J
L751	010-3407-62	10uH J
L752	010-3407-62	10uH J
L753	010-3407-68	33uH J
L754	010-3406-59	5.6uH J
L801	010-3406-59	5.6uH J


REF No.	PART No.	DESCRIPTION
L852	010-3059-90	200 ohm FILTER
L875	010-3010-50	100uH
L876	010-3406-74	100uH J
L877	010-3406-74	100uH J
L878	010-3057-90	100uH
L879	010-3406-74	100uH J
L880	010-3406-74	100uH J
P851	076-0529-02	2P
Q701	192-3265-00	2SC3265
Q702	190-1298-00	2SA1298
Q703	192-3265-00	2SC3265
Q704	190-1298-00	2SA1298
Q750	192-4118-00	2SC4118
Q801	125-2027-94	DTC123JUA
Q802	125-2027-94	DTC123JUA
Q803	125-0021-94	DTA123JUA
Q804	125-0021-94	DTA123JUA
Q851	125-0025-92	RN2302
Q852	125-2032-92	RN1302
Q875	192-2873-00	2SC2873
R501	119-1821-15	1/10W 1.8k ohm
R502	119-1821-15	1/10W 1.8k ohm
R503	119-1821-15	1/10W 1.8k ohm
R506	119-1821-15	1/10W 1.8k ohm
R507	119-1821-15	1/10W 1.8k ohm
R508	119-1821-15	1/10W 1.8k ohm
R509	119-1821-15	1/10W 1.8k ohm
R701	119-1031-15	1/10W 10k ohm
R702	119-6821-15	1/10W 6.8k ohm
R703	119-4321-15	1/10W 4.3k ohm
R704	119-5621-15	1/10W 5.6k ohm
R705	119-1011-15	1/10W 100 ohm
R706	119-5621-15	1/10W 5.6k ohm
R707	119-6821-15	1/10W 6.8k ohm
R708	119-1011-15	1/10W 100 ohm
R709	032-0140-62	1/10W 1k ohm F
R710	119-3931-15	1/10W 39k ohm
R711	119-3931-15	1/10W 39k ohm
R712	119-3931-15	1/10W 39k ohm
R713	119-4731-15	1/10W 47k ohm
R714	032-0140-80	1/10W 18k ohm F
R715	032-0140-58	1/10W 51k ohm F
R716	032-0140-23	1/10W 68 ohm F
R717	032-0140-23	1/10W 68 ohm F
R718	032-0140-23	1/10W 68 ohm F
R719	119-2231-15	1/10W 22k ohm
R720	119-2231-15	1/10W 22k ohm
R721	119-2231-15	1/10W 22k ohm
R722	119-2231-15	1/10W 22k ohm
R723	032-0140-52	1/10W 33k ohm F
R724	032-0140-99	1/10W 39k ohm F
R725	119-1831-15	1/10W 18k ohm
R726	119-1231-15	1/10W 12k ohm
R729	119-5641-15	1/10W 560k ohm
R730	119-5611-15	1/10W 560 ohm
R731	119-1011-15	1/10W 100 ohm
R732	119-1011-15	1/10W 100 ohm
R733	119-1011-15	1/10W 100 ohm
R734	032-0140-80	1/10W 18k ohm F
R736	119-2221-15	1/10W 2.2k ohm
R742	119-4731-15	1/10W 47k ohm
R743	119-4731-15	1/10W 47k ohm
R745	119-1011-15	1/10W 100 ohm
R746	119-1011-15	1/10W 100 ohm
R747	119-1011-15	1/10W 100 ohm
R754	119-6811-15	1/10W 680 ohm
R757	119-3301-15	1/10W 33 ohm
R758	119-1011-15	1/10W 100 ohm
R759	119-1011-15	1/10W 100 ohm
R760	119-1021-15	1/10W 1k ohm
R761	119-1021-15	1/10W 1k ohm
R762	119-1021-15	1/10W 1k ohm
R763	119-4711-15	1/10W 470 ohm

REF No.	PART No.	DESCRIPTION
R767	119-1051-15	1/10W 1M ohm
R768	119-6831-15	1/10W 68k ohm
R769	119-6831-15	1/10W 68k ohm
R770	119-1821-15	1/10W 1.8k ohm
R771	119-1011-15	1/10W 100 ohm
R772	119-4721-15	1/10W 4.7k ohm
R773	119-4731-15	1/10W 47k ohm
R774	119-1531-15	1/10W 15k ohm
R775	119-1531-15	1/10W 15k ohm
R777	119-3321-15	1/10W 3.3k ohm
R778	119-3311-15	1/10W 330 ohm
R779	032-0140-79	1/10W 2.7k ohm F
R780	119-3621-15	1/10W 3.6k ohm
R781	119-2031-15	1/10W 20k ohm
R782	119-0000-05	1/10W 0 ohm JW
R783	032-0140-57	1/10W 5.6k ohm F
R784	119-1031-15	1/10W 10k ohm
R801	119-2231-15	1/10W 22k ohm
R802	119-2231-15	1/10W 22k ohm
R803	119-4711-15	1/10W 470 ohm
R804	119-4711-15	1/10W 470 ohm
R805	119-3321-15	1/10W 3.3k ohm
R806	119-6811-15	1/10W 680 ohm
R807	119-4731-15	1/10W 47k ohm
R808	119-1051-15	1/10W 1M ohm
R809	119-2211-15	1/10W 220 ohm
R814	119-4731-15	1/10W 47k ohm
R815	119-4731-15	1/10W 47k ohm
R816	119-4731-15	1/10W 47k ohm

REF No.	PART No.	DESCRIPTION
R817	119-4731-15	1/10W 47k ohm
R818	119-4731-15	1/10W 47k ohm
R851	116-6811-15	1/4W 680 ohm
R852	119-1041-15	1/10W 100k ohm
R853	119-1031-15	1/10W 10k ohm
R854	032-0140-89	1/10W 47k ohm F
R855	119-1021-15	1/10W 1k ohm
R856	119-3931-15	1/10W 39k ohm
R857	119-1031-15	1/10W 10k ohm
R858	119-3351-15	1/10W 3.3M ohm
R859	119-1021-15	1/10W 1k ohm
R860	119-1021-15	1/10W 1k ohm
R861	119-6841-15	1/10W 680k ohm
R862	119-1051-15	1/10W 1M ohm
R863	032-0140-90	1/10W 560 ohm F
R864	032-0140-61	1/10W 3k ohm F
R865	119-1021-15	1/10W 1k ohm
R866	119-1021-15	1/10W 1k ohm
R874	119-2231-15	1/10W 22k ohm
R875	119-1001-15	1/10W 10 ohm
R876	119-3311-15	1/10W 330 ohm
R877	119-1841-15	1/10W 180k ohm
R878	119-6841-15	1/10W 680k ohm
R879	119-3931-15	1/10W 39k ohm
R880	119-6841-15	1/10W 680k ohm
R881	119-2431-15	1/10W 24k ohm
R882	119-2221-15	1/10W 2.2k ohm
R893	119-1811-15	1/10W 180 ohm
R898	119-0000-05	1/10W 0 ohm JW

REF No.	PART No.	DESCRIPTION
S501	013-6312-50	SKRP-ABE-010
S502	013-6312-50	SKRP-ABE-010
S503	013-6312-50	SKRP-ABE-010
S504	013-6312-50	SKRP-ABE-010
S505	013-6312-50	SKRP-ABE-010
S506	013-6312-50	SKRP-ABE-010
S507	013-6312-50	SKRP-ABE-010
S508	013-6312-50	SKRP-ABE-010
S509	013-6312-50	SKRP-ABE-010
S510	013-6312-50	SKRP-ABE-010
S511	013-6312-50	SKRP-ABE-010
S512	013-6312-50	SKRP-ABE-010
S513	013-6312-50	SKRP-ABE-010
S514	013-6312-50	SKRP-ABE-010
T851	007-1181-90	TR25-A-S
T875	007-1168-90	TR11-A-S
VR701	012-6009-56	10k ohm B VR
VR702	012-6009-53	2.2k ohm B VR
VR703	012-6009-58	33k ohm B VR
VR704	012-6009-58	33k ohm B VR
VR705	012-6009-58	33k ohm B VR
VR706	012-6009-58	33k ohm B VR
VR707	012-6009-57	22k ohm B VR
VR750	012-6009-56	10k ohm B VR
VR875	012-6009-52	1k ohm B VR
X801	060-1531-90	4.91MHz
PWB	039-3315-00	PWB(WITHOUT CO MPONENTS)

EXPLODED VIEW / PARTS LIST

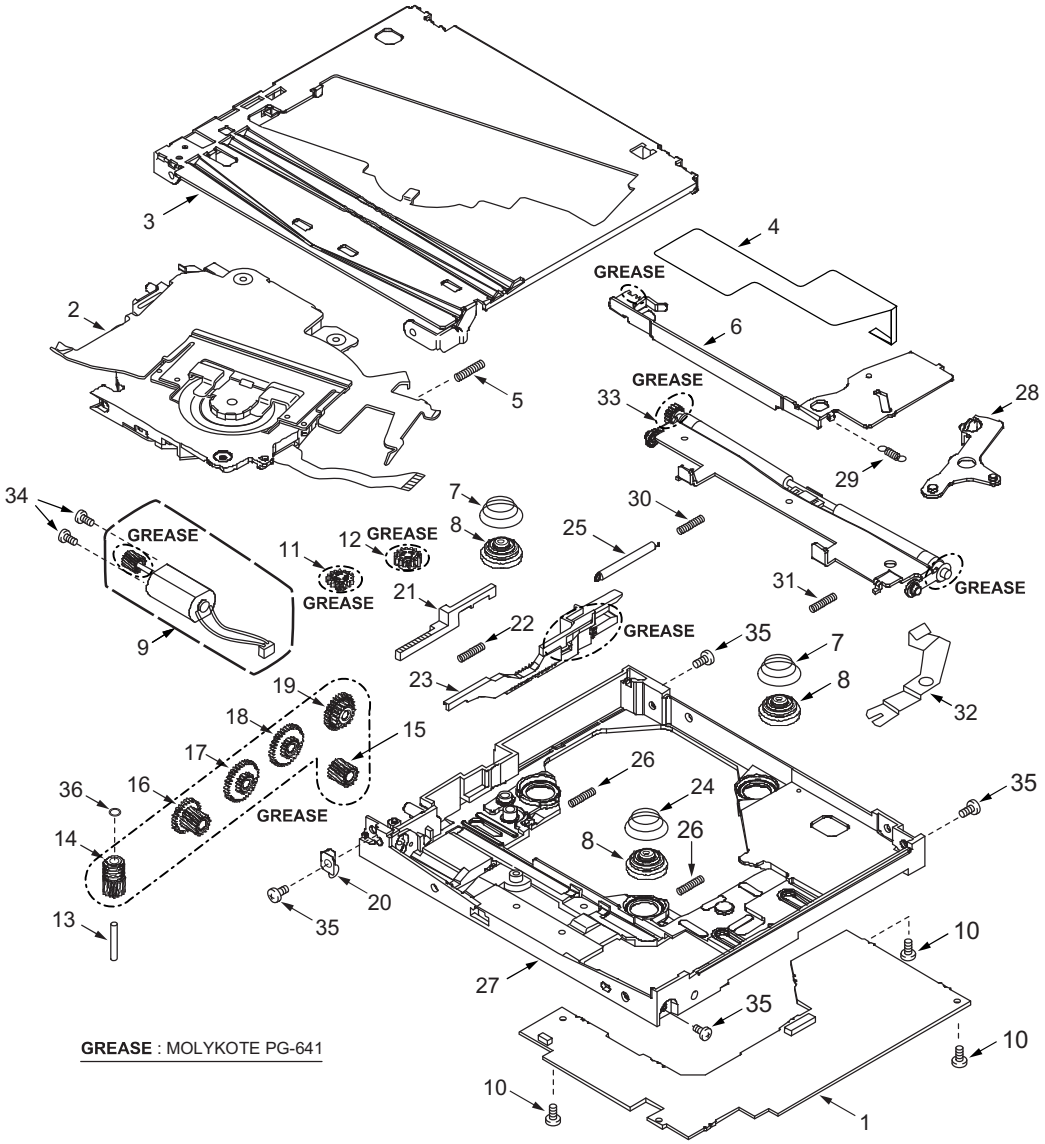

NO.	PART NO.	DESCRIPTION	Q'TY
1	----------	Servo PWB	1
2	658-0247-01	Suspension Assy	1
3	658-0244-16	Upper Chassis	1
4	658-0247-02	Sensor FPC Assy	1
5	658-0237-88	Earth Spring	1
6	658-0239-06	Suspension Lock Lever (L)	1
7	658-0237-90	Suspension Spring	2
8	658-0239-07	Damper	3
9	658-0247-03	Loading Motor Assy	1
10	658-0238-23	Screw	3
11	658-0237-94	Lock Gear (1)	1
12	658-0237-95	Lock Gear (2)	1
13	658-0246-01	Loading Gear Shaft	1
14	658-0246-02	Laoding Gear (1)	1
15	658-0237-98	Laoding Gear (2)	1
16	658-0237-99	Laoding Gear (3)	1
17	658-0238-01	Laoding Gear (4)	1
18	658-0238-02	Laoding Gear (5)	1

NO.	PART NO.	DESCRIPTION	Q'TY
19	658-0238-03	Laoding Gear (6)	1
20	658-0238-04	Worm Gear Housing Spring	1
21	658-0238-05	Clamp Rack	1
22	658-0238-06	Clamp Rack Spring	1
23	658-0238-07	Slide Lever	1
24	658-0238-08	Suspension Spring (F)	1
25	658-0238-09	Slide Lever Spring	1
26	658-0238-10	Offset Spring	2
27	658-0238-11	Main Chassis	1
28	658-0238-12	Suspension Lock Lever (R)	1
29	658-0238-13	Suspension Lock Lever L Spring	1
30	658-0238-15	Feeder Spring (L)	1
31	658-0238-16	Feeder Spring (R)	1
32	658-0238-17	Upper Spring	1
33	658-0244-19	Feeder Arm Assy	1
34	658-0238-21	Screw	2
35	658-0244-20	Screw	4
36	658-0247-04	Load Gear 1 Collar	1

ELECTRICAL PARTS LIST

Servo PWB(BM1) section

REF No.	PART No.	DESCRIPTION
C101	658-0246-12	50V560pF
C102	658-0240-12	0.1uF 10WV
C103	658-0246-13	50V0.001uF
C104	658-0246-13	50V0.001uF
C113	658-0240-12	0.1uF 10WV
C114	658-0240-13	10uF 6.3WV
C115	658-0240-13	10uF 6.3WV
C116	658-0246-13	50V0.001uF
C117	658-0240-13	10uF 6.3WV
C121	658-0246-14	50V6pF
C122	658-0240-13	10uF 6.3WV
C124	658-0240-12	0.1uF 10WV
C125	658-0240-12	0.1uF 10WV
C126	658-0237-28	25V0.027uF
C127	658-0237-27	16V0.047uF
C128	658-0240-12	0.1uF 10WV
C129	658-0246-22	50V100pF
C131	658-0246-12	50V560pF
C132	658-0246-12	50V560pF
C133	658-0240-12	0.1uF 10WV
C134	658-0240-12	0.1uF 10WV
C136	658-0240-12	0.1uF 10WV
C137	658-0240-13	10uF 6.3WV
C141	658-0247-06	16V0.01uF
C142	658-0240-12	0.1uF 10WV
C143	658-0240-12	0.1uF 10WV
C144	658-0240-12	0.1uF 10WV
C145	658-0240-12	0.1uF 10WV
C151	658-0240-12	0.1uF 10WV
C152	658-0237-21	6.3V47uF Tan
C153	658-0240-12	0.1uF 10WV
C154	658-0237-21	6.3V47uF Tan
C201	658-0240-12	0.1uF 10WV
C202	658-0240-12	0.1uF 10WV
C203	658-0240-12	0.1uF 10WV
C204	658-0240-12	0.1uF 10WV
C205	658-0240-12	0.1uF 10WV
C206	658-0246-22	50V100pF
C207	658-0240-13	10uF 6.3WV
C208	658-0240-13	10uF 6.3WV
C211	658-0240-12	0.1uF 10WV
C213	658-0246-22	50V100pF
C214	658-0246-22	50V100pF
C215	658-0247-06	16V0.01uF
C216	658-0247-06	16V0.01uF
C221	658-0246-17	Ceramic,50WV22PF
C222	658-0246-17	Ceramic,50WV22PF
C223	658-0240-12	0.1uF 10WV
C224	658-0240-12	0.1uF 10WV
C225	658-0240-12	0.1uF 10WV
C226	658-0240-12	0.1uF 10WV
C231	658-0247-06	16V0.01uF
C232	658-0240-12	0.1uF 10WV
C234	658-0247-06	16V0.01uF
C235	658-0240-13	10uF 6.3WV
C236	658-0240-12	0.1uF 10WV
C237	658-0247-07	16V0.022uF
C239	658-0247-08	50V47pF
C240	658-0240-12	0.1uF 10WV
C241	658-0240-12	0.1uF 10WV
C242	658-0246-13	50V0.001uF
C243	658-0240-12	0.1uF 10WV
C244	658-0237-34	50V0.0056uF
C245	658-0246-13	50V0.001uF
C246	658-0246-13	50V0.001uF
C247	658-0246-13	50V0.001uF
C248	658-0246-12	50V560pF
C249	658-0246-12	50V560pF
C250	658-0240-12	0.1uF 10WV
C251	658-0246-20	50V0.0022uF
C252	658-0246-21	50V470pF

REF No.	PART No.	DESCRIPTION
C253	658-0240-12	0.1uF 10WV
C261	658-0240-12	0.1uF 10WV
C262	658-0240-12	0.1uF 10WV
C263	658-0240-12	0.1uF 10WV
C264	658-0240-12	0.1uF 10WV
C265	658-0240-12	0.1uF 10WV
C266	658-0240-12	0.1uF 10WV
C271	658-0240-12	0.1uF 10WV
C272	658-0240-12	0.1uF 10WV
C275	658-0240-12	0.1uF 10WV
C311	658-0240-12	0.1uF 10WV
C312	658-0244-07	Ceramic,50WV0.1uF
C313	658-0240-12	0.1uF 10WV
C314	658-0244-07	Ceramic,50WV0.1uF
C315	658-0240-12	0.1uF 10WV
C316	658-0240-12	0.1uF 10WV
C321	658-0240-12	0.1uF 10WV
C322	658-0244-07	Ceramic,50WV0.1uF
C323	658-0240-12	0.1uF 10WV
C324	658-0240-12	0.1uF 10WV
C325	658-0240-12	0.1uF 10WV
C401	658-0246-13	50V0.001uF
C402	658-0246-13	50V0.001uF
C403	658-0246-13	50V0.001uF
C404	658-0246-13	50V0.001uF
C405	658-0240-12	0.1uF 10WV
C406	658-0240-14	47uF 6.3WV
C411	658-0244-07	Ceramic,50WV0.1uF
C412	658-0240-43	10uF 16WV
C413	658-0240-42	1uF 6.3WV
C414	658-0240-14	47uF 6.3WV
C421	658-0244-07	Ceramic,50WV0.1uF
C422	658-0240-14	47uF 6.3WV
C423	658-0240-12	0.1uF 10WV
C431	658-0240-12	0.1uF 10WV
C432	658-0240-12	0.1uF 10WV
C433	658-0240-12	0.1uF 10WV
C441	658-0240-12	0.1uF 10WV
C501	658-0246-22	50V100pF
C502	658-0246-22	50V100pF
C503	658-0246-22	50V100pF
C504	658-0246-22	50V100pF
C505	658-0246-22	50V100pF
C506	658-0246-22	50V100pF
C507	658-0246-22	50V100pF
C508	658-0246-22	50V100pF
C509	658-0246-22	50V100pF
C511	658-0240-13	10uF 6.3WV
C512	658-0240-13	10uF 6.3WV
C513	658-0246-22	50V100pF
C514	658-0240-12	0.1uF 10WV
C515	658-0246-22	50V100pF
C516	658-0240-12	0.1uF 10WV
C517	658-0246-22	50V100pF
C518	658-0240-12	0.1uF 10WV
C521	658-0240-12	0.1uF 10WV
C522	658-0240-13	10uF 6.3WV
C523	658-0240-13	10uF 6.3WV
C524	658-0240-12	0.1uF 10WV
C525	658-0240-12	0.1uF 10WV
C526	658-0240-13	10uF 6.3WV
C527	658-0240-12	0.1uF 10WV
C528	658-0240-12	0.1uF 10WV
C529	658-0240-12	0.1uF 10WV
C530	658-0240-13	10uF 6.3WV
C531	658-0240-13	10uF 6.3WV
C532	658-0240-12	0.1uF 10WV
C534	658-0240-12	0.1uF 10WV
C541	658-0240-13	10uF 6.3WV
C542	658-0240-13	10uF 6.3WV
C543	658-0240-12	0.1uF 10WV

REF No.	PART No.	DESCRIPTION
C544	658-0240-12	0.1uF 10WV
C545	658-0240-12	0.1uF 10WV
C546	658-0240-12	0.1uF 10WV
C547	658-0240-12	0.1uF 10WV
C548	658-0240-12	0.1uF 10WV
C551	658-0240-12	0.1uF 10WV
C552	658-0240-12	0.1uF 10WV
C553	658-0240-12	0.1uF 10WV
C554	658-0240-12	0.1uF 10WV
C555	658-0240-12	0.1uF 10WV
C556	658-0240-12	0.1uF 10WV
C557	658-0246-22	50V100pF
C561	658-0240-12	0.1uF 10WV
C601	658-0240-42	1uF 6.3WV
C602	658-0246-22	50V100pF
C603	658-0246-22	50V100pF
C604	658-0246-22	50V100pF
C605	658-0246-22	50V100pF
C606	658-0246-22	50V100pF
C607	658-0246-22	50V100pF
C608	658-0246-22	50V100pF
C609	658-0246-22	50V100pF
C611	658-0240-42	1uF 6.3WV
C612	658-0246-22	50V100pF
C613	658-0246-22	50V100pF
C614	658-0246-22	50V100pF
C616	658-0246-22	50V100pF
C621	658-0240-12	0.1uF 10WV
C622	658-0246-22	50V100pF
C623	658-0240-12	0.1uF 10WV
C631	658-0240-12	0.1uF 10WV
C641	658-0240-12	0.1uF 10WV
C651	658-0240-12	0.1uF 10WV
C652	658-0240-13	10uF 6.3WV
C653	658-0240-12	0.1uF 10WV
C701	658-0240-44	330PF 50WV
C702	658-0240-44	330PF 50WV
C703	658-0246-23	50WV120PF
C722	658-0240-13	10uF 6.3WV
C723	658-0240-12	0.1uF 10WV
CN101	658-0247-09	Connector 30P
CN201	658-0247-10	Connector 40P
CN301	658-0247-11	Connector 4P
CN302	658-0246-27	Connector 2P
CN303	658-0247-12	Connector 20P
CN401	658-0247-13	Connector 12P
CN701	658-0247-09	Connector 30P
D311	658-0237-19	MA721TX
IC101	658-0237-01	AN8703FH-V
IC201	658-0240-01	MNZS26EDCUB
IC271	658-0246-03	C0JBAA000372
IC275	658-0244-01	C0JBAZ001014
IC311	658-0237-08	C0GBY0000012
IC321	658-0237-09	C0GBH0000006
IC411	658-0246-05	C0CBADC00084
IC421	658-0244-02	YEAM17805FP
IC431	658-0246-06	C0JBAA000356
IC441	658-0246-07	MN13821SJP
IC501	658-0247-05	C1AB00002402
IC561	658-0244-01	C0JBAZ001014
IC601	658-0246-09	C3ABPJ000074
IC621	658-0246-10	C3FBMD000282
IC631	658-0240-37	C0JBAH000082
IC641	658-0240-37	C0JBAH000082
IC651	658-0246-11	C3GBCA000001
IC652	658-0240-39	C0JBAB000255
IC721	658-0245-02	C0FBBK000048
L101	658-0240-30	J0JCC0000152
L102	658-0240-30	J0JCC0000152
L201	658-0240-30	J0JCC0000152
L401	658-0240-32	YELTBMHS800T

REF No.	PART No.	DESCRIPTION
L403	658-0240-32	YELTBMHS800T
L404	658-0240-32	YELTBMHS800T
L406	658-0240-32	YELTBMHS800T
L511	658-0240-52	J0JCC0000042
L512	658-0240-56	J0MAB0000134
L513	658-0240-30	J0JCC0000152
L514	658-0240-30	J0JCC0000152
L515	658-0240-30	J0JCC0000152
L516	658-0240-30	J0JCC0000152
L541	658-0240-30	J0JCC0000152
L701	658-0240-46	470PF 50WV
L702	658-0240-46	470PF 50WV
L703	658-0240-57	J0MAB0000015
L704	658-0240-57	J0MAB0000015
L705	658-0246-31	G1C2R2K00013
L721	658-0246-32	J0JCC0000159
L722	658-0246-32	J0JCC0000159
L723	658-0246-32	J0JCC0000159
L724	658-0246-32	J0JCC0000159
Q151	658-0237-14	TR 2SB766ATX
Q152	658-0237-14	TR 2SB766ATX
Q153	658-0240-10	B1GDCFNN0007
Q154	658-0240-11	B1GBCFNN0009
Q251	658-0244-04	Transistor B3HB00000023
Q252	658-0244-04	Transistor B3HB00000023
Q253	658-0244-04	Transistor B3HB00000023
Q301	658-0237-18	TR B1GBGEEA0001
Q321	658-0244-05	Transistor B1GBGFGG0001
R101	033-1231-15	1/16W 12k ohm
R102	033-1231-15	1/16W 12k ohm
R103	658-0237-41	1/16W 24k ohm
R104	658-0237-42	1/16W 3.9k ohm Metal
R106	658-0237-43	1/16W 18k ohm Metal
R107	033-4721-15	1/16W 4.7k ohm
R110	033-2021-15	1/16W 2k ohm
R121	033-1221-15	1/16W 1.2k ohm
R131	033-1051-15	1/16W 1M ohm
R132	033-1051-15	1/16W 1M ohm
R141	033-1031-15	1/16W 10k ohm
R142	033-1031-15	1/16W 10k ohm
R151	033-2291-15	1/16W 2.2 ohm
R152	658-0237-40	1/2W 20 ohm
R153	033-2291-15	1/16W 2.2 ohm
R154	658-0237-40	1/2W 20 ohm
R155	033-1021-15	1/16W 1k ohm
R156	033-3331-15	1/16W 33k ohm
R157	033-2231-15	1/16W 22k ohm
R201	033-4711-15	1/16W 470 ohm
R202	033-1031-15	1/16W 10k ohm
R203	033-1031-15	1/16W 10k ohm
R212	658-0240-18	150 ohm 1/16W
R214	033-4721-15	1/16W 4.7k ohm
R215	033-4721-15	1/16W 4.7k ohm
R216	033-2731-15	1/16W 27k ohm
R217	033-2731-15	1/16W 27k ohm
R218	033-1031-15	1/16W 10k ohm
R219	033-3321-15	1/16W 3.3k ohm
R220	033-3321-15	1/16W 3.3k ohm
R221	033-1051-15	1/16W 1M ohm
R222	033-4711-15	1/16W 470 ohm

REF No.	PART No.	DESCRIPTION
R223	033-3931-15	1/16W 39k ohm
R227	033-0000-05	1/16W 0 ohm
R231	033-1021-15	1/16W 1k ohm
R232	033-1531-15	1/16W 15k ohm
R234	033-1051-15	1/16W 1M ohm
R235	033-5621-15	1/16W 5.6k ohm
R236	033-5621-15	1/16W 5.6k ohm
R251	033-1031-15	1/16W 10k ohm
R252	033-4731-15	1/16W 47k ohm
R253	033-1531-15	1/16W 15k ohm
R254	033-1531-15	1/16W 15k ohm
R255	033-1531-15	1/16W 15k ohm
R261	658-0237-56	Resistor Network
R262	658-0244-14	NetworkResistor
R263	658-0244-09	Chip,1/16W27 ohm
R264	033-2201-15	1/16W 22 ohm
R265	033-2201-15	1/16W 22 ohm
R266	033-0000-05	1/16W 0 ohm
R267	033-1031-15	1/16W 10k ohm
R268	033-1021-15	1/16W 1k ohm
R269	033-1031-15	1/16W 10k ohm
R270	033-3931-15	1/16W 39k ohm
R271	658-0237-56	Resistor Network
R272	658-0237-58	Resistor Network
R273	658-0237-58	Resistor Network
R274	658-0244-14	NetworkResistor
R275	033-2201-15	1/16W 22 ohm
R276	033-2201-15	1/16W 22 ohm
R277	033-2201-15	1/16W 22 ohm
R278	033-2201-15	1/16W 22 ohm
R279	033-2201-15	1/16W 22 ohm
R280	033-2201-15	1/16W 22 ohm
R281	033-2201-15	1/16W 22 ohm
R282	033-2201-15	1/16W 22 ohm
R283	033-2201-15	1/16W 22 ohm
R284	033-2201-15	1/16W 22 ohm
R285	033-2201-15	1/16W 22 ohm
R286	033-2201-15	1/16W 22 ohm
R287	033-2201-15	1/16W 22 ohm
R288	033-2201-15	1/16W 22 ohm
R289	033-2201-15	1/16W 22 ohm
R290	033-2201-15	1/16W 22 ohm
R291	033-3931-15	1/16W 39k ohm
R292	033-3931-15	1/16W 39k ohm
R293	033-3931-15	1/16W 39k ohm
R294	033-3931-15	1/16W 39k ohm
R295	033-3931-15	1/16W 39k ohm
R296	033-3931-15	1/16W 39k ohm
R297	033-3931-15	1/16W 39k ohm
R298	033-3931-15	1/16W 39k ohm
R301	033-1811-15	1/16W 180 ohm
R302	033-1811-15	1/16W 180 ohm
R303	033-1811-15	1/16W 180 ohm
R311	033-4731-15	1/16W 47k ohm
R312	033-1811-15	1/16W 180 ohm
R313	033-6821-15	1/16W 6.8k ohm
R314	033-5621-15	1/16W 5.6k ohm
R315	033-5621-15	1/16W 5.6k ohm
R316	033-1031-15	1/16W 10k ohm
R317	033-5621-15	1/16W 5.6k ohm
R321	033-4721-15	1/16W 4.7k ohm
R322	033-4731-15	1/16W 47k ohm
R323	658-0244-10	Chip,1/8W0.51 ohm
R324	033-1011-15	1/16W 100 ohm
R325	033-1011-15	1/16W 100 ohm
R327	117-0000-10	0 ohm

REF No.	PART No.	DESCRIPTION
R431	658-0240-23	100k ohm 1/16W
R441	033-4731-15	1/16W 47k ohm
R501	033-1011-15	1/16W 100 ohm
R511	658-0240-47	33 ohm 1/16W
R512	033-1011-15	1/16W 100 ohm
R513	033-1011-15	1/16W 100 ohm
R514	658-0240-18	150 ohm 1/16W
R515	033-3931-15	1/16W 39k ohm
R516	033-4731-15	1/16W 47k ohm
R517	033-4731-15	1/16W 47k ohm
R518	033-2201-15	1/16W 22 ohm
R519	033-2201-15	1/16W 22 ohm
R521	033-1011-15	1/16W 100 ohm
R522	658-0240-47	33 ohm 1/16W
R523	116-1001-10	1/8W 10 ohm
R524	658-0240-47	33 ohm 1/16W
R525	658-0240-47	33 ohm 1/16W
R526	658-0240-18	150 ohm 1/16W
R527	658-0244-11	Chip,1/16W1k ohm
R528	658-0240-48	75 ohm 1/10W
R541	033-3321-15	1/16W 3.3k ohm
R543	033-4711-15	1/16W 470 ohm
R552	033-1031-15	1/16W 10k ohm
R553	033-1031-15	1/16W 10k ohm
R554	033-2021-15	1/16W 2k ohm
R555	033-3931-15	1/16W 39k ohm
R556	033-3931-15	1/16W 39k ohm
R557	033-3931-15	1/16W 39k ohm
R570	033-4711-15	1/16W 470 ohm
R571	033-4711-15	1/16W 470 ohm
R572	033-4711-15	1/16W 470 ohm
R573	033-4711-15	1/16W 470 ohm
R574	033-4711-15	1/16W 470 ohm
R575	033-4711-15	1/16W 470 ohm
R576	033-4711-15	1/16W 470 ohm
R577	033-4711-15	1/16W 470 ohm
R621	658-0240-18	150 ohm 1/16W
R623	033-1031-15	1/16W 10k ohm
R631	658-0240-50	75 ohm 1/16W
R651	033-2021-15	1/16W 2k ohm
R701	033-1011-15	1/16W 100 ohm
R702	033-1011-15	1/16W 100 ohm
R703	033-1011-15	1/16W 100 ohm
R704	033-0000-05	1/16W 0 ohm
R705	033-0000-05	1/16W 0 ohm
R706	033-0000-05	1/16W 0 ohm
R707	033-1011-15	1/16W 100 ohm
R708	033-1011-15	1/16W 100 ohm
R709	033-2211-15	1/16W 220 ohm
R711	118-0000-10	0 ohm
R712	118-0000-10	0 ohm
R713	033-2211-15	1/16W 220 ohm
R714	033-2211-15	1/16W 220 ohm
R715	033-2211-15	1/16W 220 ohm
R716	033-2211-15	1/16W 220 ohm
R717	033-1011-15	1/16W 100 ohm
R718	033-1011-15	1/16W 100 ohm
R721	033-1011-15	1/16W 100 ohm
R722	033-1011-15	1/16W 100 ohm
R723	033-1011-15	1/16W 100 ohm
R724	033-1011-15	1/16W 100 ohm
R725	033-1011-15	1/16W 100 ohm
SW301	658-0244-13	Switch K0L1BA000104
XL201	658-0237-52	H0J168500003
XL501	658-0239-02	Crystal Oscillator