

EXPLODED VIEW

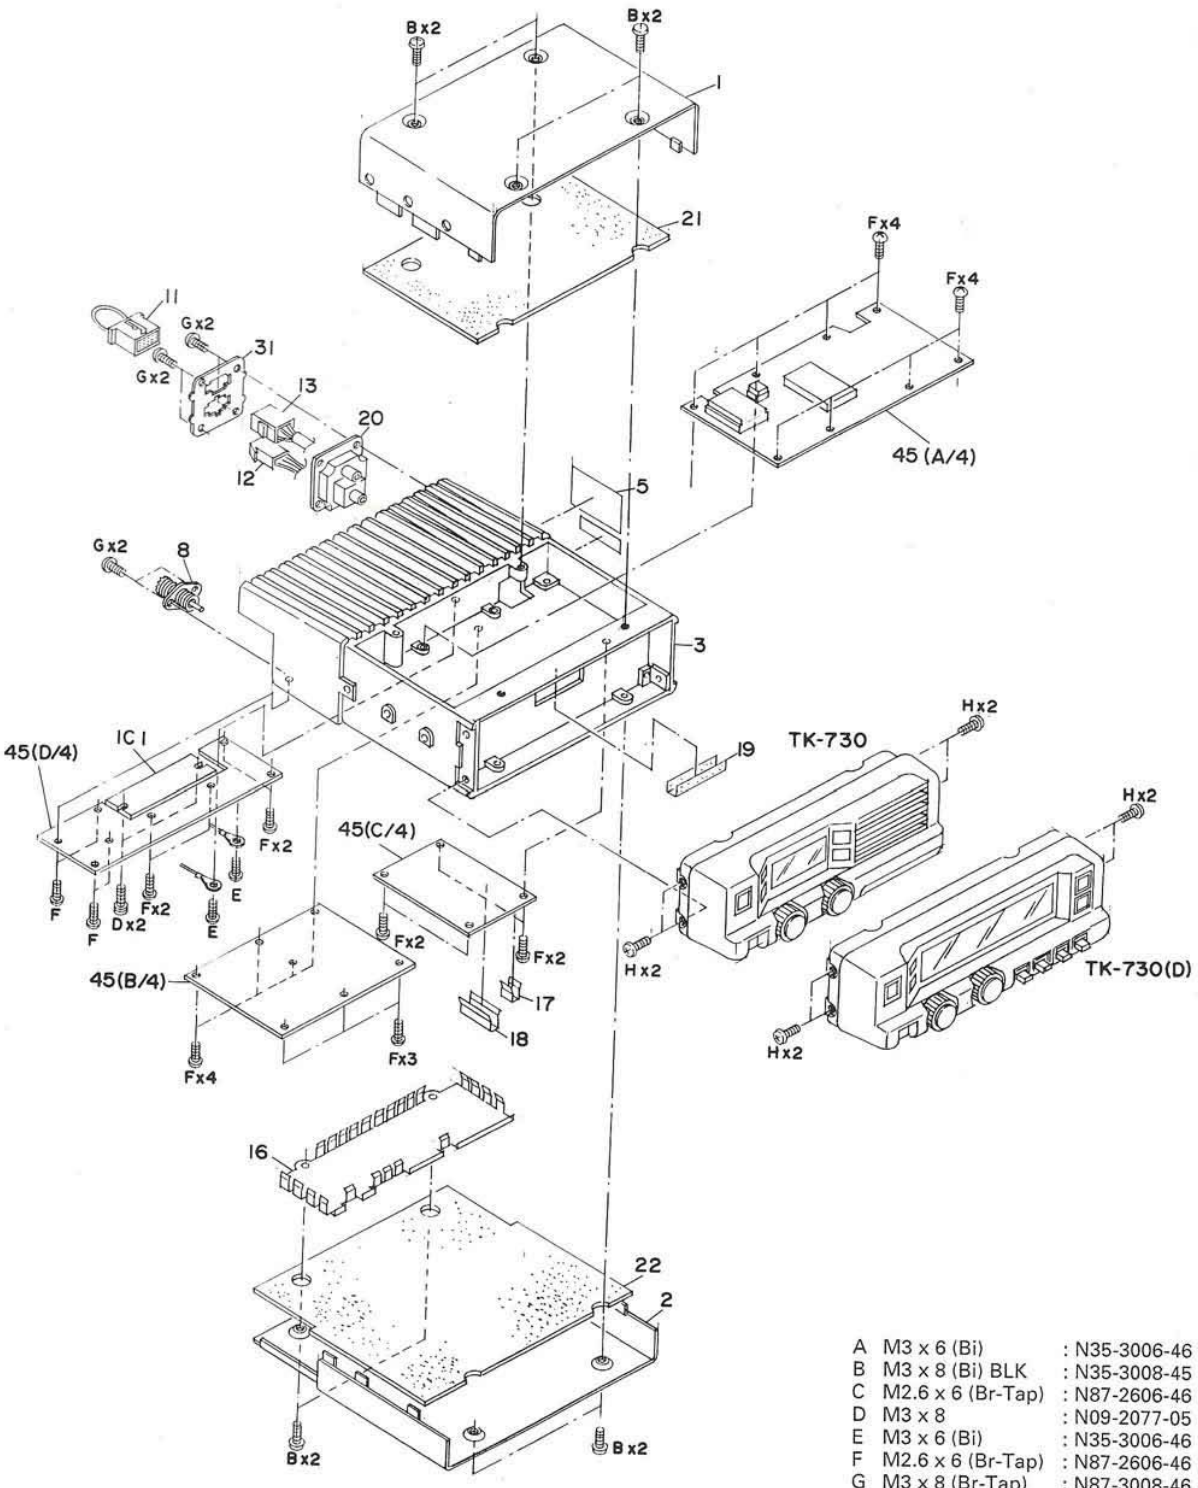

A	M3 x 6 (Bi)	: N35-3006-46
B	M3 x 8 (Bi) BLK	: N35-3008-45
C	M2.6 x 6 (Br-Tap)	: N87-2606-46
D	M3 x 8	: N09-2077-05
E	M3 x 6 (Bi)	: N35-3006-46
F	M2.6 x 6 (Br-Tap)	: N87-2606-46
G	M3 x 8 (Br-Tap)	: N87-3008-46
H	M3 x 6 (FLAT)	: N32-3006-46

TK-730/(B)/(D)


EXPLODED VIEW

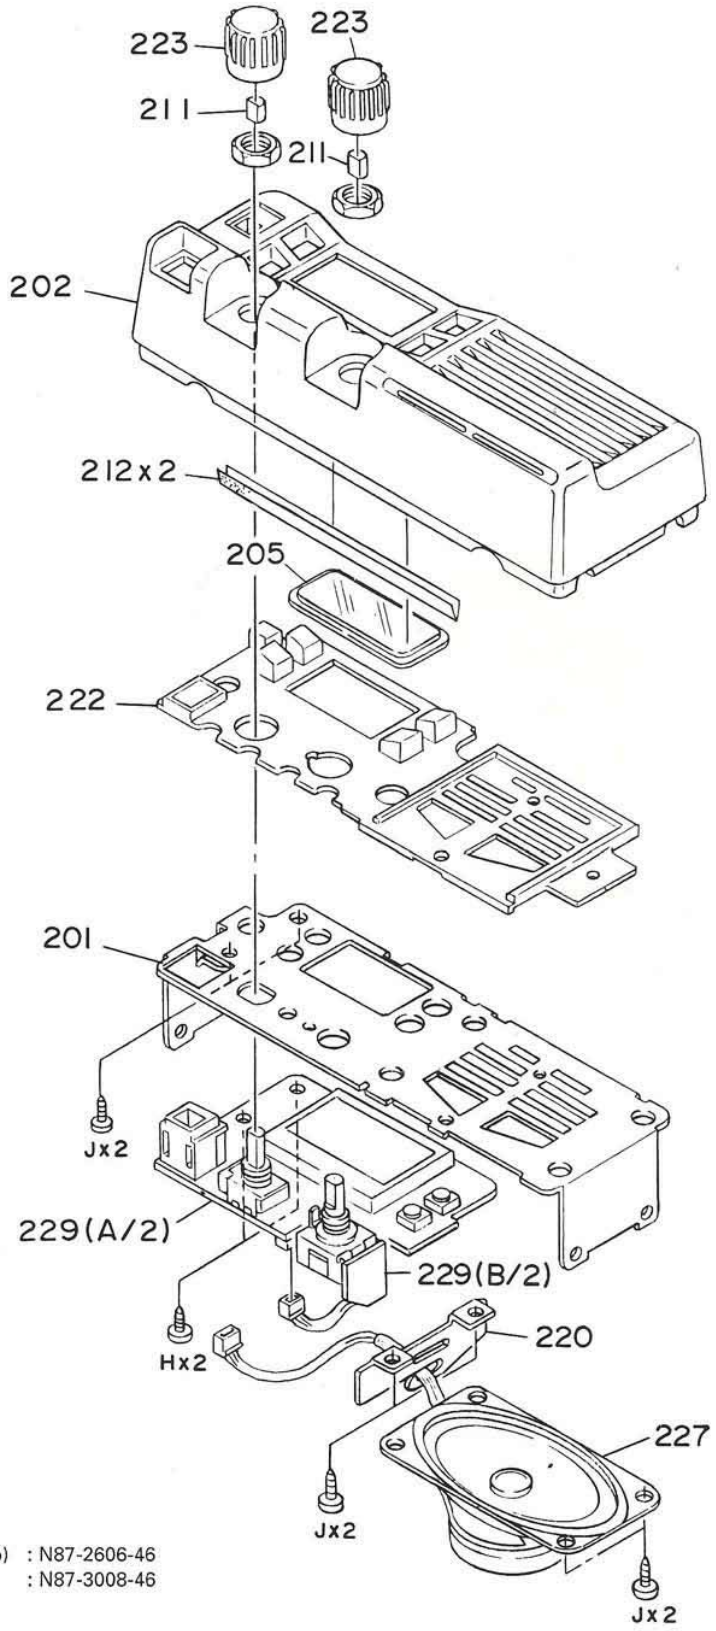

H M2.6 x 6 (Br-Tap) : N87-2606-46
J M3 x 8 (Br-Tap) : N87-3008-46

KCH-3


EXPLODED VIEW

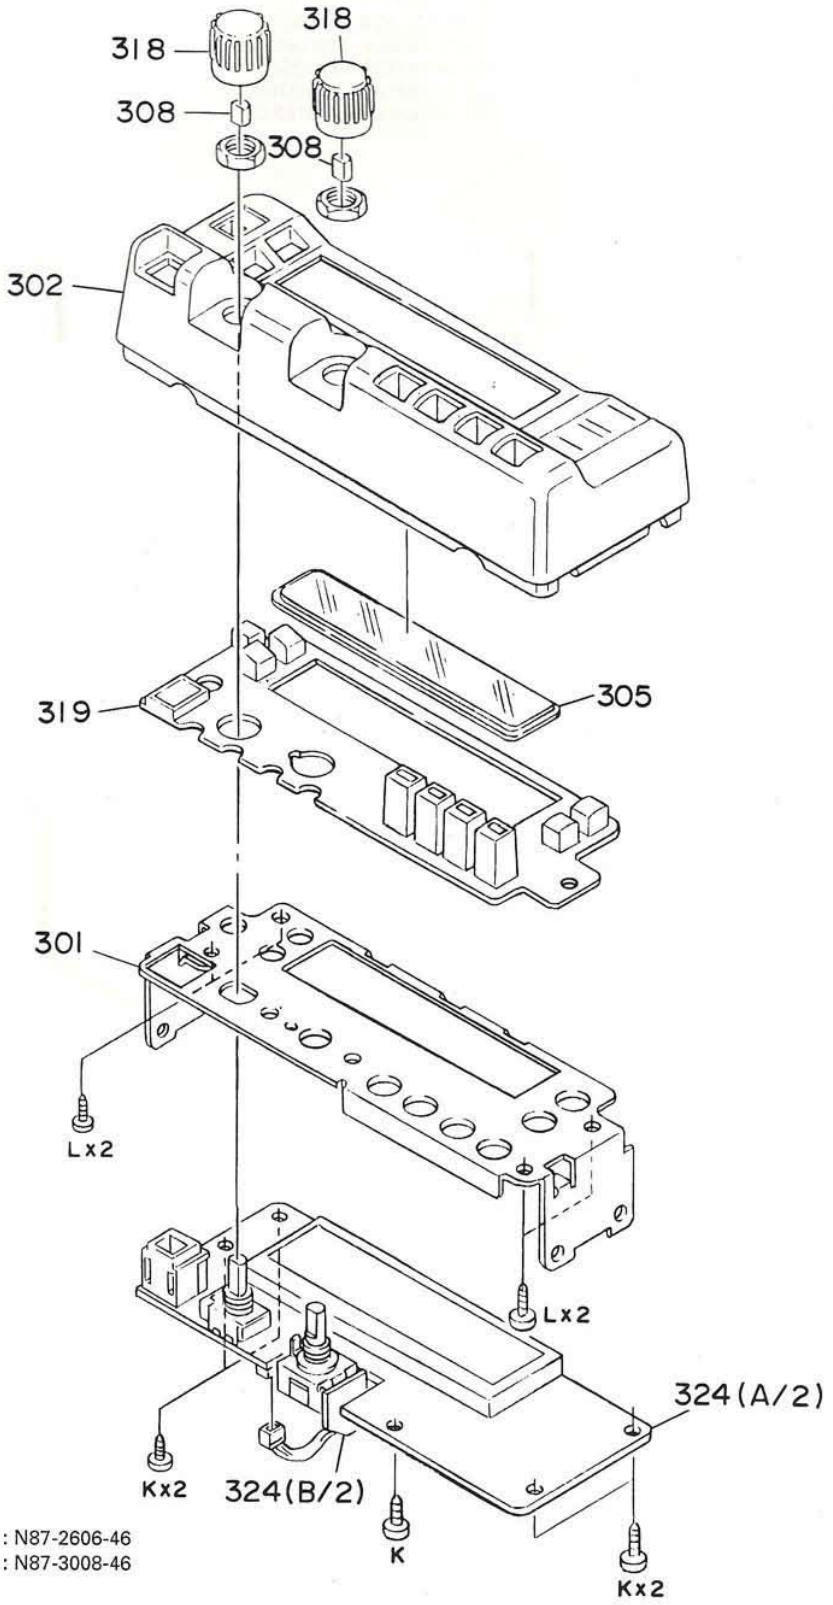

K M2.6 x 6 (Br-Tap) : N87-2606-46
L M3 x 8 (Br-Tap) : N87-3008-46


KCH-4

PACKING

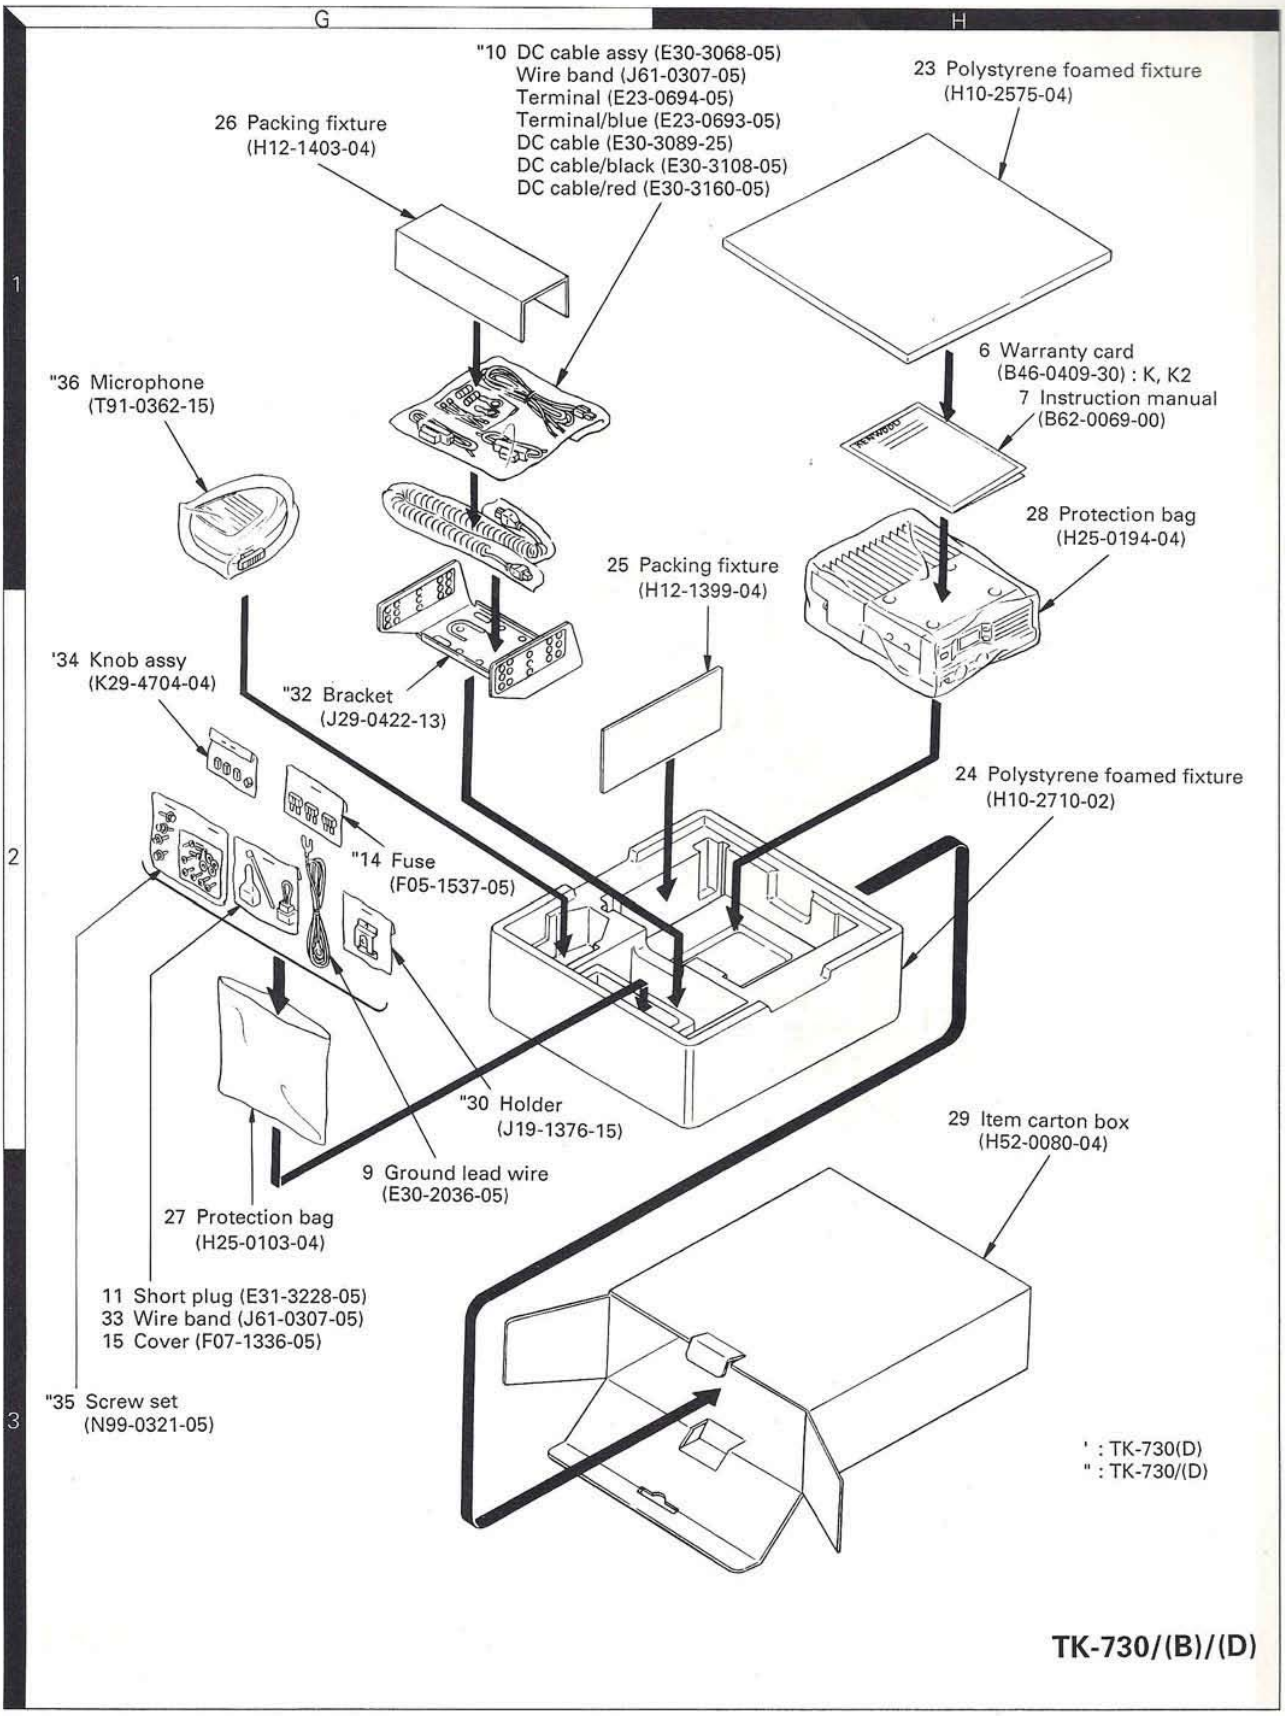


TK-730/(B)/(D)

PACKING

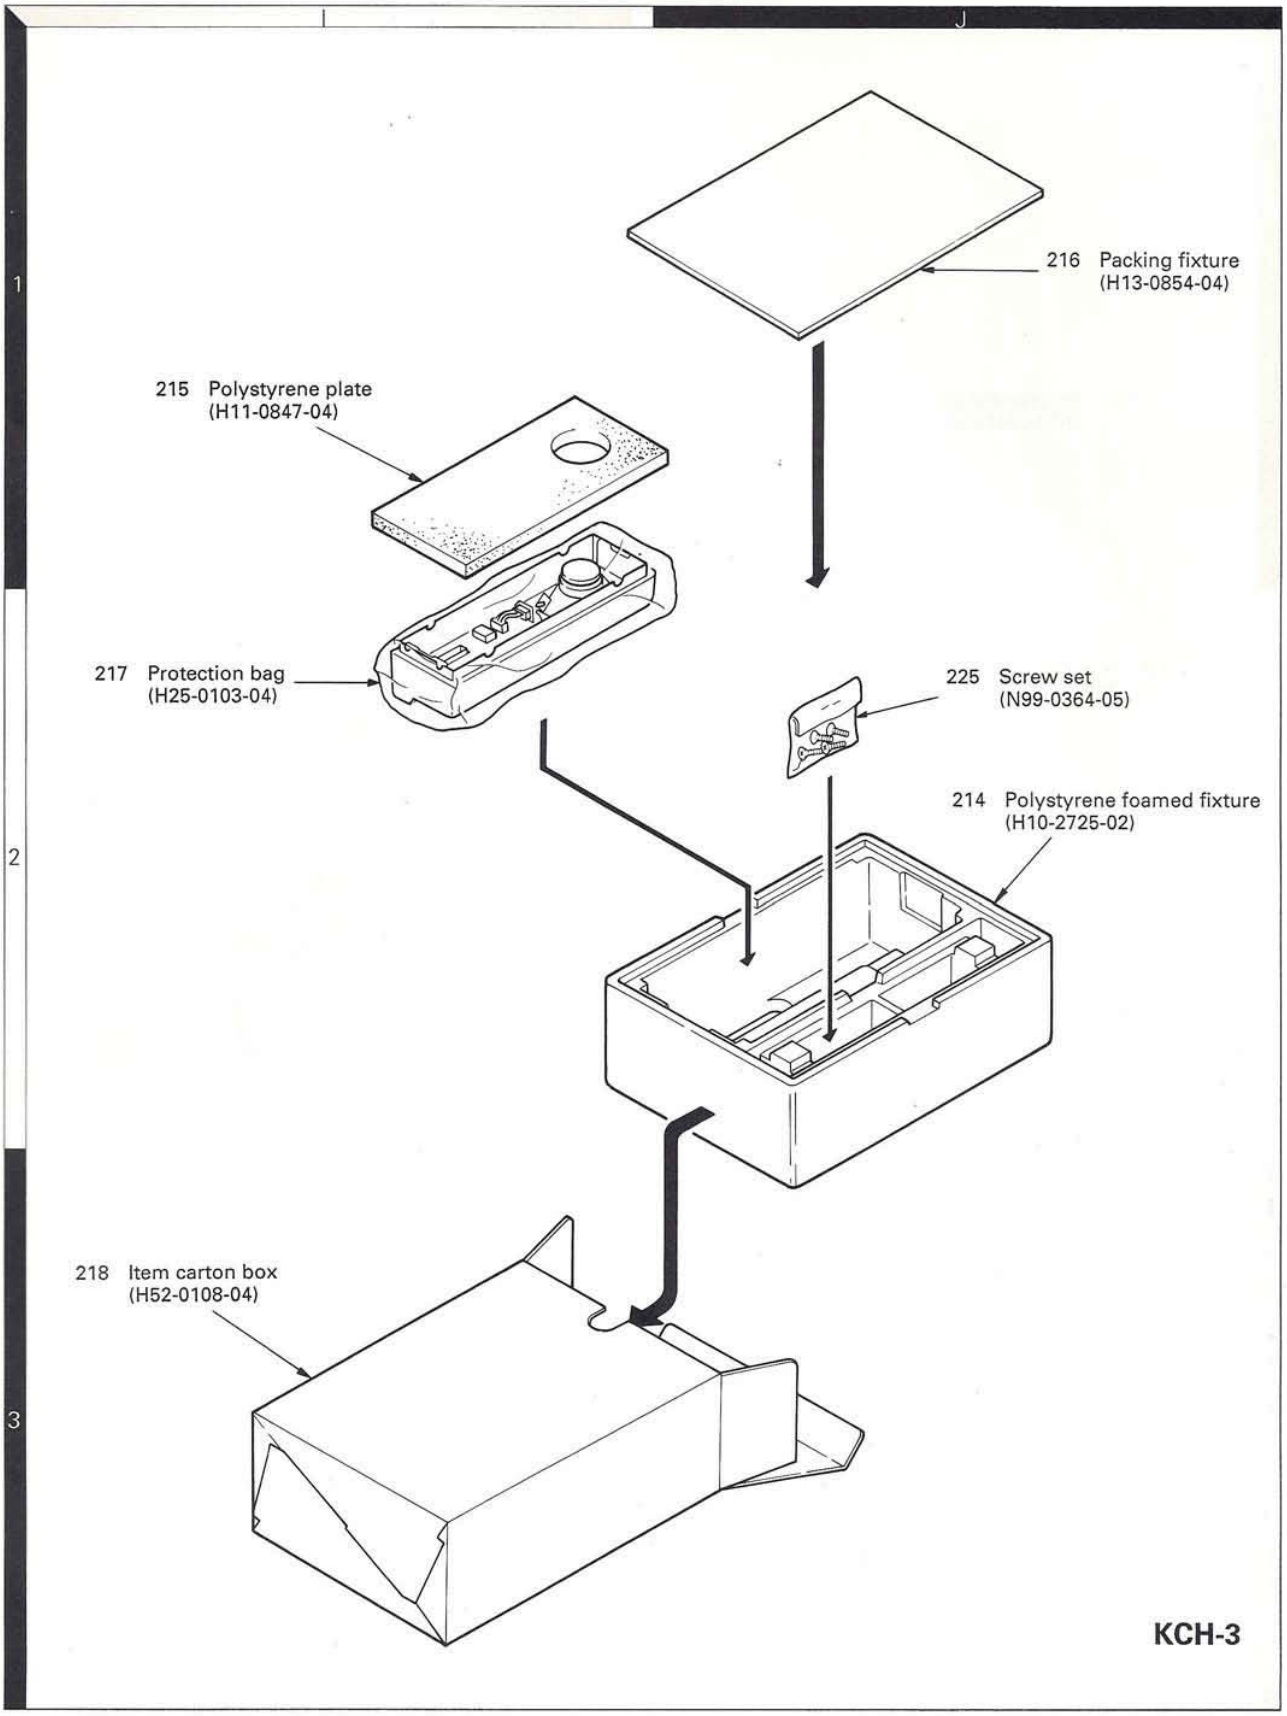
216 Packing fixture
(H13-0854-04)
215 Polystyrene plate
(H11-0847-04)
217 Protection bag
(H25-0103-04)
225 Screw set
(N99-0364-05)
214 Polystyrene foamed fixture
(H10-2725-02)
218 Item carton box
(H52-0108-04)
KCH-3

PACKING

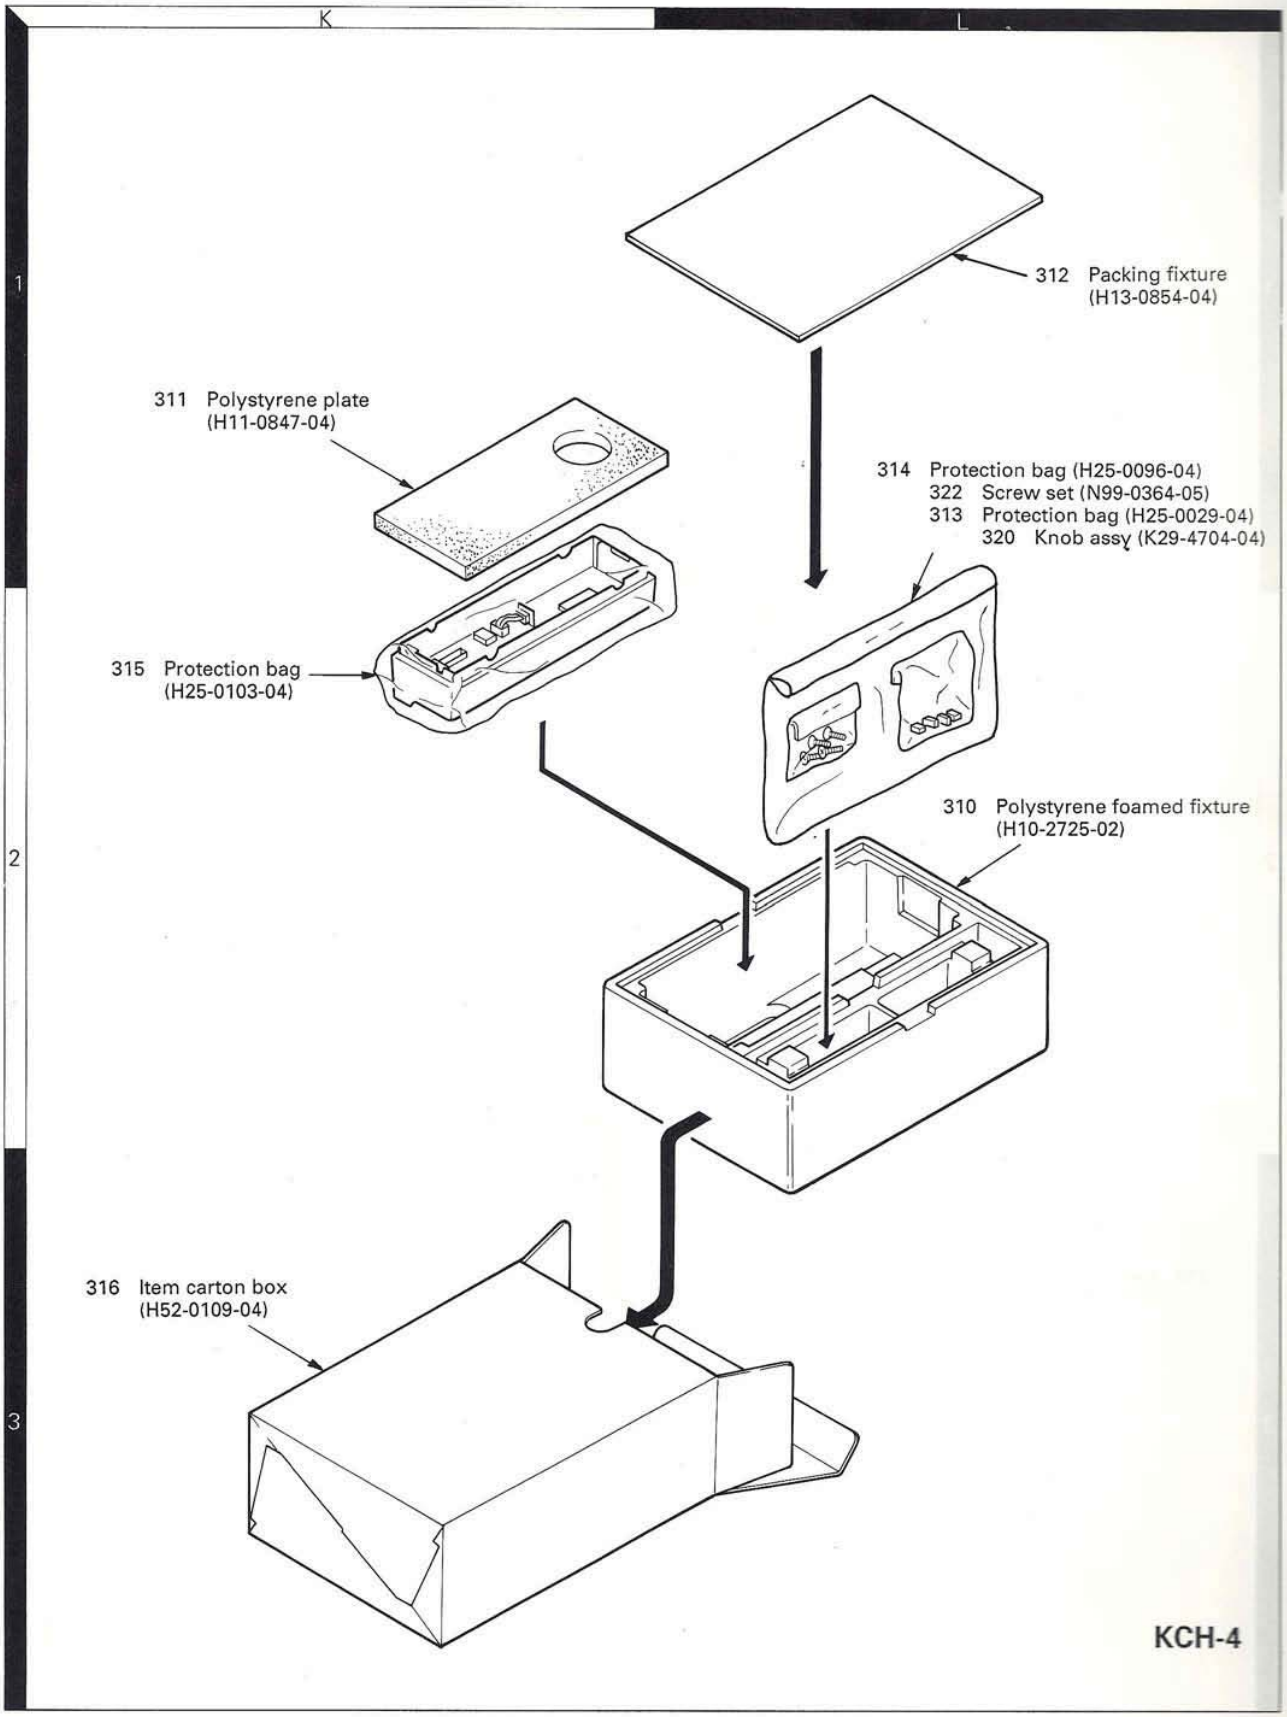
K
L
1
2
3
312 Packing fixture
(H13-0854-04)
311 Polystyrene plate
(H11-0847-04)
314 Protection bag (H25-0096-04)
322 Screw set (N99-0364-05)
313 Protection bag (H25-0029-04)
320 Knob assy (K29-4704-04)
315 Protection bag
(H25-0103-04)
310 Polystyrene foamed fixture
(H10-2725-02)
316 Item carton box
(H52-0109-04)
KCH-4

× New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

TK-730/(B)/(D)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
			TK-730/(B)/(D)			
		*	212-3302-05	PLASTIC TUBU		A
1	1A		A01-2020-01	CASE(UPPER)		
2	3A	*	A01-2021-01	CASE(LOWER)		
3	2B	*	A10-1318-01	FRAME		
			A22-0776-02	SUB PANEL		A
			A22-0777-02	SUB PANEL		D
			A62-0063-03	PANEL		A
			A62-0064-03	PANEL ASSY		A
			A62-0066-03	PANEL		D
			A62-0067-03	PANEL ASSY		D
			B10-1162-04	FRONT GLASS		A
			B10-1163-04	FRONT GLASS		D
5	2A		B42-3343-04	LABEL(S/NO)		
6	1H		B46-0409-30	WARRANTY CARD	K,K2	
7	1H		B62-0069-00	INSTRUCTION MANUAL		
5	2A	*	B72-0126-04	MODEL NAME PLATE(F1)	K,M	
5	2A	*	B72-0233-04	MODEL NAME PLATE(F2)	K2M2	
8	2A		E04-0167-05	RF COAXIAL CAVLE		
9	2G		E30-2036-05	GROUND LEAD WIRE		
10	1G		E30-3068-05	DC CABLE ASSY		A
10	1G		E30-3068-05	DC CABLE ASSY		D
11	1A,2G		E31-3228-05	SHORT PLUG(ACC)		
			E31-3269-05	CONNECTING WIRE(RA/DO)		
12	1A	*	E37-0152-15	FLEXIBLE PC BOARD(2P)		
			E37-0153-05	FLEXIBLE PC BOARD(17P)		
			E37-0154-05	FLEXIBLE PC BOARD(13P)		
13	1A	*	E37-0155-05	CONNECTING WIRE(15P)		
			E37-0157-05	CONNECTING WIRE		A
			E37-0159-05	CONNECTING WIRE		A
14	2G		F05-1537-05	FUSE(15A)		A
14	2G		F05-1537-05	FUSE(15A)		D
15	2G		F07-1336-05	COVER		
16	3A	*	F10-1479-03	SHIELDING PLATE(FINAL)		
		*	F20-1116-04	INSULATING SHEET(APC)		
			G02-0405-05	SPRING		A
			G02-0405-05	SPRING		D
17	2A		G02-0574-04	LEAF SPRING(AVR)		
			G02-0576-14	LEAF SPRING(APC)		
18	2A		G02-0709-04	LEAF SPRING(AF.AMP)		
19	2B		G10-0707-14	NON-WOVEN FABRIC		
			G53-0509-04	PACKING		A
20	2A	*	G53-0712-03	PACKING		
21	1A	*	G53-0713-13	PACKING(CASE/UPPER)		
22	3A	*	G53-0714-03	PACKING(CASE/LOWER)		
23	1H		H10-2575-04	POLYSTYRENE FOAMED FIXTURE		
24	2G		H10-2710-02	POLYSTYRENE FOAMED FIXTURE		
25	2G		H12-1399-04	PACKING FIXTURE,CARTON BOARD		
26	1G		H12-1403-04	PACKING FIXTURE,CARTON BOARD		
			H12-1434-04	PACKING FIXTURE,CARTON BOARD		B
			H25-0029-04	PROTECTION BAG		A
			H25-0029-04	PROTECTION BAG		D

L:Scandinavia **K:**USA **P:**Canada **A :** TK-730
Y:PX(Far East, Hawaii) **T:**England **E:**Europe **B :** TK-730 (B)
Y:AAFES(Europe) **X:**Australia **M:**Other Areas **D :** TK-730 (D)

⚠ indicates safety critical components.

PARTS LIST

＊ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

TK-730/(B)/(D)
TX-RX UNIT (X57-3750-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
			H25-0096-04	PROTECTION BAG		
27	2G		H25-0103-04	PROTECTION BAG(125X250)		
28	1H		H25-0194-04	PROTECTION BAG(RADIO)		
29	3G	*	H52-0080-04	ITEM CARTON BOX		
30	2G		J19-1376-15	HOLDER		A
30	2G		J19-1376-15	HOLDER		D
			J21-4340-04	MOUNTING HARD WARE		A
31	1A		J21-4341-04	MOUNTING HARD WARE		
32	2G		J29-0422-13	BLACKET		A
32	2G		J29-0422-13	BLACKET		D
33	2G		J61-0307-05	WIRE BAND		
			K29-4663-02	KEY TOP		A
			K29-4664-04	KNOB(VOL,CH)		A
			K29-4664-04	KNOB(VOL,CH)		D
			K29-4666-02	KEY TOP		D
34	2G		K29-4704-04	KNOB ASSY		D
			N09-2077-05	SCREW(IC1)		
			N32-3066-46	FLAT HEAD MACHINE SCREW		A
			N32-3066-46	FLAT HEAD MACHINE SCREW		D
			N35-3006-46	BINDING HEAD MACHINE SCREW		
			N35-3008-45	BINDING HEAD MACHINE SCREW		
			N87-2606-46	BRAZIER HEAD TAPTITE SCREW		
			N87-3008-46	BRAZIER HEAD TAPTITE SCREW		
35	2G		N99-0321-05	SCREW SET		A
35	2G		N99-0321-05	SCREW SET		D
			N99-0365-05	SCREW SET		B
			T07-0247-05	SPEAKER		A
36	1G		T91-0362-15	MICROPHONE		A
36	1G		T91-0362-15	MICROPHPNE		D
			X54-3100-20	DISPLAY UNIT		A
			X54-3110-20	DISPLAY UNIT		D
45	1B,2A	*	X57-3750-11	TX.RX UNIT	K,M	
45	1B,2A	*	X57-3750-12	TX.RX UNIT	K2M2	
TX-RX UNIT (X57-3750-XX) -11 : K, M -12 : K2, M2						
C13 -15			CC45SL2H150J	CERAMIC 15PF J	K,M	
C13 -15			CC45SL2H180J	CERAMIC 18PF J	K2M2	
C16			CC45SL2H180J	CERAMIC 18PF J	K,M	
C16			CC45SL2H270J	CERAMIC 27PF J	K2M2	
C1			CE04EW1E470M	ELECTRO 47UF 25WV		
C2			CK73EB1H104K	CHIP C 0.10UF K		
C3 ,4			CK73FB1H102K	CHIP C 1000PF K		
C5			CE04EW1E470M	ELECTRO 47UF 25WV		
C6			CC45SL2H100D	CERAMIC 10PF D	K,M	
C6			CC45SL2H120J	CERAMIC 12PF J	K2M2	
C7			CC45SL2H050C	CERAMIC 5.0PF C	K2M2	
C7			CC45SL2H060D	CERAMIC 6.0PF D	K,M	
C8			CC45SL2H070D	CERAMIC 7.0PF D	K2M2	
C8			CC45SL2H180J	CERAMIC 18PF J	K,M	
C9 ,10			CK73FB1H102K	CHIP C 1000PF K		
C11			CC73FCH1H100D	CHIP C 10PF D	K2M2	
C11			CC73FCH1H150J	CHIP C 15PF J	K,M	
C12			CK45B2H102K	CERAMIC 1000PF K		
C17			CC73FCH1H0R5C	CHIP C 0.5PF C		

L:Scandinavia **K:**USA **P:**Canada **A :** TK-730
Y:PX(Far East, Hawaii) **T:**England **E:**Europe **B :** TK-730 (B)
Y:AAFES(Europe) **X:**Australia **M:**Other Areas **D :** TK-730 (D)

⚠ indicates safety critical components.

PARTS LIST

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

TX-RX UNIT (X57-3750-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格			Destination 仕向	Remarks 備考
C23			CK73FB1H102K	CHIP C	1000PF	K		
C24			CC73FCH1H220J	CHIP C	22PF	J		
C25			CC45SL2H150J	CERAMIC	15PF	J	K,M	
C25			CC45SL2H180J	CERAMIC	18PF	J	K2M2	
C26			CC45SL2H020C	CERAMIC	2.0PF	C	K,M	
C26			CC45SL2H060D	CERAMIC	6.0PF	D	K2M2	
C27			CC45SL2H150J	CERAMIC	15PF	J	K,M	
C27			CC45SL2H180J	CERAMIC	18PF	J	K2M2	
C28 ,29			CK73FB1H102K	CHIP C	1000PF	K		
C30			CE04EW1E101M	ELECTRO	100UF	25WV		
C31			C90-2021-05	ELECTRO	10UF	25WV		
C32 -34			CK73FB1H102K	CHIP C	1000PF	K		
C35			CK73FB1H102K	CHIP C	1000PF	K		
C36			C90-2165-05	ELECTRO	10UF	50WV		
C36 -39			CK73FB1H102K	CHIP C	1000PF	K		
C40 -41			CE04EW1E471M	ELECTRO	470UF	25WV		
C42			CK73FB1H102K	CHIP C	1000PF	K		
C43			CC73FCH1H100D	CHIP C	10PF	D	K2M2	
C101			CK73FB1E104K	CHIP C	0.10UF	K		
C102			CE04EW1E470M	ELECTRO	47UF	25WV		
C103			CK73FB1H102K	CHIP C	1000PF	K		
C104,105			C92-0007-05	CHIP TAN	2.2UF	10WV		
C106			CK73FB1H102K	CHIP C	1000PF	K		
C107			CE04EW1E100M	ELECTRO	10UF	25WV		
C108			CE04EW1E470M	ELECTRO	47UF	25WV		
C109			CK73FB1H102K	CHIP C	1000PF	K		
C110			C92-0003-05	CHIP TAN	0.47UF	25WV		
C111			CE04EW1C470M	ELECTRO	47UF	16WV		
C112			CK73FB1H102K	CHIP C	1000PF	K		
C113			CK73FB1E103K	CHIP C	0.01UF	K		
C114			C92-0004-05	ELECTRO	1.0UF	16WV		
C115			CK73FB1E104K	CHIP C	0.10UF	K		
C116			CE04EW1C470M	ELECTRO	47UF	16WV		
C117			CK73FB1H102K	CHIP C	1000PF	K		
C118			C92-0008-05	CHIP TAN	3.3UF	16WV		
C119			CK73EF1C105Z	CHIP C	1.0UF	Z		
C120			C92-0007-05	CHIP TAN	2.2UF	10WV		
C121			CK73FB1E104K	CHIP C	0.10UF	K		
C122			CE04EW1C470M	ELECTRO	47UF	16WV		
C123			CK73FB1H102K	CHIP C	1000PF	K		
C124			CK73EF1C105Z	CHIP C	1.0UF	Z		
C125			CK73FB1E473K	CHIP C	0.047UF	K	K,M	
C125			CK73FF1C105Z	CHIP C	1.0UF	Z	K2M2	
C126			CK73FB1H102K	CHIP C	1000PF	K		
C127,128			CK73FB1E103K	CHIP C	0.01UF	K		
C129			CK73FB1H102K	CHIP C	1000PF	K		
C130			CE04EW1C101M	ELECTRO	100UF	16WV		
C131			CK73FB1H471K	CHIP C	470PF	K		
C132,133			CK73FB1H102K	CHIP C	1000PF	K		
C134,135			CC73FCH1H100D	CHIP C	10PF	D		
C136			CK73FB1E104K	CHIP C	0.10UF	K		
C137-138			CK73FB1E103K	CHIP C	0.01UF	K		
C139			CK73FB1E104K	CHIP C	0.10UF	K		
C140			CK73FB1H471K	CHIP C	470PF	K		
C141-143			CK73FB1E103K	CHIP C	0.01UF	K		

L:Scandinavia **K:**USA **P:**Canada **A :** TK-730
Y:PX(Far East, Hawaii) **T:**England **E:**Europe **B :** TK-730 (B)
Y:AAFES(Europe) **X:**Australia **M:**Other Areas **D :** TK-730 (D)

⚠ indicates safety critical components.

PARTS LIST

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

TX-RX UNIT (X57-3750-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
C144,145			CK73FB1H102K	CHIP C 1000PF K		
C147-149			CK73FB1H102K	CHIP C 1000PF K		
C150			CC73FSL1H101J	CHIP C 100PF J		
C151-154			CK73FB1H102K	CHIP C 1000PF K		
C155-158			CC73FSL1H101J	CHIP C 100PF J		
C159			CK73FB1H102K	CHIP C 1000PF K		
C160			CC73FSL1H101J	CHIP C 100PF J		
C161,162			CK73FB1H102K	CHIP C 1000PF K		
C164-166			CK73FB1H102K	CHIP C 1000PF K		
C167,168			CC73FSL1H101J	CHIP C 100PF J		
C169-173			CK73FB1H102K	CHIP C 1000PF K		
C183			CK73FB1H102K	CHIP C 1000PF K		
C185-193			CK73FB1H102K	CHIP C 1000PF K		
C195,196			CC73FSL1H101J	CHIP C 100PF J		
C197			CK73FB1E103K	CHIP C 0.01UF K		
C198,199			CC73FSL1H101J	CHIP C 100PF J		
C200-206			CK73FB1H102K	CHIP C 1000PF K		
C207-209			CC73FSL1H101J	CHIP C 100PF J		
C210			CK73FB1H102K	CHIP C 1000PF K		
C211			CC73FSL1H101J	CHIP C 100PF J		
C212-216			CK73FB1H102K	CHIP C 1000PF K		
C301			CC73FCH1H030C	CHIP C 3PF C	K,M	
C301			CC73FCH1H050C	CHIP C 5PF C	K2M2	
C302-305			CK73FB1H102K	CHIP C 1000PF K		
C306			CK73FB1E103K	CHIP C 0.01UF K		
C307			CC73FCH1H220J	CHIP C 22PF J	K2M2	
C307			CC73FCH1H330J	CHIP C 33PF J	K,M	
C308			CC73FCH1H0R5C	CHIP C 0.5PF C		
C309			CK73FB1E103K	CHIP C 0.01UF K		
C310			CC73FCH1H020C	CHIP C 2.0PF C	KM	
C310			CC73FCH1H040C	CHIP C 4PF C	K2M2	
C311			CC73FCH1H010C	CHIP C 1PF C		
C312			CK73FB1H102K	CHIP C 1000PF K		
C313			CC73FCH1H150J	CHIP C 15PF J	K2M2	
C313			CC73FCH1H180J	CHIP C 18PF J	K,M	
C314			CC73FCH1H030C	CHIP C 3PF C	KM	
C314			CC73FCH1H180J	CHIP C 18PF J	K2M2	
C315			CK73FB1E103K	CHIP C 0.01UF K		
C316-317			CK73FB1H102K	CHIP C 1000PF K		
C318			CK73FB1E103K	CHIP C 0.01UF K		
C319			CC73FCH1H100D	CHIP C 10PF D		
C320,321			CK73FB1H102K	CHIP C 1000PF K		
C322			CC73FCH1H390J	CHIP C 39PF J		
C323,324			CK73FB1E104K	CHIP C 0.10UF K		
C325			C92-0009-05	CHIP TAN 4.7UF 10WV		
C326			CK73FB1E103K	CHIP C 0.01UF K		
C327			CK73FB1H102K	CHIP C 1000PF K		
C328			C92-0009-05	CHIP TAN 4.7UF 10WV		
C329,330			CK73FB1H102K	CHIP C 1000PF K		
C331,332			CC73FCH1H220J	CHIP C 22PF J		
C333,334			CC73FSL1H101J	CHIP C 100PF J		
C335			CK73FB1H102K	CHIP C 1000PF K		
C336			CC73FSL1H101J	CHIP C 100PF J		
C337			CK73FB1H102K	CHIP C 1000PF K		
C339-342			CK73FB1H102K	CHIP C 1000PF K		

L:Scandinavia **K:**USA **P:**Canada **A :** TK-730
Y:PX(Far East, Hawaii) **T:**England **E:**Europe **B :** TK-730 (B)
Y:AAFES(Europe) **X:**Australia **M:**Other Areas **D :** TK-730 (D)

⚠ indicates safety critical components.

PARTS LIST

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

TX-RX UNIT (X57-3750-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格		Destination 仕向	Remarks 備考
C343			C92-0007-05	CHIP TAN	2.2UF 10WV		
C344			CE04LW1C221M	ELECTRO	220UF 16WV		
C345-347			CK73FB1H102K	CHIP C	1000PF K		
C348			CC73FCH1H150J	CHIP C	15PF J		
C349			CK73FF1C105Z	CHIP C	1.0UF Z		
C350-352			CK73FB1H102K	CHIP C	1000PF K		
C353			CC73FCH1H100D	CHIP C	10PF D	K2M2	
C353			CC73FCH1H180J	CHIP C	18PF J	K,M	
C354			CC73FCH1H120J	CHIP C	12PF J		
C355,356			CK73FB1H102K	CHIP C	1000PF K		
C357			CC73FCH1H010C	CHIP C	1PF C	K2M2	
C358-363			CK73FB1H102K	CHIP C	1000PF K		
C364			CE04EW1C470M	ELECTRO	47UF 16WV		
C365-367			CK73FB1H102K	CHIP C	1000PF K		
C368			CE04EW1C101M	ELECTRO	100UF 16WV		
C369			CK73FB1E103K	CHIP C	0.01UF K		
C370			CK73FB1H102K	CHIP C	1000PF K		
C371			CK73FB1E103K	CHIP C	0.01UF K		
C372			CK73FB1H102K	CHIP C	1000PF K		
C373			CC73FCH1H470J	CHIP C	47PF J		
C374			CK73FB1H102K	CHIP C	1000PF K		
C375			CC73FCH1H180J	CHIP C	18PF J	K,M	
C376			CC73FCH1H180J	CHIP C	18PF J	K2M2	
C377			CC73FCH1H020C	CHIP C	2.0PF C	K2M2	
C501-504			CK73FB1H102K	CHIP C	1000PF K		
C509			CE04EW1H0R1M	ELECTRO	0.1UF 50WV		
C510			CK73FB1E103K	CHIP C	0.01UF K		
C511			C90-2024-05	ELECTRO	47UF 6.3WV		
C512			CE04EW1C101M	ELECTRO	100UF 16WV		
C513			CE04LW1C221M	ELECTRO	220UF 16WV		
C514			C90-2024-05	ELECTRO	47UF 6.3WV		
C515,516			CE04LW1C221M	ELECTRO	220UF 16WV		
C517,518			CQ92FM1H104K	MYLAR	0.10UF K		
C519,520			CK73FB1H102K	CHIP C	1000PF K		
C521-522			CK73FB1E103K	CHIP C	0.01UF K		
C523			CK73FB1E103K	CHIP C	0.01UF K		
C524			CE04EW1E471M	ELECTRO	470UF 25WV		
			E02-2010-05	TRANSISTOR SOCKET(8P)			
			E02-2015-05	TRANSISTOR SOCKET(28P)			
CN1 ,2			E04-0154-05	RF COAXIAL CABLE RECEPTACLE			
CN3			E23-0902-05	TERMINAL(+B)			
CN101			E40-5491-05	PIN CONNECTOR(17P)			
CN102			E40-5470-05	PIN CONNECTOR(13P)			
CN103			E40-3269-05	PIN CONNECTOR(11P)			
CN104			E40-3243-05	PIN CONNECTOR(8P)			
CN105			E40-3242-05	PIN CONNECTOR(7P)			
CN106			E40-3253-05	PIN CONNECTOR(9P)			
CN107			E40-3251-05	PIN CONNECTOR(7P)			
CN108			E40-3256-05	PIN CONNECTOR(12P)			
CN301			E04-0154-05	RF COAXIAL CABLE RECEPTACLE			
CN302		*	E40-5492-05	PIN CONNECTOR(Z301,15P)			
CN303			E04-0154-05	RF COAXIAL CABLE RECEPTACLE			
CN304			E40-3239-05	PIN CONNECTOR(4P)			
CN305			E40-5470-05	PIN CONNECTOR(13P)			

L:Scandinavia **K:**USA **P:**Canada **A :** TK-730
Y:PX(Far East, Hawaii) **T:**England **E:**Europe **B :** TK-730 (B)
Y:AAFES(Europe) **X:**Australia **M:**Other Areas **D :** TK-730 (D)

⚠ indicates safety critical components.

PARTS LIST

× New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

TX-RX UNIT (X57-3750-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
CN501			E40-5491-05	PIN CONNECTOR(17P)		
CN502			E40-3238-05	PIN CONNECTOR(3P)		
W1		*	E37-0117-05	CONNECTING WIRE(3P)		
W2		*	E37-0277-05	FINISHED WIRE(+B)		
W3		*	E37-0116-05	CONNECTING WIRE(3P)		
W105		*	E37-0158-05	CONNECTING WIRE(11P)		
			J30-0545-05	SPACER		
CF301			L72-0342-05	CERAMIC FILTER		
L1			L34-1185-05	COIL		
L2			L39-0908-05	COIL		
L3			L33-0894-05	COIL		
L4 ,5			L34-0452-05	COIL		
L6			L34-0908-05	COIL		
L7			L34-0742-05	COIL		
L8			L34-1285-48	COIL(120N)		
L9			L33-0666-05	COIL		
L301-304			L34-4080-05	COIL		
L305			L34-4191-05	COIL		
L306			L40-1095-48	SMALL FIXED INDUCTOR(1U)		
L307			L30-0503-05	IFT		
L308			L40-1001-48	SMALL FIXED INDUCTOR(10U)		
L309			L40-2211-48	SMALL FIXED INDUCTOR(220U)		
L310			L40-2782-48	SMALL FIXED INDUCTOR(270N)	K,M	
L310			L40-3382-48	SMALL FIXED INDUCTOR(330N)	K2M2	
L311			L34-0956-05	COIL		
X101			L77-1374-05	CRYSTAL RESONATOR(12MHZ)		
X301			L77-1415-05	CRYSTAL RESONATOR(34.855MHZ)		
X302		*	L77-1466-05	CRYSTAL RESONATOR(12.8MHZ)		
XF301			L71-0298-05	CRYSTAL FILTER(34.4MHZ)		
R1			R92-1214-05	CHIP R 120 J 1/2W		
R2			RK73FB2A470J	CHIP R 47 J 1/10W	K,M	
R2			RK73FB2A820J	CHIP R 82 J 1/10W	K2M2	
R3			RK73FB2A682J	CHIP R 6.8K J 1/10W		
R4 ,5			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R6			RK73FB2A333J	CHIP R 33K J 1/10W		
R8			RK73FB2A470J	CHIP R 47 J 1/10W	K,M	
R8			RK73FB2A820J	CHIP R 82 J 1/10W	K2M2	
R9			RK73FB2A102J	CHIP R 1.0K J 1/10W	K,M	
R9			RK73FB2A471J	CHIP R 470 J 1/10W	K2M2	
R10			R92-0670-05	CHIP R 0 OHM		
R91			R92-0670-05	CHIP R 0 OHM		
R101			RK73FB2A471J	CHIP R 470 J 1/10W		
R102,103			RK73FB2A473J	CHIP R 47K J 1/10W		
R104			RK73FB2A105J	CHIP R 1.0M J 1/10W		
R105			R92-0670-05	CHIP R 0 OHM		
R106-108			RK73FB2A104J	CHIP R 100K J 1/10W		
R109			RK73FB2A103J	CHIP R 10K J 1/10W		
R110,111			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R112			RK73FB2A223J	CHIP R 22K J 1/10W		
R113			RK73FB2A101J	CHIP R 100 J 1/10W		
R114,115			RK73FB2A271J	CHIP R 270 J 1/10W		
R116			RK73FB2A223J	CHIP R 22K J 1/10W		
R117			RK73FB2A104J	CHIP R 100K J 1/10W		

L:Scandinavia **K:**USA **P:**Canada **A :** TK-730
Y:PX(Far East, Hawaii) **T:**England **E:**Europe **B :** TK-730 (B)
Y:AAFES(Europe) **X:**Australia **M:**Other Areas **D :** TK-730 (D)

⚠ indicates safety critical components.

PARTS LIST

※ New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

TX-RX UNIT (X57-3750-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
R118			RK73FB2A103J	CHIP R 10K J 1/10W		
R119			RK73FB2A473J	CHIP R 47K J 1/10W		
R120			RK73FB2A222J	CHIP R 2.2K J 1/10W		
R121			RK73FB2A562J	CHIP R 5.6K J 1/10W		
R122			RK73FB2A103J	CHIP R 10K J 1/10W		
R123			RK73FB2A183J	CHIP R 18K J 1/10W		
R124,125			RK73FB2A104J	CHIP R 100K J 1/10W		
R126			RK73FB2A183J	CHIP R 18K J 1/10W		
R127			RK73FB2A223J	CHIP R 22K J 1/10W		
R128			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R129			RK73FB2A104J	CHIP R 100K J 1/10W		
R130,131			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R132			RK73FB2A103J	CHIP R 10K J 1/10W		
R133			RK73FB2A224J	CHIP R 220K J 1/10W		
R134			RK73FB2A101J	CHIP R 100 J 1/10W		
R135-137			RK73FB2A473J	CHIP R 47K J 1/10W		
R138			RK73FB2A333J	CHIP R 33K J 1/10W		
R139-142			RK73FB2A473J	CHIP R 47K J 1/10W		
R143,144			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R145-148			RK73FB2A473J	CHIP R 47K J 1/10W		
R149			RK73FB2A223J	CHIP R 22K J 1/10W		
R150			R92-0670-05	CHIP R 0 ΩHM		
R151,152			RK73FB2A682J	CHIP R 6.8K J 1/10W		
R153			RK73FB2A223J	CHIP R 22K J 1/10W		
R154			RK73FB2A473J	CHIP R 47K J 1/10W		
R155			RK73FB2A104J	CHIP R 100K J 1/10W		
R156			R92-0670-05	CHIP R 0 ΩHM		
R157			RK73FB2A473J	CHIP R 47K J 1/10W		
R158			RK73FB2A272J	CHIP R 2.7K J 1/10W		
R159			R92-0670-05	CHIP R 0 ΩHM		
R160			RK73FB2A104J	CHIP R 100K J 1/10W		
R161,162			RK73FB2A473J	CHIP R 47K J 1/10W		
R166			RK73FB2A103J	CHIP R 10K J 1/10W		
R167-169			RK73FB2A473J	CHIP R 47K J 1/10W		
R170			RK73FB2A220J	CHIP R 22 J 1/10W		
R301			RK73FB2A473J	CHIP R 47K J 1/10W		
R302			RK73FB2A104J	CHIP R 100K J 1/10W		
R303			RK73FB2A104J	CHIP R 100K J 1/10W		
R304			RK73FB2A470J	CHIP R 47 J 1/10W		
R305			RK73FB2A103J	CHIP R 10K J 1/10W		
R306			RK73FB2A101J	CHIP R 100 J 1/10W		
R307-311			RK73FB2A473J	CHIP R 47K J 1/10W		
R312			RK73FB2A561J	CHIP R 560 J 1/10W		
R313			R92-0670-05	CHIP R 0 ΩHM		
R314			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R315			RK73FB2A101J	CHIP R 100 J 1/10W		
R316			RK73FB2A681J	CHIP R 680 J 1/10W		
R317			RK73FB2A223J	CHIP R 22K J 1/10W		
R318			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R319			RK73FB2A473J	CHIP R 47K J 1/10W		
R320			RK73FB2A223J	CHIP R 22K J 1/10W		
R321,322			RK73FB2A332J	CHIP R 3.3K J 1/10W		
R323			RK73FB2A101J	CHIP R 100 J 1/10W		
R324			RK73FB2A100J	CHIP R 10 J 1/10W		
R325			RK73FB2A682J	CHIP R 6.8K J 1/10W		

L:Scandinavia **K:**USA **P:**Canada **A :** TK-730
Y:PX(Far East, Hawaii) **T:**England **E:**Europe **B :** TK-730 (B)
Y:AAFES(Europe) **X:**Australia **M:**Other Areas **D :** TK-730 (D)

⚠ indicates safety critical components.

PARTS LIST

× New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

TX-RX UNIT (X57-3750-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
R326			RK73FB2A105J	CHIP R 1.0M J 1/10W		
R327			RK73FB2A471J	CHIP R 470 J 1/10W		
R328			RK73FB2A104J	CHIP R 100K J 1/10W		
R329,330			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R331			RK73FB2A103J	CHIP R 10K J 1/10W		
R332			RK73FB2A223J	CHIP R 22K J 1/10W		
R333			RK73FB2A271J	CHIP R 270 J 1/10W		
R334			RK73FB2A101J	CHIP R 100 J 1/10W		
R335-337			RK73FB2A473J	CHIP R 47K J 1/10W		
R338			RK73FB2A104J	CHIP R 100K J 1/10W		
R339			RK73FB2A473J	CHIP R 47K J 1/10W		
R340			RK73FB2A100J	CHIP R 10 J 1/10W		
R341			R92-0670-05	CHIP R 0 ØHM		
R342			RK73FB2A473J	CHIP R 47K J 1/10W		
R343			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R344			RK73FB2A473J	CHIP R 47K J 1/10W		
R345-346			RK73FB2A103J	CHIP R 10K J 1/10W		
R347			R92-1211-05	SØLID R 5.6K J 1/2W		
R348-350			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R351			RK73FB2A223J	CHIP R 22K J 1/10W		
R352			RK73FB2A472J	CHIP R 4.7K J 1/10W	K2M2	
R352			R92-0670-05	CHIP R 0 ØHM	K,M	
R353,354			RK73FB2A473J	CHIP R 47K J 1/10W		
R355			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R356			RK73FB2A473J	CHIP R 47K J 1/10W		
R357			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R358,359			R92-0670-05	CHIP R 0 ØHM		
R360			RK73FB2A473J	CHIP R 47K J 1/10W		
R361			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R362			R92-0670-05	CHIP R 0 ØHM	K2M2	
R363			RK73FB2A473J	CHIP R 47K J 1/10W	K2M2	
R401			R92-0670-05	CHIP R 0 ØHM		
R501			RK73FB2A473J	CHIP R 47K J 1/10W		
R502			RK73FB2A562J	CHIP R 5.6K J 1/10W		
R503			RK73FB2A103J	CHIP R 10K J 1/10W		
R504			RK73FB2A105J	CHIP R 1.0M J 1/10W		
R505,506			RK73FB2A2R2J	CHIP R 2.2 J 1/10W		
R507			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R508-510			RS14DB3F150J	FL-PRØØF RS 15 J 3W		
VR1			R12-6748-05	TRIMMING PØT. 220K		
VR2			R12-6427-05	TRIM PØT. 47K		
VR101			R12-6738-05	TRIMMING PØT. 4.7K		
VR102			R12-6744-05	TRIMMING PØT. 47K		
VR301			R12-6742-05	TRIMMING PØT. 22K		
VR302,303			R12-6748-05	TRIMMING PØT. 220K		
W4			R92-1061-05	JUMPER REST 0 ØHM		
W101-104			R92-1061-05	JUMPER REST 0 ØHM		
W107			R92-1061-05	JUMPER REST 0 ØHM		
K501			S51-1420-05	RELAY (SP)		
K502			S76-0401-05	RELAY (PWR)		
D1			UM9401	DIØDE		
D2			MI308	DIØDE		
D3 ,4			HSM88AS	DIØDE		
D6			ERZ-M10DK220	SERGE ABSØRBER		

L:Scandinavia **K:**USA **P:**Canada **A :** TK-730
Y:PX(Far East, Hawaii) **T:**England **E:**Europe **B :** TK-730 (B)
Y:AAFES(Europe) **X:**Australia **M:**Other Areas **D :** TK-730 (D)

⚠ indicates safety critical components.

PARTS LIST

× New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

TX-RX UNIT (X57-3750-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
D7			DSA3A1	DIODE		
D101			02CZ18(X,Y)	DIODE		
D102			1SS181	DIODE		
D103			1SS184	DIODE		
D104			02CZ5.6(X,Y)	DIODE		
D105,106			1SS184	DIODE		
D107-110			1SS226	DIODE		
D111			1SS184	DIODE		
D112			02CZ15(X,Y)	DIODE		
D301			1SS226	DIODE		
D302			1SV164	DIODE		
D303			1SV166	DIODE		
D304			1SV164	DIODE	K,M	
D305			1SV166	DIODE		
D306,307			1SV164	DIODE		
D308			1SV164	DIODE	K,M	
D308			1SV166	DIODE	K2M2	
D309			1SS184	DIODE		
D310			1SV164	DIODE		
D311			1SV166	DIODE		
D312			1T33C	DIODE	K2M2	
D501,502			1SS193	DIODE		
D503			1SS184	DIODE		
IC1		*	M67781H	IC(POWER MODULE)	K,M	
IC1		*	M67781L	IC(POWER MODULE)	K2M2	
IC101			TC4013BF	IC(D FLIP-FLOP X2)		
IC102			L78LR05B-FA	IC		
IC103		*	KCE04	IC		
IC104,105			BU4094BF	IC(SHIFT/STORE REGISTER)		
IC106		*	78312AGF3343BE	IC		
IC107			TC74HC573AF	IC(LATCH)		
IC108		*	27C256BQ-JBY3	IC		
IC109			X24C04PI	IC		
IC301			MC3371D	IC		
IC302			KCB05	IC(DRIVER)		
IC303			BU4094BF	IC(SHIFT/STORE REGISTER)		
IC304			NJM78L05UA	IC(VOLTAGE REGULATOR/ +5V)		
IC305			TC4S66F	IC(BILATERAL SWITCH)	K2M2	
IC501		*	LA4491N	IC(AF POWER AMP)		
IC502			UPC78M08H	IC(VOLTAGE REGULATOR/ +8V)		
Q1			2SD1722(R,S)	TRANSISTOR		
Q2			2SA1162(Y)	TRANSISTOR		
Q3			FMW1	TRANSISTOR		
Q101,102			DTA114EK	DIGITAL TRANSISTOR		
Q103,104			DTD114EK	DIGITAL TRANSISTOR		
Q105			DTC114EK	DIGITAL TRANSISTOR		
Q106			2SC2712(Y)	TRANSISTOR		
Q107			2SD1757K	TRANSISTOR		
Q108-112			DTC114EK	DIGITAL TRANSISTOR		
Q114,115			DTC114EK	DIGITAL TRANSISTOR		
Q116			DTD114EK	DIGITAL TRANSISTOR		
Q301			3SK184(S)	FET		
Q302			3SK140(GR)	FET		
Q303,304			2SC2714(Y)	TRANSISTOR		
Q305			2SK208(Y)	FET		

L:Scandinavia **K:**USA **P:**Canada **A :** TK-730
Y:PX(Far East, Hawaii) **T:**England **E:**Europe **B :** TK-730 (B)
Y:AAFES(Europe) **X:**Australia **M:**Other Areas **D :** TK-730 (D)

⚠ indicates safety critical components.

PARTS LIST

× New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

TX-RX UNIT (X57-3750-XX)
VCO/PLL UNIT (X58-3810-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
Q306			2SB1119S	TRANSISTOR		
Q307			DTC114EK	DIGITAL TRANSISTOR		
Q308			2SB1119S	TRANSISTOR		
Q309-311			DTC114EK	DIGITAL TRANSISTOR		
Q501			DTD114EK	DIGITAL TRANSISTOR		
TH101			157-203-55009	THERMISTER(20K)		
TH301			157-102-53003	THERMISTER(1K)		
Z301		*	X58-3810-10	VCO/PLL UNIT	K,M	
Z301		*	X58-3810-11	VCO/PLL UNIT	K2M2	
			212-3302-05	PLASTIC TUBE		A
			212-6010-05	PLASTIC TUBE		
VCO/PLL UNIT (X58-3810-XX) -10 : K, M -11 : K2, M2						
C1			C92-0004-05	ELECTRO 1.0UF 16WV		
C2 -4			CK73FB1H102K	CHIP C 1000PF K		
C5			CC73FCH1H220J	CHIP C 22PF J		
C6			CC73FCH1H100D	CHIP C 10PF D		
C7 -9			CK73FB1H102K	CHIP C 1000PF K		
C10			CC73FCH1H100D	CHIP C 10PF D		
C11			CK73FB1H102K	CHIP C 1000PF K		
C12			C92-0004-05	ELECTRO 1.0UF 16WV		
C13			CK73FB1H102K	CHIP C 1000PF K		
C14			CC73FCH1H470J	CHIP C 47PF J		
C15			CC73FSL1H101J	CHIP C 100PF J		
C16			CK73FB1H102K	CHIP C 1000PF K		
C17 ,18			C92-0004-05	ELECTRO 1.0UF 16WV		
C19			CK73FB1H102K	CHIP C 1000PF K		
C20			C92-0504-05	CHIP TAN 0.68UF 20WV		
C21		*	C92-0543-05	CHIP TAN 3.3UF 10WV		
C22			C92-0504-05	CHIP TAN 0.68UF 20WV		
C23 ,24			CK73FB1H102K	CHIP C 1000PF K		
C25			CK73FB1H471K	CHIP C 470PF K		
C26			CC73FCH1H030C	CHIP C 3PF C	K,M	
C51			CK73FB1H102K	CHIP C 1000PF K		
C52			CC73FCH1H0R5C	CHIP C 0.5PF C		
C53			CC73FCH1H020C	CHIP C 2.0PF C	K2M2	
C53			CC73FCH1H040C	CHIP C 4PF C	K,M	
C54			CK73FB1H102K	CHIP C 1000PF K		
C55			CC73FCH1H470J	CHIP C 47PF J		
C56			CC73FCH1H070D	CHIP C 7PF D		
C57			CC73FCH1H150J	CHIP C 15PF J		
C58			CC73FCH1H030C	CHIP C 3PF C		
C59			CK73FB1H102K	CHIP C 1000PF K		
C61			CC73FCH1H040C	CHIP C 4PF C	K,M	
C61			CC73FCH1H080D	CHIP C 8PF D	K2M2	
C62			CC73FCH1H330J	CHIP C 33PF J		
C63			CC73FCH1H150J	CHIP C 15PF J		
C64			CC73FCH1H180J	CHIP C 18PF J		
C65			CC73FCH1H030C	CHIP C 3PF C		
C66 ,67			CK73FB1H102K	CHIP C 1000PF K		
C68			C92-0004-05	ELECTRO 1.0UF 16WV		
C69 -71			CK73FB1H102K	CHIP C 1000PF K		
C72			CC73FCH1H220J	CHIP C 22PF J		
C73			CK73FB1H102K	CHIP C 1000PF K		

L:Scandinavia **K**:USA **P**:Canada **A** : TK-730
Y:PX(Far East, Hawaii) **T**:England **E**:Europe **B** : TK-730 (B)
Y:AAFES(Europe) **X**:Australia **M**:Other Areas **D** : TK-730 (D)

⚠ indicates safety critical components.

PARTS LIST

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

VCO/PLL UNIT (X58-3810-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
C74			CK73FB1H471K	CHIP C 470PF K	K2M2	
C74			CK73FB1H561K	CHIP C 560PF K	K,M	
C75			CC73FSL1H101J	CHIP C 100PF J		
C76			CK73FB1H102K	CHIP C 1000PF K		
TC51			C05-0369-05	TRIMMING CAP(6PF)		
CN1		*	E40-5493-05	PIN CONNECTOR(15P)		
CN51		*	E40-5494-05	PIN CONNECTOR(7P)		
		*	F10-1480-03	SHIELDING PLATE		
L1			L40-1082-48	SMALL FIXED INDUCTOR(.1U)		
L51			L40-1001-48	SMALL FIXED INDUCTOR(10U)		
L52			L34-2369-05	COIL(TX/VCO)	K,M	
L52			L34-2370-05	COIL(TX/VCO)	K2M2	
L53			L40-1001-48	SMALL FIXED INDUCTOR(10U)		
L54			L34-2371-05	COIL(RX/VCO)	K,M	
L54			L34-2372-05	COIL(RX/VCO)	K2M2	
L55			L40-1082-48	SMALL FIXED INDUCTOR(.1U)		
R1 ,2			RK73FB2A221J	CHIP R 220 J 1/10W		
R3			RK73FB2A330J	CHIP R 33 J 1/10W		
R4			RK73FB2A103J	CHIP R 10K J 1/10W		
R5			RK73FB2A562J	CHIP R 5.6K J 1/10W		
R6			RK73FB2A330J	CHIP R 33 J 1/10W		
R7			RK73FB2A471J	CHIP R 470 J 1/10W		
R8			RK73FB2A101J	CHIP R 100 J 1/10W		
R9			RK73FB2A103J	CHIP R 10K J 1/10W		
R10			RK73FB2A562J	CHIP R 5.6K J 1/10W		
R11 ,12			RK73FB2A330J	CHIP R 33 J 1/10W		
R13			RK73FB2A333J	CHIP R 33K J 1/10W		
R14			RK73FB2A104J	CHIP R 100K J 1/10W		
R15			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R16			RK73FB2A103J	CHIP R 10K J 1/10W	K2M2	
R16			RK73FB2A562J	CHIP R 5.6K J 1/10W	K,M	
R17			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R18			RK73FB2A472J	CHIP R 4.7K J 1/10W	K2M2	
R18			RK73FB2A562J	CHIP R 5.6K J 1/10W	K,M	
R19			RK73FB2A473J	CHIP R 47K J 1/10W		
R20			RK73FB2A330J	CHIP R 33 J 1/10W		
R22 ,23			RK73FB2A221J	CHIP R 220 J 1/10W		
R24			RK73FB2A681J	CHIP R 680 J 1/10W		
R25			RK73FB2A101J	CHIP R 100 J 1/10W		
R26			RK73FB2A103J	CHIP R 10K J 1/10W		
R27 ,28			R92-0670-05	CHIP R 0 OHM		
R29			RK73FB2A100J	CHIP R 10 J 1/10W	K,M	
R29			R92-0670-05	CHIP R 0 OHM	K2M2	
R30			RK73FB2A101J	CHIP R 100 J 1/10W	K,M	
R30			R92-0670-05	CHIP R 0 OHM	K2M2	
R31			RK73FB2A104J	CHIP R 100K J 1/10W		
R51			RK73FB2A473J	CHIP R 47K J 1/10W		
R52			RK73FB2A101J	CHIP R 100 J 1/10W		
R53			RK73FB2A473J	CHIP R 47K J 1/10W		
R54			RK73FB2A271J	CHIP R 270 J 1/10W		
R55			RK73FB2A330J	CHIP R 33 J 1/10W		
R56			RK73FB2A101J	CHIP R 100 J 1/10W		
R57			RK73FB2A562J	CHIP R 5.6K J 1/10W		

L:Scandinavia **K:**USA **P:**Canada **A :** TK-730
Y:PX(Far East, Hawaii) **T:**England **E:**Europe **B :** TK-730 (B)
Y:AAFES(Europe) **X:**Australia **M:**Other Areas **D :** TK-730 (D)

⚠ indicates safety critical components.

PARTS LIST

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

VCO/PLL UNIT (X58-3810-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
R58			RK73FB2A271J	CHIP R 270 J 1/10W		
R59			RK73FB2A562J	CHIP R 5.6K J 1/10W		
R60			RK73FB2A103J	CHIP R 10K J 1/10W		
R61			RK73FB2A221J	CHIP R 220 J 1/10W		
R62			RK73FB2A331J	CHIP R 330 J 1/10W		
R63			RK73FB2A330J	CHIP R 33 J 1/10W		
R64			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R65			RK73FB2A104J	CHIP R 100K J 1/10W		
R66			RK73FB2A153J	CHIP R 15K J 1/10W		
D1			MA77	DIODE		
D51			1SV164	DIODE		
D52 -55			1T33C	DIODE		
ICI			MB1504PF	IC		
Q1 ,2			2SC2714(Y)	TRANSISTOR		
Q3			2SA1162(Y)	TRANSISTOR		
Q4			DTC143EK	DIGITAL TRANSISTOR		
Q5			2SA1312(GR)	TRANSISTOR		
Q6			2SC3324(G)	TRANSISTOR		
Q51 ,52			2SK508NV(K52)	FET		
Q53			2SC2714(Y)	TRANSISTOR		
Q54			DTC114EK	DIGITAL TRANSISTOR		
Q55			FMG2	TRANSISTOR		

L:Scandinavia **K:**USA **P:**Canada **A :** TK-730
Y:PX(Far East, Hawaii) **T:**England **E:**Europe **B :** TK-730 (B)
Y:AAFES(Europe) **X:**Australia **M:**Other Areas **D :** TK-730 (D)

⚠ indicates safety critical components.

PARTS LIST

× New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht gellefert.

KCH-3
DISPLAY UNIT (X54-3100-20)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
KCH-3						
201	2C	*	A22-0776-02	SUB PANEL		
202	1C	*	A62-0063-03	PANEL		
		*	A62-0064-03	PANEL ASSY		
205	2C	*	B10-1162-04	FRONT GLASS		
			B42-3317-04	LABEL(S/NO)		
		*	E37-0157-05	CONNECTING WIRE		
		*	E37-0159-05	CONNECTING WIRE		
211	1C		G09-0405-05	SPRING		
212	1C		G53-0509-04	PACKING		
214	2J	*	H10-2725-02	POLYSTYRENE FOAMED FIXTURE		
215	1I	*	H11-0847-04	POLYSTYRENE PLATE		
216	1J	*	H13-0854-04	PACKING FIXTURE		
217	2I		H25-0103-04	PROTECTION BAG		
218	3I	*	H52-0108-04	ITEM CARTON BOX		
220	3D	*	J21-4340-04	MOUNTING HARDWARE		
222	2C	*	K29-4663-02	KEY TOP		
223	1C	*	K29-4664-04	KNOB (VOL,CH)		
H	3C		N87-2606-46	BRAZIER HEAD TAPTITE SCREW		
J	3C,3D		N87-3008-46	BRAZIER HEAD TAPTITE SCREW		
225	2J		N99-0364-05	SCREW SET		
227	3D		T07-0247-05	LOUDSPEAKER(FULLRANGE)		
229	3C	*	X54-3100-20	DISPLAY UNIT		
			212-3302-05	PLASTIC TUBE		
DISPLAY UNIT (X54-3100-20)						
D6			B38-0322-05	LED ASSY		
ED1		*	B38-0353-05	LCD		
C1 -4			CC73FSL1H101J	CHIP C 100PF K		
C5			CC73FSL1H101J	CHIP C 100PF J		
C6 -11			CK73FB1H102K	CHIP C 1000PF K		
C12			CC73FSL1H101J	CHIP C 100PF J		
C13			CK73FB1H102K	CHIP C 1000PF K		
C14 ,15			CC73FSL1H101J	CHIP C 100PF J		
C16 -20			CK73FB1H102K	CHIP C 1000PF K		
C21 -25			CC73FSL1H101J	CHIP C 100PF J		
C26 ,27			CK73FB1H102K	CHIP C 1000PF K		
C28			C92-0003-05	CHIP TAN 0.47UF 25WV		
C29			CK73FB1H102K	CHIP C 1000PF K		
C30			C92-0038-05	ELECTRO 22UF 16WV		
C31			CK73FB1E103K	CHIP C 0.01UF K		
C32 ,33			CC73FSL1H101J	CHIP C 100PF J		
		*	E29-0497-04	CONNECTOR		
CN1			E40-3241-05	PIN CONNECTOR(6P)		
CN2			E40-3255-05	PIN CONNECTOR(11P)		
CN3			E40-3247-05	PIN CONNECTOR(3P)		
CN4			E40-3237-05	PIN CONNECTOR(2P)		
J1			E08-0673-05	RECTANGULAR RECEPTACLE(MIC)		
W1		*	E37-0118-05	CONNECTING WIRE		

L:Scandinavia **K:**USA **P:**Canada
Y:PX(Far East, Hawaii) **T:**England **E:**Europe
Y:AAFES(Europe) **X:**Australia **M:**Other Areas

⚠ indicates safety critical components.

PARTS LIST

× New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

DISPLAY UNIT (X54-3100-20)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
			G13-0656-04	CUSHION		
		*	J21-4343-04	MOUNTING HARDWARE		
X1			L78-0043-05	RESONATOR(4.19MHZ)		
R1 ,2			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R3			RK73FB2A681J	CHIP R 680 J 1/10W		
R4			RK73FB2A821J	CHIP R 820 J 1/10W		
R5			RK73FB2A561J	CHIP R 560 J 1/10W		
R6		*	R92-1281-05	FIXED RESISTOR 4.7		
R7			RK73FB2A820J	CHIP R 82 J 1/10W		
R8 -13			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R14			RK73FB2A473J	CHIP R 47K J 1/10W		
R15 ,16			RK73FB2A101J	CHIP R 100 J 1/10W		
R17			RK73FB2A181J	CHIP R 180 J 1/10W		
R18			R92-0670-05	CHIP R 0 OHM		
R19			RK73FB2A472J	CHIP R 4.7K J 1/10W		
R20			R92-0670-05	CHIP R 0 OHM		
VR1		*	R05-3457-05	POTENTIOMETER(10KA)		
S1			S40-1420-05	PUSH SWITCH		
S2 -5		*	S70-0410-05	TACT SWITCH		
D1 -4			1SS226	DIODE		
D5			1SS181	DIODE		
IC1		*	75328GC5563B9	IC		
IC2			L78LR05B-FA	IC		
Q1			DTD114EK	DIGITAL TRANSISTOR		
Q2			DTC114EK	DIGITAL TRANSISTOR		
S10			W02-0393-05	ENCORDER		

L:Scandinavia **K:**USA **P:**Canada
Y:PX(Far East, Hawaii) **T:**England **E:**Europe
Y:AAFES(Europe) **X:**Australia **M:**Other Areas

⚠ indicates safety critical components.

PARTS LIST

× New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

KCH-4
DISPLAY UNIT (X54-3110-20)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
			KCH-4			
301	2E	*	A22-0777-02	SUB PANEL		
302	1E	*	A62-0066-03	PANEL		
		*	A62-0067-03	PANEL ASSY		
305	2F	*	B10-1163-04	FRONT GLASS		
			B42-3317-04	LABEL (S/NO)		
308	1E		G09-0405-05	SPRING		
310	2L	*	H10-2725-02	POLYSTYRENE FOAMED FIXTURE		
311	1K	*	H11-0847-04	POLYSTYRENE PLATE		
312	1L	*	H13-0854-04	PACKING FIXTURE		
313	2L		H25-0029-04	PROTECTION BAG		
314	2L		H25-0096-04	PROTECTION BAG		
315	2K		H25-0103-04	PROTECTION BAG		
316	3K	*	H52-0109-04	ITEM CARTON BOX		
318	1E	*	K29-4664-04	KNOB(VOL,CH)		
319	2E	*	K29-4666-02	KEY TOP		
320	2L	*	K29-4704-04	KNOB ASSY		
K	3E,3F		N87-2606-46	BRAZIER HEAD TAPTITE SCREW		
L	3E,3F		N87-3008-46	BRAZIER HEAD TAPTITE SCREW		
322	2L		N99-0364-05	SCREW SET		
324	3E,3F	*	X54-3110-20	DISPLAY UNIT		
			DISPLAY UNIT (X54-3110-20)			
D7		*	B38-0352-05	LED ASSYASSY		
ED1		*	B38-0354-05	LCD		
C1 -5			CC73FSL1H101J	CHIP C 100PF J		
C6 -11			CK73FB1H102K	CHIP C 1000PF K		
C12			CC73FSL1H101J	CHIP C 100PF J		
C13			CK73FB1H102K	CHIP C 1000PF K		
C14 ,15			CC73FSL1H101J	CHIP C 100PF J		
C16 -20			CK73FB1H102K	CHIP C 1000PF K		
C21 -25			CC73FSL1H101J	CHIP C 100PF J		
C26 ,27			CK73FB1H102K	CHIP C 1000PF K		
C28			C92-0003-05	CHIP TAN 0.47UF 25WV		
C29			C92-0038-05	ELECTRO 22UF 16WV		
C30			CK73FB1H102K	CHIP C 1000PF K		
C31			CK73FB1E103K	CHIP C 0.01UF K		
C32 -37			CC73FSL1H101J	CHIP C 100PF J		
			E02-2010-05	TRANSISTOR SOCKET		
		*	E29-0496-04	CONNECTOR		
CN1			E40-3241-05	PIN CONNECTOR(6P)		
CN2			E40-3255-05	PIN CONNECTOR(11P)		
CN3			E40-3247-05	PIN CONNECTOR(3P)		
J1			E08-0673-05	RECTANGULAR RECEPTACLE(MIC)		
W1		*	E37-0118-05	CONNECTING WIRE		
			G13-1353-04	CUSHION		
		*	J21-4342-04	MOUNTING HARDWARE		
X1			L78-0043-05	RESONATOR(4.19MHZ)		

L:Scandinavia **K:**USA **P:**Canada
Y:PX(Far East, Hawaii) **T:**England **E:**Europe
Y:AAFES(Europe) **X:**Australia **M:**Other Areas

⚠ indicates safety critical components.

PARTS LIST

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

DISPLAY UNIT (X54-3110-20)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
R1 ,2			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R3			RK73FB2A681J	CHIP R 680 J 1/10W		
R4			RK73FB2A821J	CHIP R 820 J 1/10W		
R5			RK73FB2A561J	CHIP R 560 J 1/10W		
R6		*	R92-1281-05	FIXED RESISTOR 4.7		
R7			RK73FB2A821J	CHIP R 820 J 1/10W		
R8 -13			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R14			RK73FB2A473J	CHIP R 47K J 1/10W		
R15 ,16		*	R92-1280-05	FIXED RESISTOR 390		
R17 ,18			RK73FB2A181J	CHIP R 180 J 1/10W		
R19 ,20			RK73FB2A152J	CHIP R 1.5K J 1/10W		
R21 ,22			RK73EB2B471J	CHIP R 470 J 1/8W		
R23 -26			RK73FB2A102J	CHIP R 1.0K J 1/10W		
R27 ,28			RK73FB2A473J	CHIP R 47K J 1/10W		
R29 -32			RK73FB2A101J	CHIP R 100 J 1/10W		
R33			R92-0670-05	CHIP R 0 OHM		
R34			RK73FB2A103J	CHIP R 10K J 1/10W		
R35			R92-0670-05	CHIP R 0 OHM		
R36			RK73FB2A473J	CHIP R 47K J 1/10W		
VR1		*	R05-3457-05	POTENTIOMETER(10KA)		
S1			S40-1420-05	PUSH SWITCH		
S2 -9		*	S70-0410-05	TACT SWITCH		
D1 -4			1SS226	DIODE		
D5			1SS181	DIODE		
D6			02CZ10(X,Y)	DIODE		
IC1			75328GC5563B9	IC		
IC2			L78LR05B-FA	IC		
IC3		*	X24C04PI	IC		
IC4			MSM5265GS-V1K	IC(LCD DRIVER)		
Q1			DTD114EK	DIGITAL TRANSISTOR		
Q2			2SC2873(Y)	TRANSISTOR		
Q3			FMC5	TRANSISTOR		
S10			W02-0393-05	ENCORDER		

L:Scandinavia **K:**USA **P:**Canada
Y:PX(Far East, Hawaii) **T:**England **E:**Europe
Y:AAFES(Europe) **X:**Australia **M:**Other Areas

⚠ indicates safety critical components.