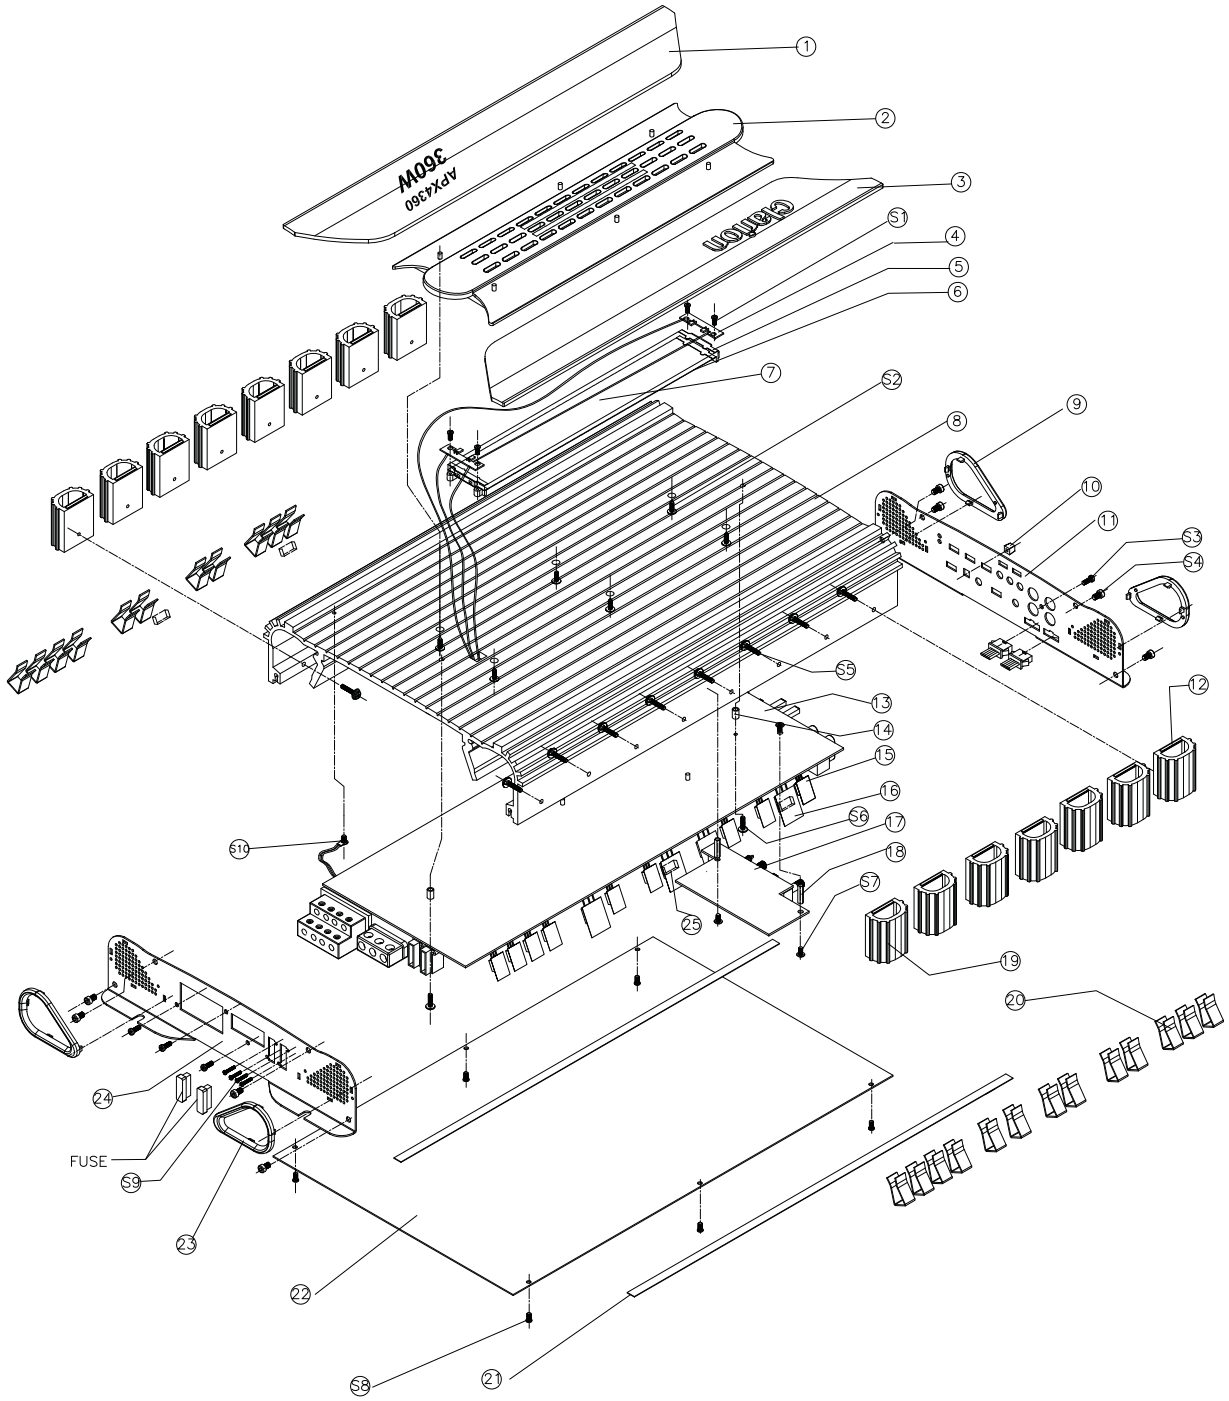
■TROUBLESHOOTING

PROBLEM	POSSIBLE CAUSE	SOLUTION
NO AUDIO	LOW OR NO REMOTE TURN-ON VOLTAGE	CHECK REMOTE CONNECTIONS AT AMPLIFIER AND SOURCE UNIT.
	BLOWN AMPLIFIER FUSE	REPLACE WITH NEW FAST-BLOW FUSE (SAME RATING).
	POWER WIRES NOT CONNECTED	CHECK BATTERY AND GROUND WIRING AT AMPLIFIER; ALSO CHECK BATTERY CONNECTIONS.
	SPEAKER LEADS SHORTED	CHECK SPEAKER CONTINUITY TO GROUND, IT SHOULD NOT SHOW A COMMON GROUND.
	SPEAKERS NOT CONNECTED OR ARE BLOWN	CHECK SPEAKER CONNECTIONS AT AMPLIFIER, MEASURE COIL IMPEDANCE.
AUDIO CYCLES ON AND OFF	THERMAL PROTECTION CIRCUITS ARE SHUTTING AMPLIFIER OFF	CHECK LOCATION FOR ADEQUATE VENTILATION; CONSULT AN AUTHORIZED CLARION AUDIO DEALER.
DISTORTED AUDIO.	GAIN IS NOT SET PROPERLY, OR DAMAGED SPEAKER CONES	REVIEW SETTING GAIN; INSPECT EACH SPEAKER CONE FOR SIGNS OF DAMAGE (I.E., FROZEN CONE, BURNING SMELL, ETC.)
AMPLIFIER FUSE KEEPS BLOWING	INCORRECT WIRING OR SHORT CIRCUIT	REVIEW INSTALLATION AND CHECK ALL WIRING CONNECTION.
WHINING OR TICKING NOISE IN THE AUDIO WITH ENGINE ON.	AMPLIFIER IS PICKING UP ALTERNATION NOISE OR RADIATED NOISE	TURN DOWN INPUT GAIN AND MOVE AUDIO CABLES AWAY FROM POWER WIRES. CHECK POWER AND GROUND CONNECTIONS ON AMPLIFIER AND INSTALL AN IN-LINE NOISE FILTER ON SOURCE UNIT'S POWER WIRE. ALSO CHECK THE ALTERNATOR AND /OR VOLTAGE. TEST FOR WEAK BATTERY OR ADD WATER TO BATTERY.

■EXPLODED VIEW / PARTS LIST

REF	PART NO	DESCRIPTION	SPEC	UNIT	Q'TY
1	UB MG-APX4360-02	MODEL BADGE	ALUMI 406.4MM	PCS	1
2	UB MM-APX4360-01	LED BOARD COVER	ABS,BLACK	PCS	1
3	UB MG-APX4360-01	LOGO BADGE	ALUMI 406.4MM	PCS	1
4	UB APX4360-02	LED BOARD	APX4360	PCS	1
5	UB 29-3975-0100-PD	TINFOIL	39*7.5mm TAK0.1mm SILVER	PCS	4
6	UB 29-2459-0100-PD	TINFOIL	242*59 TAK 0.1mm SILVER	PCS	1
7	UB MM-APX4360	ARCLIC BOARD	PC or PS	PCS	1
8	UB 93-DB40-0000	HEATSINK	AL6063L=406.4mm BLACK	PCS	1
9	UB MM-DPX2250-02	SIDE RING (RIGHT)	ABS BLACK	PCS	2
11	UB MG-APX4360-R	FRONT PANNEL	BLACK	PCS	1
12	UB 29-1602-0500-ED	FIBER PAD	16*2*0.5MM	PCS	16
13	UB APX4360-01	PCB	APX4360	PCS	1
14	UB MM-3264-7900	SPACE BAR	Φ3.2*Φ6.4*H7.9MM (NYLON)	PCS	2
15	UB TIN-AMIT2-017	MIKA	13*18.5*1mm	PCS	18
16	UB TIN-AMIT2-018	MIKA	25*20*0.1t/mm	PCS	8
17	UB PCB-1057-16HB-01	Mini PCB	BLUE1.6*57.1*103MM DOUBLE SIDE	PCS	1
18	UB BSC-H016B-001	BAR	@3*16MM	PCS	2
19	UB 93-DB38-0000	SUB HEATSINK	AL6063L=38mm BLACK	PCS	16
20	UB JJ-FB24-1001	CLIP	1*10.2*24.2MMBLACK	PCS	26
21	UB 29-4008-0500-DA	BOTTOM COVER PAD	402*8*0.5mm	PCS	2
22	UB MG-APX4360	BOTTOM COVER	BLACK	PCS	1
23	UB MM-DPX2250-01	SIDE RING (LEFT)	ABS BLACK	PCS	2
24	UB MG-APX4360-L	REAR PANNEL	BLACK	PCS	1
25	UB JJ-FS20-0706	CLIP	4.2*7.7*20.4MM	PCS	4
S1	UB LS-FBC0-0305	SCREW	(+) Φ3*5MM,BLACK	PCS	4
S2	UB LS-FBD0-0308	SCREW	(+) Φ3*8MMBLACK	PCS	6
S3	UB LS-FBLO-0308	SCREW	HEXΦ3*8MM BLACK	PCS	4
S4	UB LS-FBLO-0406	SCREW	HEX Φ4*6mmBLACK	PCS	8
S5	UB LS-FBDO-0317	SCREW	(+)M3*17mmBLACK	PCS	16
S6	UB LS-FBDO-0314	SCREW	(+)M3*14mm BLACK	PCS	2
S7	UB LS-FSDO-0308	SCREW	(+) M3*8mm	PCS	4
S8	UB LS-FBCG-0306	SCREW	(+)Φ3*6MMBLACK	PCS	6
S9	UB LS-FBDG-0210-01	SCREW	(+) Φ2*10MM BLACK	PCS	4
S10	UB LS-FSDO-0306-01	SCREW	(+) @3*6MM	PCS	1


360W
APX4360
carlon
FUSE

■ELECTRICAL PART LIST

MAIN PCB

PART NO.	DESCRIPTION	SPEC	UNIT	QTY	LOCATION NO.
UB CML-104J1HOAT-UB	MEF/CAPACITOR	0.1uF/50V 5% 5mm LS	PCS	39	C1 C3-C5 C8 C12 C15 C20-C22 C25 C26 C29-C34 C38 C42-C43 C75-C78 C80-C82 C88 C91-C93 C100 C103 C109 C111-112 C119 C121
UB CCL-330J1HOAT-UB	M/CAPACITOR	33PF/50V5mmLS	PCS	1	C104
UB CCL-100J1HOAT-01UB	M/CAPACITOR	10pF/50V 5mm LS	PCS	4	C11 C17 C102 C106
UB CEP107J1CYRAT-UB	E/CAPACITOR	100uF/16V 85℃ 8*11.5H*3.5mm	PCS	4	C16 C24 C79 C89
UB CCL-330J1HOAT-UB	M/CAPACITOR	33pF/50V 5mm LS	PCS	11	C18 C19 C39 C40 C64 C65 C85 C86 C87 C105 C118
UB CEP476M1CHR5P	E/CAPACITOR	47UF/16V 105℃ 20% 6.3*7*2.5mmLS	PCS	3	C2 C90 C116
UB CEP108J1HHRAT-UB	E/CAPACITOR	1000uF/50V 105℃ 16*26*7.5mmLS	PCS	4	C23 C37 C44 C52
UB CML-474J1HOAT-UB	MEF/CAPACITOR	0.47uF/50V 5% 5mm LS	PCS	5	C27 C45 C48 C71 C83
UB CML-103J1HOAT-UB	MEF/CAPACITOR	0.01uF/50V 5% 5mm	PCS	3	C28 C41 C70
UB CML-102J1HOAT-UB	MEF/CAPACITOR	0.001uF/50V 5% 5mm	PCS	4	C35 C36 C73 C74
UB CML-473J1HOAT-UB	MEF/CAPACITOR	0.047uF/50V 5% 5mm LS	PCS	1	C49
UB CML-682J1HOAT-UB	MEF/CAPACITOR	0.0068uF/50V 5% 5mm LS	PCS	2	C50 C56
UB CEP108M1EHRCP	E/CAPACITOR	1000UF/25V 105℃20% 10*20*5mmLS	PCS	2	C51 C58
UB CML-472J1HOAT-UB	MEF/CAPACITOR	0.0047uF/50V 5% 5mm LS	PCS	1	C53
UB CEP688M1CHRAT-UB	E/CAPACITOR	6800UF/16V 20%105℃18*31.5*7.5	PCS	3	C54 C68 C69
UB CML-104J1HOAT-UB	CAPACITOR	0.1uF/50V5%5mmLS	PCS	3	C55 C63 C120
UB CML-272J1HOAT-UB	MEF/CAPACITOR	0.0027uF/50V 5% 5mm LS	PCS	2	C57 C114
UB CCL-680J1HOAT-UB	M/CAPACITOR	68pF/50V 5mm LS	PCS	8	C6 C13 C62 C72 C95 C99 C107 C108
UB CEP477J1EHRAP-02	E/CAPACITOR	470UF/25V105℃10*16*5mmLS	PCS	2	C66 C67
UB CML-150J1HOAT-UB	MEF/CAPACITOR	150pF/50V 5% 5mm LS	PCS	4	C7 C14 C101 C110
UB CEP227J1EHRAP-03	E/CAPACITOR	220uF/25V105℃20%φ8*11.5*3.5mmLS	PCS	1	C89
UB CEP106J1HHRAP-06	E/CAPACITOR	10UF/50V 105℃ 5*11*2mm LS	PCS	14	C9 C10 C46 C47 C59 C60 C61 C84 C94 C96 C97 C113 C115 C117
UB DR-D0IN4001-T-01	RECTIFIER DIODE	IN4001 1A 50V	PCS	2	D13 C14
UB DS-D0IN4934-T	FAST RECO RECTIFIER	IN4934 DO-41 1A 200V	PCS	2	D15 D16
UB DS-D0MUR820-T	FAST DIODE	MUE8208A100V35nS	PCS	4	D1-D4
UB DR-D0005402-T-01	RECTIFIER DIODE	3A 200V DO-201AD IN5402	PCS	1	D23
UB DS-D0IN4148-T-03	DIODE	DO-35 IN4148 500mA 100V DIP	PCS	18	D5-D12 D17-D22 D24-D27
UB DS-DIN5240B-T	ZENER DIODE	IN5240B 10V DO-35 500mW	PCS	1	DZ1
UB DS-DIN5231B-T	ZENER DIODE	IN5231B 5.1V DO-35 500mW	PCS	1	DZ2
UB DS-DIN5233B-T	ZENER DIODE	IN5233B 6V DO-35 500mW	PCS	1	DZ3
UB DS-DIN5266B-T	ZENER DIODE	IN5266B 68V DO-35 500mW	PCS	2	DZ4 DZ5
UB FUSE-HDP-004	FUSE HOLDER	JEF-703E	PCS	2	FH1 FH2
UB FUSE-F32F35H-01	FUSE	35A 32V (UL)	PCS	2	FH2 FH1
UB JR-24XHC-002Z	RCA JACK	4P RED/WHITE	PCS	1	J5
UB LC-FX00-0008	INDUCTOR	17-1/2, 1uH @0.8	PCS	4	L1 L2 L3 L4
UB 40-LH18-0200-01	JUMMPER	φ2*18mm H=10mm	PCS	1	L6
UB LC-GG40-1224	INDUCTOR	Φ40 Φ1.2*2*24Ts	PCS	1	L6
UB LD-ROU30-011E	LED	φ3*4.8mm BLUE	PCS	1	LED1
UB LD-R0G10-001D	LED BOARD	10*8.2*4.3MM	PCS	1	LED1 LED2
UB LD-ROU30-005R	LED	φ3*4.8mm RED	PCS	1	LED2
UB ST1-IRF280H-01	TRANSISTOR	IRF2807	PCS	4	M1 M2 M3 M4
UB 61-B010-6500	CABLE	GND BLACK Φ6.5mm 1007 20#L=100mm	PCS	1	P18
UB ST1-TIP35CH	TRANSISTOR	TIP35CTO-218"ST"	PCS	4	Q1 Q10 Q45 Q54
UB ST1-MPSA56H	TRIODO	MPSA56	PCS	12	Q19 Q20 Q21 Q22 Q25 Q26 Q30 Q31 Q34 Q35 Q38 Q41
UB ST1-MPSA06H	TRIODO	MPSA06	PCS	12	Q2 Q6 Q7 Q11 Q15 Q16 Q44 Q49 Q50 Q53 Q58 Q59
UB ST1-MPSA06H	TRIODO	MPSA06	PCS	11	Q27 Q28 Q29 Q32 Q33 Q36 Q37 Q40 Q43 Q23 Q24
UB ST1-TIP31CH	TRANSISTOR	TIP31C	PCS	4	Q3 Q12 Q46 Q55
UB ST1-2N6715T	TRANSISTOR	Semi 2N6715 NPN 2A TO-237	PCS	1	Q39
UB ST1-MPSA56H	TRIODO	MPSA56	PCS	8	Q4 Q5 Q13 Q14 Q47 Q48 Q56 Q57
UB ST1-2N6726T	TRANSISTOR	Semi 2N6726 PNP 2A TO-237	PCS	1	Q42
UB ST1-TIP32CH	TRANSISTOR	TIP32C	PCS	4	Q8 Q17 Q51 Q60
UB ST1-TIP36CH	TRANSISTOR	TIP36CTO-218"ST"	PCS	4	Q9 Q18 Q52 Q61
UB RN4753FW8-MLT	PRECIS./RESISTOR	475Ω 1/8W 1%	PCS	11	R1 R2 R30 R34 R47 R51 R146 R213 R217 R232 R236
UB RN2433FW8-MLT	PRECIS./RESISTOR	243K 1/8W 1%	PCS	2	R101 R107
UB RNR010JW2-MLT	MOF/RESISTOR	0.1Ω 1/2W 1%	PCS	8	R11 R12 R17 R21 R237 R239 R245 R249
UB RN1002FW8-MLT	PRECIS./RESISTOR	10K 1/8W 1%	PCS	4	R114 R121 R138 R190
UB RN30R0JW2-MLT	MOF/RESISTOR	30ohm1/2W	PCS	1	R119
UB RN4750FW4-MLT	PRECIS./RESISTOR	475Ω 1/4W 1%	PCS	1	R120
UB RN4752FW8-MLT	PRECIS./RESISTOR	47.5K 1/8W 1%	PCS	4	R122 R129 R188 R219

PART NO.	DESCRIPTION	SPEC	UNIT	Q'TY	LOCATION NO.
UB RN4751FW8-MLT	PRECIS./RESISTOR	4.75K 1/8W 1%	PCS	21	R13 R14 R16 R24 R27 R35 R36 R52 R53 R108-R111 R117 R118 R125 R131 R132 R158 R169 R183
UB RN1582FW8-MLT	PRECIS./RESISTOR	15.8K 1/8W 1%	PCS	1	R133
UB RN2102FW8-MLT	PRECIS./RESISTOR	21K 1/8W 1%	PCS	4	R135 R136 R248 R252
UB RN7680FW8-MLT	PRECIS./RESISTOR	768Ω 1/8W 1%	PCS	4	R142 R163 R206 R230
UB RN3922FW8-MLT	PRECIS./RESISTOR	39.2K 1/8W 1%	PCS	1	R149
UB RN8251FW8-MLT	PRECIS./RESISTOR	8.25K 1/8W 1%	PCS	10	R15 R25 R38 R54 R63 R81 R172 R194 R218 R224
UB RN1822FW4-MLT	PRECIS./RESISTOR	18.2K 1/4W 1%	PCS	1	R154
UB RN7871FW4-MLT	PRECIS./RESISTOR	7.87K 1/4W 1%	PCS	2	R155 R167
UB RN2003FW8-MLT	PRECIS./RESISTOR	200Ω 1/8W 1%	PCS	1	R161
UB RN5R10FW4-MLT	PRECIS./RESISTOR	5.1Ω 1/4W 1%	PCS	10	R18 R19 R22 R23 R58 R59 R74 R75 R141 R147
UB RN2212FW8-MLT	PRECIS./RESISTOR	22.1K 1/8W 1%	PCS	4	R184 R211 R238 R251
UB RN3012FW8-MLT	PRECIS./RESISTOR	30.1K 1/8W 1%	PCS	1	R189
UB RN3322FW8-MLT	PRECIS./RESISTOR	33.2K 1/8W 1%	PCS	4	R191 R208 R244 R247
UB RN22R1FW8-MLT	PRECIS./RESISTOR	22.1Ω 1/8W 1%	PCS	31	R20 R31 R32 R42 R48 R49 R65 R68 R70 R73 R83 R86 R88 R91 R113 R173 R175 R178 R180 R195 R197 R200 R202 R212 R214 R215 R231 R233 R234 R268 R269
UB RN1000FW8-MLT	PRECIS./RESISTOR	100Ω 1/8W 1%	PCS	19	R2-10 R77 R79 R140 R254-261
UB RN3900FW8-MLT	PRECIS./RESISTOR	390Ω 1/8W 1%	PCS	1	R228
UB RN1430FW8-MLT	PRECIS./RESISTOR	143Ω 1/8W 1%	PCS	1	R243
UB RN9311FW8-MLT	PRECIS./RESISTOR	9.31K 1/8W 1%	PCS	1	R246
UB RN5600FW4-MLT	PRECIS./RESISTOR	560Ω1/4W1%	PCS	2	R262.R263
UB RN5R11FW8-MLT	PRECIS./RESISTOR	5.11Ω 1/8W 1%	PCS	4	R264 R265 R266 R267
UB RN3920FW4-MLT	PRECIS./RESISTOR	392Ω 1/4W 1%	PCS	4	R28 R116 R128 R221
UB RN9090FW8-MLT	PRECIS./RESISTOR	909Ω 1/8W 1%	PCS	4	R29 R43 R209 R223
UB RN6341FW8-MLT	PRECIS./RESISTOR	6.34K 1/8W 1%	PCS	8	R33 R39 R50 R55 R185 R216 R226 R235
UB RN2151FW8-MLT	PRECIS./RESISTOR	2.15K 1/8W 1%	PCS	4	R37 R46 R207 R222
UB RN82R5FW8-MLT	PRECIS./RESISTOR	82.5Ω 1/8W 1%	PCS	4	R40 R57 R186 R225
UB RN56R2FW8-MLT	PRECIS./RESISTOR	56.2Ω 1/8W 1%	PCS	5	R41 R56 R187 R220 R227
UB RN2002JW8-MLT-02	PRECIS./RESISTOR	20K 1/8W 1%	PCS	12	R44 R45 R102 R103 R144 R145 R192 R193 R210 R270-R272
UB RN7500FW8-MLT	PRECIS./RESISTOR	750Ω 1/8W 1%	PCS	2	R60 R106
UB RN1822FW8-MLT	PRECIS./RESISTOR	18.2K 1/8W 1%	PCS	10	R61 R62 R92 R97-R98 R152 R153 R170 R171
UB RN6810FW8-MLT	PRECIS./RESISTOR	681Ω 1/8W 1%	PCS	9	R64 R69 R82 R87 R166 R174 R179 R196 R201
UB RN1001FW8-MLT	PRECIS./RESISTOR	1K 1/8W 1%	PCS	17	~~R66 R71 R78 R84 R99 R93 R112 R115 R160~~ R168 R177 R182 R199 R204 R240 R242 ~~R253~~
UB RN2001FW8-MLT	PRECIS./RESISTOR	2K 1/8W 1%	PCS	15	R67 R72 R80 R85 R90 R104 R165 R176 R181 R198 R203 R241 R250 R126 R157
UB RN93R1FW8-MLT	PRECIS./RESISTOR	93.1Ω 1/8W 1%	PCS	2	R76 R105
UB RN4753FW8-MLT-01	PRECIS./RESISTOR	475K 1/8W 1%	PCS	2	R94 R96
UB RN1101FW8-MLT	PRECIS./RESISTOR	1.1K 1/8W 1%	PCS	2	R95 R100
UB RN6811FW8-MLT	PRECIS./RESISTOR	6.81K 1/8W 1%	PCS	4	RR143 R164 R205 R229
UB SW-PH13X-002	SWITCH	3 BAND	PCS	3	SW1 SW2 SW3
UB SW-R023X-001	SWITCH	2P3T 6mm, 3mm E-SWITCH EG2315A	PCS	2	SW4 SW5
UB TMS-PTD1003-001	THERMISTOR	100K	PCS	2	TH1 TH2
UB IA-00L7915CVH	3-Terminal Regulator	ST L7915CV 15V 1A TO-220	PCS	1	U1
UB IA-0LM431ACZH-UB	IC	FAIRCHILDKA431	PCS	1	U12
UB IA-PIC16F818H-01	IC	MICROCHIP PIC16F818-I/P8-BitCMOS DIP18	PCS	1	U16
UB IA-00KA3525AH	IC	KA3525A	PCS	1	U17
UB IA-00L7815CVH	3-Terminal Regulator	ST L7815CV 15V 1A TO-220	PCS	1	U18
UB IA-00TL072CNH-01	IC	TL072	PCS	3	U2 U5 U14
UB IA-000NE5532H-01	IC	5532DD	PCS	3	U3 U6 U7
UB IA-00TL074CNH-01	IC	TL074 DIP14	PCS	1	U4
UB IA-0MC33079NH	IC	MC33079N	PCS	2	U8 U15
UB IA-0000PC817H	OPTICAL COUPLE	PC817 DIP4 PHOPTOCOUPLER	PCS	4	U9 U10 U11 U13
UB VR-R2B220-UB	VR	220Ω	PCS	1	V1
UB VR-R2B501	VR	500ohm BLUE	PCS	4	VR1 VR2 VR3 VR4
UB VR-R2B203-019	VR	B20K*2 L=15mm	PCS	3	VR3 VR4 VR5
UB BYQ-0410-3700	TRANSFORMER	Φ37 4:10:1	PCS	1	X1
UB PB-50RN-03-03	TERMINAL BLOCK	8P BLACK	PCS	1	
UB 61-BW12-0500	CABLE	HI-LEVEL INPUT 5P L=120MM	PCS	2	
UB PB-00RN-03-10	TERMINAL BLOCK	3P(JSE3A-25PC) BLACK	PCS	1	
UB PW-25SN-ZZZ03-03	TERMINAL BLOCK	3P 2.54MM WHITE	PCS	1	
UB PW-00SN-ZZZ06-01	PLUG	RJ41 6P 180° BLACK	PCS	1	
UB RSG-1001-WT	SILICON TUBE	Φ1.0*10MM WHITE	PCS	62	
UB RSG-2006-WG	SILICON TUBE	Φ2.0*6MM	PCS	16	

SUB PCB

PART NO.	DESCRIPTION	SPEC	UNIT	QTY	LOCATION NO.
UB CML-563J1HOAT-01UB	MEF/CAPACITOR	0.056uF/50V 5% 5mmLS	PCS	8	C1 C3 C5 C7 C15-C18
UB CCL-680J1HOAP	C/CAPACITOR	68P/50V	PCS	4	C11 C12 C13 C14
UB CML-562J1HOAT-UB	MEF/CAPACITOR	0.0056uF/50V5% 5mmLS	PCS	4	C2 C4 C6 C8
UB CML-104J1HOAT-UB	MEF/CAPACITOR	0.1uF/50V5%5mmLS	PCS	4	C9 C10 C19 C20
UB 61-A057-0000	CABLE	GRAY@1*13, 33.5*57MM	PCS	1	J1
UB PCB-1057-16HB-01	PCB	BLUE1.6*57.1*103MM DOUBLE SIDE	PCS	1	MINIPCB
UB RC-751FWA-S1T	RESISTORS	SMT 0805 1% 750Ω	PCS	4	R123 R124 R148 R151
UB RC-682FWA-S1T-01	RESISTORS	SMT 0805 1% 6.81K	PCS	4	R127 R139 R150 R162
UB RC-312FWA-S1T	RESISTORS	SMT 0805 1% 3.16K	PCS	4	R130 R134 R156 R159
UB RN4751JW8-MLT-01	PRECIS./RESISTOR	4.75K 1/8W	PCS	8	R13-R20
UB RN2001JW8-MLT	PRECIS./RESISTOR	2K 1/8W	PCS	16	R1-R4 R7-R10 R21-R26 R31-R32
UB RN1431JW8-MLT	PRECIS./RESISTOR	1.43K 1/8W	PCS	4	R5 R11 R27 R28
UB RN3481JW8-MLT	PRECIS./RESISTOR	3.48K 1/8W	PCS	4	R6 R12 R29 R30
UB SW-PH24X	SWITCH	4P2T	PCS	1	S1
UB SW-PH13X-002	SWITCH	3 BAND	PCS	2	SW1 SW2
UB IA-00TL072CNH-01	IC	TL072	PCS	2	U1 U4
UB IA-00TL074CNH-01	IC	TL074 DIP14	PCS	2	U2 U3
UB VR-R1C503-04-01	VR	C50K 41 BAND, L=15mm	PCS	2	VR1 VR2

LED BOARD

PART NO.	DESCRIPTION	SPEC	UNIT	QTY	LOCATION NO.
UB LD-BOU30-008E-01	LED	BLUE3.2*1.8mm	PCS	4	LEDBOARD
UB PCB-3718-10HB	PCB	37.8*18*1.0mm 94V0	PCS	1	LEDBOARD
UB RSG-3030-BR	HEAT-SHRINK SLEEVE	Φ3*30mmBLACK	PCS	1	LEDBOARD
UB 61-RB25-2200	WIRE	3PIN, 2.5mm W/250mmRED/BLACK/RED1007 22#	PCS	1	LEDBOARD
UB 61-RB36-2200	WIRE	360mm RED/BLACK WIRE 1007 22#	PCS	2	LEDBOARD