


TKR-D710


EXPLODED VIEW

A		: N09-2292-05
B	M2.6 x 6	: N30-2606-48
C	M4 x 6	: N30-4006-48
D	M4 x 14	: N30-4014-48
E	M4 x 20	: N30-4020-43
F	M3 x 6	: N32-3006-48
G	M4 x 8	: N32-4008-43
H	M3 x 6	: N35-3006-43
J	M4 x 6	: N35-4006-43
K	M3 x 8	: N67-3008-48
L	∅2.6 x 8	: N80-2608-43
M	∅3 x 5	: N87-3005-43
N	∅3 x 6	: N87-3006-48

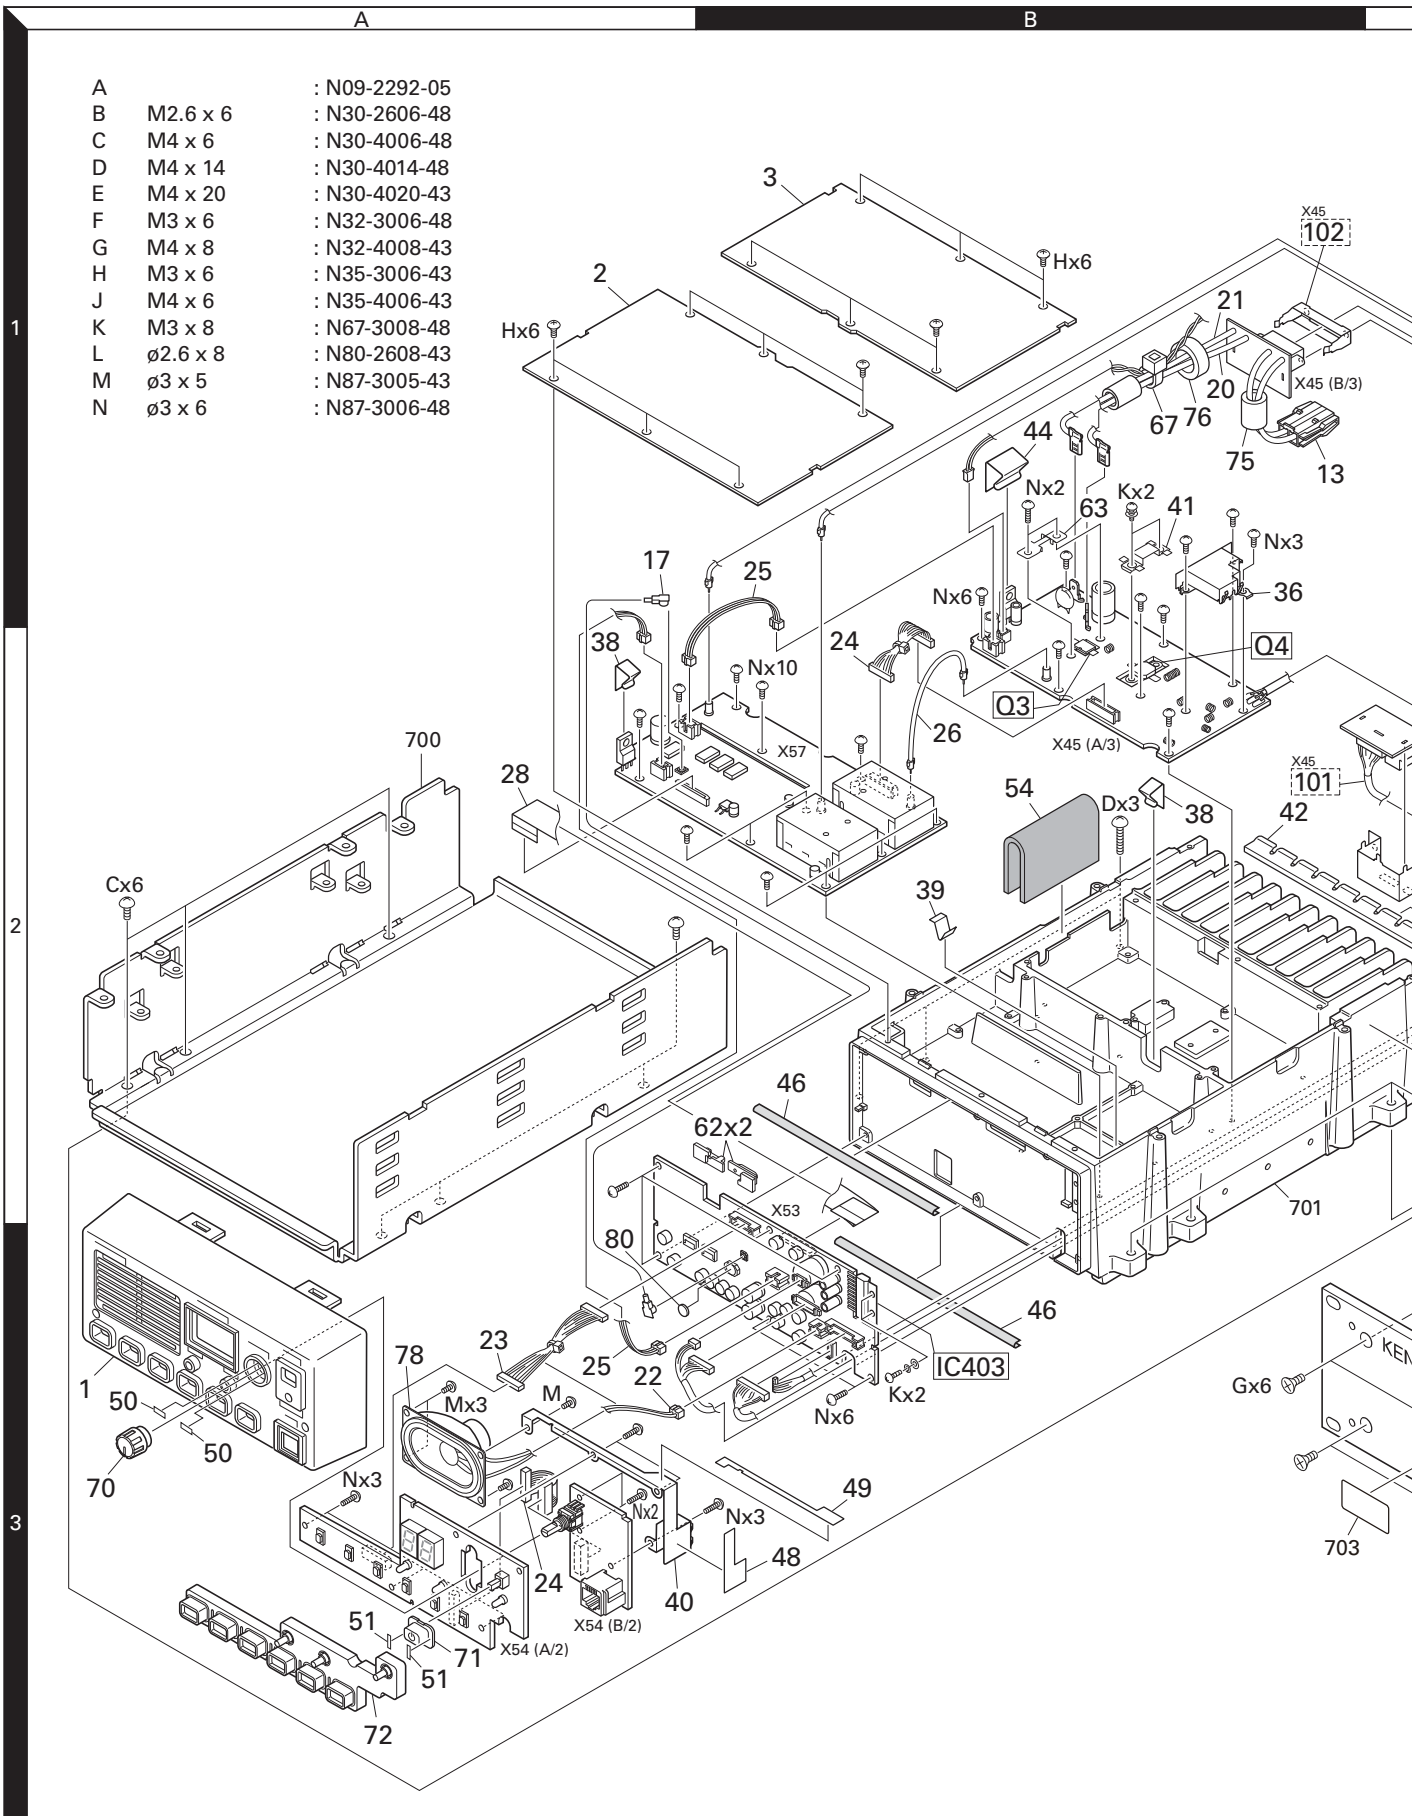

TKR-D710

PACKING

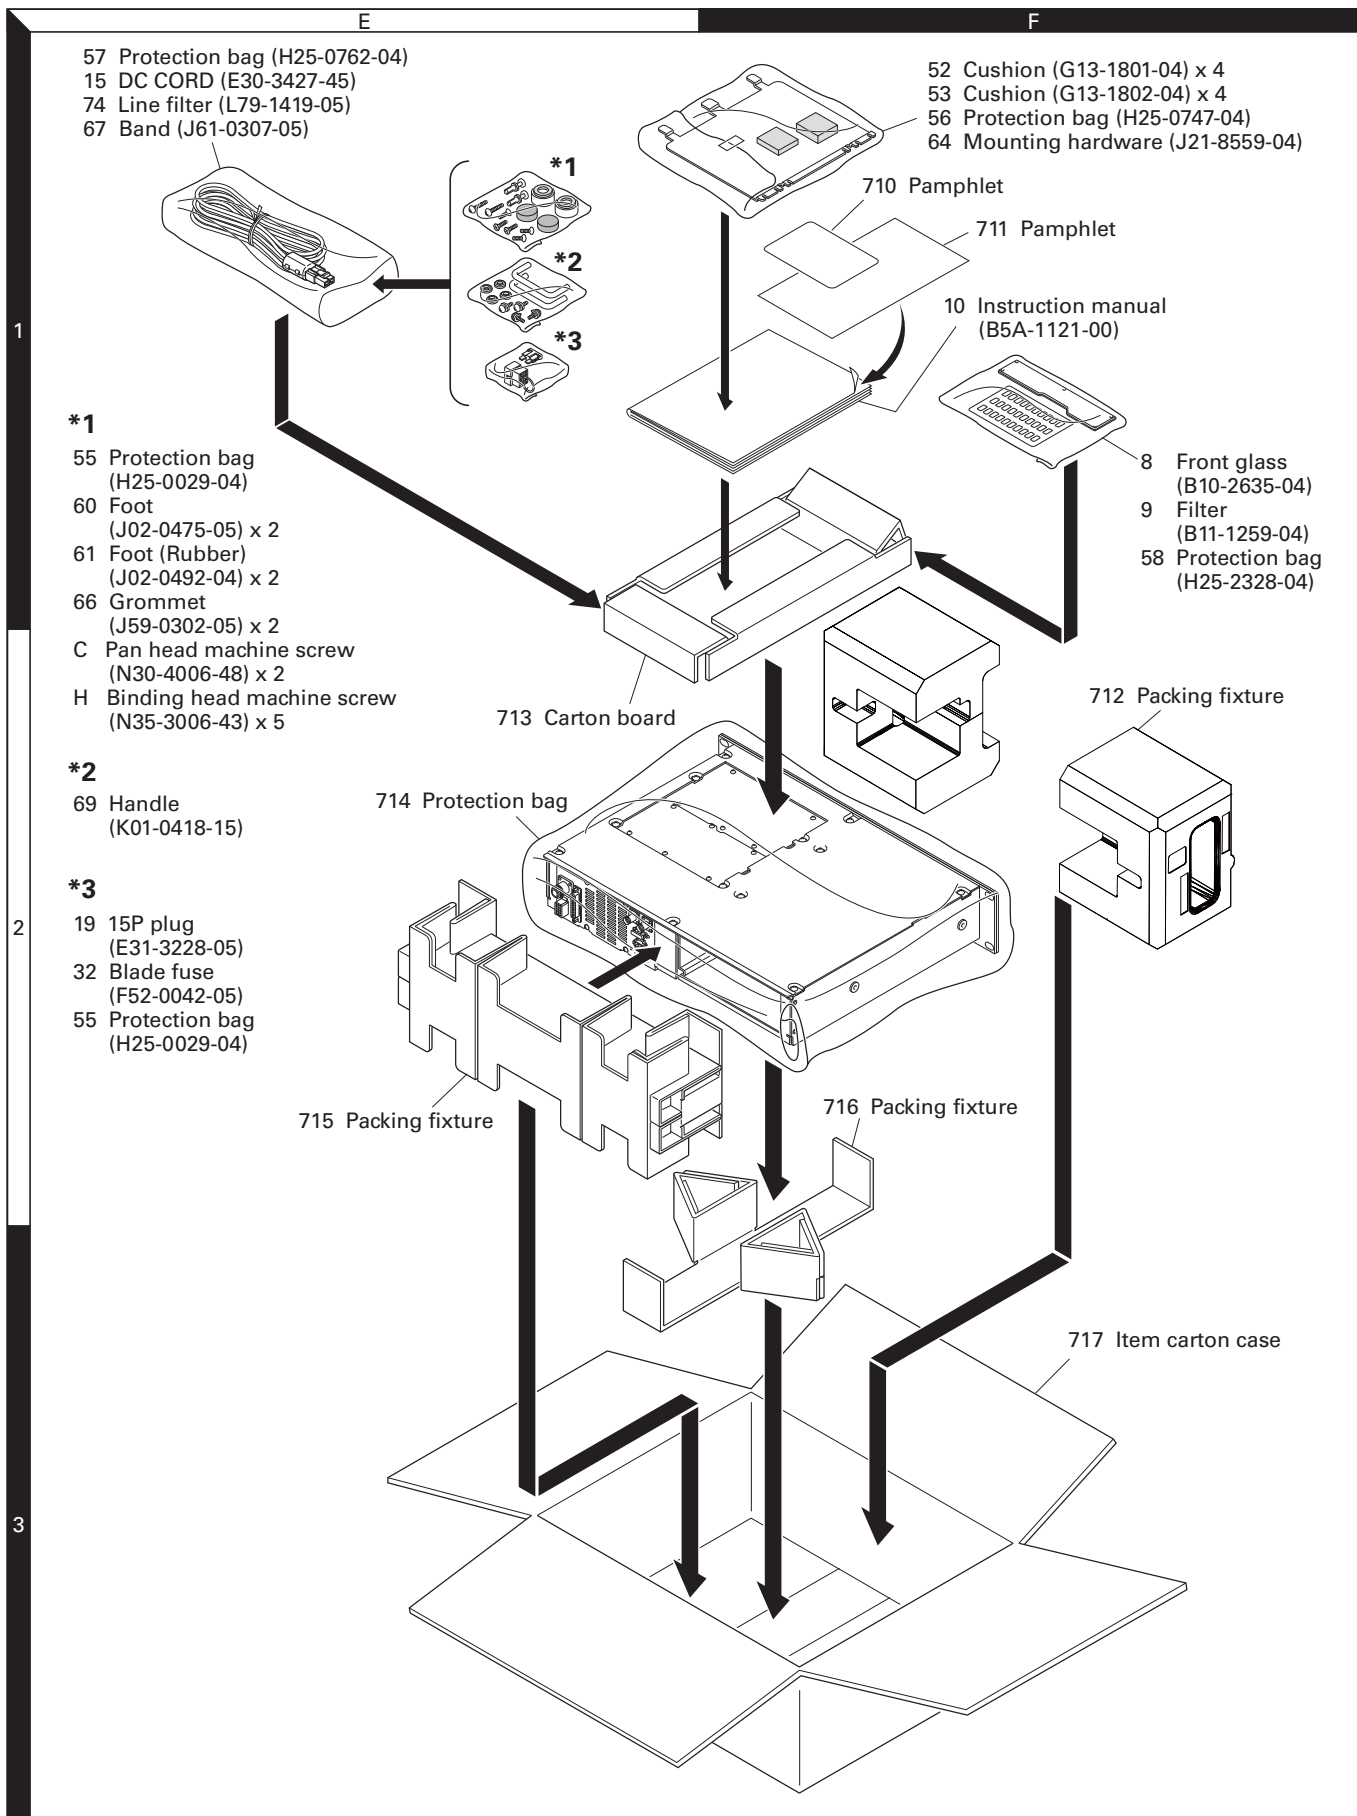

PARTS LIST

△ indicates safety critical components.

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

L : Scandinavia

Y : PX (Far East, Hawaii)

C : China

K : USA

T : England

X : Australia

P : Canada

E : Europe

M : Other Areas

TKR-D710

FINAL UNIT (X45-4010-10)

Ref. No.	Address	Parts No.	Description	Desti- nation	Ref. No.	Address	Parts No.	Description	Desti- nation	
TKR-D710										
1	3A	A62-0933-23	PANEL ASSY(INNER)		64	1F	J21-8559-04	MOUNTING HARDWARE ACCESSORY		
2	1A	A62-1146-04	PANEL (TX-RX)		66	1E	J59-0302-05	GROMMET ACCESSORY		
3	1B	A62-1147-04	PANEL (FINAL)		67	1E	J61-0307-05	BAND		
4	1D	A62-1148-03	PANEL (OUTER)		69	1E	K01-0418-15	HANDLE ACCESSORY		
5	3C	A6C-0002-00	PANEL ASSY		70	3A	K29-5389-03	KNOB (VOLUME)		
6	2C	A82-0077-12	REAR PANEL		72	3A	K29-9370-02	KEY TOP		
8	1F	B10-2635-04	FRONT GLASS ACCESSORY		71	3A	K29-9454-04	KNOB(POWER)		
9	1F	B11-1259-04	FILTER ACCESSORY		74	1E	L79-1419-05	LINE FILTER (ACCESSORY DC CORD)		
10	1F	B5A-1121-00	INSTRUCTION MANUAL		75	1B	L79-1854-05	LINE FILTER (DC CORD,DC+,DC-)		
11	2C,3D	B4A-0601-00	MODEL NAME- PLATE		76	1B	L79-1855-05	LINE FILTER (DC+,DC-)		
13	1B	E30-3414-05	DC CORD(EXT DC IN)		A	2C	N09-2292-05	HEXAGON HEAD SCREW(D-SUB)		
14	1C	E30-3418-25	ANTENNA CABLE (RX IN)		B	1C,2C,2D	N30-2606-48	PAN HEAD MACHINE SCREW (ANT)		
15	1E	E30-3427-45	DC CORD ACCESSORY		C	2A,1E	N30-4006-48	PAN HEAD MACHINE SCREW (CHAS,ACC)		
16	1D	E30-7528-25	ANTENNA CABLE (TX OUT)		D	2B,2C	N30-4014-48	PAN HEAD MACHINE SCREW (CHASSIS)		
17	1A	E30-7689-05	TRUNK CABLE (X57-X53)		E	1C	N30-4020-43	PAN HEAD MACHINE SCREW (FAN)		
18	1C	E30-7690-15	ANTENNA CABLE (REF IN)		F	1C,2C	N32-3006-48	FLAT HEAD MACHINE SCREW (R PANEL)		
19	1E	E31-3228-05	15P PLUG ACCESSORY		G	3B	N32-4008-43	FLAT HEAD MACHINE SCREW (F PANEL)		
20	1B	E37-0902-15	LEAD WIRE WITH TERMINAL (DC+)		H	1A,1B,1E	N35-3006-43	BINDING HEAD MACHINE SCREW (TOP,ACC)		
21	1B	E37-0903-15	LEAD WIRE WITH TERMINAL (DC-)		J	1C	N35-4006-43	BINDING HEAD MACHINE SCREW (TOP)		
22	3A	E37-0905-15	LEAD WIRE WITH CONNECTOR (SP)		K	1B,3B	N67-3008-48	PAN HEAD SEMS SCREW (X53:AUDIO IC)		
23	3A	E37-0906-05	LEAD WIRE WITH CONNECTOR (X53-X54)		L	1C,2C	N80-2608-43	PAN HEAD TAPTITE SCREW (FUSE)		
24	3A,2B	E37-0908-05	LEAD WIRE WITH CONNECTOR (11P)		M	3A	N87-3005-43	BRAZIER HEAD TAPTITE SCREW (SP)		
25	3A,1B	E37-0911-05	LEAD WIRE WITH CONNECTOR (3P)		N	3A,1B,2B	N87-3006-48	BRAZIER HEAD TAPTITE SCREW (PCB)		
26	2B	E37-1638-05	LEAD WIRE WITH MINIPIN PLUG		78	3A	T07-0770-45	SPEAKER		
27	2C	E37-0913-05	LEAD WIRE WITH CONNECTOR (ACC15P)		80	3A	W09-0971-05	LITHIUM CELL		
28	2A	E37-1340-25	FLAT CABLE		-		490-0174-05	ADHESIVE TAPE		
29	2C	E37-1376-05	LEAD WIRE WITH CONNECTOR (DSUB25P)		-		X45-4010-10	FINAL UNIT		
32	1C,1E	F52-0042-05	BLADE FUSE (15A/32V) ACCESSORY		-		X53-4582-71	SERVICE CONTROL UNIT		
33	2C	F09-0445-05	CAP (DSUB)		-		X54-4060-20	DISPLAY UNIT		
34	1C	F09-0471-15	FANMOTOR		-		X57-894K-01	TX-RX UNIT		
36	1B	F10-3129-13	SHIELDING CASE (X45 FINAL PCB)		-		X58-5190-10	RX VCO/PLL UNIT		
38	2A,2B	G02-0576-14	FLAT SPRING		-		X58-5200-10	TX VCO/PLL UNIT		
39	2B	G02-0829-14	FLAT SPRING (RX VCO)		FINAL UNIT (X45-4010-10)					
40	3A	G02-0885-23	EARTH SPRING (X54 DISPLAY PCB)		C4		CK73GBB1H104K	CHIP C	0.1UF	K
41	1B	G02-0894-14	EARTH SPRING (X45:FINAL FET)		C5		CK73GBB1H102K	CHIP C	1000PF	K
42	2B	G02-1831-04	EARTH SPRING (REAR BOTTOM)		C6		CK73GBB1H102K	CHIP C	1000PF	K
43	1C	G02-1832-04	EARTH SPRING (REAR TOP)		C7		CK73GBB1H102K	CHIP C	1000PF	K
44	1B	G02-1855-14	FLAT SPRING(X45-AVR)		C10		CK73GBB1H102K	CHIP C	1000PF	K
46	2B,3B	G10-1263-04	FIBROUS SHEET (CHASSIS)		C12		CC73GCH1H180J	CHIP C	18PF	J
47	3C,2D	G10-1264-04	FIBROUS SHEET (PANEL ASSY)		C14		CK73GBB1H102K	CHIP C	1000PF	K
48	3B	G10-1344-04	FIBROUS SHEET (EARTH SPRING,SHORT)		C16		CK73GBB1H102K	CHIP C	1000PF	K
49	3B	G10-1345-04	FIBROUS SHEET (EARTH SPRING,LONG)		C17		CK73GBB1H102K	CHIP C	1000PF	K
50	1F	G13-1801-04	CUSHION (40X40X5) ACCESSORY		C18		CK73GBB1H102K	CHIP C	1000PF	K
51	1F	G13-1802-04	CUSHION (40X40X10) ACCESSORY		C19		CC73FCH1H120J	CHIP C	12PF	J
52	2B	G13-1886-04	CUSHION(BNC)		C21		CK73GBB1H102K	CHIP C	1000PF	K
54	1E	H25-0029-04	PROTECTION BAG (60/110/0.07)		C23		CK73GBB1H102K	CHIP C	1000PF	K
55	1F	H25-0747-04	PROTECTION BAG (250X350)		C24		CK73FB1H102K	CHIP C	1000PF	K
56	1E	H25-0762-04	PROTECTION BAG (120X300)		C25		CC73FCH1H270J	CHIP C	27PF	J
57	1F	H25-2328-04	PROTECTION BAG (80/250/0.07)		C26		CC73FCH1H470J	CHIP C	47PF	J
58	1F	H5A-0004-00	ITEM CARTON CASE		C27		CC73FCH1H560J	CHIP C	56PF	J
60	1E	J02-0475-15	FOOT ACCESSORY		C28		CK73FB1H102K	CHIP C	1000PF	K
61	1E	J02-0492-04	FOOT (RUBBER) ACCESSORY		C33		C93-0572-05	CHIP C	100PF	J
62	2B	J19-5540-03	HOLDER (TRUNK CABLE)		C34		C93-1744-05	CHIP C	470PF	J
63	1B	J21-8467-14	MOUNTING HARDWARE (X45:DRIVE FET)							

PARTS LIST

FINAL UNIT (X45-4010-10)

Ref. No.	Address	Parts No.	Description	Destination	Ref. No.	Address	Parts No.	Description	Destination
C37		CK73GB1E105K	CHIP C 1.0UF K		C244		CK73GBB1H102K	CHIP C 1000PF K	
C43		CC73GCH1H220J	CHIP C 22PF J		C245		CC73GCH1H220J	CHIP C 22PF J	
C44		CC73GCH1H101J	CHIP C 100PF J		C246		CK73GB1H104K	CHIP C 0.1UF K	
C45		C93-0603-05	CHIP C 1000PF K		C247		CK73GBB1H102K	CHIP C 1000PF K	
C51		C93-0603-05	CHIP C 1000PF K		C248		CK73GBB1H102K	CHIP C 1000PF K	
C52		C93-0868-15	MICA 240PF J		C249		CK73GBB1H102K	CHIP C 1000PF K	
C53		CK73GB1E105K	CHIP C 1.0UF K		C250		CK73GBB1H102K	CHIP C 1000PF K	
C54		C93-1747-05	CHIP C 130PF J		C251		CK73GBB1H102K	CHIP C 1000PF K	
C57		C93-1800-05	CHIP C 82PF J		C252		CK73GBB1H102K	CHIP C 1000PF K	
C60		CK73GBB1H102K	CHIP C 1000PF K		C253		CK73GBB1H102K	CHIP C 1000PF K	
C61		CC73GCH1H220J	CHIP C 22PF J		C301		CK73GB1H471K	CHIP C 470PF K	
C63		C93-1790-05	CHIP C 33PF J		C302		CK73GB1H471K	CHIP C 470PF K	
C65		CC73GCH1H101J	CHIP C 100PF J		CN1		E04-0491-05	PIN SOCKET	
C66		CK73GBB1H102K	CHIP C 1000PF K		CN2		E23-1262-05	TERMINAL	
C68		CM73F2H471J	CHIP C 470PF J		CN3		E23-1262-05	TERMINAL	
C69		CK73GBB1H102K	CHIP C 1000PF K		CN4		E23-1330-05	TERMINAL	
C71		CK73GBB1H102K	CHIP C 1000PF K		CN5		E23-1330-05	TERMINAL	
C75		C93-0603-05	CHIP C 1000PF K		CN201		E23-0462-05	TERMINAL	
C78		CM73F2H471J	CHIP C 470PF J		CN202		E23-0462-05	TERMINAL	
C80		CC73FCH1H270J	CHIP C 27PF J		CN203		E41-2672-05	PIN ASSY	
C82		C93-0563-05	CHIP C 18PF J		CN204		E41-2743-05	PIN ASSY	
C83		C93-0551-05	CHIP C 1.5PF C		CN205		E41-1682-05	PIN ASSY	
C84		C93-0562-05	CHIP C 15PF J		CN301		J13-0071-05	FUSE HOLDER	
C88		C93-1788-05	CHIP C 27PF J		103	2C	J21-8616-14	MOUNTING HARDWARE	
C89		C93-1784-05	CHIP C 18PF J		D1		1SS226-F	DIODE	
C91		C93-1788-05	CHIP C 27PF J		D3		HSM88AS-E	DIODE	
C92		C93-1786-05	CHIP C 22PF J		D4		HSM88AS-E	DIODE	
C94		C93-0564-05	CHIP C 22PF J		D5		L8103R	DIODE	
C97		CK73GBB1H102K	CHIP C 1000PF K		D6		L8103R	DIODE	
C98		C93-0564-05	CHIP C 22PF J		D7		L8103R	DIODE	
C99		CC73FCH1H050C	CHIP C 5.0PF C		D8		L8103R	DIODE	
C201		CK73GBB1H102K	CHIP C 1000PF K		D9		CSA70-401L	SURGE ABSORBER	
C205		CK73GBB1H102K	CHIP C 1000PF K		D10		MA2S111-F	DIODE	
C206		CK73GB1H104K	CHIP C 0.1UF K		D201		02DZ6.2F-Y	ZENER DIODE	
C207		CK73GBB1H102K	CHIP C 1000PF K		D202		22ZR-10D	SURGE ABSORBER	
C210		CK73GBB1H102K	CHIP C 1000PF K		D203		1SS355	DIODE	
C216		CK73GBB1H102K	CHIP C 1000PF K		D301		DSA3A1	DIODE	
C218		CK73GB1H104K	CHIP C 0.1UF K		IC201		TA75W01FUF	BIPOLAR IC	
C219		CK73GBB1H102K	CHIP C 1000PF K		IC202		TA75W01FUF	BIPOLAR IC	
C220		CD04AZ1V100M	ELECTRO 10UF 35VV		IC203		NJM78M08FA-ZB	ANALOGUE IC	
C221		CK73GBB1H102K	CHIP C 1000PF K		J401		E58-0533-05	MODULAR JACK	
C222		CK73GBB1H102K	CHIP C 1000PF K		J402		E58-0533-05	MODULAR JACK	
C223		CD04AZ1V102M	ELECTRO 1000UF 35VV		101	2C	E37-1473-05	LEAD WIRE WITH CONNECTOR (X45-X53)	
C224		CK73GBB1H102K	CHIP C 1000PF K		F1		F53-0392-05	FUSE (3A)	
C225		CK73GB1H104K	CHIP C 0.1UF K		102	2B	G02-1856-14	EARTH SPRING	
C229		CK73GBB1H102K	CHIP C 1000PF K		L3		L41-5678-14	SMALL FIXED INDUCTOR(56NH)	
C230		CK73GBB1H102K	CHIP C 1000PF K		L4		L41-6878-14	SMALL FIXED INDUCTOR(68NH)	
C231		CK73GBB1H102K	CHIP C 1000PF K		L5		L41-2778-14	SMALL FIXED INDUCTOR(27NH)	
C232		CK73GBB1H102K	CHIP C 1000PF K		L6		L41-1278-14	SMALL FIXED INDUCTOR(12NH)	
C233		CK73GBB1H102K	CHIP C 1000PF K		L7		L41-1878-14	SMALL FIXED INDUCTOR(18NH)	
C234		CK73GBB1H102K	CHIP C 1000PF K		L8		LB73Z0AF-001	CHIP FERRITE BEADS	
C235		CK73GBB1H102K	CHIP C 1000PF K		L9		L34-4520-05	AIR-CORE COIL	
C236		CK73GBB1H102K	CHIP C 1000PF K		L10		L34-4560-05	AIR-CORE COIL	
C237		CK73GBB1H102K	CHIP C 1000PF K		L11		L34-4557-05	AIR-CORE COIL	
C238		CK73GBB1H102K	CHIP C 1000PF K		L12		L41-2785-14	SMALL FIXED INDUCTOR(270NH)	
C239		CD04BQ1H101M	ELECTRO 100UF 50VV		L13		L41-2785-14	SMALL FIXED INDUCTOR(270NH)	
C240		CC73GCH1H220J	CHIP C 22PF J		L14		L34-4667-05	AIR-CORE COIL	
C241		CK73GBB1H102K	CHIP C 1000PF K		L15		L34-4744-05	AIR-CORE COIL	
C242		CK73GBB1H102K	CHIP C 1000PF K		L16		L34-4520-05	AIR-CORE COIL	
C243		CK73GBB1H102K	CHIP C 1000PF K		L17		L34-4520-05	AIR-CORE COIL	

PARTS LIST

CONTROL UNIT (X53-4580-10)

Ref. No.	Address	Parts No.	Description	Destination	Ref. No.	Address	Parts No.	Description	Destination
C45		CK73HBB1A104K	CHIP C 0.1UF K		C112		CK73HBB1A104K	CHIP C 0.1UF K	
C46		CK73HB1A105K	CHIP C 1.0UF K		C114		CC73HCH1H101J	CHIP C 100PF J	
C47		CK73HBB1H102K	CHIP C 1000PF K		C115		CK73HBB1A104K	CHIP C 0.1UF K	
C49		CK73HB1A105K	CHIP C 1.0UF K		C116		CK73HBB1A104K	CHIP C 0.1UF K	
C50		CK73HBB1A104K	CHIP C 0.1UF K		C117		CK73HBB1A104K	CHIP C 0.1UF K	
C51		CK73HB1A105K	CHIP C 1.0UF K		C118		CK73HBB1A104K	CHIP C 0.1UF K	
C52		CC73HCH1H270J	CHIP C 27PF J		C119		CK73HBB1A104K	CHIP C 0.1UF K	
C56		CK73HBB1A104K	CHIP C 0.1UF K		C120		CK73HB1A105K	CHIP C 1.0UF K	
C57		CK73HBB1A104K	CHIP C 0.1UF K		C121		CK73HBB1H102K	CHIP C 1000PF K	
C58		CK73HBB1H681K	CHIP C 680PF K		C122		CK73HBB1A104K	CHIP C 0.1UF K	
C60		CK73HBB1H102K	CHIP C 1000PF K		C123		CK73HBB1A104K	CHIP C 0.1UF K	
C61		CK73HBB1H102K	CHIP C 1000PF K		C124		CK73HBB1A104K	CHIP C 0.1UF K	
C62		CK73FB0J106K	CHIP C 10UF K		C125		CK73HBB1A104K	CHIP C 0.1UF K	
C63		CK73FB0J106K	CHIP C 10UF K		C126		CK73HBB1A104K	CHIP C 0.1UF K	
C64		CK73HB1A105K	CHIP C 1.0UF K		C127		CK73HBB1E103K	CHIP C 0.01UF K	
C65		CK73HBB1H102K	CHIP C 1000PF K		C128		CK73HB1A105K	CHIP C 1.0UF K	
C66		CK73HBB1E103K	CHIP C 0.01UF K		C129		CK73HBB1H102K	CHIP C 1000PF K	
C67		CK73HBB1A104K	CHIP C 0.1UF K		C130		CK73HBB1A104K	CHIP C 0.1UF K	
C68		CK73HBB1E103K	CHIP C 0.01UF K		C131		CK73HBB1A104K	CHIP C 0.1UF K	
C69		CK73HBB1H102K	CHIP C 1000PF K		C132		CK73HBB1E103K	CHIP C 0.01UF K	
C70		CK73HB1A224K	CHIP C 0.22UF K		C133		CK73HBB1H102K	CHIP C 1000PF K	
C72		CK73HB1A224K	CHIP C 0.22UF K		C134		CK73HBB1E103K	CHIP C 0.01UF K	
C73		CC73HCH1H470J	CHIP C 47PF J		C135		CK73HBB1H102K	CHIP C 1000PF K	
C74		CC73HCH1H101J	CHIP C 100PF J		C136		CK73HBB1H102K	CHIP C 1000PF K	
C75		CK73GBB1C104K	CHIP C 0.1UF K		C137		CK73HBB1E103K	CHIP C 0.01UF K	
C76		CC73HCH1H470J	CHIP C 47PF J		C138		CC73HCH1H101J	CHIP C 100PF J	
C77		CK73HBB1A104K	CHIP C 0.1UF K		C139		CK73HBB1E103K	CHIP C 0.01UF K	
C79		CK73HBB1E103K	CHIP C 0.01UF K		C140		CK73GBB1C104K	CHIP C 0.1UF K	
C80		CK73HBB1E103K	CHIP C 0.01UF K		C141		CK73HBB1H102K	CHIP C 1000PF K	
C81		CK73HBB1H102K	CHIP C 1000PF K		C142		CK73HBB1H102K	CHIP C 1000PF K	
C82		CC73HCH1H101J	CHIP C 100PF J		C143		CK73HBB1E103K	CHIP C 0.01UF K	
C83		CC73HCH1H101J	CHIP C 100PF J		C144		CK73HBB1H102K	CHIP C 1000PF K	
C84		CK73HB1H682K	CHIP C 6800PF K		C145		CK73HBB1H102K	CHIP C 1000PF K	
C85		CK73HB1H682K	CHIP C 6800PF K		C146		CK73HBB1H102K	CHIP C 1000PF K	
C86		CK73HB1H682K	CHIP C 6800PF K		C147		CK73HBB1E103K	CHIP C 0.01UF K	
C87		CK73HBB1H102K	CHIP C 1000PF K		C148		CK73HB1H122K	CHIP C 1200PF K	
C88		CK73GBB1C104K	CHIP C 0.1UF K		C149		CK73HBB1H102K	CHIP C 1000PF K	
C89		CK73HBB1H102K	CHIP C 1000PF K		C150		CK73HBB1E103K	CHIP C 0.01UF K	
C90		CK73GBB1C104K	CHIP C 0.1UF K		C151		CK73HBB1H102K	CHIP C 1000PF K	
C91		CK73HBB1A104K	CHIP C 0.1UF K		C152		CK73HBB1H102K	CHIP C 1000PF K	
C92		CK73HBB1E103K	CHIP C 0.01UF K		C153		CK73HBB1H102K	CHIP C 1000PF K	
C93		CS77MP0J100M	CHIP TNTL 10UF 6.3WV		C154		CC73HCH1H101J	CHIP C 100PF J	
C94		CK73HBB1A104K	CHIP C 0.1UF K		C155		CK73HBB1H102K	CHIP C 1000PF K	
C95		CC73HCH1H020C	CHIP C 2.0PF C		C156		CC73HCH1H221J	CHIP C 220PF J	
C96		CC73HCH1H020C	CHIP C 2.0PF C		C157		CC73HCH1H101J	CHIP C 100PF J	
C97		CK73HBB1H102K	CHIP C 1000PF K		C158		CK73HBB1A104K	CHIP C 0.1UF K	
C98		CK73HBB1A104K	CHIP C 0.1UF K		C159		CK73HBB1E103K	CHIP C 0.01UF K	
C99		CK73HBB1A104K	CHIP C 0.1UF K		C160		CC73HCH1H101J	CHIP C 100PF J	
C100		CK73GB1E104K	CHIP C 0.10UF K		C161		CK73HBB1H102K	CHIP C 1000PF K	
C101		CK73HBB1E103K	CHIP C 0.01UF K		C162		CC73HCH1H101J	CHIP C 100PF J	
C102		CK73HB1A105K	CHIP C 1.0UF K		C164		CK73HBB1H102K	CHIP C 1000PF K	
C103		CK73HBB1H102K	CHIP C 1000PF K		C166		CK73HBB1E103K	CHIP C 0.01UF K	
C104		CK73GBB1C104K	CHIP C 0.1UF K		C167		CC73HCH1H101J	CHIP C 100PF J	
C105		CK73GB1E104K	CHIP C 0.10UF K		C170		CK73HBB1H102K	CHIP C 1000PF K	
C106		CK73GB1E104K	CHIP C 0.10UF K		C171		CK73HBB1H102K	CHIP C 1000PF K	
C107		CK73GBB1C104K	CHIP C 0.1UF K		C175		CK73HBB1H102K	CHIP C 1000PF K	
C108		CC73HCH1H020C	CHIP C 2.0PF C		C176		CK73HBB1H102K	CHIP C 1000PF K	
C109		CS77MP0J100M	CHIP TNTL 10UF 6.3WV		C179		CK73HBB1H102K	CHIP C 1000PF K	
C110		CC73HCH1H101J	CHIP C 100PF J		C180		CK73HBB1H102K	CHIP C 1000PF K	
C111		CC73HCH1H101J	CHIP C 100PF J		C182		CK73HBB1H102K	CHIP C 1000PF K	

PARTS LIST

CONTROL UNIT (X53-4580-10)

Ref. No.	Address	Parts No.	Description	Desti- nation	Ref. No.	Address	Parts No.	Description	Desti- nation
C184		CK73HBB1H102K	CHIP C 1000PF K		C256		CC73HCH1H101J	CHIP C 100PF J	
C185		CK73HBB1H102K	CHIP C 1000PF K		C257		CK73HBB1H102K	CHIP C 1000PF K	
C186		CC73HCH1H101J	CHIP C 100PF J		C258		CC73HCH1H101J	CHIP C 100PF J	
C187		CK73HBB1H102K	CHIP C 1000PF K		C259		CK73HBB1A104K	CHIP C 0.1UF K	
C188		CC73HCH1H101J	CHIP C 100PF J		C260		CK73HBB1A104K	CHIP C 0.1UF K	
C189		CK73HBB1H102K	CHIP C 1000PF K		C301		C92-0905-05	OS-CON 47UF 35WV	
C190		CC73HCH1H101J	CHIP C 100PF J		C302		C92-0905-05	OS-CON 47UF 35WV	
C191		CK73HBB1H102K	CHIP C 1000PF K		C303		C93-1810-05	CHIP C 4.7UF K	
C192		CK73HBB1E103K	CHIP C 0.01UF K		C304		C93-1810-05	CHIP C 4.7UF K	
C193		CC73HCH1H101J	CHIP C 100PF J		C306		CK73HBB1H471K	CHIP C 470PF K	
C194		CK73HBB1H102K	CHIP C 1000PF K		C308		CK73EBB1H474K	CHIP C 0.47UF K	
C195		CK73HBB1H102K	CHIP C 1000PF K		C310		CE32AU1C330M	CHIP EL 33UF 16WV	
C196		CK73HBB1H102K	CHIP C 1000PF K		C311		CE32AU1C330M	CHIP EL 33UF 16WV	
C197		CK73HBB1H102K	CHIP C 1000PF K		C312		CE32BM1E470M	CHIP EL 47UF 25WV	
C198		CC73HCH1H101J	CHIP C 100PF J		C313		CK73HBB1E223K	CHIP C 0.022UF K	
C199		CK73HBB1E103K	CHIP C 0.01UF K		C314		CK73HBB1H102K	CHIP C 1000PF K	
C200		CC73HCH1H101J	CHIP C 100PF J		C315		CE32BM1E470M	CHIP EL 47UF 25WV	
C201		CK73HBB1H102K	CHIP C 1000PF K		C316		CE32BM1E470M	CHIP EL 47UF 25WV	
C202		CC73HCH1H101J	CHIP C 100PF J		C317		CE32BM1E470M	CHIP EL 47UF 25WV	
C203		CK73HBB1H102K	CHIP C 1000PF K		C318		CK73HBB1H102K	CHIP C 1000PF K	
C205		CK73HBB1H102K	CHIP C 1000PF K		C319		CK73HBB1H102K	CHIP C 1000PF K	
C206		CC73HCH1H101J	CHIP C 100PF J		C320		CK73HBB1H102K	CHIP C 1000PF K	
C207		CK73HBB1E103K	CHIP C 0.01UF K		C321		CK73HBB1H102K	CHIP C 1000PF K	
C209		CK73HBB1H102K	CHIP C 1000PF K		C322		CE32BM1E470M	CHIP EL 47UF 25WV	
C210		CK73HBB1H102K	CHIP C 1000PF K		C323		CK73HBB1H102K	CHIP C 1000PF K	
C211		CK73HBB1H102K	CHIP C 1000PF K		C324		CE32BM1E470M	CHIP EL 47UF 25WV	
C212		CK73HBB1H102K	CHIP C 1000PF K		C325		CK73HBB1H102K	CHIP C 1000PF K	
C213		CK73HBB1E103K	CHIP C 0.01UF K		C326		CK73HBB1H102K	CHIP C 1000PF K	
C215		CK73HBB1H102K	CHIP C 1000PF K		C327		CE32BM1E470M	CHIP EL 47UF 25WV	
C216		CK73HBB1H102K	CHIP C 1000PF K		C328		CE32BM1E470M	CHIP EL 47UF 25WV	
C218		CC73HCH1H101J	CHIP C 100PF J		C329		CE32BM1E470M	CHIP EL 47UF 25WV	
C219		CK73HBB1H102K	CHIP C 1000PF K		C330		CK73HBB1H102K	CHIP C 1000PF K	
C220		CK73HBB1H102K	CHIP C 1000PF K		C331		CK73HBB1H102K	CHIP C 1000PF K	
C221		CK73HBB1H102K	CHIP C 1000PF K		C332		CE32BM1E470M	CHIP EL 47UF 25WV	
C222		CK73HBB1H102K	CHIP C 1000PF K		C333		CK73HBB1A104K	CHIP C 0.1UF K	
C223		CK73HBB1H102K	CHIP C 1000PF K		C334		CK73HBB1E103K	CHIP C 0.01UF K	
C224		CC73HCH1H101J	CHIP C 100PF J		C335		CK73HBB1H471K	CHIP C 470PF K	
C225		CK73HBB1H102K	CHIP C 1000PF K		C336		CK73HBB1E103K	CHIP C 0.01UF K	
C226		CC73HCH1H101J	CHIP C 100PF J		C337		CK73HBB1H102K	CHIP C 1000PF K	
C227		CC73HCH1H101J	CHIP C 100PF J		C401		CK73HBB1E103K	CHIP C 0.01UF K	
C228		CK73HBB1H102K	CHIP C 1000PF K		C402		CC73HCH1H101J	CHIP C 100PF J	
C229		CK73HBB1H102K	CHIP C 1000PF K		C403		CK73HB1A105K	CHIP C 1.0UF K	
C230		CC73HCH1H101J	CHIP C 100PF J		C404		C90-4120-05	ELECTRO 470UF 35WV	
C232		CC73HCH1H101J	CHIP C 100PF J		C405		CK73HBB1A104K	CHIP C 0.1UF K	
C233		CC73HCH1H101J	CHIP C 100PF J		C406		CK73HB1A105K	CHIP C 1.0UF K	
C235		CK73HBB1E103K	CHIP C 0.01UF K		C407		CK73HB1A105K	CHIP C 1.0UF K	
C237		CC73HCH1H101J	CHIP C 100PF J		C408		C93-1824-05	CHIP C 100UF M	
C239		CC73HCH1H101J	CHIP C 100PF J		C409		C93-1824-05	CHIP C 100UF M	
C240		CK73HBB1H102K	CHIP C 1000PF K		C410		CK73HB1A105K	CHIP C 1.0UF K	
C241		CK73HBB1H102K	CHIP C 1000PF K		C412		CK73FB0J106K	CHIP C 10UF K	
C242		CK73HBB1H102K	CHIP C 1000PF K		C413		CK73HBB1H102K	CHIP C 1000PF K	
C243		CC73HCH1H101J	CHIP C 100PF J		C414		CK73HB1A105K	CHIP C 1.0UF K	
C244		CK73HBB1H102K	CHIP C 1000PF K		C415		CD04AY1E470M	ELECTRO 47UF 25WV	
C245		CC73HCH1H101J	CHIP C 100PF J		C416		CK73HBB1H102K	CHIP C 1000PF K	
C246		CC73HCH1H101J	CHIP C 100PF J		C417		CK73HBB1H222K	CHIP C 0.022UF K	
C247		CK73HBB1H102K	CHIP C 1000PF K		C418		CC73HCH1H391J	CHIP C 390PF J	
C249		CK73HBB1H102K	CHIP C 1000PF K		C419		CK73HBB1H152K	CHIP C 1500PF K	
C250		CC73HCH1H101J	CHIP C 100PF J		C420		CC73HCH1H221J	CHIP C 220PF J	
C252		CK73HBB1H102K	CHIP C 1000PF K		C421		CK73FB0J106K	CHIP C 10UF K	
C254		CC73HCH1H101J	CHIP C 100PF J		C422		CD04AY1E470M	ELECTRO 47UF 25WV	

PARTS LIST

CONTROL UNIT (X53-4580-10)

Ref. No.	Address	Parts No.	Description	Desti- nation	Ref. No.	Address	Parts No.	Description	Desti- nation
C423		CK73HBB1H471K	CHIP C 470PF K		CP8		RK74HB1J334J	CHIP-COM 330K J 1/16W	
C424		CC73HCH1H331J	CHIP C 330PF J		D1		KDR731	DIODE	
C425		CD04AY1E470M	ELECTRO 47UF 25WV		D2		MA2S111-F	DIODE	
C426		CK73HBB1A104K	CHIP C 0.1UF K		D3		1SS388F	DIODE	
C427		CK73HBB1H471K	CHIP C 470PF K		D4		DA204U	MULTIPLE DIODE	
C428		CK73HB1A105K	CHIP C 1.0UF K		D5		DA204U	MULTIPLE DIODE	
C429		CK73HBB1A104K	CHIP C 0.1UF K		D6		DA204U	MULTIPLE DIODE	
C430		CD04CK1E102M	ELECTRO 1000UF M		D7		DA204U	MULTIPLE DIODE	
C432		CK73HBB1A104K	CHIP C 0.1UF K		D8		DA204U	MULTIPLE DIODE	
C433		CC73HCH1H181J	CHIP C 180PF J		D9		DA204U	MULTIPLE DIODE	
C434		CC73HCH1H101J	CHIP C 100PF J		D10		DA204U	MULTIPLE DIODE	
C435		CC73HCH1H101J	CHIP C 100PF J		D11		DA204U	MULTIPLE DIODE	
C436		CC73HCH1H221J	CHIP C 220PF J		D12		1SS355	DIODE	
C438		C93-1824-05	CHIP C 100UF M		D13		DZ2J180(M)	ZENER DIODE	
C441		C93-1824-05	CHIP C 100UF M		D14		DA204U	MULTIPLE DIODE	
C442		CK73HB1A105K	CHIP C 1.0UF K		D15		DA204U	MULTIPLE DIODE	
C443		CK73HBB1A104K	CHIP C 0.1UF K		D16		DA204U	MULTIPLE DIODE	
C445		CK73HB1A105K	CHIP C 1.0UF K		D18		DA204U	MULTIPLE DIODE	
C446		CK73HBB1A104K	CHIP C 0.1UF K		D20		DA204U	MULTIPLE DIODE	
C450		CK73HB1A105K	CHIP C 1.0UF K		D22		DA204U	MULTIPLE DIODE	
C451		CK73HB1A105K	CHIP C 1.0UF K		D23		1SS355	DIODE	
C455		CC73HCH1H101J	CHIP C 100PF J		D24		DZ2J180(M)	ZENER DIODE	
C456		CC73HCH1H221J	CHIP C 220PF J		D26		DA204U	MULTIPLE DIODE	
C457		CK73HB1A105K	CHIP C 1.0UF K		D28		DA204U	MULTIPLE DIODE	
C459		CC73HCH1H221J	CHIP C 220PF J		D29		1SS355	DIODE	
C460		CK73HBB1A104K	CHIP C 0.1UF K		D30		DZ2J180(M)	ZENER DIODE	
C461		CK73HBB1A104K	CHIP C 0.1UF K		D31		1SS355	DIODE	
C462		CK73HBB1A104K	CHIP C 0.1UF K		D32		DZ2J180(M)	ZENER DIODE	
C463		CC73HCH1H331J	CHIP C 330PF J		D35		1SS355	DIODE	
C464		CC73HCH1H101J	CHIP C 100PF J		D36		DZ2J180(M)	ZENER DIODE	
C465		CK73HBB1H152K	CHIP C 1500PF K		D37		SMD185F-2	VARISTOR	
C466		CK73HB1A105K	CHIP C 1.0UF K		D301		SMAB33L-P	DIODE	
C469		CK73HB1A105K	CHIP C 1.0UF K		D302		1SS388F	DIODE	
C470		CK73HBB1H102K	CHIP C 1000PF K		D303		DZ2J180(M)	ZENER DIODE	
C471		CK73HBB1H102K	CHIP C 1000PF K		D304		1SS388F	DIODE	
C472		CK73HBB1E103K	CHIP C 0.01UF K		D305		1SS388F	DIODE	
C473		CK73HBB1E103K	CHIP C 0.01UF K		D401		1SS388F	DIODE	
C474		CK73HBB1H102K	CHIP C 1000PF K		IC3		E29PLO32A70TI	ROM IC	
C610		CK73GB1E104K	CHIP C 0.10UF K		IC4		ISL8485EIBZ	MOS-IC	
C611		CK73GB1E104K	CHIP C 0.10UF K		IC5		ISL8485EIBZ	MOS-IC	
C612		CK73HB1H103K	CHIP C 10000PF K		IC6		Note 1 (BGA)	MICROPROCESSOR IC	
C613		CK73GB1E105K	CHIP C 1.0UF K		IC7		TC7WT125FUF	MOS-IC	
C614		CK73HBB1H102K	CHIP C 1000PF K		IC8		TC7WT125FUF	MOS-IC	
CN5		E41-1481-05	PIN ASSY		IC9		Note 1 (BGA)	SRAM IC	
CN38		E40-6656-05	PIN ASSY		IC10		TC7SH125FU-F	MOS-IC	
CN39		E04-0193-05	PIN SOCKET		IC11		TC7SH125FU-F	MOS-IC	
CN40		E40-6102-05	PIN ASSY		IC12		TC7SH08FU-F	MOS-IC	
CN41		E41-3086-05	PIN ASSY		IC13		TC75W51FK(F)	MOS-IC	
CN42		E41-3090-05	PIN ASSY		IC14		AK4386VTP	MOS-IC	
CN43		E41-2671-05	PIN ASSY		IC15		TC75W51FK(F)	MOS-IC	
CN44		E40-5960-05	PIN ASSY		IC16		SM5023CNDH-G	MOS-IC	
CN301		E41-2672-05	PIN ASSY		IC17		R2023T	MOS-IC	
CN302		J19-5386-05	HOLDER		IC18		TC74VHCT244AFK	MOS-IC	
CP1		RK74HB1J334J	CHIP-COM 330K J 1/16W		IC19		TC7MBD3245AFK	MOS-IC	
CP2		RK74HB1J334J	CHIP-COM 330K J 1/16W		IC20		Note 1 (BGA)	MOS-IC	
CP3		RK74HB1J334J	CHIP-COM 330K J 1/16W		IC21		ADM202EARUZ	MOS-IC	
CP4		RK74HB1J334J	CHIP-COM 330K J 1/16W		IC22		MCP23017TE/ML	MOS-IC	
CP5		RK74HB1J334J	CHIP-COM 330K J 1/16W		IC23		TC7WT125FUF	MOS-IC	
CP6		RK74HB1J334J	CHIP-COM 330K J 1/16W		IC24		TC7SH08FU-F	MOS-IC	
CP7		RK74HB1J334J	CHIP-COM 330K J 1/16W		IC25		TC7SH32FU-F	MOS-IC	

PARTS LIST

CONTROL UNIT (X53-4580-10)

Ref. No.	Address	Parts No.	Description	Desti- nation	Ref. No.	Address	Parts No.	Description	Desti- nation
IC26		TC7SET08FU-F	MOS-IC		Q10		2SD2114K(W)	TRANSISTOR	
IC27		TC75W51FK(F)	MOS-IC		Q301		LTC044EEBFS8	DIGITAL TRANSISTOR	
IC28		TC75S51FE(F)	MOS-IC		Q302		SSM3K15TE(F)	FET	
IC301		LT3685EMSE	ANALOGUE IC		Q303		2SA1955A-F	TRANSISTOR	
IC302		XC6201P502P-G	MOS-IC		Q401		RT1N141M-T111	TRANSISTOR	
IC303		NJM2830U133ZB	ANALOGUE IC		Q402		2SJ506-E(S)	FET	
IC304		XC6205B152P-G	MOS-IC		Q403		LTC044EUBFS8	DIGITAL TRANSISTOR	
IC305		XC6205B162P-G	MOS-IC		Q404		RT1N141M-T111	TRANSISTOR	
IC306		XC6204B332P-G	MOS-IC		Q405		KRC401-P	DIGITAL TRANSISTOR	
IC307		XC61CN2702N-G	MOS-IC		Q602		RT1N141M-T111	TRANSISTOR	
IC308		XC6109C29AN-G	MOS-IC		R3		RK73HB1J104J	CHIP R 100K J 1/16W	
IC401		TC7SH00FU-F	MOS-IC		R4		RK73HB1J104J	CHIP R 100K J 1/16W	
IC403	3B	LA4422-E	BI-POLAR IC		R5		RK73HB1J104J	CHIP R 100K J 1/16W	
IC404		NJM2732V	BIPOLAR IC		R6		RK73HB1J104J	CHIP R 100K J 1/16W	
IC405		NJM2734V	BI-POLAR IC		R7		RK73HB1J104J	CHIP R 100K J 1/16W	
IC406		NJM2732V	BIPOLAR IC		R8		RK73HB1J104J	CHIP R 100K J 1/16W	
IC407		TC7W53FKF	MOS-IC		R9		RK73HB1J104J	CHIP R 100K J 1/16W	
IC411		NJM2734V	BI-POLAR IC		R10		RK73EB2E101J	CHIP R 100 J 1/4W	
IC412		M62364FP-F	MOS-IC		R11		RK73EB2E101J	CHIP R 100 J 1/4W	
L1		LB73G0AK-001	CHIP FERRITE BEADS		R12		RK73EB2E101J	CHIP R 100 J 1/4W	
L2		L33-1500-05	CHOKO COIL		R13		RK73EB2E101J	CHIP R 100 J 1/4W	
L3		L33-1500-05	CHOKO COIL		R14		RK73HB1J000J	CHIP R 0.0 J 1/16W	
L4		LB73G0AK-001	CHIP FERRITE BEADS		R15		RK73HB1J104J	CHIP R 100K J 1/16W	
L5		LB73H0AV-002	CHIP FERRITE BEADS		R18		RK73HB1J104J	CHIP R 100K J 1/16W	
L6		LB73H0AV-002	CHIP FERRITE BEADS		R22		RK73HB1J104J	CHIP R 100K J 1/16W	
L7		LB73H0AV-002	CHIP FERRITE BEADS		R23		RK73HB1J104J	CHIP R 100K J 1/16W	
L8		LB73G0AM-004	CHIP FERRITE BEADS		R24		RK73HB1J000J	CHIP R 0.0 J 1/16W	
L9		LB73G0AK-001	CHIP FERRITE BEADS		R25		RK73HB1J103J	CHIP R 10K J 1/16W	
L10		LB73G0AK-001	CHIP FERRITE BEADS		R26		RK73HB1J103J	CHIP R 10K J 1/16W	
L11		LB73G0AK-001	CHIP FERRITE BEADS		R27		RK73HB1J473J	CHIP R 47K J 1/16W	
L14		LB73G0AK-001	CHIP FERRITE BEADS		R28		RK73HB1J473J	CHIP R 47K J 1/16W	
L15		LB73G0AK-001	CHIP FERRITE BEADS		R29		RK73HB1J000J	CHIP R 0.0 J 1/16W	
L16		LB73G0AK-001	CHIP FERRITE BEADS		R30		RK73HB1J474J	CHIP R 470K J 1/16W	
L17		LB73G0AM-004	CHIP FERRITE BEADS		R32		RK73HB1J472J	CHIP R 4.7K J 1/16W	
L18		LB73H0AV-002	CHIP FERRITE BEADS		R33		RK73HB1J472J	CHIP R 4.7K J 1/16W	
L20		LB73H0AV-002	CHIP FERRITE BEADS		R34		RK73HB1J104J	CHIP R 100K J 1/16W	
L22		L92-0171-05	BEADS CORE		R35		RK73HB1J104J	CHIP R 100K J 1/16W	
L23		L92-0171-05	BEADS CORE		R36		RK73HB1J104J	CHIP R 100K J 1/16W	
L301		LB73G0AM-004	CHIP FERRITE BEADS		R37		RK73HB1J103J	CHIP R 10K J 1/16W	
L302		LB73G0AM-004	CHIP FERRITE BEADS		R38		RK73HB1J104J	CHIP R 100K J 1/16W	
L303		LB73G0AM-004	CHIP FERRITE BEADS		R40		RK73HB1J104J	CHIP R 100K J 1/16W	
L304		LB73G0AM-004	CHIP FERRITE BEADS		R41		RK73HB1J104J	CHIP R 100K J 1/16W	
L305		L33-1541-05	SMALL FIXED INDUCTOR (10UH)		R42		RK73HB1J104J	CHIP R 100K J 1/16W	
L306		LB73G0AK-001	CHIP FERRITE BEADS		R43		RK73HB1J000J	CHIP R 0.0 J 1/16W	
L307		LB73G0AK-001	CHIP FERRITE BEADS		R44		RK73HB1J000J	CHIP R 0.0 J 1/16W	
L308		LB73G0AK-001	CHIP FERRITE BEADS		R45		RK73HB1J000J	CHIP R 0.0 J 1/16W	
L309		LB73G0AK-001	CHIP FERRITE BEADS		R46		RK73HB1J000J	CHIP R 0.0 J 1/16W	
L311		LB73H0AV-002	CHIP FERRITE BEADS		R47		RK73HB1J000J	CHIP R 0.0 J 1/16W	
L312		LB73G0AK-001	CHIP FERRITE BEADS		R48		RK73HB1J000J	CHIP R 0.0 J 1/16W	
L313		LB73G0AM-004	CHIP FERRITE BEADS		R49		RK73HB1J000J	CHIP R 0.0 J 1/16W	
L314		LB73G0AM-004	CHIP FERRITE BEADS		R50		RK73HB1J000J	CHIP R 0.0 J 1/16W	
L315		LB73G0AK-001	CHIP FERRITE BEADS		R51		RK73HB1J104J	CHIP R 100K J 1/16W	
L316		LB73G0AK-001	CHIP FERRITE BEADS		R52		RK73HB1J220J	CHIP R 22 J 1/16W	
L317		LB73G0AK-001	CHIP FERRITE BEADS		R53		RK73HB1J104J	CHIP R 100K J 1/16W	
Q4		2SC4617/S/	TRANSISTOR		R54		RK73HB1J104J	CHIP R 100K J 1/16W	
Q5		SSM3K15TE(F)	FET		R55		RK73HB1J104J	CHIP R 100K J 1/16W	
Q6		2SD2114K(W)	TRANSISTOR		R56		RK73HB1J104J	CHIP R 100K J 1/16W	
Q7		2SD2114K(W)	TRANSISTOR		R57		RK73HB1J104J	CHIP R 100K J 1/16W	
Q8		2SD2114K(W)	TRANSISTOR		R58		RK73HB1J101J	CHIP R 100 J 1/16W	
Q9		2SD2114K(W)	TRANSISTOR		R59		RK73HB1J000J	CHIP R 0.0 J 1/16W	

If a part reference number is listed in a shaded box, that part does not come with the PCB.

PARTS LIST

CONTROL UNIT (X53-4580-10)

Ref. No.	Address	Parts No.	Description	Desti- nation	Ref. No.	Address	Parts No.	Description	Desti- nation
R60		RK73HB1J000J	CHIP R 0.0 J 1/16W		R132		RK73HB1J102J	CHIP R 1.0K J 1/16W	
R61		RK73HB1J000J	CHIP R 0.0 J 1/16W		R133		RK73HB1J472J	CHIP R 4.7K J 1/16W	
R62		RK73HB1J101J	CHIP R 100 J 1/16W		R135		RK73HB1J104J	CHIP R 100K J 1/16W	
R63		RK73HB1J000J	CHIP R 0.0 J 1/16W		R137		RK73HB1J104J	CHIP R 100K J 1/16W	
R68		RK73HB1J000J	CHIP R 0.0 J 1/16W		R138		RK73HB1J104J	CHIP R 100K J 1/16W	
R69		RK73HB1J000J	CHIP R 0.0 J 1/16W		R141		RK73HB1J104J	CHIP R 100K J 1/16W	
R70		RK73HB1J000J	CHIP R 0.0 J 1/16W		R142		RK73HB1J104J	CHIP R 100K J 1/16W	
R71		RK73HB1J000J	CHIP R 0.0 J 1/16W		R143		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R72		RK73HB1J000J	CHIP R 0.0 J 1/16W		R144		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R73		RK73HB1J000J	CHIP R 0.0 J 1/16W		R145		RK73HB1J104J	CHIP R 100K J 1/16W	
R74		RK73HB1J104J	CHIP R 100K J 1/16W		R146		RK73HB1J101J	CHIP R 100 J 1/16W	
R75		RK73HB1J104J	CHIP R 100K J 1/16W		R147		RK73HB1J101J	CHIP R 100 J 1/16W	
R77		RK73HB1J151J	CHIP R 150 J 1/16W		R148		RK73HB1J563J	CHIP R 56K J 1/16W	
R78		RK73HB1J102J	CHIP R 1.0K J 1/16W		R149		RK73HB1J104J	CHIP R 100K J 1/16W	
R79		RK73HB1J000J	CHIP R 0.0 J 1/16W		R150		RK73HB1J104J	CHIP R 100K J 1/16W	
R80		RK73HB1J823J	CHIP R 82K J 1/16W		R151		RK73HB1J104J	CHIP R 100K J 1/16W	
R81		RK73HB1J104J	CHIP R 100K J 1/16W		R152		RK73HB1J102J	CHIP R 1.0K J 1/16W	
R82		RK73HB1J104J	CHIP R 100K J 1/16W		R153		RK73HB1J473J	CHIP R 47K J 1/16W	
R83		RK73HB1J104J	CHIP R 100K J 1/16W		R154		RK73HB1J104J	CHIP R 100K J 1/16W	
R85		RK73HB1J103J	CHIP R 10K J 1/16W		R155		RK73HB1J104J	CHIP R 100K J 1/16W	
R87		RK73HB1J334J	CHIP R 330K J 1/16W		R156		RK73HB1J474J	CHIP R 470K J 1/16W	
R88		RK73HB1J100J	CHIP R 10 J 1/16W		R157		RK73HB1J474J	CHIP R 470K J 1/16W	
R89		RK73HB1J332J	CHIP R 3.3K J 1/16W		R158		RK73HB1J474J	CHIP R 470K J 1/16W	
R90		RK73HB1J471J	CHIP R 470 J 1/16W		R159		RK73HB1J103J	CHIP R 10K J 1/16W	
R92		RK73HB1J104J	CHIP R 100K J 1/16W		R160		RK73HB1J101J	CHIP R 100 J 1/16W	
R93		RK73HB1J104J	CHIP R 100K J 1/16W		R161		RK73HB1J103J	CHIP R 10K J 1/16W	
R94		RK73HB1J104J	CHIP R 100K J 1/16W		R162		RK73HB1J104J	CHIP R 100K J 1/16W	
R95		RK73HB1J220J	CHIP R 22 J 1/16W		R163		RK73HB1J334D	CHIP R 330K D 1/16W	
R99		RK73HB1J104J	CHIP R 100K J 1/16W		R164		RK73HB1J104D	CHIP R 100K D 1/16W	
R100		RK73HB1J104J	CHIP R 100K J 1/16W		R165		RK73HB1J104J	CHIP R 100K J 1/16W	
R101		RK73HB1J103J	CHIP R 10K J 1/16W		R166		RK73HB1J104J	CHIP R 100K J 1/16W	
R102		RK73HB1J104J	CHIP R 100K J 1/16W		R167		RK73HB1J473J	CHIP R 47K J 1/16W	
R103		RK73HB1J104J	CHIP R 100K J 1/16W		R168		RK73HB1J473J	CHIP R 47K J 1/16W	
R104		RK73HB1J393J	CHIP R 39K J 1/16W		R169		RK73HB1J473J	CHIP R 47K J 1/16W	
R105		RK73HB1J334J	CHIP R 330K J 1/16W		R170		RK73HB1J124D	CHIP R 120K D 1/16W	
R106		RK73HB1J100J	CHIP R 10 J 1/16W		R171		RK73HB1J473J	CHIP R 47K J 1/16W	
R107		RK73HB1J103J	CHIP R 10K J 1/16W		R172		RK73HB1J103J	CHIP R 10K J 1/16W	
R108		RK73HB1J184J	CHIP R 180K J 1/16W		R173		RK73HB1J473J	CHIP R 47K J 1/16W	
R109		RK73HB1J104J	CHIP R 100K J 1/16W		R174		RK73HB1J473J	CHIP R 47K J 1/16W	
R110		RK73HB1J682J	CHIP R 6.8K J 1/16W		R175		RK73HB1J683J	CHIP R 68K J 1/16W	
R111		RK73HB1J104J	CHIP R 100K J 1/16W		R176		RK73HB1J473J	CHIP R 47K J 1/16W	
R112		RK73HB1J104J	CHIP R 100K J 1/16W		R177		RK73HB1J473J	CHIP R 47K J 1/16W	
R113		RK73HB1J102J	CHIP R 1.0K J 1/16W		R178		RK73HB1J473J	CHIP R 47K J 1/16W	
R114		RK73HB1J220J	CHIP R 22 J 1/16W		R179		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R115		RK73HB1J220J	CHIP R 22 J 1/16W		R181		RK73HB1J473J	CHIP R 47K J 1/16W	
R116		RK73HB1J472J	CHIP R 4.7K J 1/16W		R183		RK73HB1J473J	CHIP R 47K J 1/16W	
R117		RK73HB1J472J	CHIP R 4.7K J 1/16W		R184		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R118		RK73HB1J000J	CHIP R 0.0 J 1/16W		R185		RK73HB1J473J	CHIP R 47K J 1/16W	
R119		RK73HB1J474J	CHIP R 470K J 1/16W		R186		RK73HB1J103J	CHIP R 10K J 1/16W	
R121		RK73HB1J104J	CHIP R 100K J 1/16W		R187		RK73HB1J473J	CHIP R 47K J 1/16W	
R122		RK73HB1J103J	CHIP R 10K J 1/16W		R190		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R123		RK73HB1J473J	CHIP R 47K J 1/16W		R191		RK73HB1J474J	CHIP R 470K J 1/16W	
R124		RK73HB1J103J	CHIP R 10K J 1/16W		R194		RK73HB1J103J	CHIP R 10K J 1/16W	
R125		RK73GB2A564J	CHIP R 560K J 1/10W		R196		RK73HB1J103J	CHIP R 10K J 1/16W	
R126		RK73HB1J104J	CHIP R 100K J 1/16W		R197		RK73HB1J103J	CHIP R 10K J 1/16W	
R127		RK73HB1J102J	CHIP R 1.0K J 1/16W		R199		RK73HB1J103J	CHIP R 10K J 1/16W	
R128		RK73HB1J104J	CHIP R 100K J 1/16W		R204		RK73HB1J103J	CHIP R 10K J 1/16W	
R129		RK73HB1J101J	CHIP R 100 J 1/16W		R205		RK73HB1J102J	CHIP R 1.0K J 1/16W	
R130		RK73HB1J101J	CHIP R 100 J 1/16W		R206		RK73HB1J102J	CHIP R 1.0K J 1/16W	
R131		RK73HB1J472J	CHIP R 4.7K J 1/16W		R207		RK73HB1J102J	CHIP R 1.0K J 1/16W	

PARTS LIST

CONTROL UNIT (X53-4580-10)

Ref. No.	Address	Parts No.	Description	Desti- nation	Ref. No.	Address	Parts No.	Description	Desti- nation
R208		RK73HB1J102J	CHIP R 1.0K J 1/16W		R271		RK73HB1J101J	CHIP R 100 J 1/16W	
R209		RK73HB1J121J	CHIP R 120 J 1/16W		R272		RK73HB1J101J	CHIP R 100 J 1/16W	
R210		RK73HB1J102J	CHIP R 1.0K J 1/16W		R273		RK73HB1J101J	CHIP R 100 J 1/16W	
R211		RK73HB1J101J	CHIP R 100 J 1/16W		R274		RK73HB1J101J	CHIP R 100 J 1/16W	
R212		RK73HB1J101J	CHIP R 100 J 1/16W		R275		RK73HB1J101J	CHIP R 100 J 1/16W	
R213		RK73HB1J101J	CHIP R 100 J 1/16W		R276		RK73HB1J471J	CHIP R 470 J 1/16W	
R214		RK73HB1J102J	CHIP R 1.0K J 1/16W		R277		RK73HB1J101J	CHIP R 100 J 1/16W	
R215		RK73HB1J101J	CHIP R 100 J 1/16W		R278		RK73HB1J471J	CHIP R 470 J 1/16W	
R216		RK73HB1J102J	CHIP R 1.0K J 1/16W		R279		RK73HB1J471J	CHIP R 470 J 1/16W	
R217		RK73HB1J102J	CHIP R 1.0K J 1/16W		R280		RK73HB1J101J	CHIP R 100 J 1/16W	
R218		RK73HB1J102J	CHIP R 1.0K J 1/16W		R281		RS14KB3D5R6J	FL-PROOF RS 5.6 J 2W	
R219		RK73HB1J102J	CHIP R 1.0K J 1/16W		R282		RK73HB1J104J	CHIP R 100K J 1/16W	
R220		RK73HB1J471J	CHIP R 470 J 1/16W		R301		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R221		RK73HB1J102J	CHIP R 1.0K J 1/16W		R302		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R222		RK73HB1J101J	CHIP R 100 J 1/16W		R303		RK73HB1J104J	CHIP R 100K J 1/16W	
R223		RK73HB1J102J	CHIP R 1.0K J 1/16W		R304		RK73HB1J223J	CHIP R 22K J 1/16W	
R224		RK73HB1J121J	CHIP R 120 J 1/16W		R305		RK73HB1J183J	CHIP R 18K J 1/16W	
R225		RK73HB1J102J	CHIP R 1.0K J 1/16W		R306		RK73HB1J184D	CHIP R 180K D 1/16W	
R226		RK73HB1J103J	CHIP R 10K J 1/16W		R307		RK73HB1J273D	CHIP R 27K D 1/16W	
R227		RK73HB1J122J	CHIP R 1.2K J 1/16W		R308		RK73HB1J473J	CHIP R 47K J 1/16W	
R228		RK73HB1J122J	CHIP R 1.2K J 1/16W		R309		RK73PB2H220J	CHIP R 22 J 1/2W	
R229		RK73HB1J122J	CHIP R 1.2K J 1/16W		R310		RK73GB2A220J	CHIP R 22 J 1/10W	
R230		RK73HB1J122J	CHIP R 1.2K J 1/16W		R312		RK73HB1J104J	CHIP R 100K J 1/16W	
R231		RK73HB1J000J	CHIP R 0.0 J 1/16W		R313		RK73HB1J822D	CHIP R 8.2K D 1/16W	
R232		RK73HB1J000J	CHIP R 0.0 J 1/16W		R314		RK73HB1J332D	CHIP R 3.3K D 1/16W	
R233		RK73HB1J000J	CHIP R 0.0 J 1/16W		R315		RK73HB1J471J	CHIP R 470 J 1/16W	
R234		RK73HB1J000J	CHIP R 0.0 J 1/16W		R316		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R235		RK73HB1J000J	CHIP R 0.0 J 1/16W		R317		RK73HB1J472J	CHIP R 4.7K J 1/16W	
R236		RK73HB1J000J	CHIP R 0.0 J 1/16W		R318		RK73HB1J472J	CHIP R 4.7K J 1/16W	
R237		RK73HB1J000J	CHIP R 0.0 J 1/16W		R319		RK73HB1J103J	CHIP R 10K J 1/16W	
R238		RK73HB1J000J	CHIP R 0.0 J 1/16W		R320		RK73HB1J101J	CHIP R 100 J 1/16W	
R241		RK73HB1J000J	CHIP R 0.0 J 1/16W		R321		RK73HB1J272D	CHIP R 2.7K D 1/16W	
R242		RK73HB1J000J	CHIP R 0.0 J 1/16W		R322		RK73HB1J473D	CHIP R 47K D 1/16W	
R243		RK73HB1J000J	CHIP R 0.0 J 1/16W		R323		RK73HB1J102J	CHIP R 1.0K J 1/16W	
R244		RK73HB1J000J	CHIP R 0.0 J 1/16W		R324		RK73GB2A000J	CHIP R 0.0 J 1/10W	
R245		RK73HB1J000J	CHIP R 0.0 J 1/16W		R401		RK73HB1J473J	CHIP R 47K J 1/16W	
R246		RK73HB1J000J	CHIP R 0.0 J 1/16W		R402		RK73HB1J472J	CHIP R 4.7K J 1/16W	
R247		RK73HB1J000J	CHIP R 0.0 J 1/16W		R403		RK73HB1J473J	CHIP R 47K J 1/16W	
R248		RK73HB1J000J	CHIP R 0.0 J 1/16W		R404		RK73HB1J472J	CHIP R 4.7K J 1/16W	
R249		RK73HB1J000J	CHIP R 0.0 J 1/16W		R405		RK73HB1J473J	CHIP R 47K J 1/16W	
R250		RK73HB1J000J	CHIP R 0.0 J 1/16W		R406		RK73HB1J104J	CHIP R 100K J 1/16W	
R251		RK73HB1J000J	CHIP R 0.0 J 1/16W		R407		RK73HB1J104J	CHIP R 100K J 1/16W	
R252		RK73HB1J000J	CHIP R 0.0 J 1/16W		R408		RK73HB1J103J	CHIP R 10K J 1/16W	
R253		RK73HB1J000J	CHIP R 0.0 J 1/16W		R409		RK73HB1J103J	CHIP R 10K J 1/16W	
R254		RK73HB1J103J	CHIP R 10K J 1/16W		R410		RK73HB1J104J	CHIP R 100K J 1/16W	
R255		RK73HB1J000J	CHIP R 0.0 J 1/16W		R411		RK73HB1J472J	CHIP R 4.7K J 1/16W	
R256		RK73HB1J000J	CHIP R 0.0 J 1/16W		R412		RK73HB1J123J	CHIP R 12K J 1/16W	
R257		RK73HB1J000J	CHIP R 0.0 J 1/16W		R413		RK73HB1J223J	CHIP R 22K J 1/16W	
R258		RK73HB1J000J	CHIP R 0.0 J 1/16W		R414		RK73HB1J153J	CHIP R 15K J 1/16W	
R259		RK73HB1J000J	CHIP R 0.0 J 1/16W		R415		RK73HB1J123J	CHIP R 12K J 1/16W	
R260		RK73HB1J000J	CHIP R 0.0 J 1/16W		R416		RK73HB1J224J	CHIP R 220K J 1/16W	
R261		RK73HB1J000J	CHIP R 0.0 J 1/16W		R417		RK73HB1J104J	CHIP R 100K J 1/16W	
R262		RK73HB1J000J	CHIP R 0.0 J 1/16W		R418		RK73HB1J104J	CHIP R 100K J 1/16W	
R263		RK73HB1J103J	CHIP R 10K J 1/16W		R419		RK73HB1J105J	CHIP R 1.0M J 1/16W	
R265		RK73HB1J471J	CHIP R 470 J 1/16W		R420		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R266		RK73HB1J471J	CHIP R 470 J 1/16W		R421		RK73HB1J393J	CHIP R 39K J 1/16W	
R267		RK73HB1J103J	CHIP R 10K J 1/16W		R422		RK73HB1J223J	CHIP R 22K J 1/16W	
R268		RK73HB1J000J	CHIP R 0.0 J 1/16W		R423		RK73HB1J471J	CHIP R 470 J 1/16W	
R269		RK73HB1J103J	CHIP R 10K J 1/16W		R424		RK73HB1J153J	CHIP R 15K J 1/16W	
R270		RK73HB1J101J	CHIP R 100 J 1/16W		R425		RK73HB1J223J	CHIP R 22K J 1/16W	

PARTS LIST

CONTROL UNIT (X53-4580-10)

DISPLAY UNIT (X54-4060-20)

Ref. No.	Address	Parts No.	Description	Destination	Ref. No.	Address	Parts No.	Description	Destination
R426		RK73HB1J103J	CHIP R 10K J 1/16W		R662		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R430		RK73HB1J2R7J	CHIP R 2.7 J 1/16W		R664		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R431		RK73HB1J000J	CHIP R 0.0 J 1/16W		R665		RK73HB1J104J	CHIP R 100K J 1/16W	
R432		RK73HB1J333J	CHIP R 33K J 1/16W		R666		RK73GB2A000J	CHIP R 0.0 J 1/10W	
R433		RK73HB1J104J	CHIP R 100K J 1/16W		R667		RK73GB2A000J	CHIP R 0.0 J 1/10W	
R435		RK73HB1J473J	CHIP R 47K J 1/16W		TH1		ERTJ0V104H	NEGATIVE TEMP THERMISTOR	
R436		RK73HB1J124J	CHIP R 120K J 1/16W		X1		L77-3015-05	TCXO (18.432M)	
R437		RK73HB1J333J	CHIP R 33K J 1/16W		X2		L77-1802-05	CRYSTAL RESONATOR(32768HZ)	
R438		RK73HB1J104J	CHIP R 100K J 1/16W		DISPLAY UNIT (X54-4060-20)				
R439		RK73HB1J473J	CHIP R 47K J 1/16W		-		J31-0543-05	COLLAR (LH-5-1.5)	
R441		RK73HB1J104J	CHIP R 100K J 1/16W		C501		CS77BA1A100M	CHIP TNTL 10UF 10WV	
R442		RK73HB1J683J	CHIP R 68K J 1/16W		C502		CS77MA1D1R5M	CHIP TNTL 1.5UF 20WV	
R443		RK73HB1J000J	CHIP R 0.0 J 1/16W		C503		CS77MA1D1R5M	CHIP TNTL 1.5UF 20WV	
R444		RK73HB1J333J	CHIP R 33K J 1/16W		C504		CK73GBB1C104K	CHIP C 0.1UF K	
R445		RK73HB1J333J	CHIP R 33K J 1/16W		C505		CK73GBB1C104K	CHIP C 0.1UF K	
R446		RK73HB1J224J	CHIP R 220K J 1/16W		C506		CC73GCH1H470J	CHIP C 47PF J	
R450		RK73HB1J473J	CHIP R 47K J 1/16W		C507		CK73GBB1C104K	CHIP C 0.1UF K	
R451		RK73HB1J104J	CHIP R 100K J 1/16W		C508		CK73GBB1C104K	CHIP C 0.1UF K	
R452		RK73HB1J473J	CHIP R 47K J 1/16W		C509		CK73GBB1H103K	CHIP C 0.01UF K	
R457		RK73HB1J000J	CHIP R 0.0 J 1/16W		C510		CS77BA1A100M	CHIP TNTL 10UF 10WV	
R458		RK73HB1J101J	CHIP R 100 J 1/16W		C511		CK73GB1E103K	CHIP C 0.01UF K	
R459		RK73HB1J101J	CHIP R 100 J 1/16W		C512		CK73GB1E103K	CHIP C 0.01UF K	
R460		RK73HB1J101J	CHIP R 100 J 1/16W		C513		CC73GCH1H101J	CHIP C 100PF J	
R461		RK73HB1J223J	CHIP R 22K J 1/16W		C514		CC73GCH1H101J	CHIP C 100PF J	
R462		RK73HB1J223J	CHIP R 22K J 1/16W		C515		CC73GCH1H101J	CHIP C 100PF J	
R463		RK73HB1J223J	CHIP R 22K J 1/16W		C516		CC73GCH1H101J	CHIP C 100PF J	
R464		RK73HB1J104J	CHIP R 100K J 1/16W		C517		CC73GCH1H101J	CHIP C 100PF J	
R465		RK73HB1J104J	CHIP R 100K J 1/16W		C518		CC73GCH1H101J	CHIP C 100PF J	
R466		RK73HB1J000J	CHIP R 0.0 J 1/16W		C519		CK73GB1E103K	CHIP C 0.01UF K	
R467		RK73HB1J000J	CHIP R 0.0 J 1/16W		C520		CK73GB1E103K	CHIP C 0.01UF K	
R502		RK73HB1J000J	CHIP R 0.0 J 1/16W		C521		CS77BA1A100M	CHIP TNTL 10UF 10WV	
R508		RK73HB1J103J	CHIP R 10K J 1/16W		C522		CK73GBB1C104K	CHIP C 0.1UF K	
R509		RK73HB1J223J	CHIP R 22K J 1/16W		C523		CK73FB1E334K	CHIP C 0.33UF K	
R510		RK73HB1J103J	CHIP R 10K J 1/16W		C524		CS77BA1A100M	CHIP TNTL 10UF 10WV	
R511		RK73HB1J000J	CHIP R 0.0 J 1/16W		C525		CK73GBB1C104K	CHIP C 0.1UF K	
R606		RK73HB1J103J	CHIP R 10K J 1/16W		C526		CK73FB1E334K	CHIP C 0.33UF K	
R607		RK73HB1J103J	CHIP R 10K J 1/16W		C527		CK73GBB1H102K	CHIP C 1000PF K	
R608		RK73HB1J102J	CHIP R 1.0K J 1/16W		C528		CK73GBB1H103K	CHIP C 0.01UF K	
R609		RK73HB1J000J	CHIP R 0.0 J 1/16W		C532		CK73GBB1H102K	CHIP C 1000PF K	
R610		RK73HB1J104J	CHIP R 100K J 1/16W		C533		CC73GCH1H101J	CHIP C 100PF J	
R612		RK73HB1J104J	CHIP R 100K J 1/16W		C534		CK73GBB1H102K	CHIP C 1000PF K	
R626		RK73HB1J000J	CHIP R 0.0 J 1/16W		C601		CC73GCH1H101J	CHIP C 100PF J	
R627		RK73HB1J102J	CHIP R 1.0K J 1/16W		C602		CK73GBB1H102K	CHIP C 1000PF K	
R628		RK73HB1J102J	CHIP R 1.0K J 1/16W		C603		CC73GCH1H101J	CHIP C 100PF J	
R629		RK73HB1J473J	CHIP R 47K J 1/16W		C606		CC73GCH1H101J	CHIP C 100PF J	
R630		RK73HB1J473J	CHIP R 47K J 1/16W		C607		CK73GBB1C104K	CHIP C 0.1UF K	
R634		RK73HB1J000J	CHIP R 0.0 J 1/16W		CN501		E41-2743-05	PIN ASSY	
R635		RK73HB1J000J	CHIP R 0.0 J 1/16W		CN502		E40-6102-05	PIN ASSY	
R636		RK73HB1J000J	CHIP R 0.0 J 1/16W		CN601		E41-2751-05	PIN ASSY	
R637		RK73HB1J000J	CHIP R 0.0 J 1/16W		CP51		RK75GB1J471J	CHIP-COM 470 J 1/16W	
R638		RK73HB1J000J	CHIP R 0.0 J 1/16W		CP52		RK75GB1J471J	CHIP-COM 470 J 1/16W	
R639		RK73HB1J000J	CHIP R 0.0 J 1/16W		CP53		RK75GB1J471J	CHIP-COM 470 J 1/16W	
R640		RK73HB1J104J	CHIP R 100K J 1/16W		CP54		RK75GB1J471J	CHIP-COM 470 J 1/16W	
R641		RK73HB1J103J	CHIP R 10K J 1/16W		D501		HSM88AS-E	DIODE	
R648		RK73GB2A000J	CHIP R 0.0 J 1/10W						
R649		RK73GB2A000J	CHIP R 0.0 J 1/10W						
R656		RK73HB1J000J	CHIP R 0.0 J 1/16W						
R657		RK73HB1J000J	CHIP R 0.0 J 1/16W						
R658		RK73HB1J000J	CHIP R 0.0 J 1/16W						
R659		RK73HB1J103J	CHIP R 10K J 1/16W						

PARTS LIST

TX-RX UNIT (X57-894K-01)

Ref. No.	Address	Parts No.	Description	Desti- nation	Ref. No.	Address	Parts No.	Description	Desti- nation
C108		CC73HCH1H100B	CHIP C 10PF B		C221		CK73HB1H103K	CHIP C 10000PF K	
C109		CK73HBB1H102K	CHIP C 1000PF K		C222		CK73HB1H103K	CHIP C 10000PF K	
C110		CS77MA1V2R2M	CHIP TNTL 2.2UF 35WV		C223		CK73HB1H103K	CHIP C 10000PF K	
C112		CK73HBB1H102K	CHIP C 1000PF K		C224		CK73HBB1H102K	CHIP C 1000PF K	
C113		CC73HCH1H120G	CHIP C 12PF G		C225		CC73HCH1H120G	CHIP C 12PF G	
C114		CK73HBB1H102K	CHIP C 1000PF K		C226		CC73HCH1H680J	CHIP C 68PF J	
C115		CC73HCH1H100B	CHIP C 10PF B		C227		CK73HB1E104K	CHIP C 0.10UF K	
C116		CK73HBB1H102K	CHIP C 1000PF K		C228		CC73HCH1H101J	CHIP C 100PF J	
C117		CK73HBB1H102K	CHIP C 1000PF K		C229		CK73HBB1H102K	CHIP C 1000PF K	
C118		CC73HCH1H220G	CHIP C 22PF G		C230		CC73HCH1H680J	CHIP C 68PF J	
C119		CK73HB1E104K	CHIP C 0.10UF K		C231		CK73HBB1H102K	CHIP C 1000PF K	
C120		CK73HBB1H102K	CHIP C 1000PF K		C233		CC73HCH1H470J	CHIP C 47PF J	
C121		CC73HCH1H070B	CHIP C 7.0PF B		C234		CC73HCH1H470J	CHIP C 47PF J	
C122		CK73HBB1H102K	CHIP C 1000PF K		C235		CK73HBB1H102K	CHIP C 1000PF K	
C123		CK73HB1E104K	CHIP C 0.10UF K		C236		CK73HBB1H102K	CHIP C 1000PF K	
C124		CC73HCH1H270J	CHIP C 27PF J		C237		CC73HCH1H080B	CHIP C 8.0PF B	
C125		CK73HBB1H102K	CHIP C 1000PF K		C239		CC73HCH1H180J	CHIP C 18PF J	
C127		CK73HBB1H102K	CHIP C 1000PF K		C241		CC73HCH1H270J	CHIP C 27PF J	
C129		CC73HCH1H080D	CHIP C 8.0PF D		C243		CC73HCH1H270J	CHIP C 27PF J	
C130		CK73HBB1H102K	CHIP C 1000PF K		C245		CC73HCH1H150J	CHIP C 15PF J	
C131		CK73HB1E104K	CHIP C 0.10UF K		C246		CK73HB1H103K	CHIP C 10000PF K	
C134		CK73HBB1H102K	CHIP C 1000PF K		C247		CK73HBB1H102K	CHIP C 1000PF K	
C135		CK73HBB1H102K	CHIP C 1000PF K		C300		CC73HCH1H270J	CHIP C 27PF J	
C136		CC73HCH1H080B	CHIP C 8.0PF B		C301		CK73HBB1H102K	CHIP C 1000PF K	
C137		CK73HBB1H102K	CHIP C 1000PF K		C302		CK73HB1H103K	CHIP C 10000PF K	
C138		CC73HCH1H100B	CHIP C 10PF B		C303		CK73HB1H103K	CHIP C 10000PF K	
C139		CK73HBB1H102K	CHIP C 1000PF K		C304		CK73HB1H103K	CHIP C 10000PF K	
C140		CK73HBB1H102K	CHIP C 1000PF K		C305		CK73HB1H103K	CHIP C 10000PF K	
C141		CC73HCH1H080B	CHIP C 8.0PF B		C306		CC73HCH1H020B	CHIP C 2.0PF B	
C142		CK73HBB1H102K	CHIP C 1000PF K		C318		CC73HCH1H270G	CHIP C 27PF G	
C144		CK73HBB1H102K	CHIP C 1000PF K		C322		CK73HBB1H102K	CHIP C 1000PF K	
C145		CC73HCH1H100B	CHIP C 10PF B		C323		CE32CL1E4R7M	CHIP EL 4.7UF 25WV	
C146		CK73HBB1H102K	CHIP C 1000PF K		C325		CK73HB1E104K	CHIP C 0.10UF K	
C147		CC73HCH1H100B	CHIP C 10PF B		C326		CC73HCH1H330G	CHIP C 33PF G	
C148		CK73HBB1H102K	CHIP C 1000PF K		C329		CK73HB1H103K	CHIP C 10000PF K	
C149		CK73HBB1H102K	CHIP C 1000PF K		C331		CK73HBB1H102K	CHIP C 1000PF K	
C150		CC73HCH1H100B	CHIP C 10PF B		C332		CC73HCH1H270J	CHIP C 27PF J	
C151		CK73HBB1H102K	CHIP C 1000PF K		C333		CC73HCH1H270J	CHIP C 27PF J	
C152		CC73HCH1H220G	CHIP C 22PF G		C334		CK73HB1H103K	CHIP C 10000PF K	
C154		CC73HCH1H330G	CHIP C 33PF G		C335		CC73HCH1H820J	CHIP C 82PF J	
C156		CC73HCH1H330G	CHIP C 33PF G		C336		CC73HCH1H270J	CHIP C 27PF J	
C158		CC73HCH1H220G	CHIP C 22PF G		C337		CK73HB1H103K	CHIP C 10000PF K	
C160		CK73HBB1H102K	CHIP C 1000PF K		C338		CK73HB1H103K	CHIP C 10000PF K	
C161		CK73HBB1H102K	CHIP C 1000PF K		C339		CK73HBB1H102K	CHIP C 1000PF K	
C176		CK73GBB1H102K	CHIP C 1000PF K		C341		CK73HB1H103K	CHIP C 10000PF K	
C200		CS77MA1V2R2M	CHIP TNTL 2.2UF 35WV		C342		CC73HCH1H180J	CHIP C 18PF J	
C201		CS77MA1V2R2M	CHIP TNTL 2.2UF 35WV		C343		CK73HB1H103K	CHIP C 10000PF K	
C202		CC73HCH1H100D	CHIP C 10PF D		C344		CK73HB1H103K	CHIP C 10000PF K	
C203		CK73HBB1H102K	CHIP C 1000PF K		C345		CK73HBB1H102K	CHIP C 1000PF K	
C204		CC73HCH1H101J	CHIP C 100PF J		C346		CC73HCH1H180J	CHIP C 18PF J	
C205		CK73HB1E104K	CHIP C 0.10UF K		C347		CC73HCH1H150G	CHIP C 15PF G	
C206		CC73HCH1H330J	CHIP C 33PF J		C349		CK73HB1H103K	CHIP C 10000PF K	
C207		CS77ABE1D100M	CHIP C 10UF M		C350		CK73HBB1A104K	CHIP C 0.1UF K	
C208		CS77ABE1D100M	CHIP C 10UF M		C356		CC73HCH1H100D	CHIP C 10PF D	
C209		CK73HBB1H102K	CHIP C 1000PF K		C400		CK73HB1E104K	CHIP C 0.10UF K	
C210		CE32CL1V100M	CHIP EL 10UF 35WV		C401		CK73HB1E104K	CHIP C 0.10UF K	
C211		CK73HBB1H102K	CHIP C 1000PF K		C403		CK73HB1E104K	CHIP C 0.10UF K	
C212		CK73HB1H103K	CHIP C 10000PF K		C404		CC73HCH1H100D	CHIP C 10PF D	
C219		CC73HCH1H100D	CHIP C 10PF D		C405		CK73HB1E104K	CHIP C 0.10UF K	
C220		CK73HB1H103K	CHIP C 10000PF K		C407		CK73HBB1H102K	CHIP C 1000PF K	

PARTS LIST

TX-RX UNIT (X57-894K-01)

Ref. No.	Address	Parts No.	Description	Desti- nation	Ref. No.	Address	Parts No.	Description	Desti- nation
C408		CK73HB1E104K	CHIP C 0.10UF K		C538		CK73HB1H103K	CHIP C 10000PF K	
C410		CK73HBB1H102K	CHIP C 1000PF K		C539		CC73HCH1H820J	CHIP C 82PF J	
C411		CK73GB1E105K	CHIP C 1.0UF K		C540		CK73HB1H103K	CHIP C 10000PF K	
C412		CK73HBB1H102K	CHIP C 1000PF K		C541		CK73HB1E104K	CHIP C 0.10UF K	
C413		CK73GB1E105K	CHIP C 1.0UF K		C542		CK73FB1A106K	CHIP C 10UF K	
C414		CK73HBB1H102K	CHIP C 1000PF K		C543		CK73HB1E104K	CHIP C 0.10UF K	
C415		CK73HB1E104K	CHIP C 0.10UF K		C544		CK73HB1E104K	CHIP C 0.10UF K	
C416		CK73HB1H103K	CHIP C 10000PF K		C545		CK73HB1E104K	CHIP C 0.10UF K	
C417		CK73HB1E104K	CHIP C 0.10UF K		C546		CC73HCH1H390J	CHIP C 39PF J	
C418		CK73HBB1H102K	CHIP C 1000PF K		C547		CC73HCH1H100D	CHIP C 10PF D	
C419		CK73HBB1H102K	CHIP C 1000PF K		C548		CC73HCH1H100D	CHIP C 10PF D	
C421		CK73HBB1H102K	CHIP C 1000PF K		C549		CK73HB1E104K	CHIP C 0.10UF K	
C422		CK73HB1E104K	CHIP C 0.10UF K		C550		CK73HB1H103K	CHIP C 10000PF K	
C423		CK73HB1H103K	CHIP C 10000PF K		C551		CC73HCH1H100D	CHIP C 10PF D	
C424		CK73HB1E104K	CHIP C 0.10UF K		C600		CK73FB1A106K	CHIP C 10UF K	
C425		CK73HB1E104K	CHIP C 0.10UF K		C601		CK73FB1A106K	CHIP C 10UF K	
C426		CK73HB1E104K	CHIP C 0.10UF K		C602		CK73HB1E104K	CHIP C 0.10UF K	
C427		CK73HB1E104K	CHIP C 0.10UF K		C603		CK73HB1E104K	CHIP C 0.10UF K	
C428		CK73HB1E104K	CHIP C 0.10UF K		C604		CK73HB1E104K	CHIP C 0.10UF K	
C429		CK73HB1E104K	CHIP C 0.10UF K		C605		CK73HB1H103K	CHIP C 10000PF K	
C430		CK73HB1E104K	CHIP C 0.10UF K		C606		CK73FB1A106K	CHIP C 10UF K	
C437		CK73HB1E104K	CHIP C 0.10UF K		C607		CK73FB1A106K	CHIP C 10UF K	
C438		CK73HB1E104K	CHIP C 0.10UF K		C608		CK73HB1H103K	CHIP C 10000PF K	
C439		CK73HB1E104K	CHIP C 0.10UF K		C610		CK73HB1H103K	CHIP C 10000PF K	
C440		CK73HB1E104K	CHIP C 0.10UF K		C611		CK73HB1H103K	CHIP C 10000PF K	
C500		CK73HB1E104K	CHIP C 0.10UF K		C612		CK73HB1H103K	CHIP C 10000PF K	
C501		CK73HB1E104K	CHIP C 0.10UF K		C613		CK73HB1H103K	CHIP C 10000PF K	
C502		CK73HB1E104K	CHIP C 0.10UF K		C614		CS77ABE1D100M	CHIP C 10UF M	
C503		CK73HB1E104K	CHIP C 0.10UF K		C615		CC73HCH1H181J	CHIP C 180PF J	
C504		CK73HBB1H102K	CHIP C 1000PF K		C616		CC73HCH1H470J	CHIP C 47PF J	
C505		CK73HB1E104K	CHIP C 0.10UF K		C618		CS77BB21A470M	CHIP TNTL 47UF 10WV	
C506		CK73HB1E104K	CHIP C 0.10UF K		C619		CC73HCH1H331J	CHIP C 330PF J	
C507		CK73HB1E104K	CHIP C 0.10UF K		C620		CC73HCH1H180J	CHIP C 18PF J	
C508		CK73HB1H103K	CHIP C 10000PF K		C621		CS77BB21A470M	CHIP TNTL 47UF 10WV	
C509		CK73HB1E104K	CHIP C 0.10UF K		C622		CC73HCH1H221J	CHIP C 220PF J	
C510		CK73HB1E104K	CHIP C 0.10UF K		C623		CK73HB1H103K	CHIP C 10000PF K	
C511		CK73HB1E104K	CHIP C 0.10UF K		C624		CK73HB1E104K	CHIP C 0.10UF K	
C512		CK73HB1E104K	CHIP C 0.10UF K		C625		CK73HB1H103K	CHIP C 10000PF K	
C514		CK73HB1H103K	CHIP C 10000PF K		C626		CS77ABE1D100M	CHIP C 10UF M	
C515		CK73HB1E104K	CHIP C 0.10UF K		C627		CK73HB1H103K	CHIP C 10000PF K	
C517		CK73HB1H103K	CHIP C 10000PF K		C628		CC73HCH1H100D	CHIP C 10PF D	
C518		CK73HB1E104K	CHIP C 0.10UF K		C629		CK73HB1H103K	CHIP C 10000PF K	
C519		CK73HB1H103K	CHIP C 10000PF K		C630		CK73HB1H103K	CHIP C 10000PF K	
C520		CK73HB1E104K	CHIP C 0.10UF K		C631		CC73HCH1H100D	CHIP C 10PF D	
C521		CC73HCH1H180J	CHIP C 18PF J		C632		CK73HB1E104K	CHIP C 0.10UF K	
C522		CC73HCH1H101J	CHIP C 100PF J		C633		CK73HB1H103K	CHIP C 10000PF K	
C523		CC73HCH1H331J	CHIP C 330PF J		C634		CK73HB1H103K	CHIP C 10000PF K	
C524		CC73HCH1H180J	CHIP C 18PF J		C635		CC73HCH1H100D	CHIP C 10PF D	
C525		CC73HCH1H470J	CHIP C 47PF J		C636		CK73HB1H103K	CHIP C 10000PF K	
C526		CC73HCH1H471J	CHIP C 470PF J		C637		CK73HB1H103K	CHIP C 10000PF K	
C528		CC73HCH1H121J	CHIP C 120PF J		C638		CK73GB1E105K	CHIP C 1.0UF K	
C529		CC73HCH1H221J	CHIP C 220PF J		C639		CK73HB1H103K	CHIP C 10000PF K	
C530		CK73HB1E104K	CHIP C 0.10UF K		C641		CK73HB1H103K	CHIP C 10000PF K	
C531		CK73HB1E104K	CHIP C 0.10UF K		C642		CK73HB1E104K	CHIP C 0.10UF K	
C532		CK73HB1E104K	CHIP C 0.10UF K		C643		CS77ABE1D100M	CHIP C 10UF M	
C533		CK73HB1E104K	CHIP C 0.10UF K		C644		CC73HCH1H100D	CHIP C 10PF D	
C534		CC73HCH1H050C	CHIP C 5.0PF C		C645		CK73GB1E105K	CHIP C 1.0UF K	
C535		CK73HB1H103K	CHIP C 10000PF K		C647		CS77MA1V2R2M	CHIP TNTL 2.2UF 35WV	
C536		CK73HB1E104K	CHIP C 0.10UF K		C648		CS77MA1V2R2M	CHIP TNTL 2.2UF 35WV	
C537		CK73HB1E104K	CHIP C 0.10UF K		C649		CK73HB1E104K	CHIP C 0.10UF K	

TKR-D710

PARTS LIST

TX-RX UNIT (X57-894K-01)

Ref. No.	Address	Parts No.	Description	Destination	Ref. No.	Address	Parts No.	Description	Destination
C650		CK73HBB1H102K	CHIP C 1000PF K		C818		CK73HB1E104K	CHIP C 0.10UF K	
C651		CC73HCH1H101J	CHIP C 100PF J		C819		CK73HB1H103K	CHIP C 10000PF K	
C652		CC73HCH1H100D	CHIP C 10PF D		C820		CK73HBB1H102K	CHIP C 1000PF K	
C653		CS77ABE1D100M	CHIP C 10UF M		C821		CK73HB1E104K	CHIP C 0.10UF K	
C654		CS77ABE1D100M	CHIP C 10UF M		C822		CC73HCH1H100D	CHIP C 10PF D	
C655		CK73HBB1H102K	CHIP C 1000PF K		C823		CK73HB1E104K	CHIP C 0.10UF K	
C656		CE32CL1V100M	CHIP EL 10UF 35WV		C825		C93-1824-05	CHIP C 100UF M	
C657		CC73HCH1H330J	CHIP C 33PF J		C826		CK73GB1E105K	CHIP C 1.0UF K	
C658		CK73HBB1H102K	CHIP C 1000PF K		C827		CK73HBB1H102K	CHIP C 1000PF K	
C660		CC73HCH1H100D	CHIP C 10PF D		C828		CK73HB1E104K	CHIP C 0.10UF K	
C661		CK73HB1E104K	CHIP C 0.10UF K		C831		CK73HB1E104K	CHIP C 0.10UF K	
C662		CC73HCH1H390G	CHIP C 39PF G		C832		CC73HCH1H050B	CHIP C 5.0PF B	
C663		CK73HB1H103K	CHIP C 10000PF K		CF400		L72-1028-05	CERAMIC FILTER	
C664		CC73HCH1H390G	CHIP C 39PF G		CF401		L72-1028-05	CERAMIC FILTER	
C667		CC73HCH1H030B	CHIP C 3.0PF B		CF402		L72-1027-05	CERAMIC FILTER	
C671		CC73HCH1H100D	CHIP C 10PF D		CF403		L72-1041-05	CERAMIC FILTER	
C672		CK73HBB1H102K	CHIP C 1000PF K		CN101		E04-0491-05	PIN SOCKET	
C673		CK73HBB1H102K	CHIP C 1000PF K		CN102		E23-1330-05	TERMINAL	
C674		CC73HCH1H220J	CHIP C 22PF J		CN106		E23-1330-05	TERMINAL	
C679		CK73HBB1H102K	CHIP C 1000PF K		CN500		E04-0491-05	PIN SOCKET	
C680		CK73HBB1H102K	CHIP C 1000PF K		CN610		E04-0491-05	PIN SOCKET	
C683		CK73HBB1H102K	CHIP C 1000PF K		CN700		E41-2672-05	PIN ASSY	
C684		CK73HBB1H102K	CHIP C 1000PF K		CN701		E41-2672-05	PIN ASSY	
C685		CK73HBB1H102K	CHIP C 1000PF K		CN800		E40-6656-05	PIN ASSY	
C686		CK73HBB1H102K	CHIP C 1000PF K		CN801		E41-2743-05	PIN ASSY	
C687		CK73HBB1H102K	CHIP C 1000PF K		CN802		E04-0193-05	PIN SOCKET	
C688		CK73HBB1H102K	CHIP C 1000PF K		CN807		E23-1278-05	TERMINAL	
C700		CK73HB1H103K	CHIP C 10000PF K		CN808		E23-1278-05	TERMINAL	
C701		C92-0905-05	OS-CON 47UF 35WV		CN809		E23-1278-05	TERMINAL	
C702		CK73GB1E105K	CHIP C 1.0UF K		CN811		E23-1278-05	TERMINAL	
C703		CK73HBB1H102K	CHIP C 1000PF K		CN812		E23-1278-05	TERMINAL	
C704		CK73GB1E105K	CHIP C 1.0UF K		CN813		E23-1278-05	TERMINAL	
C705		CK73HBB1H102K	CHIP C 1000PF K		D100		1SV283F	VARIABLE CAPACITANCE DIODE	
C706		C92-0765-05	CHIP TNTL 4.7UF 16WV		D101		1SV283F	VARIABLE CAPACITANCE DIODE	
C707		CE32CL1V100M	CHIP EL 10UF 35WV		D103		1SV283F	VARIABLE CAPACITANCE DIODE	
C708		CK73HB1E104K	CHIP C 0.10UF K		D104		1SV283F	VARIABLE CAPACITANCE DIODE	
C709		CK73HB1H103K	CHIP C 10000PF K		D105		1SV283F	VARIABLE CAPACITANCE DIODE	
C710		CK73HBB1H102K	CHIP C 1000PF K		D106		1SV283F	VARIABLE CAPACITANCE DIODE	
C711		CK73HBB1H102K	CHIP C 1000PF K		D107		1SV283F	VARIABLE CAPACITANCE DIODE	
C712		CK73GB1E105K	CHIP C 1.0UF K		D108		1SV283F	VARIABLE CAPACITANCE DIODE	
C713		CK73HBB1H102K	CHIP C 1000PF K		D200		KDS123E-P	DIODE	
C714		CC73HCH1H181J	CHIP C 180PF J		D500		UDZS3.0B	ZENER DIODE	
C715		CK73HBB1H102K	CHIP C 1000PF K		D501		UDZS3.0B	ZENER DIODE	
C716		CE32CL1V100M	CHIP EL 10UF 35WV		D503		HSM88AS-E	DIODE	
C717		CC73HCH1H220J	CHIP C 22PF J		D504		JDP4P02AT	DIODE	
C718		CK73HBB1H102K	CHIP C 1000PF K		D505		JDP4P02AT	DIODE	
C719		CK73GB1E105K	CHIP C 1.0UF K		D600		KDS123E-P	DIODE	
C720		CK73HB1E104K	CHIP C 0.10UF K		D601		HVC131	DIODE	
C721		CK73GB1E105K	CHIP C 1.0UF K		D801		1SS388F	DIODE	
C722		CK73HB1E104K	CHIP C 0.10UF K		F700		F53-0328-15	FUSE(5A)	
C723		CK73HB1E104K	CHIP C 0.10UF K		IC100		LMC7101BIM5	MOS-IC	
C724		CK73GB1E105K	CHIP C 1.0UF K		IC101		LMC7101BIM5	MOS-IC	
C725		CK73GB1E105K	CHIP C 1.0UF K		IC200		TC75W51FK(F)	MOS-IC	
C726		CK73HB1H103K	CHIP C 10000PF K		IC201		LMC7101BIM5	MOS-IC	
C727		CK73GB1E105K	CHIP C 1.0UF K		IC203		TC7SH126FU-F	MOS-IC	
C728		CK73HBB1H102K	CHIP C 1000PF K		IC300		ADL5350ACPZ	MOS-IC	
C729		CK73HBB1H102K	CHIP C 1000PF K		IC400		ADR051ART	ANALOGUE IC	
C814		CC73HCH1H101J	CHIP C 100PF J		IC401		TC75W51FK(F)	MOS-IC	
C815		CK73HB1H103K	CHIP C 10000PF K		IC402		LMC7101BIM5	MOS-IC	
C817		CK73HB1E104K	CHIP C 0.10UF K		IC403		NJM2287V	MOS-IC	

PARTS LIST

TX-RX UNIT (X57-894K-01)

Ref. No.	Address	Parts No.	Description	Destination	Ref. No.	Address	Parts No.	Description	Destination
IC404		MCP6021-E/OT	MOS-IC		L301		LK73G0AQR33K	SMALL FIXED INDUCTOR(330NH)	
IC405		TC7W53FKF	MOS-IC		L302		L41-5685-47	SMALL FIXED INDUCTOR(560NH)	
IC406		TC7W53FKF	MOS-IC		L303		L41-3385-47	SMALL FIXED INDUCTOR(330NH)	
IC407		TC7W53FKF	MOS-IC		L308		L41-2263-14	SMALL FIXED INDUCTOR(2.2NH)	
IC408		TC7W53FKF	MOS-IC		L309		L41-1085-14	SMALL FIXED INDUCTOR(100NH)	
IC409		TC75W51FK(F)	MOS-IC		L310		L41-3385-47	SMALL FIXED INDUCTOR(330NH)	
IC500		TC75W51FK(F)	MOS-IC		L312		L41-3978-14	SMALL FIXED INDUCTOR(39NH)	
IC501		TC75S59F-F	MOS-IC		L313		L40-8275-92	SMALL FIXED INDUCTOR(82NH)	
IC600		TC7WH126FU-F	MOS-IC		L315		L41-3978-14	SMALL FIXED INDUCTOR(39NH)	
IC601		TC7WH126FU-F	MOS-IC		L316		LK73G0AFR27J	SMALL FIXED INDUCTOR(270NH)	
IC602		ADF4001BRUZ	MOS-IC		L317		L41-1095-33	SMALL FIXED INDUCTOR(1.0UH)	
IC603		TC75S51FE(F)	MOS-IC		L320		LK73G0AFR18J	SMALL FIXED INDUCTOR(180NH)	
IC604		LMC7101BIM5	MOS-IC		L500		L41-3395-33	SMALL FIXED INDUCTOR(3.3UH)	
IC605		TC75S51FE(F)	MOS-IC		L501		LR77Z0AE4R7J	SMALL FIXED INDUCTOR(4.7UH)	
IC606		LMC7101BIM5	MOS-IC		L502		L41-6885-33	SMALL FIXED INDUCTOR(0.68UH)	
IC607		LMC7101BIM5	MOS-IC		L503		L41-5685-33	SMALL FIXED INDUCTOR(0.56UH)	
IC608		TC75W51FK(F)	MOS-IC		L504		L41-2295-39	SMALL FIXED INDUCTOR(2.2UH)	
IC700		NJM78M05DL1AZB	ANALOGUE IC		L505		L41-1295-33	SMALL FIXED INDUCTOR(1.2UH)	
IC701		XC9101D09AK-G	MOS-IC		L506		L41-1295-39	SMALL FIXED INDUCTOR(1.2UH)	
IC702		NJM78M08FA-ZB	ANALOGUE IC		L507		L41-3305-33	SMALL FIXED INDUCTOR(33UH)	
IC703		TK71733S	BI-POLAR IC		L508		L41-3305-33	SMALL FIXED INDUCTOR(33UH)	
IC704		TK11230CMCL-G	BI-POLAR IC		L600		L41-1005-33	SMALL FIXED INDUCTOR(10UH)	
IC800		LM73CIMKX-0	MOS-IC		L601		L41-1005-33	SMALL FIXED INDUCTOR(10UH)	
IC801		TC75S51FE(F)	MOS-IC		L602		LB73G0AK-001	CHIP FERRITE BEADS	
IC802		M24C02-RMN6TP	ROM IC		L603		L41-1005-33	SMALL FIXED INDUCTOR(10UH)	
IC803		TC75W51FK(F)	MOS-IC		L604		L41-3385-39	SMALL FIXED INDUCTOR(330NH)	
IC804		M62364FP-F	MOS-IC		L605		L41-3985-39	SMALL FIXED INDUCTOR(390NH)	
IC805		MCP23S08TE/ML	MOS-IC		L606		L41-1095-39	SMALL FIXED INDUCTOR(1.0UH)	
IC806		TC7W53FKF	MOS-IC		L607		L41-4778-14	SMALL FIXED INDUCTOR(47NH)	
L100		LR79Z0DD32N5J	AIR-CORE COIL		L608		L41-4778-14	SMALL FIXED INDUCTOR(47NH)	
L101		LR79Z0DD32N5J	AIR-CORE COIL		L609		L41-1578-14	SMALL FIXED INDUCTOR(15NH)	
L102		L41-2785-14	SMALL FIXED INDUCTOR(270NH)		L610		L41-8278-14	SMALL FIXED INDUCTOR(82NH)	
L103		LR79Z0DD32N5J	AIR-CORE COIL		L613		LB73G0AM-004	CHIP FERRITE BEADS	
L104		LR79Z0DD32N5J	AIR-CORE COIL		L614		LB73G0AM-004	CHIP FERRITE BEADS	
L105		L41-2775-33	SMALL FIXED INDUCTOR(27NH)		L615		LB73G0AK-001	CHIP FERRITE BEADS	
L106		LB73G0AK-001	CHIP FERRITE BEADS		L616		LB73G0AK-001	CHIP FERRITE BEADS	
L107		L41-6878-14	SMALL FIXED INDUCTOR(68NH)		L617		LB73G0AK-001	CHIP FERRITE BEADS	
L108		L41-2775-33	SMALL FIXED INDUCTOR(27NH)		L618		L41-1095-14	SMALL FIXED INDUCTOR(1.0UH)	
L109		L41-2278-14	SMALL FIXED INDUCTOR(22NH)		L700		L33-1462-05	SMALL FIXED INDUCTOR(68UH)	
L111		LR79Z0DD32N5J	AIR-CORE COIL		L701		L41-1005-33	SMALL FIXED INDUCTOR(10UH)	
L112		LR79Z0DD32N5J	AIR-CORE COIL		L702		L41-1005-33	SMALL FIXED INDUCTOR(10UH)	
L113		L41-2785-14	SMALL FIXED INDUCTOR(270NH)		L800		LB73G0AK-001	CHIP FERRITE BEADS	
L114		LR79Z0DD32N5J	AIR-CORE COIL		L801		LB73G0AK-001	CHIP FERRITE BEADS	
L115		LR79Z0DD32N5J	AIR-CORE COIL		L803		LB73HOAV-002	CHIP FERRITE BEADS	
L116		L34-4932-05	AIR-CORE COIL		L804		L41-1285-14	SMALL FIXED INDUCTOR(120NH)	
L117		L34-4932-05	AIR-CORE COIL		L805		LB73G0AK-001	CHIP FERRITE BEADS	
L118		L34-4932-05	AIR-CORE COIL		L806		LB73G0AK-001	CHIP FERRITE BEADS	
L119		L34-4615-05	AIR-CORE COIL		Q100		DSC90010(S)	TRANSISTOR	
L203		L41-5685-47	SMALL FIXED INDUCTOR(560NH)		Q101		2SC5337	TRANSISTOR	
L205		L41-4778-14	SMALL FIXED INDUCTOR(47NH)		Q200		DSC90010(S)	TRANSISTOR	
L206		LK73G0AFR10J	SMALL FIXED INDUCTOR(100NH)		Q201		DSC90010(S)	TRANSISTOR	
L207		L41-5678-14	SMALL FIXED INDUCTOR(56NH)		Q202		2SC5636	TRANSISTOR	
L208		L41-3375-33	SMALL FIXED INDUCTOR(33NH)		Q203		2SC5636	TRANSISTOR	
L209		L41-3375-33	SMALL FIXED INDUCTOR(33NH)		Q300		3SK294-FP	FET	
L210		L41-3375-33	SMALL FIXED INDUCTOR(33NH)		Q301		2SC5337	TRANSISTOR	
L211		L41-1578-14	SMALL FIXED INDUCTOR(15NH)		Q500		SSM6L05FU-F	FET	
L212		LB73G0AK-001	CHIP FERRITE BEADS		Q501		KTC4075E-P(GR)	TRANSISTOR	
L213		LB73G0AK-001	CHIP FERRITE BEADS		Q502		2SK3737-5	FET	
L215		LB73HOAV-003	CHIP FERRITE BEADS		Q503		3SK294-FP	FET	
L300		LB73G0AK-001	CHIP FERRITE BEADS		Q504		KTC4075E-P(GR)	TRANSISTOR	

PARTS LIST

TX-RX UNIT (X57-894K-01)

Ref. No.	Address	Parts No.	Description	Destination	Ref. No.	Address	Parts No.	Description	Destination
Q505		SSM3K15TE(F)	FET		R211		RK73HB1J333J	CHIP R 33K J 1/16W	
Q506		SSM6L05FU-F	FET		R212		RK73HB1J394J	CHIP R 390K J 1/16W	
Q507		UPA672T-A	FET		R213		RK73HB1J106J	CHIP R 10M J 1/16W	
Q600		SSM3K15TE(F)	FET		R214		RK73HB1J000J	CHIP R 0.0 J 1/16W	
Q601		KTA2014E-P(GR)	TRANSISTOR		R215		RK73HB1J102J	CHIP R 1.0K J 1/16W	
Q602		KTC4075E-P(GR)	TRANSISTOR		R216		RK73HB1J102J	CHIP R 1.0K J 1/16W	
Q603		KTC4075E-P(GR)	TRANSISTOR		R223		RK73HB1J181J	CHIP R 180 J 1/16W	
Q604		DSC90010(S)	TRANSISTOR		R224		RK73HB1J220J	CHIP R 22 J 1/16W	
Q605		DSC90010(S)	TRANSISTOR		R225		RK73HB1J334J	CHIP R 330K J 1/16W	
Q606		2SC5636	TRANSISTOR		R227		RK73HB1J220J	CHIP R 22 J 1/16W	
Q607		SSM3K15TE(F)	FET		R228		RK73HB1J000J	CHIP R 0.0 J 1/16W	
Q700		CPH3317	FET		R229		RK73HB1J000J	CHIP R 0.0 J 1/16W	
Q701		SSM3K15TE(F)	FET		R230		RK73HB1J271J	CHIP R 270 J 1/16W	
Q702		2SJ506-E(S)	FET		R231		RK73HB1J180J	CHIP R 18 J 1/16W	
Q703		LTC014EUBFS8	DIGITAL TRANSISTOR		R232		RK73HB1J271J	CHIP R 270 J 1/16W	
Q704		SSM5H01TU-F	FET		R233		RK73HB1J472J	CHIP R 4.7K J 1/16W	
Q705		CPH3317	FET		R234		RK73HB1J182J	CHIP R 1.8K J 1/16W	
Q706		SSM3K15TE(F)	FET		R235		RK73HB1J220J	CHIP R 22 J 1/16W	
Q800		SSM3K15TE(F)	FET		R236		RK73HB1J102J	CHIP R 1.0K J 1/16W	
R100		RK73GB2A102J	CHIP R 1.0K J 1/10W		R237		RK73HB1J680J	CHIP R 68 J 1/16W	
R101		RK73HB1J000J	CHIP R 0.0 J 1/16W		R238		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R105		RK73HB1J104J	CHIP R 100K J 1/16W		R243		RK73HB1J271J	CHIP R 270 J 1/16W	
R106		RK73HB1J104J	CHIP R 100K J 1/16W		R244		RK73HB1J180J	CHIP R 18 J 1/16W	
R107		RK73HB1J103J	CHIP R 10K J 1/16W		R245		RK73HB1J271J	CHIP R 270 J 1/16W	
R109		RK73HB1J104J	CHIP R 100K J 1/16W		R247		RK73GB2A180J	CHIP R 18 J 1/10W	
R110		RK73HB1J104J	CHIP R 100K J 1/16W		R248		RK73GB2A180J	CHIP R 18 J 1/10W	
R111		RK73HB1J101J	CHIP R 100 J 1/16W		R249		RK73GB2A180J	CHIP R 18 J 1/10W	
R112		RK73HB1J104J	CHIP R 100K J 1/16W		R250		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R113		RK73HB1J103J	CHIP R 10K J 1/16W		R251		RK73HB1J103J	CHIP R 10K J 1/16W	
R114		RK73HB1J101J	CHIP R 100 J 1/16W		R300		RK73HB1J331J	CHIP R 330 J 1/16W	
R115		RK73FB2B121J	CHIP R 120 J 1/8W		R301		RK73HB1J101J	CHIP R 100 J 1/16W	
R117		RK73HB1J220J	CHIP R 22 J 1/16W		R302		RK73HB1J473J	CHIP R 47K J 1/16W	
R118		RK73HB1J274J	CHIP R 270K J 1/16W		R303		RK73HB1J220J	CHIP R 22 J 1/16W	
R119		RK73HB1J393J	CHIP R 39K J 1/16W		R304		RK73HB1J104J	CHIP R 100K J 1/16W	
R120		RK73HB1J102J	CHIP R 1.0K J 1/16W		R305		RK73HB1J123J	CHIP R 12K J 1/16W	
R121		RK73HB1J821J	CHIP R 820 J 1/16W		R306		RK73HB1J103J	CHIP R 10K J 1/16W	
R122		RK73HB1J221J	CHIP R 220 J 1/16W		R310		RK73HB1J122J	CHIP R 1.2K J 1/16W	
R125		RK73HB1J000J	CHIP R 0.0 J 1/16W		R311		RK73GB2A100J	CHIP R 10 J 1/10W	
R126		RK73HB1J103J	CHIP R 10K J 1/16W		R312		RK73HB1J100J	CHIP R 10 J 1/16W	
R128		RK73HB1J000J	CHIP R 0.0 J 1/16W		R313		RK73HB1J272J	CHIP R 2.7K J 1/16W	
R129		RK73HB1J000J	CHIP R 0.0 J 1/16W		R314		RK73HB1J103J	CHIP R 10K J 1/16W	
R130		RK73HB1J274J	CHIP R 270K J 1/16W		R315		RK73GB2A101J	CHIP R 100 J 1/10W	
R131		RK73HB1J393J	CHIP R 39K J 1/16W		R316		RK73GB2A100J	CHIP R 10 J 1/10W	
R132		RK73HB1J104J	CHIP R 100K J 1/16W		R318		RK73HB1J220J	CHIP R 22 J 1/16W	
R133		RK73HB1J104J	CHIP R 100K J 1/16W		R320		RK73HB1J220J	CHIP R 22 J 1/16W	
R134		RK73HB1J104J	CHIP R 100K J 1/16W		R323		RK73HB1J151J	CHIP R 150 J 1/16W	
R135		RK73HB1J104J	CHIP R 100K J 1/16W		R332		RK73HB1J470J	CHIP R 47 J 1/16W	
R136		RK73HB1J104J	CHIP R 100K J 1/16W		R400		RK73HB1J224J	CHIP R 220K J 1/16W	
R137		RK73HB1J000J	CHIP R 0.0 J 1/16W		R401		RK73HB1J220J	CHIP R 22 J 1/16W	
R200		RK73HB1J223J	CHIP R 22K J 1/16W		R402		RK73HB1J101J	CHIP R 100 J 1/16W	
R201		RK73HB1J103J	CHIP R 10K J 1/16W		R403		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R202		RK73HB1J103J	CHIP R 10K J 1/16W		R404		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R203		RK73HB1J000J	CHIP R 0.0 J 1/16W		R405		RK73HB1J103J	CHIP R 10K J 1/16W	
R204		RK73HB1J224J	CHIP R 220K J 1/16W		R406		RK73HB1J220J	CHIP R 22 J 1/16W	
R205		RK73HB1J102J	CHIP R 1.0K J 1/16W		R407		RK73HB1J474J	CHIP R 470K J 1/16W	
R206		RK73HB1J334J	CHIP R 330K J 1/16W		R409		RK73HB1J473J	CHIP R 47K J 1/16W	
R207		RK73HB1J393J	CHIP R 39K J 1/16W		R410		RK73HB1J473J	CHIP R 47K J 1/16W	
R208		RK73HB1J000J	CHIP R 0.0 J 1/16W		R411		RK73HB1J473J	CHIP R 47K J 1/16W	
R209		RK73HB1J102J	CHIP R 1.0K J 1/16W		R412		RK73HB1J101J	CHIP R 100 J 1/16W	
R210		RK73HB1J124J	CHIP R 120K J 1/16W		R413		RK73HB1J000J	CHIP R 0.0 J 1/16W	

PARTS LIST

TX-RX UNIT (X57-894K-01)

Ref. No.	Address	Parts No.	Description	Desti- nation	Ref. No.	Address	Parts No.	Description	Desti- nation
R415		RK73HB1J223J	CHIP R 22K J 1/16W		R532		RK73HB1J103J	CHIP R 10K J 1/16W	
R416		RK73HB1J222J	CHIP R 2.2K J 1/16W		R533		RK73HB1J220J	CHIP R 22 J 1/16W	
R417		RK73HB1J220J	CHIP R 22 J 1/16W		R534		RK73HB1J682J	CHIP R 6.8K J 1/16W	
R418		RK73HB1J220J	CHIP R 22 J 1/16W		R535		RK73HB1J104J	CHIP R 100K J 1/16W	
R419		RK73HB1J472J	CHIP R 4.7K J 1/16W		R536		RK73HB1J272J	CHIP R 2.7K J 1/16W	
R420		RK73HB1J470J	CHIP R 47 J 1/16W		R537		RK73HB1J102J	CHIP R 1.0K J 1/16W	
R421		RK73HB1J562J	CHIP R 5.6K J 1/16W		R538		RK73HB1J221J	CHIP R 220 J 1/16W	
R422		RK73HB1J101J	CHIP R 100 J 1/16W		R539		RK73HB1J104J	CHIP R 100K J 1/16W	
R425		RK73HB1J183J	CHIP R 18K J 1/16W		R540		RK73HB1J104J	CHIP R 100K J 1/16W	
R426		RK73HB1J822J	CHIP R 8.2K J 1/16W		R541		RK73HB1J101J	CHIP R 100 J 1/16W	
R427		RK73HB1J473J	CHIP R 47K J 1/16W		R542		RK73HB1J104J	CHIP R 100K J 1/16W	
R428		RK73HB1J473J	CHIP R 47K J 1/16W		R543		RK73HB1J221J	CHIP R 220 J 1/16W	
R429		RK73HB1J220J	CHIP R 22 J 1/16W		R544		RK73HB1J104J	CHIP R 100K J 1/16W	
R431		RK73HB1J000J	CHIP R 0.0 J 1/16W		R545		RK73HB1J120J	CHIP R 12 J 1/16W	
R433		RK73HB1J000J	CHIP R 0.0 J 1/16W		R546		RK73HB1J681J	CHIP R 680 J 1/16W	
R434		RK73HB1J000J	CHIP R 0.0 J 1/16W		R547		RK73HB1J182J	CHIP R 1.8K J 1/16W	
R435		RK73HB1J000J	CHIP R 0.0 J 1/16W		R548		RK73HB1J182J	CHIP R 1.8K J 1/16W	
R436		RK73HB1J152J	CHIP R 1.5K J 1/16W		R549		RK73HB1J111J	CHIP R 110 J 1/16W	
R437		RK73HB1J152J	CHIP R 1.5K J 1/16W		R550		RK73HB1J152J	CHIP R 1.5K J 1/16W	
R438		RK73HB1J152J	CHIP R 1.5K J 1/16W		R551		RK73HB1J101J	CHIP R 100 J 1/16W	
R442		RK73HB1J821J	CHIP R 820 J 1/16W		R552		RK73HB1J102J	CHIP R 1.0K J 1/16W	
R443		RK73HB1J821J	CHIP R 820 J 1/16W		R602		RK73HB1J101J	CHIP R 100 J 1/16W	
R444		RK73HB1J122J	CHIP R 1.2K J 1/16W		R604		RK73HB1J104J	CHIP R 100K J 1/16W	
R447		RK73HB1J000J	CHIP R 0.0 J 1/16W		R605		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R448		RK73HB1J334J	CHIP R 330K J 1/16W		R606		RK73HB1J104J	CHIP R 100K J 1/16W	
R449		RK73HB1J334J	CHIP R 330K J 1/16W		R607		RK73HB1J104J	CHIP R 100K J 1/16W	
R450		RK73HB1J563J	CHIP R 56K J 1/16W		R608		RK73HB1J104J	CHIP R 100K J 1/16W	
R451		RK73HB1J104J	CHIP R 100K J 1/16W		R609		RK73HB1J472J	CHIP R 4.7K J 1/16W	
R452		RK73HB1J224J	CHIP R 220K J 1/16W		R610		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R453		RK73HB1J220J	CHIP R 22 J 1/16W		R611		RK73HB1J101J	CHIP R 100 J 1/16W	
R454		RK73HB1J000J	CHIP R 0.0 J 1/16W		R612		RK73HB1J470J	CHIP R 47 J 1/16W	
R500		RK73HB1J104J	CHIP R 100K J 1/16W		R613		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R501		RK73HB1J104D	CHIP R 100K D 1/16W		R614		RK73HB1J223J	CHIP R 22K J 1/16W	
R502		RK73HB1J104D	CHIP R 100K D 1/16W		R615		RK73HB1J273J	CHIP R 27K J 1/16W	
R503		RK73HB1J101J	CHIP R 100 J 1/16W		R616		RK73HB1J103J	CHIP R 10K J 1/16W	
R504		RK73HB1J220J	CHIP R 22 J 1/16W		R617		RK73HB1J104J	CHIP R 100K J 1/16W	
R505		RK73HB1J124J	CHIP R 120K J 1/16W		R618		RK73HB1J101J	CHIP R 100 J 1/16W	
R506		RK73HB1J471J	CHIP R 470 J 1/16W		R619		RK73HB1J221J	CHIP R 220 J 1/16W	
R507		RK73HB1J220J	CHIP R 22 J 1/16W		R620		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R509		RK73HB1J183J	CHIP R 18K J 1/16W		R621		RK73HB1J220J	CHIP R 22 J 1/16W	
R510		RK73HB1J223J	CHIP R 22K J 1/16W		R622		RK73HB1J103J	CHIP R 10K J 1/16W	
R511		RK73HB1J220J	CHIP R 22 J 1/16W		R623		RK73HB1J562J	CHIP R 5.6K J 1/16W	
R512		RK73HB1J223J	CHIP R 22K J 1/16W		R624		RK73HB1J224J	CHIP R 220K J 1/16W	
R513		RK73HB1J471J	CHIP R 470 J 1/16W		R625		RK73HB1J221J	CHIP R 220 J 1/16W	
R514		RK73HB1J220J	CHIP R 22 J 1/16W		R626		RK73HB1J472J	CHIP R 4.7K J 1/16W	
R515		RK73HB1J272J	CHIP R 2.7K J 1/16W		R627		RK73HB1J220J	CHIP R 22 J 1/16W	
R516		RK73HB1J000J	CHIP R 0.0 J 1/16W		R628		RK73HB1J471J	CHIP R 470 J 1/16W	
R518		RK73HB1J102J	CHIP R 1.0K J 1/16W		R629		RK73HB1J104J	CHIP R 100K J 1/16W	
R519		RK73HB1J181J	CHIP R 180 J 1/16W		R630		RK73HB1J104J	CHIP R 100K J 1/16W	
R520		RK73HB1J394J	CHIP R 390K J 1/16W		R631		RK73HB1J822J	CHIP R 8.2K J 1/16W	
R521		RK73HB1J154J	CHIP R 150K J 1/16W		R632		RK73HB1J182J	CHIP R 1.8K J 1/16W	
R522		RK73HB1J333J	CHIP R 33K J 1/16W		R633		RK73HB1J220J	CHIP R 22 J 1/16W	
R523		RK73HB1J151J	CHIP R 150 J 1/16W		R634		RK73HB1J473J	CHIP R 47K J 1/16W	
R524		RK73HB1J104J	CHIP R 100K J 1/16W		R635		RK73GB2A2R2J	CHIP R 2.2 J 1/10W	
R525		RK73HB1J000J	CHIP R 0.0 J 1/16W		R636		RK73HB1J104J	CHIP R 100K J 1/16W	
R527		RK73HB1J104J	CHIP R 100K J 1/16W		R637		RK73HB1J473J	CHIP R 47K J 1/16W	
R528		RK73HB1J224J	CHIP R 220K J 1/16W		R638		RK73HB1J220J	CHIP R 22 J 1/16W	
R529		RK73HB1J104J	CHIP R 100K J 1/16W		R639		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R530		RK73HB1J471J	CHIP R 470 J 1/16W		R640		RK73HB1J102J	CHIP R 1.0K J 1/16W	
R531		RK73HB1J103J	CHIP R 10K J 1/16W		R641		RK73HB1J000J	CHIP R 0.0 J 1/16W	

PARTS LIST

TX-RX UNIT (X57-894K-01)

RX VCO/PLL UNIT (X58-5190-10)

Ref. No.	Address	Parts No.	Description	Destination	Ref. No.	Address	Parts No.	Description	Destination
R642		RK73HB1J104J	CHIP R 100K J 1/16W		R806		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R643		RK73HB1J104J	CHIP R 100K J 1/16W		R807		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R644		RK73HB1J103J	CHIP R 10K J 1/16W		R808		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R645		RK73HB1J220J	CHIP R 22 J 1/16W		R809		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R646		RK73HB1J000J	CHIP R 0.0 J 1/16W		R810		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R647		RK73HB1J102J	CHIP R 1.0K J 1/16W		R811		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R648		RK73HB1J274J	CHIP R 270K J 1/16W		R812		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R649		RK73HB1J000J	CHIP R 0.0 J 1/16W		R813		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R650		RK73HB1J102J	CHIP R 1.0K J 1/16W		R814		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R651		RK73HB1J102J	CHIP R 1.0K J 1/16W		R815		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R652		RK73HB1J102J	CHIP R 1.0K J 1/16W		R816		RK73HB1J101J	CHIP R 100 J 1/16W	
R653		RK73HB1J124J	CHIP R 120K J 1/16W		R817		RK73HB1J101J	CHIP R 100 J 1/16W	
R654		RK73HB1J333J	CHIP R 33K J 1/16W		R818		RK73HB1J102J	CHIP R 1.0K J 1/16W	
R655		RK73HB1J394J	CHIP R 390K J 1/16W		R819		RK73HB1J683J	CHIP R 68K J 1/16W	
R656		RK73HB1J106J	CHIP R 10M J 1/16W		R820		RK73HB1J473J	CHIP R 47K J 1/16W	
R657		RK73HB1J223J	CHIP R 22K J 1/16W		R821		RK73HB1J394J	CHIP R 390K J 1/16W	
R658		RK73HB1J103J	CHIP R 10K J 1/16W		R822		RK73HB1J104J	CHIP R 100K J 1/16W	
R659		RK73HB1J224J	CHIP R 220K J 1/16W		R824		RK73HB1J101J	CHIP R 100 J 1/16W	
R660		RK73HB1J334J	CHIP R 330K J 1/16W		R825		RK73HB1J101J	CHIP R 100 J 1/16W	
R661		RK73HB1J393J	CHIP R 39K J 1/16W		R826		RK73HB1J562J	CHIP R 5.6K J 1/16W	
R663		RK73HB1J000J	CHIP R 0.0 J 1/16W		R827		RK73HB1J103J	CHIP R 10K J 1/16W	
R665		RK73HB1J000J	CHIP R 0.0 J 1/16W		R828		RK73HB1J224J	CHIP R 220K J 1/16W	
R666		RK73HB1J101J	CHIP R 100 J 1/16W		R829		RK73HB1J220J	CHIP R 22 J 1/16W	
R668		RK73HB1J472J	CHIP R 4.7K J 1/16W		R830		RK73HB1J334J	CHIP R 330K J 1/16W	
R669		RK73HB1J182J	CHIP R 1.8K J 1/16W		R831		RK73HB1J563J	CHIP R 56K J 1/16W	
R670		RK73HB1J271J	CHIP R 270 J 1/16W		R832		RK73HB1J683J	CHIP R 68K J 1/16W	
R671		RK73HB1J220J	CHIP R 22 J 1/16W		R833		RK73HB1J101J	CHIP R 100 J 1/16W	
R672		RK73HB1J180J	CHIP R 18 J 1/16W		R834		RK73HB1J101J	CHIP R 100 J 1/16W	
R680		RK73HB1J821J	CHIP R 820 J 1/16W		R835		RK73HB1J101J	CHIP R 100 J 1/16W	
R681		RK73HB1J5R6J	CHIP R 5.6 J 1/16W		R837		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R682		RK73HB1J821J	CHIP R 820 J 1/16W		R838		RK73HB1J101J	CHIP R 100 J 1/16W	
R683		RK73HB1J000J	CHIP R 0.0 J 1/16W		R840		RK73HB1J101J	CHIP R 100 J 1/16W	
R684		RK73HB1J000J	CHIP R 0.0 J 1/16W		R841		RK73HB1J101J	CHIP R 100 J 1/16W	
R685		RK73HB1J000J	CHIP R 0.0 J 1/16W		R842		RK73HB1J104J	CHIP R 100K J 1/16W	
R686		RK73HB1J472J	CHIP R 4.7K J 1/16W		R843		RK73HB1J104J	CHIP R 100K J 1/16W	
R687		RK73HB1J472J	CHIP R 4.7K J 1/16W		R844		RK73HB1J104J	CHIP R 100K J 1/16W	
R689		RK73HB1J271J	CHIP R 270 J 1/16W		R845		RK73HB1J104J	CHIP R 100K J 1/16W	
R690		RK73HB1J271J	CHIP R 270 J 1/16W		R846		RK73HB1J104J	CHIP R 100K J 1/16W	
R700		RK73HB1J330J	CHIP R 33 J 1/16W		R847		RK73HB1J104J	CHIP R 100K J 1/16W	
R701		RK73HB1J100J	CHIP R 10 J 1/16W		R848		RK73HB1J104J	CHIP R 100K J 1/16W	
R702		RK73HB1J473J	CHIP R 47K J 1/16W		R849		RK73HB1J104J	CHIP R 100K J 1/16W	
R703		RK73HB1J000J	CHIP R 0.0 J 1/16W		R850		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R704		RK73HB1J472J	CHIP R 4.7K J 1/16W		R851		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R705		RK73HB1J104J	CHIP R 100K J 1/16W		R853		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R706		RK73HB1J102J	CHIP R 1.0K J 1/16W		R855		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R707		RK73HB1J154J	CHIP R 150K J 1/16W		R856		RK73GB2A220J	CHIP R 22 J 1/10W	
R708		RK73HB1J473J	CHIP R 47K J 1/16W		R860		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R709		RK73HB1J473J	CHIP R 47K J 1/16W		R861		RK73HB1J000J	CHIP R 0.0 J 1/16W	
R710		RK73HB1J472J	CHIP R 4.7K J 1/16W		X500		L77-3034-05	TCXO (19.2M/4P/12)	
R711		RK73HB1J123J	CHIP R 12K J 1/16W		X600		L77-1960-15	VCXO (16.8MHZ/1.5PPM)	
R712		RK73HB1J474J	CHIP R 470K J 1/16W		XF300		L71-0649-05	MCF(58.05MHZ)	
R713		RK73HH1J334D	CHIP R 330K D 1/16W						
R714		RK73HH1J223D	CHIP R 22K D 1/16W						
R715		RK73HB1J000J	CHIP R 0.0 J 1/16W						
R716		RK73HB1J000J	CHIP R 0.0 J 1/16W						
R717		RK73HB1J000J	CHIP R 0.0 J 1/16W						
R800		RK73HB1J000J	CHIP R 0.0 J 1/16W						
R801		RK73HB1J000J	CHIP R 0.0 J 1/16W						
R802		RK73HB1J000J	CHIP R 0.0 J 1/16W						
R803		RK73HB1J000J	CHIP R 0.0 J 1/16W						
RX VCO/PLL UNIT (X58-5190-10)									
C300		F10-2377-14	SHIELDING CASE						
C303		C93-1906-05	CHIP FILM 0.047U 16V						
C304		CS77ABE1D100M	CHIP C 10UF M						
C306		CC73GCH1H100C	CHIP C 10PF C						
		CC73GCH1H100C	CHIP C 10PF C						

PARTS LIST

RX VCO/PLL UNIT (X58-5190-10)

Ref. No.	Address	Parts No.	Description	Desti- nation	Ref. No.	Address	Parts No.	Description	Desti- nation
C307		CS77MA1V0R1M	CHIP TNTL 0.1UF 35WV		D353		1SV325F	VARIABLE CAPACITANCE DIODE	
C308		CK73HBB1E103K	CHIP C 0.01UF K		D355		1SV282-F	VARIABLE CAPACITANCE DIODE	
C309		CK73HBB1E103K	CHIP C 0.01UF K		D357		1SV282-F	VARIABLE CAPACITANCE DIODE	
C310		CK73HBB1E103K	CHIP C 0.01UF K		D358		1SV282-F	VARIABLE CAPACITANCE DIODE	
C311		CK73HBB1H102K	CHIP C 1000PF K		D359		1SV282-F	VARIABLE CAPACITANCE DIODE	
C312		CC73GCH1H180J	CHIP C 18PF J		D360		1SV282-F	VARIABLE CAPACITANCE DIODE	
C313		CC73HCH1H101J	CHIP C 100PF J		D361		1SV282-F	VARIABLE CAPACITANCE DIODE	
C314		CS77BA1E010M	CHIP TNTL 1.0UF 25WV		IC300		SKY72310362LF	MOS-IC	
C315		CC73HCH1H101J	CHIP C 100PF J		L300		LB73H0AV-003	CHIP FERRITE BEADS	
C316		CC73HCH1H101J	CHIP C 100PF J		L303		L41-1295-33	SMALL FIXED INDUCTOR(1.2UH)	
C317		CK73HBB1E103K	CHIP C 0.01UF K		L305		LB73H0AV-003	CHIP FERRITE BEADS	
C318		CC73HCH1H101J	CHIP C 100PF J		L306		LB73H0AV-003	CHIP FERRITE BEADS	
C319		CK73HBB1H102K	CHIP C 1000PF K		L307		L41-6868-14	SMALL FIXED INDUCTOR(6.8NH)	
C320		CC73HCH1H101J	CHIP C 100PF J		L309		L41-3978-14	SMALL FIXED INDUCTOR(39NH)	
C321		CC73HCH1H101J	CHIP C 100PF J		L310		LB73H0AV-003	CHIP FERRITE BEADS	
C322		CC73HCH1H101J	CHIP C 100PF J		L312		LB73H0AV-003	CHIP FERRITE BEADS	
C323		CC73GCH1H030B	CHIP C 3.0PF B		L313		LB73H0AV-003	CHIP FERRITE BEADS	
C324		CC73HCH1H101J	CHIP C 100PF J		L314		L41-6868-14	SMALL FIXED INDUCTOR(6.8NH)	
C326		CC73HCH1H101J	CHIP C 100PF J		L315		L41-2778-14	SMALL FIXED INDUCTOR(27NH)	
C328		CC73GCH1H180J	CHIP C 18PF J		L350		L41-1005-33	SMALL FIXED INDUCTOR(10UH)	
C329		CK73HBB1H102K	CHIP C 1000PF K		L351		L41-1005-33	SMALL FIXED INDUCTOR(10UH)	
C330		CC73HCH1H040B	CHIP C 4.0PF B		L352		L41-1005-33	SMALL FIXED INDUCTOR(10UH)	
C331		CK73HBB1H102K	CHIP C 1000PF K		L353		L41-1005-33	SMALL FIXED INDUCTOR(10UH)	
C332		CC73HCH1H100C	CHIP C 10PF C		L354		L41-1005-33	SMALL FIXED INDUCTOR(10UH)	
C333		CK73HBB1E103K	CHIP C 0.01UF K		L355		L41-1005-33	SMALL FIXED INDUCTOR(10UH)	
C335		CC73HCH1H101J	CHIP C 100PF J		L356		L41-1005-33	SMALL FIXED INDUCTOR(10UH)	
C352		CC73HCH1H101J	CHIP C 100PF J		L357		L41-1005-33	SMALL FIXED INDUCTOR(10UH)	
C353		CC73HCH1H101J	CHIP C 100PF J		L358		L34-4612-05	AIR-CORE COIL	
C354		CK73GBB1H102K	CHIP C 1000PF K		L359		L34-4612-05	AIR-CORE COIL	
C355		CK73GBB1H102K	CHIP C 1000PF K		L360		L41-1005-33	SMALL FIXED INDUCTOR(10UH)	
C356		CK73HBB1H102K	CHIP C 1000PF K		L361		L41-1005-33	SMALL FIXED INDUCTOR(10UH)	
C357		CK73HBB1H102K	CHIP C 1000PF K		L362		L41-1005-33	SMALL FIXED INDUCTOR(10UH)	
C358		CK73HBB1E103K	CHIP C 0.01UF K		L363		L41-1005-33	SMALL FIXED INDUCTOR(10UH)	
C359		CK73HBB1E103K	CHIP C 0.01UF K		L364		L41-8275-33	SMALL FIXED INDUCTOR(82NH)	
C360		CK73HBB1H102K	CHIP C 1000PF K		L365		LB73H0AV-003	CHIP FERRITE BEADS	
C361		CK73HBB1H102K	CHIP C 1000PF K		L366		LB73H0AV-003	CHIP FERRITE BEADS	
C362		CC73GCH1H330G	CHIP C 33PF G		Q300		2SC5636	TRANSISTOR	
C363		CC73GCH1H220G	CHIP C 22PF G		Q350		SSM6L05FU-F	FET	
C364		CC73GCH1H070B	CHIP C 7.0PF B		Q351		SSM6L05FU-F	FET	
C365		CC73GCH1H050B	CHIP C 5.0PF B		Q352		MCH3914-H/8/	FET	
C366		CK73HBB1H102K	CHIP C 1000PF K		Q353		MCH3914-H/8/	FET	
C367		CK73HBB1H102K	CHIP C 1000PF K		Q354		2SC5636	TRANSISTOR	
C368		CC73GCH1H150G	CHIP C 15PF G		R301		RK73GB2A391J	CHIP R 390 J 1/16W	
C369		CC73GCH1H120G	CHIP C 12PF G		R302		RK73GB2A151J	CHIP R 150 J 1/10W	
C370		CC73GCH1H080B	CHIP C 8.0PF B		R303		RK73GB2A000J	CHIP R 0.0 J 1/10W	
C371		CC73GCH1H080B	CHIP C 8.0PF B		R304		RK73HB1J472J	CHIP R 4.7K J 1/16W	
C372		CC73GCH1H080B	CHIP C 8.0PF B		R305		RK73GB2A000J	CHIP R 0.0 J 1/10W	
C373		CC73GCH1H080B	CHIP C 8.0PF B		R306		RK73HB1J100J	CHIP R 10 J 1/16W	
C374		CC73GCH1H010B	CHIP C 1.0PF B		R307		RK73HB1J470J	CHIP R 47 J 1/16W	
C375		CC73GCH1H010B	CHIP C 1.0PF B		R308		RK73HB1J100J	CHIP R 10 J 1/16W	
C376		CK73HBB1H102K	CHIP C 1000PF K		R310		RK73HB1J102J	CHIP R 1.0K J 1/16W	
C377		CK73HBB1H102K	CHIP C 1000PF K		R311		RK73HB1J100J	CHIP R 10 J 1/16W	
C378		CC73HCH1H100C	CHIP C 10PF C		R312		RK73HB1J330J	CHIP R 33 J 1/16W	
C379		CC730AD1H104J	CHIP C 100PF J		R313		RK73HB1J103J	CHIP R 10K J 1/16W	
C380		CC73GCH1H030B	CHIP C 3.0PF B		R314		RK73HB1J472J	CHIP R 4.7K J 1/16W	
C381		CC73GCH1H030B	CHIP C 3.0PF B		R315		RK73HB1J101J	CHIP R 100 J 1/16W	
CN303		E40-5816-05	PIN ASSY		R316		RK73HB1J100J	CHIP R 10 J 1/16W	
CN350		E40-6860-05	PIN ASSY		R317		RK73HB1J101J	CHIP R 100 J 1/16W	
CN351		E40-6098-05	PIN ASSY		R319		RK73HB1J331J	CHIP R 330 J 1/16W	
D352		1SV325F	VARIABLE CAPACITANCE DIODE		R320		RK73HB1J223J	CHIP R 22K J 1/16W	

TKR-D710

PARTS LIST

RX VCO/PLL UNIT (X58-5190-10)

TX VCO/PLL UNIT (X58-5200-10)

Ref. No.	Address	Parts No.	Description	Destination	Ref. No.	Address	Parts No.	Description	Destination
R321		RK73HB1J103J	CHIP R 10K J 1/16W		C330		CC73HCH1H050C	CHIP C 5.0PF C	
R322		RK73HB1J8R2J	CHIP R 8.2 J 1/16W		C331		CK73HBB1H102K	CHIP C 1000PF K	
R323		RK73HB1J151J	CHIP R 150 J 1/16W		C332		CK73HBB1H102K	CHIP C 1000PF K	
R324		RK73HB1J8R2J	CHIP R 8.2 J 1/16W		C333		CK73HBB1E103K	CHIP C 0.01UF K	
R325		RK73GB2A000J	CHIP R 0.0 J 1/10W		C335		CC73HCH1H101J	CHIP C 100PF J	
R327		RK73GB2A000J	CHIP R 0.0 J 1/10W		C350		CC730AD1H104J	CHIP C 100PF J	
R331		RK73GB2A000J	CHIP R 0.0 J 1/10W		C354		CK73GBB1H102K	CHIP C 1000PF K	
R333		RK73HB1J000J	CHIP R 0.0 J 1/16W		C355		CK73GBB1H102K	CHIP C 1000PF K	
R350		RK73HB1J474J	CHIP R 470K J 1/16W		C356		CK73HBB1H102K	CHIP C 1000PF K	
R351		RK73HB1J474J	CHIP R 470K J 1/16W		C357		CK73HBB1H102K	CHIP C 1000PF K	
R352		RK73HB1J000J	CHIP R 0.0 J 1/16W		C358		CK73HBB1E103K	CHIP C 0.01UF K	
R354		RK73HB1J474J	CHIP R 470K J 1/16W		C359		CK73HBB1E103K	CHIP C 0.01UF K	
R357		RK73HB1J000J	CHIP R 0.0 J 1/16W		C360		CK73HBB1H102K	CHIP C 1000PF K	
R358		RK73HB1J000J	CHIP R 0.0 J 1/16W		C361		CK73HBB1H102K	CHIP C 1000PF K	
R361		RN73GH1J330D	CHIP R 33 D 1/16W		C362		CC73GCH1H220G	CHIP C 22PF G	
R362		RN73GH1J330D	CHIP R 33 D 1/16W		C363		CC73GCH1H220G	CHIP C 22PF G	
R363		RN73GH1J271D	CHIP R 270 D 1/16W		C366		CK73HBB1H102K	CHIP C 1000PF K	
R364		RN73GH1J271D	CHIP R 270 D 1/16W		C367		CK73HBB1H102K	CHIP C 1000PF K	
R365		RN73GH1J470D	CHIP R 47 D 1/16W		C368		CC73GCH1H020B	CHIP C 2.0PF B	
R366		RN73GH1J470D	CHIP R 47 D 1/16W		C369		CC73GCH1H030B	CHIP C 3.0PF B	
R367		RK73HB1J330J	CHIP R 33 J 1/16W		C372		CC73GCH1H150G	CHIP C 15PF G	
R368		RN73GH1J473D	CHIP R 47K D 1/16W		C373		CC73GCH1H150G	CHIP C 15PF G	
R369		RN73GH1J103D	CHIP R 10K D 1/16W		C374		CC73GCH1H010B	CHIP C 1.0PF B	
R370		RK73HB1J221J	CHIP R 220 J 1/16W		C375		CC73GCH1H010B	CHIP C 1.0PF B	
R372		RK73HB1J000J	CHIP R 0.0 J 1/16W		C376		CK73HBB1H102K	CHIP C 1000PF K	
R374		RK73GB2A000J	CHIP R 0.0 J 1/10W		C377		CK73HBB1H102K	CHIP C 1000PF K	
R377		RK73GB2A000J	CHIP R 0.0 J 1/10W		C378		CC73HCH1H120J	CHIP C 12PF J	
R379		RK73HB1J000J	CHIP R 0.0 J 1/16W		C379		CC730AD1H104J	CHIP C 100PF J	
					C382		CC73GCH1H050B	CHIP C 5.0PF B	
					C384		CC73GCH1H050B	CHIP C 5.0PF B	
					CN303	E40-5816-05		PIN ASSY	
					CN350	E40-6860-05		PIN ASSY	
					CN351	E40-6098-05		PIN ASSY	
					D352	1SV282-F		VARIABLE CAPACITANCE DIODE	
					D353	1SV282-F		VARIABLE CAPACITANCE DIODE	
					D355	1SV282-F		VARIABLE CAPACITANCE DIODE	
					D357	1SV282-F		VARIABLE CAPACITANCE DIODE	
					D358	1SV282-F		VARIABLE CAPACITANCE DIODE	
					C359	1SV282-F		VARIABLE CAPACITANCE DIODE	
					D360	1SV282-F		VARIABLE CAPACITANCE DIODE	
					D361	1SV282-F		VARIABLE CAPACITANCE DIODE	
					IC300	SKY72310362LF		MOS-IC	
					L300	LB73H0AV-003		CHIP FERRITE BEADS	
					L303	L41-1295-33		SMALL FIXED INDUCTOR(1.2UH)	
					L305	LB73H0AV-003		CHIP FERRITE BEADS	
					L306	LB73H0AV-003		CHIP FERRITE BEADS	
					L307	L41-6868-14		SMALL FIXED INDUCTOR(6.8NH)	
					L309	L41-6878-14		SMALL FIXED INDUCTOR(68NH)	
					L310	LB73H0AV-003		CHIP FERRITE BEADS	
					L312	LB73H0AV-003		CHIP FERRITE BEADS	
					L313	LB73H0AV-003		CHIP FERRITE BEADS	
					L314	L41-6868-14		SMALL FIXED INDUCTOR(6.8NH)	
					L315	L41-4778-14		SMALL FIXED INDUCTOR(47NH)	
					L350	L41-1005-33		SMALL FIXED INDUCTOR(10UH)	
					L351	L41-1005-33		SMALL FIXED INDUCTOR(10UH)	
					L352	L41-1005-33		SMALL FIXED INDUCTOR(10UH)	
					L353	L41-1005-33		SMALL FIXED INDUCTOR(10UH)	
					L354	L41-2295-33		SMALL FIXED INDUCTOR(2.2UH)	
					L355	L41-2295-33		SMALL FIXED INDUCTOR(2.2UH)	
					L356	L41-1005-33		SMALL FIXED INDUCTOR(10UH)	
TX VCO/PLL UNIT (X58-5200-10)									
-		F10-2377-14	SHIELDING CASE						
C300		C93-1906-05	CHIP FILM 0.047U 16V		D355	1SV282-F		VARIABLE CAPACITANCE DIODE	
C303		CS77ABE1D100M	CHIP C 10UF M		D357	1SV282-F		VARIABLE CAPACITANCE DIODE	
C304		CC73GCH1H100C	CHIP C 10PF C		D358	1SV282-F		VARIABLE CAPACITANCE DIODE	
C306		CC73GCH1H100C	CHIP C 10PF C		D359	1SV282-F		VARIABLE CAPACITANCE DIODE	
C307		CS77MA1VR15M	CHIP TNTL 0.15UF 35WV		D360	1SV282-F		VARIABLE CAPACITANCE DIODE	
C308		CK73HBB1E103K	CHIP C 0.01UF K		D361	1SV282-F		VARIABLE CAPACITANCE DIODE	
C309		CK73HBB1E103K	CHIP C 0.01UF K		IC300	SKY72310362LF		MOS-IC	
C310		CK73HBB1E103K	CHIP C 0.01UF K		L300	LB73H0AV-003		CHIP FERRITE BEADS	
C311		CK73HBB1H102K	CHIP C 1000PF K		L303	L41-1295-33		SMALL FIXED INDUCTOR(1.2UH)	
					L305	LB73H0AV-003		CHIP FERRITE BEADS	
C312		CC73GCH1H330G	CHIP C 33PF G		L306	LB73H0AV-003		CHIP FERRITE BEADS	
C313		CC73HCH1H101J	CHIP C 100PF J		L307	L41-6868-14		SMALL FIXED INDUCTOR(6.8NH)	
C314		CS77BA1E010M	CHIP TNTL 1.0UF 25WV		L309	L41-6878-14		SMALL FIXED INDUCTOR(68NH)	
C315		CC73HCH1H101J	CHIP C 100PF J		L310	LB73H0AV-003		CHIP FERRITE BEADS	
C316		CC73HCH1H101J	CHIP C 100PF J		L312	LB73H0AV-003		CHIP FERRITE BEADS	
C317		CK73HBB1E103K	CHIP C 0.01UF K		L313	LB73H0AV-003		CHIP FERRITE BEADS	
C318		CC73HCH1H101J	CHIP C 100PF J		L314	L41-6868-14		SMALL FIXED INDUCTOR(6.8NH)	
C320		CC73HCH1H101J	CHIP C 100PF J		L315	L41-4778-14		SMALL FIXED INDUCTOR(47NH)	
C321		CC73HCH1H101J	CHIP C 100PF J		L350	L41-1005-33		SMALL FIXED INDUCTOR(10UH)	
C322		CC73HCH1H101J	CHIP C 100PF J		L351	L41-1005-33		SMALL FIXED INDUCTOR(10UH)	
C323		CC73GCH1H030B	CHIP C 3.0PF B		L352	L41-1005-33		SMALL FIXED INDUCTOR(10UH)	
C324		CC73HCH1H101J	CHIP C 100PF J		L353	L41-1005-33		SMALL FIXED INDUCTOR(10UH)	
C326		CC73HCH1H101J	CHIP C 100PF J		L354	L41-2295-33		SMALL FIXED INDUCTOR(2.2UH)	
C328		CC73GCH1H330G	CHIP C 33PF G		L355	L41-2295-33		SMALL FIXED INDUCTOR(2.2UH)	
C329		CK73HBB1H102K	CHIP C 1000PF K		L356	L41-1005-33		SMALL FIXED INDUCTOR(10UH)	

PARTS LIST

TX VCO/PLL UNIT (X58-5200-10)

Ref. No.	Address	Parts No.	Description	Desti- nation	Ref. No.	Address	Parts No.	Description	Desti- nation
L357		L41-1005-33	SMALL FIXED INDUCTOR(10UH)		R374		RK73GB2A000J	CHIP R 0.0 J 1/10W	
L358		L34-4613-05	AIR-CORE COIL		R377		RK73GB2A000J	CHIP R 0.0 J 1/10W	
L359		L34-4612-05	AIR-CORE COIL		R379		RK73HB1J000J	CHIP R 0.0 J 1/16W	
L362		L41-1005-33	SMALL FIXED INDUCTOR(10UH)						
L363		L41-1005-33	SMALL FIXED INDUCTOR(10UH)						
L364		LR77Z0AA68NJ	SMALL FIXED INDUCTOR(68NH)						
L365		LB73H0AV-003	CHIP FERRITE BEADS						
L366		LB73H0AV-003	CHIP FERRITE BEADS						
Q300		2SC5636	TRANSISTOR						
Q350		SSM6L05FU-F	FET						
Q351		SSM6L05FU-F	FET						
Q352		MCH3914-H/8/	FET						
Q353		MCH3914-H/8/	FET						
Q354		2SC5636	TRANSISTOR						
R301		RK73GB2A391J	CHIP R 390 J 1/16W						
R302		RK73GB2A151J	CHIP R 150 J 1/10W						
R303		RK73GB2A000J	CHIP R 0.0 J 1/10W						
R305		RK73GB2A000J	CHIP R 0.0 J 1/10W						
R306		RK73HB1J100J	CHIP R 10 J 1/16W						
R307		RK73HB1J560J	CHIP R 56 J 1/16W						
R308		RK73HB1J100J	CHIP R 10 J 1/16W						
R310		RK73HB1J102J	CHIP R 1.0K J 1/16W						
R311		RK73HB1J100J	CHIP R 10 J 1/16W						
R312		RK73HB1J470J	CHIP R 47 J 1/16W						
R313		RK73HB1J473J	CHIP R 47K J 1/16W						
R315		RK73HB1J101J	CHIP R 100 J 1/16W						
R316		RK73HB1J100J	CHIP R 10 J 1/16W						
R317		RK73HB1J101J	CHIP R 100 J 1/16W						
R318		RK73HB1J222J	CHIP R 2.2K J 1/16W						
R319		RK73HB1J331J	CHIP R 330 J 1/16W						
R320		RK73HB1J103J	CHIP R 10K J 1/16W						
R321		RK73HB1J562J	CHIP R 5.6K J 1/16W						
R322		RK73HB1J8R2J	CHIP R 8.2 J 1/16W						
R323		RK73HB1J151J	CHIP R 150 J 1/16W						
R324		RK73HB1J8R2J	CHIP R 8.2 J 1/16W						
R325		RK73GB2A000J	CHIP R 0.0 J 1/10W						
R327		RK73GB2A000J	CHIP R 0.0 J 1/10W						
R331		RK73GB2A000J	CHIP R 0.0 J 1/10W						
R333		RK73HB1J000J	CHIP R 0.0 J 1/16W						
R350		RK73HB1J474J	CHIP R 470K J 1/16W						
R351		RK73HB1J474J	CHIP R 470K J 1/16W						
R353		RK73HB1J000J	CHIP R 0.0 J 1/16W						
R354		RK73HB1J474J	CHIP R 470K J 1/16W						
R355		RK73HB1J103J	CHIP R 10K J 1/16W						
R356		RK73HB1J470J	CHIP R 47 J 1/16W						
R357		RK73HB1J000J	CHIP R 0.0 J 1/16W						
R358		RK73HB1J000J	CHIP R 0.0 J 1/16W						
R361		RN73GH1J330D	CHIP R 33 D 1/16W						
R362		RN73GH1J330D	CHIP R 33 D 1/16W						
R363		RN73GH1J331D	CHIP R 330 D 1/16W						
R364		RN73GH1J331D	CHIP R 330 D 1/16W						
R365		RN73GH1J470D	CHIP R 47 D 1/16W						
R366		RN73GH1J470D	CHIP R 47 D 1/16W						
R367		RK73HB1J330J	CHIP R 33 J 1/16W						
R368		RN73GH1J473D	CHIP R 47K D 1/16W						
R369		RN73GH1J103D	CHIP R 10K D 1/16W						
R370		RK73HB1J221J	CHIP R 220 J 1/16W						
R371		RK73HB1J681J	CHIP R 680 J 1/16W						
R372		RK73HB1J000J	CHIP R 0.0 J 1/16W						
R373		RK73HB1J474J	CHIP R 470K J 1/16W						