


EXPLODED VIEW (UNIT)

Block No.M1MM

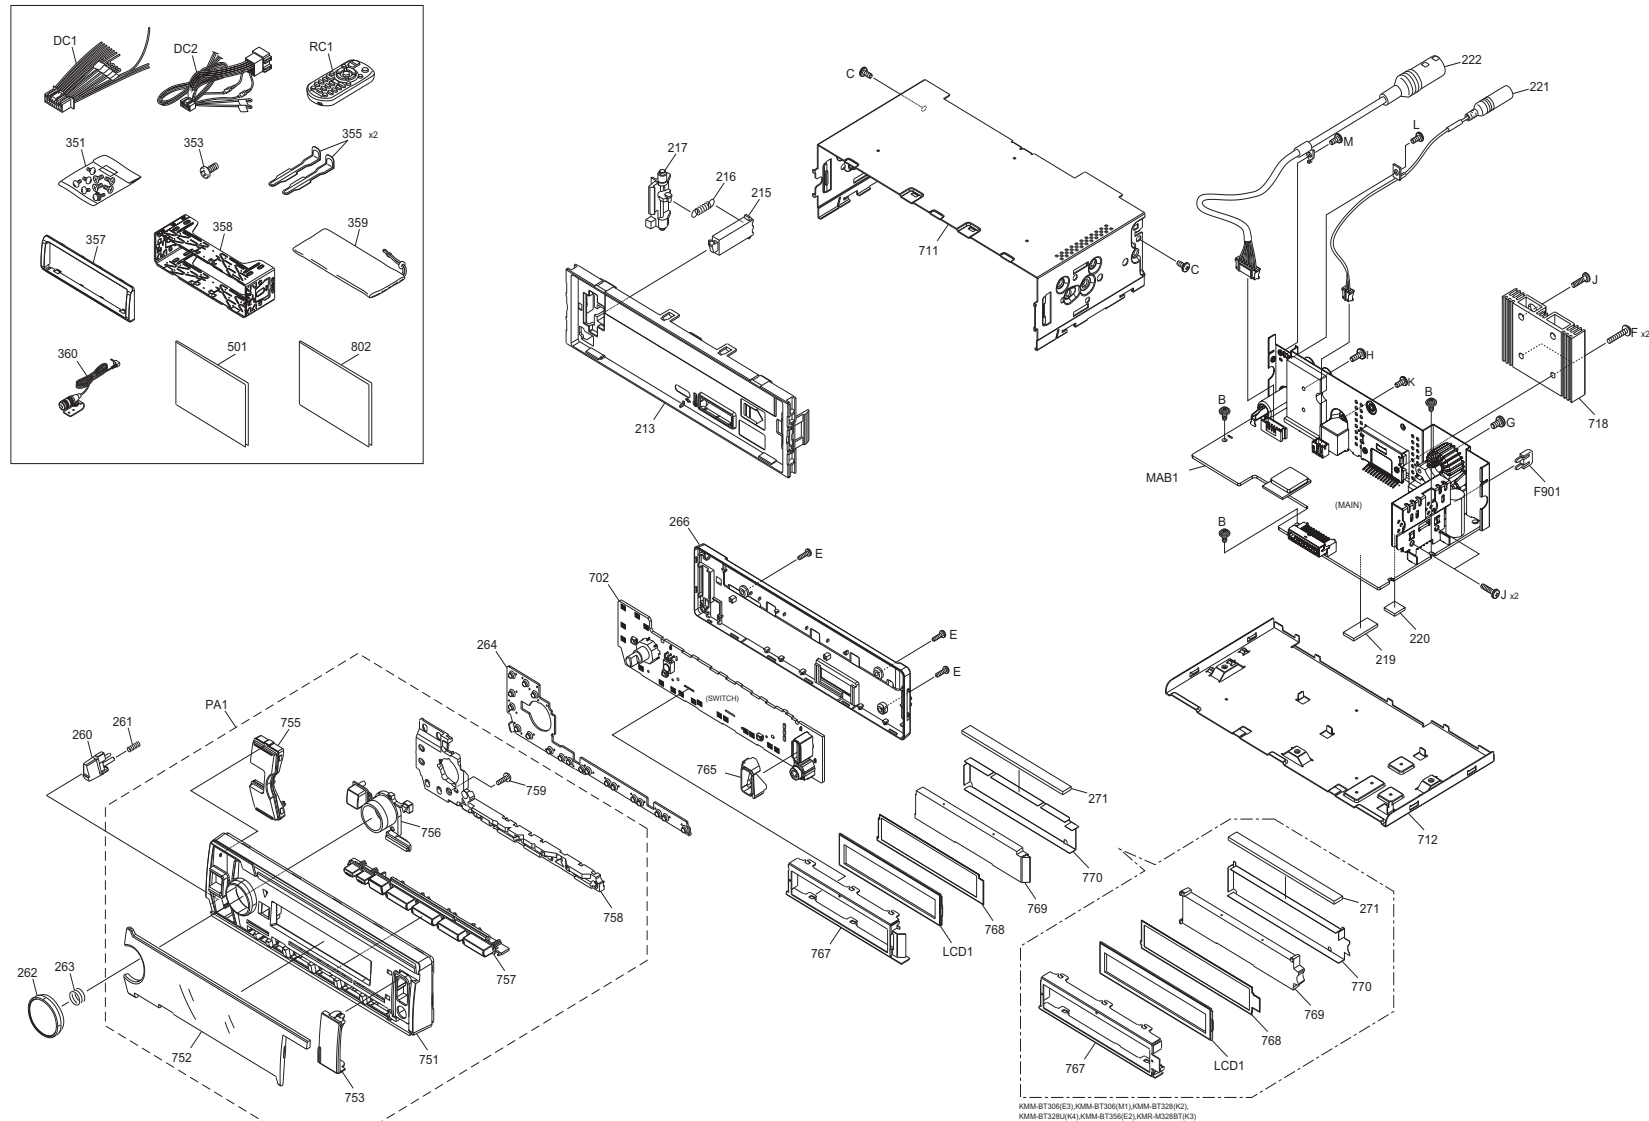

No.WA416

(No.WA416<Rev.001>)3/14

Parts with the exploded numbers larger than 700 are not supplied.

created date:2019-08-05

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT206EN	E1	KMM-BT228UKN	K0	KMM-BT306EN	E3	KMM-BT306MN	M1
KMM-BT328KN	K2	KMM-BT328UKN	K4	KMM-BT356EN	E2	KMR-M328BTKN	K3

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (UNIT) <M1MM>						
△	DC1	E3A-0324-00	DC CORD		1	K0,M1,K2,K4,K3
△	DC2	E3A-0320-00	DC CORD		1	E1,E3,E2
	MAB1	CB-XJ1278E01N	MAIN PWB	XJ1-278E-01	1	E1
	MAB1	CB-XJ1278K00N	MAIN PWB	XJ1-278K-00	1	K0
	MAB1	CB-XJ1278E02N	MAIN PWB	XJ1-278E-02	1	E3
	MAB1	CB-XJ1278M01N	MAIN PWB	XJ1-278M-01	1	M1
	MAB1	CB-XJ1278K04N	MAIN PWB	XJ1-278K-04	1	K2
	MAB1	CB-XJ1278K03N	MAIN PWB	XJ1-278K-03	1	K4
	MAB1	CB-XJ1278E04N	MAIN PWB	XJ1-278E-04	1	E2
	MAB1	CB-XJ1278K02N	MAIN PWB	XJ1-278K-02	1	K3
△	F901	FZB10BT-100	BLADE FUSE		1	
	LCD1	B3H-0034-00	LCD		1	E1,K0
	LCD1	B3H-0102-00	LCD		1	E3,M1,K2,K4,E2
	LCD1	B3H-0107-00	LCD		1	K3
	PA1	A6D-0126-0V	PANEL ASSY		1	E1
	PA1	A6D-0126-0Q	PANEL ASSY		1	K0
	PA1	A6D-0126-0U	PANEL ASSY		1	E3
	PA1	A6D-0126-0X	PANEL ASSY		1	M1
	PA1	A6D-0126-0P	PANEL ASSY		1	K2
	PA1	A6D-0126-0N	PANEL ASSY		1	K4
	PA1	A6D-0162-01	PANEL ASSY		1	E2
	PA1	A6D-0126-0M	PANEL ASSY		1	K3
	RC1	A7A-0019-00	REMOTE CTL(IR)		1	M1,K2,E2
	B	LV41200-004A	SPECIAL SCREW		3	
	C	QYSDST2606ZA	TAP SCREW	M2.6 x 6.0mm	2	
	E	QYSDSF2008ZA	TAP SCREW	M2.0 x 8.0mm	3	
	F	GE40377-005A	SPECIAL SCREW		2	
	G	QYSPSG3008ZA	TAP SCREW	M3.0 x 8.0mm	1	
	H	QYSDSF2608ZA	TAP SCREW	M2.6 x 8.0mm	1	
	J	QYSDST2608ZA	TAP SCREW	M2.6 x 8.0mm	3	
	K	QYSDST2606ZA	TAP SCREW	M2.6 x 6.0mm	1	K4,K3
	L	QYSDST2606ZA	TAP SCREW	M2.6 x 6.0mm	1	K4,K3
	M	QYSDST2606ZA	TAP SCREW	M2.6 x 6.0mm	1	K3
	213	A2C-0063-02	SUB PANEL		1	
	215	D1A-0023-00	LEVER		1	
	216	G0A-0027-00	EXTEN.SPRING		1	
	217	D1A-0022-00	LEVER		1	
	219	F0C-0073-00	COOL SHEET		1	
	220	LV46006-001A	COOLING RUBBER		1	E1,E3,M1,E2
	221	E3A-0423-10	CORD W.CON.		1	K4,K3
	222	E3A-0442-10	CORD W.CON.		1	K3
	260	K2K-0388-00	KNOB		1	
	261	GE30999-013A	COMP. SPRING		1	
	262	K2K-0101-00	KNOB		1	E1,K0
	262	K2K-0165-00	KNOB BASE		1	E3,M1,K2,K4,E2,K3
	263	GE40127-005A	KNOB SPRING		1	
	264	E2K-0069-00	CONDUCT RUBBER		1	
	266	A4G-0093-01	REAR COVER		1	
	271	QNZ1117-001	RUBBER CONNE		1	E1,K0
	271	E2K-0029-00	CONDUCT RUBBER		1	E3,M1,K2,K4,E2,K3
	351	GE40531-001A	SCREW SET		1	M1,K2,K3
	353	QYSPSF2008ZA	TAP SCREW	M2.0 x 8.0mm	1	K0,M1,K2,K4,K3
	355	GE40646-001A	HOOK		2	
	357	B0H-0013-06	ESCUTCHEON		1	E1,E3,M1,E2
	357	B0H-0014-00	ESCUTCHEON		1	K0,K2,K4
	357	B0H-0013-07	ESCUTCHEON		1	K3
	358	GE20342-001A	MOUNTING SLEEVE		1	
	359	GE40521-001A	CARRYING CASE		1	M1
	360	T9B-0073-00	MICROPHONE		1	
	501	B5A-3147-00	INST.MANUAL		1	M1
	702	-----	SWITCH PWB	NO SERVICE PART	1	E1
	702	-----	SWITCH PWB	NO SERVICE PART	1	K0
	702	-----	SWITCH PWB	NO SERVICE PART	1	E3
	702	-----	SWITCH PWB	NO SERVICE PART	1	M1,K2,K4,E2
	702	-----	SWITCH PWB	NO SERVICE PART	1	K3
	711	-----	TOP COVER	NO SERVICE PART	1	
	712	-----	BOTTOM PLATE	NO SERVICE PART	1	
	718	-----	HEAT SINK	NO SERVICE PART	1	
	751	-----	PANEL	NO SERVICE PART	1	E1
	751	-----	PANEL	NO SERVICE PART	1	K0
	751	-----	PANEL	NO SERVICE PART	1	E3,M1,K4,E2
	751	-----	PANEL	NO SERVICE PART	1	K2
	751	-----	PANEL	NO SERVICE PART	1	K3
	752	-----	FRONT GLASS	NO SERVICE PART	1	E1
	752	-----	FRONT GLASS	NO SERVICE PART	1	K0
	752	-----	FRONT GLASS	NO SERVICE PART	1	E3
	752	-----	FRONT GLASS	NO SERVICE PART	1	M1
	752	-----	FRONT GLASS	NO SERVICE PART	1	K2
	752	-----	FRONT GLASS	NO SERVICE PART	1	K4
	752	-----	FRONT GLASS	NO SERVICE PART	1	E2
	752	-----	FRONT GLASS	NO SERVICE PART	1	K3
	753	-----	COVER	NO SERVICE PART	1	
	755	-----	KNOB ASSY	NO SERVICE PART	1	E1,E3
	755	-----	KNOB ASSY	NO SERVICE PART	1	K0,M1,K2,E2
	755	-----	KNOB ASSY	NO SERVICE PART	1	K4,K3
	756	-----	PUSH KNOB	NO SERVICE PART	1	
	757	-----	PUSH KNOB	NO SERVICE PART	1	
	758	-----	LIGHTING BOARD	NO SERVICE PART	1	
	759	-----	TAP SCREW	NO SERVICE PART	1	
	765	-----	LIGHTING BOARD	NO SERVICE PART	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT206EN	E1	KMM-BT228UKN	K0	KMM-BT306EN	E3	KMM-BT306MN	M1
KMM-BT328KN	K2	KMM-BT328UKN	K4	KMM-BT356EN	E2	KMR-M328BTKN	K3

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	767	-----	LCD CASE	NO SERVICE PART	1	E1,K0
	767	-----	LCD CASE	NO SERVICE PART	1	E3,M1,K2,K4,E2,K3
	768	-----	OPTI.DIFFUSER	NO SERVICE PART	1	E1,K0
	768	-----	OPTI.DIFFUSER	NO SERVICE PART	1	E3,M1,K2,K4,E2
	768	-----	OPTI.DIFFUSER	NO SERVICE PART	1	K3
	769	-----	LIGHTING BOARD	NO SERVICE PART	1	E1,K0
	769	-----	LIGHTING BOARD	NO SERVICE PART	1	E3,M1,K2,K4,E2,K3
	770	-----	REF.SHEET	NO SERVICE PART	1	E1,K0
	770	-----	REF.SHEET	NO SERVICE PART	1	E3,M1,K2,K4,E2,K3
	802	-----	SUB-INST.MANUAL	NO SERVICE PART	1	E1,E3,E2
	802	-----	SUB-INST.MANUAL	NO SERVICE PART	1	K0
	802	-----	SUB-INST.MANUAL	NO SERVICE PART	1	K2,K4,K3

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT206EN	E1	KMM-BT228UKN	K0	KMM-BT306EN	E3	KMM-BT306MN	M1
KMM-BT328KN	K2	KMM-BT328UKN	K4	KMM-BT356EN	E2	KMR-M328BTKN	K3

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
MAIN PWB ASSY (XJ1-278x-0x) <XJ1>						
	IC161	BD37069FV-M	ANALOG IC		1	
	IC164	NJM111100F1	ANALOG IC		1	M1
	IC165	NJW4190R-A	ANALOG IC		1	E2,K3
	IC220	NJM4565V-ZB	ANALOG IC		1	
	IC301	JCV8034	ANALOG IC		1	
	IC411	MFI343S00177	MCU IC		1	
	IC470	TC7SH08FUJC	MOS IC		1	K4,K3
	IC481	SN65HVD3082ED	MOS IC		1	K3
	IC482	TC7SH08FUJC	MOS IC		1	K3
	IC540	MP9942AGJ	ANALOG IC		1	
	IC560	MP9942AGJ	ANALOG IC		1	
	IC601	TEF6657HNV101	ANALOG IC		1	
	IC701	STA1080	MPU IC	BGA	1	
	IC702	TC7SH08FUJC	MOS IC		1	
	IC821	W3F-0493-00	ROM IC		1	E1,K0
	IC821	W3F-0494-00	ROM IC		1	E3,M1,K2,K4,E2,K3
	IC822	W25Q16JVSSIM	ROM IC		1	
	IC831	IC-PST8428U	MOS IC		1	
	IC880	BD001A5WEFJ	ANALOG IC		1	
	IC890	TPS25221DBV	MOS IC		1	
	IC901	LV5685PV-H	ANALOG IC		1	
	IC1901	M12L2511A6BIS	DRAM IC		1	
	Q220	KTC4075P/Y/	TRANSISTOR		1	
	Q240	IMX9	DUAL TRANSISTOR		1	
	Q270	KRA303E-P	DIGI TRANSISTOR		1	
	Q271	KTA2014P/Y/	TRANSISTOR		1	
	Q272	KRC403E-P	DIGI TRANSISTOR		1	
	Q273	KRA303E-P	DIGI TRANSISTOR		1	
	Q274	KRC403E-P	DIGI TRANSISTOR		1	
	Q300	IMX9	DUAL TRANSISTOR		1	E3,M1,K2,K4,E2,K3
	Q310	IMX9	DUAL TRANSISTOR		1	E3,M1,K2,K4,E2,K3
	Q470	KRC402E-P	DIGI TRANSISTOR		1	K4,K3
	Q471	KRC410E-P	DIGI TRANSISTOR		1	K4,K3
	Q480	KTC4075P/Y/	TRANSISTOR		1	K3
	Q481	KTC4075P/Y/	TRANSISTOR		1	K3
	Q482	KTC4075P/Y/	TRANSISTOR		1	K3
	Q483	KTA2014P/Y/	TRANSISTOR		1	K3
	Q484	RQ5L015SP	FET		1	K3
	Q485	KRC406P	DIGI TRANSISTOR		1	K3
	Q486	KRC406P	DIGI TRANSISTOR		1	K3
	Q890	KRC401-P	TRANSISTOR		1	
	Q920	KRA304E-P	DIGI TRANSISTOR		1	
	D103	UDZV7.5B	ZENER DIODE		1	
	D105	UDZV7.5B	ZENER DIODE		1	
	D220	UDZV6.8B	ZENER DIODE		1	
	D221	UDZV6.8B	ZENER DIODE		1	K4,K3
	D222	UDZV5.6B	ZENER DIODE		1	
	D271	BAW56-TP	DIODE ARRAY		1	
	D273	1SS355-HF	DIODE		1	
	D370	BAW56-TP	DIODE ARRAY		1	
	D390	SM5818PL	SCHOTTKY DIODE		1	
	D391	MBR0530	DIODE		1	
	D400	RB521SM-30	DIODE		1	
	D401	UDZV5.1B	ZENER DIODE		1	
	D471	RSB6.8SM	ZENER DIODE		1	K4,K3
	D472	RSB6.8SM	ZENER DIODE		1	K4,K3
	D473	RSB6.8SM	ZENER DIODE		1	K4,K3
	D474	RSB6.8SM	ZENER DIODE		1	K4,K3
	D475	UDZV6.8B	ZENER DIODE		1	K4,K3
	D476	UDZV6.8B	ZENER DIODE		1	K4,K3
	D480	UDZV6.2B	ZENER DIODE		1	K3
	D481	UDZV6.2B	ZENER DIODE		1	K3
	D482	UDZV5.1B	ZENER DIODE		1	K3
	D540	SMD24PL	SCHOTTKY DIODE		1	
	D560	SK34A-L	SCHOTTKY DIODE		1	
	D701	F0K-0282-00	SURGE ABSORBER		1	
	D702	F0K-0282-00	SURGE ABSORBER		1	
	D704	F0K-0282-00	SURGE ABSORBER		1	
	D706	F0K-0282-00	SURGE ABSORBER		1	
	D707	F0K-0282-00	SURGE ABSORBER		1	
	D709	F0K-0282-00	SURGE ABSORBER		1	
	D710	F0K-0282-00	SURGE ABSORBER		1	
	D711	F0K-0282-00	SURGE ABSORBER		1	
	D902	SK34A-L	SCHOTTKY DIODE		1	
	D903	SK34A-L	SCHOTTKY DIODE		1	
	D991	GN3XB	DIODE		1	
	C101	CK73JXR1H332K	C CAPACITOR	3300pF 50V K	1	
	C102	CK73JXR1H332K	C CAPACITOR	3300pF 50V K	1	
	C103	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C104	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C105	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C106	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C161	CE32BJ1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C162	CE32BJ1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C163	CE32BJ1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C164	CE32BJ1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C165	CE32BJ1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C166	CE32BJ1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C167	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C168	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT206EN	E1	KMM-BT228UKN	K0	KMM-BT306EN	E3	KMM-BT306MN	M1
KMM-BT328KN	K2	KMM-BT328UKN	K4	KMM-BT356EN	E2	KMR-M328BTKN	K3

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C169	CE32BY1C470M	E CAPACITOR	47uF 16V M	1	
	C170	CE32CL1C100M	E CAPACITOR	10uF 16V M	1	
	C171	CE32CL1E330M	E CAPACITOR	33uF 25V M	1	M1,E2,K3
	C181	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	E2,K3
	C183	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	E2,K3
	C187	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	E2,K3
	C188	CK73GXR1E105K	C CAPACITOR	1uF 25V K	1	E2,K3
	C189	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	M1
	C190	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	M1
	C191	CC73JCH1H101J	C CAPACITOR	100pF 50V J	1	M1
	C192	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	M1
	C222	CK73JXR1C333K	C CAPACITOR	0.033uF 16V K	1	
	C223	CK73JXR1C333K	C CAPACITOR	0.033uF 16V K	1	
	C224	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C225	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C226	CC73JCH1H220J	C CAPACITOR	22pF 50V J	1	
	C227	CC73JCH1H151J	C CAPACITOR	150pF 50V J	1	
	C228	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C229	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C230	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C231	CC73JCH1H151J	C CAPACITOR	150pF 50V J	1	
	C234	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C235	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C236	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C252	CK73EXR1C475K	C CAPACITOR	4.7uF 16V K	1	E1,K0
	C262	CK73EXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C273	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C304	CE32CL1E330M	E CAPACITOR	33uF 25V M	1	
	C311	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C312	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C316	CK73GXR1C224K	C CAPACITOR	0.22uF 16V K	1	
	C317	CK73GXR1C224K	C CAPACITOR	0.22uF 16V K	1	
	C318	CK73GXR1C224K	C CAPACITOR	0.22uF 16V K	1	
	C319	CK73GXR1C224K	C CAPACITOR	0.22uF 16V K	1	
	C322	CK73EXR1C475K	C CAPACITOR	4.7uF 16V K	1	E3,M1,K2,K4,E2,K3
	C332	CK73EXR1C475K	C CAPACITOR	4.7uF 16V K	1	E3,M1,K2,K4,E2,K3
	C342	CK73EXR1C475K	C CAPACITOR	4.7uF 16V K	1	E3,M1,K2,K4,E2,K3
	C352	CK73EXR1C475K	C CAPACITOR	4.7uF 16V K	1	E3,M1,K2,K4,E2,K3
	C370	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C390	CK73GXR1C474K	C CAPACITOR	0.47uF 16V K	1	
	C391	CK73GXR1C474K	C CAPACITOR	0.47uF 16V K	1	
	C410	CK73JXR0J224K	C CAPACITOR	0.22uF 6.3V K	1	
	C472	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	
	C473	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K4,K3
	C474	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	1	K4,K3
	C475	CK73GXR1A225K	C CAPACITOR	2.2uF 10V K	1	K4,K3
	C480	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K3
	C481	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	K3
	C482	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K3
	C483	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K3
	C484	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K3
	C485	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K3
	C486	CK73JXR1H682K	C CAPACITOR	6800pF 50V K	1	K3
	C540	CE32CC1A151M	E CAPACITOR	150uF 10V M	1	
	C541	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C543	CK73JXR1E223K	C CAPACITOR	0.022uF 25V K	1	
	C545	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C547	CK73JXR0J474K	C CAPACITOR	0.47uF 6.3V K	1	
	C548	CK73JXR0J474K	C CAPACITOR	0.47uF 6.3V K	1	
	C549	CK73JXR0J474K	C CAPACITOR	0.47uF 6.3V K	1	
	C550	CC73JCH1H150J	C CAPACITOR	15pF 50V J	1	
	C563	CK73JXR1E223K	C CAPACITOR	0.022uF 25V K	1	
	C565	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C567	CK73JXR0J474K	C CAPACITOR	0.47uF 6.3V K	1	
	C568	CK73JXR0J474K	C CAPACITOR	0.47uF 6.3V K	1	
	C569	CK73JXR0J474K	C CAPACITOR	0.47uF 6.3V K	1	
	C570	CC73JCH1H150J	C CAPACITOR	15pF 50V J	1	
	C571	CD04ET1C222M1	E CAPACITOR	2200uF 16V M	1	
	C601	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	
	C602	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C603	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C604	CK73JXR1H152K	C CAPACITOR	1500pF 50V K	1	
	C605	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	
	C606	CC73JCH1H090D	C CAPACITOR	9pF 50V D	1	
	C607	CC73JCH1H010C	C CAPACITOR	1pF 50V C	1	
	C608	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	
	C609	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C610	CC73JCH1H120J	C CAPACITOR	12pF 50V J	1	
	C611	CC73JCH1H010C	C CAPACITOR	1pF 50V C	1	
	C612	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C614	CC73JCH1H220J	C CAPACITOR	22pF 50V J	1	
	C615	CC73JCH1H330J	C CAPACITOR	33pF 50V J	1	
	C616	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	
	C617	CK73JXR0J224K	C CAPACITOR	0.22uF 6.3V K	1	
	C618	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C619	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C620	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C622	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C623	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C680	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT206EN	E1	KMM-BT228UKN	K0	KMM-BT306EN	E3	KMM-BT306MN	M1
KMM-BT328KN	K2	KMM-BT328UKN	K4	KMM-BT356EN	E2	KMR-M328BTKN	K3

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C702	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C703	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C704	CC73JCH1H180J	C CAPACITOR	18pF 50V J	1	
	C705	CC73JCH1H180J	C CAPACITOR	18pF 50V J	1	
	C706	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C707	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C708	CK73JXR1C473K	C CAPACITOR	0.047uF 16V K	1	
	C709	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C710	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	
	C711	CC73JCH1E471J	C CAPACITOR	470pF 25V J	1	
	C713	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C714	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C716	CC73JCH1H101J	C CAPACITOR	100pF 50V J	1	
	C719	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C720	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C722	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C724	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C725	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C726	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C727	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C728	CC73JCH1H101J	C CAPACITOR	100pF 50V J	1	
	C729	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C730	CC73JCH1H101J	C CAPACITOR	100pF 50V J	1	
	C731	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C733	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C735	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C736	CC73JCH1H080D	C CAPACITOR	8pF 50V D	1	
	C737	CC73JCH1H080D	C CAPACITOR	8pF 50V D	1	
	C740	CC73JCH1H101J	C CAPACITOR	100pF 50V J	1	
	C741	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	
	C742	CC73JCH1H101J	C CAPACITOR	100pF 50V J	1	
	C750	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C756	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C820	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	C821	CK73JXR0J224K	C CAPACITOR	0.22uF 6.3V K	1	
	C825	CK73JXR0J224K	C CAPACITOR	0.22uF 6.3V K	1	
	C830	CC73JCH1E471J	C CAPACITOR	470pF 25V J	1	
	C831	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C832	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C880	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C881	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C882	CC73JCH1E471J	C CAPACITOR	470pF 25V J	1	
	C890	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C893	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C903	CE32BY1C220M	E CAPACITOR	22uF 16V M	1	
	C904	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C906	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C907	CE32BY0J101M	E CAPACITOR	100uF 6.3V M	1	
	C908	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C909	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	
	C910	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C911	CK73GXR1C474K	C CAPACITOR	0.47uF 16V K	1	
	C912	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C914	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C916	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C918	CE32BY1C221M	E CAPACITOR	220uF 16V M	1	
	C933	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C934	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C935	CC73JCH1E471J	C CAPACITOR	470pF 25V J	1	
	C990	CD04EU1C222M1	E CAPACITOR	2200uF 16V M	1	
	C1001	CC73JCH1H221J	C CAPACITOR	220pF 50V J	1	
	C1010	CC73JCH1E471J	C CAPACITOR	470pF 25V J	1	M1,K2,K3
	C1011	CC73JCH1E471J	C CAPACITOR	470pF 25V J	1	M1,K2,K3
	C1012	CC73JCH1E471J	C CAPACITOR	470pF 25V J	1	M1,K2,K3
	C1013	CC73JCH1E471J	C CAPACITOR	470pF 25V J	1	M1,K2,K3
	C1014	CC73JCH1E471J	C CAPACITOR	470pF 25V J	1	M1,K2,K3
	C1015	CC73JCH1E471J	C CAPACITOR	470pF 25V J	1	M1,K2,K3
	C1016	CC73JCH1E471J	C CAPACITOR	470pF 25V J	1	M1,K2,K3
	C1017	CC73JCH1E471J	C CAPACITOR	470pF 25V J	1	M1,K2,K3
	C1020	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1021	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C1301	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C1302	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1303	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1904	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1905	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1906	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C1907	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1908	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1909	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1910	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C2041	CC73JCH1H101J	C CAPACITOR	100pF 50V J	1	
	C2042	CC73JCH1H101J	C CAPACITOR	100pF 50V J	1	
	C2044	CC73JCH1H101J	C CAPACITOR	100pF 50V J	1	
	C2060	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C2085	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K3
	C9000	CK73JXR1C224K	C CAPACITOR	0.22uF 16V K	1	
	C9002	CK73JXR1C224K	C CAPACITOR	0.22uF 16V K	1	
	C9003	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C9004	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C9006	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C9007	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT206EN	E1	KMM-BT228UKN	K0	KMM-BT306EN	E3	KMM-BT306MN	M1
KMM-BT328KN	K2	KMM-BT328UKN	K4	KMM-BT356EN	E2	KMR-M328BTKN	K3

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C9008	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C9014	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	C9018	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C9019	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C9022	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C9023	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C9024	CC73JCH1E471J	C CAPACITOR	470pF 25V J	1	
	C9025	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C9033	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C9034	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C9035	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C9037	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	C9038	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C9039	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C9040	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C9041	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C9045	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C9046	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C9059	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C9060	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C9061	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C9062	CC73JCH1H150J	C CAPACITOR	15pF 50V J	1	K0,K2,K4,K3
	C9064	CC73JCH1H150J	C CAPACITOR	15pF 50V J	1	
	C9065	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C9066	CK73JXR0J474K	C CAPACITOR	0.47uF 6.3V K	1	
	C9068	CK73JXR0J474K	C CAPACITOR	0.47uF 6.3V K	1	
	C9070	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C9071	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1	
	C9072	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1	
	C9073	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1	
	C9075	CC73JCH1H150J	C CAPACITOR	15pF 50V J	1	
	C9076	CC73JCH1H150J	C CAPACITOR	15pF 50V J	1	
	C9077	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C9078	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C9082	CC73JCH1E471J	C CAPACITOR	470pF 25V J	1	
	C9083	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C9086	CC73JCH1E471J	C CAPACITOR	470pF 25V J	1	
	C9087	CK73JXR1C473K	C CAPACITOR	0.047uF 16V K	1	
	C9090	CC73JCH1E471J	C CAPACITOR	470pF 25V J	1	
	C9094	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C9095	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K3
	C9117	CC73JCH1H101J	C CAPACITOR	100pF 50V J	1	
	C9118	CC73JCH1H101J	C CAPACITOR	100pF 50V J	1	
	C9119	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C9120	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C9121	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C9207	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C9208	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C9209	CK73JXR1C222K	C CAPACITOR	2200pF 16V K	1	E3,E2
	C9210	CK73JXR1C222K	C CAPACITOR	2200pF 16V K	1	E3,E2
	C9211	CK73JXR1C222K	C CAPACITOR	2200pF 16V K	1	E3,E2
	C9212	CK73JXR1C222K	C CAPACITOR	2200pF 16V K	1	E3,E2
	C9213	CK73JXR1C222K	C CAPACITOR	2200pF 16V K	1	E1
	C9214	CK73JXR1C222K	C CAPACITOR	2200pF 16V K	1	E1,E3,E2
	R100	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R103	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R104	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R112	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R113	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R114	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R115	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	K4,K3
	R116	RK73GB2A4R7J	MG RESISTOR	4.7Ω 1/10W J	1	K4,K3
	R117	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	K4,K3
	R145	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R146	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R147	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R148	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R149	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R150	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R160	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	M1
	R161	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	M1,E2,K3
	R162	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R173	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R175	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	E1,K0,E3,K2,K4,E2,K3
	R176	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E2,K3
	R177	RK73HB1J562J	MG RESISTOR	5.6kΩ 1/16W J	1	E2,K3
	R178	RK73HB1J752J	MG RESISTOR	7.5kΩ 1/16W J	1	E2,K3
	R179	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	1	E2,K3
	R180	RK73HH1J153D	MG RESISTOR	15kΩ 1/16W D	1	E2,K3
	R181	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	E2,K3
	R182	RK73HH1J752D	MG RESISTOR	7.5kΩ 1/16W D	1	M1
	R183	RK73HH1J132D	MG RESISTOR	1.3kΩ 1/16W D	1	M1
	R188	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1,K0,E3,M1,K2,K4
	R220	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R221	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R222	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R223	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1	
	R224	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R225	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	
	R226	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT206EN	E1	KMM-BT228UKN	K0	KMM-BT306EN	E3	KMM-BT306MN	M1
KMM-BT328KN	K2	KMM-BT328UKN	K4	KMM-BT356EN	E2	KMR-M328BTKN	K3

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R227	RK73HB1J124J	MG RESISTOR	120kΩ 1/16W J	1	
	R229	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	1	
	R230	RK73HB1J124J	MG RESISTOR	120kΩ 1/16W J	1	
	R231	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R232	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R233	RK73HB1J681J	MG RESISTOR	680Ω 1/16W J	1	
	R234	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R237	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R238	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R250	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R251	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R252	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	
	R253	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	E3,M1,K2,K4,E2,K3
	R254	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R260	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	E1,K0
	R261	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	E1,K0
	R262	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	E1,K0
	R264	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	E1,K0
	R270	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	
	R271	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	
	R272	RK73EB2E303J	MG RESISTOR	30kΩ 1/4W J	1	
	R273	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	
	R302	RK73EB2E432J	MG RESISTOR	4.3kΩ 1/4W J	1	
	R303	RK73EB2E160J	MG RESISTOR	16Ω 1/4W J	1	
	R304	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R305	RK73EB2E1R0J	MG RESISTOR	1.0Ω 1/4W J	1	
	R316	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R317	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R318	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R319	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R320	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	E3,M1,K2,K4,E2,K3
	R321	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	E3,M1,K2,K4,E2,K3
	R322	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	E3,M1,K2,K4,E2,K3
	R323	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	E3,M1,K2,K4,E2,K3
	R330	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	E3,M1,K2,K4,E2,K3
	R331	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	E3,M1,K2,K4,E2,K3
	R332	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	E3,M1,K2,K4,E2,K3
	R333	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	E3,M1,K2,K4,E2,K3
	R340	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	E3,M1,K2,K4,E2,K3
	R341	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	E3,M1,K2,K4,E2,K3
	R342	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	E3,M1,K2,K4,E2,K3
	R343	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	E3,M1,K2,K4,E2,K3
	R350	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	E3,M1,K2,K4,E2,K3
	R351	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	E3,M1,K2,K4,E2,K3
	R352	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	E3,M1,K2,K4,E2,K3
	R353	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	E3,M1,K2,K4,E2,K3
	R370	RK73GB2A683J	MG RESISTOR	68kΩ 1/10W J	1	
	R371	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	1	
	R372	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	
	R390	RK73EB2E472J	MG RESISTOR	4.7kΩ 1/4W J	1	
	R400	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R410	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R411	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R413	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R414	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R471	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K4,K3
	R472	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K4,K3
	R473	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K4,K3
	R474	RK73FB2B221J	MG RESISTOR	220Ω 1/8W J	1	K4,K3
	R475	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K4,K3
	R476	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K4,K3
	R477	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K4,K3
	R480	RK73GB2A334J	MG RESISTOR	330kΩ 1/10W J	1	K3
	R481	RK73EB2E3R3J	MG RESISTOR	3.3Ω 1/4W J	1	K3
	R482	RK73EB2E3R3J	MG RESISTOR	3.3Ω 1/4W J	1	K3
	R483	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K3
	R484	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K3
	R485	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	K3
	R486	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K3
	R487	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K3
	R488	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K3
	R489	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	K3
	R490	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	1	K3
	R491	RK73EB2E101J	MG RESISTOR	100Ω 1/4W J	1	K3
	R492	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K3
	R493	RK73EB2E101J	MG RESISTOR	100Ω 1/4W J	1	K3
	R494	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1	K3
	R495	RK73EB2E100J	MG RESISTOR	10Ω 1/4W J	1	K3
	R496	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K3
	R498	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1	K3
	R541	RK73HB1J512J	MG RESISTOR	5.1kΩ 1/16W J	1	
	R542	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R543	RK73HB1J200J	MG RESISTOR	20Ω 1/16W J	1	
	R544	RK73HB1J393J	MG RESISTOR	39kΩ 1/16W J	1	
	R545	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	1	
	R546	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	
	R548	RK73HH1J683D	MG RESISTOR	68kΩ 1/16W D	1	
	R563	RK73HB1J200J	MG RESISTOR	20Ω 1/16W J	1	
	R564	RK73HB1J393J	MG RESISTOR	39kΩ 1/16W J	1	
	R565	RK73HH1J163D	MG RESISTOR	16kΩ 1/16W D	1	
	R567	RK73HH1J513D	MG RESISTOR	51kΩ 1/16W D	1	
	R601	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT206EN	E1	KMM-BT228UKN	K0	KMM-BT306EN	E3	KMM-BT306MN	M1
KMM-BT328KN	K2	KMM-BT328UKN	K4	KMM-BT356EN	E2	KMR-M328BTKN	K3

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R602	RK73HB1J820J	MG RESISTOR	82Ω 1/16W J	1	
	R603	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	
	R604	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	
	R605	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	1	
	R611	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R682	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R683	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R684	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J	1	
	R685	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J	1	
	R690	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R691	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R702	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R703	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R704	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R705	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R706	RK73HB1J682J	MG RESISTOR	6.8kΩ 1/16W J	1	
	R709	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R710	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R711	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R712	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R713	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R714	RK73HB1J274J	MG RESISTOR	270kΩ 1/16W J	1	
	R718	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R720	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1	K3
	R726	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R730	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R739	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R740	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R742	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R743	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R746	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R755	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R756	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R760	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R761	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R768	RK73HB1J393J	MG RESISTOR	39kΩ 1/16W J	1	E1,E3,E2
	R768	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	M1
	R769	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1	E1,E3,E2
	R769	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0,K2,K4,K3
	R769	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	M1
	R770	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	K2
	R770	RK73HB1J393J	MG RESISTOR	39kΩ 1/16W J	1	K4,E2
	R771	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	E1,K0,E3,M1,K3
	R771	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	K2
	R771	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1	K4,E2
	R772	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R777	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R778	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R782	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R785	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R788	RK73HH1J823D	MG RESISTOR	82kΩ 1/16W D	1	
	R789	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	
	R790	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	1	
	R792	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	1	
	R796	RK73HH1J302D	MG RESISTOR	3kΩ 1/16W D	1	
	R797	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R798	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R799	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	
	R800	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R801	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R802	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	E1,K0,E3,K3
	R803	RK73HB1J225J	MG RESISTOR	2.2MΩ 1/16W J	1	M1,K2,K4,E2
	R805	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R806	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R808	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R809	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R820	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R823	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R824	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R827	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R828	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R829	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R830	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R831	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R848	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R860	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R861	RK73HB1J682J	MG RESISTOR	6.8kΩ 1/16W J	1	
	R870	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R881	RK73HH1J243D	MG RESISTOR	24kΩ 1/16W D	1	
	R882	RK73HH1J123D	MG RESISTOR	12kΩ 1/16W D	1	
	R883	RK73GB2A2R2J	MG RESISTOR	2.2Ω 1/10W J	1	
	R889	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1	
	R890	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R891	RK73HH1J243D	MG RESISTOR	24kΩ 1/16W D	1	
	R893	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R905	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R980	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	
	R981	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	
	R982	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	
	R984	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT206EN	E1	KMM-BT228UKN	K0	KMM-BT306EN	E3	KMM-BT306MN	M1
KMM-BT328KN	K2	KMM-BT328UKN	K4	KMM-BT356EN	E2	KMR-M328BTKN	K3

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R1070	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R1300	RK73HB1J562J	MG RESISTOR	5.6kΩ 1/16W J	1	
	R1302	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1303	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1900	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1901	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1902	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1903	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1904	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1905	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1906	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1907	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1908	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1909	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1910	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1911	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1912	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1913	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1914	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1915	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1921	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1932	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R2003	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R2004	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R2010	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R2011	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2012	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R2013	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2016	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2017	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2018	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2019	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R2021	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R2023	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R2030	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1,K0,E3,M1,K2,E2
	R2033	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R2034	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R9009	RK73HH1J100D	MG RESISTOR	10Ω 1/16W D	1	
	R9012	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R9016	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R9019	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R9021	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	
	R9022	RK73HB1J512J	MG RESISTOR	5.1kΩ 1/16W J	1	
	L540	LK73Z0CA4R7M	M.CHIP INDUCTOR		1	
	L541	LR79Z0JM100M	CHIP INDUCTOR		1	
	L560	LK73Z0CA4R7M	M.CHIP INDUCTOR		1	
	L561	LR79Z0JM100M	CHIP INDUCTOR		1	
	L600	LR73Z0AD4R7M	CHIP INDUCTOR		1	
	L601	LK73G0BE4R7K	M.CHIP INDUCTOR		1	
	L602	LK73G0BER47K	M.CHIP INDUCTOR		1	
	L603	LK73G0BER10K	M.CHIP INDUCTOR		1	
	L604	LK73G0BE1R0K	M.CHIP INDUCTOR		1	
	L605	LK73G0BER22K	M.CHIP INDUCTOR		1	
	L606	LK73G0BER12K	M.CHIP INDUCTOR		1	
	L607	LK73G0BER15K	M.CHIP INDUCTOR		1	
	L700	RK73HB1J000J	MG RESISTOR		1	
	L701	LB73H0AY-004	CHIP FERRITE		1	
	L706	RK73HB1J000J	MG RESISTOR		1	K4,K3
	L707	RK73HB1J000J	MG RESISTOR		1	K4,K3
	L708	RK73HB1J000J	MG RESISTOR		1	
	L709	RK73HB1J000J	MG RESISTOR		1	
	L811	RK73HB1J000J	MG RESISTOR		1	
	L821	LB73G0ED-002	CHIP FERRITE		1	
	L822	RK73HB1J000J	MG RESISTOR		1	
	L824	RK73HB1J220J	MG RESISTOR		1	
	L825	RK73HB1J220J	MG RESISTOR		1	
	L826	RK73HB1J220J	MG RESISTOR		1	
	L827	RK73HB1J220J	MG RESISTOR		1	
	L828	RK73HB1J220J	MG RESISTOR		1	
	L829	RK73HB1J000J	MG RESISTOR		1	
	L830	LB73G0ED-002	CHIP FERRITE		1	
	L831	LB73H0AY-004	CHIP FERRITE		1	
	L990	L3D-0043-00	CHOKE COIL		1	
	L1900	L7K-0056-00	LC FILTER		1	
	L2000	RK73HB1J101J	MG RESISTOR		1	
	L2001	RK73HB1J101J	MG RESISTOR		1	
	L2002	RK73HB1J151J	MG RESISTOR		1	K4,K3
	L2003	RK73HB1J000J	MG RESISTOR		1	K3
	L2004	RK73HB1J000J	MG RESISTOR		1	K3
	L2005	LR73Z0AD4R7M	CHIP INDUCTOR		1	
	L2006	RK73HH1J470D	MG RESISTOR		1	
	L9000	LR73Z0AD1R0M	CHIP INDUCTOR		1	
	L9001	LB73G0ED-002	CHIP FERRITE		1	
	A1303	W0C-0414-00	CIRCUIT MODULE		1	
	CN220	EA710AP-2002A	W TO B CONNE		1	K4,K3
	CN481	EA710AP-2006A	W TO B CONNE		1	K3
	CN701	E5J-0216-00	R.RECEPTACLE		1	
	CN990	E5J-0139-00	R.RECEPTACLE		1	
	F540	FZA10BH-2R5	FUSE (CC)		1	
	F560	FZA10BH-1R25	FUSE (CC)		1	
	J220	E1B-0013-00	3.5D PHONE JACK		1	E1,K0,E3,M1,K2,E2
	J321	E6D-0014-10	PIN JACK		1	E1,K0

△
△

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT206EN	E1	KMM-BT228UKN	K0	KMM-BT306EN	E3	KMM-BT306MN	M1
KMM-BT328KN	K2	KMM-BT328UKN	K4	KMM-BT356EN	E2	KMR-M328BTKN	K3

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	J321	E6D-0016-10	PIN JACK		1	E3,M1,K2,K4,E2,K3
	J470	E5G-0029-00	CYL.RECEPTACLE		1	K4,K3
	J601	E6J-0017-00	JACK OTHERS		1	
	S830	S7A-0031-00	TACTILE PUSH SW		1	
	VA480	F0K-0145-00	SURGE ABSORBER		1	K3
	VA601	F0K-0265-00	SURGE ABSORBER		1	
	VA703	F0K-0282-00	SURGE ABSORBER		1	
	VA705	F0K-0282-00	SURGE ABSORBER		1	
	VA9001	F0K-0282-00	SURGE ABSORBER		1	
	VA9002	F0K-0282-00	SURGE ABSORBER		1	
	VA9003	F0K-0282-00	SURGE ABSORBER		1	
	X600	L7J-0014-00	QUARTZ CRYSTAL		1	
	X701	L7J-0138-00	QUARTZ CRYSTAL		1	
	X702	L7J-0123-00	QUARTZ CRYSTAL		1	

SWITCH PWB ASSY (XJ6-149x-0x) <XJ6>

IC1	BU97520AKV-M	MOS IC		1	E1,K0
Q1	KTC4075P/Y/	TRANSISTOR		1	E1,K0
Q51	KTC4075EP/Y/	TRANSISTOR		1	E1,K0
Q52	KTC4075P/Y/	TRANSISTOR		1	E1,K0
D1	UDZV5.6B	ZENER DIODE		1	E1,K0
D2	SM5818PL	SCHOTTKY DIODE		1	E1,K0
D20	QSMH-C199	LED		1	E1,K0
D21	LRT67DU1V211	LED		1	E1
D21	LBTTSDS2T2251	LED		1	K0
D22	LRT67DU1V211	LED		1	E1
D22	LBTTSDS2T2251	LED		1	K0
D23	LRT67DU1V211	LED		1	E1
D23	LBTTSDS2T2251	LED		1	K0
D25	QSMH-C199	LED		1	E1
D25	QSMR-C13SBCMN	LED		1	K0
D26	QSMH-C199	LED		1	E1
D26	QSMR-C13SBCMN	LED		1	K0
D46	NHSW157B	LED		1	E1,K0
D48	NHSW157B	LED		1	E1,K0
C1	CK73GXR1A475K	C CAPACITOR	4.7uF 10V K	1	E1,K0
C4	CK73GXR1A475K	C CAPACITOR	4.7uF 10V K	1	E1,K0
C5	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	E1,K0
C6	CK73EXR1C106K	C CAPACITOR	10uF 16V K	1	E1,K0
C7	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	E1,K0
C60	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	E1,K0
C61	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	E1,K0
C82	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	E1,K0
C83	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	E1,K0
C84	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	E1,K0
C85	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	E1,K0
C86	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	E1,K0
R1	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	E1,K0
R3	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	E1,K0
R5	RK73EB2E331J	MG RESISTOR	330Ω 1/4W J	1	E1,K0
R6	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	E1,K0
R21	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	1	E1,K0
R22	RK73EB2E821J	MG RESISTOR	820Ω 1/4W J	1	E1
R22	RK73EB2E681J	MG RESISTOR	680Ω 1/4W J	1	K0
R23	RK73EB2E471J	MG RESISTOR	470Ω 1/4W J	1	E1
R23	RK73EB2E391J	MG RESISTOR	390Ω 1/4W J	1	K0
R24	RK73FB2B122J	MG RESISTOR	1.2kΩ 1/8W J	1	E1,K0
R25	RK73FB2B102J	MG RESISTOR	1kΩ 1/8W J	1	E1
R25	RK73FB2B911J	MG RESISTOR	910Ω 1/8W J	1	K0
R48	RK73FB2B331J	MG RESISTOR	330Ω 1/8W J	1	E1,K0
R50	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	E1,K0
R51	RK73GB2A682J	MG RESISTOR	6.8kΩ 1/10W J	1	E1,K0
R60	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	1	E1,K0
R61	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	1	E1,K0
R62	RK73FB2B4R7J	MG RESISTOR	4.7Ω 1/8W J	1	E1,K0
R80	RK73EB2E221J	MG RESISTOR	220Ω 1/4W J	1	E1,K0
RA1	RK74GB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1,K0
RA2	RK74GB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1,K0
RA3	RK74GB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1,K0
CN2	E5K-0007-00	R.PLUG		1	E1,K0
FL80	L7K-0038-00	FILTER		1	E1,K0
J60	E1B-0037-00	3.5D PHONE JACK		1	E1,K0
J80	E5J-0069-00	USB TERMINAL		1	E1,K0
S20	T9K-0007-00	ROTARY ENCODER		1	E1,K0

SWITCH PWB ASSY (XJ6-148x-0x) <XJ6>

IC1	BU97550KV-M	MOS IC		1	E3,M1,K2,K4,E2,K3
IC3	AS431AN-G1	ANALOG IC		1	E3,M1,K2,K4,E2,K3
IC90	SIRD630B6T	IR DETECT UNIT		1	M1,K2,K4,E2
Q50	KTC4075EP/Y/	TRANSISTOR		1	E3,M1,K2,K4,E2,K3
Q51	KTC4075EP/Y/	TRANSISTOR		1	E3,M1,K2,K4,E2,K3
Q52	KTC4075EP/Y/	TRANSISTOR		1	E3,M1,K2,K4,E2,K3
Q53	KTC4075EP/Y/	TRANSISTOR		1	E3,M1,K2,K4,E2,K3
Q54	KTC4075EP/Y/	TRANSISTOR		1	E3,M1,K2,K4,E2,K3
Q55	KTC4075EP/Y/	TRANSISTOR		1	E3,M1,K2,K4,E2,K3
Q57	KTC4075EP/Y/	TRANSISTOR		1	E3,M1,K2,K4,E2,K3
Q58	KTC4075EP/Y/	TRANSISTOR		1	E3,M1,K2,K4,E2,K3
Q90	KRA302E-P	DIGI TRANSISTOR		1	M1,K2,K4,E2
Q91	KRC402E-P	DIGI TRANSISTOR		1	M1,K2,K4,E2
D2	SM5818PL	SCHOTTKY DIODE		1	E3,M1,K2,K4,E2,K3
D3	SM5818PL	SCHOTTKY DIODE		1	E3,M1,K2,K4,E2,K3
D12	QSMH-C199	LED		1	E3,M1,K2,K4,E2,K3
D13	QSMH-C199	LED		1	E3,M1,K2,K4,E2,K3

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT206EN	E1	KMM-BT228UKN	K0	KMM-BT306EN	E3	KMM-BT306MN	M1
KMM-BT328KN	K2	KMM-BT328UKN	K4	KMM-BT356EN	E2	KMR-M328BTKN	K3

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	D20	QSMH-C199	LED		1	E3,M1,K2,K4,E2,K3
	D21	LRTBGVTG-U//0	LED		1	E3,M1,K2,K4,E2,K3
	D22	LRTBGVTG-U//0	LED		1	E3,M1,K2,K4,E2,K3
	D23	LRTBGVTG-U//0	LED		1	E3,M1,K2,K4,E2,K3
	D25	LRTBGVTG-U//0	LED		1	E3,M1,K2,K4,E2,K3
	D49	LRTBGVTG-U//0	LED		1	E3,M1,K2,K4,E2,K3
	D82	F0K-0282-00	SURGE ABSORBER		1	E3,M1,K2,K4,E2,K3
	C1	CK73GXR1A475K	C CAPACITOR	4.7uF 10V K	1	E3,M1,K2,K4,E2,K3
	C5	CK73GXR1A475K	C CAPACITOR	4.7uF 10V K	1	E3,M1,K2,K4,E2,K3
	C6	CK73EXR1C106K	C CAPACITOR	10uF 16V K	1	E3,M1,K2,K4,E2,K3
	C7	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	E3,M1,K2,K4,E2,K3
	C60	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	E3,M1,K2,K4,E2,K3
	C61	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	E3,M1,K2,K4,E2,K3
	C82	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	E3,M1,K2,K4,E2,K3
	C83	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	E3,M1,K2,K4,E2,K3
	C84	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	E3,M1,K2,K4,E2,K3
	C85	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	E3,M1,K2,K4,E2,K3
	C86	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	E3,M1,K2,K4,E2,K3
	C91	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	M1,K2,K4,E2
	R1	RK73GH2A473D	MG RESISTOR	47kΩ 1/10W D	1	E3,M1,K2,K4,E2,K3
	R2	RK73GH2A473D	MG RESISTOR	47kΩ 1/10W D	1	E3,M1,K2,K4,E2,K3
	R3	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	E3,M1,K2,K4,E2,K3
	R4	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	E3,M1,K2,K4,E2,K3
	R6	RK73EB2E151J	MG RESISTOR	150Ω 1/4W J	1	E3,M1,K2,K4,E2,K3
	R8	RK73FB2B473J	MG RESISTOR	47kΩ 1/8W J	1	E3,M1,K2,K4,E2,K3
	R10	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	1	E3,M1,K2,K4,E2,K3
	R12	RK73GB2A182J	MG RESISTOR	1.8kΩ 1/10W J	1	E3,M1,K2,K4,E2,K3
	R13	RK73GB2A182J	MG RESISTOR	1.8kΩ 1/10W J	1	E3,M1,K2,K4,E2,K3
	R14	RK73GB2A124J	MG RESISTOR	120kΩ 1/10W J	1	E3,M1,K2,K4,E2,K3
	R21	RK73EB2E471J	MG RESISTOR	470Ω 1/4W J	1	E3,M1,K2,K4,E2,K3
	R22	RK73EB2E181J	MG RESISTOR	180Ω 1/4W J	1	E3,M1,K2,K4,E2,K3
	R23	RK73EB2E221J	MG RESISTOR	220Ω 1/4W J	1	E3,M1,K2,K4,E2,K3
	R25	RK73FB2B182J	MG RESISTOR	1.8kΩ 1/8W J	1	E3,M1,K2,K4,E2,K3
	R26	RK73FB2B102J	MG RESISTOR	1kΩ 1/8W J	1	E3,M1,K2,K4,E2,K3
	R27	RK73FB2B102J	MG RESISTOR	1kΩ 1/8W J	1	E3,M1,K2,K4,E2,K3
	R33	RK73EB2E681J	MG RESISTOR	680Ω 1/4W J	1	E3,M1,K2,K4,E2
	R33	RK73EB2E561J	MG RESISTOR	560Ω 1/4W J	1	K3
	R34	RK73EB2E561J	MG RESISTOR	560Ω 1/4W J	1	E3,M1,K2,K4,E2
	R34	RK73EB2E471J	MG RESISTOR	470Ω 1/4W J	1	K3
	R35	RK73EB2E561J	MG RESISTOR	560Ω 1/4W J	1	E3,M1,K2,K4,E2
	R35	RK73EB2E471J	MG RESISTOR	470Ω 1/4W J	1	K3
	R57	RK73GB2A682J	MG RESISTOR	6.8kΩ 1/10W J	1	E3,M1,K2,K4,E2,K3
	R60	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	1	E3,M1,K2,K4,E2,K3
	R61	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	1	E3,M1,K2,K4,E2,K3
	R62	RK73FB2B4R7J	MG RESISTOR	4.7Ω 1/8W J	1	E3,M1,K2,K4,E2,K3
	R80	RK73EB2E221J	MG RESISTOR	220Ω 1/4W J	1	E3,M1,K2,K4,E2,K3
	RA1	RK74GB1J101J	MG RESISTOR	100Ω 1/16W J	1	E3,M1,K2,K4,E2,K3
	RA2	RK74GB1J101J	MG RESISTOR	100Ω 1/16W J	1	E3,M1,K2,K4,E2,K3
	RA3	RK74GB1J101J	MG RESISTOR	100Ω 1/16W J	1	E3,M1,K2,K4,E2,K3
	RA50	RK74GB1J682J	MG RESISTOR	6.8kΩ 1/16W J	1	E3,M1,K2,K4,E2,K3
	RA53	RK74GB1J682J	MG RESISTOR	6.8kΩ 1/16W J	1	E3,M1,K2,K4,E2,K3
	CN2	E5K-0007-00	R.PLUG		1	E3,M1,K2,K4,E2,K3
	FL80	L7K-0038-00	FILTER		1	E3,M1,K2,K4,E2,K3
	J60	E1B-0037-00	3.5D PHONE JACK		1	E3,M1,K2,K4,E2,K3
	J80	E5J-0069-00	USB TERMINAL		1	E3,M1,K2,K4,E2,K3
	S20	T9K-0007-00	ROTARY ENCODER		1	E3,M1,K2,K4,E2,K3