


# EXPLODED VIEW (UNIT)

Block No.M1MM

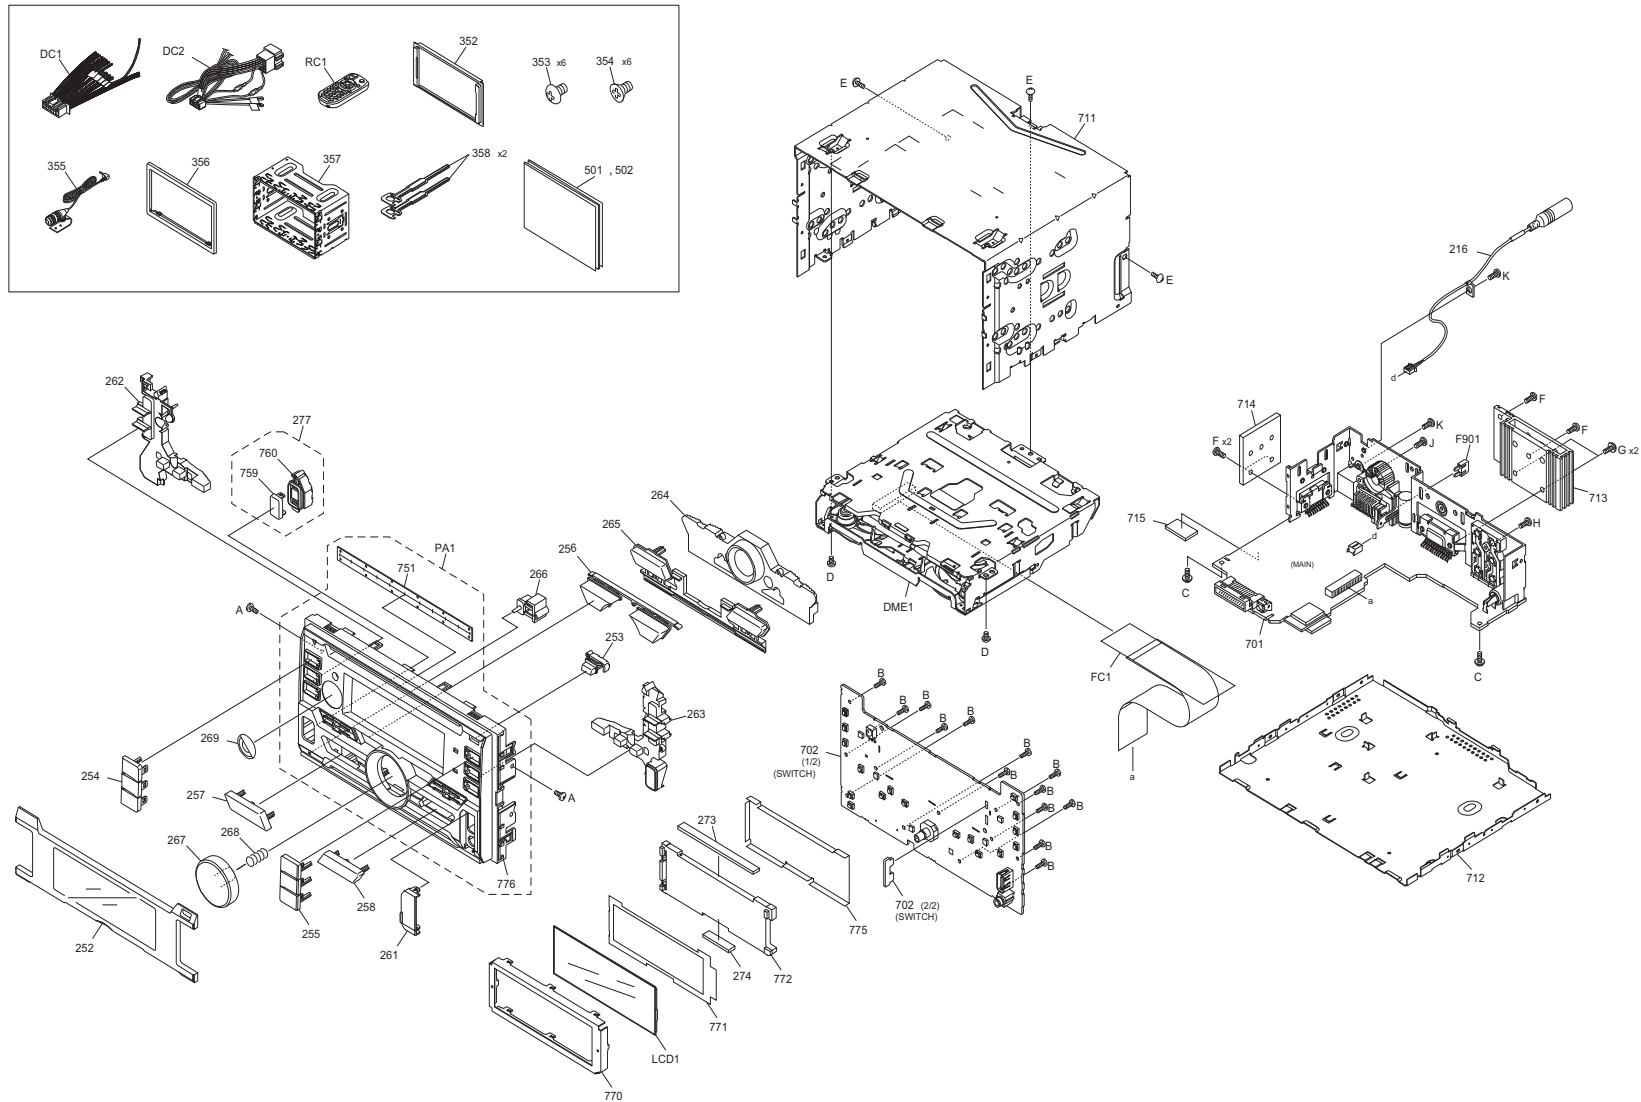

No.WA201

Parts with the exploded numbers larger than 700 are not supplied.


created date:2016-01-06

| MODEL      | MARK | MODEL      | MARK | MODEL      | MARK | MODEL    | MARK |
|------------|------|------------|------|------------|------|----------|------|
| DPX-5000BT | A1   | DPX-5000BT | E1   | DPX-5000BT | M1   | DPX502BT | K1   |
| DPX530BT   | K2   | DPX592BT   | K0   |            |      |          |      |

| Safe                        | Symbol No. | Parts No.    | Parts Name      | Description         | QTY | Local          |
|-----------------------------|------------|--------------|-----------------|---------------------|-----|----------------|
| EXPLODED VIEW (UNIT) <M1MM> |            |              |                 |                     |     |                |
| △                           | DC1        | QAM1623-002  | DC CORD         |                     | 1   | A1,M1,K1,K2,K0 |
| △                           | DC2        | QAM1625-002  | DC CORD         |                     | 1   | E1             |
|                             | DME1       | XJJ-0410-00  | CD MECHANISM    |                     | 1   |                |
| △                           | F901       | FZB10BT-100  | BLADE FUSE      |                     | 1   |                |
|                             | FC1        | E3F-0100-00  | FLAT CABLE      |                     | 1   |                |
|                             | LCD1       | B3H-0037-00  | LCD             |                     | 1   |                |
|                             | PA1        | A6D-0064-02  | PANEL ASSY      |                     | 1   | A1,E1,M1       |
|                             | PA1        | A6D-0064-01  | PANEL ASSY      |                     | 1   | K1,K2          |
|                             | PA1        | A6D-0064-03  | PANEL ASSY      |                     | 1   | K0             |
|                             | RC1        | QAL1303-004  | REMOCON         |                     | 1   | A1,M1,K1,K2,K0 |
|                             | A          | QYSDST2004ZA | TAP SCREW       | M2 x 4mm            | 2   |                |
|                             | B          | QYSDSF2006ZA | TAP SCREW       | M2 x 6mm            | 13  |                |
|                             | C          | GE40377-002A | SPECIAL SCREW   |                     | 2   |                |
|                             | D          | QYSDST2604ZA | TAP SCREW       | M2.6 x 4mm          | 2   |                |
|                             | E          | QYSDST2606ZA | TAP SCREW       | M2.6 x 6mm          | 3   |                |
|                             | F          | QYSDST2610ZA | TAP SCREW       | M2.6 x 10mm         | 4   |                |
|                             | G          | GE40377-005A | SPECIAL SCREW   |                     | 2   |                |
|                             | H          | QYSDSF2608ZA | TAP SCREW       | M2.6 x 8mm          | 1   |                |
|                             | J          | QYSPSG3008ZA | TAP SCREW       | M3 x 8mm            | 1   |                |
|                             | K          | QYSDST2606ZA | TAP SCREW       | M2.6 x 6mm          | 2   | K1,K0          |
|                             | 216        | E3A-0212-00  | CORD W.CON.     |                     | 1   | K1,K0          |
|                             | 252        | B1A-0045-07  | FRONT GLASS     |                     | 1   | A1,M1          |
|                             | 252        | B1A-0045-05  | FRONT GLASS     |                     | 1   | E1             |
|                             | 252        | B1A-0045-02  | FRONT GLASS     |                     | 1   | K1             |
|                             | 252        | B1A-0045-0D  | FRONT GLASS     |                     | 1   | K2             |
|                             | 252        | B1A-0045-01  | FRONT GLASS     |                     | 1   | K0             |
|                             | 253        | K2E-0038-00  | PUSH KNOB       | EJECT               | 1   |                |
|                             | 254        | K2F-0041-00  | PUSH KNOB       | PRESET 1-3          | 1   |                |
|                             | 255        | K2F-0042-00  | PUSH KNOB       | PRESET 4-6          | 1   |                |
|                             | 256        | K2F-0043-00  | PUSH KNOB       | DISP RETURN         | 1   |                |
|                             | 257        | K2F-0044-00  | PUSH KNOB       | FORWARD             | 1   |                |
|                             | 258        | K2F-0045-00  | PUSH KNOB       | UP DOWN             | 1   |                |
|                             | 261        | F0G-0126-00  | COVER           |                     | 1   |                |
|                             | 262        | B1K-0043-00  | LIGHTING BOARD  | L                   | 1   |                |
|                             | 263        | B1K-0044-00  | LIGHTING BOARD  | R                   | 1   |                |
|                             | 264        | B1K-0045-00  | LIGHTING BOARD  | VOL                 | 1   |                |
|                             | 265        | K2F-0046-04  | PUSH KNOB       |                     | 1   | A1,M1          |
|                             | 265        | K2F-0046-03  | PUSH KNOB       |                     | 1   | E1             |
|                             | 265        | K2F-0046-05  | PUSH KNOB       |                     | 1   | K1,K2          |
|                             | 265        | K2F-0046-02  | PUSH KNOB       |                     | 1   | K0             |
|                             | 266        | K2E-0039-00  | PUSH KNOB       | RESET               | 1   |                |
|                             | 267        | K28-0533-13  | KNOB            | VOL                 | 1   |                |
|                             | 268        | G01-4826-04  | TOR.COIL SPRING |                     | 1   |                |
|                             | 269        | W0C-0170-00  | RF TAG          |                     | 1   | A1,E1,M1       |
|                             | 273        | QNZ1122-001  | RUBBER CONNE    |                     | 1   |                |
|                             | 274        | QNZ1123-001  | RUBBER CONNE    |                     | 1   |                |
|                             | 277        | K2K-0184-01  | KNOB ASSY       |                     | 1   | A1,M1          |
|                             | 277        | K2K-0184-00  | KNOB ASSY       |                     | 1   | E1,K1,K2,K0    |
|                             | 352        | B9H-0002-00  | ESCUTCHEON      |                     | 1   | A1,M1,K0       |
|                             | 353        | QYSDSP5008ZA | SCREW           | M5 x 8mm            | 6   | A1,M1,K0       |
|                             | 354        | QYSSSP5008ZA | SCREW           | M5 x 8mm            | 6   | A1,M1,K0       |
|                             | 355        | QAN0126-001  | MICROPHONE      |                     | 1   |                |
|                             | 356        | GE20366-001A | TRIM PLATE      |                     | 1   | E1,K1,K2,K0    |
|                             | 357        | LV22876-001A | SLEEVE ASSY     |                     | 1   | E1,K1,K2,K0    |
|                             | 358        | LV45516-001A | LEVER           |                     | 2   | E1,K1,K2,K0    |
|                             | 501        | B5A-0913-00  | INST.MANUAL     | INDO                | 1   | A1             |
|                             | 501        | B5A-0911-00  | INST.MANUAL     | ENG GER RUS UKR     | 1   | E1             |
|                             | 501        | B5A-0912-00  | INST.MANUAL     | ENG ARA             | 1   | M1             |
|                             | 501        | B5A-0909-00  | INST.MANUAL     | ENG FRE SPA         | 1   | K1,K0          |
|                             | 501        | B5A-0910-00  | INST.MANUAL     | ENG FRE SPA         | 1   | K2             |
|                             | 502        | B5A-0911-01  | INST.MANUAL     | FRE SPA ITA POR DUT | 1   | E1             |
|                             | 701        | -----        | MAIN PWB ASSY   | NO SERVICE PART     | 1   | A1             |
|                             | 701        | -----        | MAIN PWB ASSY   | NO SERVICE PART     | 1   | E1             |
|                             | 701        | -----        | MAIN PWB ASSY   | NO SERVICE PART     | 1   | M1             |
|                             | 701        | -----        | MAIN PWB ASSY   | NO SERVICE PART     | 1   | K1             |
|                             | 701        | -----        | MAIN PWB ASSY   | NO SERVICE PART     | 1   | K2             |
|                             | 701        | -----        | MAIN PWB ASSY   | NO SERVICE PART     | 1   | K0             |
|                             | 702        | -----        | SWITCH PWB ASSY | NO SERVICE PART     | 1   | A1,M1,K1,K2,K0 |
|                             | 702        | -----        | SWITCH PWB ASSY | NO SERVICE PART     | 1   | E1             |
|                             | 711        | -----        | TOP CHASSIS     | NO SERVICE PART     | 1   |                |
|                             | 712        | -----        | BOTTOM PLATE    | NO SERVICE PART     | 1   |                |
|                             | 713        | -----        | HEAT SINK       | NO SERVICE PART     | 1   |                |
|                             | 714        | -----        | REG HEAT SINK   | NO SERVICE PART     | 1   |                |
|                             | 715        | -----        | COOL SHEET      | NO SERVICE PART     | 1   |                |
|                             | 751        | -----        | BLIND PLATE     | NO SERVICE PART     | 1   |                |
|                             | 759        | -----        | KEY TOP         | NO SERVICE PART     | 1   | A1,M1          |
|                             | 759        | -----        | KEY TOP         | NO SERVICE PART     | 1   | E1,K1,K2,K0    |
|                             | 760        | -----        | KNOB BASE       | NO SERVICE PART     | 1   |                |
|                             | 770        | -----        | LCD CASE        | NO SERVICE PART     | 1   |                |
|                             | 771        | -----        | LIGHTING SHEET  | NO SERVICE PART     | 1   |                |
|                             | 772        | -----        | LCD LENS        | NO SERVICE PART     | 1   |                |
|                             | 775        | -----        | REFLECTION SHT  | NO SERVICE PART     | 1   |                |
|                             | 776        | -----        | PANEL           | NO SERVICE PART     | 1   | A1,E1,M1       |
|                             | 776        | -----        | PANEL           | NO SERVICE PART     | 1   | K1,K2          |
|                             | 776        | -----        | PANEL           | NO SERVICE PART     | 1   | K0             |

## Block No.MBMM

- ★W01-1738-08
- W01-2067-08



| MODEL      | MARK | MODEL      | MARK | MODEL      | MARK | MODEL    | MARK |
|------------|------|------------|------|------------|------|----------|------|
| DPX-5000BT | A1   | DPX-5000BT | E1   | DPX-5000BT | M1   | DPX502BT | K1   |
| DPX530BT   | K2   | DPX592BT   | K0   |            |      |          |      |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|------|------------|-----------|------------|-------------|-----|-------|
|------|------------|-----------|------------|-------------|-----|-------|

EXPLODED VIEW (CD MECHANISM: XJJ-0410-00) <MBMM>

|      |               |                    |                 |   |
|------|---------------|--------------------|-----------------|---|
| DM1  | CM-FC2-MD     | MD CHASSIS ASSY    |                 | 1 |
| DM2  | CM-FC2-M      | LOADING MOTOR ASSY |                 | 1 |
| DPU1 | T2F-0002-00   | CD OPT PICKUP      |                 | 1 |
| FPC1 | QAL1465-001   | FPC                |                 | 1 |
| A    | LV45568-001A  | MINI SCREW         |                 | 2 |
| B    | QYSPSGT1745ZA | TAP SCREW          | M1.7 x 4.5mm    | 1 |
| C    | QYSPSPT2025MA | SCREW              | M2 x 2.5mm      | 2 |
| D    | VKZ4539-054   | MINI SCREW         |                 | 5 |
| E    | LV45818-001A  | G.HOLDER SCREW     |                 | 5 |
| F    | LV45815-001A  | M. SHAFT SCREW     |                 | 1 |
| G    | LV45816-001A  | ROLLER WASHER      |                 | 2 |
| 1    | LV11877-003A  | OUTER CHASSIS      |                 | 1 |
| 2    | LV11878-004A  | LOWER CHASSIS      |                 | 1 |
| 3    | LV3A174-002A  | DISC ARM L         |                 | 1 |
| 4    | LV3A175-001A  | DISC ARM R         |                 | 1 |
| 5    | LV23057-001A  | SLIDER R           |                 | 1 |
| 6    | LV3A178-001A  | TRIGGER SLIDER     |                 | 1 |
| 7    | LV23058-001A  | SLIDER L           |                 | 1 |
| 8    | LV3A179-002A  | TRIGGER ARM        |                 | 1 |
| 9    | LV3A173-001A  | JOINT LEVER        |                 | 1 |
| 10   | LV23055-003A  | ROLLER LEVER       |                 | 1 |
| 12   | LV3A181-002A  | TRANSFER ARM       |                 | 1 |
| 13   | LV45797-002A  | SL LOCK CAM        |                 | 1 |
| 14   | LV3A182-003A  | SL LOCK ARM        |                 | 1 |
| 15   | LV3A183-001A  | PICK LOCK ARM      |                 | 1 |
| 18   | LV3A187-002A  | HELICAL GEAR 1     |                 | 1 |
| 19   | LV3A188-001A  | TRANSFER GEAR      |                 | 1 |
| 20   | LV3A189-001A  | LOAD GEAR H        |                 | 1 |
| 21   | LV3A190-001A  | DRIVE GEAR         |                 | 1 |
| 22   | LV3A191-001A  | JOINT GEAR         |                 | 1 |
| 23   | LV3A192-001A  | WORM GEAR 2        |                 | 1 |
| 24   | LV3A193-001A  | HELICAL GEAR 2     |                 | 1 |
| 25   | LV3A194-001A  | LOAD GEAR V        |                 | 1 |
| 26   | LV3A195-001A  | PICK GEAR 1        |                 | 1 |
| 27   | LV3A196-001A  | PICK GEAR 2        |                 | 1 |
| 28   | LV3A197-001A  | RACK GEAR          |                 | 1 |
| 32   | LV45796-001A  | R.RETAINER L       |                 | 1 |
| 33   | D39-0403-05   | DAMPER             |                 | 2 |
| 38   | LV45809-001A  | FLOAT SPRING(F)    |                 | 2 |
| 39   | LV45810-001A  | TRIGGER SPRING     |                 | 1 |
| 40   | LV45811-001A  | LOAD SPRING        |                 | 1 |
| 41   | LV45812-001A  | ROLLER SPRING      |                 | 1 |
| 42   | LV45813-002A  | CLAMP SPRING       |                 | 1 |
| 43   | LV45814-001A  | PICK SPRING        |                 | 1 |
| 44   | LV36813-201A  | SUB GUIDE CAP      |                 | 1 |
| 46   | D2B-0037-00   | SHAFT              |                 | 1 |
| 49   | LV11881-002A  | GEAR HOLDER        |                 | 1 |
| 50   | LV11880-003A  | DISC GUIDE         |                 | 1 |
| 54   | CM-FC2-R      | ROLLER ASSY        |                 | 1 |
| 55   | D10-7176-03   | ARM                |                 | 1 |
| 56   | G01-4809-04   | EXTEN.SPRING       |                 | 1 |
| 57   | D39-0404-05   | DAMPER             |                 | 1 |
| 58   | LV45835-001A  | FLOAT SPRING(R)    |                 | 2 |
| 60   | LV3A271-001A  | CL BASE ASSY       |                 | 1 |
| 811  | -----         | CLAMP ARM          | NO SERVICE PART | 1 |
| 816  | -----         | ROLLER GEAR        | NO SERVICE PART | 1 |
| 817  | -----         | WORM GEAR 1        | NO SERVICE PART | 1 |
| 829  | -----         | ROLLER             | NO SERVICE PART | 2 |
| 830  | -----         | ROLLER SHAFT       | NO SERVICE PART | 1 |
| 831  | -----         | R.RETAINER R       | NO SERVICE PART | 1 |
| 834  | -----         | SIN TWIST WIRE     | NO SERVICE PART | 1 |
| 835  | -----         | SIN TWIST WIRE     | NO SERVICE PART | 1 |
| 836  | -----         | SIN TWIST WIRE     | NO SERVICE PART | 2 |
| 845  | -----         | HC TURN TABLE      | NO SERVICE PART | 1 |
| 847  | -----         | CLAMPER            | NO SERVICE PART | 1 |
| 848  | -----         | WIRE HOLDER        | NO SERVICE PART | 1 |
| 851  | -----         | MD CHASSIS ASSY    | NO SERVICE PART | 1 |
| 852  | -----         | SPINDLE MOTOR      | NO SERVICE PART | 1 |
| 853  | -----         | CD MECHA PWB ASSY  | NO SERVICE PART | 1 |
| 859  | -----         | MOTOR              | NO SERVICE PART | 1 |

| MODEL      | MARK | MODEL      | MARK | MODEL      | MARK | MODEL    | MARK |
|------------|------|------------|------|------------|------|----------|------|
| DPX-5000BT | A1   | DPX-5000BT | E1   | DPX-5000BT | M1   | DPX502BT | K1   |
| DPX530BT   | K2   | DPX592BT   | K0   |            |      |          |      |

| Safe                              | Symbol No. | Parts No.      | Parts Name      | Description | QTY | Local |
|-----------------------------------|------------|----------------|-----------------|-------------|-----|-------|
| MAIN PWB ASSY (XJ1-144x-0x) <XJ1> |            |                |                 |             |     |       |
|                                   | IC101      | TC74HCT4053FT  | MOS IC          |             | 1   | K1,K0 |
|                                   | IC102      | NJM8065V       | ANALOG IC       |             | 1   |       |
|                                   | IC161      | NJM8065V       | ANALOG IC       |             | 1   |       |
|                                   | IC162      | NJM8065V       | ANALOG IC       |             | 1   |       |
|                                   | IC163      | NJM8065V       | ANALOG IC       |             | 1   |       |
|                                   | IC164      | NJM11100F1     | ANALOG IC       |             | 1   |       |
|                                   | IC220      | NJM8065V       | ANALOG IC       |             | 1   |       |
| △                                 | IC301      | JCV8034        | IC              |             | 1   |       |
|                                   | IC411      | MF1337S395901  | MCU IC          |             | 1   |       |
|                                   | IC470      | TC7SH08FU-X    | IC(DIGITAL)     |             | 1   | K1,K0 |
|                                   | IC540      | BD2242G-G      | MOS IC          |             | 1   |       |
| △                                 | IC601      | TEF6657HN-X    | IC              |             | 1   |       |
| △                                 | IC701      | STA1080        | MPU IC          |             | 1   |       |
|                                   | IC702      | TC7SH08FU-X    | IC(DIGITAL)     |             | 1   |       |
| △                                 | IC821      | W3F-0137-00    | ROM IC          |             | 1   |       |
| △                                 | IC822      | W25Q16DVSSIG   | ROM IC          |             | 1   |       |
|                                   | IC831      | BU4228F-W      | IC              |             | 1   |       |
|                                   | IC841      | BR24T02FJ-W-X  | IC              |             | 1   |       |
|                                   | IC851      | BD001A5WEFJ    | ANALOG IC       |             | 1   |       |
|                                   | IC862      | MP9943AGQ      | ANALOG IC       |             | 1   |       |
| △                                 | IC901      | LV5685PV-H     | ANALOG IC       |             | 1   |       |
|                                   | IC930      | BD33IC0WEFJ    | ANALOG IC       |             | 1   |       |
|                                   | IC941      | BU33TD3WG      | MOS IC          |             | 1   |       |
|                                   | IC1303     | W0C-0167-00    | CIRCUIT MODULE  |             | 1   |       |
|                                   | Q220       | 2SC1623/5-6/-X | TRANSISTOR      |             | 1   |       |
|                                   | Q240       | IMX9           | DUAL TRANSISTOR |             | 1   |       |
|                                   | Q270       | LTA024EEB-X    | DIGI TRANSISTOR |             | 1   |       |
|                                   | Q271       | LSAR523UBFS8   | TRANSISTOR      |             | 1   |       |
|                                   | Q272       | LTC024EEB-X    | DIGI TRANSISTOR |             | 1   |       |
|                                   | Q273       | LTA024EEB-X    | DIGI TRANSISTOR |             | 1   |       |
|                                   | Q370       | IMX9           | DUAL TRANSISTOR |             | 1   |       |
|                                   | Q380       | IMX9           | DUAL TRANSISTOR |             | 1   |       |
|                                   | Q470       | LTC014EEBFS8   | DIGI TRANSISTOR |             | 1   | K1,K0 |
|                                   | Q471       | LTC043TEB-X    | DIGI TRANSISTOR |             | 1   | K1,K0 |
|                                   | Q880       | LTC043EUBFS8   | DIGI TRANSISTOR |             | 1   |       |
|                                   | Q920       | LTA014YEBFS8   | DIGI TRANSISTOR |             | 1   |       |
|                                   | Q2001      | LTA043EEBFS8   | DIGI TRANSISTOR |             | 1   |       |
|                                   | Q2002      | LTC043TEB-X    | DIGI TRANSISTOR |             | 1   |       |
|                                   | Q2010      | LTC043TEB-X    | DIGI TRANSISTOR |             | 1   |       |
|                                   | Q2011      | LTC043TEB-X    | DIGI TRANSISTOR |             | 1   |       |
|                                   | Q2020      | LTC043TEB-X    | DIGI TRANSISTOR |             | 1   |       |
|                                   | Q2021      | LTC043TEB-X    | DIGI TRANSISTOR |             | 1   |       |
|                                   | Q2030      | LTC043TEB-X    | DIGI TRANSISTOR |             | 1   |       |
|                                   | Q2031      | LTC043TEB-X    | DIGI TRANSISTOR |             | 1   |       |
|                                   | D100       | DZ2J075M       | ZENER DIODE     |             | 1   |       |
|                                   | D101       | DZ2J075M       | ZENER DIODE     |             | 1   |       |
|                                   | D220       | DZ2J068M       | ZENER DIODE     |             | 1   | K1,K0 |
|                                   | D221       | DZ2J068M       | ZENER DIODE     |             | 1   | K1,K0 |
|                                   | D222       | DZ2J056M       | ZENER DIODE     |             | 1   |       |
|                                   | D271       | BAW56-TP-X     | SI DIODE        |             | 1   |       |
|                                   | D273       | DA2J101        | DIODE           |             | 1   |       |
|                                   | D370       | BAW56-TP-X     | SI DIODE        |             | 1   |       |
|                                   | D390       | MBRX130        | SCHOTTKY DIODE  |             | 1   |       |
|                                   | D391       | MBR0530-X      | SB DIODE        |             | 1   |       |
|                                   | D400       | RB521SM-30-X   | SB DIODE        |             | 1   |       |
|                                   | D401       | DZ2J051M       | ZENER DIODE     |             | 1   |       |
|                                   | D471       | RSB6.8SM-X     | BP Z DIODE      |             | 1   |       |
|                                   | D472       | RSB6.8SM-X     | BP Z DIODE      |             | 1   | K1,K0 |
|                                   | D473       | RSB6.8SM-X     | BP Z DIODE      |             | 1   |       |
|                                   | D474       | RSB6.8SM-X     | BP Z DIODE      |             | 1   | K1,K0 |
|                                   | D475       | DZ2J068M       | ZENER DIODE     |             | 1   | K1,K0 |
|                                   | D476       | DZ2J068M       | ZENER DIODE     |             | 1   | K1,K0 |
|                                   | D701       | DZ2J051M       | ZENER DIODE     |             | 1   |       |
|                                   | D702       | DZ2J051M       | ZENER DIODE     |             | 1   |       |
|                                   | D704       | DZ2J051M       | ZENER DIODE     |             | 1   |       |
|                                   | D706       | DZ2J051M       | ZENER DIODE     |             | 1   |       |
|                                   | D707       | DZ2J051M       | ZENER DIODE     |             | 1   |       |
|                                   | D709       | DZ2J051M       | ZENER DIODE     |             | 1   |       |
|                                   | D710       | DZ2J051M       | ZENER DIODE     |             | 1   |       |
|                                   | D711       | DZ2J051M       | ZENER DIODE     |             | 1   |       |
|                                   | D862       | DB22306        | SCHOTTKY DIODE  |             | 1   |       |
|                                   | D902       | SK34A-L-X      | SB DIODE        |             | 1   |       |
|                                   | D903       | SK34A-L-X      | SB DIODE        |             | 1   |       |
|                                   | D930       | GS1J-LTP       | DIODE           |             | 1   |       |
| △                                 | D990       | 1N5401-BPC04   | SI DIODE        |             | 1   |       |
|                                   | D2005      | DA2J101        | DIODE           |             | 1   |       |
|                                   | D2006      | DA2J101        | DIODE           |             | 1   |       |
|                                   | D2008      | DA2J101        | DIODE           |             | 1   |       |
|                                   | D2009      | DA2J101        | DIODE           |             | 1   |       |
|                                   | C103       | CK73FXR1C475K  | C CAPACITOR     | 4.7uF 16V K | 1   |       |
|                                   | C104       | CK73FXR1C106K  | C CAPACITOR     | 10uF 16V K  | 1   |       |
|                                   | C105       | CK73FXR1C475K  | C CAPACITOR     | 4.7uF 16V K | 1   |       |
|                                   | C106       | CK73GXR1A105K  | C CAPACITOR     | 1uF 10V K   | 1   |       |
|                                   | C120       | CC73HCH1H180J  | C CAPACITOR     | 18pF 50V J  | 1   |       |
|                                   | C121       | CC73HCH1H180J  | C CAPACITOR     | 18pF 50V J  | 1   |       |
|                                   | C122       | CK73FXR1C475K  | C CAPACITOR     | 4.7uF 16V K | 1   |       |
|                                   | C123       | CK73FXR1C475K  | C CAPACITOR     | 4.7uF 16V K | 1   |       |
|                                   | C124       | CC73HCH1H050C  | C CAPACITOR     | 5pF 50V C   | 1   |       |
|                                   | C125       | CC73HCH1H050C  | C CAPACITOR     | 5pF 50V C   | 1   |       |
|                                   | C126       | CK73FXR1C106K  | C CAPACITOR     | 10uF 16V K  | 1   |       |

|            |      |            |      |            |      |          |      |
|------------|------|------------|------|------------|------|----------|------|
| MODEL      | MARK | MODEL      | MARK | MODEL      | MARK | MODEL    | MARK |
| DPX-5000BT | A1   | DPX-5000BT | E1   | DPX-5000BT | M1   | DPX502BT | K1   |
| DPX530BT   | K2   | DPX592BT   | K0   |            |      |          |      |

| Safe | Symbol No. | Parts No.     | Parts Name  | Description   | QTY | Local       |
|------|------------|---------------|-------------|---------------|-----|-------------|
|      | C127       | CK73FXR1C106K | C CAPACITOR | 10uF 16V K    | 1   |             |
|      | C146       | CK73HBB1H221K | C CAPACITOR | 220pF 50V J   | 1   | A1,E1,M1,K0 |
|      | C146       | CC73HCH1H271J | C CAPACITOR | 270pF 50V J   | 1   | K1,K2       |
|      | C160       | CK73FXR1C106K | C CAPACITOR | 10uF 16V K    | 1   | A1,E1,M1,K0 |
|      | C160       | CK73FXR1C475K | C CAPACITOR | 4.7uF 16V K   | 1   | K1,K2       |
|      | C161       | CK73FXR1C106K | C CAPACITOR | 10uF 16V K    | 1   | A1,E1,M1,K0 |
|      | C161       | CK73FXR1C475K | C CAPACITOR | 4.7uF 16V K   | 1   | K1,K2       |
|      | C162       | CC73HCH1H270J | C CAPACITOR | 27pF 50V J    | 1   | A1,E1,M1,K0 |
|      | C162       | CC73HCH1H470J | C CAPACITOR | 47pF 50V J    | 1   | K1,K2       |
|      | C163       | CK73HBB1H221K | C CAPACITOR | 220pF 50V K   | 1   | A1,E1,M1,K0 |
|      | C163       | CC73HCH1H271J | C CAPACITOR | 270pF 50V J   | 1   | K1,K2       |
|      | C164       | CC73HCH1H270J | C CAPACITOR | 27pF 50V J    | 1   | A1,E1,M1,K0 |
|      | C164       | CC73HCH1H470J | C CAPACITOR | 47pF 50V J    | 1   | K1,K2       |
|      | C165       | CK73FXR1C106K | C CAPACITOR | 10uF 16V K    | 1   | A1,E1,M1,K0 |
|      | C165       | CK73FXR1C475K | C CAPACITOR | 4.7uF 16V K   | 1   | K1,K2       |
|      | C166       | CC73HCH1H270J | C CAPACITOR | 27pF 50V J    | 1   | A1,E1,M1,K0 |
|      | C166       | CC73HCH1H470J | C CAPACITOR | 47pF 50V J    | 1   | K1,K2       |
|      | C167       | CK73FXR1C106K | C CAPACITOR | 10uF 16V K    | 1   |             |
|      | C169       | CK73FXR1C106K | C CAPACITOR | 10uF 16V K    | 1   | A1,E1,M1,K0 |
|      | C169       | CK73FXR1C475K | C CAPACITOR | 4.7uF 16V K   | 1   | K1,K2       |
|      | C170       | CC73HCH1H270J | C CAPACITOR | 27pF 50V J    | 1   | A1,E1,M1,K0 |
|      | C170       | CC73HCH1H470J | C CAPACITOR | 47pF 50V J    | 1   | K1,K2       |
|      | C171       | CK73FXR1C106K | C CAPACITOR | 10uF 16V K    | 1   | A1,E1,M1,K0 |
|      | C171       | CK73FXR1C475K | C CAPACITOR | 4.7uF 16V K   | 1   | K1,K2       |
|      | C172       | CC73HCH1H270J | C CAPACITOR | 27pF 50V J    | 1   | A1,E1,M1,K0 |
|      | C172       | CC73HCH1H470J | C CAPACITOR | 47pF 50V J    | 1   | K1,K2       |
|      | C173       | CK73FXR1C106K | C CAPACITOR | 10uF 16V K    | 1   | A1,E1,M1,K0 |
|      | C173       | CK73FXR1C475K | C CAPACITOR | 4.7uF 16V K   | 1   | K1,K2       |
|      | C174       | CK73HBB1H221K | C CAPACITOR | 220pF 50V K   | 1   | A1,E1,M1,K0 |
|      | C174       | CC73HCH1H271J | C CAPACITOR | 270pF 50V J   | 1   | K1,K2       |
|      | C175       | CC73HCH1H270J | C CAPACITOR | 27pF 50V J    | 1   | A1,E1,M1,K0 |
|      | C175       | CC73HCH1H470J | C CAPACITOR | 47pF 50V J    | 1   | K1,K2       |
|      | C176       | CC73HCH1H270J | C CAPACITOR | 27pF 50V J    | 1   | A1,E1,M1,K0 |
|      | C176       | CC73HCH1H470J | C CAPACITOR | 47pF 50V J    | 1   | K1,K2       |
|      | C177       | CK73FXR1C106K | C CAPACITOR | 10uF 16V K    | 1   |             |
|      | C179       | CK73FXR1C106K | C CAPACITOR | 10uF 16V K    | 1   | A1,E1,M1,K0 |
|      | C179       | CK73FXR1C475K | C CAPACITOR | 4.7uF 16V K   | 1   | K1,K2       |
|      | C180       | CK73FXR1C106K | C CAPACITOR | 10uF 16V K    | 1   | A1,E1,M1,K0 |
|      | C180       | CK73FXR1C475K | C CAPACITOR | 4.7uF 16V K   | 1   | K1,K2       |
|      | C181       | CK73FXR1C106K | C CAPACITOR | 10uF 16V K    | 1   | A1,E1,M1,K0 |
|      | C181       | CK73FXR1C475K | C CAPACITOR | 4.7uF 16V K   | 1   | K1,K2       |
|      | C182       | CC73HCH1H270J | C CAPACITOR | 27pF 50V J    | 1   | A1,E1,M1,K0 |
|      | C182       | CC73HCH1H470J | C CAPACITOR | 47pF 50V J    | 1   | K1,K2       |
|      | C183       | CK73HBB1H221K | C CAPACITOR | 220pF 50V K   | 1   | A1,E1,M1,K0 |
|      | C183       | CC73HCH1H271J | C CAPACITOR | 270pF 50V J   | 1   | K1,K2       |
|      | C184       | CC73HCH1H270J | C CAPACITOR | 27pF 50V J    | 1   | A1,E1,M1,K0 |
|      | C184       | CC73HCH1H470J | C CAPACITOR | 47pF 50V J    | 1   | K1,K2       |
|      | C185       | CK73FXR1C106K | C CAPACITOR | 10uF 16V K    | 1   | A1,E1,M1,K0 |
|      | C185       | CK73FXR1C475K | C CAPACITOR | 4.7uF 16V K   | 1   | K1,K2       |
|      | C186       | CC73HCH1H270J | C CAPACITOR | 27pF 50V J    | 1   | A1,E1,M1,K0 |
|      | C186       | CC73HCH1H470J | C CAPACITOR | 47pF 50V J    | 1   | K1,K2       |
|      | C187       | CK73FXR1C106K | C CAPACITOR | 10uF 16V K    | 1   |             |
|      | C189       | CK73FXR1C106K | C CAPACITOR | 10uF 16V K    | 1   | A1,E1,M1,K0 |
|      | C189       | CK73FXR1C475K | C CAPACITOR | 4.7uF 16V K   | 1   | K1,K2       |
|      | C190       | CK73HBB1H221K | C CAPACITOR | 220pF 50V K   | 1   | A1,E1,M1,K0 |
|      | C190       | CC73HCH1H271J | C CAPACITOR | 270pF 50V J   | 1   | K1,K2       |
|      | C191       | CK73FXR0J106K | C CAPACITOR | 10uF 6.3V K   | 1   |             |
|      | C192       | CK73FXR0J106K | C CAPACITOR | 10uF 6.3V K   | 1   |             |
|      | C193       | CK73HBB1C103K | C CAPACITOR | 0.01uF 16V K  | 1   |             |
|      | C194       | CK73FXR1C106K | C CAPACITOR | 10uF 16V K    | 1   |             |
|      | C195       | CC73HCH1H270J | C CAPACITOR | 27pF 50V J    | 1   | A1,E1,M1,K0 |
|      | C195       | CC73HCH1H470J | C CAPACITOR | 47pF 50V J    | 1   | K1,K2       |
|      | C196       | CC73HCH1H270J | C CAPACITOR | 27pF 50V J    | 1   | A1,E1,M1,K0 |
|      | C196       | CC73HCH1H470J | C CAPACITOR | 47pF 50V J    | 1   | K1,K2       |
|      | C197       | CK73FXR1C106K | C CAPACITOR | 10uF 16V K    | 1   | A1,E1,M1,K0 |
|      | C197       | CK73FXR1C475K | C CAPACITOR | 4.7uF 16V K   | 1   | K1,K2       |
|      | C198       | CK73HBB1H221K | C CAPACITOR | 220pF 50V K   | 1   | A1,E1,M1,K0 |
|      | C198       | CC73HCH1H271J | C CAPACITOR | 270pF 50V J   | 1   | K1,K2       |
|      | C222       | CK73GBB1H333K | C CAPACITOR | 0.033uF 50V K | 1   |             |
|      | C223       | CK73GBB1H333K | C CAPACITOR | 0.033uF 50V K | 1   |             |
|      | C224       | CK73HXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |             |
|      | C225       | CK73HXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |             |
|      | C226       | CC73HCH1H220J | C CAPACITOR | 22pF 50V J    | 1   |             |
|      | C227       | CK73HBB1H471K | C CAPACITOR | 470pF 50V K   | 1   |             |
|      | C228       | CK73HXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |             |
|      | C229       | CK73HXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |             |
|      | C230       | CK73HXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |             |
|      | C231       | CK73HBB1H471K | C CAPACITOR | 470pF 50V K   | 1   |             |
|      | C234       | CK73GXR1C105K | C CAPACITOR | 1uF 16V K     | 1   |             |
|      | C235       | CK73GXR1C105K | C CAPACITOR | 1uF 16V K     | 1   |             |
|      | C236       | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K   | 1   |             |
|      | C237       | CK73HBB1C103K | C CAPACITOR | 0.01uF 16V K  | 1   |             |
|      | C251       | CK73EBB1A106K | C CAPACITOR | 10uF 10V K    | 1   |             |
|      | C261       | CK73EBB1A106K | C CAPACITOR | 10uF 10V K    | 1   |             |
|      | C273       | CK73GXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |             |
|      | C304       | CD04AV1C470M  | E CAPACITOR | 47uF 16V M    | 1   |             |
|      | C311       | CK73FBB0J475K | C CAPACITOR | 4.7uF 6.3V K  | 1   |             |
|      | C312       | CK730AV1C105K | C CAPACITOR | 1uF 16V K     | 1   |             |
|      | C316       | CK730AV1C224K | C CAPACITOR | 0.22uF 16V K  | 1   |             |
|      | C317       | CK730AV1C224K | C CAPACITOR | 0.22uF 16V K  | 1   |             |

|            |      |            |      |            |      |          |      |
|------------|------|------------|------|------------|------|----------|------|
| MODEL      | MARK | MODEL      | MARK | MODEL      | MARK | MODEL    | MARK |
| DPX-5000BT | A1   | DPX-5000BT | E1   | DPX-5000BT | M1   | DPX502BT | K1   |
| DPX530BT   | K2   | DPX592BT   | K0   |            |      |          |      |

| Safe | Symbol No. | Parts No.     | Parts Name  | Description   | QTY | Local |
|------|------------|---------------|-------------|---------------|-----|-------|
|      | C318       | CK730AV1C224K | C CAPACITOR | 0.22uF 16V K  | 1   |       |
|      | C319       | CK730AV1C224K | C CAPACITOR | 0.22uF 16V K  | 1   |       |
|      | C321       | CK73EBB1A106K | C CAPACITOR | 10uF 10V K    | 1   |       |
|      | C331       | CK73EBB1A106K | C CAPACITOR | 10uF 10V K    | 1   |       |
|      | C341       | CK73EBB1A106K | C CAPACITOR | 10uF 10V K    | 1   |       |
|      | C351       | CK73EBB1A106K | C CAPACITOR | 10uF 10V K    | 1   |       |
|      | C370       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |       |
|      | C390       | CK73FBB1H224K | C CAPACITOR | 0.22uF 50V K  | 1   |       |
|      | C391       | CK73FBB1H224K | C CAPACITOR | 0.22uF 50V K  | 1   |       |
|      | C402       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |       |
|      | C410       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |       |
|      | C472       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |       |
|      | C473       | CK73FXR1C106K | C CAPACITOR | 10uF 16V K    | 1   | K1,K0 |
|      | C474       | CK73GXR1C225K | C CAPACITOR | 2.2uF 16V K   | 1   | K1,K0 |
|      | C475       | CK73GXR1C225K | C CAPACITOR | 2.2uF 16V K   | 1   | K1,K0 |
|      | C540       | CK73GXR1C105K | C CAPACITOR | 1uF 16V K     | 1   |       |
|      | C541       | CK73GXR1C105K | C CAPACITOR | 1uF 16V K     | 1   |       |
|      | C542       | CK73FXR0J106K | C CAPACITOR | 10uF 6.3V K   | 1   |       |
|      | C601       | CK73FXR0J106K | C CAPACITOR | 10uF 6.3V K   | 1   |       |
|      | C602       | CK73FXR0J106K | C CAPACITOR | 10uF 6.3V K   | 1   |       |
|      | C603       | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K   | 1   |       |
|      | C604       | CK73HBB1H152K | C CAPACITOR | 1500pF 50V K  | 1   |       |
|      | C605       | CK73GBB1H102K | C CAPACITOR | 1000pF 50V K  | 1   |       |
|      | C606       | CC73HCH1H090D | C CAPACITOR | 9pF 50V D     | 1   |       |
|      | C607       | CC73HCH1H010C | C CAPACITOR | 1pF 50V C     | 1   |       |
|      | C608       | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K  | 1   |       |
|      | C609       | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K   | 1   |       |
|      | C610       | CC73HCH1H120J | C CAPACITOR | 12pF 50V J    | 1   |       |
|      | C611       | CC73HCH1H010C | C CAPACITOR | 1pF 50V C     | 1   |       |
|      | C612       | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |       |
|      | C614       | CC73HCH1H220J | C CAPACITOR | 22pF 50V J    | 1   |       |
|      | C615       | CC73GCH1H330J | C CAPACITOR | 33pF 50V J    | 1   |       |
|      | C616       | CK73HBB1H102K | C CAPACITOR | 1000pF 50V K  | 1   |       |
|      | C617       | CK73HBB0J224K | C CAPACITOR | 0.22uF 6.3V K | 1   |       |
|      | C618       | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K   | 1   |       |
|      | C619       | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K   | 1   |       |
|      | C620       | CK73GXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |       |
|      | C621       | CK73GXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |       |
|      | C702       | CK73FXR1C106K | C CAPACITOR | 10uF 16V K    | 1   |       |
|      | C703       | CK73HBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |       |
|      | C704       | CC73HCH1H150J | C CAPACITOR | 15pF 50V J    | 1   |       |
|      | C705       | CC73HCH1H150J | C CAPACITOR | 15pF 50V J    | 1   |       |
|      | C706       | CK73FXR1C106K | C CAPACITOR | 10uF 16V K    | 1   |       |
|      | C707       | CK73HBB1E223K | C CAPACITOR | 0.022uF 25V K | 1   |       |
|      | C708       | CC73GCH1H101J | C CAPACITOR | 100pF 50V J   | 1   |       |
|      | C709       | CC73GCH1H100D | C CAPACITOR | 10pF 50V D    | 1   |       |
|      | C710       | CK73HBB1H222K | C CAPACITOR | 2200pF 50V K  | 1   |       |
|      | C711       | CK73GBB1H471K | C CAPACITOR | 470pF 50V K   | 1   |       |
|      | C713       | CK73GXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |       |
|      | C714       | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |       |
|      | C716       | CC73GCH1H101J | C CAPACITOR | 100pF 50V J   | 1   |       |
|      | C719       | CK73GXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |       |
|      | C720       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |       |
|      | C722       | CK73FXR0J106K | C CAPACITOR | 10uF 6.3V K   | 1   |       |
|      | C724       | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |       |
|      | C725       | CK73FXR1C106K | C CAPACITOR | 10uF 16V K    | 1   |       |
|      | C726       | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |       |
|      | C727       | CK73FXR1C106K | C CAPACITOR | 10uF 16V K    | 1   |       |
|      | C728       | CC73GCH1H101J | C CAPACITOR | 100pF 50V J   | 1   |       |
|      | C729       | CK73FXR1A475K | C CAPACITOR | 4.7uF 10V K   | 1   |       |
|      | C730       | CC73GCH1H101J | C CAPACITOR | 100pF 50V J   | 1   |       |
|      | C731       | CK73FXR1A475K | C CAPACITOR | 4.7uF 10V K   | 1   |       |
|      | C733       | CK73GXR0J475K | C CAPACITOR | 4.7uF 6.3V K  | 1   |       |
|      | C735       | CK73GBB1H472K | C CAPACITOR | 4700pF 50V K  | 1   |       |
|      | C736       | CC73HCH1H070D | C CAPACITOR | 7pF 50V D     | 1   |       |
|      | C737       | CC73HCH1H070D | C CAPACITOR | 7pF 50V D     | 1   |       |
|      | C738       | CK73GBB1H472K | C CAPACITOR | 4700pF 50V K  | 1   |       |
|      | C740       | CK73GBB1H472K | C CAPACITOR | 4700pF 50V K  | 1   |       |
|      | C741       | CC73GCH1H100D | C CAPACITOR | 10pF 50V D    | 1   |       |
|      | C742       | CC73GCH1H101J | C CAPACITOR | 100pF 50V J   | 1   |       |
|      | C750       | CK73FXR1A475K | C CAPACITOR | 4.7uF 10V K   | 1   |       |
|      | C756       | CK73HXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |       |
|      | C757       | CC73HCH1H330J | C CAPACITOR | 33pF 50V J    | 1   |       |
|      | C820       | CK73GBB1H472K | C CAPACITOR | 4700pF 50V K  | 1   |       |
|      | C821       | CK73GBB1H471K | C CAPACITOR | 470pF 50V K   | 1   |       |
|      | C824       | CC73GCH1H101J | C CAPACITOR | 100pF 50V J   | 1   |       |
|      | C830       | CK73HBB1H471K | C CAPACITOR | 470pF 50V K   | 1   |       |
|      | C831       | CK73GXR1C105K | C CAPACITOR | 1uF 16V K     | 1   |       |
|      | C840       | CK73GBB1C473K | C CAPACITOR | 0.047uF 16V K | 1   |       |
|      | C851       | CK73FXR1C475K | C CAPACITOR | 4.7uF 16V K   | 1   |       |
|      | C868       | QEZO850-157Z  | E CAPACITOR | 150uF         | 1   |       |
|      | C871       | CK73HBB0J224K | C CAPACITOR | 0.22uF 6.3V K | 1   |       |
|      | C873       | CK73EBB1A106K | C CAPACITOR | 10uF 10V K    | 1   |       |
|      | C876       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |       |
|      | C878       | CK73EBB1A106K | C CAPACITOR | 10uF 10V K    | 1   |       |
|      | C880       | CK73HBB1A104K | C CAPACITOR | 0.1uF 10V K   | 1   |       |
|      | C881       | CK73GBB1C224K | C CAPACITOR | 0.22uF 16V K  | 1   |       |
|      | C883       | CC73HCH1H150J | C CAPACITOR | 15pF 50V J    | 1   |       |
|      | C903       | CD04AS1C220M  | E CAPACITOR | 22uF 16V M    | 1   |       |
|      | C904       | CK73GXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |       |
|      | C905       | CD04AR1C471M  | E CAPACITOR | 470uF 16V M   | 1   |       |
|      | C906       | CK73GXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |       |

|            |      |            |      |            |      |          |      |
|------------|------|------------|------|------------|------|----------|------|
| MODEL      | MARK | MODEL      | MARK | MODEL      | MARK | MODEL    | MARK |
| DPX-5000BT | A1   | DPX-5000BT | E1   | DPX-5000BT | M1   | DPX502BT | K1   |
| DPX530BT   | K2   | DPX592BT   | K0   |            |      |          |      |

| Safe | Symbol No. | Parts No.     | Parts Name  | Description   | QTY | Local       |
|------|------------|---------------|-------------|---------------|-----|-------------|
|      | C907       | CD04AS0J101M  | E CAPACITOR | 100uF 6.3V M  | 1   |             |
|      | C908       | CK73GXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |             |
|      | C909       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |             |
|      | C911       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |             |
|      | C912       | CK73GXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |             |
|      | C914       | CK73GXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |             |
|      | C916       | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |             |
|      | C930       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |             |
|      | C931       | CK73FXR0J106K | C CAPACITOR | 10uF 6.3V K   | 1   |             |
|      | C932       | CK73GXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |             |
|      | C940       | CK73FXR0J106K | C CAPACITOR | 10uF 6.3V K   | 1   |             |
|      | C941       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |             |
|      | C942       | CK73GXR1C105K | C CAPACITOR | 1uF 16V K     | 1   |             |
|      | C990       | QE20981-228   | E CAPACITOR | 2200uF        | 1   |             |
|      | C1003      | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |             |
|      | C1010      | CK73GBB1H471K | C CAPACITOR | 470pF 50V K   | 1   | A1,M1,K1,K0 |
|      | C1011      | CK73GBB1H471K | C CAPACITOR | 470pF 50V K   | 1   | A1,M1,K1,K0 |
|      | C1012      | CK73GBB1H471K | C CAPACITOR | 470pF 50V K   | 1   | A1,M1,K1,K0 |
|      | C1013      | CK73GBB1H471K | C CAPACITOR | 470pF 50V K   | 1   | A1,M1,K1,K0 |
|      | C1014      | CK73GBB1H471K | C CAPACITOR | 470pF 50V K   | 1   | A1,M1,K1,K0 |
|      | C1015      | CK73GBB1H471K | C CAPACITOR | 470pF 50V K   | 1   | A1,M1,K1,K0 |
|      | C1016      | CK73GBB1H471K | C CAPACITOR | 470pF 50V K   | 1   | A1,M1,K1,K0 |
|      | C1017      | CK73GBB1H471K | C CAPACITOR | 470pF 50V K   | 1   | A1,M1,K1,K0 |
|      | C1020      | CK73GBB1C104K | C CAPACITOR | 0.1uF 16V K   | 1   |             |
|      | C1300      | CK73GXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |             |
|      | C1301      | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |             |
|      | C1600      | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |             |
|      | C1601      | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |             |
|      | C1602      | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |             |
|      | C1603      | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |             |
|      | C1604      | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |             |
|      | C1900      | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |             |
|      | C2003      | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |             |
|      | C2005      | CK73GBB1H471K | C CAPACITOR | 470pF 50V K   | 1   |             |
|      | C2006      | CC73GCH1H471J | C CAPACITOR | 470pF 50V J   | 1   |             |
|      | C2007      | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |             |
|      | C2010      | CK73FXR0J106K | C CAPACITOR | 10uF 6.3V K   | 1   |             |
|      | C2011      | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |             |
|      | C2012      | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |             |
|      | C2013      | CK73GBB1H471K | C CAPACITOR | 470pF 50V K   | 1   |             |
|      | C2014      | CC73GCH1H101J | C CAPACITOR | 100pF 50V J   | 1   |             |
|      | C2015      | CK73GBB1H472K | C CAPACITOR | 4700pF 50V K  | 1   |             |
|      | C2016      | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |             |
|      | C2017      | CK73GBB1H472K | C CAPACITOR | 4700pF 50V K  | 1   | A1,E1,M1,K2 |
|      | C2018      | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |             |
|      | C2019      | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |             |
|      | C2021      | CK73GBB1H471K | C CAPACITOR | 470pF 50V K   | 1   |             |
|      | C2022      | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |             |
|      | C2023      | CK73GXR1C105K | C CAPACITOR | 1uF 16V K     | 1   |             |
|      | C2024      | CK73GBB1H471K | C CAPACITOR | 470pF 50V K   | 1   |             |
|      | C2025      | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |             |
|      | C2026      | CK73FXR0J106K | C CAPACITOR | 10uF 6.3V K   | 1   |             |
|      | C2029      | CC73GCH1H050C | C CAPACITOR | 5pF 50V C     | 1   |             |
|      | C2030      | CC73GCH1H050C | C CAPACITOR | 5pF 50V C     | 1   |             |
|      | C2031      | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |             |
|      | C2032      | CK73HBB1C103K | C CAPACITOR | 0.01uF 16V K  | 1   |             |
|      | C2033      | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |             |
|      | C2034      | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |             |
|      | C2035      | CK73GXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |             |
|      | C2036      | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |             |
|      | C2038      | CC73GCH1H101J | C CAPACITOR | 100pF 50V J   | 1   |             |
|      | C2039      | CC73GCH1H101J | C CAPACITOR | 100pF 50V J   | 1   |             |
|      | C2040      | CC73GCH1H100D | C CAPACITOR | 10pF 50V D    | 1   |             |
|      | C2041      | CC73HCH1H101J | C CAPACITOR | 100pF 50V J   | 1   |             |
|      | C2042      | CC73GCH1H101J | C CAPACITOR | 100pF 50V J   | 1   |             |
|      | C2043      | CC73GCH1H101J | C CAPACITOR | 100pF 50V J   | 1   |             |
|      | C2044      | CC73GCH1H101J | C CAPACITOR | 100pF 50V J   | 1   |             |
|      | C2045      | CK73GBB1H472K | C CAPACITOR | 4700pF 50V K  | 1   |             |
|      | C2047      | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |             |
|      | C2048      | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |             |
|      | C2049      | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |             |
|      | C2050      | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |             |
|      | C2051      | CK73HBB1C103K | C CAPACITOR | 0.01uF 16V K  | 1   |             |
|      | C2052      | CK73HBB1C103K | C CAPACITOR | 0.01uF 16V K  | 1   |             |
|      | C2055      | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |             |
|      | C2056      | CK73HBB1H471K | C CAPACITOR | 470pF 50V K   | 1   |             |
|      | C2058      | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |             |
|      | C2060      | CK73GBB1H472K | C CAPACITOR | 4700pF 50V K  | 1   |             |
|      | C2061      | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |             |
|      | C2062      | CK73EBB1E105K | C CAPACITOR | 1uF 25V K     | 1   |             |
|      | C2063      | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |             |
|      | C2064      | CC73GCH1H101J | C CAPACITOR | 100pF 50V J   | 1   |             |
|      | C2065      | CK73GXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |             |
|      | C2066      | CK73GXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |             |
|      | C2067      | CC73GCH1H101J | C CAPACITOR | 100pF 50V J   | 1   |             |
|      | C2069      | CK73HBB1E223K | C CAPACITOR | 0.022uF 25V K | 1   |             |
|      | C2070      | RK73GB2A332J  | MG RESISTOR | 3.3kΩ 1/10W J | 1   |             |
|      | C2072      | CK73HBB1H472K | C CAPACITOR | 4700pF 50V K  | 1   |             |
|      | C2073      | CC73HCH1H101J | C CAPACITOR | 100pF 50V J   | 1   |             |
|      | C2074      | CK73EBB1E105K | C CAPACITOR | 1uF 25V K     | 1   |             |

|            |      |            |      |            |      |          |      |
|------------|------|------------|------|------------|------|----------|------|
| MODEL      | MARK | MODEL      | MARK | MODEL      | MARK | MODEL    | MARK |
| DPX-5000BT | A1   | DPX-5000BT | E1   | DPX-5000BT | M1   | DPX502BT | K1   |
| DPX530BT   | K2   | DPX592BT   | K0   |            |      |          |      |

| Safe | Symbol No. | Parts No.     | Parts Name  | Description   | QTY | Local       |
|------|------------|---------------|-------------|---------------|-----|-------------|
|      | C2077      | CK73EBB1E105K | C CAPACITOR | 1uF 25V K     | 1   |             |
|      | C2080      | CC73GCH1H050C | C CAPACITOR | 5pF 50V C     | 1   |             |
|      | C2081      | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |             |
|      | C2083      | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |             |
|      | C2086      | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |             |
|      | C2087      | CK73FXR0J106K | C CAPACITOR | 10uF 6.3V K   | 1   |             |
|      | C2088      | CK73FXR0J106K | C CAPACITOR | 10uF 6.3V K   | 1   |             |
|      | C2089      | CK73GXR0J475K | C CAPACITOR | 4.7uF 6.3V K  | 1   |             |
|      | C2090      | CK73GXR0J475K | C CAPACITOR | 4.7uF 6.3V K  | 1   |             |
|      | C2091      | CK73HBB1H331K | C CAPACITOR | 330pF 50V K   | 1   |             |
|      | C2092      | CK73HBB1H331K | C CAPACITOR | 330pF 50V K   | 1   |             |
|      | C2093      | CK73FXR1A106K | C CAPACITOR | 10uF 10V K    | 1   |             |
|      | C2094      | CK73GXR0J475K | C CAPACITOR | 4.7uF 6.3V K  | 1   |             |
|      | C2095      | CK73GXR0J475K | C CAPACITOR | 4.7uF 6.3V K  | 1   |             |
|      | C2096      | CK73HBB1H331K | C CAPACITOR | 330pF 50V K   | 1   |             |
|      | C2097      | CK73HBB1H331K | C CAPACITOR | 330pF 50V K   | 1   |             |
|      | C2098      | CK73FXR1A106K | C CAPACITOR | 10uF 10V K    | 1   |             |
|      | C2099      | CK73GXR0J475K | C CAPACITOR | 4.7uF 6.3V K  | 1   |             |
|      | C2100      | CK73GXR0J475K | C CAPACITOR | 4.7uF 6.3V K  | 1   |             |
|      | C2101      | CK73HBB1H331K | C CAPACITOR | 330pF 50V K   | 1   |             |
|      | C2102      | CK73HBB1H331K | C CAPACITOR | 330pF 50V K   | 1   |             |
|      | C2103      | CK73FXR1A106K | C CAPACITOR | 10uF 10V K    | 1   |             |
|      | C2105      | CK73HBB1C103K | C CAPACITOR | 0.01uF 16V K  | 1   |             |
|      | C2106      | CK73HBB1H471K | C CAPACITOR | 470pF 50V K   | 1   |             |
|      | C2107      | CK73HBB1H471K | C CAPACITOR | 470pF 50V K   | 1   |             |
|      | C2108      | CK73GBB1H471K | C CAPACITOR | 470pF 50V K   | 1   |             |
|      | C2109      | CK73GBB1H471K | C CAPACITOR | 470pF 50V K   | 1   |             |
|      | C2110      | CC73GCH1H101J | C CAPACITOR | 100pF 50V J   | 1   |             |
|      | C2111      | CK73GBB1H472K | C CAPACITOR | 4700pF 50V K  | 1   |             |
|      | C2112      | CC73GCH1H101J | C CAPACITOR | 100pF 50V J   | 1   |             |
|      | C2114      | CK73GBB1H472K | C CAPACITOR | 4700pF 50V K  | 1   |             |
|      | C2115      | CK73GBB1H471K | C CAPACITOR | 470pF 50V K   | 1   |             |
|      | C2116      | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |             |
|      | C2117      | CC73HCH1H101J | C CAPACITOR | 100pF 50V J   | 1   |             |
|      | C2118      | CD04AR1C471M  | E CAPACITOR | 470uF 16V M   | 1   |             |
|      | C2120      | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |             |
|      | C2121      | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |             |
|      | R100       | RK73GB2A471J  | MG RESISTOR | 470Ω 1/10W J  | 1   |             |
|      | R101       | RK73HB1J000J  | MG RESISTOR | 0Ω 1/16W J    | 1   |             |
|      | R102       | RK73HB1J000J  | MG RESISTOR | 0Ω 1/16W J    | 1   |             |
|      | R105       | RK73GB2A000J  | MG RESISTOR | 0Ω 1/10W J    | 1   | A1,E1,M1,K2 |
|      | R106       | RK73HB1J000J  | MG RESISTOR | 0Ω 1/16W J    | 1   | A1,E1,M1,K2 |
|      | R107       | RK73GB2A000J  | MG RESISTOR | 0Ω 1/10W J    | 1   | A1,E1,M1,K2 |
|      | R110       | RK73HB1J473J  | MG RESISTOR | 47kΩ 1/16W J  | 1   | K1,K0       |
|      | R111       | RK73HB1J473J  | MG RESISTOR | 47kΩ 1/16W J  | 1   | K1,K0       |
|      | R112       | RK73HB1J473J  | MG RESISTOR | 47kΩ 1/16W J  | 1   | K1,K0       |
|      | R113       | RK73GB2A473J  | MG RESISTOR | 47kΩ 1/10W J  | 1   | K1,K0       |
|      | R114       | RK73HB1J473J  | MG RESISTOR | 47kΩ 1/16W J  | 1   | K1,K0       |
|      | R115       | RK73HB1J473J  | MG RESISTOR | 47kΩ 1/16W J  | 1   | K1,K0       |
|      | R120       | RK73HB1J913J  | MG RESISTOR | 91kΩ 1/16W J  | 1   |             |
|      | R121       | RK73HB1J913J  | MG RESISTOR | 91kΩ 1/16W J  | 1   |             |
|      | R122       | RK73HB1J913J  | MG RESISTOR | 91kΩ 1/16W J  | 1   |             |
|      | R123       | RK73HB1J913J  | MG RESISTOR | 91kΩ 1/16W J  | 1   |             |
|      | R124       | RK73HB1J473J  | MG RESISTOR | 47kΩ 1/16W J  | 1   |             |
|      | R125       | RK73HB1J473J  | MG RESISTOR | 47kΩ 1/16W J  | 1   |             |
|      | R126       | RK73HB1J473J  | MG RESISTOR | 47kΩ 1/16W J  | 1   |             |
|      | R127       | RK73HB1J473J  | MG RESISTOR | 47kΩ 1/16W J  | 1   |             |
|      | R146       | RK73GB2A123J  | MG RESISTOR | 12kΩ 1/10W J  | 1   | A1,E1,M1,K0 |
|      | R146       | RK73GB2A183J  | MG RESISTOR | 18kΩ 1/10W J  | 1   | K1,K2       |
|      | R147       | RK73HB1J000J  | MG RESISTOR | 0Ω 1/16W J    | 1   |             |
|      | R148       | RK73HB1J153J  | MG RESISTOR | 15kΩ 1/16W J  | 1   | A1,E1,M1,K0 |
|      | R148       | RK73HB1J752J  | MG RESISTOR | 7.5kΩ 1/16W J | 1   | K1,K2       |
|      | R149       | RK73HB1J000J  | MG RESISTOR | 0Ω 1/16W J    | 1   |             |
|      | R150       | RK73GB2A123J  | MG RESISTOR | 12kΩ 1/10W J  | 1   | A1,E1,M1,K0 |
|      | R150       | RK73GB2A183J  | MG RESISTOR | 18kΩ 1/10W J  | 1   | K1,K2       |
|      | R151       | RK73HB1J153J  | MG RESISTOR | 15kΩ 1/16W J  | 1   | A1,E1,M1,K0 |
|      | R151       | RK73HB1J752J  | MG RESISTOR | 7.5kΩ 1/16W J | 1   | K1,K2       |
|      | R152       | RK73GB2A120J  | MG RESISTOR | 12Ω 1/10W J   | 1   |             |
|      | R153       | RK73GB2A200J  | MG RESISTOR | 20Ω 1/10W J   | 1   |             |
|      | R154       | RK73GB2A120J  | MG RESISTOR | 12Ω 1/10W J   | 1   |             |
|      | R155       | RK73GB2A200J  | MG RESISTOR | 20Ω 1/10W J   | 1   |             |
|      | R156       | RK73GB2A200J  | MG RESISTOR | 20Ω 1/10W J   | 1   |             |
|      | R157       | RK73GB2A200J  | MG RESISTOR | 20Ω 1/10W J   | 1   |             |
|      | R158       | RK73GB2A000J  | MG RESISTOR | 0Ω 1/10W J    | 1   |             |
|      | R159       | RK73GB2A000J  | MG RESISTOR | 0Ω 1/10W J    | 1   |             |
|      | R160       | RK73HB1J000J  | MG RESISTOR | 0Ω 1/16W J    | 1   |             |
|      | R161       | RK73GB2A202J  | MG RESISTOR | 2kΩ 1/10W J   | 1   | A1,E1,M1,K0 |
|      | R161       | RK73GB2A822J  | MG RESISTOR | 8.2kΩ 1/10W J | 1   | K1,K2       |
|      | R162       | RK73HB1J823J  | MG RESISTOR | 82kΩ 1/16W J  | 1   | A1,E1,M1,K0 |
|      | R162       | RK73HB1J753J  | MG RESISTOR | 75kΩ 1/16W J  | 1   | K1,K2       |
|      | R163       | RK73HB1J153J  | MG RESISTOR | 15kΩ 1/16W J  | 1   | A1,E1,M1,K0 |
|      | R163       | RK73HB1J752J  | MG RESISTOR | 7.5kΩ 1/16W J | 1   | K1,K2       |
|      | R164       | RK73HB1J823J  | MG RESISTOR | 82kΩ 1/16W J  | 1   | A1,E1,M1,K0 |
|      | R164       | RK73HB1J753J  | MG RESISTOR | 75kΩ 1/16W J  | 1   | K1,K2       |
|      | R165       | RK73GB2A123J  | MG RESISTOR | 12kΩ 1/10W J  | 1   | A1,E1,M1,K0 |
|      | R165       | RK73GB2A183J  | MG RESISTOR | 18kΩ 1/10W J  | 1   | K1,K2       |
|      | R166       | RK73HB1J153J  | MG RESISTOR | 15kΩ 1/16W J  | 1   | A1,E1,M1,K0 |
|      | R166       | RK73HB1J752J  | MG RESISTOR | 7.5kΩ 1/16W J | 1   | K1,K2       |
|      | R167       | RK73GB2A120J  | MG RESISTOR | 12Ω 1/10W J   | 1   |             |
|      | R168       | RK73GB2A200J  | MG RESISTOR | 20Ω 1/10W J   | 1   |             |
|      | R169       | RK73HB1J153J  | MG RESISTOR | 15kΩ 1/16W J  | 1   | A1,E1,M1,K0 |
|      | R169       | RK73HB1J752J  | MG RESISTOR | 7.5kΩ 1/16W J | 1   | K1,K2       |

|            |      |            |      |            |      |          |      |
|------------|------|------------|------|------------|------|----------|------|
| MODEL      | MARK | MODEL      | MARK | MODEL      | MARK | MODEL    | MARK |
| DPX-5000BT | A1   | DPX-5000BT | E1   | DPX-5000BT | M1   | DPX502BT | K1   |
| DPX530BT   | K2   | DPX592BT   | K0   |            |      |          |      |

| Safe | Symbol No. | Parts No.    | Parts Name  | Description   | QTY | Local       |
|------|------------|--------------|-------------|---------------|-----|-------------|
|      | R170       | RK73GB2A202J | MG RESISTOR | 2kΩ 1/10W J   | 1   | A1,E1,M1,K0 |
|      | R170       | RK73GB2A822J | MG RESISTOR | 8.2kΩ 1/10W J | 1   | K1,K2       |
|      | R171       | RK73HB1J823J | MG RESISTOR | 82kΩ 1/16W J  | 1   | A1,E1,M1,K0 |
|      | R171       | RK73HB1J753J | MG RESISTOR | 75kΩ 1/16W J  | 1   | K1,K2       |
|      | R172       | RK73HB1J823J | MG RESISTOR | 82kΩ 1/16W J  | 1   | A1,E1,M1,K0 |
|      | R172       | RK73HB1J753J | MG RESISTOR | 75kΩ 1/16W J  | 1   | K1,K2       |
|      | R173       | RK73GB2A202J | MG RESISTOR | 2kΩ 1/10W J   | 1   | A1,E1,M1,K0 |
|      | R173       | RK73GB2A822J | MG RESISTOR | 8.2kΩ 1/10W J | 1   | K1,K2       |
|      | R174       | RK73HB1J823J | MG RESISTOR | 82kΩ 1/16W J  | 1   | A1,E1,M1,K0 |
|      | R174       | RK73HB1J753J | MG RESISTOR | 75kΩ 1/16W J  | 1   | K1,K2       |
|      | R175       | RK73HB1J153J | MG RESISTOR | 15kΩ 1/16W J  | 1   | A1,E1,M1,K0 |
|      | R175       | RK73HB1J752J | MG RESISTOR | 7.5kΩ 1/16W J | 1   | K1,K2       |
|      | R176       | RK73HB1J823J | MG RESISTOR | 82kΩ 1/16W J  | 1   | A1,E1,M1,K0 |
|      | R176       | RK73HB1J753J | MG RESISTOR | 75kΩ 1/16W J  | 1   | K1,K2       |
|      | R177       | RK73GB2A120J | MG RESISTOR | 12Ω 1/10W J   | 1   |             |
|      | R178       | RK73GB2A123J | MG RESISTOR | 12kΩ 1/10W J  | 1   | A1,E1,M1,K0 |
|      | R178       | RK73GB2A183J | MG RESISTOR | 18kΩ 1/10W J  | 1   | K1,K2       |
|      | R179       | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J    | 1   |             |
|      | R180       | RK73HB1J153J | MG RESISTOR | 15kΩ 1/16W J  | 1   | A1,E1,M1,K0 |
|      | R180       | RK73HB1J752J | MG RESISTOR | 7.5kΩ 1/16W J | 1   | K1,K2       |
|      | R181       | RK73HB1J153J | MG RESISTOR | 15kΩ 1/16W J  | 1   | A1,E1,M1,K0 |
|      | R181       | RK73HB1J752J | MG RESISTOR | 7.5kΩ 1/16W J | 1   | K1,K2       |
|      | R182       | RK73GB2A202J | MG RESISTOR | 2kΩ 1/10W J   | 1   | A1,E1,M1,K0 |
|      | R182       | RK73GB2A822J | MG RESISTOR | 8.2kΩ 1/10W J | 1   | K1,K2       |
|      | R183       | RK73HB1J823J | MG RESISTOR | 82kΩ 1/16W J  | 1   | A1,E1,M1,K0 |
|      | R183       | RK73HB1J753J | MG RESISTOR | 75kΩ 1/16W J  | 1   | K1,K2       |
|      | R184       | RK73GH2A392D | MG RESISTOR | 3.9kΩ 1/10W D | 1   |             |
|      | R185       | RK73GB2A123J | MG RESISTOR | 12kΩ 1/10W J  | 1   | A1,E1,M1,K0 |
|      | R185       | RK73GB2A183J | MG RESISTOR | 18kΩ 1/10W J  | 1   | K1,K2       |
|      | R186       | RK73HB1J823J | MG RESISTOR | 82kΩ 1/16W J  | 1   | A1,E1,M1,K0 |
|      | R186       | RK73HB1J753J | MG RESISTOR | 75kΩ 1/16W J  | 1   | K1,K2       |
|      | R187       | RK73HB1J153J | MG RESISTOR | 15kΩ 1/16W J  | 1   | A1,E1,M1,K0 |
|      | R187       | RK73HB1J752J | MG RESISTOR | 7.5kΩ 1/16W J | 1   | K1,K2       |
|      | R188       | RK73HB1J823J | MG RESISTOR | 82kΩ 1/16W J  | 1   | A1,E1,M1,K0 |
|      | R188       | RK73HB1J753J | MG RESISTOR | 75kΩ 1/16W J  | 1   | K1,K2       |
|      | R189       | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J    | 1   |             |
|      | R190       | RK73GB2A202J | MG RESISTOR | 2kΩ 1/10W J   | 1   | A1,E1,M1,K0 |
|      | R190       | RK73GB2A822J | MG RESISTOR | 8.2kΩ 1/10W J | 1   | K1,K2       |
|      | R191       | RK73HB1J153J | MG RESISTOR | 15kΩ 1/16W J  | 1   | A1,E1,M1,K0 |
|      | R191       | RK73HB1J752J | MG RESISTOR | 7.5kΩ 1/16W J | 1   | K1,K2       |
|      | R192       | RK73GB2A200J | MG RESISTOR | 20Ω 1/10W J   | 1   |             |
|      | R193       | RK73HB1J153J | MG RESISTOR | 15kΩ 1/16W J  | 1   | A1,E1,M1,K0 |
|      | R193       | RK73HB1J752J | MG RESISTOR | 7.5kΩ 1/16W J | 1   | K1,K2       |
|      | R194       | RK73GB2A202J | MG RESISTOR | 2kΩ 1/10W J   | 1   | A1,E1,M1,K0 |
|      | R194       | RK73GB2A822J | MG RESISTOR | 8.2kΩ 1/10W J | 1   | K1,K2       |
|      | R195       | RK73HB1J823J | MG RESISTOR | 82kΩ 1/16W J  | 1   | A1,E1,M1,K0 |
|      | R195       | RK73HB1J753J | MG RESISTOR | 75kΩ 1/16W J  | 1   | K1,K2       |
|      | R196       | RK73HB1J823J | MG RESISTOR | 82kΩ 1/16W J  | 1   | A1,E1,M1,K0 |
|      | R196       | RK73HB1J753J | MG RESISTOR | 75kΩ 1/16W J  | 1   | K1,K2       |
|      | R197       | RK73HB1J823J | MG RESISTOR | 82kΩ 1/16W J  | 1   | A1,E1,M1,K0 |
|      | R197       | RK73HB1J753J | MG RESISTOR | 75kΩ 1/16W J  | 1   | K1,K2       |
|      | R198       | RK73GH2A102D | MG RESISTOR | 1kΩ 1/10W D   | 1   |             |
|      | R199       | RK73GB2A123J | MG RESISTOR | 12kΩ 1/10W J  | 1   | A1,E1,M1,K0 |
|      | R199       | RK73GB2A183J | MG RESISTOR | 18kΩ 1/10W J  | 1   | K1,K2       |
|      | R200       | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J    | 1   |             |
|      | R201       | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J    | 1   |             |
|      | R220       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |             |
|      | R221       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |             |
|      | R222       | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J    | 1   |             |
|      | R223       | RK73HB1J822J | MG RESISTOR | 8.2kΩ 1/16W J | 1   |             |
|      | R224       | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J  | 1   |             |
|      | R225       | RK73HB1J333J | MG RESISTOR | 33kΩ 1/16W J  | 1   |             |
|      | R226       | RK73HB1J122J | MG RESISTOR | 1.2kΩ 1/16W J | 1   |             |
|      | R227       | RK73HB1J124J | MG RESISTOR | 120kΩ 1/16W J | 1   |             |
|      | R229       | RK73HB1J122J | MG RESISTOR | 1.2kΩ 1/16W J | 1   |             |
|      | R230       | RK73HB1J124J | MG RESISTOR | 120kΩ 1/16W J | 1   |             |
|      | R231       | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J  | 1   |             |
|      | R232       | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J  | 1   |             |
|      | R233       | RK73GB2A681J | MG RESISTOR | 680Ω 1/10W J  | 1   |             |
|      | R234       | RK73GB2A222J | MG RESISTOR | 2.2kΩ 1/10W J | 1   |             |
|      | R236       | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J    | 1   |             |
|      | R237       | RK73GB2A471J | MG RESISTOR | 470Ω 1/10W J  | 1   |             |
|      | R238       | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J  | 1   |             |
|      | R239       | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J    | 1   |             |
|      | R240       | RK73HB1J153J | MG RESISTOR | 15kΩ 1/16W J  | 1   | A1,E1,M1,K0 |
|      | R240       | RK73HB1J752J | MG RESISTOR | 7.5kΩ 1/16W J | 1   | K1,K2       |
|      | R250       | RK73HB1J181J | MG RESISTOR | 180Ω 1/16W J  | 1   |             |
|      | R251       | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J  | 1   |             |
|      | R252       | RK73GB2A331J | MG RESISTOR | 330Ω 1/10W J  | 1   |             |
|      | R254       | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1   |             |
|      | R260       | RK73HB1J181J | MG RESISTOR | 180Ω 1/16W J  | 1   |             |
|      | R261       | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J  | 1   |             |
|      | R262       | RK73GB2A331J | MG RESISTOR | 330Ω 1/10W J  | 1   |             |
|      | R264       | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1   |             |
|      | R270       | RK73GB2A104J | MG RESISTOR | 100kΩ 1/10W J | 1   |             |
|      | R271       | RK73GB2A331J | MG RESISTOR | 330Ω 1/10W J  | 1   |             |
|      | R272       | RK73HB1J303J | MG RESISTOR | 30kΩ 1/16W J  | 1   |             |
|      | R273       | RK73EB2E223J | MG RESISTOR | 22kΩ 1/4W J   | 1   |             |
|      | R302       | RK73GB2A821J | MG RESISTOR | 820Ω 1/10W J  | 1   |             |
|      | R303       | RK73EB2E3R0J | MG RESISTOR | 3Ω 1/4W J     | 1   |             |

|            |      |            |      |            |      |          |      |
|------------|------|------------|------|------------|------|----------|------|
| MODEL      | MARK | MODEL      | MARK | MODEL      | MARK | MODEL    | MARK |
| DPX-5000BT | A1   | DPX-5000BT | E1   | DPX-5000BT | M1   | DPX502BT | K1   |
| DPX530BT   | K2   | DPX592BT   | K0   |            |      |          |      |

| Safe | Symbol No. | Parts No.    | Parts Name  | Description   | QTY | Local    |
|------|------------|--------------|-------------|---------------|-----|----------|
|      | R304       | RK73GB2A473J | MG RESISTOR | 47kΩ 1/10W J  | 1   |          |
|      | R320       | RK73GB2A181J | MG RESISTOR | 180Ω 1/10W J  | 1   |          |
|      | R321       | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J  | 1   |          |
|      | R322       | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1   |          |
|      | R323       | RK73GB2A331J | MG RESISTOR | 330Ω 1/10W J  | 1   |          |
|      | R330       | RK73GB2A181J | MG RESISTOR | 180Ω 1/10W J  | 1   |          |
|      | R331       | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J  | 1   |          |
|      | R332       | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1   |          |
|      | R333       | RK73GB2A331J | MG RESISTOR | 330Ω 1/10W J  | 1   |          |
|      | R340       | RK73GB2A181J | MG RESISTOR | 180Ω 1/10W J  | 1   |          |
|      | R341       | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J  | 1   |          |
|      | R342       | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1   |          |
|      | R343       | RK73GB2A331J | MG RESISTOR | 330Ω 1/10W J  | 1   |          |
|      | R350       | RK73GB2A181J | MG RESISTOR | 180Ω 1/10W J  | 1   |          |
|      | R351       | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J  | 1   |          |
|      | R352       | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1   |          |
|      | R353       | RK73GB2A331J | MG RESISTOR | 330Ω 1/10W J  | 1   |          |
|      | R370       | RK73GB2A683J | MG RESISTOR | 68kΩ 1/10W J  | 1   |          |
|      | R371       | RK73GB2A123J | MG RESISTOR | 12kΩ 1/10W J  | 1   |          |
|      | R372       | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J  | 1   |          |
|      | R390       | RK73EB2E472J | MG RESISTOR | 4.7kΩ 1/4W J  | 1   |          |
|      | R400       | RK73GB2A102J | MG RESISTOR | 1kΩ 1/10W J   | 1   |          |
|      | R402       | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1   |          |
|      | R410       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |          |
|      | R411       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |          |
|      | R412       | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1   |          |
|      | R413       | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1   |          |
|      | R414       | RK73GB2A472J | MG RESISTOR | 4.7kΩ 1/10W J | 1   |          |
|      | R467       | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J   | 1   | K1,K0    |
|      | R468       | RK73HB1J4R7J | MG RESISTOR | 4.7Ω 1/16W J  | 1   | K1,K0    |
|      | R469       | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J   | 1   | K1,K0    |
|      | R471       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   | K1,K0    |
|      | R472       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   | K1,K0    |
|      | R473       | RK73GB2A472J | MG RESISTOR | 4.7kΩ 1/10W J | 1   | K1,K0    |
|      | R474       | RK73FB2B221J | MG RESISTOR | 220Ω 1/8W J   | 1   | K1,K0    |
|      | R475       | RK73HB1J100J | MG RESISTOR | 10Ω 1/16W J   | 1   | K1,K0    |
|      | R476       | RK73GB2A223J | MG RESISTOR | 22kΩ 1/10W J  | 1   | K1,K0    |
|      | R477       | RK73GB2A104J | MG RESISTOR | 100kΩ 1/10W J | 1   | K1,K0    |
|      | R540       | RK73GH2A123D | MG RESISTOR | 12kΩ 1/10W D  | 1   |          |
|      | R542       | RK73GB2A222J | MG RESISTOR | 2.2kΩ 1/10W J | 1   |          |
|      | R543       | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J    | 1   |          |
|      | R600       | RK73FB2B102J | MG RESISTOR | 1kΩ 1/8W J    | 1   |          |
|      | R601       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |          |
|      | R602       | RK73HB1J820J | MG RESISTOR | 82Ω 1/16W J   | 1   |          |
|      | R603       | RK73HB1J105J | MG RESISTOR | 1MΩ 1/16W J   | 1   |          |
|      | R604       | RK73HB1J105J | MG RESISTOR | 1MΩ 1/16W J   | 1   |          |
|      | R605       | RK73HB1J4R7J | MG RESISTOR | 4.7Ω 1/16W J  | 1   |          |
|      | R611       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |          |
|      | R680       | RK73GB2A332J | MG RESISTOR | 3.3kΩ 1/10W J | 1   |          |
|      | R682       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |          |
|      | R683       | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J    | 1   |          |
|      | R684       | RK73HB1J392J | MG RESISTOR | 3.9kΩ 1/16W J | 1   |          |
|      | R685       | RK73HB1J392J | MG RESISTOR | 3.9kΩ 1/16W J | 1   |          |
|      | R690       | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J    | 1   |          |
|      | R691       | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J    | 1   |          |
|      | R701       | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J    | 1   |          |
|      | R702       | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1   |          |
|      | R703       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |          |
|      | R704       | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1   |          |
|      | R705       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |          |
|      | R709       | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1   |          |
|      | R710       | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J  | 1   |          |
|      | R711       | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J  | 1   |          |
|      | R712       | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J  | 1   |          |
|      | R713       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |          |
|      | R714       | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J  | 1   |          |
|      | R715       | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J  | 1   |          |
|      | R718       | RK73HB1J472J | MG RESISTOR | 4.7kΩ 1/16W J | 1   |          |
|      | R721       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |          |
|      | R723       | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J  | 1   |          |
|      | R725       | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J  | 1   |          |
|      | R726       | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J  | 1   |          |
|      | R730       | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1   |          |
|      | R731       | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J  | 1   |          |
|      | R734       | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J  | 1   |          |
|      | R737       | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J  | 1   |          |
|      | R739       | RK73GB2A102J | MG RESISTOR | 1kΩ 1/10W J   | 1   |          |
|      | R740       | RK73GB2A472J | MG RESISTOR | 4.7kΩ 1/10W J | 1   |          |
|      | R742       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |          |
|      | R743       | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1   |          |
|      | R744       | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J  | 1   |          |
|      | R746       | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J    | 1   |          |
|      | R748       | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J  | 1   |          |
|      | R750       | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J  | 1   |          |
|      | R752       | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J  | 1   |          |
|      | R755       | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J  | 1   |          |
|      | R756       | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J  | 1   |          |
|      | R768       | RK73GB2A333J | MG RESISTOR | 33kΩ 1/10W J  | 1   | A1,M1    |
|      | R768       | RK73GB2A393J | MG RESISTOR | 39kΩ 1/10W J  | 1   | E1       |
|      | R768       | RK73GB2A223J | MG RESISTOR | 22kΩ 1/10W J  | 1   | K1,K2,K0 |
|      | R769       | RK73HB1J153J | MG RESISTOR | 15kΩ 1/16W J  | 1   | A1,M1    |
|      | R769       | RK73HB1J822J | MG RESISTOR | 8.2kΩ 1/16W J | 1   | E1       |

|            |      |            |      |            |      |          |      |
|------------|------|------------|------|------------|------|----------|------|
| MODEL      | MARK | MODEL      | MARK | MODEL      | MARK | MODEL    | MARK |
| DPX-5000BT | A1   | DPX-5000BT | E1   | DPX-5000BT | M1   | DPX502BT | K1   |
| DPX530BT   | K2   | DPX592BT   | K0   |            |      |          |      |

| Safe | Symbol No. | Parts No.    | Parts Name  | Description   | QTY | Local          |
|------|------------|--------------|-------------|---------------|-----|----------------|
|      | R769       | RK73HB1J273J | MG RESISTOR | 27kΩ 1/16W J  | 1   | K1,K2,K0       |
|      | R770       | RK73GB2A153J | MG RESISTOR | 15kΩ 1/10W J  | 1   | A1             |
|      | R770       | RK73GB2A223J | MG RESISTOR | 22kΩ 1/10W J  | 1   | E1,M1          |
|      | R770       | RK73GB2A333J | MG RESISTOR | 33kΩ 1/10W J  | 1   | K2             |
|      | R770       | RK73GB2A273J | MG RESISTOR | 27kΩ 1/10W J  | 1   | K0             |
|      | R771       | RK73HB1J333J | MG RESISTOR | 33kΩ 1/16W J  | 1   | A1             |
|      | R771       | RK73HB1J273J | MG RESISTOR | 27kΩ 1/16W J  | 1   | E1,M1          |
|      | R771       | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J  | 1   | K1             |
|      | R771       | RK73HB1J153J | MG RESISTOR | 15kΩ 1/16W J  | 1   | K2             |
|      | R771       | RK73HB1J223J | MG RESISTOR | 22kΩ 1/16W J  | 1   | K0             |
|      | R772       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |                |
|      | R777       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |                |
|      | R778       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |                |
|      | R781       | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J    | 1   |                |
|      | R782       | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J    | 1   |                |
|      | R783       | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J    | 1   |                |
|      | R785       | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J    | 1   |                |
|      | R788       | RK73GH2A823D | MG RESISTOR | 82kΩ 1/10W D  | 1   |                |
|      | R789       | RK73GH2A393D | MG RESISTOR | 39kΩ 1/10W D  | 1   |                |
|      | R790       | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J    | 1   |                |
|      | R792       | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J    | 1   |                |
|      | R794       | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J  | 1   |                |
|      | R795       | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |                |
|      | R796       | RK73GH2A302D | MG RESISTOR | 3kΩ 1/10W D   | 1   |                |
|      | R797       | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1   |                |
|      | R798       | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1   |                |
|      | R799       | RK73HB1J105J | MG RESISTOR | 1MΩ 1/16W J   | 1   |                |
|      | R800       | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J    | 1   |                |
|      | R801       | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1   |                |
|      | R802       | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J  | 1   | E1             |
|      | R803       | RK73HB1J225J | MG RESISTOR | 2.2MΩ 1/16W J | 1   | A1,M1,K1,K2,K0 |
|      | R805       | RK73GB2A102J | MG RESISTOR | 1kΩ 1/10W J   | 1   |                |
|      | R806       | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J   | 1   |                |
|      | R808       | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1   |                |
|      | R809       | RK73HB1J102J | MG RESISTOR | 1kΩ 1/16W J   | 1   |                |
|      | R820       | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J  | 1   |                |
|      | R823       | RK73GB2A470J | MG RESISTOR | 47Ω 1/10W J   | 1   |                |
|      | R824       | RK73HB1J473J | MG RESISTOR | 47kΩ 1/16W J  | 1   |                |
|      | R827       | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J  | 1   |                |
|      | R828       | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J  | 1   |                |
|      | R829       | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J    | 1   |                |
|      | R830       | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J  | 1   |                |
|      | R840       | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J  | 1   |                |
|      | R841       | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J  | 1   |                |
|      | R842       | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J  | 1   |                |
|      | R850       | RK73HH1J123D | MG RESISTOR | 12kΩ 1/16W D  | 1   |                |
|      | R851       | RK73HH1J243D | MG RESISTOR | 24kΩ 1/16W D  | 1   |                |
|      | R868       | RK73GB2A512J | MG RESISTOR | 5.1kΩ 1/10W J | 1   |                |
|      | R869       | RK73GB2A102J | MG RESISTOR | 1kΩ 1/10W J   | 1   |                |
|      | R871       | RK73HB1J393J | MG RESISTOR | 39kΩ 1/16W J  | 1   |                |
|      | R872       | RK73HB1J200J | MG RESISTOR | 20Ω 1/16W J   | 1   |                |
|      | R873       | RK73HH1J183D | MG RESISTOR | 18kΩ 1/16W D  | 1   |                |
|      | R875       | RK73HH1J393D | MG RESISTOR | 39kΩ 1/16W D  | 1   |                |
|      | R876       | RK73HH1J683D | MG RESISTOR | 68kΩ 1/16W D  | 1   |                |
|      | R878       | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J  | 1   |                |
|      | R880       | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1   |                |
|      | R889       | RK73HB1J332J | MG RESISTOR | 3.3kΩ 1/16W J | 1   |                |
|      | R905       | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J  | 1   |                |
|      | R940       | RK73EB2E1R0J | MG RESISTOR | 1Ω 1/4W J     | 1   |                |
|      | R980       | RK73EB2E682J | MG RESISTOR | 6.8kΩ 1/4W J  | 1   |                |
|      | R981       | RK73EB2E682J | MG RESISTOR | 6.8kΩ 1/4W J  | 1   |                |
|      | R982       | RK73EB2E473J | MG RESISTOR | 47kΩ 1/4W J   | 1   |                |
|      | R984       | RK73EB2E473J | MG RESISTOR | 47kΩ 1/4W J   | 1   |                |
|      | R1070      | RK73GB2A102J | MG RESISTOR | 1kΩ 1/10W J   | 1   |                |
|      | R1300      | RK73GB2A562J | MG RESISTOR | 5.6kΩ 1/10W J | 1   |                |
|      | R1302      | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |                |
|      | R1303      | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |                |
|      | R2001      | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J    | 1   |                |
|      | R2003      | RK73HB1J220J | MG RESISTOR | 22Ω 1/16W J   | 1   |                |
|      | R2004      | RK73HB1J220J | MG RESISTOR | 22Ω 1/16W J   | 1   |                |
|      | R2005      | RK73EB2E2R2J | MG RESISTOR | 2.2Ω 1/4W J   | 1   |                |
|      | R2007      | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1   | K1,K0          |
|      | R2008      | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |                |
|      | R2009      | RK73HB1J101J | MG RESISTOR | 100Ω 1/16W J  | 1   |                |
|      | R2014      | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J  | 1   |                |
|      | R2016      | RK73HB1J220J | MG RESISTOR | 22Ω 1/16W J   | 1   |                |
|      | R2017      | RK73HB1J220J | MG RESISTOR | 22Ω 1/16W J   | 1   |                |
|      | R2020      | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J    | 1   | A1,E1,M1,K2    |
|      | R2021      | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J    | 1   | A1,E1,M1,K2    |
|      | R2023      | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J    | 1   | A1,E1,M1,K2    |
|      | R2025      | RK73HB1J000J | MG RESISTOR | 0Ω 1/16W J    | 1   | A1,E1,M1,K2    |
|      | R2026      | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J    | 1   | A1,E1,M1,K2    |
|      | R2030      | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J    | 1   | K1,K0          |
|      | R2031      | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J    | 1   | K1,K0          |
|      | R2032      | RK73GB2A000J | MG RESISTOR | 0Ω 1/10W J    | 1   | K1,K0          |
|      | R2033      | RK73HB1J103J | MG RESISTOR | 10kΩ 1/16W J  | 1   |                |
|      | R2034      | RK73HB1J222J | MG RESISTOR | 2.2kΩ 1/16W J | 1   |                |
|      | R2038      | RK73EB2E000J | MG RESISTOR | 0Ω 1/4W J     | 1   |                |
|      | R2039      | RK73GH2A100D | MG RESISTOR | 10Ω 1/10W D   | 1   |                |
|      | R2040      | RK73GH2A100D | MG RESISTOR | 10Ω 1/10W D   | 1   |                |

| MODEL      | MARK | MODEL      | MARK | MODEL      | MARK | MODEL    | MARK |
|------------|------|------------|------|------------|------|----------|------|
| DPX-5000BT | A1   | DPX-5000BT | E1   | DPX-5000BT | M1   | DPX502BT | K1   |
| DPX530BT   | K2   | DPX592BT   | K0   |            |      |          |      |

| Safe                                | Symbol No. | Parts No.     | Parts Name      | Description    | QTY | Local       |
|-------------------------------------|------------|---------------|-----------------|----------------|-----|-------------|
|                                     | R2042      | RK73HB1J303J  | MG RESISTOR     | 30kΩ 1/16W J   | 1   |             |
|                                     | R2045      | RK73GB2A000J  | MG RESISTOR     | 0Ω 1/10W J     | 1   |             |
|                                     | R2046      | RK73GB2A000J  | MG RESISTOR     | 0Ω 1/10W J     | 1   |             |
|                                     | R2047      | RK73GB2A000J  | MG RESISTOR     | 0Ω 1/10W J     | 1   |             |
|                                     | R2048      | RK73GB2A000J  | MG RESISTOR     | 0Ω 1/10W J     | 1   |             |
|                                     | R2049      | RK73GB2A000J  | MG RESISTOR     | 0Ω 1/10W J     | 1   |             |
|                                     | R2050      | RK73GB2A000J  | MG RESISTOR     | 0Ω 1/10W J     | 1   |             |
|                                     | R2054      | RK73HB1J000J  | MG RESISTOR     | 0Ω 1/16W J     | 1   |             |
|                                     | R2055      | RK73HB1J103J  | MG RESISTOR     | 10kΩ 1/16W J   | 1   |             |
|                                     | R2056      | RK73HB1J432J  | MG RESISTOR     | 4.3kΩ 1/16W J  | 1   |             |
|                                     | R2057      | RK73HB1J432J  | MG RESISTOR     | 4.3kΩ 1/16W J  | 1   |             |
|                                     | R2058      | RK73HB1J103J  | MG RESISTOR     | 10kΩ 1/16W J   | 1   |             |
|                                     | R2059      | RK73HB1J103J  | MG RESISTOR     | 10kΩ 1/16W J   | 1   |             |
|                                     | R2060      | RK73HB1J103J  | MG RESISTOR     | 10kΩ 1/16W J   | 1   |             |
|                                     | R2061      | RK73HB1J432J  | MG RESISTOR     | 4.3kΩ 1/16W J  | 1   |             |
|                                     | R2062      | RK73HB1J432J  | MG RESISTOR     | 4.3kΩ 1/16W J  | 1   |             |
|                                     | R2063      | RK73HB1J103J  | MG RESISTOR     | 10kΩ 1/16W J   | 1   |             |
|                                     | R2064      | RK73HB1J103J  | MG RESISTOR     | 10kΩ 1/16W J   | 1   |             |
|                                     | R2065      | RK73HB1J432J  | MG RESISTOR     | 4.3kΩ 1/16W J  | 1   |             |
|                                     | R2066      | RK73HB1J432J  | MG RESISTOR     | 4.3kΩ 1/16W J  | 1   |             |
|                                     | R2067      | RK73HB1J103J  | MG RESISTOR     | 10kΩ 1/16W J   | 1   |             |
|                                     | R2069      | RK73HB1J471J  | MG RESISTOR     | 470Ω 1/16W J   | 1   |             |
|                                     | R2070      | RK73HB1J472J  | MG RESISTOR     | 4.7kΩ 1/16W J  | 1   |             |
|                                     | R2071      | RK73HB1J472J  | MG RESISTOR     | 4.7kΩ 1/16W J  | 1   |             |
|                                     | R2072      | RK73HB1J472J  | MG RESISTOR     | 4.7kΩ 1/16W J  | 1   |             |
|                                     | R2076      | RK73EB2E000J  | MG RESISTOR     | 0Ω 1/4W J      | 1   |             |
|                                     | R2079      | RK73GB2A000J  | MG RESISTOR     | 0Ω 1/10W J     | 1   |             |
|                                     | R2082      | RK73GB2A000J  | MG RESISTOR     | 0Ω 1/10W J     | 1   |             |
|                                     | R2087      | RK73GB2A000J  | MG RESISTOR     | 0Ω 1/10W J     | 1   |             |
|                                     | R2088      | RK73GB2A000J  | MG RESISTOR     | 0Ω 1/10W J     | 1   |             |
|                                     | R2089      | RK73HB1J000J  | MG RESISTOR     | 0Ω 1/16W J     | 1   |             |
|                                     | R2090      | RK73HB1J000J  | MG RESISTOR     | 0Ω 1/16W J     | 1   |             |
|                                     | L411       | LR73Z0AD4R7M  | CHIP INDUCTOR   | 4.7uH          | 1   |             |
|                                     | L600       | LR73Z0AD4R7M  | CHIP INDUCTOR   | 4.7uH          | 1   |             |
|                                     | L601       | LK73G0BE4R7K  | M.CHIP INDUCTOR |                | 1   |             |
|                                     | L602       | LK73G0BER47K  | M.CHIP INDUCTOR |                | 1   |             |
|                                     | L603       | NQLM93K-R10X  | INDUCTOR        | 0.1uH K        | 1   |             |
|                                     | L604       | LK73G0BE1R0K  | M.CHIP INDUCTOR |                | 1   |             |
|                                     | L605       | LK73G0BER22K  | M.CHIP INDUCTOR |                | 1   |             |
|                                     | L606       | LK73G0BER12K  | M.CHIP INDUCTOR |                | 1   |             |
|                                     | L607       | LK73G0BER15K  | M.CHIP INDUCTOR |                | 1   |             |
|                                     | L701       | LR73Z0AD4R7M  | CHIP INDUCTOR   | 4.7uH          | 1   |             |
|                                     | L702       | NQR0713-001X  | FERRITE BEADS   |                | 1   |             |
|                                     | L703       | LB73H0AY-004  | CHIP FERRITE    |                | 1   |             |
|                                     | L704       | NQR0713-001X  | FERRITE BEADS   |                | 1   |             |
|                                     | L705       | NQR0713-001X  | FERRITE BEADS   |                | 1   |             |
|                                     | L706       | LB73H0CT-002  | CHIP FERRITE    |                | 1   |             |
|                                     | L707       | LB73H0CT-002  | CHIP FERRITE    |                | 1   |             |
|                                     | L811       | LB73H0AY-004  | CHIP FERRITE    |                | 1   |             |
|                                     | L821       | LB73G0BK-006  | CHIP FERRITE    |                | 1   |             |
|                                     | L822       | LB73H0CT-002  | CHIP FERRITE    |                | 1   |             |
|                                     | L824       | LB73H0CT-002  | CHIP FERRITE    |                | 1   |             |
|                                     | L825       | LB73H0CT-002  | CHIP FERRITE    |                | 1   |             |
|                                     | L826       | LB73H0CT-002  | CHIP FERRITE    |                | 1   |             |
|                                     | L827       | LB73H0CT-002  | CHIP FERRITE    |                | 1   |             |
|                                     | L828       | LB73H0CT-002  | CHIP FERRITE    |                | 1   |             |
|                                     | L829       | LB73H0CT-002  | CHIP FERRITE    |                | 1   |             |
|                                     | L830       | LB73G0BK-006  | CHIP FERRITE    |                | 1   |             |
|                                     | L831       | NQR0713-001X  | FERRITE BEADS   |                | 1   |             |
|                                     | L863       | NQLL6EM-100X  | INDUCTOR        | 10uH M         | 1   |             |
|                                     | L864       | NQLH65M-4R7X  | INDUCTOR        | 4.7uH M        | 1   |             |
|                                     | L990       | QQR1927-001   | CHOKE COIL      |                | 1   |             |
|                                     | L2000      | LB73H0CT-002  | CHIP FERRITE    |                | 1   |             |
|                                     | L2001      | LB73H0CT-002  | CHIP FERRITE    |                | 1   |             |
|                                     | L2002      | NQR0593-001X  | FERRITE BEADS   |                | 1   |             |
|                                     | L2003      | NQR0593-001X  | FERRITE BEADS   |                | 1   |             |
|                                     | L2004      | NQR0593-001X  | FERRITE BEADS   |                | 1   |             |
|                                     | L2005      | LR73Z0AD100M  | CHIP INDUCTOR   | 10uH           | 1   |             |
|                                     | L2008      | NQR0713-001X  | FERRITE BEADS   |                | 1   |             |
|                                     | L2009      | NQR0713-001X  | FERRITE BEADS   |                | 1   |             |
|                                     | L2010      | NQR0713-001X  | FERRITE BEADS   |                | 1   |             |
|                                     | CN220      | QGA2001F1-02  | W TO B CONNE    | W-B (1-2)      | 1   | K1,K0       |
|                                     | CN502      | QGF1040C1-26  | FFC/FPC CONNE   | FFC/FPC (1-26) | 1   |             |
|                                     | CN702      | QGB1004K2-20W | B TO B CONNE    | B-B (1-20)     | 1   |             |
|                                     | CN990      | QNZ0607-001   | CAR CONNECTOR   |                | 1   |             |
| △                                   | E2         | QZW0010-001   | STYLE PIN       |                | 1   | K1,K0       |
| △                                   | F1         | F53-0513-08   | PATTERN FUSE    | 4A             | 1   |             |
| △                                   | F2         | F53-0513-08   | PATTERN FUSE    | 4A             | 1   |             |
|                                     | F3         | FZA10BH-2R5   | FUSE (CC)       |                | 1   |             |
|                                     | J220       | E1B-0013-00   | 3.5D PHONE JACK |                | 1   | A1,E1,M1,K2 |
|                                     | J321       | QNN0866-001   | PIN JACK        |                | 1   |             |
|                                     | J470       | QNZ0907-001   | CIR CONNECTOR   |                | 1   | K1,K0       |
|                                     | J600       | QNB0356-001   | ANT TERMINAL    |                | 1   |             |
|                                     | VA600      | F0K-0010-00   | SURGE ABSORBER  |                | 1   |             |
|                                     | VA703      | F0K-0010-00   | SURGE ABSORBER  |                | 1   |             |
|                                     | VA705      | F0K-0010-00   | SURGE ABSORBER  |                | 1   |             |
|                                     | X600       | QAX0969-001Z  | CRYSTAL         |                | 1   |             |
|                                     | X701       | L7J-0092-00   | QUARTZ CRYSTAL  |                | 1   |             |
|                                     | X702       | NAX1256-001X  | CRYSTAL         |                | 1   |             |
| SWITCH PWB ASSY (XJ6-077x-0x) <XJ6> |            |               |                 |                |     |             |
|                                     | IC1        | BU97550KV-M   | MOS IC          |                | 1   |             |

| MODEL      | MARK | MODEL      | MARK | MODEL      | MARK | MODEL    | MARK |
|------------|------|------------|------|------------|------|----------|------|
| DPX-5000BT | A1   | DPX-5000BT | E1   | DPX-5000BT | M1   | DPX502BT | K1   |
| DPX530BT   | K2   | DPX592BT   | K0   |            |      |          |      |

| Safe | Symbol No. | Parts No.      | Parts Name     | Description   | QTY | Local          |
|------|------------|----------------|----------------|---------------|-----|----------------|
|      | IC3        | NJM431SF       | ANALOG IC      |               | 1   |                |
|      | IC90       | SIR8630B6T     | IR DETECT UNIT |               | 1   | A1,M1,K1,K2,K0 |
|      | Q50        | LSCR523EBFS8   | TRANSISTOR     |               | 1   |                |
|      | Q51        | LSCR523EBFS8   | TRANSISTOR     |               | 1   |                |
|      | Q52        | LSCR523EBFS8   | TRANSISTOR     |               | 1   |                |
|      | Q53        | LSCR523EBFS8   | TRANSISTOR     |               | 1   |                |
|      | Q54        | LSCR523EBFS8   | TRANSISTOR     |               | 1   |                |
|      | Q55        | LSCR523EBFS8   | TRANSISTOR     |               | 1   |                |
|      | Q57        | LSCR523EBFS8   | TRANSISTOR     |               | 1   |                |
|      | Q58        | LSCR523EBFS8   | TRANSISTOR     |               | 1   |                |
|      | D2         | MBRX130        | SCHOTTKY DIODE |               | 1   |                |
|      | D3         | MBRX130        | SCHOTTKY DIODE |               | 1   |                |
|      | D12        | SML-D12V8WT    | LED            |               | 1   |                |
|      | D13        | SML-D12V8WT    | LED            |               | 1   |                |
|      | D20        | SML-D12V8WT    | LED            |               | 1   |                |
|      | D21        | LRTBGFTG/Z1Z1X | LED            |               | 1   |                |
|      | D22        | LRTBGFTG/Z1Z1X | LED            |               | 1   |                |
|      | D23        | LRTBGFTG/Z1Z1X | LED            |               | 1   |                |
|      | D24        | LRTBGFTG/Z1Z1X | LED            |               | 1   |                |
|      | D31        | LRTBGFTG/Z1Z1X | LED            |               | 1   |                |
|      | D32        | LRTBGFTG/Z1Z1X | LED            |               | 1   |                |
|      | D48        | LRTBGFTG/Z1Z1X | LED            |               | 1   |                |
|      | D49        | LRTBGFTG/Z1Z1X | LED            |               | 1   |                |
|      | D80        | DZ2J051M       | ZENER DIODE    |               | 1   |                |
|      | D81        | DZ2J051M       | ZENER DIODE    |               | 1   |                |
|      | C1         | CK73GXR1C105K  | C CAPACITOR    | 1uF 16V K     | 1   |                |
|      | C5         | CK73GXR1C105K  | C CAPACITOR    | 1uF 16V K     | 1   |                |
|      | C6         | CK73EXR1C106K  | C CAPACITOR    | 10uF 16V K    | 1   |                |
|      | C60        | CK73GBB1H102K  | C CAPACITOR    | 1000pF 50V K  | 1   |                |
|      | C61        | CK73GBB1H102K  | C CAPACITOR    | 1000pF 50V K  | 1   |                |
|      | C80        | CC73GCH1H270J  | C CAPACITOR    | 27pF 50V J    | 1   |                |
|      | C81        | CC73GCH1H270J  | C CAPACITOR    | 27pF 50V J    | 1   |                |
|      | C82        | CK73EXR1C106K  | C CAPACITOR    | 10uF 16V K    | 1   |                |
|      | C83        | CK73GBB1H471K  | C CAPACITOR    | 470pF 50V K   | 1   |                |
|      | C84        | CK73GBB1H472K  | C CAPACITOR    | 4700pF 50V K  | 1   |                |
|      | C85        | CK73GBB1H471K  | C CAPACITOR    | 470pF 50V K   | 1   |                |
|      | C86        | CK73GBB1H472K  | C CAPACITOR    | 4700pF 50V K  | 1   |                |
|      | C91        | CK73GXR1A105K  | C CAPACITOR    | 1uF 10V K     | 1   | A1,M1,K1,K2,K0 |
|      | R1         | RK73GH2A103D   | MG RESISTOR    | 10kΩ 1/10W D  | 1   |                |
|      | R2         | RK73GH2A752D   | MG RESISTOR    | 7.5kΩ 1/10W D | 1   |                |
|      | R3         | RK73EB2E471J   | MG RESISTOR    | 470Ω 1/4W J   | 1   |                |
|      | R4         | RK73GB2A101J   | MG RESISTOR    | 100Ω 1/10W J  | 1   |                |
|      | R6         | RK73EB2E101J   | MG RESISTOR    | 100Ω 1/4W J   | 1   |                |
|      | R7         | RK73EB2E000J   | MG RESISTOR    | 0Ω 1/4W J     | 1   |                |
|      | R10        | RK73FB2B132J   | MG RESISTOR    | 1.3kΩ 1/8W J  | 1   |                |
|      | R12        | RK73GB2A132J   | MG RESISTOR    | 1.3kΩ 1/10W J | 1   |                |
|      | R13        | RK73GB2A132J   | MG RESISTOR    | 1.3kΩ 1/10W J | 1   |                |
|      | R14        | RK73GB2A184J   | MG RESISTOR    | 180kΩ 1/10W J | 1   |                |
|      | R18        | RK73GB2A101J   | MG RESISTOR    | 100Ω 1/10W J  | 1   |                |
|      | R20        | RK73FB2B911J   | MG RESISTOR    | 910Ω 1/8W J   | 1   |                |
|      | R21        | RK73FB2B162J   | MG RESISTOR    | 1.6kΩ 1/8W J  | 1   |                |
|      | R22        | RK73FB2B241J   | MG RESISTOR    | 240Ω 1/8W J   | 1   |                |
|      | R23        | RK73FB2B331J   | MG RESISTOR    | 330Ω 1/8W J   | 1   |                |
|      | R24        | RK73FB2B911J   | MG RESISTOR    | 910Ω 1/8W J   | 1   |                |
|      | R25        | RK73FB2B162J   | MG RESISTOR    | 1.6kΩ 1/8W J  | 1   |                |
|      | R26        | RK73FB2B241J   | MG RESISTOR    | 240Ω 1/8W J   | 1   |                |
|      | R27        | RK73FB2B331J   | MG RESISTOR    | 330Ω 1/8W J   | 1   |                |
|      | R36        | RK73FB2B911J   | MG RESISTOR    | 910Ω 1/8W J   | 1   |                |
|      | R37        | RK73FB2B162J   | MG RESISTOR    | 1.6kΩ 1/8W J  | 1   |                |
|      | R38        | RK73FB2B241J   | MG RESISTOR    | 240Ω 1/8W J   | 1   |                |
|      | R39        | RK73FB2B331J   | MG RESISTOR    | 330Ω 1/8W J   | 1   |                |
|      | R41        | RK73FB2B431J   | MG RESISTOR    | 430Ω 1/8W J   | 1   |                |
|      | R42        | RK73FB2B181J   | MG RESISTOR    | 180Ω 1/8W J   | 1   |                |
|      | R43        | RK73FB2B301J   | MG RESISTOR    | 300Ω 1/8W J   | 1   |                |
|      | R57        | RK73GB2A682J   | MG RESISTOR    | 6.8kΩ 1/10W J | 1   |                |
|      | R60        | RK73EB2E101J   | MG RESISTOR    | 100Ω 1/4W J   | 1   |                |
|      | R61        | RK73EB2E101J   | MG RESISTOR    | 100Ω 1/4W J   | 1   |                |
|      | R62        | RK73EB2E4R7J   | MG RESISTOR    | 4.7Ω 1/4W J   | 1   |                |
|      | R80        | RK73EB2E221J   | MG RESISTOR    | 220Ω 1/4W J   | 1   |                |
|      | R1006      | RK73GB2A000J   | MG RESISTOR    | 0Ω 1/10W J    | 1   | A1,M1,K1,K2,K0 |
|      | RA1        | RK74GB1J101J   | NET RESISTOR   | 100Ω 1/16W J  | 1   |                |
|      | RA2        | RK74GB1J101J   | NET RESISTOR   | 100Ω 1/16W J  | 1   |                |
|      | RA3        | RK74GB1J101J   | NET RESISTOR   | 100Ω 1/16W J  | 1   |                |
|      | RA50       | RK74GB1J682J   | NET RESISTOR   | 6.8kΩ 1/16W J | 1   |                |
|      | RA53       | RK74GB1J682J   | NET RESISTOR   | 6.8kΩ 1/16W J | 1   |                |
|      | L2         | LR73Z0AD4R7M   | CHIP INDUCTOR  | 4.7uH         | 1   |                |
|      | CN1        | EB760AW-1020A  | B TO B CONNE   |               | 1   |                |
|      | FL80       | L7K-0030-00    | FILTER         |               | 1   |                |
|      | J60        | QNS0320-001    | 3.5 JACK       |               | 1   |                |
|      | J80        | E5J-0069-00    | USB TERMINAL   |               | 1   |                |
|      | S1         | NSW0246-001X   | TACT SWITCH    |               | 1   |                |
|      | S2         | NSW0246-001X   | TACT SWITCH    |               | 1   |                |
|      | S3         | NSW0246-001X   | TACT SWITCH    |               | 1   |                |
|      | S4         | NSW0246-001X   | TACT SWITCH    |               | 1   |                |
|      | S5         | NSW0246-001X   | TACT SWITCH    |               | 1   |                |
|      | S6         | NSW0246-001X   | TACT SWITCH    |               | 1   |                |
|      | S7         | NSW0246-001X   | TACT SWITCH    |               | 1   |                |
|      | S8         | NSW0246-001X   | TACT SWITCH    |               | 1   |                |
|      | S9         | NSW0246-001X   | TACT SWITCH    |               | 1   |                |
|      | S10        | NSW0246-001X   | TACT SWITCH    |               | 1   |                |
|      | S11        | NSW0246-001X   | TACT SWITCH    |               | 1   |                |
|      | S12        | NSW0246-001X   | TACT SWITCH    |               | 1   |                |

| MODEL      | MARK | MODEL      | MARK | MODEL      | MARK | MODEL    | MARK |
|------------|------|------------|------|------------|------|----------|------|
| DPX-5000BT | A1   | DPX-5000BT | E1   | DPX-5000BT | M1   | DPX502BT | K1   |
| DPX530BT   | K2   | DPX592BT   | K0   |            |      |          |      |

| Safe                                  | Symbol No. | Parts No.     | Parts Name     | Description    | QTY | Local |
|---------------------------------------|------------|---------------|----------------|----------------|-----|-------|
|                                       | S13        | NSW0246-001X  | TACT SWITCH    |                | 1   |       |
|                                       | S14        | NSW0246-001X  | TACT SWITCH    |                | 1   |       |
|                                       | S15        | NSW0246-001X  | TACT SWITCH    |                | 1   |       |
|                                       | S16        | NSW0246-001X  | TACT SWITCH    |                | 1   |       |
|                                       | S18        | NSW0246-001X  | TACT SWITCH    |                | 1   |       |
|                                       | S20        | T9K-0007-00   | ROTARY ENCODER |                | 1   |       |
| CD MECHA PWB ASSY (XJD-0030-00) <XJD> |            |               |                |                |     |       |
|                                       | IC1        | MN6627553APA  | IC             |                | 1   |       |
|                                       | IC2        | BD8266EFV-M-X | IC             |                | 1   |       |
|                                       | Q1         | 2SA2188/E/-X  | TRANSISTOR     |                | 1   |       |
|                                       | C1         | CK73HBB1A104K | C CAPACITOR    | 0.1uF 10V K    | 1   |       |
|                                       | C3         | CK73HBB1A104K | C CAPACITOR    | 0.1uF 10V K    | 1   |       |
|                                       | C4         | CK73HBB1A104K | C CAPACITOR    | 0.1uF 10V K    | 1   |       |
|                                       | C7         | CK73GBB1C334K | C CAPACITOR    | 0.33uF 16V K   | 1   |       |
|                                       | C8         | CK73HBB1H102K | C CAPACITOR    | 1000pF 50V K   | 1   |       |
|                                       | C9         | CK73HBB1C823K | C CAPACITOR    | 0.082uF 16V K  | 1   |       |
|                                       | C10        | CK73HBB1H102K | C CAPACITOR    | 1000pF 50V K   | 1   |       |
|                                       | C11        | CK73HBB1A104K | C CAPACITOR    | 0.1uF 10V K    | 1   |       |
|                                       | C12        | CK73HBB1E153K | C CAPACITOR    | 0.015uF 25V K  | 1   |       |
|                                       | C13        | CC73HCH1H681J | C CAPACITOR    | 680pF 50V J    | 1   |       |
|                                       | C14        | CK73HBB1A104K | C CAPACITOR    | 0.1uF 10V K    | 1   |       |
|                                       | C15        | CK73GXR0J475K | C CAPACITOR    | 4.7uF 6.3V K   | 1   |       |
|                                       | C16        | CK730AU0J105K | C CAPACITOR    | 1uF 6.3V K     | 1   |       |
|                                       | C17        | CK73GBB1C334K | C CAPACITOR    | 0.33uF 16V K   | 1   |       |
|                                       | C18        | CK73HBB1H332K | C CAPACITOR    | 3300pF 50V K   | 1   |       |
|                                       | C19        | CK73HBB1E223K | C CAPACITOR    | 0.022uF 25V K  | 1   |       |
|                                       | C20        | NCB20JK-106X  | C CAPACITOR    | 10uF 6.3V K    | 1   |       |
|                                       | C21        | CK73GBB1C334K | C CAPACITOR    | 0.33uF 16V K   | 1   |       |
|                                       | C26        | CK73FXR1C106K | C CAPACITOR    | 10uF 16V K     | 1   |       |
|                                       | C27        | CK73HBB1A104K | C CAPACITOR    | 0.1uF 10V K    | 1   |       |
|                                       | C28        | CK73HBB1A104K | C CAPACITOR    | 0.1uF 10V K    | 1   |       |
|                                       | C50        | CK73HBB1H682K | C CAPACITOR    | 6800pF 50V K   | 1   |       |
|                                       | C51        | CK73HBB1H682K | C CAPACITOR    | 6800pF 50V K   | 1   |       |
|                                       | C52        | CK73HBB1H103K | C CAPACITOR    | 0.01uF 50V K   | 1   |       |
|                                       | C53        | CK73HBB1H103K | C CAPACITOR    | 0.01uF 50V K   | 1   |       |
|                                       | C55        | CK73HBB1A104K | C CAPACITOR    | 0.1uF 10V K    | 1   |       |
|                                       | C60        | CC73HCH1H821J | C CAPACITOR    | 820pF 50V J    | 1   |       |
|                                       | C61        | CC73HCH1H821J | C CAPACITOR    | 820pF 50V J    | 1   |       |
|                                       | C62        | CK73GXR0J106M | C CAPACITOR    | 10uF 6.3V M    | 1   |       |
|                                       | C82        | CC73HCH1H471J | C CAPACITOR    | 470pF 50V J    | 1   |       |
|                                       | C83        | CC73HCH1H120J | C CAPACITOR    | 12pF 50V J     | 1   |       |
|                                       | C84        | CC73HCH1H120J | C CAPACITOR    | 12pF 50V J     | 1   |       |
|                                       | C85        | CK73HBB1A104K | C CAPACITOR    | 0.1uF 10V K    | 1   |       |
|                                       | C244       | CK73GBB1C154K | C CAPACITOR    | 0.15uF 16V K   | 1   |       |
|                                       | R3         | RK73HB1J102J  | MG RESISTOR    | 1kΩ 1/16W J    | 1   |       |
|                                       | R4         | RK73HB1J105J  | MG RESISTOR    | 1MΩ 1/16W J    | 1   |       |
|                                       | R7         | RK73HB1J272J  | MG RESISTOR    | 2.7kΩ 1/16W J  | 1   |       |
|                                       | R8         | RK73HB1J821J  | MG RESISTOR    | 820Ω 1/16W J   | 1   |       |
|                                       | R9         | RK73HB1J823J  | MG RESISTOR    | 82kΩ 1/16W J   | 1   |       |
|                                       | R10        | RK73FB2B4R7J  | MG RESISTOR    | 4.7Ω 1/8W J    | 1   |       |
|                                       | R11        | RK73HB1J472J  | MG RESISTOR    | 4.7kΩ 1/16W J  | 1   |       |
|                                       | R12        | RK73HB1J225J  | MG RESISTOR    | 2.2MΩ 1/16W J  | 1   |       |
|                                       | R17        | RK73HB1J123J  | MG RESISTOR    | 12kΩ 1/16W J   | 1   |       |
|                                       | R18        | RK73HB1J822J  | MG RESISTOR    | 8.2kΩ 1/16W J  | 1   |       |
|                                       | R20        | RK73HB1J103J  | MG RESISTOR    | 10kΩ 1/16W J   | 1   |       |
|                                       | R21        | RK73HB1J822J  | MG RESISTOR    | 8.2kΩ 1/16W J  | 1   |       |
|                                       | R23        | RK73HB1J183J  | MG RESISTOR    | 18kΩ 1/16W J   | 1   |       |
|                                       | R24        | RK73HB1J272J  | MG RESISTOR    | 2.7kΩ 1/16W J  | 1   |       |
|                                       | R26        | RK73HB1J223J  | MG RESISTOR    | 22kΩ 1/16W J   | 1   |       |
|                                       | R28        | RK73HB1J114J  | MG RESISTOR    | 110kΩ 1/16W J  | 1   |       |
|                                       | R31        | RK73HB1J821J  | MG RESISTOR    | 820Ω 1/16W J   | 1   |       |
|                                       | R32        | RK73HB1J821J  | MG RESISTOR    | 820Ω 1/16W J   | 1   |       |
|                                       | R33        | RK73HB1J131J  | MG RESISTOR    | 130Ω 1/16W J   | 1   |       |
|                                       | R37        | RK73HB1J103J  | MG RESISTOR    | 10kΩ 1/16W J   | 1   |       |
|                                       | R44        | RK73HB1J101J  | MG RESISTOR    | 100Ω 1/16W J   | 1   |       |
|                                       | R47        | RK73HB1J101J  | MG RESISTOR    | 100Ω 1/16W J   | 1   |       |
|                                       | R305       | RK73HB1J101J  | MG RESISTOR    | 100Ω 1/16W J   | 1   |       |
|                                       | RA1        | RK74HB1J562J  | NET RESISTOR   | 5.6kΩ 1/16W J  | 1   |       |
|                                       | RA2        | RK74HB1J101J  | NET RESISTOR   | 100Ω 1/16W J   | 1   |       |
|                                       | L1         | LB73G0BF-002  | CHIP FERRITE   |                | 1   |       |
|                                       | L2         | LB73H0AY-004  | CHIP FERRITE   |                | 1   |       |
|                                       | L3         | LB73H0AY-004  | CHIP FERRITE   |                | 1   |       |
|                                       | CN1        | QGF1044F2-26X | FFC/FPC CONNE  | FFC/FPC (1-26) | 1   |       |
|                                       | CN2        | QGF0522F6-15W | FFC/FPC CONNE  | FFC/FPC (1-15) | 1   |       |
|                                       | S1         | NSW0291-001X  | DETECT SWITCH  |                | 1   |       |
|                                       | S2         | NSW0291-001X  | DETECT SWITCH  |                | 1   |       |
|                                       | S3         | NSW0313-001X  | DETECT SWITCH  |                | 1   |       |
|                                       | X1         | NAX1158-001X  | CRYSTAL        |                | 1   |       |