


EXPLODED VIEW/PARTS LIST

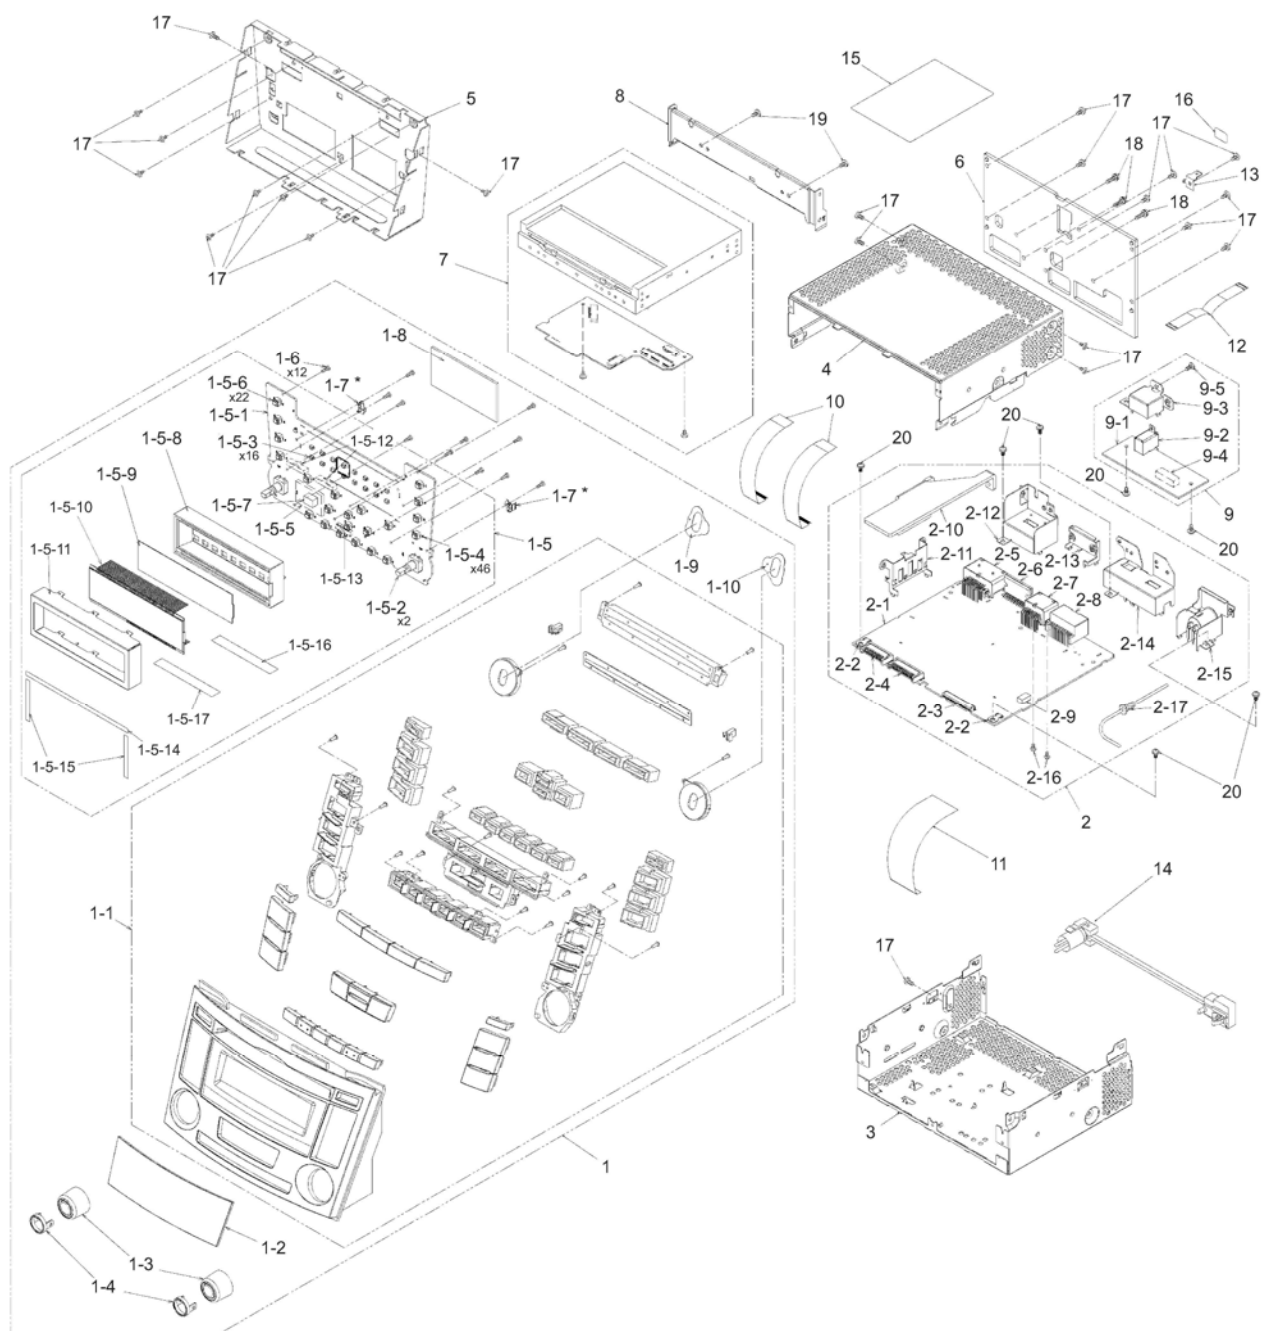

* EARTH-SPRING(No.1-7): Please do not reuse at the repair.

* EARTH-SPRING(No.1-7): Please do not reuse at the repair.

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	PANEL ASSY	1	2-7	074-1302-16	OUTLET SOCKET(TH16)	1
1-1	940-8601-02	ESCUTCHEON-ASSY	1	2-8	074-0895-20	OUTLET SOCKET	1
1-2	373-1220-00	DIAL-CVR	1	2-9	076-0478-59	PLUG(9PIN)	1
1-3	380-5811-01	KNOB	2	2-10	313-2019-10	SUB HEAT SINK	1
1-4	383-0815-01	KNOB RING	2	2-11	331-4414-00	TR HOLDER	1
1-5	-----	SW-PWB-ASSY(3380A7-77)	1	2-12	331-4913-00	OUTLET HOLDER	1
1-5-1	-----	SW PWB(375301-039)	1	2-13	331-4678-00	IC-HOLDER	1
1-5-2	016-0018-37	VR W/SHAFT	2	2-14	331-4914-00	OUTLET HOLDER	1
1-5-3	001-7140-90	DIODE	16	2-15	331-4915-10	ANT-HOLDER	1
1-5-4	001-7080-96	DIODE	46	2-16	778-3006-00	TAP-SCREW	2
1-5-5	060-8130-90	BLUETOOTH MODULE	1	2-17	854-7862-50	EXTENSION LEAD	1
1-5-6	013-6201-53	SWITCH	22	3	311-1996-10	LOWER CASE	1
1-5-7	060-8094-50	CERAMIC-ANT	1	4	310-1920-10	UPPER CASE	1
1-5-8	335-9092-01	LCD HOLDER	1	5	309-1937-02	ES PLATE	1
1-5-9	335-9122-00	COLOR FILTER	1	6	313-2096-00	HEAT SINK	1
1-5-10	379-1458-63	LCD	1	7	929-5036-80	CD-MECH-MODULE	1
1-5-11	331-5091-01	LCD-CVR	1	8	331-4916-00	MECH-BRKT	1
1-5-12	074-2260-80	OUTLET SOCKET(30PIN)	2	9	-----	SUB-PWB-ASSY(3293AH-79)	1
1-5-13	076-6017-15	PLUG(15PIN)	1	9-1	-----	SUB-PWB(367401-039)	1
1-5-14	345-6569-01	URETHAN SHEET	1	9-2	074-4049-50	OUTLET SOCKET	1
1-5-15	345-6570-00	URETHAN SHEET	2	9-3	331-4917-00	OUTLET HOLDER	1
1-5-16	345-6582-00	SPACER	1	9-4	074-2506-10	OUTLET SOCKET	1
1-5-17	335-9206-00	SPACER	1	9-5	714-2606-8B	MACHINE SCREW	1
1-6	716-0778-52	SPECIAL SCREW	12	10	816-3060-05	FLAT WIRE	2
1-7	331-5224-00	EARTH-SPRING	2	11	816-4069-50	FLAT WIRE	1
1-8	345-6568-00	CUSHION RUBBER	1	12	816-4068-50	FLAT WIRE	1
1-9	347-8998-00	SHADE(LH)	1	13	331-3579-20	EARTH PLATE	1
1-10	347-8999-00	SHADE(RH)	1	14	093-2196-00	ANT-JUMPER	1
2	-----	MAIN-PWB-ASSY(3380A7-75)	1	15	276-0903-12	SETPLATE	1
2-1	-----	MAIN PWB(375201-039)	1	16	290-0548-12	LABEL	1
2-2	073-0762-90	TERMINAL	2	17	714-2606-8B	MACHINE SCREW	22
2-3	074-2506-30	OUTLET SOCKET	1	18	735-2614-1B	D-SEMS SCREW	3
2-4	074-2259-30	OUTLET SOCKET(30PIN)	2	19	714-2603-89	MACHINE SCREW	2
2-5	074-4009-20	OUTLET SOCKET(TH18+2)	1	20	716-0878-50	SPECIAL SCREW	7
2-6	051-2064-00	IC(POWER-IC)	1				

ELECTRICAL PARTS LIST

Main PWB(B1) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C102	-----	(NU)	C178	-----	(NU)	C264	046-1042-78	16V 0.1uF
C103	-----	(NU)	C179	-----	(NU)	C265	046-4712-58	470pF K B
C104	-----	(NU)	C180	045-1007-50	10 +/-0.5pF CH	C266	046-1042-78	16V 0.1uF
C105	-----	(NU)	C181	046-2232-78	0.022uF K B	C267	-----	(NU)
C106	-----	(NU)	C184	046-2232-78	0.022uF K B	C268	046-1042-78	16V 0.1uF
C107	-----	(NU)	C185	046-2232-78	0.022uF K B	C269	046-1022-58	50V 1000pF
C108	-----	(NU)	C186	046-2232-78	0.022uF K B	C270	-----	(NU)
C109	166-1201-50	12pF CH	C192	178-2255-79	2.2uF	C271	046-1022-58	50V 1000pF
C110	-----	(NU)	C193	178-2255-79	2.2uF	C272	046-1022-58	50V 1000pF
C111	-----	(NU)	C194	178-2255-79	2.2uF	C273	046-1022-58	50V 1000pF
C112	045-2201-50	22pFJ CH	C195	178-2255-79	2.2uF	C274	-----	(NU)
C113	046-1022-58	50V 1000pF	C196	166-2201-50	22pF CH	C275	042-0643-58	6.3V 330uF
C114	045-5096-50	5 +/-0.25pF CH	C197	166-2201-50	22pF CH	C276	046-1042-78	16V 0.1uF
C115	046-1022-58	50V 1000pF	C198	166-2201-50	22pF CH	C277	-----	(NU)
C116	045-1501-50	15pFJ CH	C199	166-2201-50	22pF CH	C278	046-6812-58	680pF K B
C117	046-1042-78	16V 0.1uF	C201	-----	(NU)	C279	046-6812-58	680pF K B
C118	046-1042-78	16V 0.1uF	C203	178-2255-79	2.2uF	C280	046-6812-58	680pF K B
C120	045-3901-50	39pFJ CH	C204	178-2255-79	2.2uF	C281	046-6812-58	680pF K B
C121	045-1011-50	100pFJ CH	C205	178-2255-79	2.2uF	C282	165-1063-35	16V 10uF
C122	045-1211-50	120pFJ CH	C206	178-2255-79	2.2uF	C283	168-1042-78	16V 0.1uF K
C123	046-3922-58	3900pF K B	C207	166-2201-50	22pF CH	C284	043-0570-90	16V 2.2uF K
C124	046-1022-58	50V 1000pF	C208	166-2201-50	22pF CH	C285	168-1022-55	1000pF K
C125	046-1042-78	16V 0.1uF	C209	166-2201-50	22pF CH	C286	165-1063-35	16V 10uF
C126	168-3342-58	0.33uF K	C210	166-2201-50	22pF CH	C287	168-1042-78	16V 0.1uF K
C127	046-1032-78	16V 0.01uF	C211	165-4753-55	35V 4.7uF	C288	168-1022-55	1000pF K
C128	046-1032-78	16V 0.01uF	C212	165-4753-55	35V 4.7uF	C289	166-1201-50	12pF CH
C129	045-5096-50	5 +/-0.25pF CH	C213	178-1052-78	25V 1uF	C290	166-1201-50	12pF CH
C130	046-3322-58	3300pF K B	C214	178-1052-78	25V 1uF	C291	168-2245-79	0.22uF Z
C131	046-2232-78	0.022uF K B	C215	178-1052-78	25V 1uF	C292	-----	(NU)
C132	046-1022-58	50V 1000pF	C216	178-1052-78	25V 1uF	C293	168-1022-55	1000pF K
C133	046-2232-78	0.022uF K B	C218	-----	(NU)	C294	166-4701-50	47pF CH
C134	165-4763-35	16V 47uF	C219	046-1042-78	16V 0.1uF	C295	166-4701-50	47pF CH
C135	168-2242-58	0.22uF K	C220	-----	(NU)	C296	166-4701-50	47pF CH
C136	046-2232-78	0.022uF K B	C221	-----	(NU)	C297	166-1007-50	10pF CH
C137	046-2232-78	0.022uF K B	C222	166-2201-50	22pF CH	C298	168-1022-55	1000pF K
C138	046-2232-78	0.022uF K B	C223	166-2201-50	22pF CH	C299	-----	(NU)
C139	046-2232-78	0.022uF K B	C224	166-2201-50	22pF CH	C301	168-1042-78	16V 0.1uF K
C140	-----	(NU)	C225	166-2201-50	22pF CH	C302	165-1073-35	16V 100uF
C141	-----	(NU)	C227	046-1042-78	16V 0.1uF	C303	165-1073-35	16V 100uF
C142	-----	(NU)	C228	046-1042-78	16V 0.1uF	C304	168-2732-55	16V 0.027uF K
C143	-----	(NU)	C233	046-1042-78	16V 0.1uF	C305	168-2732-55	16V 0.027uF K
C144	-----	(NU)	C234	046-1042-78	16V 0.1uF	C306	168-2732-55	16V 0.027uF K
C145	-----	(NU)	C235	046-1022-58	50V 1000pF	C307	168-2732-55	16V 0.027uF K
C146	-----	(NU)	C236	045-1007-50	10 +/-0.5pF CH	C308	168-1042-78	16V 0.1uF K
C147	-----	(NU)	C237	-----	(NU)	C309	-----	(NU)
C148	046-1022-58	50V 1000pF	C238	046-1042-78	16V 0.1uF	C310	-----	(NU)
C149	046-1022-58	50V 1000pF	C239	045-1007-50	10 +/-0.5pF CH	C311	166-5611-50	560pF CH
C150	-----	(NU)	C240	165-4753-55	35V 4.7uF	C312	166-5611-50	560pF CH
C151	165-1073-35	16V 100uF	C241	-----	(NU)	C313	166-2711-50	270pF CH
C152	-----	(NU)	C242	165-2263-15	6.3V 22uF	C314	-----	(NU)
C154	-----	(NU)	C243	046-4732-78	16V 0.047uF	C315	166-2711-50	270pF CH
C155	-----	(NU)	C244	-----	(NU)	C316	166-2201-50	22pF CH
C158	046-1022-58	50V 1000pF	C245	042-1769-90	6.3V 220uF M	C317	166-2201-50	22pF CH
C159	165-4763-35	16V 47uF	C246	046-1042-78	16V 0.1uF	C318	-----	(NU)
C160	045-5096-50	5 +/-0.25pF CH	C247	046-1042-78	16V 0.1uF	C319	168-1042-78	16V 0.1uF K
C161	046-3322-58	3300pF K B	C248	-----	(NU)	C320	165-1073-35	16V 100uF
C162	046-2232-78	0.022uF K B	C249	165-4753-55	35V 4.7uF	C321	166-2201-50	22pF CH
C163	046-2232-78	0.022uF K B	C250	046-1042-78	16V 0.1uF	C322	166-2201-50	22pF CH
C164	168-2242-58	0.22uF K	C251	168-1042-78	16V 0.1uF K	C323	-----	(NU)
C165	-----	(NU)	C252	042-1769-90	6.3V 220uF M	C324	-----	(NU)
C166	-----	(NU)	C253	046-1042-78	16V 0.1uF	C325	165-1073-35	16V 100uF
C167	-----	(NU)	C254	043-0552-90	6.3V 47uF M	C326	-----	(NU)
C168	-----	(NU)	C255	046-1042-78	16V 0.1uF	C327	-----	(NU)
C169	166-1201-50	12pF CH	C256	-----	(NU)	C328	166-5611-50	560pF CH
C170	-----	(NU)	C257	-----	(NU)	C329	-----	(NU)
C171	-----	(NU)	C258	168-1052-78	16V 1uF K	C330	-----	(NU)
C173	045-3901-50	39pFJ CH	C259	046-1042-78	16V 0.1uF	C331	166-5611-50	560pF CH
C174	045-1211-50	120pFJ CH	C260	046-1042-78	16V 0.1uF	C332	166-2711-50	270pF CH
C175	046-1022-58	50V 1000pF	C261	043-0552-90	6.3V 47uF M	C333	-----	(NU)
C176	046-1022-58	50V 1000pF	C262	046-1042-78	16V 0.1uF	C334	166-2711-50	270pF CH
C177	-----	(NU)	C263	046-1022-58	50V 1000pF	C335	-----	(NU)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C336	-----	(NU)	C619	168-1042-38	50V 0.1uF K	C2005	045-5601-50	56pFJ CH
C337	-----	(NU)	C620	165-1063-35	16V 10uF	C2006	045-5601-50	56pFJ CH
C353	168-2242-58	0.22uF K	C621	165-1073-15	6.3V 100uF	CCT401	050-0140-54	1/32W 1k ohm x4J
C354	168-2242-58	0.22uF K	C622	168-1042-78	16V 0.1uF K	CCT402	050-0140-54	1/32W 1k ohm x4J
C355	168-2242-58	0.22uF K	C623	168-3342-58	0.33uF K	CCT403	050-0140-54	1/32W 1k ohm x4J
C356	168-2242-58	0.22uF K	C624	165-4763-15	6.3V 47uF	CCT404	050-0140-54	1/32W 1k ohm x4J
C357	168-1052-78	16V 1uF K	C625	168-1042-78	16V 0.1uF K	D101	001-9013-90	BA891
C360	165-1063-35	16V 10uF	C626	165-1073-35	16V 100uF	D102	001-9013-90	BA891
C367	168-1052-78	16V 1uF K	C627	168-1042-78	16V 0.1uF K	D103	001-0516-90	MA111
C368	168-1052-78	16V 1uF K	C628	168-1042-78	16V 0.1uF K	D104	001-9013-90	BA891
C401	168-1032-55	0.01uF K	C629	-----	(NU)	D105	001-9013-90	BA891
C402	168-1042-78	16V 0.1uF K	C630	168-1042-38	50V 0.1uF K	D301	-----	(NU)
C403	168-4752-98	4.7uF K	C631	165-4763-35	16V 47uF	D302	-----	(NU)
C404	165-1073-35	16V 100uF	C632	168-1042-78	16V 0.1uF K	D403	001-0535-90	MA729
C405	168-1032-55	0.01uF K	C633	165-1073-35	16V 100uF	D404	001-0516-90	MA111
C406	168-1032-55	0.01uF K	C634	168-1042-78	16V 0.1uF K	D405	001-4301-48	HZU 9.1B3
C407	166-1007-50	10pF CH	C635	168-1042-38	50V 0.1uF K	D406	001-4301-25	HZU4.7B1
C408	166-1007-50	10pF CH	C636	165-1073-35	16V 100uF	D501	001-0516-90	MA111
C409	-----	(NU)	C637	043-8000-90	50V 0.1uF	D502	001-4320-50	EDZC6.8B
C410	168-1042-78	16V 0.1uF K	C638	189-4783-12	6.3V 4700uF	D601	-----	(NU)
C411	168-6822-55	6800pF K	C639	168-3342-58	0.33uF K	D602	001-2620-90	RB060L-40
C412	168-1032-55	0.01uF K	C640	168-1022-55	1000pF K	D603	-----	(NU)
C413	168-1032-55	0.01uF K	C641	168-1042-78	16V 0.1uF K	D604	-----	(NU)
C414	-----	(NU)	C642	042-1769-90	6.3V 220uF M	D605	001-2403-90	M1F60
C415	168-1042-78	16V 0.1uF K	C701	166-1007-50	10pF CH	D701	001-4301-32	HZU 5.6B2
C416	165-4763-15	6.3V 47uF	C702	166-1007-50	10pF CH	D702	001-4301-32	HZU 5.6B2
C501	168-1042-78	16V 0.1uF K	C703	166-1007-50	10pF CH	D705	001-4301-68	HZU18B1
C502	168-4722-55	4700pF K	C704	166-1007-50	10pF CH	D706	001-4301-68	HZU18B1
C503	168-1042-78	16V 0.1uF K	C705	166-1007-50	10pF CH	D801	001-2403-90	M1F60
C504	043-0603-90	16V 10uF	C706	166-1007-50	10pF CH	D802	001-4301-68	HZU18B1
C505	168-1042-78	16V 0.1uF K	C707	166-1007-50	10pF CH	D803	-----	(NU)
C506	168-1052-78	16V 1uF K	C708	166-1007-50	10pF CH	D804	-----	(NU)
C508	043-0603-90	16V 10uF	C709	043-8000-90	50V 0.1uF	D805	-----	(NU)
C509	168-1042-78	16V 0.1uF K	C710	166-1007-50	10pF CH	D806	-----	(NU)
C510	043-0603-90	16V 10uF	C711	166-1007-50	10pF CH	D807	001-4301-32	HZU 5.6B2
C511	168-1052-78	16V 1uF K	C801	168-1042-78	16V 0.1uF K	D808	001-9210-50	AVR-
C512	168-1022-55	1000pF K	C803	166-1011-50	100pF CH			M1608C270MTAAD
C513	042-1769-90	6.3V 220uF M	C804	-----	(NU)	D809	001-0516-90	MA111
C514	043-0554-90	25V 10uF	C805	-----	(NU)	D810	001-0535-90	MA729
C515	168-1042-78	16V 0.1uF K	C806	168-1042-78	16V 0.1uF K	D811	001-0516-90	MA111
C516	168-1042-78	16V 0.1uF K	C807	168-1032-55	0.01uF K	D812	001-9210-50	AVR-
C517	168-3342-58	0.33uF K	C812	166-1007-50	10pF CH			M1608C270MTAAD
C518	168-1042-78	16V 0.1uF K	C813	165-1063-35	16V 10uF	D813	001-9210-50	AVR-
C519	166-1501-50	15pF CH	C814	043-8000-90	50V 0.1uF			M1608C270MTAAD
C520	165-4763-15	6.3V 47uF	C815	166-1007-50	10pF CH	D814	001-9210-50	AVR-
C521	042-1769-90	6.3V 220uF M	C816	165-1053-65	50V 1uF			M1608C270MTAAD
C522	168-1042-78	16V 0.1uF K	C817	043-8000-90	50V 0.1uF	D815	001-4301-48	HZU 9.1B3
C523	168-1042-78	16V 0.1uF K	C818	042-1624-00	16V 4700uF	D816	001-2403-90	M1F60
C524	168-1052-78	16V 1uF K	C819	165-1063-35	16V 10uF	D817	001-4912-90	SM5S22A-HE3/2D
C525	168-1022-55	1000pF K	C820	165-1073-35	16V 100uF	D818	001-2403-90	M1F60
C526	168-1022-55	1000pF K	C821	165-1063-35	16V 10uF	D819	001-2403-90	M1F60
C527	168-1042-78	16V 0.1uF K	C822	168-8212-55	820pF K	D820	001-4301-44	HZU8.2B2
C528	168-3342-58	0.33uF K	C823	168-8212-55	820pF K	D821	001-4301-32	HZU 5.6B2
C529	165-1073-35	16V 100uF	C824	166-1011-50	100pF CH	D822	001-4301-32	HZU 5.6B2
C530	-----	(NU)	C825	168-8212-55	820pF K	D823	001-2403-90	M1F60
C531	168-1022-55	1000pF K	C826	168-8212-55	820pF K	D824	-----	(NU)
C601	165-4763-15	6.3V 47uF	C827	168-8212-55	820pF K	D825	001-2403-90	M1F60
C602	168-1042-78	16V 0.1uF K	C828	168-8212-55	820pF K	IC101	051-3368-90	NJM2886DL3-05-TE1
C603	168-1022-55	1000pF K	C829	168-8212-55	820pF K	IC102	051-4025-90	TEF7000
C604	168-1042-38	50V 0.1uF K	C830	168-8212-55	820pF K	IC103	051-4025-90	TEF7000
C605	043-0602-90	10uF	C831	168-1042-78	16V 0.1uF K	IC201	-----	SAF7741HV/N127
C606	165-1073-35	16V 100uF	C832	168-1022-55	1000pF K			(CENTER PAD SOLD
C607	166-1501-50	15pF CH	C833	168-1032-55	0.01uF K			TYPE)
C608	168-1042-78	16V 0.1uF K	C834	168-1042-78	16V 0.1uF K			(674700-051)
C609	166-3311-50	330pF CH	C835	168-1022-55	1000pF K	IC202	051-5845-90	NJU26208V
C610	166-4701-50	47pF CH	C836	168-1042-78	16V 0.1uF K	IC203	125-7007-90	Si5441BDC-TI-E3
C611	-----	(NU)	C837	042-4043-90	35V 4.7uF	IC301	051-3034-90	NJM4558V
C612	165-1053-65	50V 1uF	C838	168-1022-55	1000pF K	IC302	051-3019-90	NJM2060V
C613	043-0542-00	25V 4.7uF	C839	165-1063-35	16V 10uF	IC303	-----	(NU)
C614	165-4763-15	6.3V 47uF	C840	168-1042-78	16V 0.1uF K	IC305	051-2064-00	TB2926HQB
C615	168-4742-78	0.47uF K	C841	165-1073-35	16V 100uF	IC401	-----	R5F64168PFB
C616	168-1042-78	16V 0.1uF K	C842	-----	(NU)			(FLASH TYPE)
C617	168-1022-55	1000pF K	C843	-----	(NU)			(034830-052)
C618	168-1042-78	16V 0.1uF K	C844	165-1073-35	16V 100uF			(Software should be
								written on production)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
IC402	051-5481-90	S-1009N30I-M5T1U	L237	010-3103-55	120 ohm/100MHz	R107	033-4741-15	1/16W 470k ohm J
IC403	-----	S-24C16CI-T8T5U3 (E2P-ROM) (942650-051) (Software should be written on production)	L238	010-3103-55	120 ohm/100MHz	R108	033-4741-15	1/16W 470k ohm J
IC404	051-5441-08	BD4828G-TR	L239	010-3103-55	120 ohm/100MHz	R109	033-3311-15	1/16W 330 ohm J
IC405	051-6600-58	HA12187FP	L240	010-3105-62	1k ohm/100MHz	R110	033-1811-15	1/16W 180 ohm J
IC501	051-6531-90	AK4633VN	L241	010-3105-62	1k ohm/100MHz	R111	033-5601-15	1/16W 56 ohm J
IC502	051-3026-90	NJM4580V	L242	010-3105-62	1k ohm/100MHz	R112	-----	(NU)
IC503	051-3718-90	NJM2864DL3-15	L278	010-3104-54	600 ohm/100MHz	R113	-----	(NU)
IC504	051-3553-90	NJM2865F3-05	L285	010-3104-54	600 ohm/100MHz	R114	-----	(NU)
IC505	051-3367-90	NJU7780U1-33-TE2	L301	010-3104-54	600 ohm/100MHz	R115	033-4731-15	1/16W 47k ohm J
IC506	051-3396-90	NJM2386ADL3-33- TE1	L302	010-3104-54	600 ohm/100MHz	R116	-----	(NU)
IC601	051-3333-00	NJM2396F05	L303	010-3104-54	600 ohm/100MHz	R117	033-2231-15	1/16W 22k ohm J
IC602	051-3397-90	NJM2386ADL3-09- TE1	L401	010-3407-66	22uH J	R118	033-3921-15	1/16W 3.9k ohm J
IC603	051-3616-90	LT3684EDD	L402	010-3406-54	2.2uH J	R119	033-0000-05	1/16W 0 ohm
IC604	051-3333-00	NJM2396F05	L501	010-3100-68	3.3uH J	R120	033-0000-05	1/16W 0 ohm
IC605	051-3719-90	NJM2886DL3-33	L502	010-3104-54	600 ohm/100MHz	R121	033-0000-05	1/16W 0 ohm
IC606	051-3367-90	NJU7780U1-33-TE2	L601	010-3108-53	330 ohm/100MHz	R122	033-0000-05	1/16W 0 ohm
IC607	051-3366-00	NJM2396F08	L602	010-3057-93	4.2uH	R123	033-0000-05	1/16W 0 ohm
IC608	051-3585-90	BD3571HFP	L805	010-8026-00	210uH	R124	033-0000-05	1/16W 0 ohm
IC609	051-3396-90	NJM2386ADL3-33- TE1	P401	076-0478-59	9P	R125	033-0000-05	1/16W 0 ohm
J401	074-2259-30	30P	Q101	-----	(NU)	R126	-----	(NU)
J501	074-2259-30	30P	Q102	-----	(NU)	R127	-----	(NU)
J601	074-2506-30	SOCKET(30P)	Q401	192-4116-51	2SC4116 G,L	R128	033-0000-05	1/16W 0 ohm
J701	074-0895-20	20P	Q402	192-4116-51	2SC4116 G,L	R129	033-0000-05	1/16W 0 ohm
J801	074-1302-16	16P	Q501	125-0021-91	DTA114EUA	R131	033-1201-15	1/16W 12 ohm
J802	074-4009-20	20P	Q601	-----	(NU)	R132	119-0000-05	1/10W 0 ohm JW
L101	-----	(NU)	Q602	191-1197-50	2SB1197K Q,R	R133	033-1051-15	1/16W 1M ohm J
L102	-----	(NU)	Q603	192-4116-51	2SC4116 G,L	R134	033-1051-15	1/16W 1M ohm J
L103	-----	(NU)	Q604	191-1197-50	2SB1197K Q,R	R136	033-2231-15	1/16W 22k ohm J
L104	-----	(NU)	Q605	192-4116-51	2SC4116 G,L	R137	033-3921-15	1/16W 3.9k ohm J
L105	-----	(NU)	Q606	190-1586-00	2SA1586 O,Y,G	R138	033-1811-15	1/16W 180 ohm J
L106	-----	(NU)	Q607	192-4116-51	2SC4116 G,L	R139	-----	(NU)
L107	010-3062-54	290nH	Q701	190-1586-00	2SA1586 O,Y,G	R140	-----	(NU)
L108	010-3406-56	3.3uH J	Q702	125-2027-91	DTC114EUA	R141	-----	(NU)
L109	010-3062-56	0.5uH	Q703	192-4116-51	2SC4116 G,L	R142	033-0000-05	1/16W 0 ohm
L110	010-3062-53	0.215uH	Q704	190-1586-00	2SA1586 O,Y,G	R143	033-0000-05	1/16W 0 ohm
L111	010-3439-51	1.8uH	Q705	125-2027-91	DTC114EUA	R144	033-0000-05	1/16W 0 ohm
L112	010-4100-50	0.215uH	Q706	192-4116-51	2SC4116 G,L	R145	033-1201-15	1/16W 12 ohm
L113	010-2290-52	330uH	Q709	-----	(NU)	R146	033-0000-05	1/16W 0 ohm
L114	010-2290-52	330uH	Q710	-----	(NU)	R147	033-3311-15	1/16W 330 ohm J
L115	010-3105-62	1k ohm/100MHz	Q711	192-4116-51	2SC4116 G,L	R148	033-1051-15	1/16W 1M ohm J
L116	-----	(NU)	Q715	190-1586-00	2SA1586 O,Y,G	R149	033-1051-15	1/16W 1M ohm J
L117	010-3105-62	1k ohm/100MHz	Q716	125-2027-91	DTC114EUA	R150	033-0000-05	1/16W 0 ohm
L118	010-3062-54	290nH	Q801	192-4116-51	2SC4116 G,L	R151	033-0000-05	1/16W 0 ohm
L119	010-4100-50	0.215uH	Q802	192-4116-51	2SC4116 G,L	R152	-----	(NU)
L201	010-3104-54	600 ohm/100MHz	Q803	192-4116-51	2SC4116 G,L	R153	-----	(NU)
L202	010-3104-54	600 ohm/100MHz	Q804	-----	(NU)	R154	-----	(NU)
L204	010-3104-54	600 ohm/100MHz	Q805	-----	(NU)	R155	-----	(NU)
L205	010-3105-62	1k ohm/100MHz	Q806	-----	(NU)	R201	032-0140-51	1/10W 15k ohm F
L206	010-3104-54	600 ohm/100MHz	Q807	-----	(NU)	R202	032-0140-51	1/10W 15k ohm F
L207	010-3104-54	600 ohm/100MHz	Q808	192-5810-00	2SC5810 TE12L	R203	032-0140-51	1/10W 15k ohm F
L208	010-3104-54	600 ohm/100MHz	Q809	190-2071-00	2SA2071	R204	032-0140-51	1/10W 15k ohm F
L209	010-3104-54	600 ohm/100MHz	Q810	192-4116-51	2SC4116 G,L	R205	119-1031-15	1/10W 10k ohm
L210	010-3104-54	600 ohm/100MHz	Q811	125-0021-91	DTA114EUA	R206	119-1031-15	1/10W 10k ohm
L213	010-3104-54	600 ohm/100MHz	Q812	125-2027-91	DTC114EUA	R211	119-2201-15	1/10W 22 ohm
L214	010-3104-54	600 ohm/100MHz	Q813	192-5886-00	2SC5886	R212	119-2201-15	1/10W 22 ohm
L215	010-3104-54	600 ohm/100MHz	Q814	192-4116-51	2SC4116 G,L	R213	032-0140-51	1/10W 15k ohm F
L216	010-3104-54	600 ohm/100MHz	Q815	192-4116-51	2SC4116 G,L	R214	032-0140-51	1/10W 15k ohm F
L217	010-3105-62	1k ohm/100MHz	Q816	190-1586-00	2SA1586 O,Y,G	R215	032-0140-51	1/10W 15k ohm F
L218	010-3105-62	1k ohm/100MHz	Q817	125-0021-91	DTA114EUA	R216	032-0140-51	1/10W 15k ohm F
L219	010-3104-54	600 ohm/100MHz	Q818	125-2027-91	DTC114EUA	R217	033-1811-15	1/16W 180 ohm J
L220	010-3105-62	1k ohm/100MHz	Q819	192-2873-00	2SC2873	R218	033-1811-15	1/16W 180 ohm J
L221	010-3104-54	600 ohm/100MHz	Q820	192-2873-00	2SC2873	R219	033-1011-15	1/16W 100 ohm J
L222	010-3104-54	600 ohm/100MHz	Q821	192-4116-51	2SC4116 G,L	R220	119-1031-15	1/10W 10k ohm
L223	010-3104-54	600 ohm/100MHz	Q822	190-2071-00	2SA2071	R221	032-0140-89	1/10W 47k ohm F
L234	010-3103-55	120 ohm/100MHz	Q823	192-4116-51	2SC4116 G,L	R222	032-0140-89	1/10W 47k ohm F
L235	010-3103-55	120 ohm/100MHz	Q824	-----	(NU)	R223	119-1031-15	1/10W 10k ohm
L236	010-3103-55	120 ohm/100MHz	Q825	190-1586-00	2SA1586 O,Y,G	R224	032-0140-89	1/10W 47k ohm F
			Q826	125-2027-91	DTC114EUA	R225	032-0140-89	1/10W 47k ohm F
			R101	-----	(NU)	R226	119-2201-15	1/10W 22 ohm
			R102	-----	(NU)	R227	033-0000-05	1/16W 0 ohm
			R103	-----	(NU)	R228	033-0000-05	1/16W 0 ohm
			R104	-----	(NU)	R229	032-0140-50	1/10W 10k ohm F
			R105	-----	(NU)	R230	032-0140-50	1/10W 10k ohm F
			R106	-----	(NU)	R231	032-0140-50	1/10W 10k ohm F

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R232	032-0140-50	1/10W 10k ohm F	R322	119-8211-15	1/10W 820 ohm	R473	119-1011-15	1/10W 100 ohm
R233	032-0140-50	1/10W 10k ohm F	R323	119-1021-15	1/10W 1k ohm	R474	032-0140-06	1/10W 100 ohm F
R234	032-0140-50	1/10W 10k ohm F	R324	-----	(NU)	R475	032-0140-06	1/10W 100 ohm F
R235	032-0140-50	1/10W 10k ohm F	R325	119-1031-15	1/10W 10k ohm	R476	032-0140-82	1/10W 150k ohm F
R236	032-0140-50	1/10W 10k ohm F	R326	-----	(NU)	R477	032-0148-50	1/10W 100k ohm D
R237	119-1011-15	1/10W 100 ohm	R327	119-1031-15	1/10W 10k ohm	R478	119-3331-15	1/10W 33k ohm
R238	119-1011-15	1/10W 100 ohm	R328	-----	(NU)	R479	119-1041-15	1/10W 100k ohm
R239	119-1031-15	1/10W 10k ohm	R329	-----	(NU)	R480	033-4731-15	1/16W 47k ohm J
R240	119-1011-15	1/10W 100 ohm	R330	-----	(NU)	R481	033-0000-05	1/16W 0 ohm
R241	119-0000-05	1/10W 0 ohm JW	R331	-----	(NU)	R482	119-5621-15	1/10W 5.6k ohm
R242	119-0000-05	1/10W 0 ohm JW	R332	-----	(NU)	R483	033-0000-05	1/16W 0 ohm
R243	119-1001-15	1/10W 10 ohm	R340	119-1031-15	1/10W 10k ohm	R484	119-1021-15	1/10W 1k ohm
R244	-----	(NU)	R341	119-2221-15	1/10W 2.2k ohm	R485	033-4721-15	1/16W 4.7k ohm J
R245	033-1021-15	1/16W 1k ohm J	R342	119-2221-15	1/10W 2.2k ohm	R486	033-4721-15	1/16W 4.7k ohm J
R246	033-1021-15	1/16W 1k ohm J	R343	119-2221-15	1/10W 2.2k ohm	R487	119-4731-15	1/10W 47k ohm
R247	033-1021-15	1/16W 1k ohm J	R344	119-2221-15	1/10W 2.2k ohm	R488	119-3321-15	1/10W 3.3k ohm
R248	033-1021-15	1/16W 1k ohm J	R361	119-3331-15	1/10W 33k ohm	R489	119-1831-15	1/10W 18k ohm
R249	119-1011-15	1/10W 100 ohm	R406	-----	(NU)	R501	119-1011-15	1/10W 100 ohm
R250	119-1011-15	1/10W 100 ohm	R407	033-1011-15	1/16W 100 ohm J	R502	119-1011-15	1/10W 100 ohm
R251	119-2201-15	1/10W 22 ohm	R408	033-1011-15	1/16W 100 ohm J	R503	119-2201-15	1/10W 22 ohm
R252	119-2201-15	1/10W 22 ohm	R409	-----	(NU)	R504	119-2201-15	1/10W 22 ohm
R253	119-2201-15	1/10W 22 ohm	R410	033-1021-15	1/16W 1k ohm J	R505	119-2201-15	1/10W 22 ohm
R254	119-3321-15	1/10W 3.3k ohm	R411	119-3321-15	1/10W 3.3k ohm	R506	119-2201-15	1/10W 22 ohm
R255	119-3321-15	1/10W 3.3k ohm	R412	119-4721-15	1/10W 4.7k ohm	R507	119-1011-15	1/10W 100 ohm
R256	119-3321-15	1/10W 3.3k ohm	R413	119-4721-15	1/10W 4.7k ohm	R508	119-0000-05	1/10W 0 ohm JW
R257	119-3321-15	1/10W 3.3k ohm	R414	033-0000-05	1/16W 0 ohm	R509	119-1031-15	1/10W 10k ohm
R258	119-4721-15	1/10W 4.7k ohm	R415	033-1021-15	1/16W 1k ohm J	R510	119-1031-15	1/10W 10k ohm
R259	119-1011-15	1/10W 100 ohm	R416	119-3321-15	1/10W 3.3k ohm	R511	119-0000-05	1/10W 0 ohm JW
R260	119-2201-15	1/10W 22 ohm	R417	119-4721-15	1/10W 4.7k ohm	R513	-----	(NU)
R261	119-2201-15	1/10W 22 ohm	R418	033-0000-05	1/16W 0 ohm	R514	119-1031-15	1/10W 10k ohm
R262	119-2201-15	1/10W 22 ohm	R419	-----	(NU)	R515	119-1031-15	1/10W 10k ohm
R263	119-1011-15	1/10W 100 ohm	R420	-----	(NU)	R517	119-0000-05	1/10W 0 ohm JW
R264	119-1011-15	1/10W 100 ohm	R421	119-0000-05	1/10W 0 ohm JW	R518	119-0000-05	1/10W 0 ohm JW
R265	119-1031-15	1/10W 10k ohm	R422	119-0000-05	1/10W 0 ohm JW	R519	119-1031-15	1/10W 10k ohm
R266	-----	(NU)	R423	119-3331-15	1/10W 33k ohm	R520	119-2031-15	1/10W 20k ohm
R267	119-2201-15	1/10W 22 ohm	R424	033-1021-15	1/16W 1k ohm J	R521	119-4731-15	1/10W 47k ohm
R268	119-2201-15	1/10W 22 ohm	R425	119-3321-15	1/10W 3.3k ohm	R522	119-2031-15	1/10W 20k ohm
R269	119-2201-15	1/10W 22 ohm	R427	033-1021-15	1/16W 1k ohm J	R523	-----	(NU)
R270	119-2201-15	1/10W 22 ohm	R428	119-3321-15	1/10W 3.3k ohm	R524	119-0000-05	1/10W 0 ohm JW
R271	119-2201-15	1/10W 22 ohm	R429	033-1021-15	1/16W 1k ohm J	R525	119-0000-05	1/10W 0 ohm JW
R272	119-0000-05	1/10W 0 ohm JW	R430	033-4731-15	1/16W 47k ohm J	R527	119-2201-15	1/10W 22 ohm
R273	-----	(NU)	R432	033-4731-15	1/16W 47k ohm J	R528	-----	(NU)
R274	-----	(NU)	R433	033-1021-15	1/16W 1k ohm J	R529	119-1031-15	1/10W 10k ohm
R275	119-0000-05	1/10W 0 ohm JW	R434	033-4731-15	1/16W 47k ohm J	R530	119-0000-05	1/10W 0 ohm JW
R276	033-1811-15	1/16W 180 ohm J	R436	033-1021-15	1/16W 1k ohm J	R531	-----	(NU)
R277	033-1811-15	1/16W 180 ohm J	R437	033-4731-15	1/16W 47k ohm J	R532	033-4731-15	1/16W 47k ohm J
R279	119-1001-15	1/10W 10 ohm	R438	033-4721-15	1/16W 4.7k ohm J	R604	116-0000-05	1/4W 0 ohm JW
R280	032-0140-51	1/10W 15k ohm F	R439	032-0140-72	1/10W 470 ohm F	R605	116-0000-05	1/4W 0 ohm JW
R281	032-0140-51	1/10W 15k ohm F	R440	033-0000-05	1/16W 0 ohm	R606	033-4731-15	1/16W 47k ohm J
R282	032-0140-51	1/10W 15k ohm F	R441	033-4721-15	1/16W 4.7k ohm J	R607	-----	(NU)
R283	032-0140-51	1/10W 15k ohm F	R442	032-0140-72	1/10W 470 ohm F	R610	033-0000-05	1/16W 0 ohm
R286	119-1031-15	1/10W 10k ohm	R443	033-0000-05	1/16W 0 ohm	R611	032-0140-80	1/10W 18k ohm F
R287	119-1031-15	1/10W 10k ohm	R444	033-1031-15	1/16W 10k ohm J	R612	119-0000-05	1/10W 0 ohm JW
R301	119-0000-05	1/10W 0 ohm JW	R445	119-1021-15	1/10W 1k ohm	R613	032-0140-00	1/10W 56k ohm F
R302	119-1031-15	1/10W 10k ohm	R446	033-4721-15	1/16W 4.7k ohm J	R614	119-2231-15	1/10W 22k ohm
R303	119-1031-15	1/10W 10k ohm	R447	119-1011-15	1/10W 100 ohm	R615	032-0140-69	1/10W 16k ohm F
R304	119-1031-15	1/10W 10k ohm	R449	033-1031-15	1/16W 10k ohm J	R616	033-0000-05	1/16W 0 ohm
R305	119-1031-15	1/10W 10k ohm	R450	033-4721-15	1/16W 4.7k ohm J	R617	033-0000-05	1/16W 0 ohm
R306	-----	(NU)	R451	119-1011-15	1/10W 100 ohm	R618	116-0000-05	1/4W 0 ohm JW
R307	-----	(NU)	R453	033-1031-15	1/16W 10k ohm J	R619	033-4731-15	1/16W 47k ohm J
R308	119-1031-15	1/10W 10k ohm	R454	033-1021-15	1/16W 1k ohm J	R620	033-1021-15	1/16W 1k ohm J
R309	119-1031-15	1/10W 10k ohm	R455	033-4731-15	1/16W 47k ohm J	R621	033-1031-15	1/16W 10k ohm J
R310	-----	(NU)	R456	033-0000-05	1/16W 0 ohm	R622	033-1031-15	1/16W 10k ohm J
R311	-----	(NU)	R457	119-1031-15	1/10W 10k ohm	R623	119-3321-15	1/10W 3.3k ohm
R312	-----	(NU)	R458	119-1011-15	1/10W 100 ohm	R624	119-0000-05	1/10W 0 ohm JW
R313	-----	(NU)	R459	119-1011-15	1/10W 100 ohm	R625	033-1021-15	1/16W 1k ohm J
R314	-----	(NU)	R465	119-1231-15	1/10W 12k ohm	R626	033-1031-15	1/16W 10k ohm J
R315	119-4741-15	1/10W 470k ohm	R466	033-1031-15	1/16W 10k ohm J	R627	033-1031-15	1/16W 10k ohm J
R316	119-4741-15	1/10W 470k ohm	R467	119-4721-15	1/10W 4.7k ohm	R628	119-3321-15	1/10W 3.3k ohm
R317	119-4741-15	1/10W 470k ohm	R468	-----	(NU)	R629	116-0000-05	1/4W 0 ohm JW
R318	119-4741-15	1/10W 470k ohm	R469	-----	(NU)	R630	-----	(NU)
R319	-----	(NU)	R470	119-4731-15	1/10W 47k ohm	R631	119-0000-05	1/10W 0 ohm JW
R320	-----	(NU)	R471	119-1011-15	1/10W 100 ohm	R632	032-0231-52	1W 33 ohm
R321	-----	(NU)	R472	119-4731-15	1/10W 47k ohm	R633	032-0231-52	1W 33 ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R634	033-4731-15	1/16W 47k ohm J	R807	119-3321-15	1/10W 3.3k ohm	R857	-----	(NU)
R635	-----	(NU)	R808	119-1031-15	1/10W 10k ohm	R858	119-3321-15	1/10W 3.3k ohm
R636	-----	(NU)	R809	119-1031-15	1/10W 10k ohm	R859	033-1031-15	1/16W 10k ohm J
R637	119-1041-15	1/10W 100k ohm	R810	033-1031-15	1/16W 10k ohm J	R860	119-2221-15	1/10W 2.2k ohm
R638	119-2231-15	1/10W 22k ohm	R811	119-3331-15	1/10W 33k ohm	R861	116-4721-15	1/4W 4.7k ohm
R639	119-1041-15	1/10W 100k ohm	R812	-----	(NU)	R862	-----	(NU)
R640	119-3941-15	1/10W 390k ohm	R813	-----	(NU)	R864	116-1831-15	1/4W 18k ohm
R701	119-0000-05	1/10W 0 ohm JW	R814	033-1031-15	1/16W 10k ohm J	R865	116-5611-15	1/4W 560 ohm
R702	119-0000-05	1/10W 0 ohm JW	R815	116-2011-15	1/4W 200 ohm	R866	119-1031-15	1/10W 10k ohm
R703	119-2231-15	1/10W 22k ohm	R816	116-2011-15	1/4W 200 ohm	R867	116-2221-15	1/4W 2.2k ohm
R704	119-2231-15	1/10W 22k ohm	R817	-----	(NU)	R868	119-3321-15	1/10W 3.3k ohm
R705	119-1041-15	1/10W 100k ohm	R820	119-0000-05	1/10W 0 ohm JW	R869	116-2221-15	1/4W 2.2k ohm
R706	119-1021-15	1/10W 1k ohm	R821	-----	(NU)	R870	033-4721-15	1/16W 4.7k ohm J
R707	033-1021-15	1/16W 1k ohm J	R822	-----	(NU)	R871	033-4721-15	1/16W 4.7k ohm J
R708	033-4731-15	1/16W 47k ohm J	R823	-----	(NU)	R872	116-2201-15	1/4W 22 ohm
R709	033-4731-15	1/16W 47k ohm J	R824	-----	(NU)	R873	116-2201-15	1/4W 22 ohm
R710	119-4731-15	1/10W 47k ohm	R827	-----	(NU)	R875	-----	(NU)
R711	119-1021-15	1/10W 1k ohm	R828	119-1021-15	1/10W 1k ohm	R876	-----	(NU)
R712	119-2231-15	1/10W 22k ohm	R831	-----	(NU)	R877	-----	(NU)
R713	119-2231-15	1/10W 22k ohm	R832	-----	(NU)	R878	-----	(NU)
R714	033-1021-15	1/16W 1k ohm J	R834	-----	(NU)	R879	-----	(NU)
R715	119-1041-15	1/10W 100k ohm	R835	-----	(NU)	R880	116-2231-15	1/4W 22k ohm
R716	033-4731-15	1/16W 47k ohm J	R836	-----	(NU)	R881	116-2231-15	1/4W 22k ohm
R718	033-4731-15	1/16W 47k ohm J	R838	119-0000-05	1/10W 0 ohm JW	R884	-----	(NU)
R720	119-1021-15	1/10W 1k ohm	R839	032-0092-56	1/8W 22k ohm F	R885	-----	(NU)
R723	-----	(NU)	R840	032-0092-31	1/8W 150k ohm F	SUP102	060-8057-90	CSA20-141N-T
R724	-----	(NU)	R841	117-1031-15	1/8W 10k ohm	SUP103	-----	(NU)
R725	033-1021-15	1/16W 1k ohm J	R842	116-2221-15	1/4W 2.2k ohm	SUP105	060-8057-90	CSA20-141N-T
R727	033-4731-15	1/16W 47k ohm J	R843	119-3321-15	1/10W 3.3k ohm	SUP106	-----	(NU)
R729	033-4731-15	1/16W 47k ohm J	R844	032-0092-51	1/8W 1k ohm F	TH801	-----	(NU)
R730	119-4731-15	1/10W 47k ohm	R845	116-5621-15	1/4W 5.6k ohm	TH802	002-0318-21	THERMISTOR
R731	119-1021-15	1/10W 1k ohm	R846	033-1031-15	1/16W 10k ohm J	TM501	073-0762-90	TERMINAL
R735	119-2231-15	1/10W 22k ohm	R847	116-2221-15	1/4W 2.2k ohm	TM601	073-0762-90	TERMINAL
R736	119-2231-15	1/10W 22k ohm	R848	119-1221-15	1/10W 1.2k ohm	X201	061-3537-90	41.6MHz
R742	116-1211-15	1/4W 120 ohm	R849	116-4721-15	1/4W 4.7k ohm	X202	061-3548-90	12.288MHz/ NX5032GA
R744	116-1211-15	1/4W 120 ohm	R850	116-1021-15	1/4W 1k ohm			
R801	033-4731-15	1/16W 47k ohm J	R851	033-4731-15	1/16W 47k ohm J	X401	061-3541-90	10.00MHz
R802	119-1531-15	1/10W 15k ohm	R852	-----	(NU)	PWB	039-3752-01	PWB(WITHOUT COMPONENT)
R803	119-1031-15	1/10W 10k ohm	R853	119-2231-15	1/10W 22k ohm			
R804	119-3931-15	1/10W 39k ohm	R854	116-1821-15	1/4W 1.8k ohm			
R805	119-4721-15	1/10W 4.7k ohm	R855	117-1821-15	1/8W 1.8k ohm			
R806	033-1031-15	1/16W 10k ohm J	R856	119-3331-15	1/10W 33k ohm			

Switch PWB(B2) section


REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT1101	060-8094-50	YMA1250-S100706	D1016	001-7080-96	SCM-512VWT86A	D1050	001-7080-96	SCM-512VWT86A
ANT1102	-----	(NU)	D1017	001-7080-96	SCM-512VWT86A	D1051	001-7080-96	SCM-512VWT86A
C1001	168-1022-55	1000pF K	D1018	001-7080-96	SCM-512VWT86A	D1052	001-7080-96	SCM-512VWT86A
C1002	168-1042-78	16V 0.1uF K	D1019	001-7080-96	SCM-512VWT86A	D1053	001-7140-90	SMLZ14WBECW1(A) WHITE
C1003	168-1042-78	16V 0.1uF K	D1020	001-7080-96	SCM-512VWT86A	D1054	001-7140-90	SMLZ14WBECW1(A) WHITE
C1004	168-1042-78	16V 0.1uF K	D1021	001-7080-96	SCM-512VWT86A	D1055	001-7140-90	SMLZ14WBECW1(A) WHITE
C1005	178-1052-78	25V 1uF	D1022	001-7080-96	SCM-512VWT86A	D1056	001-7140-90	SMLZ14WBECW1(A) WHITE
C1006	166-5101-50	51pF CH	D1023	001-7080-96	SCM-512VWT86A	D1057	001-7140-90	SMLZ14WBECW1(A) WHITE
C1101	166-6097-50	6pF +/-0.5pF CH	D1024	001-7080-96	SCM-512VWT86A	D1058	001-7140-90	SMLZ14WBECW1(A) WHITE
C1102	168-1042-78	16V 0.1uF K	D1025	001-7080-96	SCM-512VWT86A	D1059	001-7140-90	SMLZ14WBECW1(A) WHITE
C1103	043-0616-90	6.3V 33uF	D1026	001-7080-96	SCM-512VWT86A	D1060	001-7140-90	SMLZ14WBECW1(A) WHITE
C1104	168-1042-78	16V 0.1uF K	D1027	001-7080-96	SCM-512VWT86A	D1061	001-7140-90	SMLZ14WBECW1(A) WHITE
C1105	168-2212-55	220pF K	D1028	001-7080-96	SCM-512VWT86A	D1062	001-7140-90	SMLZ14WBECW1(A) WHITE
D1001	001-7080-96	SCM-512VWT86A	D1029	001-7080-96	SCM-512VWT86A	D1063	001-7140-90	SMLZ14WBECW1(A) WHITE
D1002	001-7080-96	SCM-512VWT86A	D1030	001-7080-96	SCM-512VWT86A	D1064	001-7140-90	SMLZ14WBECW1(A) WHITE
D1003	001-7080-96	SCM-512VWT86A	D1031	001-7080-96	SCM-512VWT86A			
D1004	001-7080-96	SCM-512VWT86A	D1032	001-7080-96	SCM-512VWT86A			
D1005	001-7080-96	SCM-512VWT86A	D1033	001-7080-96	SCM-512VWT86A			
D1006	001-7080-96	SCM-512VWT86A	D1034	001-7080-96	SCM-512VWT86A			
D1007	001-7080-96	SCM-512VWT86A	D1035	001-7080-96	SCM-512VWT86A			
D1008	001-7080-96	SCM-512VWT86A	D1038	001-7080-96	SCM-512VWT86A			
D1009	001-7080-96	SCM-512VWT86A	D1039	001-7080-96	SCM-512VWT86A			
D1010	001-7080-96	SCM-512VWT86A	D1041	001-7080-96	SCM-512VWT86A			
D1011	001-7080-96	SCM-512VWT86A	D1043	001-7080-96	SCM-512VWT86A			
D1012	001-7080-96	SCM-512VWT86A	D1045	001-7080-96	SCM-512VWT86A			
D1013	001-7080-96	SCM-512VWT86A	D1047	001-7080-96	SCM-512VWT86A			
D1014	001-7080-96	SCM-512VWT86A	D1048	001-7080-96	SCM-512VWT86A			
D1015	001-7080-96	SCM-512VWT86A	D1049	001-7080-96	SCM-512VWT86A			

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D1065	001-7140-90	SMLZ14WBECW1(A) WHITE	R1040	119-1211-15	1/10W 120 ohm	R1131	119-1011-15	1/10W 100 ohm
D1066	001-7140-90	SMLZ14WBECW1(A) WHITE	R1041	119-1211-15	1/10W 120 ohm	R1132	119-1011-15	1/10W 100 ohm
D1067	001-7140-90	SMLZ14WBECW1(A) WHITE	R1042	119-1211-15	1/10W 120 ohm	R1133	119-1011-15	1/10W 100 ohm
D1068	001-7140-90	SMLZ14WBECW1(A) WHITE	R1045	119-1031-15	1/10W 10k ohm	R1134	119-0000-05	1/10W 0 ohm JW
IC1001	051-6642-08	LC75700T	R1046	119-3931-15	1/10W 39k ohm	R1135	119-1011-15	1/10W 100 ohm
IC1002	051-6104-00	NJU6626FG1-03	R1047	119-1021-15	1/10W 1k ohm	R1136	119-1011-15	1/10W 100 ohm
IC1101	060-8130-90	BT MODULE UGZZA-303A	R1048	-----	(NU)	R1137	119-1031-15	1/10W 10k ohm
IC1102	052-7100-80	SST25VF032B-80-4I	R1049	-----	(NU)	R1138	-----	(NU)
J1001	074-2260-80	30P	R1050	119-0000-05	1/10W 0 ohm JW	R1139	119-1011-15	1/10W 100 ohm
J1101	076-6017-15	15P	R1051	119-0000-05	1/10W 0 ohm JW	R1140	119-1011-15	1/10W 100 ohm
J1102	074-2260-80	30P	R1052	119-0000-05	1/10W 0 ohm JW	R1141	119-1011-15	1/10W 100 ohm
L1001	010-3406-66	22uH J	R1053	119-0000-05	1/10W 0 ohm JW	R1142	119-1011-15	1/10W 100 ohm
L1002	010-3406-66	22uH J	R1054	-----	(NU)	R1143	119-1011-15	1/10W 100 ohm
L1101	010-3044-57	3.9N	R1055	-----	(NU)	R1144	119-1011-15	1/10W 100 ohm
R1001	116-1221-15	1/4W 1.2k ohm	R1056	119-1021-15	1/10W 1k ohm	R1145	119-2201-15	1/10W 22 ohm
R1002	116-1221-15	1/4W 1.2k ohm	R1057	119-1021-15	1/10W 1k ohm	R1146	119-2201-15	1/10W 22 ohm
R1003	116-1221-15	1/4W 1.2k ohm	R1058	119-1021-15	1/10W 1k ohm	R1147	-----	(NU)
R1004	116-1221-15	1/4W 1.2k ohm	R1059	119-1021-15	1/10W 1k ohm	R1148	119-0000-05	1/10W 0 ohm JW
R1005	116-1021-15	1/4W 1k ohm	R1060	-----	(NU)	R1149	119-1011-15	1/10W 100 ohm
R1006	116-1021-15	1/4W 1k ohm	R1061	119-2221-15	1/10W 2.2k ohm	R1150	119-0000-05	1/10W 0 ohm JW
R1007	116-1021-15	1/4W 1k ohm	R1062	116-1221-15	1/4W 1.2k ohm	R1151	119-0000-05	1/10W 0 ohm JW
R1008	116-1021-15	1/4W 1k ohm	R1063	116-1221-15	1/4W 1.2k ohm	R1152	119-0000-05	1/10W 0 ohm JW
R1009	116-1021-15	1/4W 1k ohm	R1064	116-1221-15	1/4W 1.2k ohm	R1153	-----	(NU)
R1010	116-1021-15	1/4W 1k ohm	R1065	116-1521-15	1/4W 1.5k ohm	R1154	119-0000-05	1/10W 0 ohm JW
R1011	116-8211-15	1/4W 820 ohm	R1066	116-1221-15	1/4W 1.2k ohm	R1155	119-0000-05	1/10W 0 ohm JW
R1012	116-8211-15	1/4W 820 ohm	R1067	116-1221-15	1/4W 1.2k ohm	R1156	119-0000-05	1/10W 0 ohm JW
R1013	116-8211-15	1/4W 820 ohm	R1068	116-1521-15	1/4W 1.5k ohm	R1157	-----	(NU)
R1014	116-8211-15	1/4W 820 ohm	R1069	116-1221-15	1/4W 1.2k ohm	S1001	013-6201-53	SKPMAPE010
R1015	116-8211-15	1/4W 820 ohm	R1101	119-1031-15	1/10W 10k ohm	S1002	013-6201-53	SKPMAPE010
R1016	116-8211-15	1/4W 820 ohm	R1102	-----	(NU)	S1003	013-6201-53	SKPMAPE010
R1017	116-8211-15	1/4W 820 ohm	R1103	-----	(NU)	S1004	013-6201-53	SKPMAPE010
R1018	116-8211-15	1/4W 820 ohm	R1104	119-4721-15	1/10W 4.7k ohm	S1005	013-6201-53	SKPMAPE010
R1019	116-1221-15	1/4W 1.2k ohm	R1105	119-1031-15	1/10W 10k ohm	S1006	013-6201-53	SKPMAPE010
R1020	116-1221-15	1/4W 1.2k ohm	R1106	119-1011-15	1/10W 100 ohm	S1007	013-6201-53	SKPMAPE010
R1021	116-1221-15	1/4W 1.2k ohm	R1107	119-1011-15	1/10W 100 ohm	S1008	013-6201-53	SKPMAPE010
R1022	116-1221-15	1/4W 1.2k ohm	R1108	119-1011-15	1/10W 100 ohm	S1009	013-6201-53	SKPMAPE010
R1023	116-1221-15	1/4W 1.2k ohm	R1109	119-1031-15	1/10W 10k ohm	S1010	013-6201-53	SKPMAPE010
R1024	116-1221-15	1/4W 1.2k ohm	R1110	119-1011-15	1/10W 100 ohm	S1011	013-6201-53	SKPMAPE010
R1025	116-8211-15	1/4W 820 ohm	R1111	119-1031-15	1/10W 10k ohm	S1012	013-6201-53	SKPMAPE010
R1026	116-8211-15	1/4W 820 ohm	R1112	119-1011-15	1/10W 100 ohm	S1013	013-6201-53	SKPMAPE010
R1027	119-1211-15	1/10W 120 ohm	R1113	119-1031-15	1/10W 10k ohm	S1014	013-6201-53	SKPMAPE010
R1028	119-1211-15	1/10W 120 ohm	R1114	119-1011-15	1/10W 100 ohm	S1015	013-6201-53	SKPMAPE010
R1029	119-1211-15	1/10W 120 ohm	R1115	119-1031-15	1/10W 10k ohm	S1016	013-6201-53	SKPMAPE010
R1030	119-1211-15	1/10W 120 ohm	R1116	119-1011-15	1/10W 100 ohm	S1017	013-6201-53	SKPMAPE010
R1031	119-1211-15	1/10W 120 ohm	R1117	119-1031-15	1/10W 10k ohm	S1018	013-6201-53	SKPMAPE010
R1032	119-1211-15	1/10W 120 ohm	R1118	119-1011-15	1/10W 100 ohm	S1019	013-6201-53	SKPMAPE010
R1033	119-1211-15	1/10W 120 ohm	R1119	119-1031-15	1/10W 10k ohm	S1020	013-6201-53	SKPMAPE010
R1034	119-1211-15	1/10W 120 ohm	R1120	119-1011-15	1/10W 100 ohm	S1023	013-6201-53	SKPMAPE010
R1035	119-1211-15	1/10W 120 ohm	R1121	119-1011-15	1/10W 100 ohm	S1024	013-6201-53	SKPMAPE010
R1036	119-1211-15	1/10W 120 ohm	R1122	119-1011-15	1/10W 100 ohm	TH1001	002-0315-00	TN10-3U153JT
R1037	119-1211-15	1/10W 120 ohm	R1123	119-1011-15	1/10W 100 ohm	TH1002	002-0315-01	THERMISTOR
R1038	119-1211-15	1/10W 120 ohm	R1124	119-1011-15	1/10W 100 ohm	VR1001	016-0018-37	VR W/SHAFT
R1039	119-1211-15	1/10W 120 ohm	R1125	119-1011-15	1/10W 100 ohm	VR1002	016-0018-37	VR W/SHAFT
			R1126	119-1011-15	1/10W 100 ohm	VR1003	012-4997-57	22k ohm
			R1127	119-1011-15	1/10W 100 ohm	PWB	039-3753-01	PWB(WITHOUT COMPONENT)
			R1128	119-1011-15	1/10W 100 ohm			
			R1129	119-1011-15	1/10W 100 ohm			
			R1130	119-1011-15	1/10W 100 ohm			

Sub PWB(B3) section

REF No.	PART No.	DESCRIPTION
J1201	074-4049-50	SOCKET (4P)
J1202	074-2506-10	SOCKET (10P)
PWB	039-3674-01	PWB(WITHOUT COMPONENT)

EXPLODED VIEW/PARTS LIST

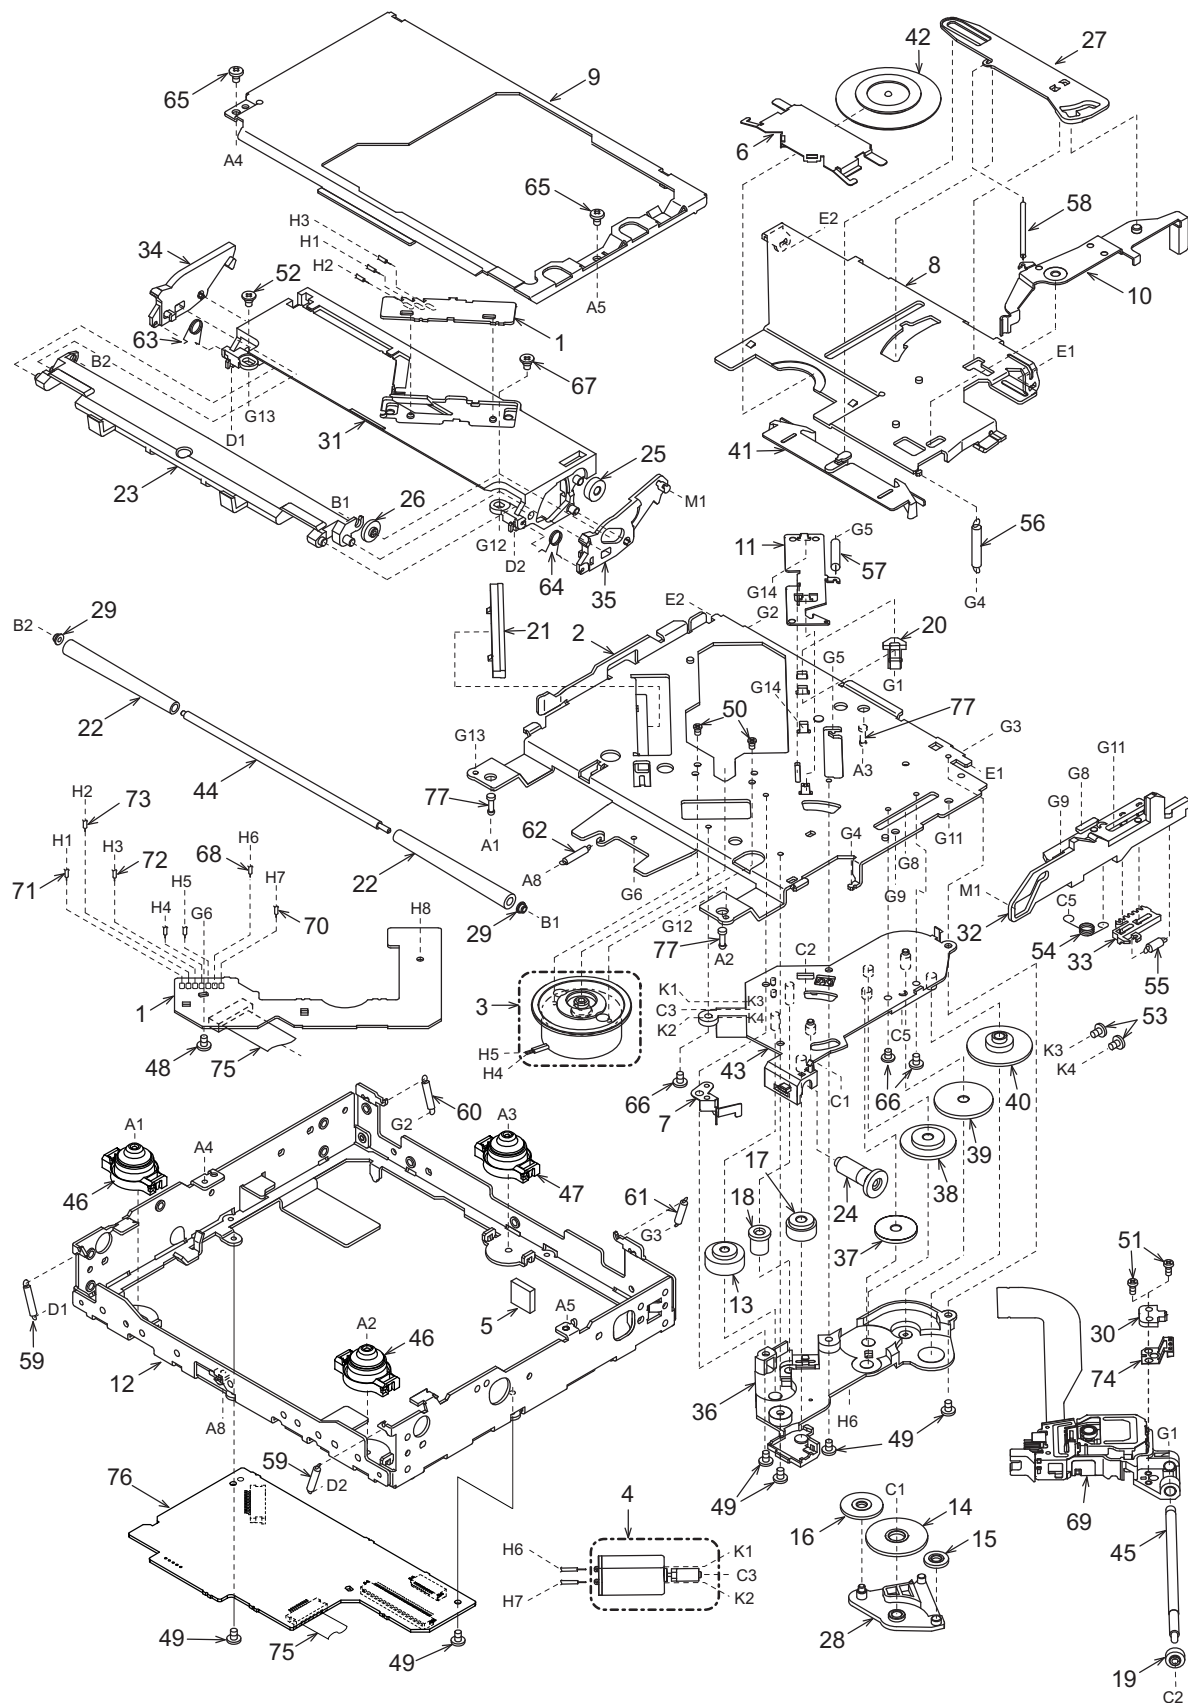

NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	SENSOR PWB	1
2	966-1866-20	DRIVE-PLATE	1
3	SMA-182-100	SPINDLE MOTOR-ASSY	1
4	SMA-183-100	SLED MOTOR-ASSY	1
5	345-5476-20	CUSHION RUBBER	1
6	620-1023-23	CLAMPER PLATE	1
7	620-1026-21	SPRING PLATE	1
8	620-1596-23	CLAMPER LINK	1
9	620-1862-20	UPPER CHASSIS	1
10	620-1752-20	SENSOR ARM	1
11	620-1753-20	ID-LOCK PLATE	1
12	620-1766-20	LOWER CHASSIS	1
13	621-0608-21	SECOND GEAR	1
14	621-0609-21	BASE GEAR	1
15	621-0610-21	IDLE GEAR A	1
16	621-0611-21	IDLE GEAR B	1
17	621-0612-22	ROLLER GEAR A	1
18	621-0620-20	THREAD GEAR A	1
19	621-0621-20	THREAD GEAR B	1
20	621-0623-23	LS-HOLDER	1
21	621-0624-22	GUIDE RAIL	1
22	621-0711-21	LOADING ROLLER	2
23	621-0718-21	ROLLER GUIDE	1
24	621-0719-21	ROLLER GEAR	1
25	621-0720-21	ROLLER GEAR C	1
26	621-0721-21	ROLLER GEAR D	1
27	621-0728-20	STOPPER LINK	1
28	621-1719-20	IDLE CASE	1
29	621-1726-20	ROLLER SLEEVE	2
30	621-1729-20	SH-BASE	1
31	621-1742-20	UPPER GUIDE	1
32	621-1743-20	SHIFT LEVER	1
33	621-1744-20	RACK	1
34	621-1745-20	LOCK ARM L	1
35	621-1746-20	LOCK ARM R	1
36	621-1747-20	GEAR COVER	1
37	621-1748-20	POWER GEAR A	1
38	621-1749-20	POWER GEAR B	1
39	621-1750-20	POWER GEAR C	1

NO.	PART NO.	DESCRIPTION	Q'TY
40	621-1751-20	POWER GEAR D	1
41	621-1752-20	DISC STOPPER	1
42	621-1753-20	CLAMPER RING	1
43	621-1754-20	GEAR BASE	1
44	622-1571-21	ROLLER SHAFT	1
45	624-3059-00	LEAD SCREW	1
46	629-0086-20	DAMPER F	2
47	629-0087-20	DAMPER R	1
48	716-1507-01	SCREW(M2x3)	1
49	716-1670-01	SCREW(M2x4)	6
50	716-1733-01	SCREW(M1.7x2.3)	2
51	716-3469-01	SCREW(1.7x4)	2
52	716-3473-01	SCREW(M2x3)	1
53	716-3551-00	SCREW(M1.4x2.5)	2
54	750-7865-20	SHIFT SPRING	1
55	750-7866-20	RACK SPRING	1
56	750-7867-20	CLAMPER SPRING	1
57	750-7868-20	ID-LOCK SPRING	1
58	750-7869-20	SENSOR SPRING	1
59	750-7870-20	DR-SPRING F	2
60	750-7871-20	DR-SPRING RA	1
61	750-7872-20	DR-SPRING RB	1
62	750-7873-20	DR-SPRING C	1
63	750-6797-20	ROLLER SPRING L	1
64	750-6798-20	ROLLER SPRING R	1
65	714-2003-8B	SCREW(M2x3)	2
66	780-2025-00	SCREW(M2x2.5)	3
67	781-1730-00	SCREW(M1.7x3)	1
68	803-4906-60	VINYL-COAT-WIRE(ORG)	1
69	969-0075-31	PICKUP-ASSY	1
70	816-2590-00	SPECIAL LEAD(GRN)	1
71	816-2591-00	SPECIAL LEAD(YEL)	1
72	816-2592-00	SPECIAL LEAD(BLUE)	1
73	816-2593-00	SPECIAL LEAD(PUR)	1
74	966-1722-21	SH-RACK-ASSY	1
75	816-4070-50	FLAT WIRE	1
76	-----	CD PWB	1
77	622-1570-21	DAMPER PIN	3

ELECTRICAL PARTS LIST

CD PWB(BM1) section

REF No.	PART No.	DESCRIPTION
C1201	168-1042-78	16V 0.1uF
C1202	166-1011-50	100pF CH
C1203	168-1042-78	16V 0.1uF
C1204	045-1007-50	10pF CH
C1205	045-1007-50	10pF CH
C1206	168-1042-78	16V 0.1uF
C1207	046-1032-78	0.01uF B
C1208	045-6097-50	6pF CH
C1209	045-6097-50	6pF CH
C1210	168-1042-78	16V 0.1uF
C1211	168-1042-78	16V 0.1uF
C1212	168-1042-78	16V 0.1uF
C1213	042-0595-62	16V 10uF
C1214	043-0552-90	6.3V 47uF M
C1215	043-0552-90	6.3V 47uF M
C1217	168-1042-78	16V 0.1uF
C1218	168-1042-78	16V 0.1uF

REF No.	PART No.	DESCRIPTION
C1219	168-1042-78	16V 0.1uF
C1220	168-1042-78	16V 0.1uF
C1222	045-2201-50	22pF CH
C1223	045-1801-50	18pF CH
C1224	168-1042-78	16V 0.1uF
C1225	168-1042-78	16V 0.1uF
C1226	043-0552-90	6.3V 47uF M
C1227	168-1042-78	16V 0.1uF
C1228	168-1042-78	16V 0.1uF
C1229	168-1042-78	16V 0.1uF
C1230	043-0552-90	6.3V 47uF M
C1231	168-1042-78	16V 0.1uF
C1232	042-0636-50	6.3V 100uF
C1233	042-0636-50	6.3V 100uF
C1234	043-0552-90	6.3V 47uF M
C1235	168-1052-78	16V 1uF K
C1236	168-1042-78	16V 0.1uF

REF No.	PART No.	DESCRIPTION
C1237	168-1052-78	16V 1uF K
C1303	168-1052-78	16V 1uF K
C1304	042-0560-85	6.3V 100uF
C1305	168-1052-78	16V 1uF K
C1309	168-1052-78	16V 1uF K
C1310	046-2222-58	2200pF B
C1311	046-1042-78	0.01uF B
C1312	168-1042-78	16V 0.1uF
C1313	046-4722-58	4700pF B
C1318	046-1042-78	0.1uF B
C1319	046-1532-78	0.015uF B
C1320	168-1042-78	16V 0.1uF
C1321	046-1522-58	1500pF B
C1322	046-1042-78	0.1uF B
C1323	046-1042-78	0.1uF B
C1324	046-1032-78	0.01uF B
C1325	168-1042-78	16V 0.1uF

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1326	046-3332-78	0.033uF B	R1213	033-1041-15	1/10W 100k ohm	R1287	033-2211-15	1/10W 220k ohm
C1327	168-1532-55	0.015uF K	R1214	033-1011-15	1/10W 100 ohm	R1288	033-2211-15	1/10W 220k ohm
C1328	042-0595-84	10V 100uF	R1215	033-1041-15	1/10W 100k ohm	R1289	033-0000-05	1/10W 0 ohm JW
C1329	046-6822-58	6800pF B	R1216	033-1011-15	1/10W 100 ohm	R1290	033-0000-05	1/10W 0 ohm JW
C1330	168-1042-78	16V 0.1uF	R1217	033-1011-15	1/10W 100 ohm	R1291	033-2211-15	1/10W 220k ohm
C1331	168-1042-78	16V 0.1uF	R1218	033-0000-05	1/10W 0 ohm JW	R1292	033-2211-15	1/10W 220k ohm
C1332	045-4701-50	47pF CH	R1219	033-0000-05	1/10W 0 ohm JW	R1293	033-2211-15	1/10W 220k ohm
C1333	046-4712-58	470pF B	R1220	033-0000-05	1/10W 0 ohm JW	R1301	117-6811-15	1/8W 680 ohm
C1334	046-1042-78	0.1uF B	R1221	033-1011-15	1/10W 100 ohm	R1302	117-1001-15	1/8W 10 ohm
C1335	046-4712-58	470pF B	R1222	033-1041-15	1/10W 100k ohm	R1303	033-2211-15	1/10W 220k ohm
C1337	046-4732-78	0.047uF B	R1223	033-1041-15	1/10W 100k ohm	R1304	033-1831-15	1/10W 18k ohm
C1338	168-1042-78	16V 0.1uF	R1224	033-4731-15	1/10W 47k ohm	R1305	033-1231-15	1/10W 12k ohm
C1339	046-5622-58	5600pF B	R1225	033-4721-15	1/10W 4.7k ohm	R1306	033-1541-15	1/10W 150k ohm
C1340	046-4732-78	0.047uF B	R1226	033-4731-15	1/10W 47k ohm	R1307	033-2211-15	1/10W 220k ohm
C1341	168-1042-78	16V 0.1uF	R1227	033-0000-05	1/10W 0 ohm JW	R1308	033-0000-05	1/10W 0 ohm JW
C1345	168-1042-78	16V 0.1uF	R1228	033-0000-05	1/10W 0 ohm JW	R1309	033-0000-05	1/10W 0 ohm JW
C1347	168-1042-78	16V 0.1uF	R1229	033-0000-05	1/10W 0 ohm JW	R1310	033-0000-05	1/10W 0 ohm JW
C1348	043-0570-90	16V 2.2uF K	R1230	033-4731-15	1/10W 47k ohm	R1311	033-0000-05	1/10W 0 ohm JW
C1349	045-1201-50	12pF CH	R1231	033-4731-15	1/10W 47k ohm	R1312	033-0000-05	1/10W 0 ohm JW
C1350	045-1201-50	12pF CH	R1232	033-4731-15	1/10W 47k ohm	R1313	033-1031-15	1/10W 10k ohm
C1353	045-6097-50	6pF CH	R1233	033-4731-15	1/10W 47k ohm	R1314	033-2231-15	1/10W 22k ohm
CCT1201	050-0140-63	1/32W 47k ohm x4J	R1234	033-4731-15	1/10W 47k ohm	R1315	033-4731-15	1/10W 47k ohm
CCT1202	050-0140-63	1/32W 47k ohm x4J	R1235	033-0000-05	1/10W 0 ohm JW	R1316	033-3341-15	1/10W 330k ohm
CCT1203	050-0140-63	1/32W 47k ohm x4J	R1237	033-6831-15	1/10W 68k ohm	R1318	033-0000-05	1/10W 0 ohm JW
CCT1204	050-0140-63	1/32W 47k ohm x4J	R1238	033-0000-05	1/10W 0 ohm JW	R1319	033-3331-15	1/10W 33k ohm
D1201	060-8107-50	SURG PRPTECTOR	R1240	033-6831-15	1/10W 68k ohm	R1320	033-4731-15	1/10W 47k ohm
D1202	060-8107-50	SURG PRPTECTOR	R1241	033-0000-05	1/10W 0 ohm JW	R1321	033-1011-15	1/10W 100 ohm
D1203	060-8107-50	SURG PRPTECTOR	R1242	033-1041-15	1/10W 100k ohm	R1324	033-1031-15	1/10W 10k ohm
D1304	001-9210-50	AVR-M1608C270M TAAD	R1243	033-0000-05	1/10W 0 ohm JW	R1325	033-1011-15	1/10W 100 ohm
IC1201	051-6934-90	MFI341S2313	R1244	033-4721-15	1/10W 4.7k ohm	R1327	033-1031-15	1/10W 10k ohm
IC1202	052-3228-01	TMP92FD28AFG	R1246	033-4721-15	1/10W 4.7k ohm	R1328	033-1011-15	1/10W 100 ohm
IC1203	051-5418-08	S-80827CNMC-B8M-T2	R1247	033-4731-15	1/10W 47k ohm	R1329	033-1031-15	1/10W 10k ohm
IC1204	051-3392-90	S-1323B15NB-N8A TFG	R1248	033-4731-15	1/10W 47k ohm	R1330	033-1011-15	1/10W 100 ohm
IC1205	051-6926-90	BD2051AFJ-TR	R1249	033-4731-15	1/10W 47k ohm	R1331	033-1031-15	1/10W 10k ohm
IC1206	051-3392-90	S-1323B15NB-N8A TFG	R1250	033-4731-15	1/10W 47k ohm	R1332	033-1011-15	1/10W 100 ohm
IC1301	051-6101-90	BD8226EFV-E2	R1251	033-4731-15	1/10W 47k ohm	R1334	033-2211-15	1/10W 220 ohm
IC1302	051-6751-00	TC94A93MFG-201	R1252	033-4731-15	1/10W 47k ohm	R1335	033-2211-15	1/10W 220 ohm
J1201	074-2506-30	SOCKET (30P)	R1254	033-4731-15	1/10W 47k ohm	R1336	033-2211-15	1/10W 220 ohm
J1202	074-2506-10	SOCKET (10P)	R1255	033-0000-05	1/10W 0 ohm JW	R1337	033-0000-05	1/10W 0 ohm JW
J1301	074-2215-65	SOCKET (15P)	R1256	033-1031-15	1/10W 10k ohm	R1338	033-2211-15	1/10W 220 ohm
J1302	074-2504-10	SOCKET (10P)	R1257	033-5621-15	1/10W 5.6k ohm	R1339	033-2211-15	1/10W 220 ohm
L1201	010-3608-90	DLW21SN900SQ2L	R1258	119-0000-05	1/10W 0 ohm JW	R1340	033-2211-15	1/10W 220 ohm
L1301	010-3105-69	mmZ160BD800CT	R1259	033-4731-15	1/10W 47k ohm	R1341	119-0000-05	1/10W 0 ohm JW
Q1201	125-0021-92	DTA124EUA	R1260	033-4731-15	1/10W 47k ohm	R1342	033-1051-15	1/10W 1M ohm
Q1202	125-2027-92	DTC124EUA	R1261	033-1041-15	1/10W 100k ohm	R1343	033-2221-15	1/10W 2.2k ohm
Q1205	191-1197-50	2SB1197	R1265	033-1031-15	1/10W 10k ohm	R1344	033-4731-15	1/10W 47K ohm
Q1206	125-2027-92	DTC124EUA	R1266	033-1041-15	1/10W 100k ohm	R1345	119-0000-05	1/10W 0 ohm JW
Q1301	190-2060-00	2SA2060	R1268	119-0000-05	1/10W 0 ohm JW	R1346	119-0000-05	1/10W 0 ohm JW
R1201	033-0000-05	1/10W 0 ohm JW	R1270	119-0000-05	1/10W 0 ohm JW	R1347	119-2201-15	1/10W 22 ohm
R1202	033-1041-15	1/10W 100k ohm	R1272	033-1031-15	1/10W 10k ohm	R1348	119-2201-15	1/10W 22 ohm
R1203	033-0000-05	1/10W 0 ohm JW	R1274	119-0000-05	1/10W 0 ohm JW	R1353	119-0000-05	1/10W 0 ohm JW
R1205	033-4731-15	1/10W 47k ohm	R1275	119-0000-05	1/10W 0 ohm JW	R1354	119-0000-05	1/10W 0 ohm JW
R1206	033-1041-15	1/10W 100k ohm	R1277	033-1021-15	1/10W 1k ohm	R1362	033-0000-05	1/10W 0 ohm JW
R1208	033-4731-15	1/10W 47k ohm	R1278	032-0163-96	1/2W 27 ohm J	R1363	033-0000-05	1/10W 0 ohm JW
R1209	033-4731-15	1/10W 47k ohm	R1279	032-0163-96	1/2W 27 ohm J	TM1201	073-0768-90	TERMINAL
R1211	033-4721-15	1/10W 4.7k ohm	R1280	033-1531-15	1/10W 15k ohm	TM1301	073-0768-90	TERMINAL
R1212	033-0000-05	1/10W 0 ohm JW	R1281	033-1221-15	1/10W 1.2k ohm	X1201	061-3559-90	9MHz
			R1282	033-1531-15	1/10W 15k ohm	X1202	061-3568-90	32.768kHz
			R1283	033-1031-15	1/10W 10k ohm	X1301	061-3572-90	16.92MHz
			R1285	033-2211-15	1/10W 220k ohm	PWB	039-3647-01	PWB(WITHOUT COMPONENT)
			R1286	033-2211-15	1/10W 220k ohm			

Sensor PWB(BM2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D1	001-7058-90	AN1105W-RR	Q1	060-4015-91	PS1192HB	S2	013-7413-50	SPVG12(LIMIT)
D2	001-7058-90	AN1105W-RR	Q2	060-4015-91	PS1192HB	PWB	039-2675-20	PWB(WITHOUT COMPONENT)
J1	074-2504-10	SOCKET (10P)	S1	013-7414-50	SPVG22(CHUCKING)			