
2. EXPLODED VIEWS AND PARTS LIST

NOTES:
- *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
- *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
- *Screws adjacent to ▼ mark on the product are used for disassembly.*

2.1 PACKING

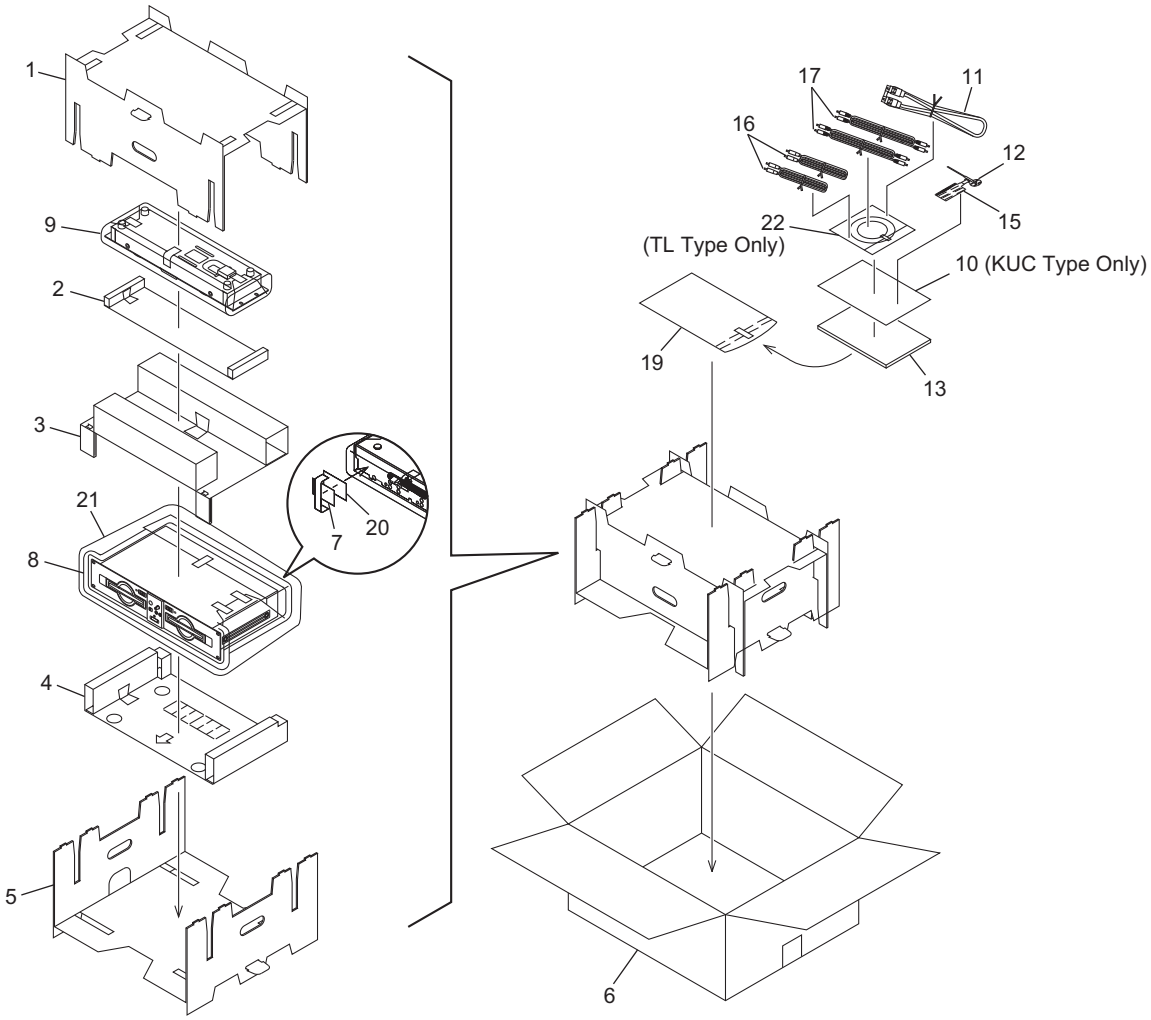

(1) PACKING PARTS LIST


Mark	No.	Description	Part No.
	1	Pad A	DHA1448
	2	Pad B	DHA1449
	3	Pad C	DHA1450
	4	Pad D	DHA1451
	5	Pad E	DHA1474
	6	Packing Case	See Contrast table (2)
NSP	7	Caution SG	DRM1199
	8	Sheet	RHX1006
	9	Mirror Mat Sheet ($550 \times 550 \times 0.5$)	Z23-026
NSP	10	Limited Warranty	See Contrast table (2)
	11	Specialized Connection Cable for The Remote Controller	DDE1115
	12	Forced Ejection Pin	DEX1013
	13	Operating Instructions	See Contrast table (2)
	14	• • • • •	
	15	Caution Tag AP	DRW1897
	16	Control Cord	PDE1247
	17	Audio Cable (L=1.5m)	VDE1033
	18	• • • • •	
	19	Polyethylene Bag ($0.03 \times 230 \times 340$)	Z21-038
NSP	20	Silica Gel	AEN7001
NSP	21	Polyethylene Bag	AHG7047
	22	Adaptor for 8cm discs	See Contrast table (2)

(2) CONTRAST TABLE

CMX-5000/KUC, TL and WY are constructed the same except for the following :

Mark	No.	Symbol and Description	Part No.			Remarks
			KUC Type	TL Type	WY Type	
	6	Packing Case	DHG1961	DHG1960	DHG1953	
NSP	10	Limited Warranty	ARY7043	Not used	Not used	
	13	Operating Instructions (English)	DRB1254	Not used	Not used	
	13	Operating Instructions (English/Spanish/Chinese)	Not used	DRB1256	Not used	
	13	Operating Instructions (English/French/German/Italian/Dutch/Spanish)	Not used	Not used	DRB1255	
	22	Adaptor for 8cm discs	Not used	DEX1012	Not used	

2.2 EXTERIOR

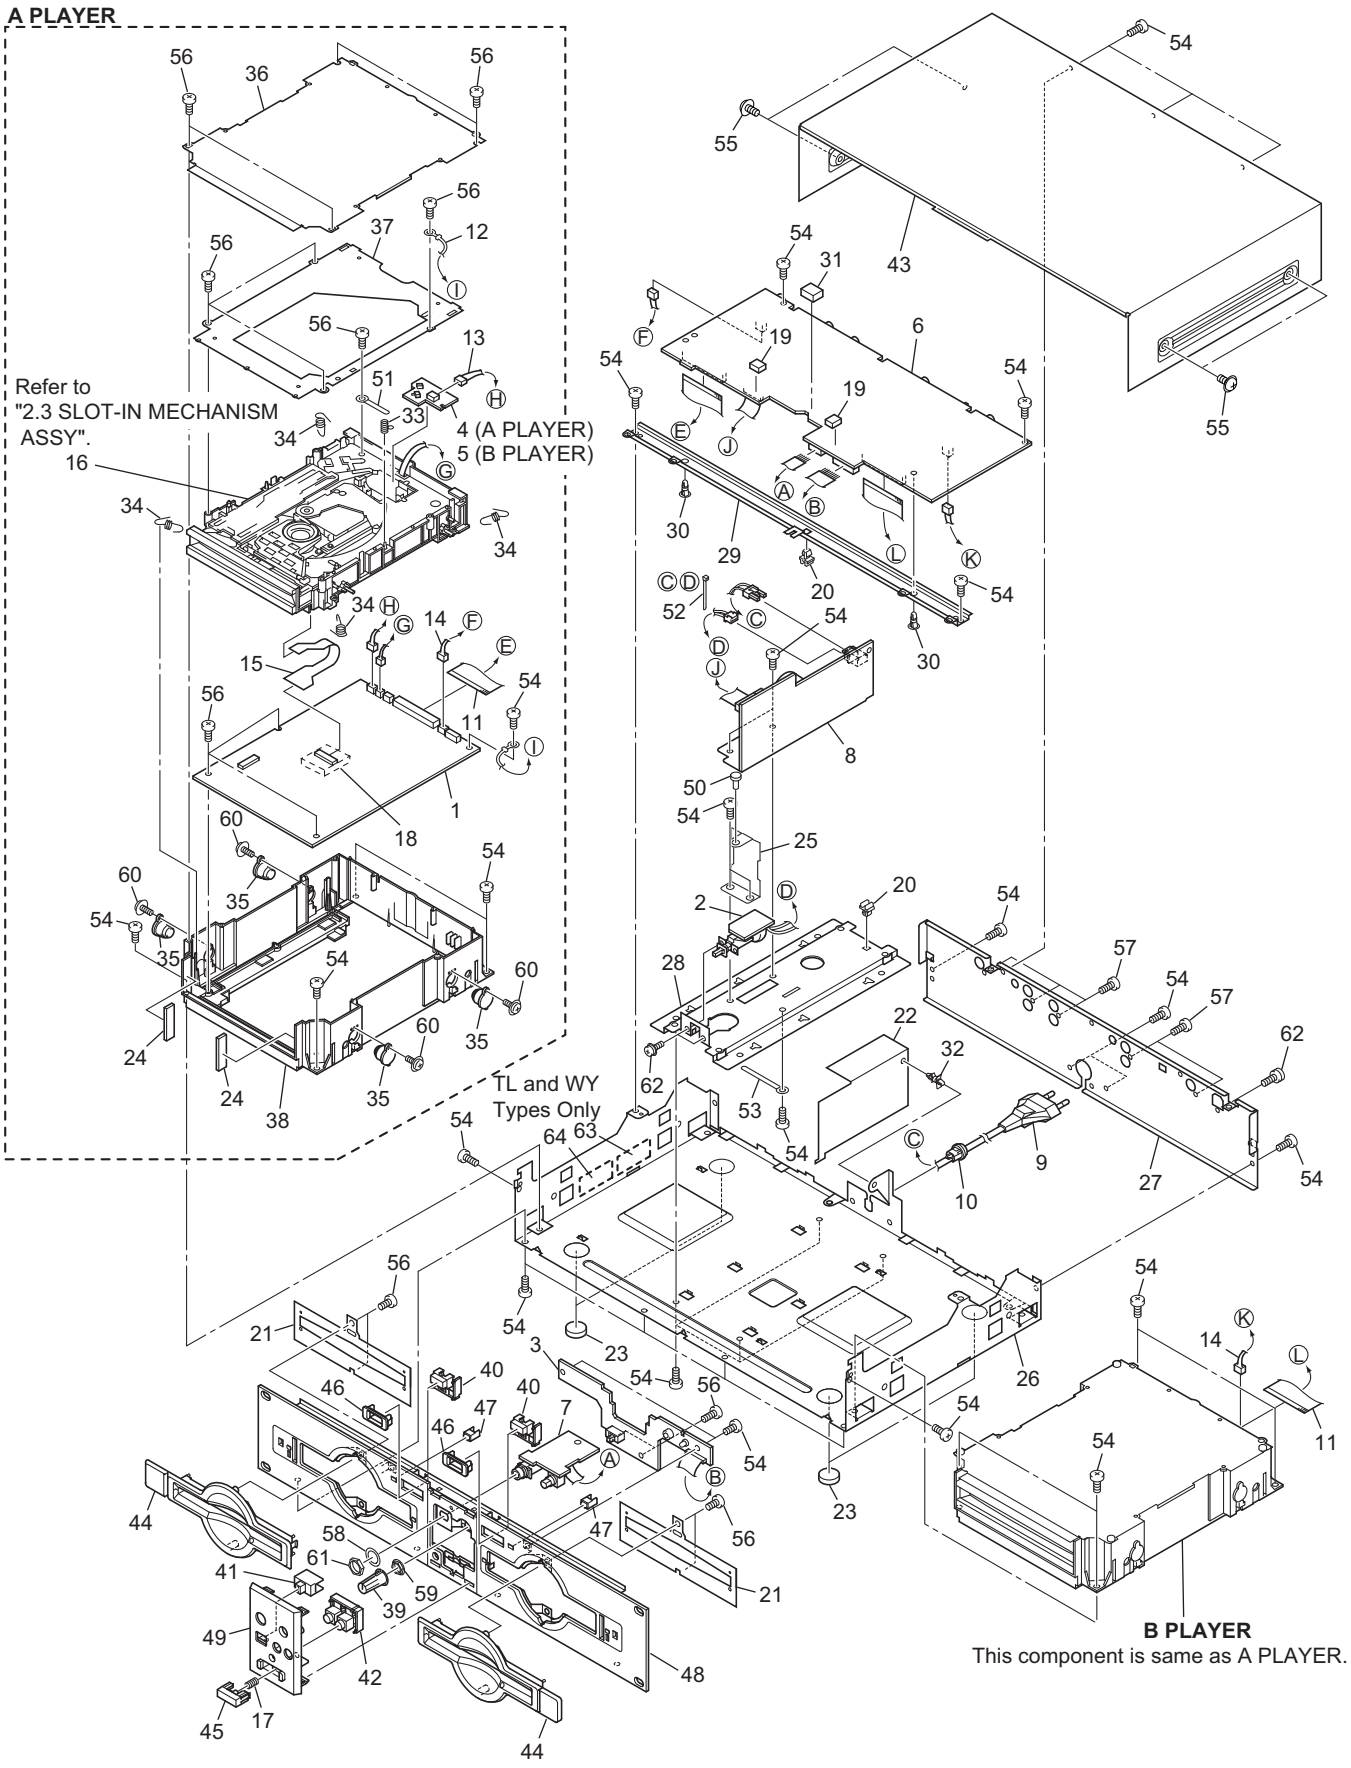
A PLAYER
Refer to "2.3 SLOT-IN MECHANISM ASSY".
4 (A PLAYER)
5 (B PLAYER)
TL and WY Types Only
B PLAYER
This component is same as A PLAYER.

(1) EXTERIOR PARTS LIST

Mark	No.	Description	Part No.
	1	CDPB ASSY	DWG1540
	2	PSWB ASSY	DWS1301
	3	SELB ASSY	DWS1302
	4	SLM1 ASSY	DWS1303
	5	SLM2 ASSY	DWS1304
	6	TRMB ASSY	DWX2066
	7	HPJB ASSY	DWX2067
⚠	8	SW POWER SUPPLY ASSY	DWR1330
⚠	9	AC Power Cord	See Contrast table (2)
	10	Strain Relief	See Contrast table (2)
	11	37P F•F•C/60V	DDD1159
	12	Earth Lead Unit	DDF1010
	13	SL Connecto Assy 3P	DKP3403
	14	Connector Assy 3P	DKP3514
	15	S Flexible Cable	DNP1748
NSP	16	Slot-in Mechanism Assy	DXA1845
	17	Power Knob Spring	DBH1469
	18	Silicon Seat	DEB1449
	19	Rubber Spacer	DEB1455
	20	PCB Holder	DEC1231
	21	Bezel Sheet	DEC2346
	22	Power Supply Cover	DEC2347
	23	Insulator	DEC2348
	24	Bezel Cushion C	DEC2350
	25	Power Supply Shield	DEC2391
NSP	26	Chassis	DNA1253
	27	Rear Panel	See Contrast table (2)
	28	Power Supply Plate	DNF1637
	29	PCB Frame	DNH2446
NSP	30	PCB Holder	PNW1861


Mark	No.	Description	Part No.
NSP	31	Spacer	VEC1585
	32	PCB Spacer	VEC2077
	33	Earth Spring	DBH1398
	34	Float Spring	DBH1428
	35	Damper	DEC2236
	36	Cover A	DNF1636
	37	Mecha Holder	DNH2339
	38	Damper Stay	DNK3751
	39	VR Knob	DAA1145
	40	Eject Knob	DAC1924
	41	Slide SW Knob	DAC1926
	42	Monitor Select Knob	DAC1939
	43	Bonnet	DNE1382
	44	Front Bezel	DNK3724
	45	Power Knob	DNK3725
	46	Eject Guide	DNK3727
	47	Disc Indicator	DNK3729
	48	Front Panel Assy	DXB1729
	49	Function Panel Assy	DXB1732
	50	Nylon Rivet (3 × 4.5)	RBM-003
	51	Cord Clamper	RNH-184
	52	Binder	ZCA-SKB90BK
NSP	53	Cord Stopper	ZCB-069Z
	54	Screw	BBZ30P060FZK
	55	Screw	BBZ40P060FZK
	56	Screw	BPZ30P080FMC
	57	Screw	BPZ30P080FZK
	58	Washer	DBE1010
	59	Flange Nut	DBN1004
	60	Screw	IPZ20P080FMC
	61	Nut	NKX2FUC
	62	Screw	PMH30P060FMC
	63	Caution Label	See Contrast table (2)
NSP	64	Caution Label HE	See Contrast table (2)

(2) CONTRAST TABLE

CMX-5000/KUC, TL and WY are constructed the same except for the following :

Mark	No.	Symbol and Description	Part No.			Remarks
			KUC Type	TL Type	WY Type	
⚠	9	AC Power Cord	ADG7024	VDG1061	VDG1061	
	10	Strain Relief	CM-22C	CM-22B	CM-22B	
	27	Rear Panel	DNC1520	DNC1519	DNC1516	
	63	Caution Label	Not used	VRW1094	VRW1094	
NSP	64	Caution Label HE	Not used	VRW1297	VRW1297	


2.3 SLOT-IN MECHANISM ASSY

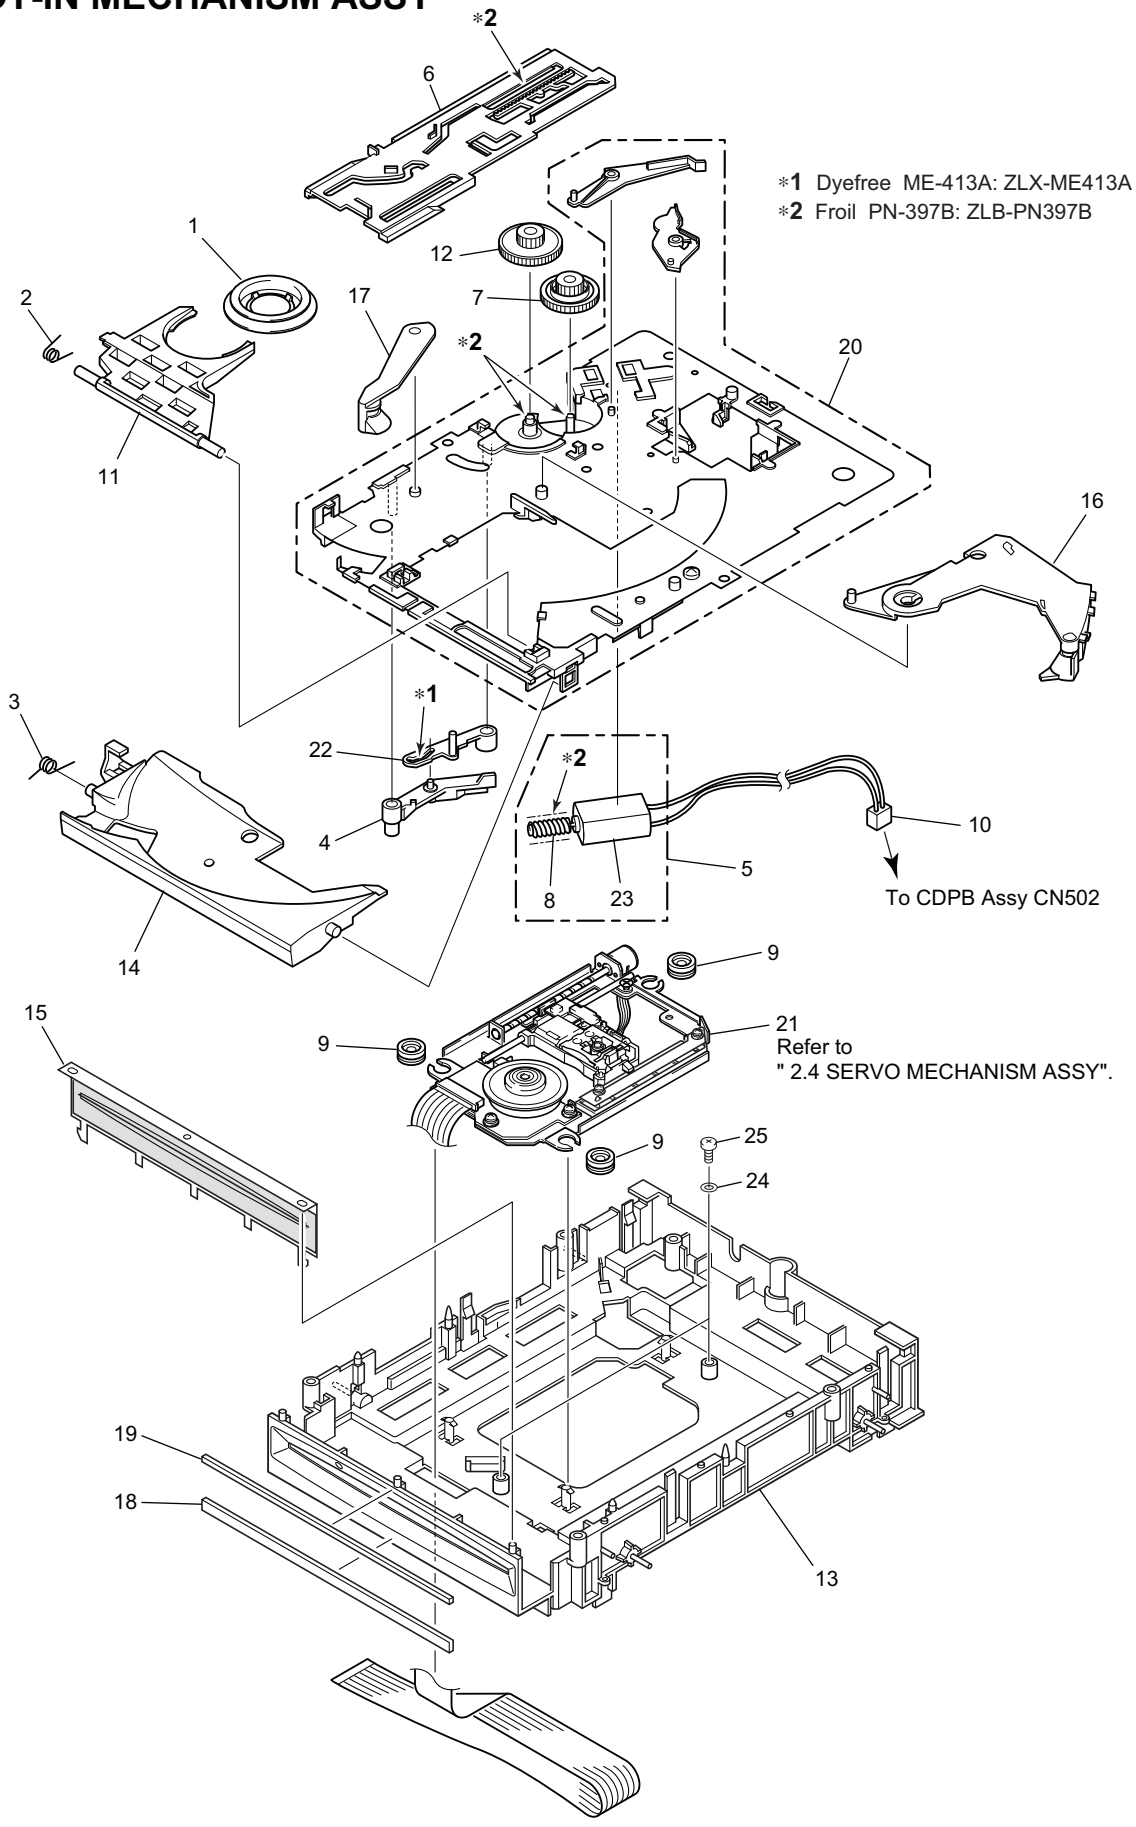

● SLOT-IN MECHANISM ASSY PARTS LIST

Mark	No.	Description	Part No.
	1	Clamper Assy	DXA1821
	2	Clamp Spring	DBH1374
	3	Guide Spring	DBH1375
	4	Lever B	DNK3558
	5	Loading Motor Assy-S	DEA1008
	6	Main Cam	DNK3407
	7	Loading Gear	DNK3409
NSP	8	Worm Gear	DNK3410
	9	Mount Bush	DEB1328
	10	Connector Assy	PF02PY-B27
	11	Clamp Arm	DNK3404
	12	Drive Gear	DNK3565
	13	Float Base Assy	DXB1683
	14	Disc Guide	DNK3478
	15	Front Sheet	DED1132
	16	Eject Lever	DNK3684
	17	Loading Lever	DNK3406
	18	Bezel Cushion A	DEC2257
	19	Bezel Cushion B	DEC2258
NSP	20	Loading Base	DNK3637
	21	Servo Mechanism Assy	DXB1684
	22	Lever A	DNK3564
NSP	23	Loading Motor	DXM1093
	24	PC Washer	DEC2332
	25	Screw	BPZ30P080FZK


2.4 SERVO MECHANISM ASSY

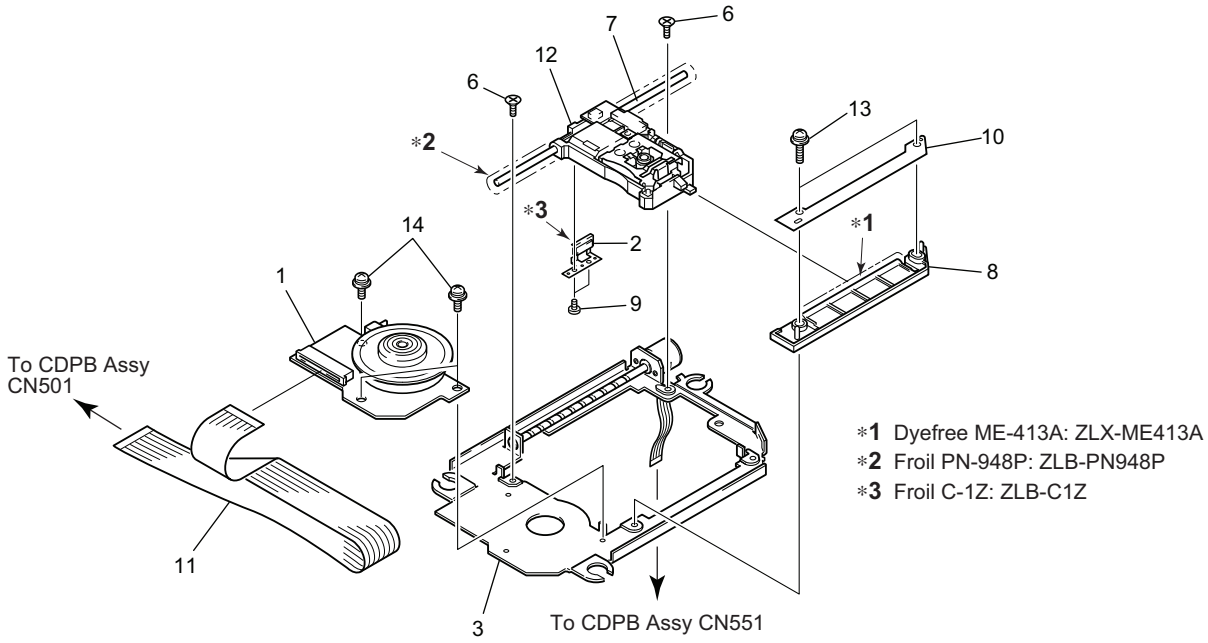

● SERVO MECHANISM ASSY PARTS LIST

Mark	No.	Description	Part No.
	1	Spindle Motor	DXM1122
	2	Screw Guide	DNK3238
	3	Pulse Motor Frame	DXM1125
	4	• • • • •	
	5	• • • • •	
	6	Screw	CMZ20P060FMC
	7	Guide Shaft	DLA1731
	8	Sub Guide Shaft	DNK3638
	9	Screw	ABA7022
	10	Stopper	DNH2355
	11	SPD Card	DDX1165
NSP	12	Pickup Assy	DWY1069
	13	Screw	PMA20P080FMC
	14	Screw	PMH20P040FMC

2.5 REMOTE CONTROLLER (CU-V160)

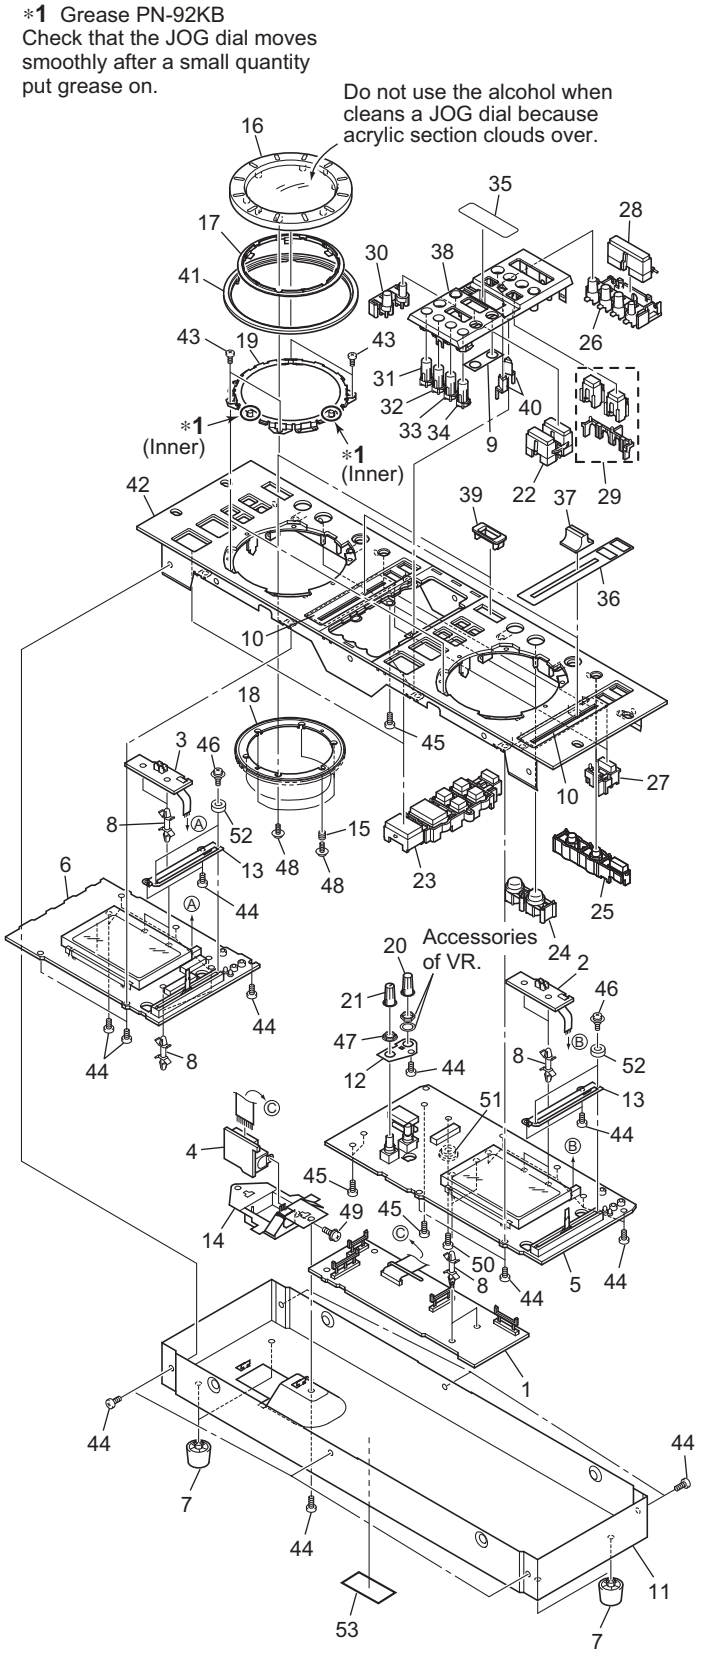

(1) REMOTE CONTROLLER (CU-V160) PARTS LIST

Mark	No.	Description	Part No.
	1	CNNB ASSY	DWG1534
	2	PHT1 ASSY	DWG1535
	3	PHT2 ASSY	DWG1536
	4	CTJB ASSY	DWG1537
	5	FLK1 ASSY	DWG1538
	6	FLK2 ASSY	DWG1539
	7	Foot Assy	AEC1531
	8	PCB Spacer (10)	DEC1388
	9	Rotary VR Packing	DED1151
	10	Slide VR Packing	DED1154
	11	Cover	DNE1383
	12	VR Stay	DNF1635
	13	VR Holder	DNF1638
	14	Terminal Holder	DNH2448
	15	Jog Spring	DBH1460
	16	Jog Dial	DNK3797
	17	J Ring A	DNK3723
	18	J Ring B	DNK3732
	19	Jog Stay Assy	DXB1727
	20	BPM Knob	DAA1144
	21	VR Knob	DAA1145
	22	BPM Knob	DAC1925
	23	Knob (PLAY)	DAC1927
	24	Knob (LOOP)	DAC1928
	25	Knob (TEMPO)	DAC1929
	26	Mode Select Knob	DAC1930
	27	MT Knob	DAC1931
	28	MIX Knob	DAC1932
	29	Player Select Knob	DAC1933
	30	Start Knob	DAC1934
	31	Knob A	DAC1935
	32	Knob B	DAC1936
	33	Knob C	DAC1937
	34	Knob D	DAC1938
	35	Display Plate	DAH1937
	36	Slide Sheet	DAH1938
	37	Slide Knob	DNK2936
	38	Function Panel (C)	DNK3726
	39	Eject Guide	DNK3727
	40	Lens	DNK3730
	41	Jog Guard	DNK3731
	42	Control Panel Assy	DXB1728
	43	Screw	BBZ26P060FMC
	44	Screw	BBZ30P060FZK
	45	Screw	BPZ30P080FMC
	46	Screw	PMB20P060FMC
	47	Flange Nut M9	DBN1004
	48	Screw	PBA1062
	49	Screw	PMH30P060FMC
	50	Screw	BPZ30P120FCU
	51	POM Bush	DEC2397
	52	Spacer	DLA1801
	53	Label	See Contrast table (2)

5. PCB PARTS LIST

NOTES: ●*Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
●*The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
●*When ordering resistors, first convert resistance values into code form as shown in the following examples.*
Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47k ohm (tolerance is shown by J=5%, and K=10%).
560 Ω → 56 × 10¹ → 561 ..... RD1/4PU 5 6 1 J
47k Ω → 47 × 10³ → 473 ..... RD1/4PU 4 7 3 J
0.5 Ω → R50 ..... RN2H R 5 0 K
1 Ω → 1R0 ..... RS1P 1 R 0 K
Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).
5.62k Ω → 562 × 10¹ → 5621 ..... RN1/4PC 5 6 2 1 F

Mark	No.	Description	Part No.

LIST OF ASSEMBLIES

		CDPB ASSY	DWG1540
		JACB ASSY	DWM2113
		├ SLM1 ASSY	DWS1303
		├ SLM2 ASSY	DWS1304
		├ TRMB ASSY	DWX2066
		├ HPJB ASSY	DWX2067
		├ SELB ASSY	DWS1302
		└ PSWB ASSY	DWS1301
⚠		SW POWER SUPPLY ASSY	DWR1330
NSP		REMOTE CONTROLLER	CU-V160
		└ DISP ASSY	DWM2114
		├ FLK1 ASSY	DWG1538
		├ PHT1 ASSY	DWG1535
		├ FLK2 ASSY	DWG1539
		├ PHT2 ASSY	DWG1536
		├ CNNB ASSY	DWG1534
		└ CTJB ASSY	DWG1537

A SLM1 ASSY

SWITCHES

	S801,S802		DSG1017

OTHERS

	CN801	KR CONNECTOR (3P)	S3B-PH-K

B SLM2 ASSY

SWITCHES

	S901,S902		DSG1017

OTHERS

	CN901	KR CONNECTOR (3P)	S3B-PH-K

C CDPB ASSY

SEMICONDUCTORS

IC501	AN8483NSB
IC201	AN8847SB
IC801,IC823	BA10393F
IC401	BA7042
IC203,IC702,IC706	BU4053BCF
IC902	GLT44016-40J4
IC551	LB1836M
IC751	M51953BFP
IC111	M5237ML
IC451	M56783AFP
IC901	MN19413A-PP
IC231	MN662754CEA
IC302	MSM51V17805D-60TS-K
IC502,IC822	NJM2904M
IC821	NJM4580ED
IC406	NJM78L05UA
IC701	PD3426A9
IC351	PE8001A
IC402	PE9009A
IC503	TC4W53F
IC303	TC74HCT7007AF
IC304	TC7S04F
IC453	TC7S32F
IC232	TC7SET08F
IC233,IC305,IC403,IC405,IC903	TC7SU04F
IC703	TC7W32F
IC802	TC7W53FU
IC407	TC7WT241FU
IC352	TC7WU04F
IC301	XCB56364
Q203,Q498,Q821,Q823,Q827	2SA1037K
Q111,Q201	2SB1132
Q204,Q824,Q826	2SC2412K
Q205	2SC3837K
Q825	2SD2114K
Q301,Q822	DTA124EK
Q499	DTC115EK
Q551,Q701	DTC124EK
D351,D450,D451,D821-D828	1SS355

Mark	No.	Description	Part No.
COILS			
	L111,L201,L351-L353,L402		DTL1024
	L551		DTL1024
	L231		LCTA100J2520
	L101		OTL1009
⚠	L202,L401,L403		PTL1014
	L301,L302		PTL1014
	L411,L701,L702,L901		PTL1014
	L903,L904		PTL1014
CAPACITORS			
	C258,C824,C826,C821,C822		CCSQCH101J50
	C264,C265		CCSQCH120J50
	C455,C457		CCSQCH121J50
	C273		CCSQCH180J50
	C206		CCSQCH181J50
	C801,C803,C805,C808-C810		CCSQCH221J50
	C812,C815,C843		CCSQCH221J50
	C210		CCSQCH331J50
	C212		CCSQCH470J50
	C275		CCSQCH5R0C50
	C207		CCSQCH680J50
	C304,C306,C308,C310,C312		CCSRCH101J50
	C314,C316,C318,C320,C322		CCSRCH101J50
	C324,C326,C328,C330,C332		CCSRCH101J50
	C334,C336,C338		CCSRCH101J50
	C430		CCSRCH330J50
	C274		CCSRCH560J50
	C105,C115		CEAL101M6R3
	C202,C219		CEAL470M6R3
	C101,C901		CEAT101M10
	C104		CEJA101M16
	C401,C551		CEJA101M6R3
	C408		CEJA1R0M50
	C411		CEJA220M10
	C353,C356,C358		CEJA221M6R3
	C507		CEJA330M10
	C300,C340,C351,C364,C417		CEJA470M6R3
	C905		CEJA470M6R3
	C223		CEV100M16
	C218		CEV470M6R3
	C113,C234,C247,C253,C257		CKSQYB102K50
	C363		CKSQYB102K50
	C102,C103,C107,C114,C201		CKSQYB103K50
	C211,C217,C220,C224,C229		CKSQYB103K50
	C235,C240,C266,C268,C269		CKSQYB103K50
	C341,C344,C350,C352		CKSQYB103K50
	C354,C355,C357,C359,C360		CKSQYB103K50
	C362,C402-C405,C450		CKSQYB103K50
	C466,C467,C501-C503,C508		CKSQYB103K50
	C552,C701-C706,C710,C711		CKSQYB103K50
	C715,C752,C753,C802,C804		CKSQYB103K50
	C806,C807,C811,C813,C814		CKSQYB103K50
	C816,C833-C835,C844,C902		CKSQYB103K50
	C904,C906,C908-C913		CKSQYB103K50
	C921,C922,C924,C925		CKSQYB103K50
	C112,C203,C204,C221,C222		CKSQYB104K25
	C225,C230,C245,C248-C251		CKSQYB104K25
	C256,C260-C263,C365		CKSQYB104K25
	C406,C407,C409,C410,C413		CKSQYB104K25
	C419,C751,C828,C829,C839		CKSQYB104K25
	C851,C916,C919		CKSQYB104K25
	C214,C215,C254,C271		CKSQYB105K10
	C903		CKSQYB105K10
	C823,C825		CKSQYB122K50
	C505,C837		CKSQYB152K50
	C216,C453		CKSQYB182K50
	C459		CKSQYB222K50
	C236,C237,C246,C252,C461		CKSQYB223K50
	C463		CKSQYB223K50
	C231		CKSQYB224K16
	C208		CKSQYB272K50
	C205		CKSQYB273K50
	C838		CKSQYB332K50
	C456,C458		CKSQYB333K50
	C239,C462,C504		CKSQYB393K50
	C831		CKSQYB472K50
	C255,C259,C452		CKSQYB474K16
	C827,C832		CKSQYB474K16
	C347		CKSRYB102K50
	C302,C305,C307,C309,C311		CKSRYB103K50
	C313,C315,C317,C319,C321		CKSRYB103K50
	C323,C325,C327,C329,C331		CKSRYB103K50
	C333,C335,C337,C339,C345		CKSRYB103K50
	C348,C712		CKSRYB103K50
	C232,C233,C238,C244,C836		CKSRYB104K16
	C841		CKSRYB104K16
	C278		CKSRYB152K50
	C213		CKSRYB273K16
	C301,C840		CKSRYB562K50
	C842		CSZSR100M16
	VC401 (40pF)		VCM1010
RESISTORS			
	R903,R904		RA4C101J
	R910,R911		RA4C473J
	R464,R465,R467,R468,R851		RS1/10S1002F
	R848		RS1/10S3902F
	R112		RS1/10S4301F
	R214		RS1/10S51R0F
	R463,R466		RS1/10S6202F
	R111		RS1/10S6801F
	R215		RS1/10S9100F
	R315		RS1/16S101J
	R861		RS1/16S102J
	R239		RS1/16S103J
	R218,R219		RS1/16S152J
	R862,R863		RS1/16S473J
	Other Resistors		RS1/10S□□□J
OTHERS			
	CN501	CONNECTOR (15P)	52207-1590
	CN201	CONNECTOR (17P)	52207-1790
	CN502	KR CONNECTOR (2P)	B2B-PH-K-S
	CN701	KR CONNECTOR (3P)	B3B-PH-K
	CN706	KR CONNECTOR (3P)	B3B-PH-K-Y
	CN704	KR CONNECTOR (6P)	B6B-PH-K-S
		PC BOARD CDPB	DNP1934
	X701	CHIP CERAMIC RESONATOR (20MHz)	DSS1110
	CN702	FFC CONNECTOR (37P)	HLEM37R-1
	X231	CRYSTAL RESONATOR (33.8MHz)	RSS1055
	CN551	4P FFC CONNECTOR	VKN1235
	KN101	EARTH METAL FITTING	VNF1084

Mark	No.	Description	Part No.

D TRMB ASSY

SEMICONDUCTORS

Mark	No.	Description	Part No.
⚠	IC1017 (0.5A)		AEK7005
	IC1005		BU4053BCF
⚠	IC1011,IC1013,IC1018 (0.6A)		ICP-N15
⚠	IC1010 (0.8A)		ICP-N20
⚠	IC1012,IC1014 (1A)		ICP-N25
	IC1001		IR3M03A
	IC1101,IC1201,IC1301,IC1302,IC1401		NJM4558MD
⚠	IC1015,IC1016		NJM78L05A
	IC1002,IC1006		TC74AC04F
	IC1004		TC74HC241AF
	IC1501,IC1801		TC74HCU04AF
	IC1003,IC1007		TC9162AF
	Q1101,Q1102,Q1201,Q1202		2SD2114K
	Q1301,Q1302,Q1401,Q1402		2SD2114K
	Q1103,Q1104,Q1203,Q1204		2SD2144S
	Q1303,Q1304		2SD2144S
	Q1002-Q1005,Q1105,Q1205,Q1305		DTA124EK
	Q1407,Q1408		DTA124EK
	Q1009,Q1010,Q1106,Q1206,Q1306		DTC124EK
	Q1307		DTC124EK
	D1105,D1205,D1305		1SR154-400
	D1003,D1006,D1101-D1103		1SS355
	D1201-D1203,D1301-D1304		1SS355
	D1001		EC10QS04
	D1061,D1062		MTZJ5.1C
	D1002,D1004,D1005,D1007		UDZS10B

COILS

Mark	No.	Description	Part No.
	L1001 (470µH)		DTL1083
	L1405,L1406		LFA101J
	L1002-L1004		LFA470J
	L1501,L1801		PTL1003
	L1502,L1802		PTL1014
⚠	L1021,L1022		PTL1017
⚠	L1005-L1010		VTH1020

SWITCH

Mark	No.	Description	Part No.
	S1001		DSH1025

CAPACITORS

Mark	No.	Description	Part No.
	C1046,C1047,C1049,C1301,C1302		CCSQCH101J50
	C1325,C1326,C1401,C1402		CCSQCH101J50
	C1012		CCSQCH201J50
	C1303,C1304		CEANP101M6R3
	C1027-C1030,C1103,C1104		CEANP220M16
	C1203,C1204,C1327,C1328		CEANP220M16
	C1403,C1404		CEANP220M16
	C1062		CEAT100M50
	C1006		CEAT101M10
	C1001		CEAT101M16
	C1501,C1801		CEAT101M6R3
	C1003		CEAT331M16
	C1503,C1803		CEAT470M10
	C1061		CEAT470M50
	C1007,C1051,C1052,C1417,C1418		CEAT471M10
	C1031,C1032		CEAT471M16
	C1036		CEAT471M6R3
	C1507,C1809		CGCYX104M25
	C1048		CKSQYB102K50
	C1041,C1043,C1508,C1808		CKSQYB103K50
	C1008,C1009,C1011,C1013		CKSQYB104K25
	C1016-C1026,C1034,C1038-C1040		CKSQYB104K25
	C1042,C1044,C1107,C1108		CKSQYB104K25
	C1207,C1208,C1307,C1308		CKSQYB104K25
	C1329,C1330,C1405,C1406,C1502		CKSQYB104K25
	C1504,C1606,C1802,C1804,C1806		CKSQYB104K25
	C1101,C1102,C1105,C1106		CQMA152J50
	C1201,C1202,C1205,C1206		CQMA152J50
	C1305,C1306		CQMA152J50

RESISTORS

Mark	No.	Description	Part No.
	R1061,R1327,R1328,R1405,R1406		RD1/4VM103J
	R1325,R1326		RD1/4VM203J
	R1105,R1106,R1205,R1206		RD1/4VM223J
	R1305,R1306		RN1/10SE2202D
	R1023,R1025		RD1/4VM271J
	R1103,R1104,R1111-R1114		RD1/4VM471J
	R1203,R1204,R1211-R1214		RD1/4VM471J
	R1411,R1412		RD1/4VM471J
	R1311-R1314		RN1/10SE4700D
	R1329-R1332		RN1/10SE5100D
	R1303,R1304		RD1/4VM752J
	R1006		RS1/10S2002F
	R1005		RS1/10S3601F
	Other Resistors		RS1/10S□□□J

OTHERS

Mark	No.	Description	Part No.
		CABLE HOLDER (8P)	51052-0800
	CN1011	6P JUMPER CONNECTOR	52151-0610
	CN1009	MINI JACK	AKN1028
	CN1007	10P MINI DIN SOCKET	AKP7031
	CN1005,CN1006		B3B-PH-K-Y
		KR CONNECTOR (3P)	
	JA1010	MINI JACK	DKN1146
	J1010	JUMPER WIRE	DXUY0830E
	CN1001,CN1002		HLEM37S-1
		FFC CONNECTOR 37P	
	JA1004,JA1008	1P JACK	PKB1028
	JA1001-JA1003	2P PIN JACK	PKB1032
	JA1005,JA1006	JACK (REMOTE)	RKN1004

E HPJB ASSY

SEMICONDUCTORS

Mark	No.	Description	Part No.
	IC1402		NJM4556AD
	Q1405,Q1406,Q1409,Q1410		2SC3326
	D1405		1SR154-400

COILS

Mark	No.	Description	Part No.
⚠	L1401-L1403		LCTA1R0J3225

CAPACITORS

Mark	No.	Description	Part No.
	C1413,C1414		CCSQCH820J50
	C1415,C1416		CEANP221M16
	C1409-C1411		CKSQYB103K50
	C1407,C1408		CKSQYB104K25

RESISTORS

Mark	No.	Description	Part No.
	VR1401 (10kΩ-B)		DCS1058
	Other Resistors		RS1/10S□□□J

Mark	No.	Description	Part No.
OTHERS			
		6P CABLE HOLDER	51048-0600
	J1101	JUMPER WIRE	D20PYY0620E
	JA1101	HEADPHONE JACK	RKN1002

F SELB ASSY

SEMICONDUCTORS

	D1903,D1904	EMAY3864X-HM
	D1701,D1901	SLP3118C51H
	D1902	SLP9118C51H

SWITCHES

	S1701,S1902-S1904	ASG7013
	S1901	DSH1049

CAPACITOR

	C1901	CKSQYB104K25

RESISTORS

	All Resistors	RS1/10S□□□J

OTHERS

		11P CABLE HOLDER	51048-1100
	J1901	JUMPER WIRE 11P	D20PYY1120E

G SW POWER SUPPLY ASSY

There is no service parts.

H PSWB ASSY

SWITCH

⚠	S1		PSA-009

CAPACITOR

⚠	C1		ACG7033

OTHERS

⚠	J1		DKP3516

I FLK1 ASSY

SEMICONDUCTORS

	IC2002	LB1740
	IC2001	PE5127A
	IC2003	S-806D
	Q2003,Q2009-Q2011,Q2017-Q2021	2SC2412K
	Q2001,Q2002,Q2012-Q2014	DTA124EK
	Q2004-Q2008,Q2015,Q2016	DTC124EK
	D2001-D2017,D2049-D2051,D2057	1SS355
	D2021-D2023,D2025-D2034	EMAY3864X-HM
	D2036-D2042,D2047,D2048	EMAY3864X-HM
	D2052-D2056	EMAY3864X-HM
	D2301	LB-303VK222
	D2043,D2044	MAY5364X
	D2045,D2046	SLP3118C51H
	D2018,D2019	SLP9118C51H

Mark	No.	Description	Part No.
SWITCHES			
	S2004-S2029		ASG7013
	S2002,S2003		DSG1063
	S2001		DSX1056
CAPACITORS			
	C2001,C2011		CEAL470M6R3
	C2004,C2005,C2010,C2012,C2013		CKSQYB103K50
	C2015		CKSQYB103K50
	C2002,C2009		CKSQYB104K25
RESISTORS			
	VR2002 (10kΩ-B)		DCS1059
	VR2001 (50kΩ-B)		DCV1011
	Other Resistors		RS1/10S□□□J
OTHERS			
	X2001	CERAMIC RESONATOR (4.19MHz)	VSS1014
	CN2004	4P JUMPER CONNECTOR	52147-0410
	V2001	FL INDICATOR TUBE	DEL1033
		IC SOCKET 6P	DKN1203
	CN2001,CN2002	B TO B CONNECTOR	TKC-A10X-B1

J PHT1 ASSY

SEMICONDUCTORS

	D2401,D2402	GP1S94

CAPACITOR

	C2401	CKSQYB103K50

RESISTORS

	All Resistors	RS1/10S□□□J

OTHERS

	J2401	JUMPER WIRE 4P	D20PWY0405E

K FLK2 ASSY

SEMICONDUCTORS

	IC2101	PE5127A
	Q2125-Q2129	2SC2412K
	Q2113-Q2116,Q2124	DTA124EK
	Q2112,Q2117-Q2123	DTC124EK
	D2108-D2117	1SS355
	D2137-D2142	EMAY3864X-HM
	D2143,D2144	MAY5364X
	D2145,D2146	SLP3118C51H

SWITCHES

	S2104-S2114	ASG7013
	S2102,S2103	DSG1063

CAPACITORS

	C2101	CEAL101M6R3
	C2111	CEAL220M6R3
	C2110,C2115	CKSQYB103K50
	C2102	CKSQYB104K25

Mark	No.	Description	Part No.
RESISTORS			
	VR2101 (50kΩ-B)		DCV1011
	Other Resistors		RS1/10S□□□J
OTHERS			
	X2101	CERAMIC RESONATOR (4.19MHz)	VSS1014
	CN2103	4P JUMPER CONNECTOR	52147-0410
	V2101	FL INDICATOR TUBE	DEL1033
	CN2101	B TO B CONNECTOR	TKC-A08X-B1
	CN2102	B TO B CONNECTOR	TKC-A12X-B1

L PHT2 ASSY

SEMICONDUCTORS

	D2501,D2502	GP1S94

CAPACITOR

	C2501	CKSQYB103K50

RESISTORS

	All Resistors	RS1/10S□□□J

OTHERS

	J2501	JUMPER WIRE 4P	D20PWY0405E

M CNNB ASSY

SEMICONDUCTORS

⚠	IC2203		BA05T
	IC2202		TC74AC04F
	IC2201		TC74HC241AF

CAPACITORS

	C2208,C2209,C2221	CCSQCH101J50
	C2204	CEJA101M10
	C2202	CEJA101M6R3
	C2201,C2203,C2210	CKSQYB104K25

RESISTORS

	All Resistors	RS1/10S□□□J

OTHERS

		10P CABLE HOLDER	51048-1000
	J2201	JUMPER WIRE 10P	D20PDY1025E
	CN2204	CONNECTOR PLUG	TKC-A08P-B1
	CN2202,CN2203	CONNECTOR PLUG	TKC-A10P-B1
	CN2205	B TO B CONNECTOR	TKC-A12P-B1
		PCB BINDER	VEF1040

N CTJB ASSY

CAPACITOR

	C2601	CKSQYB104K25

OTHERS

	CN2602	10P MINI DIN SOCKET	AKP7031