



EXPLODED VIEW • PARTS LIST:

DCP Section

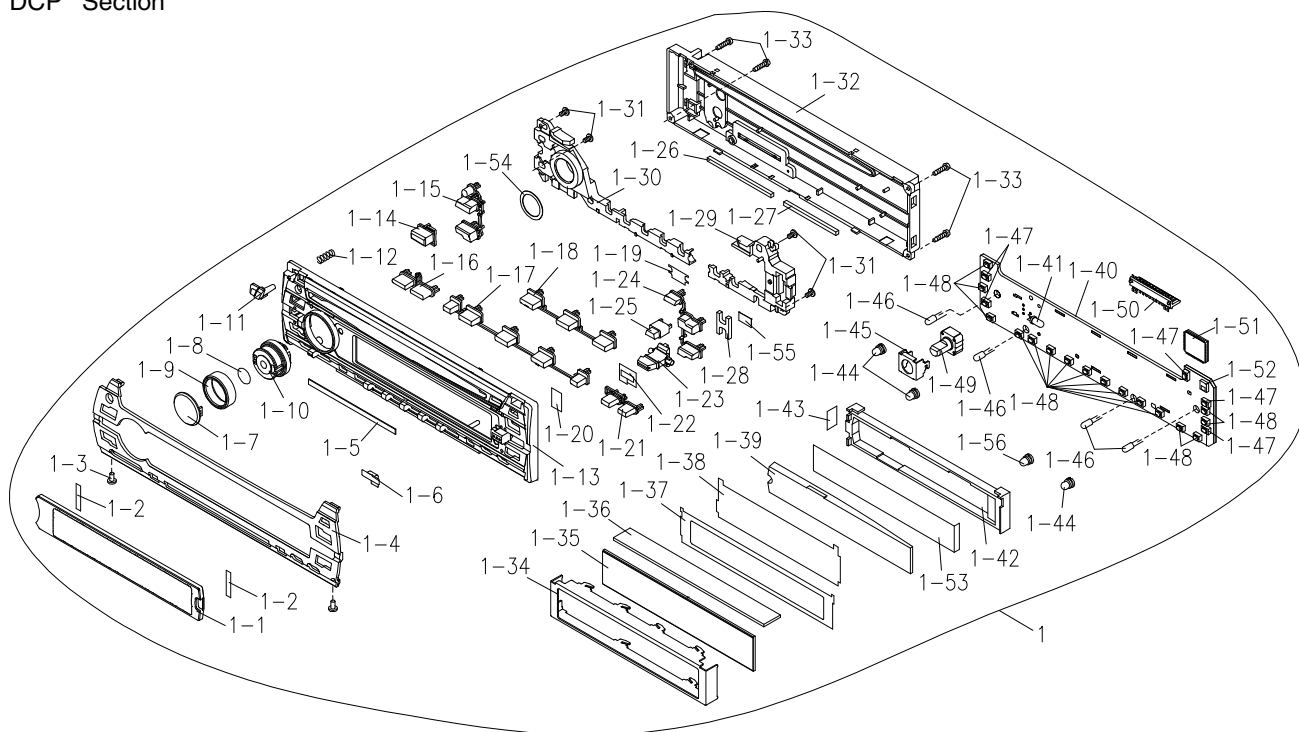

NO.	PARTS NO.	DESCRIPTION	QTY	NO.	PARTS NO.	DESCRIPTION	QTY
1	DCP-424-600	DCP ASSY	1	1-29	335-6895-01	ILLUMI PLATE	1
1-1	373-1000-00	DIAL-CVR	1	1-30	335-6896-00	ILLUMI PLATE	1
1-2	347-6813-00	DOUBLE FACE	2	1-31	716-1764-00	PAD SCREW(ø1.7x5)	4
1-3	778-6019-01	SCREW(ø1.7x6)	2	1-32	335-6897-01	REAR-CVR	1
1-4	371-5735-00	FACE PANEL	1	1-33	716-0872-11	SCREW(ø1.7x8)	4
1-5	347-6990-00	DOUBLE FACE	1	1-34	331-3559-00	LCD-CVR	1
1-6	347-6995-00	SURGE FILM	1	1-35	379-1259-51	INDICATOR	1
1-7	380-5553-00	KNOB	1	1-36	345-5311-00	FILM	1
1-8	347-6988-00	DOUBLE FACE	1	1-37	347-6997-00	BLACK FILM	1
1-9	345-5228-00	RUBBER RING	1	1-38	347-6998-00	LCD FILM	1
1-10	380-5551-00	KNOB	1	1-39	335-6882-00	ILLUMI PLATE	1
1-11	382-6788-00	BUTTON	1	1-40	039-2288-00	SWITCH PWB (WITHOUT COMPONENT)	1
1-12	750-6743-00	SPRING	1	1-41	001-7046-00	DIODE	1
1-13	370-6028-00	ESCUTCHEON	1	1-42	335-6881-00	LCD HOLDER	1
1-14	382-6608-00	BUTTON	1	1-43	347-6698-00	SHADE	1
1-15	382-6606-00	BUTTON	1	1-44	345-7148-20	LAMP CAP	3
1-16	382-6609-00	BUTTON	1	1-45	331-3337-00	VR HOLDER	1
1-17	382-6610-01	BUTTON	1	1-46	017-0444-00	PILOT LAMP (14V 50mA)	4
1-18	382-6611-00	BUTTON	1	1-47	013-6507-50	ILLUMI SWITCH	5
1-19	347-6994-00	SHADE FILM	1	1-48	013-6312-50	SWITCH	16
1-20	347-6993-00	SHADE FILM	1	1-49	016-9900-84	VR W/SHAFT	1
1-21	382-6612-00	BUTTON	1	1-50	076-0615-00	PLUG	1
1-22	347-7022-00	REFLECT FILM	1	1-51	051-6063-00	IC	1
1-23	382-6614-00	BUTTON	1	1-52	060-4017-90	IR-RECEIVER	1
1-24	382-6607-00	BUTTON	1	1-53	347-6991-00	REFLECTPR	1
1-25	335-6898-00	IR-FILTER	1	1-54	347-7676-00	FILM	1
1-26	347-6996-00	CUSHION	1	1-55	347-7666-00	SHADE	1
1-27	347-6989-00	CUSHION	1	1-56	345-3814-87	LAMP CAP	1
1-28	347-6992-00	CUSHION	1				

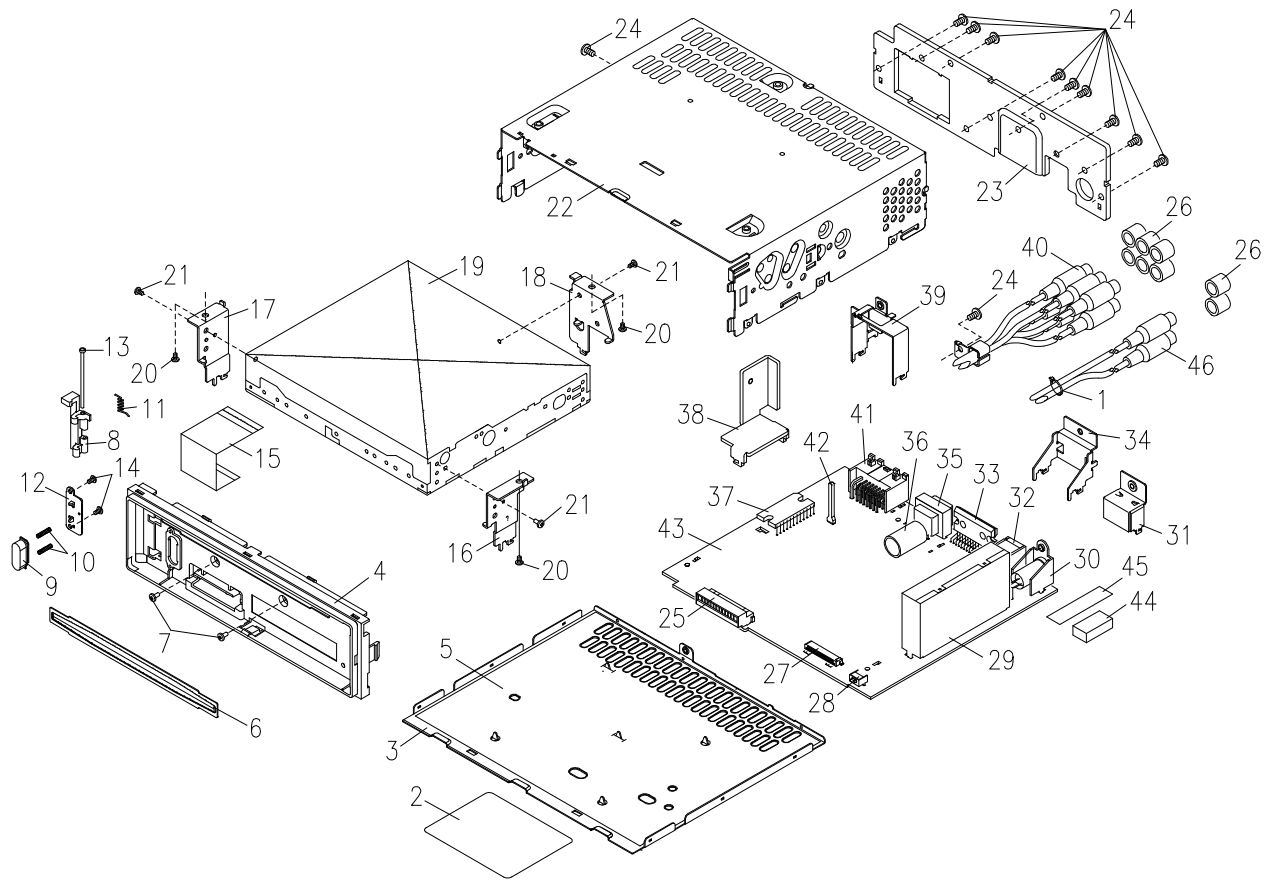

NO.	PARTS NO.	DESCRIPTION	Q'TY	NO.	PARTS NO.	DESCRIPTION	Q'TY
1	335-0833-01	LEAD HOLDER	1	25	074-1217-00	OUTLET SOCKET	1
2	286-6181-00	SETPLATE (PE-2554B-A)	1	26	345-3799-20	RUBBER CAP	8
3	311-1859-02	LOWER CASE	1	27	074-1237-70	OUTLET SOCKET	1
4	370-6027-00	INNER-ES	1	28	013-6103-00	TACT SWITCH	1
5	347-6880-01	INSULATOR	1	29	880-2090B	TUNER	1
6	346-0097-00	LEATHER SHEET	1	30	092-4000-51	ANT-RECEPT	1
7	780-2607-02	MECH-SCREW(M2.6x7)	2	31	331-3567-00	CN-HOLDER	1
8	335-5915-01	HOOK	1	32	074-1194-00	OUTLET SOCKET	1
9	382-4078-00	BUTTON	1	33	051-2050-00	IC	1
10	750-3173-00	SPRING	2	34	331-3560-01	IC HOLDER	1
11	750-3219-00	SPRING	1	35	009-9006-60	CHOKE	1
12	331-2594-00	HOOK PLATE	1	36	042-0447-00	ALUMI-ELE-C	1
13	341-1627-00	SHAFT	1	37	051-3297-10	IC	1
14	716-0778-00	SCREW(ø2x6)	2	38	313-1867-00	HEAT SINK	1
15	816-2623-50	FALT WIRE	1	39	331-3561-02	CN-HOLDER	1
16	331-3569-00	MECH-SUB-BRKT	1	40	855-5478-50	RCA-PIN-CORD	1
17	331-3570-00	MECH-SUB-BRKT	1	41	074-1214-00	OUTLET SOCKET	1
18	331-3427-00	MECH-BRKT	1	42	321-0969-00	CLAMP	1
19	929-0240-81	CD-MECH-MODULE	1	43	039-2291-00	MAIN PWB (WITHOUT COMPONENT)	1
20	714-3004-81	SCREW(M3x4)	3	44	345-5312-00	CUSHION	1
21	714-2603-80	SCREW(M2.6x3)	3	45	347-6341-00	E-SHEET	1
22	310-1778-00	UPPER CASE	1	46	855-5479-50	RCA-PIN-CORD	1
23	313-1866-00	HEAT SINK	1				
24	714-3006-81	SCREW(M3x6)	11				

ELECTRICAL PARTS LIST:

Main PWB (B1) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT1	092-4000-51	ANT-RECEPT	C135	166-1011-50	50V 100pF	C527	168-1032-55	50V 0.01pF
BL1	880-2090B	TUNER	C200	172-2231-15	50V 0.022uF	C529	168-1032-55	50V 0.01pF
C1	166-2201-50	50V 22pF CH	C201	042-0447-00	16V 2200uF	C530	168-1042-78	25V 0.1pF
C2	168-1032-55	50V 0.01pF	C203	182-1063-35	16V 10uF	C531	184-2273-21	10V 220uF
C3	166-2201-50	50V 22pF CH	C205	182-4763-35	16V 47uF	C532	182-1063-35	16V 10uF
C4	166-2096-50	50V 2pF	C206	182-1073-35	16V 100uF	C535	166-1007-50	50V 10pF
C5	182-3353-65	50V 3.3uF	C207	182-1063-35	16V 10uF	C536	166-1007-50	50V 10pF
C9	182-4763-35	16V 47uF	C208	182-2263-35	16V 22uF	C600	168-1032-55	50V 0.01pF
C10	168-2232-55	25V 0.022pF	C209	182-2263-15	6.3V 22uF	C601	042-0650-00	5.5V 0.1F
C11	168-1032-55	50V 0.01pF	C210	182-1063-35	16V 10uF	C603	168-1032-55	50V 0.01pF
C13	168-2232-55	25V 0.022pF	C211	168-1032-55	50V 0.01pF	C605	042-0577-00	6.3V 100uF
C16	168-2232-55	25V 0.022pF	C212	182-2273-15	6.3V 220uF	C606	168-1022-55	50V 1000pF
C17	168-2232-55	25V 0.022pF	C213	182-1073-35	16V 100uF	C607	168-1032-55	50V 0.01pF
C18	168-1022-55	50V 1000pF	C214	182-1073-15	6.3V 100uF	C608	168-1032-55	50V 0.01pF
C19	166-2701-50	50V 27pF CH	C215	182-1063-35	16V 10uF	C609	168-4732-78	25V 0.047uF
C20	166-1201-50	50V 12pF CH	C217	182-4763-35	16V 47uF	C610	166-1011-50	50V 100pF
C21	168-1022-55	50V 1000pF	C218	172-2231-15	50V 0.022uF	C612	182-1063-35	16V 10uF
C24	182-1073-35	16V 100uF	C219	166-1011-50	50V 100pF	C619	168-1022-55	50V 1000pF
C25	182-4763-35	16V 47uF	C300	168-4722-55	50V 4700pF	C620	168-1022-55	50V 1000pF
C29	166-1011-50	50V 100pF	C301	168-4722-55	50V 4700pF	D100	001-0466-90	S5688B
C30	166-1011-50	50V 100pF	C302	182-2253-65	50V 2.2uF	D101	001-0466-90	S5688B
C32	166-1011-50	50V 100pF	C303	182-2253-65	50V 2.2uF	D102	001-0466-90	S5688B
C33	166-3311-50	50V 330pF	C306	182-2253-65	50V 2.2uF	D103	001-0466-90	S5688B
C34	168-1022-55	50V 1000pF	C307	182-2253-65	50V 2.2uF	D104	001-0466-90	S5688B
C36	182-1053-65	50V 1uF	C308	182-1063-35	16V 10uF	D105	001-0466-90	S5688B
C40	168-1832-55	25V 0.018pF	C309	182-1063-35	16V 10uF	D106	001-0466-90	S5688B
C41	182-4763-15	6.3V 47uF	C310	182-1063-35	16V 10uF	D107	001-0466-90	S5688B
C43	168-1032-55	50V 0.01pF	C311	182-1063-35	16V 10uF	D201	001-0592-00	RM4Z
C47	168-2732-55	25V 0.027pF	C312	168-4732-78	25V 0.047uF	D202	001-0516-90	MA111
C48	168-2732-55	25V 0.027pF	C313	168-4732-78	25V 0.047uF	D203	001-0466-90	S5688B
C100	182-2263-15	6.3V 22uF	C314	182-1053-65	50V 1uF	D204	001-0516-90	MA111
C101	182-2263-15	6.3V 22uF	C450	182-2263-15	6.3V 22uF	D205	001-0516-90	MA111
C102	182-2263-15	6.3V 22uF	C451	182-2263-15	6.3V 22uF	D206	001-0516-90	MA111
C103	182-2263-15	6.3V 22uF	C452	182-2263-15	6.3V 22uF	D207	001-0466-90	S5688B
C104	172-1041-15	50V 0.1uF	C453	182-2263-15	6.3V 22uF	D208	001-0347-32	MA4056M
C105	178-2242-78	25V 0.22uF	C454	182-2263-15	6.3V 22uF	D209	001-0466-91	S5688G
C106	178-2242-78	25V 0.22uF	C455	182-2263-15	6.3V 22uF	D210	001-0466-91	S5688G
C107	178-2242-78	25V 0.22uF	C456	182-2263-15	6.3V 22uF	D211	001-0466-91	S5688G
C108	178-2242-78	25V 0.22uF	C457	182-2263-15	6.3V 22uF	D214	001-0516-90	MA111
C109	172-1041-15	50V 0.1uF	C458	182-2263-15	6.3V 22uF	D500	001-0516-90	MA111
C110	172-1041-15	50V 0.1uF	C459	182-2263-15	6.3V 22uF	D501	001-0516-90	MA111
C111	172-1041-15	50V 0.1uF	C500	182-2253-65	50V 2.2uF	D502	001-0516-90	MA111
C112	182-4763-35	16V 47uF	C501	182-2253-65	50V 2.2uF	D503	001-0516-90	MA111
C113	182-2263-35	16V 22uF	C502	182-2253-65	50V 2.2uF	D504	001-0529-43	MA8082L
C114	172-1041-15	50V 0.1uF	C505	182-2253-65	50V 2.2uF	D600	001-0516-90	MA111
C115	172-1041-15	50V 0.1uF	C506	182-2253-65	50V 2.2uF	IC101	051-2050-00	LA47532
C116	172-1041-15	50V 0.1uF	C507	182-2253-65	50V 2.2uF	IC2	051-6212-08	LC72191JM
C117	182-3353-65	50V 3.3uF	C508	182-1063-35	16V 10uF	IC200	051-3297-10	BA4916-V2
C118	172-1041-15	50V 0.1uF	C509	182-1073-35	16V 100uF	IC302	051-0350-93	NJM4558M
C123	166-4711-50	50V 470pF	C510	168-1042-78	25V 0.1pF	IC501	051-5030-90	M61523FP
C124	166-4711-50	50V 470pF	C512	166-1007-50	50V 10pF	IC503	051-0350-93	NJM4558M
C125	166-4711-50	50V 470pF	C513	166-1007-50	50V 10pF	IC504	051-5830-90	UPC5701GR
C126	166-4711-50	50V 470pF	C516	166-1007-50	50V 10pF	IC600	052-3382-00	M16C/62
C127	166-4711-50	50V 470pF	C517	166-1007-50	50V 10pF	IC601	051-5437-08	S-80821ANMP
C128	166-4711-50	50V 470pF	C518	166-1007-50	50V 10pF	IC602	051-6600-38	CA0008AM
C129	166-4711-50	50V 470pF	C519	166-1007-50	50V 10pF	IC603	051-5443-08	BD4580G
C130	166-4711-50	50V 470pF	C521	182-1063-35	16V 10uF	J201	074-1214-00	OUTLET SOCKET
C132	166-1011-50	50V 100pF	C522	182-1063-35	16V 10uF	J600	074-1194-00	OUTLET SOCKET
C133	166-1011-50	50V 100pF	C523	168-1032-55	50V 0.01pF	J601	074-1217-00	OUTLET SOCKET
C134	166-1011-50	50V 100pF	C524	168-1032-55	50V 0.01pF	J900	074-1237-70	OUTLET SOCKET

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
L1	010-2003-04	COIL	R15	119-1021-15	1/16W 1Kohm	R316	119-1041-15	1/16W 10Kohm
L2	010-2230-88	220uH	R16	119-1231-15	1/16W 12Kohm	R317	119-1021-15	1/16W 1Kohm
L401	010-2230-76	22uH	R17	119-5631-15	1/16W 56Kohm	R318	119-1021-15	1/16W 1Kohm
L601	010-3100-66	2.2uH	R25	119-1041-15	1/16W 10Kohm	R319	119-1041-15	1/16W 10Kohm
L602	010-3100-66	2.2uH	R26	119-3331-15	1/16W 33Kohm	R320	119-8221-15	1/16W 8.2Kohm
L603	010-3100-66	2.2uH	R27	119-0000-05	0	R450	119-2231-15	1/16W 22Kohm
L604	010-3100-66	2.2uH	R28	119-1021-15	1/16W 1Kohm	R451	119-2231-15	1/16W 22Kohm
L605	010-3100-66	2.2uH	R30	119-1021-15	1/16W 1Kohm	R452	119-2231-15	1/16W 22Kohm
L606	010-3100-66	2.2uH	R31	119-1021-15	1/16W 1Kohm	R453	119-2231-15	1/16W 22Kohm
L607	010-3100-66	2.2uH	R32	119-1521-15	1/16W 1.5Kohm	R454	119-2231-15	1/16W 22Kohm
L608	010-3406-54	2.2uH	R33	119-1031-15	1/16W 10Kohm	R455	119-2231-15	1/16W 22Kohm
Q1	192-2712-51	2SC2712GR	R34	119-1031-15	1/16W 10Kohm	R456	119-2231-15	1/16W 22Kohm
Q2	192-2712-51	2SC2712GR	R35	119-0000-05	0	R457	119-2231-15	1/16W 22Kohm
Q4	125-2199-93	KRC103S	R36	119-1031-15	1/16W 10Kohm	R458	119-3311-15	1/16W 330ohm
Q7	190-1162-00	2SA1162	R37	119-1521-15	1/16W 1.5Kohm	R459	119-3311-15	1/16W 330ohm
Q8	190-1162-00	2SA1162	R100	119-1231-15	1/16W 12Kohm	R460	119-3311-15	1/16W 330ohm
Q200	193-1858-00	2SD1858	R101	119-2291-15	1/16W 2.2ohm	R461	119-3311-15	1/16W 330ohm
Q201	125-2199-96	KRC106S	R102	119-2291-15	1/16W 2.2ohm	R462	119-3311-15	1/16W 330ohm
Q202	190-1298-00	2SA1298	R103	119-2291-15	1/16W 2.2ohm	R463	119-3311-15	1/16W 330ohm
Q203	192-2712-00	2SC2712	R104	119-2291-15	1/16W 2.2ohm	R464	119-3311-15	1/16W 330ohm
Q204	190-1162-00	2SA1162	R105	119-2291-15	1/16W 2.2ohm	R465	119-3311-15	1/16W 330ohm
Q205	193-1858-00	2SD1858	R106	119-1031-15	1/16W 10Kohm	R466	119-1021-15	1/16W 1Kohm
Q206	193-1858-00	2SD1858	R107	119-2291-15	1/16W 2.2ohm	R467	119-1021-15	1/16W 1Kohm
Q207	125-2199-93	KRC103S	R108	119-2291-15	1/16W 2.2ohm	R468	119-1021-15	1/16W 1Kohm
Q208	125-0199-92	KRA102S	R109	119-2291-15	1/16W 2.2ohm	R469	119-1021-15	1/16W 1Kohm
Q209	125-2199-96	KRC106S	R110	119-1021-15	1/16W 1Kohm	R470	119-2231-15	1/16W 22Kohm
Q210	190-1298-00	2SA1298	R111	119-1021-15	1/16W 1Kohm	R471	119-2231-15	1/16W 22Kohm
Q213	125-2199-93	KRC103S	R112	119-1021-15	1/16W 1Kohm	R472	119-3311-15	1/16W 330ohm
Q214	190-1162-00	2SA1162	R113	119-1021-15	1/16W 1Kohm	R473	119-3311-15	1/16W 330ohm
Q215	193-1802-61	2SD1802	R200	119-1041-15	1/16W 10Kohm	R474	119-1021-15	1/16W 1Kohm
Q216	125-2199-93	KRC103S	R201	119-1041-15	1/16W 10Kohm	R475	119-1021-15	1/16W 1Kohm
Q217	191-1237-00	2SB1237	R202	119-5621-15	1/16W 5.6Kohm	R500	119-1021-15	1/16W 1Kohm
Q218	125-2199-93	KRC103S	R203	119-3311-15	1/16W 330ohm	R501	119-1021-15	1/16W 1Kohm
Q219	191-1237-00	2SB1237	R204	119-5631-15	1/16W 56Kohm	R502	119-1021-15	1/16W 1Kohm
Q450	193-1306-00	2SD1306	R205	119-1031-15	1/16W 10Kohm	R503	119-1021-15	1/16W 1Kohm
Q451	193-1306-00	2SD1306	R206	119-1031-15	1/16W 10Kohm	R504	119-4721-15	1/16W 4.7Kohm
Q452	193-1306-00	2SD1306	R207	119-1021-15	1/16W 1Kohm	R505	119-4721-15	1/16W 4.7Kohm
Q453	193-1306-00	2SD1306	R208	119-4731-15	1/16W 47Kohm	R507	119-4711-15	1/16W 470ohm
Q454	193-1306-00	2SD1306	R209	119-1531-15	1/16W 15Kohm	R508	119-4711-15	1/16W 470ohm
Q455	193-1306-00	2SD1306	R210	119-1031-15	1/16W 10Kohm	R509	119-4711-15	1/16W 470ohm
Q456	193-1306-00	2SD1306	R211	119-4731-15	1/16W 47Kohm	R510	119-4711-15	1/16W 470ohm
Q457	193-1306-00	2SD1306	R212	119-2231-15	1/16W 22Kohm	R511	119-4711-15	1/16W 470ohm
Q458	193-1306-00	2SD1306	R213	116-2291-15	1/4WS 2.2ohm	R512	119-4711-15	1/16W 470ohm
Q459	193-1306-00	2SD1306	R214	116-2291-15	1/4WS 2.2ohm	R518	119-0000-05	0
Q502	192-2712-00	2SC2712	R215	116-2211-15	1/4WS 220ohm	R522	119-1021-15	1/16W 1Kohm
Q503	125-2199-96	KRC106S	R216	116-1521-15	1/4W 1.5Kohm	R523	119-8221-15	1/16W 8.2Kohm
Q504	125-0002-96	RN2406	R217	119-1031-15	1/16W 10Kohm	R524	119-2231-15	1/16W 22Kohm
Q505	125-0002-96	RN2406	R220	119-3321-15	1/16W 3.3Kohm	R525	119-0000-05	0
Q506	125-0002-96	RN2406	R221	119-1031-15	1/16W 10Kohm	R526	119-1021-15	1/16W 1Kohm
Q508	125-2199-96	KRC106S	R224	119-1011-15	1/16W 100ohm	R530	119-3931-15	1/16W 39Kohm
Q509	125-2199-93	KRC103S	R225	119-1031-15	1/16W 10Kohm	R531	119-8221-15	1/16W 8.2Kohm
Q510	125-0002-96	RN2406	R226	116-1221-15	1/4W 1.2Kohm	R532	119-1021-15	1/16W 1Kohm
Q511	125-0002-96	RN2406	R227	119-1031-15	1/16W 10Kohm	R533	119-0000-05	0
Q512	125-0002-96	RN2406	R228	116-1221-15	1/4W 1.2Kohm	R540	119-1831-15	1/16W 18Kohm
Q514	125-2199-96	KRC106S	R229	116-1521-15	1/4W 1.5Kohm	R541	119-1831-15	1/16W 18Kohm
Q601	125-2199-93	KRC103S	R308	032-0140-89	1/10W 47Kohm(F)	R542	119-1021-15	1/16W 1Kohm
Q603	190-1162-00	2SA1162	R309	032-0140-89	1/10W 47Kohm(F)	R543	119-8221-15	1/16W 8.2Kohm
R1	119-2221-15	1/16W 2.2Kohm	R310	032-0140-89	1/10W 47Kohm(F)	R600	119-3321-15	1/16W 3.3Kohm
R2	119-1021-15	1/16W 1Kohm	R311	032-0140-89	1/10W 47Kohm(F)	R601	119-4731-15	1/16W 47Kohm
R3	119-1021-15	1/16W 1Kohm	R312	032-0140-89	1/10W 47Kohm(F)	R602	119-4721-15	1/16W 4.7Kohm
R4	119-1031-15	1/16W 10Kohm	R313	032-0140-89	1/10W 47Kohm(F)	R603	116-6801-15	1/4WS 68ohm
R9	119-1021-15	1/16W 1Kohm	R314	032-0140-89	1/10W 47Kohm(F)	R604	119-1031-15	1/16W 10Kohm
R14	119-4741-15	1/16W 470Kohm	R315	032-0140-89	1/10W 47Kohm(F)	R605	119-1031-15	1/16W 10Kohm


REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R606	119-5621-15	1/16W 5.6Kohm	R622	119-2231-15	1/16W 22Kohm	R635	119-1041-15	1/16W 10Kohm
R609	119-0000-05	0	R626	119-1011-15	1/16W 100ohm	R636	119-0000-05	0
R610	119-4731-15	1/16W 47Kohm	R627	119-1811-15	1/16W 180ohm	S600	013-6103-00	SWITCH
R611	119-0000-05	0	R628	119-1811-15	1/16W 180ohm	SUP1	060-0122-91	DSP-141N-SOOB
R615	119-4721-15	1/16W 4.7Kohm	R629	119-1811-15	1/16W 180ohm	T201	009-9006-60	CHOKE
R616	119-4721-15	1/16W 4.7Kohm	R630	119-1811-15	1/16W 180ohm	X1	061-1066-00	7.2MHZ
R617	119-4721-15	1/16W 4.7Kohm	R632	119-1031-15	1/16W 10Kohm	X601	060-1505-50	10MHZ

Switch PWB (B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C701	166-6811-50	50V 680pF	Q707	125-2199-93	KRC103S	R742	119-4711-15	1/16W 470ohm
C702	168-1042-78	25V 0.1uF	Q708	125-0199-93	KRA103S	S701	013-6312-50	SWITCH
C703	168-1042-78	25V 0.1uF	Q709	125-2199-93	KRC103S	S702	013-6312-50	SWITCH
C704	168-1042-78	25V 0.1uF	R701	119-1011-15	1/16W 100ohm	S703	013-6312-50	SWITCH
C705	168-1042-78	25V 0.1uF	R702	119-1021-15	1/16W 1Kohm	S704	013-6507-50	LUMI SEITCH
C706	042-0416-54	16V 10uF	R703	119-1041-15	1/16W 100Kohm	S705	013-6312-50	SWITCH
C707	042-0416-54	16V 10uF	R704	119-3921-15	1/16W 3.9Kohm	S706	013-6312-50	SWITCH
C710	042-0416-54	16V 10uF	R712	119-3921-15	1/16W 3.9Kohm	S707	013-6312-50	SWITCH
D701	001-0529-29	MA8051M	R714	119-4331-15	1/16W 43Kohm	S709	013-6507-50	LUMI SEITCH
D702	001-0529-14	MA8030L	R715	119-2221-15	1/16W 2.2Kohm	S710	013-6312-50	SWITCH
D703	001-7046-00	DIODE	R716	119-2221-15	1/16W 2.2Kohm	S711	013-6312-50	SWITCH
D704	001-0529-41	MA8075M	R717	119-2221-15	1/16W 2.2Kohm	S712	013-6312-50	SWITCH
D705	001-0529-41	MA8075M	R718	119-2221-15	1/16W 2.2Kohm	S713	013-6312-50	SWITCH
D706	001-0529-41	MA8075M	R724	119-1511-15	1/16W 150ohm	S714	013-6312-50	SWITCH
D707	001-0529-41	MA8075M	R725	119-1011-15	1/16W 100ohm	S715	013-6312-50	SWITCH
IC701	051-6063-00	LC75808W	R726	119-2211-15	1/16W 220ohm	S716	013-6312-50	SWITCH
IR701	060-4017-90	RS-671	R727	119-2211-15	1/16W 220ohm	S717	013-6312-50	SWITCH
J701	076-0615-00	PLUG	R728	119-8211-15	1/16W 820ohm	S718	013-6312-50	SWITCH
PL701	017-0444-00	14V50M	R729	119-2711-15	1/16W 270ohm	S719	013-6312-50	SWITCH
PL702	017-0444-00	14V50M	R730	119-4721-15	1/16W 4.7Kohm	S720	013-6507-50	LUMI SEITCH
PL703	017-0444-00	14V50M	R731	119-0000-05	0	S721	013-6507-50	LUMI SEITCH
PL704	017-0444-00	14V50M	R739	119-4711-15	1/16W 470ohm	S722	013-6507-50	LUMI SEITCH
Q701	190-1162-00	2SA1162	R740	119-4711-15	1/16W 470ohm	VR701	016-9900-84	VR W/SHAFT
Q704	125-2199-93	KRC103S	R741	119-4711-15	1/16W 470ohm			

EXPLODED VIEW • PARTS LIST:

CD mechanism section 929-0240-81

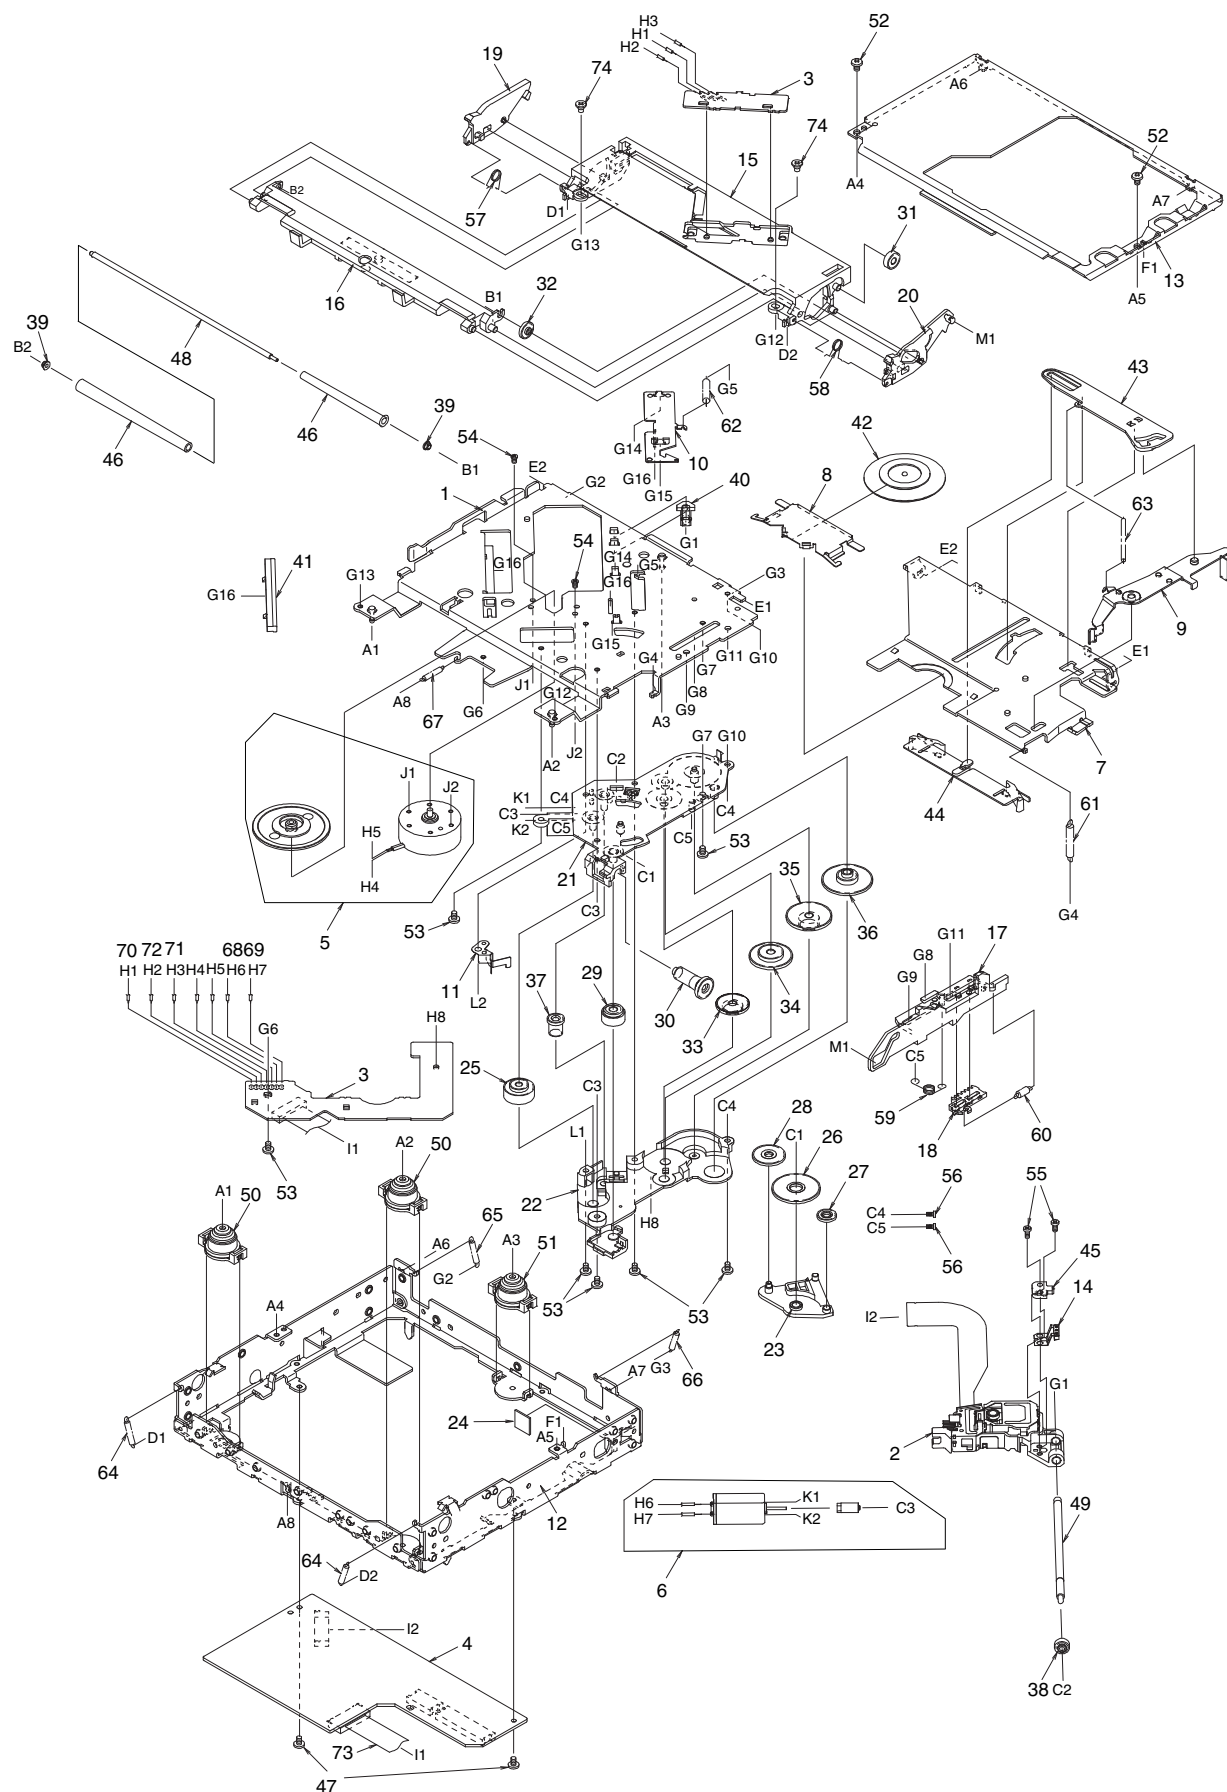

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	966-0595-25	DRIVE PLATE ASSY	1	37	621-0620-20	THREAD GEAR A	1
2	969-0065-90	PICK UP UNIT	1	38	621-0621-20	THREAD GEAR B	1
3	039-1944-21	LED PWB (WITHOUT COMPONENT)	1	39	621-0622-21	ROLLER SLEEVE	2
4	039-2290-00	CD PWB (WITHOUT COMPONENT)	1	40	621-0623-22	LS-HOLDER	1
5	SMA-182-100	MOTO ASSY(SPINDLE)	1	41	621-0624-22	GUIDE RAIL	1
6	SMA-183-100	MOTO ASSY(SLED)	1	42	621-0708-20	CLAMPER RING	1
7	620-1022-25	CLAMPER LINK	1	43	621-0626-21	STOPPER LINK	1
8	620-1023-23	CLAMPER PLATE	1	44	621-0627-21	DISC STOPPER	1
9	620-1024-23	SENSOR ARM	1	45	621-0709-20	SH-BASE	1
10	620-1025-22	ID-LOCK PLATE	1	46	621-0629-20	LOADING ROLLER	2
11	620-1026-21	SPRING PLATE	1	47	716-1670-00	SPECIAL SCREW	2
12	620-1585-20	LOWER CHASSIS	1	48	622-1660-20	ROLLER SHAFT	1
13	620-1028-23	UPPER CHASSIS	1	49	624-0018-01	LEAD SCREW	1
14	966-0638-20	SH-RACK ASSY	1	50	629-0086-20	DAMPER F	2
15	621-0598-26	UPPER GUIDE	1	51	629-0087-20	DAMPER R	1
16	621-0718-21	ROLLER GUIDE	1	52	714-2003-81	MACHINE SCREW	2
17	621-0600-26	SHIFT LEVER	1	53	716-1507-00	SCREW	7
18	621-0601-21	RACK	1	54	716-1733-00	SCREW	2
19	621-0602-22	LOCK ARM(L)	1	55	716-3469-00	SPECIAL SCREW	2
20	621-0603-25	LOCK ARM(R)	1	56	716-3446-00	SCREW	2
21	621-0724-20	GEAR BASE	1	57	750-3465-21	ROLLER SPRING(L)	1
22	621-0605-22	GEAR COVER	1	58	750-3466-20	ROLLER SPRING(R)	1
23	621-0723-20	IDLE CASE	1	59	750-3467-21	SHIFT SPRING	1
24	345-8704-20	CUSHION RUBBER	1	60	750-3468-20	RACK SPRING	1
25	621-0608-21	SECOND GEAR	1	61	750-3469-20	CLAMPER SPRING	1
26	621-0609-20	BASE GEAR	1	62	750-3470-20	ID-LOCK SPRING	1
27	621-0610-20	IDLE GEAR A	1	63	750-3471-20	SENSOR SPRING	1
28	621-0611-20	IDLE GEAR B	1	64	750-3472-21	DR-SPRING F	2
29	621-0612-21	ROLLER GEAR A	1	65	750-3473-20	DR-SPRING RA	1
30	621-0719-20	ROLLER GEAR B	1	66	750-3474-20	DR-SPRING RB	1
31	621-0720-20	ROLLER GEAR C	1	67	750-3475-21	DR-SPRING C	1
32	621-0721-20	ROLLER GEAR D	1	68	803-4906-60	VINEL-COAT-WIRE	1
33	621-0616-20	POWER GEAR A	1	69	816-2590-00	SPECIAL LEAD	1
34	621-0617-20	POWER GEAR B	1	70	816-2591-00	SPECIAL LEAD	1
35	621-0618-20	POWER GEAR C	1	71	816-2592-00	SPECIAL LEAD	1
36	621-0619-20	POWER GEAR D	1	72	816-2593-00	SPECIAL LEAD	1
				73	816-2624-50	FLAT WIRE	1
				74	716-3473-00	SPECIAL SCREW	2

ELECTRICAL PARTS LIST

CD mechanism (B3) section 929-0240-81

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	168-4732-78	0.047uF	C71	168-1045-56	0.1uF	Q1	125-0002-92	RN2402TE85L
C2	046-3922-58	3900pF	C72	168-1045-56	0.1uF	Q02	125-2004-92	RN1402TE85L
C3	046-3332-78	0.033uF	C75	046-1032-78	0.01uF	Q3	131-1188-50	2SB1188
C4	045-2201-50	22pF	C76	168-1045-56	0.1uF	Q4	190-1586-50	2SA1586
C5	045-3901-50	39pF	C77	163-2273-05	4V 220uF	Q5	125-2004-92	RN1402TE85L
C6	168-4732-78	0.047uF	C78	168-1045-56	0.1uF	Q50	125-2004-92	RN1402TE85L
C7	045-2096-50	2pF	C80	168-1045-56	0.1uF	R1	033-3341-15	1/16W 330Kohm
C8	042-0416-52	10V 10uF	C81	168-1045-56	0.1uF	R2	033-4741-15	1/16W 470Kohm
C9	042-0416-52	10V 10uF	C82	178-1052-78	1uF	R3	033-1521-15	1/16W 1.5Kohm
C10	046-5622-58	5600pF	C83	046-4722-58	4700pF	R4	033-3321-15	1/16W 3.3Kohm
C11	178-1052-78	1uF	C84	178-1052-78	1uF	R5	033-4721-15	1/16W 4.7Kohm
C12	163-1073-05	4V 100uF	C85	046-1032-78	0.01uF	R6	117-1001-15	1/10W 10ohm
C13	178-1052-78	1uF	C86	168-1045-56	0.1uF	R7	033-2251-15	1/16W 2.2Mohm
C14	168-1045-56	0.1uF	C87	168-1045-56	0.1uF	R8	033-6831-15	1/16W 68Kohm
C15	046-6822-58	6800pF	C88	045-1011-50	100pF	R9	033-1021-15	1/16W 1Kohm
C16	046-3332-78	0.033uF	C89	045-1011-50	100pF	R10	033-3331-15	1/16W 33Kohm
C17	178-2242-78	0.22uF	C90	046-1032-78	0.01uF	R11	033-1231-15	1/16W 12Kohm
C18	168-4732-78	0.047uF	C91	046-1032-78	0.01uF	R12	033-1231-15	1/16W 12Kohm
C19	045-1511-50	150pF	C92	168-1045-56	0.1uF	R17	033-1811-15	1/16W 180ohm
C20	046-2212-58	220pF	C93	046-1032-78	0.01uF	R30	033-1011-15	1/16W 100ohm
C21	178-1052-78	1uF	C94	045-1201-50	12pF	R31	033-6811-15	1/16W 680ohm
C22	046-4722-58	4700pF	C95	168-1045-56	0.1uF	R32	033-6811-15	1/16W 680ohm
C23	163-1073-05	4V 100uF	C96	163-4763-05	4V 47uF	R33	033-2211-15	1/16W 220ohm
C30	168-1045-56	0.1uF	C97	042-0416-52	10V 10uF	R35	033-3311-15	1/16W 330ohm
C31	163-1073-05	4V 100uF	C98	168-1045-56	0.1uF	R36	033-5631-15	1/16W 56Kohm
C32	046-1032-78	0.01uF	C99	046-1032-78	0.01uF	R37	033-8231-15	1/16W 82Kohm
C33	046-1032-78	0.01uF	CCT1	050-0145-54	1/16W 47Kohm	R38	033-5631-15	1/16W 56Kohm
C34	168-1045-56	0.1uF	CCT2	050-0145-54	1/16W 47Kohm	R39	033-3331-15	1/16W 33Kohm
C35	168-1045-56	0.1uF	CCT6	050-0145-54	1/16W 47Kohm	R40	033-8221-15	1/16W 8.2Kohm
C36	046-1022-58	1000pF	CCT9	050-0145-54	1/16W 47Kohm	R41	033-1031-15	1/16W 10Kohm
C37	042-0416-52	10V 10uF	D1	001-2610-90	RB480K	R42	033-2731-15	1/16W 27Kohm
C38	046-4722-58	4700pF	D2	001-2610-90	RB480K	R43	033-1031-15	1/16W 10Kohm
C39	178-2242-78	0.22uF	D3	001-0367-91	1SS226TE85L	R44	033-1531-15	1/16W 15Kohm
C40	168-1045-56	0.1uF	D4	001-2610-90	RB480K	R45	033-5621-15	1/16W 5.6Kohm
C41	046-2232-78	0.022uF	IC1	051-5709-90	AN8399SA	R46	033-4741-15	1/16W 470Kohm
C42	046-6812-58	680pF	IC2	051-6393-00	MN6627482WB	R47	033-3341-15	1/16W 330Kohm
C43	046-1022-58	1000pF	IC3	051-6062-08	BA5996FM-E2	R48	033-2241-15	1/16W 220Kohm
C50	168-1045-56	0.1uF	IC4	051-7221-58	SN74AHC1G04D	R50	117-6811-15	1/10W 680ohm
C51	045-1011-50	100pF	IC5	052-5054-00	MN102H60K	R51	033-1031-15	1/16W 10Kohm
C52	046-1522-58	1500pF	IC6	051-6372-00	TMS320DA150	R52	033-1031-15	1/16W 10Kohm
C53	046-1522-58	1500pF	IC7	051-3314-90	TMS48S033F	R53	033-1031-15	1/16W 10Kohm
C54	046-6812-58	680pF	IC8	051-3315-90	TPS76316DBVR	R54	033-1031-15	1/16W 10Kohm
C55	163-1073-35	16V 100uF	IC9	051-5442-08	BD4826	R55	033-8221-15	1/16W 8.2Kohm
C56	168-1045-56	0.1uF	IC10	051-9813-00	MBM29DL400BC	R56	033-1041-15	1/16W 100Kohm
C57	046-1022-58	1000pF	IC11	051-7519-08	SN74LV273APWR	R57	033-1011-15	1/16W 100ohm
C60	045-1801-50	18pF	IC12	051-7519-08	SN74LV273APWR	R62	033-1041-15	1/16W 100Kohm
C61	045-1801-50	18pF	IC13	051-7239-38	SN74HCT08PW	R63	033-1041-15	1/16W 100Kohm
C62	046-1032-78	0.01uF	IC14	051-9330-00	K4S641632E-	R66	119-4741-15	1/16W 470Kohm
C63	168-1045-56	0.1uF	IC15	051-7518-08	SN74LV139APWR	R82	033-3311-15	1/16W 330ohm
C64	168-1045-56	0.1uF	IC16	051-7203-48	SN74LV74APWR	R83	033-1011-15	1/16W 220ohm
C65	168-1045-56	0.1uF	IC17	051-3263-90	NJU7200U33	R94	033-1041-15	1/16W 100Kohm
C66	046-1032-78	0.01uF	IC18	051-7222-48	SN74AHC1G08D	R95	033-2231-15	1/16W 22Kohm
C67	168-1045-56	0.1uF	J1	074-1138-65	10p	R96	033-1021-15	1/16W 1Kohm
C68	046-1032-78	0.01uF	J2	074-1138-60	10p	R97	033-4721-15	1/16W 4.7Kohm
C70	168-1045-56	0.1uF	J3	074-1237-70	10p			

LED PWB (B4) section

REF No.	PART No.	DESCRIPTION
D101	001-7058-90	AN1105W-RR
D102	001-7058-90	AN1105W-RR
J101	074-1138-60	10p
Q101	060-4015-90	PS1192H
Q102	060-4015-90	PS1192H
S101	013-7414-50	CHUCKING
S102	013-7413-50	LIMIT