


EXPLODED VIEW (UNIT)

Block No.M1MM

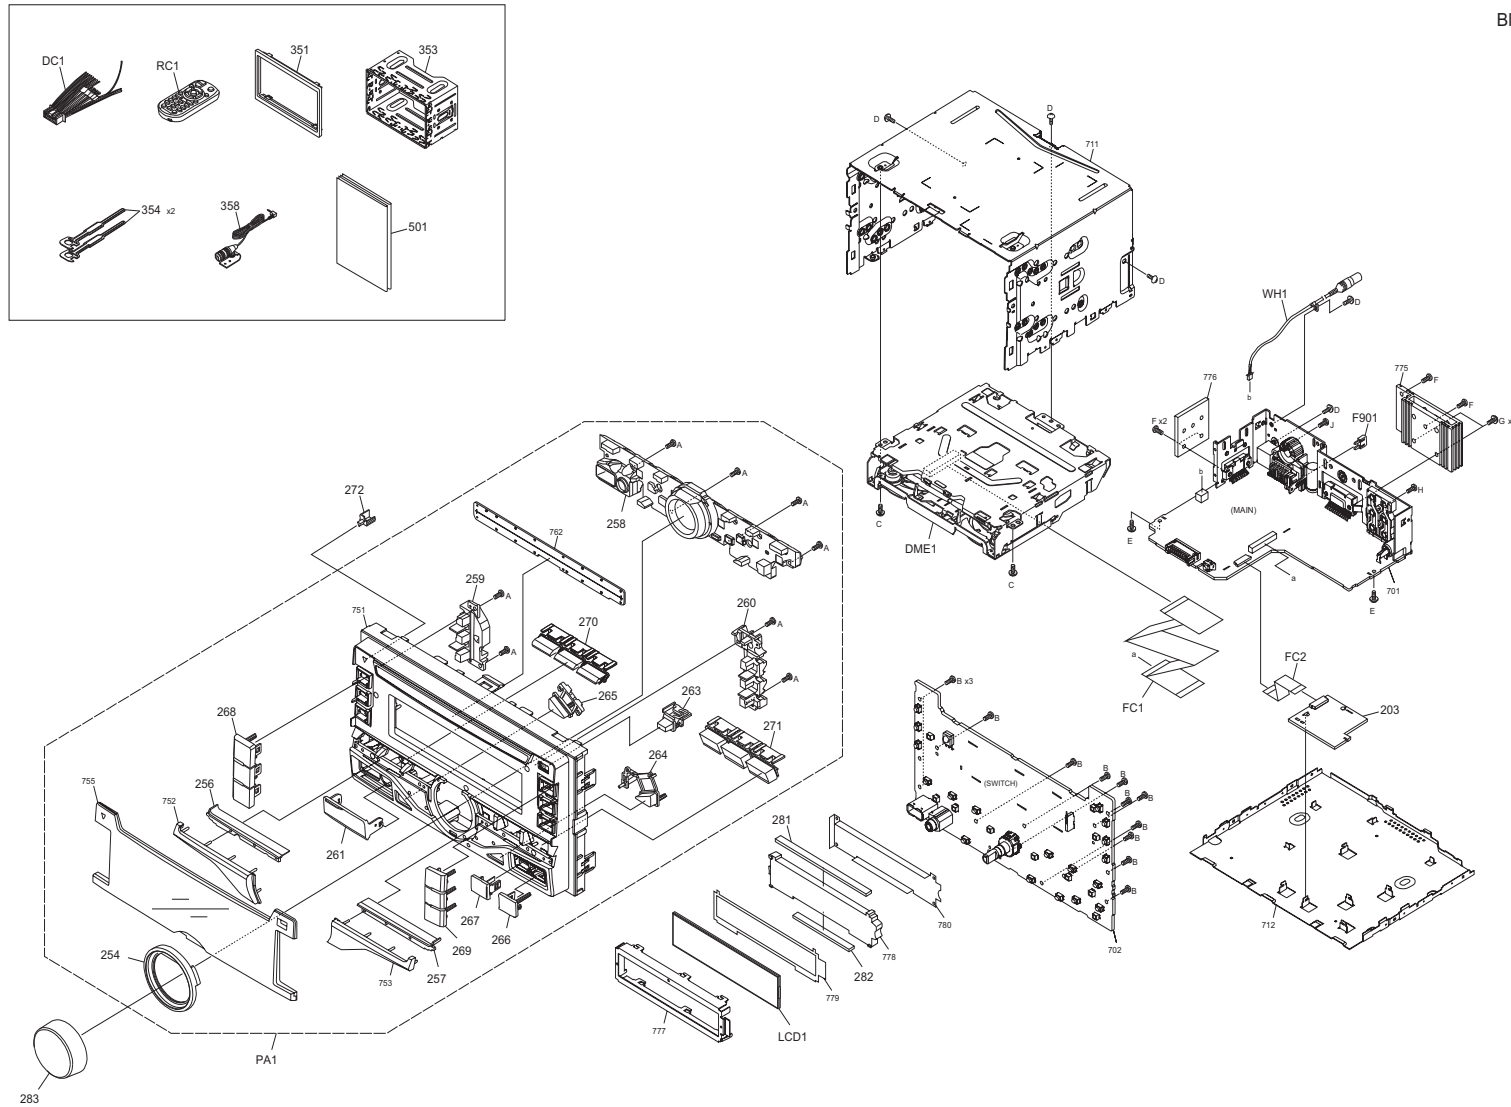

Parts with the exploded numbers larger than 700 are not supplied.

created date:2015-01-09

MODEL	MARK	MODEL	MARK
DPX501BT	K0	DPX501BT	R1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (UNIT) <M1MM>						
△	DC1	QAM1623-002	DC CORD		1	
	DME1	FC2-2A00NXN	CD MECHANISM(MADE AT JEIN)		1	
	DME1	or X92-6820-01	CD MECHANISM(MADE AT JKEM)		1	
△	F901	FZB10BT-100	BLADE FUSE		1	
	FC1	E3F-0051-00	FLAT CABLE		1	
	FC2	E3F-0053-00	FLAT CABLE		1	
	LCD1	B3H-0007-00	LCD		1	
	PA1	A6D-0027-01	PANEL ASSY		1	
	RC1	QAL1303-004	REMOTE CONTROL UNIT		1	
	WH1	QAM1370-001	CAR CABLE		1	
	A	N80-2005-48	P.HEAD T.SCREW		8	
	B	QYSDSF2006ZA	TAP SCREW	M2 x 6mm	13	
	C	QYSDST2604ZA	TAP SCREW	M2.6 x 4mm	2	
	D	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	5	
	E	GE40377-002A	SPECIAL SCREW		2	
	F	QYSDST2610ZA	TAP SCREW	M2.6 x 10mm	4	
	G	GE40377-005A	SPECIAL SCREW		2	
	H	QYSDSF2608ZA	TAP SCREW	M2.6 x 8mm	1	
	J	QYSDSG3006ZA	TAP SCREW	M3 x 6mm	1	
	203	W0C-0055-20	CIRCUIT MODULE		1	
	254	B07-3377-03	ESCUTCHEON		1	
	256	B19-2624-03	LIGHTING BOARD		1	
	257	B19-2625-03	LIGHTING BOARD		1	
	258	B19-2626-01	LIGHTING BOARD		1	
	259	B19-2627-03	LIGHTING BOARD		1	
	260	B19-2628-13	LIGHTING BOARD		1	
	261	F07-2266-12	COVER		1	
	263	K24-5209-03	PUSH KNOB		1	
	264	K24-5210-13	PUSH KNOB		1	
	265	K24-5212-13	PUSH KNOB		1	
	266	K24-5214-12	PUSH KNOB		1	
	267	K24-5216-02	PUSH KNOB		1	
	268	K25-3145-03	PUSH KNOB		1	
	269	K25-3146-03	PUSH KNOB		1	
	270	K2F-0018-00	PUSH KNOB		1	
	271	K25-3149-02	PUSH KNOB		1	
	272	B19-2641-04	LIGHTING BOARD		1	
	281	E2K-0015-00	CONDUCT RUBBER		1	
	282	E2K-0016-00	CONDUCT RUBBER		1	
	283	K28-0530-13	KNOB ASSY		1	
	351	GE20366-001A	TRIM PLATE		1	
	353	LV22876-001A	SLEEVE ASSY		1	
	354	LV45516-001A	LEVER		2	
	358	QAN0126-001	MICROPHONE		1	
	501	B5A-0344-00	INST.MANUAL	ENG FRE SPA	1	K0
	501	B5A-0345-00	INST.MANUAL	ENG FRE SPA	1	R1

EXPLODED VIEW (CD MECHANISM: FC2-2A00NXN)


Block No.MBMM

The differences between X92-6820-01 and FC2-2A00NXN,
please refer to SECTION 2 "How to identify the CD mechanism ASSY".

Grease

★ W01-1738-08

● W01-2067-08

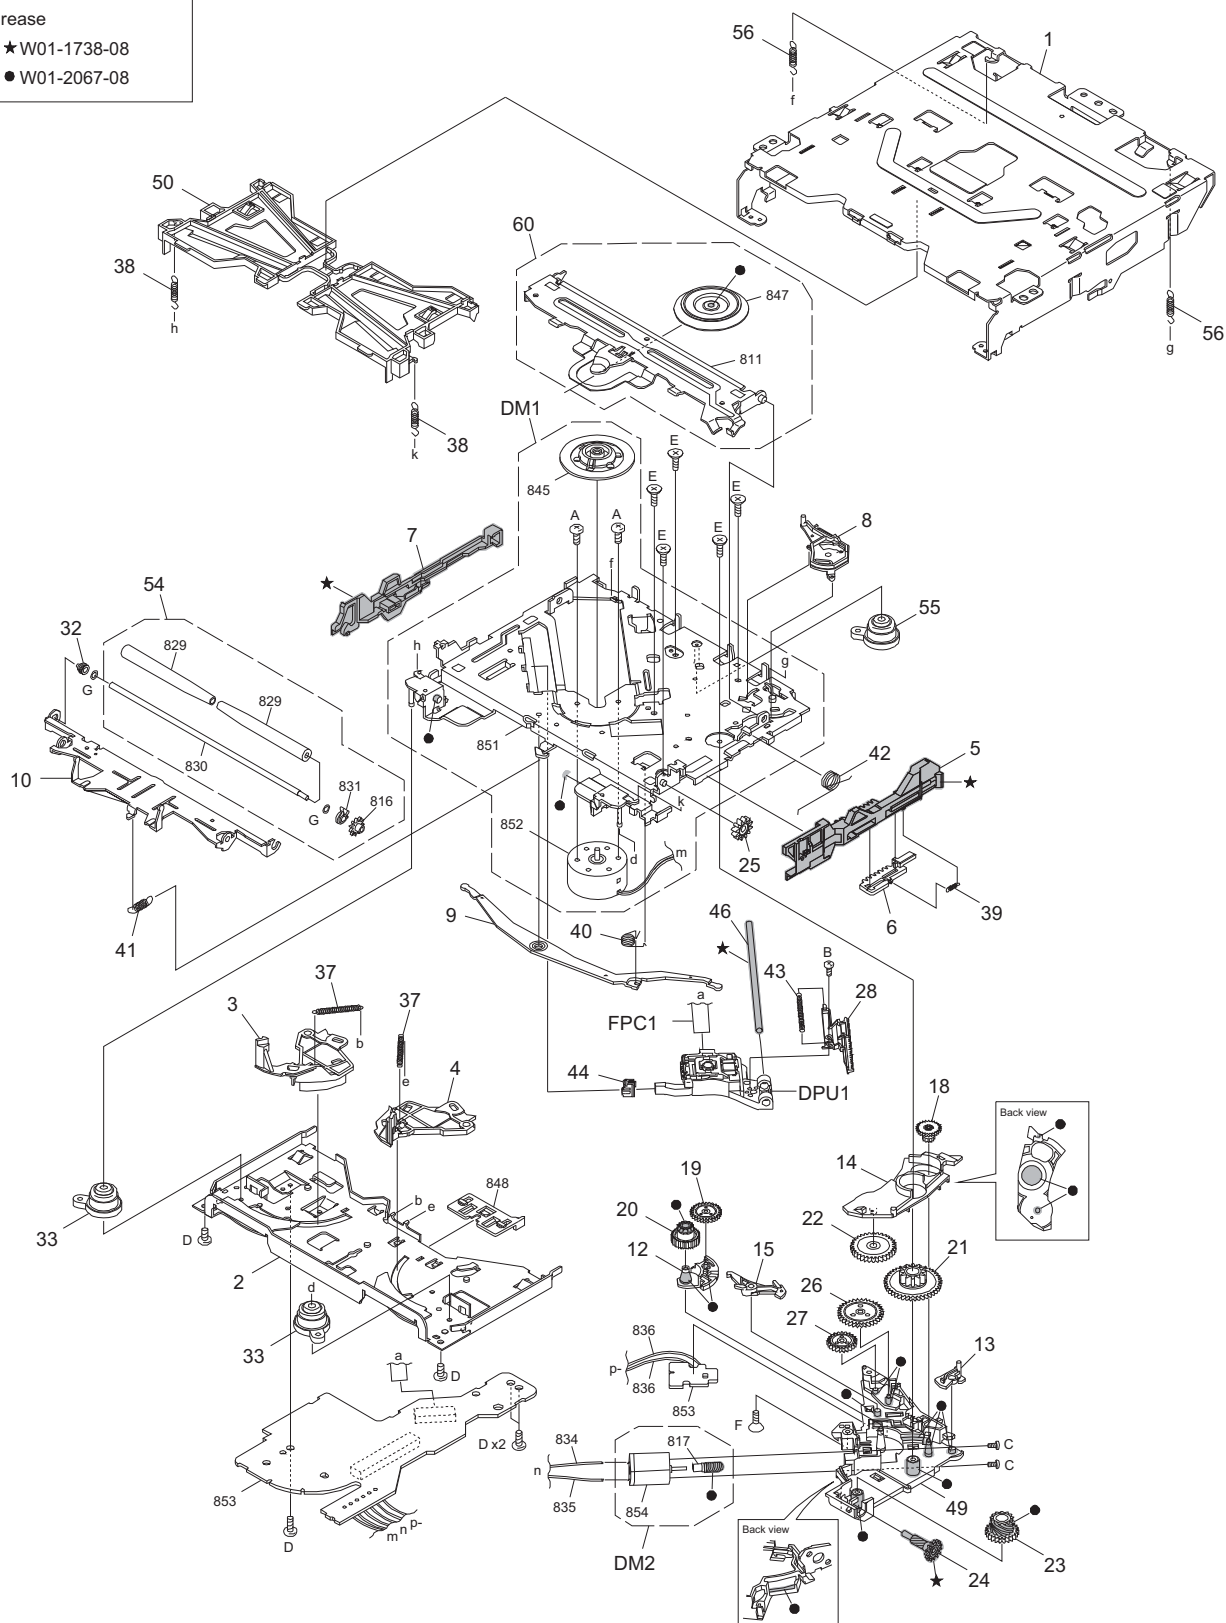

Parts with the exploded numbers larger than 800 are not supplied.

No.WA152

created date:2015-01-08

MODEL	MARK	MODEL	MARK
DPX501BT	K0	DPX501BT	R1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (CD MECHANISM: FC2-2A00NXN) <MBMM>						
	DM1	CM-FC2-MD	MD CHASSIS ASSY		1	
	DM2	CM-FC2-M	LOADING MOTOR ASSY		1	
△	DPU1	QAL1521-001	PICK UP		1	
	FPC1	QAL1465-001	FPC		1	
	A	LV45568-001A	MINI SCREW		2	
	B	QYSPSGT1745ZA	TAP SCREW	M1.7 x 4.5mm	1	
	C	QYSPSPT2025MA	SCREW	M2 x 2.5mm	2	
	D	VKZ4539-054	MINI SCREW		5	
	E	LV45818-001A	G.HOLDER SCREW		5	
	F	LV45815-001A	M. SHAFT SCREW		1	
	G	LV45816-001A	ROLLER WASHER		2	
	1	LV11877-003A	OUTER CHASSIS		1	
	2	LV11878-002A	LOWER CHASSIS		1	
	3	LV3A174-001A	DISC ARM L		1	
	4	LV3A175-001A	DISC ARM R		1	
	5	LV23057-001A	SLIDER R		1	
	6	LV3A178-001A	TRIGGER SLIDER		1	
	7	LV23058-001A	SLIDER L		1	
	8	LV3A179-002A	TRIGGER ARM		1	
	9	LV3A173-001A	JOINT LEVER		1	
	10	LV23055-002A	ROLLER LEVER		1	
	12	LV3A181-001A	TRANSFER ARM		1	
	13	LV45797-002A	SL LOCK CAM		1	
	14	LV3A182-003A	SL LOCK ARM		1	
	15	LV3A183-001A	PICK LOCK ARM		1	
	18	LV3A187-002A	HELICAL GEAR 1		1	
	19	LV3A188-001A	TRANSFER GEAR		1	
	20	LV3A189-001A	LOAD GEAR H		1	
	21	LV3A190-001A	DRIVE GEAR		1	
	22	LV3A191-001A	JOINT GEAR		1	
	23	LV3A192-001A	WORM GEAR 2		1	
	24	LV3A193-001A	HELICAL GEAR 2		1	
	25	LV3A194-001A	LOAD GEAR V		1	
	26	LV3A195-001A	PICK GEAR 1		1	
	27	LV3A196-001A	PICK GEAR 2		1	
	28	LV3A197-001A	RACK GEAR		1	
	32	LV45796-001A	R.RETAINER L		1	
	33	D39-0403-05	DAMPER		2	
	37	LV45808-001A	DISC ARM SPRING		2	
	38	LV45809-001A	FLOAT SPRING(F)		2	
	39	LV45810-001A	TRIGGER SPRING		1	
	40	LV45811-001A	LOAD SPRING		1	
	41	LV45812-001A	ROLLER SPRING		1	
	42	LV45813-001A	CLAMP SPRING		1	
	43	LV45814-001A	PICK SPRING		1	
	44	LV36813-201A	SUB GUIDE CAP		1	
	46	LV44555-001A	MAIN SHAFT		1	
	49	LV11881-002A	GEAR HOLDER		1	
	50	LV11880-003A	DISC GUIDE		1	
	54	CM-FC2-R	ROLLER ASSY		1	
	55	D39-0404-05	DAMPER		1	
	56	LV45835-001A	FLOAT SPRING(R)		2	
	60	LV3A271-001A	CL BASE ASSY		1	

EXPLODED VIEW (CD MECHANISM: X92-6820-01)


Block No.MCMM

The differences between X92-6820-01 and FC2-2A00NXN,
please refer to SECTION 2 "How to identify the CD mechanism ASSY".

Grease

★ W01-1738-08

● W01-2067-08

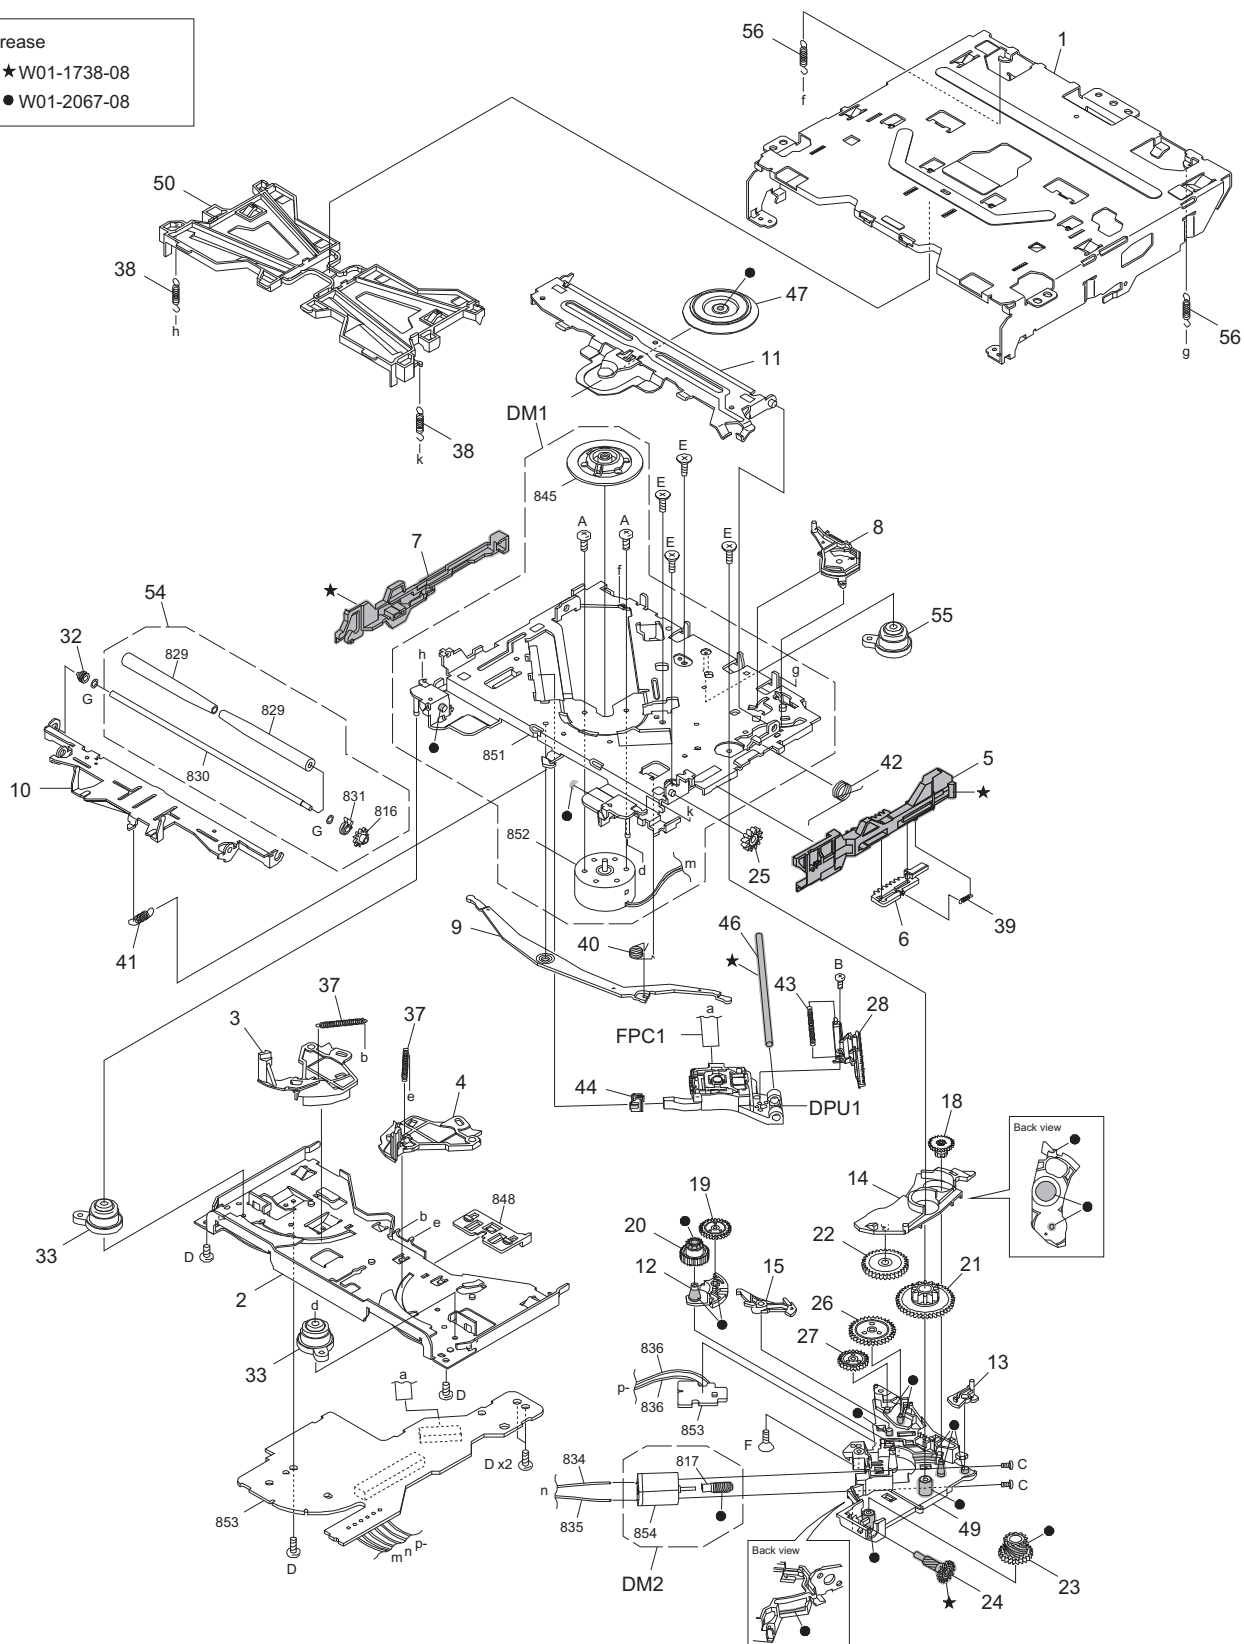

Parts with the exploded numbers larger than 800 are not supplied.

MODEL	MARK	MODEL	MARK
DPX501BT	K0	DPX501BT	R1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (CD MECHANISM: X92-6820-01) <MCMM>						
	DM1	CM-FC2-MD	MD CHASSIS ASSY		1	
	DM2	CM-FC2-M	LOADING MOTOR ASSY		1	
△	DPU1	QAL1521-001	PICK UP		1	
	FPC1	QAL1465-001	FPC		1	
	A	LV45568-001A	MINI SCREW		2	
	B	QYSPSGT1745ZA	TAP SCREW	M1.7 x 4.5mm	1	
	C	QYSPSPT2025MA	SCREW	M2 x 2.5mm	2	
	D	N09-6108-15	TAPTITE SCREW		5	
	E	N09-6738-15	TAPTITE SCREW		4	
	F	N09-6921-05	TAPTITE SCREW		1	
	G	N19-2356-04	FLAT WASHER		2	
	1	A10-5625-21	OUTER CHASSIS		1	
	2	A10-5626-01	LOWER CHASSIS		1	
	3	D10-7174-03	DISC ARM L		1	
	4	D10-7175-03	DISC ARM R		1	
	5	D10-7177-02	SLIDER R		1	
	6	D10-7178-03	TRIGGER SLIDER		1	
	7	D10-7179-02	SLIDER L		1	
	8	D10-7180-03	TRIGGER ARM		1	
	9	D10-7181-13	JOINT LEVER		1	
	10	D10-7182-12	ROLLER LEVER		1	
	11	D10-7183-02	CLAMP ARM		1	
	12	D10-7184-03	TRANSFER ARM		1	
	13	D10-7185-04	SL LOCK CAM		1	
	14	D10-7186-03	SL LOCK ARM		1	
	15	D10-7187-13	PICK LOCK ARM		1	
	18	D13-3104-04	HELICAL GEAR 1		1	
	19	D13-3105-04	TRANSFER GEAR		1	
	20	D13-3106-04	LOAD GEAR H		1	
	21	D13-3107-04	DRIVE GEAR		1	
	22	D13-3108-04	JOINT GEAR		1	
	23	D13-3109-04	WORM GEAR 2		1	
	24	D13-3110-04	HELICAL GEAR 2		1	
	25	D13-3111-04	LOAD GEAR V		1	
	26	D13-3112-04	PICK GEAR 1		1	
	27	D13-3113-04	PICK GEAR 2		1	
	28	D13-3114-03	RACK GEAR		1	
	32	D23-0974-14	R.RETAINER L		1	
	33	D39-0403-05	DAMPER F		2	
	37	G01-4810-04	DISC ARM SPRING		2	
	38	G01-4829-04	FLOAT SPRING(F)		2	
	39	G01-4813-04	TRIGGER SPRING		1	
	40	G01-4814-04	LOAD SPRING		1	
	41	G01-4815-04	ROLLER SPRING		1	
	42	G01-4816-04	CLAMP SPRING		1	
	43	G01-4817-04	PICK SPRING		1	
	44	LV36813-501A	SUB GUIDE CAP		1	
	46	LV44555-001A	MAIN SHAFT		1	
	47	J11-0692-03	CLAMPER		1	
	49	J19-7360-21	GEAR HOLDER		1	
	50	J90-1209-21	DISC GUIDE		1	
	54	CM-FC2-R	ROLLER ASSY		1	
	55	D39-0404-05	DAMPER R		1	
	56	G01-4812-04	FLOAT SPRING(R)		2	

MODEL	MARK	MODEL	MARK
DPX501BT	K0	DPX501BT	R1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
MAIN PWB ASSY (XJ1-071x-xx) <01>						
	IC161	TDA7720B-X	IC		1	
△	IC301	JCV8034	IC		1	
	IC411	MFI337S3959-X	IC		1	
△	IC540	MN6627553APA	IC		1	
△	IC601	TEF6657HN-X	IC		1	
△	IC701	R5S726A0D216FP	IC		1	
△	IC821	W3F-0005-00	IC		1	
	IC831	BU4228F-W	IC		1	
	IC841	BR24T02FJ-W-X	IC		1	
	IC851	BU1CTD3WG-W	IC		1	
	IC860	MP9942GJ	ANALOG IC		1	
	IC890	NCP380HSNAJAA-X	IC		1	
△	IC901	LV5685PV-H	ANALOG IC		1	
	IC941	BU33TD3WG-W	IC		1	
	Q220	LSCR523UBFS8	TRANSISTOR		1	
	Q250	LTC043TEB-X	DIGI TRANSISTOR		1	
	Q270	LTA024EEB-X	DIGI TRANSISTOR		1	
	Q271	LSAR523UBFS8	TRANSISTOR		1	
	Q272	LTC024EEB-X	DIGI TRANSISTOR		1	
	Q273	LTA024EEB-X	DIGI TRANSISTOR		1	
	Q320	LTC043TEB-X	DIGI TRANSISTOR		1	
	Q330	LTC043TEB-X	DIGI TRANSISTOR		1	
	Q340	LTC043TEB-X	DIGI TRANSISTOR		1	
	Q350	LTC043TEB-X	DIGI TRANSISTOR		1	
	Q470	LTC014EEBFS8	DIGI TRANSISTOR		1	
	Q471	LTC043TEB-X	DIGI TRANSISTOR		1	
	Q540	2SA2188/E/-X	TRANSISTOR		1	
	Q701	LTA014YEB-X	DIGI TRANSISTOR		1	
	D100	RSB6.8SM-X	BP Z DIODE		1	
	D101	RSB6.8SM-X	BP Z DIODE		1	
	D231	DZ2J056M	ZENER DIODE		1	
	D270	BAW56-TP-X	SI DIODE		1	
	D271	BAW56-TP-X	SI DIODE		1	
	D273	DA2J101	DIODE		1	
	D370	BAW56-TP-X	SI DIODE		1	
	D390	MBRX130	SCHOTTKY DIODE		1	
	D391	MBRX130	SCHOTTKY DIODE		1	
	D400	RB521SM-30-X	SB DIODE		1	
	D401	DZ2J051M	ZENER DIODE		1	
	D471	RSB6.8SM-X	BP Z DIODE		1	
	D472	RSB6.8SM-X	BP Z DIODE		1	
	D473	RSB6.8SM-X	BP Z DIODE		1	
	D474	RSB6.8SM-X	BP Z DIODE		1	
	D475	DZ2J068M	ZENER DIODE		1	
	D476	DZ2J068M	ZENER DIODE		1	
	D603	F0K-0014-00	SURGE ABSORBER		1	
	D861	DB22306	SCHOTTKY DIODE		1	
	D902	SK34A-L-X	SB DIODE		1	
	D903	SK34A-L-X	SB DIODE		1	
△	D990	1N5401-BPC04	SI DIODE		1	
	D1002	DZ2J062M	ZENER DIODE		1	
	D1003	DZ2J062M	ZENER DIODE		1	
	D1220	DZ2J062M	ZENER DIODE		1	
	D1800	F0K-0014-00	SURGE ABSORBER		1	R1
	C100	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C101	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C102	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C103	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C104	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C105	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C161	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C162	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C163	CD04AV1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C164	CD04AV1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C169	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C170	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C171	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C172	CD04AS1C220M	E CAPACITOR	22uF 16V M	1	
	C173	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	
	C177	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C222	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C223	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C224	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C229	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C251	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	
	C304	CD04AV1C470M	E CAPACITOR	47uF 16V M	1	
	C311	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C312	CK730AV1C105K	C CAPACITOR	1uF 16V K	1	
	C313	CK73FXR1A475K	C CAPACITOR	4.7uF 10V K	1	
	C316	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	
	C317	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	
	C318	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	
	C319	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	
	C321	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	
	C331	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	
	C341	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	
	C351	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	
	C370	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C390	CK73FBB1H224K	C CAPACITOR	0.22uF 50V K	1	
	C410	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C472	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	

MODEL			MARK	MODEL	MARK	
DPX501BT			K0	DPX501BT	R1	
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C473	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C474	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C475	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C510	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C540	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C541	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C542	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C544	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C545	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C546	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	
	C547	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	
	C548	CK73FXR1A475K	C CAPACITOR	4.7uF 10V K	1	
	C549	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C550	CK73GBB1C154K	C CAPACITOR	0.15uF 16V K	1	
	C552	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	
	C553	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C555	CK73GBB1H223K	C CAPACITOR	0.022uF 50V K	1	
	C556	CK73GBB1H332K	C CAPACITOR	3300pF 50V K	1	
	C557	CK73GBB1A334K	C CAPACITOR	0.33uF 10V K	1	
	C558	CK73FXR1A475K	C CAPACITOR	4.7uF 10V K	1	
	C559	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C560	CK73GBB1H681K	C CAPACITOR	680pF 50V K	1	
	C561	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C562	CK73GBB1H153K	C CAPACITOR	0.015uF 50V K	1	
	C563	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C564	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C565	CK73GBB1E823K	C CAPACITOR	0.082uF 25V K	1	
	C567	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C568	CK73GBB1A334K	C CAPACITOR	0.33uF 10V K	1	
	C570	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C571	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C572	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C573	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C576	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C577	CC73GCH1H100D	C CAPACITOR	10pF 50V D	1	
	C578	CC73GCH1H120J	C CAPACITOR	12pF 50V J	1	
	C579	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C583	CK73GBB1H821K	C CAPACITOR	820pF 50V K	1	
	C584	CK73GBB1H821K	C CAPACITOR	820pF 50V K	1	
	C588	CK73GBB1H681K	C CAPACITOR	680pF 50V K	1	
	C589	CK73GBB1H681K	C CAPACITOR	680pF 50V K	1	
	C601	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C602	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C603	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C604	CK73GBB1H152K	C CAPACITOR	1500pF 50V K	1	
	C605	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C606	CC73GCH1H090D	C CAPACITOR	9pF 50V D	1	
△	C607	CC73GCH1H010C	C CAPACITOR	1pF 50V C	1	
	C608	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C609	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
△	C610	CC73GCH1H120J	C CAPACITOR	12pF 50V J	1	
	C611	CC73GCH1H010C	C CAPACITOR	1pF 50V C	1	
	C612	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C614	CC73GCH1H220J	C CAPACITOR	22pF 50V J	1	
	C615	CC73GCH1H330J	C CAPACITOR	33pF 50V J	1	
	C616	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C617	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	
	C619	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C700	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C701	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C702	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C703	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C704	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C705	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C706	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C707	CC73GCH1H090D	C CAPACITOR	9pF 50V D	1	
	C708	CC73GCH1H090D	C CAPACITOR	9pF 50V D	1	
	C709	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C710	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C711	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C712	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C713	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C716	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C717	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C718	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C724	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	
	C820	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C821	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C830	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	
	C831	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C832	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C840	CK73GBB1C473K	C CAPACITOR	0.047uF 16V K	1	
	C850	CK73GBB1C474K	C CAPACITOR	0.47uF 16V K	1	
	C851	CK73GBB1C474K	C CAPACITOR	0.47uF 16V K	1	
	C852	CD04AS0J101M	E CAPACITOR	100uF 6.3V M	1	
	C861	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C862	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C863	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	
	C864	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	
	C865	CK73EXR1A106K	C CAPACITOR	10uF 10V K	1	
	C866	CK73EXR1A106K	C CAPACITOR	10uF 10V K	1	
	C867	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	

MODEL	MARK	MODEL	MARK
DPX501BT	K0	DPX501BT	R1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C868	QE20850-157Z	E CAPACITOR	150uF	1	
	C869	CC73GCH1H150J	C CAPACITOR	15pF 50V J	1	
	C870	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C890	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C891	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C904	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C905	CD04AR1C471M	E CAPACITOR	470uF 16V M	1	
	C907	CD04AS0J101M	E CAPACITOR	100uF 6.3V M	1	
	C908	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C909	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C911	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C914	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C915	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C940	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C941	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C942	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C990	CD04EU1C222M2	E CAPACITOR	2200uF 16V M	1	
	C1000	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C1001	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C1003	CK73EXR1A106K	C CAPACITOR	10uF 10V K	1	
	C1004	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C1005	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C1007	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C1010	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	R1
	C1011	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	R1
	C1012	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	R1
	C1013	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	R1
	C1014	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	R1
	C1015	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	R1
	C1016	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	R1
	C1017	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	R1
	C1024	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C1040	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C1041	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C1042	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C1044	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C1045	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C1047	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C1051	CC73GCH1H050C	C CAPACITOR	5pF 50V C	1	
	C1066	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C1067	CC73GCH1H821J	C CAPACITOR	820pF 50V J	1	K0
	C1067	CC73GCH1H560J	C CAPACITOR	56pF 50V J	1	R1
	C1069	CC73GCH1H050C	C CAPACITOR	5pF 50V C	1	
	C1078	CC73GCH1H050C	C CAPACITOR	5pF 50V C	1	
	C1079	CC73GCH1H050C	C CAPACITOR	5pF 50V C	1	
	C1091	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C1092	CK73GBB1H333K	C CAPACITOR	0.033uF 50V K	1	
	C1093	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	
	C1094	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	
	C1103	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C1104	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C1106	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C1107	CC73GCH1H090D	C CAPACITOR	9pF 50V D	1	
	C1110	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C1224	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C1225	CK73GBB1H222K	C CAPACITOR	2200pF 50V K	1	
	C1226	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	
	C1901	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	R100	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R103	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R104	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R158	RK73GB2A910J	MG RESISTOR	91Ω 1/10W J	1	
	R159	RK73GB2A910J	MG RESISTOR	91Ω 1/10W J	1	
	R162	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R164	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R168	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R169	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R170	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R171	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	
	R220	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R221	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R223	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R224	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R225	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R226	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R227	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R239	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R240	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	
	R250	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	
	R251	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	
	R252	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	
	R253	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R270	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	
	R271	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	
	R273	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	
	R302	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R303	RK73GB2A5R1J	MG RESISTOR	5.1Ω 1/10W J	1	
	R304	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R320	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	
	R321	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	
	R323	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	
	R330	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	
	R331	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	

MODEL			MARK	MODEL	MARK	
DPX501BT			K0	DPX501BT	R1	
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R333	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	
	R340	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	
	R341	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	
	R342	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R343	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	
	R350	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	
	R351	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	
	R353	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	
	R370	RK73GB2A683J	MG RESISTOR	68kΩ 1/10W J	1	
	R371	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	1	
	R372	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	
	R390	RK73EB2E472J	MG RESISTOR	4.7kΩ 1/4W J	1	
	R400	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R402	RK73GB2A225J	MG RESISTOR	2.2MΩ 1/10W J	1	
	R410	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R411	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R412	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R413	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R414	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R470	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	
	R471	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R472	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R476	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	
	R477	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R478	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R482	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R483	RK73EB2E221J	MG RESISTOR	220Ω 1/4W J	1	
	R541	RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	1	
	R542	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	
	R543	RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	1	
	R544	RK73GB2A183J	MG RESISTOR	18kΩ 1/10W J	1	
	R546	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	
	R548	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	1	
	R550	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R551	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R554	RK73GB2A225J	MG RESISTOR	2.2MΩ 1/10W J	1	
	R556	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R557	RK73FB2B4R7J	MG RESISTOR	4.7Ω 1/8W J	1	
	R558	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1	
	R559	RK73GB2A272J	MG RESISTOR	2.7kΩ 1/10W J	1	
	R562	RK73EB2E823J	MG RESISTOR	82kΩ 1/4W J	1	
	R565	RK73GB2A121J	MG RESISTOR	120Ω 1/10W J	1	
	R567	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R569	RK73EB2E102J	MG RESISTOR	1kΩ 1/4W J	1	
	R570	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R571	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	
	R572	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R573	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	
	R579	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R580	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R587	RK73GB2A150J	MG RESISTOR	15Ω 1/10W J	1	
	R589	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1	
	R590	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1	
	R600	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R601	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R602	RK73GB2A820J	MG RESISTOR	82Ω 1/10W J	1	
	R603	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	
	R604	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	
	R605	RK73GB2A4R7J	MG RESISTOR	4.7Ω 1/10W J	1	
	R611	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R701	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	
	R702	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R703	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	
	R704	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	
	R705	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	
	R707	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	
	R709	RK73GB2A332J	MG RESISTOR	3.3kΩ 1/10W J	1	
	R711	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R713	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R715	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R716	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R717	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	
	R719	RK73GB2A911J	MG RESISTOR	910Ω 1/10W J	1	
	R720	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R721	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R722	RK73GB2A911J	MG RESISTOR	910Ω 1/10W J	1	
	R724	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	
	R725	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R726	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	1	
	R727	RK73GB2A153J	MG RESISTOR	15kΩ 1/10W J	1	
	R728	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	1	
	R729	RK73GB2A153J	MG RESISTOR	15kΩ 1/10W J	1	
	R730	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R731	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R732	RK73GB2A153J	MG RESISTOR	15kΩ 1/10W J	1	
	R733	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	1	
	R734	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	K0
	R734	RK73GB2A153J	MG RESISTOR	15kΩ 1/10W J	1	R1
	R735	RK73GB2A273J	MG RESISTOR	27kΩ 1/10W J	1	K0
	R735	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	1	R1
	R739	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R740	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	

MODEL		MARK	MODEL	MARK		
DPX501BT		K0	DPX501BT	R1		
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R741	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R742	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R743	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R744	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R745	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R746	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R747	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R748	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R749	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R750	RK73GB2A121J	MG RESISTOR	120Ω 1/10W J	1	
	R751	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R752	RK73GB2A121J	MG RESISTOR	120Ω 1/10W J	1	
	R753	RK73EB2E910J	MG RESISTOR	91Ω 1/4W J	1	
	R754	RK73GB2A121J	MG RESISTOR	120Ω 1/10W J	1	
	R755	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R756	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R757	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R758	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R759	RK73EB2E161J	MG RESISTOR	160Ω 1/4W J	1	
	R760	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R761	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R762	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R763	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R764	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R769	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R820	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R821	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R822	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R840	RK73GB2A271J	MG RESISTOR	270Ω 1/10W J	1	
	R841	RK73GB2A271J	MG RESISTOR	270Ω 1/10W J	1	
	R861	RK73GB2A200J	MG RESISTOR	20Ω 1/10W J	1	
	R863	RK73GB2A393J	MG RESISTOR	39kΩ 1/10W J	1	
	R865	RK73GH2A683D	MG RESISTOR	68kΩ 1/10W D	1	
	R866	RK73GH2A203D	MG RESISTOR	20kΩ 1/10W D	1	
	R867	RK73GH2A333D	MG RESISTOR	33kΩ 1/10W D	1	
	R868	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R890	RK73GH2A203D	MG RESISTOR	20kΩ 1/10W D	1	
	R901	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R902	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R903	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R904	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	
	R905	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	
	R906	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	
	R907	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	
	R940	RK73EB2E1R0J	MG RESISTOR	1Ω 1/4W J	1	
	R1002	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1003	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R1023	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R1024	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R1025	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R1035	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1036	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R1040	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1041	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1043	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1049	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1051	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R1053	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R1055	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R1057	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R1059	RK73GH2A100D	MG RESISTOR	10Ω 1/10W D	1	
	R1064	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R1065	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R1068	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1069	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1070	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R1071	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1073	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1075	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R1077	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R1078	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R1080	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1081	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1082	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R1083	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1092	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R1107	RK73GH2A100D	MG RESISTOR	10Ω 1/10W D	1	
	R1700	RK73GB2A183J	MG RESISTOR	18kΩ 1/10W J	1	
	R1861	RK73EB2E221J	MG RESISTOR	220Ω 1/4W J	1	
	R1862	RK73EB2E201J	MG RESISTOR	200Ω 1/4W J	1	
	R1863	RK73EB2E201J	MG RESISTOR	200Ω 1/4W J	1	
	RA471	RK74GB1J100J	NET RESISTOR	10Ω 1/16W J	1	
	RA540	RK74GB1J471J	NET RESISTOR	470Ω 1/16W J	1	
	L220	LR73Z0AD470M	CHIP INDUCTOR	47uH	1	
	L221	NQR0713-001X	FERRITE BEADS		1	
	L222	NQR0713-001X	FERRITE BEADS		1	
	L223	LR73Z0AD470M	CHIP INDUCTOR	47uH	1	
	L540	NQR0713-001X	FERRITE BEADS		1	
	L574	NQR0713-001X	FERRITE BEADS		1	
	L601	LK73G0BE4R7K	M.CHIP INDUCTOR		1	
	L602	LK73G0BER47K	M.CHIP INDUCTOR		1	
	L603	NQLM93K-R10X	INDUCTOR	0.1uH K	1	

MODEL	MARK	MODEL	MARK
DPX501BT	K0	DPX501BT	R1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	L604	LK73G0BE1R0K	M.CHIP INDUCTOR		1	
	L605	LK73G0BER22K	M.CHIP INDUCTOR		1	
	L606	LK73G0BER12K	M.CHIP INDUCTOR		1	
	L607	LK73G0BER15K	M.CHIP INDUCTOR		1	
	L611	LR73Z0AD220M	CHIP INDUCTOR	22uH	1	
	L700	NQR0713-001X	FERRITE BEADS		1	
	L701	NQR0714-001X	FERRITE BEADS		1	
	L709	NQR0713-001X	FERRITE BEADS		1	
	L710	NQR0713-001X	FERRITE BEADS		1	
	L777	NQR0713-001X	FERRITE BEADS		1	
	L778	NQR0713-001X	FERRITE BEADS		1	
	L820	NQR0713-001X	FERRITE BEADS		1	
	L821	NQR0713-001X	FERRITE BEADS		1	
	L822	NQR0713-001X	FERRITE BEADS		1	
	L823	NQR0713-001X	FERRITE BEADS		1	
	L824	NQR0713-001X	FERRITE BEADS		1	
	L825	LB73G0CA-002	CHIP FERRITE		1	
	L826	LB73G0CK-001	CHIP FERRITE		1	
	L827	NQR0714-001X	FERRITE BEADS		1	
	L850	LR73Z0AD4R7M	CHIP INDUCTOR	4.7uH	1	
	L860	NQLL6EM-100X	INDUCTOR	10uH M	1	
	L861	NQLH65M-4R7X	INDUCTOR	4.7uH M	1	
	L990	QQR1927-001	CHOKE COIL		1	
	L1000	NQR0713-001X	FERRITE BEADS		1	
	L1701	NQR0713-001X	FERRITE BEADS		1	
	CN220	QGA2001C1-02	W TO B CONNE	W-B (1-2)	1	
	CN221	QGF1040C1-11	FFC/FPC CONNE	FFC/FPC (1-11)	1	
	CN502	QGF1040C1-24	FFC/FPC CONNE	FFC/FPC (1-24)	1	
	CN701	QGB1004K2-20W	B TO B CONNE	B-B (1-20)	1	
	CN990	QNZ0607-001	CAR CONNECTOR		1	
	J321	QNN0866-001	PIN JACK		1	
	J470	QNZ0907-001	CIR CONNECTOR		1	
	J600	QNB0356-001	ANT TERMINAL		1	
	X540	NAX1224-001X	CRYSTAL		1	
	X600	QAX0969-001Z	CRYSTAL		1	
	X701	NAX1243-001X	CRYSTAL		1	
SWITCH PWB ASSY (XJ6-0420-10) <02>						
	IC1	BU97530KV-M-X	IC		1	
	IC90	SIR8630B6T	IR DETECT UNIT		1	
	Q1	LSCR523UBFS8	TRANSISTOR		1	
	Q51	LSCR523UBFS8	TRANSISTOR		1	
	Q52	LSCR523UBFS8	TRANSISTOR		1	
	Q53	LSCR523UBFS8	TRANSISTOR		1	
	D1	DZ2J056M	ZENER DIODE		1	
	D2	MBRX130	SCHOTTKY DIODE		1	
	D20	SML-D12V8WT	LED		1	
	D21	LRTBGFTG/Z1Z1X	LED		1	
	D22	LRTBGFTG/Z1Z1X	LED		1	
	D23	LRTBGFTG/Z1Z1X	LED		1	
	D24	LRTBGFTG/Z1Z1X	LED		1	
	D25	LRTBGFTG/Z1Z1X	LED		1	
	D26	LRTBGFTG/Z1Z1X	LED		1	
	D27	LRTBGFTG/Z1Z1X	LED		1	
	D28	LRTBGFTG/Z1Z1X	LED		1	
	D29	LRTBGFTG/Z1Z1X	LED		1	
	D40	NESM026DT-W	LED		1	
	D80	DZ2J051M	ZENER DIODE		1	
	D81	DZ2J051M	ZENER DIODE		1	
	C1	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C5	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C6	CK73EXR1C106K	C CAPACITOR	10uF 16V K	1	
	C9	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C60	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C61	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C80	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	
	C81	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	
	C82	CK73EXR1C106K	C CAPACITOR	10uF 16V K	1	
	C83	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C84	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C85	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C86	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C90	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	R1	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R2	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R3	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R4	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R5	RK73FB2B331J	MG RESISTOR	330Ω 1/8W J	1	
	R6	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R7	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R18	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R22	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R23	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R24	RK73GB2A751J	MG RESISTOR	750Ω 1/10W J	1	
	R25	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R27	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R28	RK73GB2A751J	MG RESISTOR	750Ω 1/10W J	1	
	R30	RK73EB2E471J	MG RESISTOR	470Ω 1/4W J	1	
	R31	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R32	RK73GB2A751J	MG RESISTOR	750Ω 1/10W J	1	
	R34	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R35	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R36	RK73EB2E751J	MG RESISTOR	750Ω 1/4W J	1	
	R38	RK73EB2E821J	MG RESISTOR	820Ω 1/4W J	1	
	R39	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	

MODEL	MARK	MODEL	MARK
DPX501BT	K0	DPX501BT	R1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
R40		RK73FB2B102J	MG RESISTOR	1kΩ 1/8W J	1	
R45		RK73FB2B122J	MG RESISTOR	1.2kΩ 1/8W J	1	
R46		RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	
R47		RK73FB2B122J	MG RESISTOR	1.2kΩ 1/8W J	1	
R48		RK73FB2B122J	MG RESISTOR	1.2kΩ 1/8W J	1	
R49		RK73FB2B122J	MG RESISTOR	1.2kΩ 1/8W J	1	
R51		RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
R52		RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
R53		RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
R60		RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	1	
R61		RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	1	
R62		RK73FB2B4R7J	MG RESISTOR	4.7Ω 1/8W J	1	
R70		RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
R80		RK73EB2E221J	MG RESISTOR	220Ω 1/4W J	1	
R1006		RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
R1007		RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
R1009		RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
RA1		RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	
RA2		RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	
RA3		RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	
CN1		QGB1004J2-20X	B TO B CONNE	B-B (1-20)	1	
FL80		NQR0704-001X	CHOKE COIL		1	
J60		QNS0320-001	3.5 JACK		1	
J80		QNZ1076-001	USB CONNECTOR		1	
S1		NSW0246-001X	TACT SWITCH		1	
S2		NSW0246-001X	TACT SWITCH		1	
S3		NSW0246-001X	TACT SWITCH		1	
S4		NSW0246-001X	TACT SWITCH		1	
S5		NSW0246-001X	TACT SWITCH		1	
S6		NSW0246-001X	TACT SWITCH		1	
S7		NSW0246-001X	TACT SWITCH		1	
S8		NSW0246-001X	TACT SWITCH		1	
S9		NSW0246-001X	TACT SWITCH		1	
S10		NSW0246-001X	TACT SWITCH		1	
S11		NSW0246-001X	TACT SWITCH		1	
S12		NSW0246-001X	TACT SWITCH		1	
S13		NSW0246-001X	TACT SWITCH		1	
S14		NSW0246-001X	TACT SWITCH		1	
S15		NSW0246-001X	TACT SWITCH		1	
S16		NSW0246-001X	TACT SWITCH		1	
S17		NSW0246-001X	TACT SWITCH		1	
S18		NSW0246-001X	TACT SWITCH		1	
S20		T9K-0007-00	ROTARY ENCODER		1	
CD MECHA PWB ASSY (LVA20106-01A) <03>						
IC1		BD8266EFV-M-X	IC		1	
C26		CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
C54		NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
C55		CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
R18		RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	1	
R21		RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	1	
R24		RK73GB2A272J	MG RESISTOR	2.7kΩ 1/10W J	1	
R27		RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	1	
R28		RK73GB2A114J	MG RESISTOR	110kΩ 1/10W J	1	
R29		RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
R30		RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
R36		RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
R37		RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
R38		RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
R40		RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
R42		RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
R47		RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
R48		RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
R50		RK73GB2A131J	MG RESISTOR	130Ω 1/10W J	1	
CN1		QGF1044F2-24X	FFC/FPC CONNE	FFC/FPC (1-24)	1	
CN2		QGF0522F6-15W	FFC/FPC CONNE	FFC/FPC (1-15)	1	
SW1		NSW0291-001X	DETECT SWITCH		1	
SW2		NSW0291-001X	DETECT SWITCH		1	
SW3		NSW0313-001X	DETECT SWITCH		1	
CD MECHA PWB ASSY (X32-6680-00) <04>						
IC1		BD8266EFV-M-X	IC		1	
C26		CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
C54		CK73GB1H104K	C CAPACITOR	0.1uF 50V K	1	
C55		CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
R18		RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	1	
R21		RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	1	
R24		RK73GB2A272J	MG RESISTOR	2.7kΩ 1/10W J	1	
R27		RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	1	
R28		RK73GB2A114J	MG RESISTOR	110kΩ 1/10W J	1	
R29		RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
R30		RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
R36		RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
R37		RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
R38		RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
R40		RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
R42		RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
R47		RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
R48		RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
R50		RK73GB2A131J	MG RESISTOR	130Ω 1/10W J	1	
CN1		QGF1044F2-24X	FFC/FPC CONNE	FFC/FPC (1-24)	1	
CN2		E41-3488-05	F.C.CONNECTOR		1	
S1		S6J-0001-00	PUSH SWITCH		1	

MODEL	MARK	MODEL	MARK
DPX501BT	K0	DPX501BT	R1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	S2	S6J-0001-00	PUSH SWITCH		1	
	S3	S6J-0002-00	PUSH SWITCH		1	