


Exploded view of general assembly and parts list

Block No.M1MM

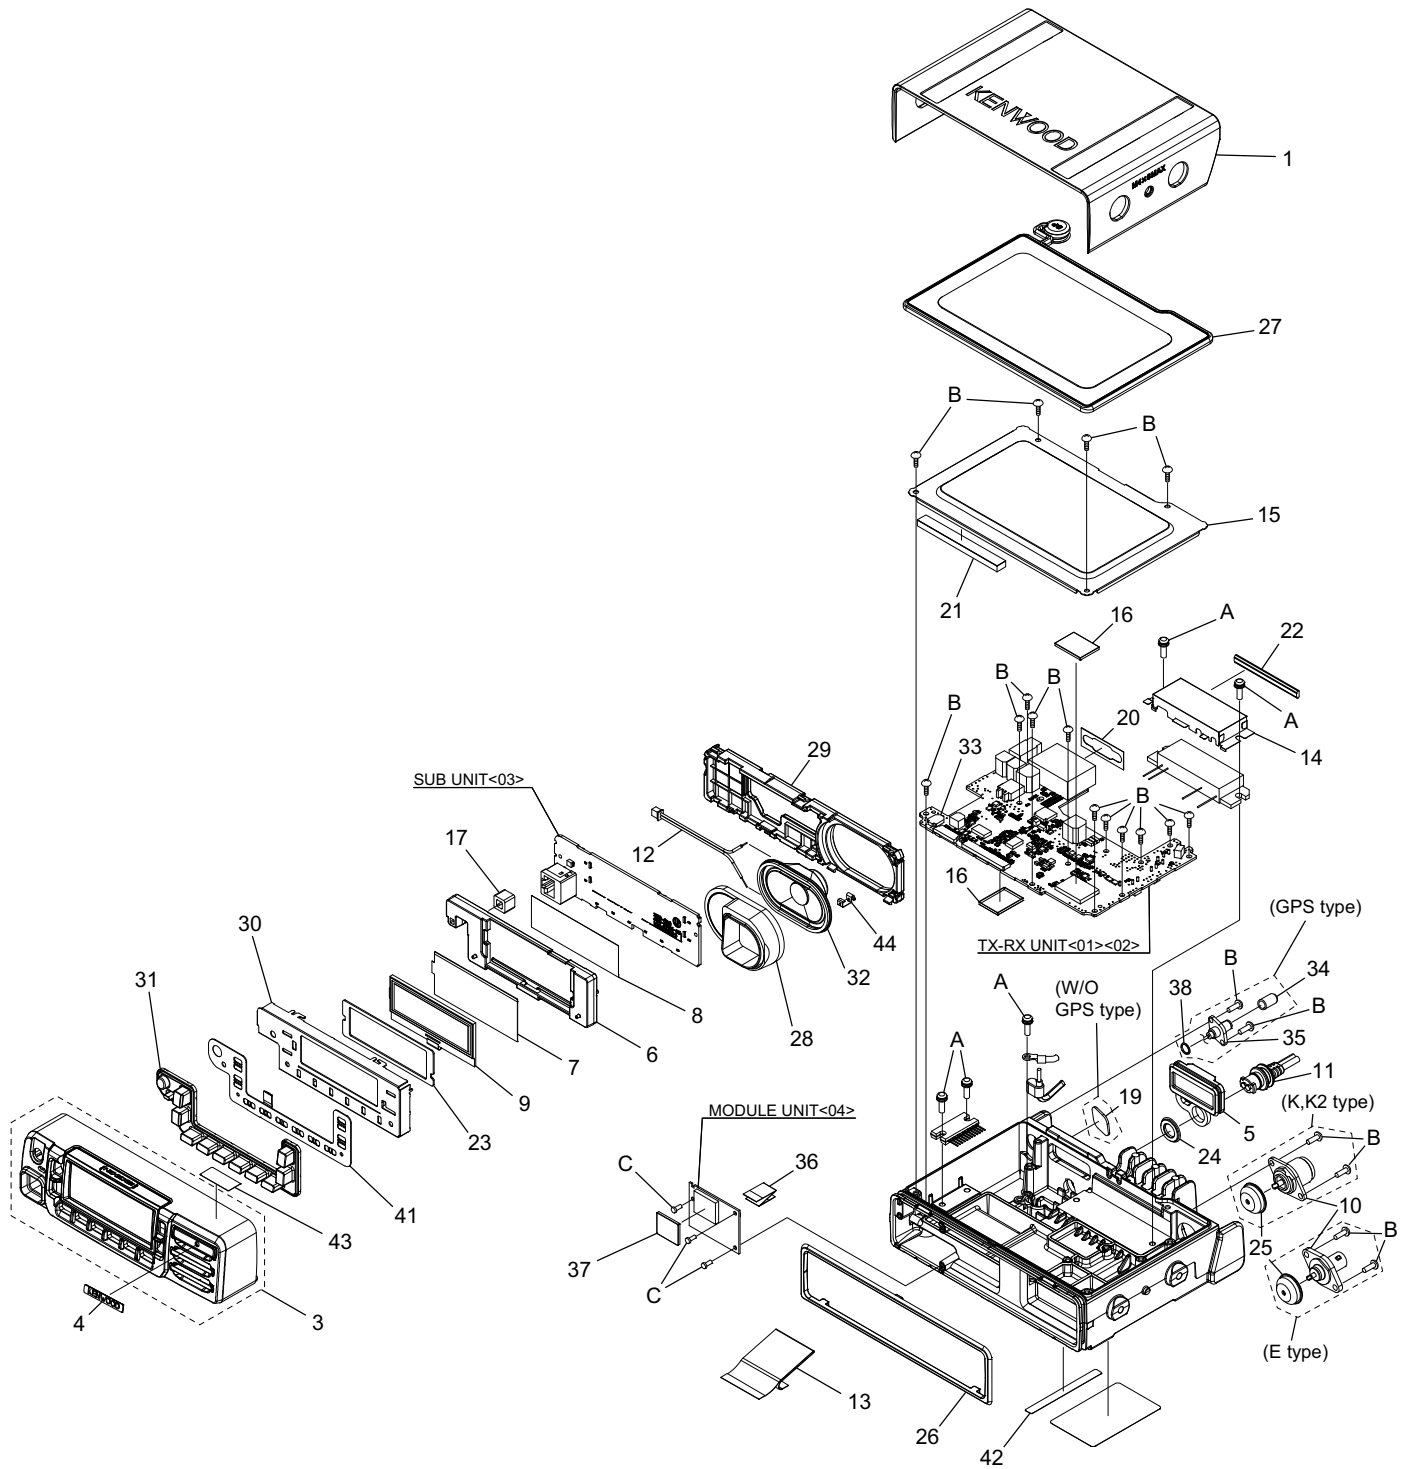


General assembly

Block No. [M][1][M][M]

△ Symbol No.	Part No.	Part Name	Description	Local
1	A0C-0166-00	PLASTIC CABINET		
3	A6C-0067-10	PANEL ASSY		
4	B4D-0044-00	KENWOOD BADGE	PANEL	
5	B09-0732-03	CAP	DSUB	
6	B1B-0101-00	ILL.GUIDE	LCD	
7	B1B-0102-00	OPTI.DIFFUSER	UPPER ILL-GUIDE	
8	B1B-0103-00	REF.SHEET	LOWER ILL-GUIDE	
9	B3H-0058-00	LCD ASSY	304X100 DOT	
10	E04-0454-15	C.RECEPTACLE-BN	ANT BNC	3720E,3720GE,3820E,3820GE
10	E04-0167-15	C.RECEPTACLE-M	ANT M	3720HGK,3720HK,3820HGK,3820HGK2,3820HK,3820HK2
11	E30-7684-35	DC CORD	RADIO	
12	E3A-0390-00	CORD W.CON.	SP	
13	E3G-0042-00	FFC WIRE	60P	
14	F10-3112-13	SHIELDING CASE	PM	
15	F1A-0027-00	SHIELDING PLATE	TOP	
16	F1B-0086-00	SHIELDING COVER	BLS(DCDC,VCO)(x2)	
17	F1E-0040-00	SHADE	TX-BUSY	
19	G11-4578-04	SHEET	W/O GPS	3720E,3720HK,3820E,3820HK,3820HK2
20	G11-4611-04	SHEET	DSUB	
21	G13-1837-04	CUSHION	TOP SHIELD	
22	G13-2101-14	CONDUCT CUSHION	PM	
23	G1D-0191-00	CUSHION	LCD	
24	G53-1643-04	PACKING	DC CORD	
25	G53-1675-04	PACKING	ANT BNC	3720E,3720GE,3820E,3820GE
25	G53-1662-04	PACKING	ANT M	3720HGK,3720HK,3820HGK,3820HGK2,3820HK,3820HK2
26	G53-1820-03	PACKING	FRONT	
27	G5D-0117-00	PACKING	TOP	
28	G5D-0127-00	PACKING	SP	
29	J1K-0456-00	HOLDER	DISP PCB	
30	J2B-0341-00	MOUNTING	LCD	
31	K2K-0242-00	KEY TOP		
32	T07-0757-35	SPEAKER	60HM/5.5W/7W	
33	W09-0971-05	LITHIUM CELL		
34	B09-0754-05	CAP	SMA	3720GE,3720HGK,3820GE,3820HGK,3820HGK2
35	E0E-0003-00	C.RECEPTACLE-SM	SMA	3720GE,3720HGK,3820GE,3820HGK,3820HGK2
36	E3F-0017-10	FLAT CABLE	20P BT/GPS	3720GE,3720HGK,3820GE,3820HGK,3820HGK2
37	F10-3225-05	SHIELDING COVER	BLS(BT/GPS)	3720GE,3720HGK,3820GE,3820HGK,3820HGK2
38	G53-1768-04	PACKING	SMA	3720GE,3720HGK,3820GE,3820HGK,3820HGK2
41	J8C-0018-00	FLEX P.BOARD	KEY	
42	B41-1837-04	CAUTION STICKER	HOT SURFACE	
43	B4B-0008-00	CAUTION STICKER	FCC(PANEL)	3720HGK,3720HK,3820HGK,3820HGK2,3820HK,3820HK2
44	G0B-0104-00	EARTH SPRING	PANEL HOLDER	
A	N67-3010-48	P.H.SEMS SCREW	PM,AMP,DC(GND)(x5)	
B	N87-2608-48	BR.HEAD T.SCREW	PCB,ANT,SMA(x17)	3720E,3720HK,3820E,3820HK,3820HK2
B	N87-2608-48	BR.HEAD T.SCREW	PCB,ANT,SMA(x19)	3720GE,3720HGK,3820GE,3820HGK,3820HGK2
C	N83-2005-48	P.HEAD T.SCREW	BT/GPS(x3)	3720GE,3720HGK,3820GE,3820HGK,3820HGK2
-	XC3-050M-00	SUB UNIT	DISPLAY	
-	XC2-0040-10	MODULE UNIT	BT/GPS	3720GE,3720HGK,3820GE,3820HGK,3820HGK2
-	XCA-033K-00	TX-RX UNIT	SERVICE UNIT	3720HGK,3720HK
-	XCA-033E-01	TX-RX UNIT	SERVICE UNIT	3720E,3720GE
-	XCA-034E-01	TX-RX UNIT	SERVICE UNIT	3820E,3820GE
-	XCA-034K-00	TX-RX UNIT	SERVICE UNIT	3820HGK,3820HK
-	XCA-034K-01	TX-RX UNIT	SERVICE UNIT	3820HGK2,3820HK2

Packing materials and accessories parts list

Block No.M2MM

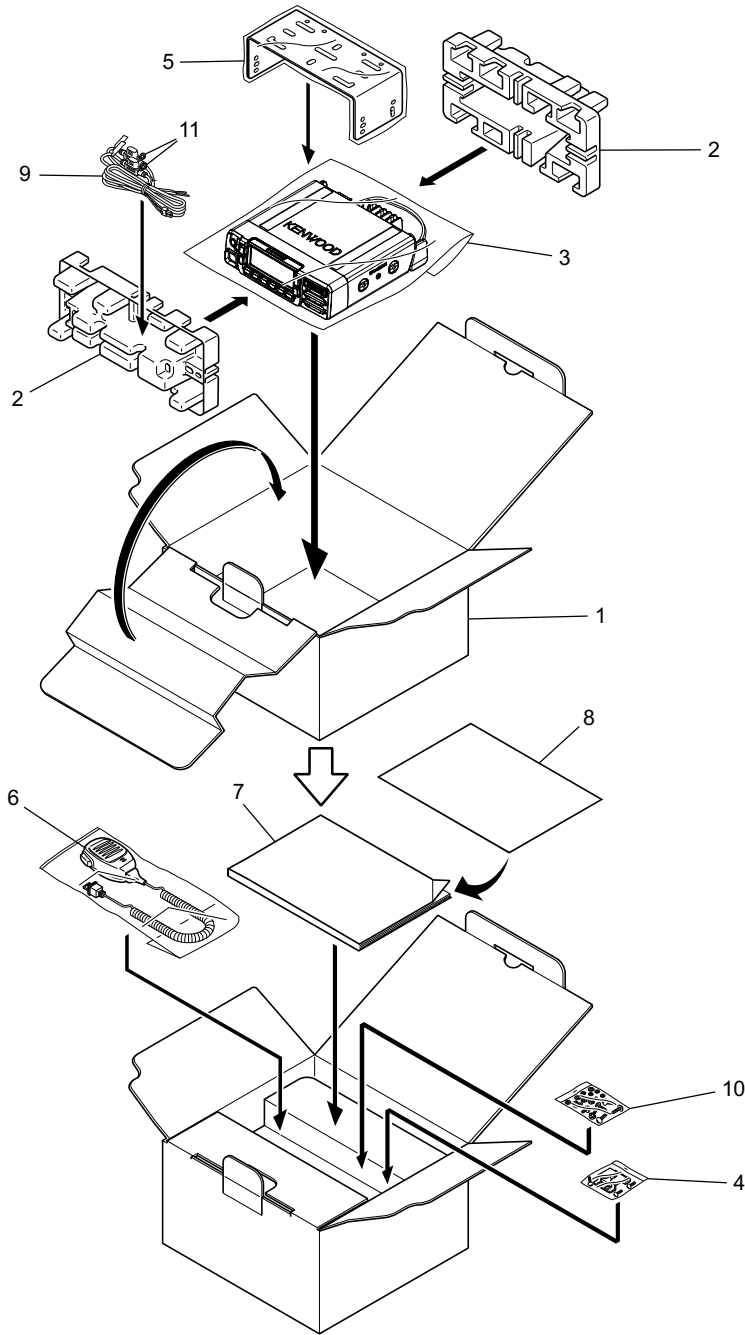

Packing and accessories

Block No. [M][2][M][M]

△ Symbol No.	Part No.	Part Name	Description	Local
1	H5A-0946-00	ITEM CARTON		
2	H1C-0152-00	PACKING FIXTURE	(x2)	
3	-----	PROTECTION BAG		
4	J19-1584-15	HOLDER	ACC	3720HGK,3720HK,3820HGK,3820HGK2,3820HK,3820HK2
5	J29-0726-03	BRACKET	ACC	
6	T91-0639-85	MICROPHONE	KMC-35	3720HGK,3720HK,3820HGK,3820HGK2,3820HK,3820HK2
7	B5A-1680-00	INST.MANUAL	9 LANGUAGES	3720E,3720GE,3820E,3820GE
7	B5A-1562-00	INST.MANUAL	3 LANGUAGES	3720HGK,3720HK,3820HGK,3820HGK2,3820HK,3820HK2
8	-----	PAMPHLET	DOC	3720E,3720GE,3820E,3820GE
9	E30-7523-65	DC CORD ASSY	ACC BLADE	
10	N99-2039-05	SCREW SET	ACC	
11	FZB10AU-150	BLADE FUSE	15A BLADE(ACC)(x2)	

Electrical parts list

TX-RX UNIT

**XC1-182K-00 (NX-3720E,NX-3720GE,
NX-3720HKG,NX-3720HK)**

***Note : This part cannot be replaced. Therefore,
this part is not supplied as a service part.**

Block No. [0][1]

△ Symbol No.	Part No.	Part Name	Description	Local
IC1	BA00DD0WHFP	IC		
IC12	LXDC2HN18F163	IC		
IC13	BU31TD2WNVX	IC		
IC14	TPS61041DRVVR	IC		
IC15	XC6215B122N-G	IC		
IC16	XC6209B502P-G	IC		
IC17	NJM2878F4-32	IC		
IC18	XC61CN5002N-G	IC		
IC19	XC6223D321G-G	IC		
IC20	XC6223D321P-G	IC		
IC21	XC8102AA07-G	IC		
IC22	MSP430G2533P0	IC		
IC23	XC6221D501G-G	IC		
IC24	LXDC2XQ12A-252	IC		
IC25	MP2560DQ-LF-Z	IC		
IC26	XC6221D501G-G	IC		
IC101	NJM2904CRB1	IC		
IC202	BGU6104	IC		
IC203	BA3472FVM	IC		
IC205	AD8315ARM	IC		
IC301	NJG1608KB2	IC		
IC302	AK2401	IC		
IC401	-----	IC	*Note	
IC402	-----	IC	*Note	
IC403	TC7SZ08FE	IC		
IC404	-----	IC	*Note	
IC405	BD11600NUX	IC		
IC406	BD11600NUX	IC		
IC407	TC7SET125FUF	IC		
IC408	TC7SZ08FE	IC		
IC409	TCA9555RTWR	IC		
IC410	ADS7961SRHB	IC		
IC411	DAC124S085CIS	IC		
IC412	R2A20178NP	IC		
IC413	XC61CN5002N-G	IC		
IC414	BU7462NUX	IC		
IC602	TC7WT126FU-F	IC		
IC603	TC7WH126FK	IC		
IC604	TCA9555RTWR	IC		
IC605	ADM3202ARUZ	IC		
IC606	TC7SET125FUF	IC		
IC607	TLV32AIC3104I	IC		
IC608	BU7462NUX	IC		
IC609	XC6221D501G-G	IC		
Q11	LTC014EEBFS8	DIGI TRANSISTOR		
Q12	TPCP8107-F	FET		
Q13	LTC014EEBFS8	DIGI TRANSISTOR		
Q14	LTC014TEBFS8	DIGI TRANSISTOR		
Q15	LSCR523EBFS8	TRANSISTOR		
Q16	LSAR523UBFS8	TRANSISTOR		
Q17	TPCP8107-F	FET		
Q18	LTC014EEBFS8	DIGI TRANSISTOR		
Q19	VT6M1	FET		
Q20	SSM3J334R	FET		
Q21	LTC014EEBFS8	DIGI TRANSISTOR		
Q22	SSM3J334R	FET		
Q23	LTC014EEBFS8	DIGI TRANSISTOR		
Q25	EMD9	DIGI TRANSISTOR		
Q103	EM6M2	FET		
Q104	2SD2654/W/	TRANSISTOR		
Q105	MCH3914-H/8/	FET		
Q106	2SC5108FT/Y/	TRANSISTOR		
Q107	2SC5108FT/Y/	TRANSISTOR		
Q201	RFM01U7PF	FET		
Q202	LSCR523EBFS8	TRANSISTOR		

△ Symbol No.	Part No.	Part Name	Description	Local
Q204	LSCR523EBFS8	TRANSISTOR		
Q205	EMD9	DIGI TRANSISTOR		
Q206	VT6M1	FET		
Q301	SSM3K15AMFV	FET		
Q401	2SC4617/S/	TRANSISTOR		
Q402	SSM3K15AMFV	FET		
Q403	SSM3K15AMFV	FET		
Q404	LTC014TEBFS8	DIGI TRANSISTOR		
Q601	SSM6N15AFEM	DUAL FET		
Q602	LTC014TEBFS8	DIGI TRANSISTOR		
Q603	TPCP8107-F	FET		
Q604	LTC014TEBFS8	DIGI TRANSISTOR		
Q605	SSM6N15AFEM	DUAL FET		
Q606	SSM3J334R	FET		
D1	ST70-27F-572	ZENER DIODE		
D13	EDZV5.6B	ZENER DIODE		
D14	RB521CM-30	DIODE		
D15	1SS400SM	DIODE		
D16	RB060M-40	DIODE		
D17	RB561VM-40	SCHOTTKY DIODE		
D18	RB521CM-30	DIODE		
D19	RB521CM-30	DIODE		
D20	EDZV18B	ZENER DIODE		
D21	RB520SM-30	DIODE		
D22	EDZV8.2B	ZENER DIODE		
D24	RB520SM-30	DIODE		
D26	RB521CM-30	DIODE		
D27	RB521CM-30	DIODE		
D101	EDZV8.2B	ZENER DIODE		
D102	SMV1270-079LF	VARI CAP DIODE		
D103	1SV282-F	VARI CAP DIODE		
D104	1SV282-F	VARI CAP DIODE		
D105	1SV282-F	VARI CAP DIODE		
D106	1SV282-F	VARI CAP DIODE		
D107	1SS400SM	DIODE		
D108	SMV1130-079LF	VARI CAP DIODE		
D201	EDZV5.6B	ZENER DIODE		
D202	RN142S	DIODE		
D204	RB706F-40	DIODE		
D205	L8104	DIODE		
D206	L8104	DIODE		
D207	L8104	DIODE		
D208	RN142S	DIODE		
D209	RN142S	DIODE		
D301	1SS390	DIODE		
D302	1SS390	DIODE		
D303	1SS400SM	DIODE		
D304	1SS400SM	DIODE		
D401	RB521CM-30	DIODE		
D402	SPC10501A01	VARISTOR		
D403	SPC10501A01	VARISTOR		
D404	SPC10501A01	VARISTOR		
D405	SPC10501A01	VARISTOR		
D406	SPC10501A01	VARISTOR		
D407	EDZV8.2B	ZENER DIODE		
D408	RB521CM-30	DIODE		
D409	RB521CM-30	DIODE		
D410	RB521CM-30	DIODE		
D601	EDZV5.6B	ZENER DIODE		
D602	RB521CM-30	DIODE		
D603	EDZV6.8B	ZENER DIODE		
D604	EDZV6.8B	ZENER DIODE		
D605	EDZV6.8B	ZENER DIODE		
D606	EDZV6.8B	ZENER DIODE		
D607	EDZV6.8B	ZENER DIODE		
D608	EDZV6.8B	ZENER DIODE		
D609	RB521CM-30	DIODE		
D610	RB521CM-30	DIODE		
D611	EDZV6.8B	ZENER DIODE		
D612	DA204U	MULTIPLE DIODE		
D613	DA204U	MULTIPLE DIODE		
D614	RB521CM-30	DIODE		
D615	RB521CM-30	DIODE		
D616	AVRM10270K101	VARISTOR		
D617	AVRM10270K101	VARISTOR		

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
D618	RB520SM-30	DIODE			C116	CC730AD1H104J	C CAPACITOR	0.1uF 50V J	
D619	RB521CM-30	DIODE			C120	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C1	C92-0968-05	E CAPACITOR	470uF 25V		C123	CC73HCH1H221J	C CAPACITOR	220pF 50V J	
C2	C92-0906-05	E CAPACITOR	330uF 10V		C124	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C3	C92-0906-05	E CAPACITOR	330uF 10V		C125	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C4	CE32BY1E470M	E CAPACITOR	47uF 25V M		C127	CC73HCH1H221J	C CAPACITOR	220pF 50V J	
C5	C92-0968-05	E CAPACITOR	470uF 25V		C128	CC73HCH1H020B	C CAPACITOR	2pF 50V B	
C11	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C129	CC73HCH1HR75B	C CAPACITOR	0.75pF 50V B	
C12	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C130	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C14	CK73FB1C106K	C CAPACITOR	10uF 16V K		C131	CC73HCH1H090B	C CAPACITOR	9pF 50V B	
C15	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C132	CC73HCH1H090B	C CAPACITOR	9pF 50V B	
C16	C93-1959-05	C CAPACITOR	0.1uF 16V		C133	CC73HCH1H070B	C CAPACITOR	7pF 50V B	
C17	CK73HB1A474K	C CAPACITOR	0.47uF 10V K		C134	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C18	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		C135	CC73HCH1H0R5B	C CAPACITOR	0.5pF 50V B	
C19	CK73HB1H103K	C CAPACITOR	1000pF 50V K		C136	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C20	CK73HBB1H471K	C CAPACITOR	470pF 50V K		C137	CC73HCH1H060B	C CAPACITOR	6pF 50V B	
C21	CK73HBB1H471K	C CAPACITOR	470pF 50V K		C138	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C22	CK73HBB1H471K	C CAPACITOR	470pF 50V K		C139	CC73HCH1H060B	C CAPACITOR	6pF 50V B	
C24	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		C140	CC73HCH1H1R5B	C CAPACITOR	1.5pF 50V B	
C25	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C141	CC73HCH1H120G	C CAPACITOR	12pF 50V G	
C26	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C142	CC73HCH1H1R5B	C CAPACITOR	1.5pF 50V B	
C27	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C143	CC73HCH1H060B	C CAPACITOR	6pF 50V B	
C28	CK73GB1H105K	C CAPACITOR	1uF 50V K		C145	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C29	CK73HBB1H222K	C CAPACITOR	2200pF 50V K		C146	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C30	CK73EB1H475KM	C CAPACITOR	4.7uF 50V M		C147	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C31	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		C148	CC73HCH1H040B	C CAPACITOR	4pF 50V B	
C32	CK73EB1H475KM	C CAPACITOR	4.7uF 50V M		C207	C93-1861-05	C CAPACITOR	10pF 250V	
C33	CK73GB1H105K	C CAPACITOR	1uF 50V K		C208	C93-1852-05	C CAPACITOR	6pF 250V	
C34	CK73EB1H475KM	C CAPACITOR	4.7uF 50V M		C209	C93-1852-05	C CAPACITOR	6pF 250V	
C35	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C211	CK73HB1C105K	C CAPACITOR	1.0uF 16V K	
C36	CK73HBB1H471K	C CAPACITOR	470pF 50V K		C212	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C37	CK73GB1H105K	C CAPACITOR	1uF 50V K		C213	CC73HCH1H220G	C CAPACITOR	22pF 50V G	
C38	CK73FB1C106K	C CAPACITOR	10uF 16V K		C214	CK73HB1H103K	C CAPACITOR	1000pF 50V K	
C39	CK73HBB1H471K	C CAPACITOR	470pF 50V K		C216	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C40	CK73GB0J106K	C CAPACITOR	10uF 6.3V K		C218	CC73HCH1H680J	C CAPACITOR	68pF 50V J	
C41	CK73GB1H105K	C CAPACITOR	1uF 50V K		C219	C93-1849-05	C CAPACITOR	5pF 250V	
C42	CK73HBB1H471K	C CAPACITOR	470pF 50V K		C220	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C43	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		C221	CK73HB1E473K	C CAPACITOR	0.047uF 25V K	
C44	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K		C222	CK73HBB1H152K	C CAPACITOR	1500pF 50V K	
C45	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C223	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C46	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K		C224	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
C47	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C225	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C48	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C226	CC73HCH1H220G	C CAPACITOR	22pF 50V G	
C49	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C227	CC73HCH1H390G	C CAPACITOR	39pF 50V G	
C50	CK73GB1H105K	C CAPACITOR	1uF 50V K		C228	CC73HCH1H220G	C CAPACITOR	22pF 50V G	
C51	CK73HBB1H471K	C CAPACITOR	470pF 50V K		C229	CC73HCH1H120G	C CAPACITOR	12pF 50V G	
C52	CK73FXR1E475K	C CAPACITOR	4.7uF 25V K		C230	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C53	CK73FB1C106K	C CAPACITOR	10uF 16V K		C231	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C54	CK73FB1C106K	C CAPACITOR	10uF 16V K		C232	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C55	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K		C233	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C56	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C234	CC73GCH1H330J	C CAPACITOR	33pF 50V J	
C57	CK73GB0J106K	C CAPACITOR	10uF 6.3V K		C235	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C58	CK73FB1C106K	C CAPACITOR	10uF 16V K		C236	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C59	CK73FB1C106K	C CAPACITOR	10uF 16V K		C237	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C60	CK73FXR1E475K	C CAPACITOR	4.7uF 25V K		C238	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C61	CK73HB1H391K	C CAPACITOR	390pF 50V K		C239	CK73HBB1H472K	C CAPACITOR	4700pF 50V K	
C62	CK73HB1H391K	C CAPACITOR	390pF 50V K		C241	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C63	CK730FA1H475K	C CAPACITOR	4.7uF 50V K		C242	CC73HCH1H220G	C CAPACITOR	22pF 50V G	
C64	CK73FXR1E475K	C CAPACITOR	4.7uF 25V K		C243	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
C65	CK730DT1C476K	C CAPACITOR	47uF 16V K		C244	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C66	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C245	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C67	CC73HCH1H470G	C CAPACITOR	47pF 50V G		C247	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C68	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		C249	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C69	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K		C250	C93-1900-05	C CAPACITOR	1000pF 630V	
C72	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		C251	CK73GBB1H332K	C CAPACITOR	3300pF 50V K	
C73	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		C252	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C74	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C253	CC73GCH1H3R5B	C CAPACITOR	3.5pF 50V B	
C75	CK73HB1E473K	C CAPACITOR	0.047uF 25V K		C254	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C76	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		C255	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C108	CK73HB1H103K	C CAPACITOR	1000pF 50V K		C256	C93-1900-05	C CAPACITOR	1000pF 630V	
C109	CC73HCH1H330G	C CAPACITOR	33pF 50V G		C257	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C110	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C258	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	
C111	CK73GB1H105K	C CAPACITOR	1uF 50V K		C259	C93-1846-05	C CAPACITOR	4pF 250V	
C112	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C260	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C113	CK73FBB1H154K	C CAPACITOR	0.15uF 50V K		C261	CC73GCH1H120G	C CAPACITOR	12pF 50V G	
C114	CS77ABE1D100M	TA E CAPACITOR	10uF 20V M		C262	C93-1887-05	C CAPACITOR	82pF 630V	
C115	CK73FB1H473K	C CAPACITOR	0.047uF 50V K		C263	CK73HBB1H472K	C CAPACITOR	4700pF 50V K	
					C264	C93-2041-05	C CAPACITOR	11pF 500V	

△ Symbol No.	Part No.	Part Name	Description	Local
C265	C93-1852-05	C CAPACITOR	6pF 250V	
C266	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C267	C93-2035-05	C CAPACITOR	9pF 500V	
C268	C93-1852-05	C CAPACITOR	6pF 250V	
C270	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C271	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C272	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C274	CC73GCH1H150G	C CAPACITOR	15pF 50V G	
C275	CC73GCH1H390J	C CAPACITOR	39pF 50V J	
C277	C93-2041-05	C CAPACITOR	11pF 500V	
C278	C93-2031-05	C CAPACITOR	8pF 500V	
C279	C93-1852-05	C CAPACITOR	6pF 250V	
C280	C93-1838-05	C CAPACITOR	2pF 250V	
C304	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C305	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C306	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C307	CC73HCH1H070B	C CAPACITOR	7pF 50V B	
C308	CC73HCH1H270J	C CAPACITOR	27pF 50V J	
C309	CC73HCH1H120G	C CAPACITOR	12pF 50V G	
C310	CC73HCH1H270J	C CAPACITOR	27pF 50V J	
C311	CC73HCH1H150G	C CAPACITOR	15pF 50V G	
C312	CC73HCH1H120G	C CAPACITOR	12pF 50V G	
C313	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C314	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C315	CK73HB1C105K	C CAPACITOR	1.0uF 16V K	
C316	CK73HB1C105K	C CAPACITOR	1.0uF 16V K	
C317	CC73HCH1H030B	C CAPACITOR	3pF 50V B	
C318	CC73HCH1H050B	C CAPACITOR	5pF 50V B	
C319	CC73HCH1H050B	C CAPACITOR	5pF 50V B	
C320	CC73HCH1H390G	C CAPACITOR	39pF 50V G	
C321	CK730BS0J106M	C CAPACITOR	10uF 6.3V M	
C322	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C323	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C324	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C325	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C326	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C327	CK73HB1C105K	C CAPACITOR	1.0uF 16V K	
C328	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C329	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C330	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C331	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C332	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C333	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C334	CC73HCH1H070B	C CAPACITOR	7pF 50V B	
C335	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C336	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C337	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C338	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C339	CC73HCH1H120G	C CAPACITOR	12pF 50V G	
C340	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C341	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C342	CK73HB0J225K	C CAPACITOR	2.2uF 6.3V K	
C343	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C344	CK730BS0J106M	C CAPACITOR	10uF 6.3V M	
C345	CK73HB1A474K	C CAPACITOR	0.47uF 10V K	
C346	CK730BS0J106M	C CAPACITOR	10uF 6.3V M	
C347	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C348	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C405	CK73HBB1H472K	C CAPACITOR	4700pF 50V K	
C410	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C411	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C412	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C414	CK73HB1C105K	C CAPACITOR	1.0uF 16V K	
C415	C93-1959-05	C CAPACITOR	0.1uF 16V	
C416	C93-1959-05	C CAPACITOR	0.1uF 16V	
C417	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	
C418	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C419	C93-1959-05	C CAPACITOR	0.1uF 16V	
C420	C93-1959-05	C CAPACITOR	0.1uF 16V	
C421	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	
C422	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C423	C93-1959-05	C CAPACITOR	0.1uF 16V	
C424	C93-1959-05	C CAPACITOR	0.1uF 16V	
C425	C93-1959-05	C CAPACITOR	0.1uF 16V	
C426	C93-1959-05	C CAPACITOR	0.1uF 16V	
C427	C93-1959-05	C CAPACITOR	0.1uF 16V	
C428	C93-1959-05	C CAPACITOR	0.1uF 16V	
C429	C93-1959-05	C CAPACITOR	0.1uF 16V	

△ Symbol No.	Part No.	Part Name	Description	Local
C430	C93-1959-05	C CAPACITOR	0.1uF 16V	
C431	C93-1959-05	C CAPACITOR	0.1uF 16V	
C432	C93-1959-05	C CAPACITOR	0.1uF 16V	
C433	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C434	C93-1959-05	C CAPACITOR	0.1uF 16V	
C435	C93-1959-05	C CAPACITOR	0.1uF 16V	
C436	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C437	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C438	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C439	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C440	C93-1959-05	C CAPACITOR	0.1uF 16V	
C441	C93-1959-05	C CAPACITOR	0.1uF 16V	
C442	C93-1959-05	C CAPACITOR	0.1uF 16V	
C443	C93-1959-05	C CAPACITOR	0.1uF 16V	
C444	C93-1959-05	C CAPACITOR	0.1uF 16V	
C445	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C446	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C447	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C448	C93-1959-05	C CAPACITOR	0.1uF 16V	
C449	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C450	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C451	C93-1959-05	C CAPACITOR	0.1uF 16V	
C452	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C453	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C454	CC73HCH1H050B	C CAPACITOR	5pF 50V B	
C455	C93-1959-05	C CAPACITOR	0.1uF 16V	
C456	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C457	C93-1959-05	C CAPACITOR	0.1uF 16V	
C458	C93-1959-05	C CAPACITOR	0.1uF 16V	
C459	C93-1959-05	C CAPACITOR	0.1uF 16V	
C460	C93-1959-05	C CAPACITOR	0.1uF 16V	
C461	C93-1959-05	C CAPACITOR	0.1uF 16V	
C462	CK73HB1C105K	C CAPACITOR	1.0uF 16V K	
C463	C93-1959-05	C CAPACITOR	0.1uF 16V	
C464	C93-1959-05	C CAPACITOR	0.1uF 16V	
C465	C93-1959-05	C CAPACITOR	0.1uF 16V	
C466	C93-1959-05	C CAPACITOR	0.1uF 16V	
C467	C93-1959-05	C CAPACITOR	0.1uF 16V	
C468	C93-1959-05	C CAPACITOR	0.1uF 16V	
C469	C93-1959-05	C CAPACITOR	0.1uF 16V	
C470	C93-1959-05	C CAPACITOR	0.1uF 16V	
C471	C93-1959-05	C CAPACITOR	0.1uF 16V	
C472	C93-1959-05	C CAPACITOR	0.1uF 16V	
C473	C93-1959-05	C CAPACITOR	0.1uF 16V	
C474	C93-1959-05	C CAPACITOR	0.1uF 16V	
C475	C93-1959-05	C CAPACITOR	0.1uF 16V	
C476	C93-1959-05	C CAPACITOR	0.1uF 16V	
C477	C93-1959-05	C CAPACITOR	0.1uF 16V	
C478	CK73HB1C105K	C CAPACITOR	1.0uF 16V K	
C479	C93-1959-05	C CAPACITOR	0.1uF 16V	
C480	CC73HCH1H180G	C CAPACITOR	18pF 50V G	
C481	CC73HCH1H150G	C CAPACITOR	15pF 50V G	
C482	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C483	CK73HB1A224K	C CAPACITOR	0.22uF 10V K	
C484	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C485	C93-1959-05	C CAPACITOR	0.1uF 16V	
C486	C93-1959-05	C CAPACITOR	0.1uF 16V	
C487	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C488	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C489	CK73GB1H105K	C CAPACITOR	1uF 50V K	
C490	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C491	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C492	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C493	CK73HB1C105K	C CAPACITOR	1.0uF 16V K	
C494	C93-1959-05	C CAPACITOR	0.1uF 16V	
C495	C93-1959-05	C CAPACITOR	0.1uF 16V	
C497	C93-1959-05	C CAPACITOR	0.1uF 16V	
C498	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C501	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C502	C93-1959-05	C CAPACITOR	0.1uF 16V	
C503	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C504	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C505	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C506	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C507	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C509	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C510	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C511	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C514	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		R22	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	
C515	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		R23	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	
C516	C93-1959-05	C CAPACITOR	0.1uF 16V		R24	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
C517	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		R25	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	
C518	CC73HCH1H101J	C CAPACITOR	100pF 50V J		R26	RK73HH1J223D	MG RESISTOR	22kΩ 1/16W D	
C519	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		R27	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
C520	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		R28	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
C521	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		R29	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
C522	CK73HB1H103K	C CAPACITOR	10000pF 50V K		R30	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
C523	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		R31	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
C524	CC73HCH1H470G	C CAPACITOR	47pF 50V G		R32	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
C525	CC73HCH1H470G	C CAPACITOR	47pF 50V G		R33	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
C526	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		R34	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
C527	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		R35	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
C528	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		R36	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
C605	CK73HB1H103K	C CAPACITOR	10000pF 50V K		R37	RK73JB1H472J	MG RESISTOR	4.7kΩ 1/20W J	
C606	CK73HB1H103K	C CAPACITOR	10000pF 50V K		R38	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
C607	C93-1959-05	C CAPACITOR	0.1uF 16V		R39	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
C608	CK73HB1H103K	C CAPACITOR	10000pF 50V K		R40	RK73JB1H473J	MG RESISTOR	47kΩ 1/20W J	
C609	CK73GB1H105K	C CAPACITOR	1uF 50V K		R41	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
C610	CK73GB1H105K	C CAPACITOR	1uF 50V K		R42	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
C611	CK73GB1H105K	C CAPACITOR	1uF 50V K		R43	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
C612	CK73GB1H105K	C CAPACITOR	1uF 50V K		R44	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
C613	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		R45	RK73HH1J473D	MG RESISTOR	47kΩ 1/16W D	
C614	CC73HCH1H101J	C CAPACITOR	100pF 50V J		R46	RK73HH1J113D	MG RESISTOR	11kΩ 1/16W D	
C615	CC73HCH1H101J	C CAPACITOR	100pF 50V J		R47	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
C616	CC73HCH1H101J	C CAPACITOR	100pF 50V J		R48	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
C617	CC73HCH1H101J	C CAPACITOR	100pF 50V J		R49	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	
C618	CC73HCH1H101J	C CAPACITOR	100pF 50V J		R50	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
C619	CC73HCH1H101J	C CAPACITOR	100pF 50V J		R51	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
C620	CC73HCH1H101J	C CAPACITOR	100pF 50V J		R52	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
C621	CK73HBB1E223K	C CAPACITOR	0.022uF 25V K		R53	RK73JB1H473J	MG RESISTOR	47kΩ 1/20W J	
C622	CC73HCH1H101J	C CAPACITOR	100pF 50V J		R54	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
C623	CC73HCH1H101J	C CAPACITOR	100pF 50V J		R55	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
C624	CC73HCH1H101J	C CAPACITOR	100pF 50V J		R56	RK73HB1J124J	MG RESISTOR	120kΩ 1/16W J	
C625	CC73HCH1H101J	C CAPACITOR	100pF 50V J		R57	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
C626	CK73GB1H105K	C CAPACITOR	1uF 50V K		R58	RK73HH1J303D	MG RESISTOR	30kΩ 1/16W D	
C627	CK73HB1A224K	C CAPACITOR	0.22uF 10V K		R59	RK73HH1J154D	MG RESISTOR	150kΩ 1/16W D	
C628	CK73HB1A224K	C CAPACITOR	0.22uF 10V K		R60	RK73HH1J113D	MG RESISTOR	11kΩ 1/16W D	
C629	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		R61	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	
C630	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		R62	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
C631	CK73GB1H105K	C CAPACITOR	1uF 50V K		R63	RK73HH1J113D	MG RESISTOR	11kΩ 1/16W D	
C632	CK73FXR1E475K	C CAPACITOR	4.7uF 25V K		R64	R92-3769-05	MG RESISTOR	10Ω 0.25W	
C633	C93-1959-05	C CAPACITOR	0.1uF 16V		R65	R92-3769-05	MG RESISTOR	10Ω 0.25W	
C634	C93-1959-05	C CAPACITOR	0.1uF 16V		R66	RK73HB1J334J	MG RESISTOR	330kΩ 1/16W J	
C635	CK73HB1H103K	C CAPACITOR	10000pF 50V K		R67	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
C636	CK73GB0J106K	C CAPACITOR	10uF 6.3V K		R68	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
C637	CK73GB0J106K	C CAPACITOR	10uF 6.3V K		R69	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
C638	C93-1959-05	C CAPACITOR	0.1uF 16V		R70	RK73HH1J273D	MG RESISTOR	27kΩ 1/16W D	
C639	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		R71	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
C640	C93-1959-05	C CAPACITOR	0.1uF 16V		R72	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
C641	C93-1959-05	C CAPACITOR	0.1uF 16V		R73	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
C642	C93-1959-05	C CAPACITOR	0.1uF 16V		R74	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
C643	C93-1959-05	C CAPACITOR	0.1uF 16V		R75	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
C644	C93-1959-05	C CAPACITOR	0.1uF 16V		R76	RK73JB1H473J	MG RESISTOR	47kΩ 1/20W J	
C645	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		R77	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
C646	CK73GB0J106K	C CAPACITOR	10uF 6.3V K		R78	RK73FB2B332J	MG RESISTOR	3.3kΩ 1/8W J	
C647	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		R79	RK73FB2B332J	MG RESISTOR	3.3kΩ 1/8W J	
C648	C93-1959-05	C CAPACITOR	0.1uF 16V		R80	RK73FB2B332J	MG RESISTOR	3.3kΩ 1/8W J	
C649	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		R81	RK73FB2B2R7J	MG RESISTOR	2.7Ω 1/8W J	
C650	C93-1959-05	C CAPACITOR	0.1uF 16V		R82	RK73FB2B3R3J	MG RESISTOR	3.3Ω 1/8W J	
C651	CC73JCH1H101J	C CAPACITOR	100pF 50V J		R83	RK73HH1J152D	MG RESISTOR	1.5kΩ 1/16W D	
C652	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		R84	RK73HH1J472D	MG RESISTOR	4.7kΩ 1/16W D	
C653	CK73HBB1E223K	C CAPACITOR	0.022uF 25V K		R108	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	
C655	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		R109	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	
C656	CK73GB0J106K	C CAPACITOR	10uF 6.3V K		R112	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
C657	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		R113	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
C658	CC73HCH1H680J	C CAPACITOR	68pF 50V J		R114	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
C659	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		R115	RK73HB1J124J	MG RESISTOR	120kΩ 1/16W J	
C660	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		R116	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
C661	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		R117	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
C663	CK73HBB1H471K	C CAPACITOR	470pF 50V K		R118	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
C664	CK73GB1H105K	C CAPACITOR	1uF 50V K		R119	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
C665	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K		R120	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	
					R121	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R2	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R122	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R5	R92-1061-05	C RESISTOR	0.008Ω		R123	RK73HH1J391D	MG RESISTOR	390Ω 1/16W D	
R21	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J		R124	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	

△ Symbol No.	Part No.	Part Name	Description	Local
R125	RK73HB1J106J	MG RESISTOR	10MΩ 1/16W J	
R127	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R128	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R131	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R132	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	
R133	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R134	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R135	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R136	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R137	RN73HH1J151D	MG RESISTOR	150Ω 0.063W D	
R138	RN73HH1J100D	MF RESISTOR	10Ω 0.063W D	
R139	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R140	RK73HB1J562J	MG RESISTOR	5.6kΩ 1/16W J	
R141	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R142	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	
R143	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	
R144	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R145	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	
R146	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	
R147	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R148	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	
R149	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R203	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R204	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R205	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	
R206	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R207	RK73FB2B221J	MG RESISTOR	220Ω 1/8W J	
R208	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R211	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	
R212	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R213	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R214	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J	
R215	RK73HB1J390J	MG RESISTOR	39Ω 1/16W J	
R216	RK73HB1J390J	MG RESISTOR	39Ω 1/16W J	
R217	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J	
R218	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R219	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R220	RK73HB1J121J	MG RESISTOR	120Ω 1/16W J	
R221	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	
R222	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	
R223	RK73HB1J560J	MG RESISTOR	56Ω 1/16W J	
R224	RK73HB1J560J	MG RESISTOR	56Ω 1/16W J	
R225	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	
R226	RK73HB1J270J	MG RESISTOR	27Ω 1/16W J	
R227	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	
R228	RK73HB1J562J	MG RESISTOR	5.6kΩ 1/16W J	
R229	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R230	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R231	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R233	RK73GB2A121J	MG RESISTOR	120Ω 1/10W J	
R235	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R238	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R239	RK73GB2A271J	MG RESISTOR	270Ω 1/10W J	
R240	RK73GB2A390J	MG RESISTOR	39Ω 1/10W J	
R241	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R242	RK73GB2A271J	MG RESISTOR	270Ω 1/10W J	
R243	RK73GB2A390J	MG RESISTOR	39Ω 1/10W J	
R244	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R245	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R247	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R248	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J	
R250	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R251	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R256	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	
R259	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R260	RK73HB1J124J	MG RESISTOR	120kΩ 1/16W J	
R261	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	
R262	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	
R265	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R266	RK73HB1J274J	MG RESISTOR	270kΩ 1/16W J	
R267	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R269	RK73FB2B121J	MG RESISTOR	120Ω 1/8W J	
R270	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R271	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R272	RK73GB2A121J	MG RESISTOR	120Ω 1/10W J	
R273	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	
R274	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R275	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	

△ Symbol No.	Part No.	Part Name	Description	Local
R276	RK73PB2H560J	MG RESISTOR	56Ω 1/2W J	
R277	RK73PB2H560J	MG RESISTOR	56Ω 1/2W J	
R278	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R279	RK73HB1J560J	MG RESISTOR	56Ω 1/16W J	
R280	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R282	RK73HB1J273J	MG RESISTOR	27kΩ 1/16W J	
R302	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	
R303	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	
R304	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R305	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	
R307	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R308	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	
R309	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R310	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R311	RK73HH1J271D	MG RESISTOR	270Ω 1/16W D	
R312	RK73HB1J5R6J	MG RESISTOR	5.6Ω 1/16W J	
R313	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
R314	RK73HB1J120J	MG RESISTOR	12Ω 1/16W J	
R315	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
R316	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	
R317	RK73HH1J473D	MG RESISTOR	47kΩ 1/16W D	
R319	RK73HH1J273D	MG RESISTOR	27kΩ 1/16W D	
R320	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R321	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R322	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R323	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R324	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R325	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R326	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R407	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R408	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R416	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R418	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R420	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R421	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R422	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R423	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R424	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R425	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R426	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	
R427	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	
R428	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R429	RK73HB1J681J	MG RESISTOR	680Ω 1/16W J	
R431	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R432	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R433	RK73JB1H472J	MG RESISTOR	4.7kΩ 1/20W J	
R434	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R435	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
R436	RK73JB1H105J	MG RESISTOR	1MΩ 1/20W J	
R437	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R438	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R439	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R440	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R441	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R442	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R443	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R444	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R445	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R446	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R447	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R448	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R449	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R450	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R451	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R452	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R453	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R454	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R455	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R456	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R457	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R458	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R459	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R460	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R461	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R462	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R463	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R464	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R465	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R466	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J		R620	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R467	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J		R621	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R468	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J		R622	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R469	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J		R623	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R470	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J		R624	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R471	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J		R625	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R472	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J		R626	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
R473	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J		R627	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R474	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J		R628	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R475	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J		R629	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R476	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J		R630	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R477	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J		R631	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R478	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J		R632	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R479	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J		R633	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R480	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J		R634	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R481	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J		R635	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R482	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J		R636	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
R483	RK73GH2A49R9D	MG RESISTOR	49.9Ω 1/10W D		R637	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R484	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J		R638	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R485	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J		R639	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R486	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J		R640	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
R487	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J		R641	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R488	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J		R642	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R489	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J		R643	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R490	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J		R644	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R491	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J		R645	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R492	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J		R646	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R493	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J		R647	RK73HB1J682J	MG RESISTOR	6.8kΩ 1/16W J	
R494	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R648	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R495	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R649	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R496	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R650	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R497	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		R651	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R498	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R652	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R499	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J		R653	RK73HB1J682J	MG RESISTOR	6.8kΩ 1/16W J	
R500	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		R654	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R501	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J		R655	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R502	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J		R656	RK73FB2B102J	MG RESISTOR	1kΩ 1/8W J	
R503	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		R657	RK73FB2B102J	MG RESISTOR	1kΩ 1/8W J	
R504	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R658	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R505	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		R659	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R506	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D		R660	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R507	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R661	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R508	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R662	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R509	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R663	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R511	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J		R664	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R512	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		R665	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R513	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		R666	RK73HB1J683J	MG RESISTOR	68kΩ 1/16W J	
R514	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J		R667	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	
R516	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R668	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R517	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J		R669	RK73HB1J681J	MG RESISTOR	680Ω 1/16W J	
R518	RK73HB1J393J	MG RESISTOR	39kΩ 1/16W J		R670	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
R519	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R671	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R520	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R672	RK73HH1J273D	MG RESISTOR	27kΩ 1/16W D	
R522	RK73FB2B332J	MG RESISTOR	3.3kΩ 1/8W J		R673	RK73HB1J681J	MG RESISTOR	680Ω 1/16W J	
R523	RK73FB2B332J	MG RESISTOR	3.3kΩ 1/8W J		R674	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R524	RK73FB2B332J	MG RESISTOR	3.3kΩ 1/8W J		R675	RK73HB1J682J	MG RESISTOR	6.8kΩ 1/16W J	
R525	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R676	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R526	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J		R677	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R527	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J		R678	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
R528	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R679	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
R529	RK73HH1J223D	MG RESISTOR	22kΩ 1/16W D		R680	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
R530	RK73HH1J223D	MG RESISTOR	22kΩ 1/16W D		R681	RK73HH1J152D	MG RESISTOR	1.5kΩ 1/16W D	
R531	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		L1	L34-4902-05	AIR CORE COIL		
R532	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		L2	L34-4903-05	AIR CORE COIL		
R533	RK73HH1J223D	MG RESISTOR	22kΩ 1/16W D		L3	L34-4903-05	AIR CORE COIL		
R534	RK73HH1J223D	MG RESISTOR	22kΩ 1/16W D		L4	L34-4903-05	AIR CORE COIL		
R535	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J		L5	L3E-0018-00	AIR CORE COIL		
R536	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J		L6	L34-4848-05	AIR CORE COIL		
R537	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J		L7	L34-4610-15	AIR CORE COIL		
R538	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		L11	LB73G0AK-001	CHIP FERRITE		
R539	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		L12	LR79Z0FQ100M	CHIP INDUCTOR		
R613	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		L13	LB73G0AM-004	CHIP FERRITE		
R614	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		L14	LR79Z0AA150M	CHIP INDUCTOR		
R615	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		L15	LB73G0AM-004	CHIP FERRITE		
R616	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		L16	LB73G0AK-001	CHIP FERRITE		
R617	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		L17	LB73H0AV-002	CHIP FERRITE		
R618	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J		L18	LB73H0AV-002	CHIP FERRITE		
R619	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J						

△ Symbol No.	Part No.	Part Name	Description	Local
L19	LB73G0AK-001	CHIP FERRITE		
L107	LB73H0AV-003	CHIP FERRITE		
L108	L41-2785-53	CHIP INDUCTOR		
L109	LB73H0AV-003	CHIP FERRITE		
L110	L41-2785-53	CHIP INDUCTOR		
L111	L41-2785-53	CHIP INDUCTOR		
L112	L41-2785-53	CHIP INDUCTOR		
L113	L41-2785-53	CHIP INDUCTOR		
L115	L41-2785-53	CHIP INDUCTOR		
L116	L41-2785-53	CHIP INDUCTOR		
L117	LB73H0AY-004	CHIP FERRITE		
L118	LK73H0AM47NJ	M.CHIP INDUCTOR	47nH	
L119	LB73H0AY-004	CHIP FERRITE		
L121	LK73H0AM27NJ	M.CHIP INDUCTOR	27nH	
L123	LK73H0AM27NJ	M.CHIP INDUCTOR	27nH	
L124	LK73H0AM56NJ	M.CHIP INDUCTOR	56nH	
L207	LB73H0AY-004	CHIP FERRITE		
L208	LB73H0AY-004	CHIP FERRITE		
L209	LK73H0AM56NJ	M.CHIP INDUCTOR	56nH	
L210	L41-2785-53	CHIP INDUCTOR		
L211	LK73H0AM56NJ	M.CHIP INDUCTOR	56nH	
L212	LK73H0AM56NJ	M.CHIP INDUCTOR	56nH	
L213	LK73H0AM47NJ	M.CHIP INDUCTOR	47nH	
L214	L41-8275-53	CHIP INDUCTOR		
L215	LB73F0AW-002	CHIP FERRITE		
L217	LB73H0AV-003	CHIP FERRITE		
L218	LB73G0BA-004	CHIP FERRITE		
L219	LB73Z0DF-001	CHIP FERRITE		
L220	LB73Z0DF-001	CHIP FERRITE		
L221	LB73Z0DF-001	CHIP FERRITE		
L222	L41-2775-53	CHIP INDUCTOR		
L223	LR77Z0AAR27J	CHIP INDUCTOR	0.27uH	
L224	LR79Z0GJR56G	CHIP INDUCTOR		
L225	LB73H0AY-004	CHIP FERRITE		
L226	LB73H0AV-003	CHIP FERRITE		
L302	LK73H0AMR10J	M.CHIP INDUCTOR	0.1uH	
L303	LR79G0CQ56NG	CHIP INDUCTOR		
L304	LR79G0CQ47NG	CHIP INDUCTOR		
L305	LR79G0CQ82NG	CHIP INDUCTOR		
L306	LR79G0CQ8N2C	CHIP INDUCTOR		
L307	LR79G0CQR22G	CHIP INDUCTOR		
L308	LR79G0CQR12G	CHIP INDUCTOR		
L309	LR79G0CQ68NG	CHIP INDUCTOR	68nH	
L310	LR79G0CQ82NG	CHIP INDUCTOR		
L311	LR79G0CQR33G	CHIP INDUCTOR		
L312	LK73H0AMR10J	M.CHIP INDUCTOR	0.1uH	
L313	LR79G0CQ56NG	CHIP INDUCTOR		
L314	LK73H0AMR27J	M.CHIP INDUCTOR		
L315	LR79G0CQR10G	CHIP INDUCTOR		
L317	LK73H0AM33NJ	M.CHIP INDUCTOR	33nH	
L401	LB73G0AK-001	CHIP FERRITE		
L402	LB73H0AV-003	CHIP FERRITE		
L403	LB73G0AK-001	CHIP FERRITE		
L404	LR77Z0AE4R7J	CHIP INDUCTOR	4.7uH	
L405	LB73G0AM-004	CHIP FERRITE		
L406	L92-1101-05	CHIP FERRITE		
L407	L92-1101-05	CHIP FERRITE		
L408	L92-1101-05	CHIP FERRITE		
L409	L92-1101-05	CHIP FERRITE		
L410	LB73G0AK-001	CHIP FERRITE		
L411	LB73G0AK-001	CHIP FERRITE		
L412	LB73G0AK-001	CHIP FERRITE		
L413	LB73G0AK-001	CHIP FERRITE		
L414	LB73H0AV-002	CHIP FERRITE		
L415	L79-1984-05	FILTER		
L416	L79-1984-05	FILTER		
L417	LB73H0AY-002	CHIP FERRITE		
L418	LB73H0AY-002	CHIP FERRITE		
L419	L79-1984-05	FILTER		
L420	L92-1101-05	CHIP FERRITE		
L601	LB73H0AV-003	CHIP FERRITE		
L602	LB73H0AV-003	CHIP FERRITE		
L603	LB73H0AV-003	CHIP FERRITE		
CN1	EC720AA-0560A	FFC FPC CONNE		
CN2	E40-6862-05	F.C.CONNECTOR		
CN3	J19-5386-05	HOLDER		
CP301	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	

△ Symbol No.	Part No.	Part Name	Description	Local
CP302	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	
CP303	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	
CP401	RK74HB1J103J	NET RESISTOR	10kΩ 1/16W J	
CP402	RK74HB1J222J	NET RESISTOR	2.2kΩ 1/16W J	
CP403	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	
CP404	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	
CP405	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	
CP406	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
CP407	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
CP408	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
CP409	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
CP410	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
CP411	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
CP412	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
CP413	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
CP414	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
CP601	RK74HB1J472J	NET RESISTOR	4.7kΩ 1/16W J	
CP602	RK74HB1J472J	NET RESISTOR	4.7kΩ 1/16W J	
CP604	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	
CP605	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
E11	F1B-0085-00	SHIELDING CASE		
E101	F1B-0085-00	SHIELDING CASE		
F1	F53-0286-05	FUSE		
F2	F53-0286-05	FUSE		
F3	F53-0286-05	FUSE		
F4	FZA10BS-5R0	FUSE (CC)		
F5	FZA10BS-5R0	FUSE (CC)		
F6	F53-0286-05	FUSE		
IC201	RA60H1317A501	MOS IC		
IC601	LA4631VC-XE	ANALOG IC		
J1	E58-0567-05	SUB SOCKET D		
J2	E1B-0001-00	3.5D PHONE JACK		
TH201	NCU15WF104F6S	N THERMISTOR		
TH202	NCU15WF104F6S	N THERMISTOR		
TH203	NCU15WF104F6S	N THERMISTOR		
TH401	NCU15WF104F6S	N THERMISTOR		
X401	L7H-0076-00	TCXO		
X402	L77-1802-05	QUARTZ CRYSTAL		

TX-RX UNIT

**XC1-183K-01 (NX-3820E,NX-3820GE,
NX-3820H GK2,NX-3820HK2)**

XC1-183K-00 (NX-3820H GK,NX-3820HK)

***Note : This part cannot be replaced. Therefore,
this part is not supplied as a service part.**

Block No. [0][2]

△ Symbol No.	Part No.	Part Name	Description	Local
IC1	BA00DD0WHFP	IC		
IC12	LXDC2HN18F163	IC		
IC13	BU31TD2WNVX	IC		
IC14	TPS61041DRV	IC		
IC15	XC6215B122N-G	IC		
IC16	XC6209B502P-G	IC		
IC17	NJM2878F4-32	IC		
IC18	XC61CN5002N-G	IC		
IC19	XC6223D321P-G	IC		
IC20	XC6223D321P-G	IC		
IC21	XC8102AA07-G	IC		
IC22	MSP430G2533P0	IC		
IC23	XC6221D501G-G	IC		
IC24	LXDC2XQ12A-252	IC		
IC25	MP2560DQ-LF-Z	IC		
IC26	XC6221D501G-G	IC		
IC101	NJM2904CRB1	IC		
IC202	BGU6104	IC		
IC203	BA3472FVM	IC		
IC205	AD8315ARM	IC		
IC301	NJG1608KB2	IC		
IC302	AK2401	IC		

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
IC401	-----	IC	*Note		D105	1SV282-F	VARI CAP DIODE		
IC402	-----	IC	*Note		D106	1SV282-F	VARI CAP DIODE		
IC403	TC7SZ08FE	IC			D107	1SS400SM	DIODE		
IC404	-----	IC	*Note		D108	SMV1130-079LF	VARI CAP DIODE		
IC405	BD11600NUX	IC			D201	EDZV5.6B	ZENER DIODE		
IC406	BD11600NUX	IC			D202	RN142S	DIODE		
IC407	TC7SET125FUF	IC			D204	RB706F-40	DIODE		
IC408	TC7SZ08FE	IC			D205	L8104	DIODE		
IC409	TCA9555RTWR	IC			D206	L8104	DIODE		
IC410	ADS7961SRHB	IC			D207	L8104	DIODE		
IC411	DAC124S085CIS	IC			D208	RN142S	DIODE		
IC412	R2A20178NP	IC			D209	RN142S	DIODE		
IC413	XC61CN5002N-G	IC			D301	1SS390	DIODE		
IC414	BU7462NUX	IC			D302	1SS390	DIODE		
IC602	TC7WT126FU-F	IC			D303	1SS400SM	DIODE		
IC603	TC7WH126FK	IC			D304	1SS400SM	DIODE		
IC604	TCA9555RTWR	IC			D401	RB521CM-30	DIODE		
IC605	ADM3202ARUZ	IC			D402	SPC10501A01	VARISTOR		
IC606	TC7SET125FUF	IC			D403	SPC10501A01	VARISTOR		
IC607	TLV32AIC3104I	IC			D404	SPC10501A01	VARISTOR		
IC608	BU7462NUX	IC			D405	SPC10501A01	VARISTOR		
IC609	XC6221D501G-G	IC			D406	SPC10501A01	VARISTOR		
					D407	EDZV8.2B	ZENER DIODE		
Q11	LTC014EEBFS8	DIGI TRANSISTOR			D408	RB521CM-30	DIODE		
Q12	TPCP8107-F	FET			D409	RB521CM-30	DIODE		
Q13	LTC014EEBFS8	DIGI TRANSISTOR			D410	RB521CM-30	DIODE		
Q14	LTC014TEBFS8	DIGI TRANSISTOR			D601	EDZV5.6B	ZENER DIODE		
Q15	LSCR523EBFS8	TRANSISTOR			D602	RB521CM-30	DIODE		
Q16	LSAR523UBFS8	TRANSISTOR			D603	EDZV6.8B	ZENER DIODE		
Q17	TPCP8107-F	FET			D604	EDZV6.8B	ZENER DIODE		
Q18	LTC014EEBFS8	DIGI TRANSISTOR			D605	EDZV6.8B	ZENER DIODE		
Q19	VT6M1	FET			D606	EDZV6.8B	ZENER DIODE		
Q20	SSM3J334R	FET			D607	EDZV6.8B	ZENER DIODE		
Q21	LTC014EEBFS8	DIGI TRANSISTOR			D608	EDZV6.8B	ZENER DIODE		
Q22	SSM3J334R	FET			D609	RB521CM-30	DIODE		
Q23	LTC014EEBFS8	DIGI TRANSISTOR			D610	RB521CM-30	DIODE		
Q25	EMD9	DIGI TRANSISTOR			D611	EDZV6.8B	ZENER DIODE		
Q101	2SC5108FT/Y/	TRANSISTOR			D612	DA204U	MULTIPLE DIODE		
Q102	2SC5108FT/Y/	TRANSISTOR			D613	DA204U	MULTIPLE DIODE		
Q103	EM6M2	FET			D614	RB521CM-30	DIODE		
Q104	2SD2654/W/	TRANSISTOR			D615	RB521CM-30	DIODE		
Q105	MCH3914-H/8/	FET			D616	AVRM10270K101	VARISTOR		
Q106	2SC5108FT/Y/	TRANSISTOR			D617	AVRM10270K101	VARISTOR		
Q201	RFM01U7PF	FET			D618	RB520SM-30	DIODE		
Q202	LSCR523EBFS8	TRANSISTOR			D619	RB521CM-30	DIODE		
Q204	LSCR523EBFS8	TRANSISTOR							
Q205	EMD9	DIGI TRANSISTOR			C1	CE32EJ1E102M	E CAPACITOR	1000uF 25V M	
Q206	VT6M1	FET			C2	C92-0906-05	E CAPACITOR	330uF 10V	
Q301	SSM3K15AMFV	FET			C3	C92-0906-05	E CAPACITOR	330uF 10V	
Q401	2SC4617/S/	TRANSISTOR			C4	CE32BY1E470M	E CAPACITOR	47uF 25V M	
Q402	SSM3K15AMFV	FET			C5	C92-0968-05	E CAPACITOR	470uF 25V	
Q403	SSM3K15AMFV	FET			C11	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
Q404	LTC014TEBFS8	DIGI TRANSISTOR			C12	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
Q601	SSM6N15AFEM	DUAL FET			C14	CK73FB1C106K	C CAPACITOR	10uF 16V K	
Q602	LTC014TEBFS8	DIGI TRANSISTOR			C15	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
Q603	TPCP8107-F	FET			C16	C93-1959-05	C CAPACITOR	0.1uF 16V	
Q604	LTC014TEBFS8	DIGI TRANSISTOR			C17	CK73HB1A474K	C CAPACITOR	0.47uF 10V K	
Q605	SSM6N15AFEM	DUAL FET			C18	CK73HB1C105K	C CAPACITOR	1.0uF 16V K	
Q606	SSM3J334R	FET			C19	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
					C20	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
D1	ST70-27F-572	ZENER DIODE			C21	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
D13	EDZV5.6B	ZENER DIODE			C22	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
D14	RB521CM-30	DIODE			C24	CK73HB1C105K	C CAPACITOR	1.0uF 16V K	
D15	1SS400SM	DIODE			C25	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D16	RB060M-40	DIODE			C26	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
D17	RB561VM-40	SCHOTTKY DIODE			C27	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
D18	RB521CM-30	DIODE			C28	CK73GB1H105K	C CAPACITOR	1uF 50V K	
D19	RB521CM-30	DIODE			C29	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	
D20	EDZV18B	ZENER DIODE			C30	CK73EB1H475KM	C CAPACITOR	4.7uF 50V M	
D21	RB520SM-30	DIODE			C31	CK73HB1C105K	C CAPACITOR	1.0uF 16V K	
D22	EDZV8.2B	ZENER DIODE			C32	CK73EB1H475KM	C CAPACITOR	4.7uF 50V M	
D24	RB520SM-30	DIODE			C33	CK73GB1H105K	C CAPACITOR	1uF 50V K	
D26	RB521CM-30	DIODE			C34	CK73EB1H475KM	C CAPACITOR	4.7uF 50V M	
D27	RB521CM-30	DIODE			C35	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
D101	EDZV8.2B	ZENER DIODE			C36	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
D102	SMV1270-079LF	VARI CAP DIODE			C37	CK73GB1H105K	C CAPACITOR	1uF 50V K	
D103	1SV282-F	VARI CAP DIODE			C38	CK73FB1C106K	C CAPACITOR	10uF 16V K	
D104	1SV282-F	VARI CAP DIODE			C39	CK73HBB1H471K	C CAPACITOR	470pF 50V K	

△ Symbol No.	Part No.	Part Name	Description	Local
C40	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C41	CK73GB1H105K	C CAPACITOR	1uF 50V K	
C42	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C43	CK73HB1C105K	C CAPACITOR	1.0uF 16V K	
C44	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C45	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C46	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C47	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C48	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C49	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C50	CK73GB1H105K	C CAPACITOR	1uF 50V K	
C51	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C52	CK73FXR1E475K	C CAPACITOR	4.7uF 25V K	
C53	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C54	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C55	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C56	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C57	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C58	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C59	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C60	CK73FXR1E475K	C CAPACITOR	4.7uF 25V K	
C61	CK73HB1H391K	C CAPACITOR	390pF 50V K	
C62	CK73HB1H391K	C CAPACITOR	390pF 50V K	
C63	CK730FA1H475K	C CAPACITOR	4.7uF 50V K	
C64	CK73FXR1E475K	C CAPACITOR	4.7uF 25V K	
C65	CK730DT1C476K	C CAPACITOR	47uF 16V K	
C66	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C67	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
C68	CK73HB1C105K	C CAPACITOR	1.0uF 16V K	
C69	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C72	CK73HB1C105K	C CAPACITOR	1.0uF 16V K	
C73	CK73HB1C105K	C CAPACITOR	1.0uF 16V K	
C74	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C75	CK73HB1E473K	C CAPACITOR	0.047uF 25V K	
C76	CK73HB1C105K	C CAPACITOR	1.0uF 16V K	
C101	CC73HCH1H040B	C CAPACITOR	4pF 50V B	
C102	CC73HCH1H3R5B	C CAPACITOR	3.5pF 50V B	3820E,3820GE,3820HGK2,3820HK2
C103	CC73HCH1H100B	C CAPACITOR	10pF 50V B	3820E,3820GE,3820HGK2,3820HK2
C103	CC73HCH1H101J	C CAPACITOR	100pF 50V J	3820HGK,3820HK
C104	CC73HCH1H070B	C CAPACITOR	7pF 50V B	3820E,3820GE,3820HGK2,3820HK2
C105	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
C108	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C109	CC73HCH1H330G	C CAPACITOR	33pF 50V G	
C110	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C111	CK73GB1H105K	C CAPACITOR	1uF 50V K	
C112	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C113	CK73FBB1H154K	C CAPACITOR	0.15uF 50V K	
C114	CS77ABE1D100M	TA E CAPACITOR	10uF 20V M	
C115	CK73FB1H473K	C CAPACITOR	0.047uF 50V K	
C116	CC730AD1H104J	C CAPACITOR	0.1uF 50V J	
C117	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C119	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
C120	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C121	CC73HCH1H3R5B	C CAPACITOR	3.5pF 50V B	3820E,3820GE,3820HGK2,3820HK2
C122	CC73HCH1H1R5B	C CAPACITOR	1.5pF 50V B	3820E,3820GE,3820HGK2,3820HK2
C122	CC73HCH1H020B	C CAPACITOR	2pF 50V B	3820HGK,3820HK
C123	CC73HCH1H221J	C CAPACITOR	220pF 50V J	
C124	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C125	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C126	CC73HCH1H010B	C CAPACITOR	1pF 50V B	3820E,3820GE,3820HGK2,3820HK2
C126	CC73HCH1H020B	C CAPACITOR	2pF 50V B	3820HGK,3820HK
C127	CC73HCH1H221J	C CAPACITOR	220pF 50V J	
C128	CC73HCH1H020B	C CAPACITOR	2pF 50V B	
C129	CC73HCH1H0R5B	C CAPACITOR	0.5pF 50V B	
C130	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C131	CC73HCH1H090B	C CAPACITOR	9pF 50V B	
C132	CC73HCH1H090B	C CAPACITOR	9pF 50V B	
C133	CC73HCH1H070B	C CAPACITOR	7pF 50V B	
C134	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C135	CC73HCH1H0R5B	C CAPACITOR	0.5pF 50V B	
C136	CC73HCH1H101J	C CAPACITOR	100pF 50V J	

△ Symbol No.	Part No.	Part Name	Description	Local
C137	CC73HCH1H1R5B	C CAPACITOR	1.5pF 50V B	3820E,3820GE,3820HGK2,3820HK2
C137	CC73HCH1H020B	C CAPACITOR	2pF 50V B	3820HGK,3820HK
C138	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
C139	CC73HCH1H090B	C CAPACITOR	9pF 50V B	
C140	CC73HCH1H0R5B	C CAPACITOR	0.5pF 50V B	
C141	CC73HCH1H120G	C CAPACITOR	12pF 50V G	3820E,3820GE,3820HGK2,3820HK2
C141	CC73HCH1H100B	C CAPACITOR	10pF 50V B	3820HGK,3820HK
C142	CC73HCH1H0R5B	C CAPACITOR	0.5pF 50V B	
C143	CC73HCH1H090B	C CAPACITOR	9pF 50V B	
C144	CC73HCH1H040B	C CAPACITOR	4pF 50V B	3820E,3820GE,3820HGK2,3820HK2
C145	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C146	CC73HCH1H040B	C CAPACITOR	4pF 50V B	3820E,3820GE,3820HGK2,3820HK2
C147	CC73HCH1H030B	C CAPACITOR	3pF 50V B	3820E,3820GE,3820HGK2,3820HK2
C148	CC73HCH1H030B	C CAPACITOR	3pF 50V B	3820E,3820GE,3820HGK2,3820HK2
C201	CC73HCH1H020B	C CAPACITOR	2pF 50V B	
C207	C93-1838-05	C CAPACITOR	2pF 250V	3820E,3820GE,3820HGK2,3820HK2
C211	CK73HB1C105K	C CAPACITOR	1.0uF 16V K	
C212	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C213	CC73HCH1H121J	C CAPACITOR	120pF 50V J	
C214	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C216	CC73HCH1H150G	C CAPACITOR	15pF 50V G	
C217	CC73HCH1H050B	C CAPACITOR	5pF 50V B	
C218	CC73HCH1H150G	C CAPACITOR	15pF 50V G	
C219	CC73HCH1H050B	C CAPACITOR	5pF 50V B	
C220	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C221	CK73HB1E473K	C CAPACITOR	0.047uF 25V K	
C222	CK73HBB1H472K	C CAPACITOR	4700pF 50V K	
C223	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C224	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C225	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C226	CC73HCH1H050B	C CAPACITOR	5pF 50V B	
C227	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C228	CC73HCH1H050B	C CAPACITOR	5pF 50V B	
C229	CC73HCH1H220G	C CAPACITOR	22pF 50V G	
C230	CC73HCH1H080B	C CAPACITOR	8pF 50V B	
C231	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C232	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C233	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C234	CC73GCH1H040B	C CAPACITOR	4pF 50V B	
C235	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C236	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
C237	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
C238	CK73GB1H471K	C CAPACITOR	470pF 50V K	
C239	CK73HBB1H472K	C CAPACITOR	4700pF 50V K	
C241	CK73GB1H471K	C CAPACITOR	470pF 50V K	
C242	CC73HCH1H220G	C CAPACITOR	22pF 50V G	
C243	CC73HCH1H470G	C CAPACITOR	47pF 50V G	
C244	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C245	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C247	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C249	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C250	C93-1866-05	C CAPACITOR	27pF 250V	
C251	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C252	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C253	CC73GCH1H1R5B	C CAPACITOR	1.5pF 50V B	3820E,3820GE,3820HGK2,3820HK2
C253	CC73GCH1H020B	C CAPACITOR	2pF 50V B	3820HGK,3820HK
C254	CK73GB1H471K	C CAPACITOR	470pF 50V K	
C255	CK73GB1H471K	C CAPACITOR	470pF 50V K	
C256	C93-1866-05	C CAPACITOR	27pF 250V	
C257	CK73GB1H471K	C CAPACITOR	470pF 50V K	
C258	CK73GB1H471K	C CAPACITOR	470pF 50V K	
C259	C93-1846-05	C CAPACITOR	4pF 250V	3820E,3820GE,3820HGK2,3820HK2
C259	C93-1852-05	C CAPACITOR	6pF 250V	3820HGK,3820HK
C260	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C261	CC73GCH1H040B	C CAPACITOR	4pF 50V B	
C262	C93-1932-05	C CAPACITOR	100pF 250V	
C263	CK73HBB1H472K	C CAPACITOR	4700pF 50V K	
C264	CC730DF2H130G	C CAPACITOR	13pF 500V G	3820E,3820GE,3820HGK2,3820HK2

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C264	C93-2035-05	C CAPACITOR	9pF 500V	3820HGK,3820HK	C431	C93-1959-05	C CAPACITOR	0.1uF 16V	
C265	C93-1846-05	C CAPACITOR	4pF 250V	3820E,3820GE,3820HGK2,3820HK2	C432	C93-1959-05	C CAPACITOR	0.1uF 16V	
C266	CC73HCH1H470G	C CAPACITOR	47pF 50V G		C433	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C267	CC730DF2H130G	C CAPACITOR	13pF 500V G	3820E,3820GE,3820HGK2,3820HK2	C434	C93-1959-05	C CAPACITOR	0.1uF 16V	
C267	C93-2039-05	C CAPACITOR	10pF 500V	3820HGK,3820HK	C435	C93-1959-05	C CAPACITOR	0.1uF 16V	
C268	C93-1852-05	C CAPACITOR	6pF 250V		C436	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C270	CK73HBB1H471K	C CAPACITOR	470pF 50V K		C437	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C271	CK73HBB1H471K	C CAPACITOR	470pF 50V K		C438	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C272	CK73HBB1H471K	C CAPACITOR	470pF 50V K		C439	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C274	CC73GCH1H020B	C CAPACITOR	2pF 50V B		C440	C93-1959-05	C CAPACITOR	0.1uF 16V	
C304	CC73JCH1H101J	C CAPACITOR	100pF 50V J		C441	C93-1959-05	C CAPACITOR	0.1uF 16V	
C305	CC73JCH1H101J	C CAPACITOR	100pF 50V J		C442	C93-1959-05	C CAPACITOR	0.1uF 16V	
C306	CK73HBB1H471K	C CAPACITOR	470pF 50V K		C443	C93-1959-05	C CAPACITOR	0.1uF 16V	
C307	CC73HCH1H020B	C CAPACITOR	2pF 50V B		C444	C93-1959-05	C CAPACITOR	0.1uF 16V	
C308	CC73HCH1H080B	C CAPACITOR	8pF 50V B		C445	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C309	CC73HCH1H040B	C CAPACITOR	4pF 50V B		C446	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C310	CC73HCH1H070B	C CAPACITOR	7pF 50V B		C447	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C311	CC73HCH1H050B	C CAPACITOR	5pF 50V B		C448	C93-1959-05	C CAPACITOR	0.1uF 16V	
C312	CC73HCH1H040B	C CAPACITOR	4pF 50V B		C449	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C313	CK73HBB1H471K	C CAPACITOR	470pF 50V K		C450	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C314	CK73HB1H103K	C CAPACITOR	10000pF 50V K		C451	C93-1959-05	C CAPACITOR	0.1uF 16V	
C315	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		C452	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C316	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		C453	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C317	CC73HCH1H1R5B	C CAPACITOR	1.5pF 50V B		C454	CC73HCH1H050B	C CAPACITOR	5pF 50V B	
C319	CC73HCH1H060B	C CAPACITOR	6pF 50V B		C455	C93-1959-05	C CAPACITOR	0.1uF 16V	
C320	CC73HCH1H150G	C CAPACITOR	15pF 50V G		C456	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C321	CK730BS0J106M	C CAPACITOR	10uF 6.3V M		C457	C93-1959-05	C CAPACITOR	0.1uF 16V	
C322	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C458	C93-1959-05	C CAPACITOR	0.1uF 16V	
C323	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C459	C93-1959-05	C CAPACITOR	0.1uF 16V	
C324	CK73HB1H103K	C CAPACITOR	10000pF 50V K		C460	C93-1959-05	C CAPACITOR	0.1uF 16V	
C325	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C461	C93-1959-05	C CAPACITOR	0.1uF 16V	
C326	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C462	CK73HB1C105K	C CAPACITOR	1.0uF 16V K	
C327	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		C463	C93-1959-05	C CAPACITOR	0.1uF 16V	
C328	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C464	C93-1959-05	C CAPACITOR	0.1uF 16V	
C329	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C465	C93-1959-05	C CAPACITOR	0.1uF 16V	
C330	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C466	C93-1959-05	C CAPACITOR	0.1uF 16V	
C331	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C467	C93-1959-05	C CAPACITOR	0.1uF 16V	
C332	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C468	C93-1959-05	C CAPACITOR	0.1uF 16V	
C333	CC73HCH1H150G	C CAPACITOR	15pF 50V G		C469	C93-1959-05	C CAPACITOR	0.1uF 16V	
C334	CC73HCH1H030B	C CAPACITOR	3pF 50V B		C470	C93-1959-05	C CAPACITOR	0.1uF 16V	
C335	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C471	C93-1959-05	C CAPACITOR	0.1uF 16V	
C336	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C472	C93-1959-05	C CAPACITOR	0.1uF 16V	
C337	CK73HBB1H471K	C CAPACITOR	470pF 50V K	3820E,3820GE,3820HGK2,3820HK2	C473	C93-1959-05	C CAPACITOR	0.1uF 16V	
C337	CC73HCH1H470G	C CAPACITOR	47pF 50V G	3820HGK,3820HK	C474	C93-1959-05	C CAPACITOR	0.1uF 16V	
C338	CK73HBB1H471K	C CAPACITOR	470pF 50V K		C475	C93-1959-05	C CAPACITOR	0.1uF 16V	
C339	CC73HCH1H040B	C CAPACITOR	4pF 50V B		C476	C93-1959-05	C CAPACITOR	0.1uF 16V	
C340	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C477	C93-1959-05	C CAPACITOR	0.1uF 16V	
C341	CK73HBB1H471K	C CAPACITOR	470pF 50V K		C478	CK73HB1C105K	C CAPACITOR	1.0uF 16V K	
C342	CK73HB0J225K	C CAPACITOR	2.2uF 6.3V K		C479	C93-1959-05	C CAPACITOR	0.1uF 16V	
C343	CC73HCH1H101J	C CAPACITOR	100pF 50V J		C480	CC73HCH1H180G	C CAPACITOR	18pF 50V G	
C344	CK730BS0J106M	C CAPACITOR	10uF 6.3V M		C481	CC73HCH1H150G	C CAPACITOR	15pF 50V G	
C345	CK73HB1A474K	C CAPACITOR	0.47uF 10V K		C482	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C346	CK730BS0J106M	C CAPACITOR	10uF 6.3V M		C483	CK73HB1A224K	C CAPACITOR	0.22uF 10V K	
C347	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		C484	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C405	CK73HBB1H472K	C CAPACITOR	4700pF 50V K		C485	C93-1959-05	C CAPACITOR	0.1uF 16V	
C410	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C486	C93-1959-05	C CAPACITOR	0.1uF 16V	
C411	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		C487	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C412	CK73HB1H103K	C CAPACITOR	10000pF 50V K		C488	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C414	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		C489	CK73GB1H105K	C CAPACITOR	1uF 50V K	
C415	C93-1959-05	C CAPACITOR	0.1uF 16V		C490	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C416	C93-1959-05	C CAPACITOR	0.1uF 16V		C491	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C417	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M		C492	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C418	CK73HB1H103K	C CAPACITOR	10000pF 50V K		C493	CK73HB1C105K	C CAPACITOR	1.0uF 16V K	
C419	C93-1959-05	C CAPACITOR	0.1uF 16V		C494	C93-1959-05	C CAPACITOR	0.1uF 16V	
C420	C93-1959-05	C CAPACITOR	0.1uF 16V		C495	C93-1959-05	C CAPACITOR	0.1uF 16V	
C421	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M		C497	C93-1959-05	C CAPACITOR	0.1uF 16V	
C422	CK73GB0J106K	C CAPACITOR	10uF 6.3V K		C498	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C423	C93-1959-05	C CAPACITOR	0.1uF 16V		C501	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C424	C93-1959-05	C CAPACITOR	0.1uF 16V		C502	C93-1959-05	C CAPACITOR	0.1uF 16V	
C425	C93-1959-05	C CAPACITOR	0.1uF 16V		C503	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C426	C93-1959-05	C CAPACITOR	0.1uF 16V		C504	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C427	C93-1959-05	C CAPACITOR	0.1uF 16V		C505	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C428	C93-1959-05	C CAPACITOR	0.1uF 16V		C506	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C429	C93-1959-05	C CAPACITOR	0.1uF 16V		C507	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
C430	C93-1959-05	C CAPACITOR	0.1uF 16V		C509	CC73JCH1H101J	C CAPACITOR	100pF 50V J	
					C510	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
					C511	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
					C514	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C515	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		R5	R92-1061-05	C RESISTOR	0.008Ω	
C516	C93-1959-05	C CAPACITOR	0.1uF 16V		R21	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
C517	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		R22	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	
C518	CC73HCH1H101J	C CAPACITOR	100pF 50V J		R23	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	
C519	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		R24	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
C520	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		R25	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	
C521	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		R26	RK73HH1J223D	MG RESISTOR	22kΩ 1/16W D	
C522	CK73HB1H103K	C CAPACITOR	10000pF 50V K		R27	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
C523	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		R28	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
C524	CC73HCH1H470G	C CAPACITOR	47pF 50V G		R29	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
C525	CC73HCH1H470G	C CAPACITOR	47pF 50V G		R30	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
C526	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		R31	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
C527	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		R32	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
C528	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		R33	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
C605	CK73HB1H103K	C CAPACITOR	10000pF 50V K		R34	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
C606	CK73HB1H103K	C CAPACITOR	10000pF 50V K		R35	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
C607	C93-1959-05	C CAPACITOR	0.1uF 16V		R36	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
C608	CK73HB1H103K	C CAPACITOR	10000pF 50V K		R37	RK73JB1H472J	MG RESISTOR	4.7kΩ 1/20W J	
C609	CK73GB1H105K	C CAPACITOR	1uF 50V K		R38	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
C610	CK73GB1H105K	C CAPACITOR	1uF 50V K		R39	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
C611	CK73GB1H105K	C CAPACITOR	1uF 50V K		R40	RK73JB1H473J	MG RESISTOR	47kΩ 1/20W J	
C612	CK73GB1H105K	C CAPACITOR	1uF 50V K		R41	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
C613	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		R42	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
C614	CC73HCH1H101J	C CAPACITOR	100pF 50V J		R43	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
C615	CC73HCH1H101J	C CAPACITOR	100pF 50V J		R44	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
C616	CC73HCH1H101J	C CAPACITOR	100pF 50V J		R45	RK73HH1J473D	MG RESISTOR	47kΩ 1/16W D	
C617	CC73HCH1H101J	C CAPACITOR	100pF 50V J		R46	RK73HH1J113D	MG RESISTOR	11kΩ 1/16W D	
C618	CC73HCH1H101J	C CAPACITOR	100pF 50V J		R47	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
C619	CC73HCH1H101J	C CAPACITOR	100pF 50V J		R48	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
C620	CC73HCH1H101J	C CAPACITOR	100pF 50V J		R49	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	
C621	CK73HBB1E223K	C CAPACITOR	0.022uF 25V K		R50	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
C622	CC73HCH1H101J	C CAPACITOR	100pF 50V J		R51	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
C623	CC73HCH1H101J	C CAPACITOR	100pF 50V J		R52	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
C624	CC73HCH1H101J	C CAPACITOR	100pF 50V J		R53	RK73JB1H473J	MG RESISTOR	47kΩ 1/20W J	
C625	CC73HCH1H101J	C CAPACITOR	100pF 50V J		R54	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
C626	CK73GB1H105K	C CAPACITOR	1uF 50V K		R55	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
C627	CK73HB1A224K	C CAPACITOR	0.22uF 10V K		R56	RK73HB1J124J	MG RESISTOR	120kΩ 1/16W J	
C628	CK73HB1A224K	C CAPACITOR	0.22uF 10V K		R57	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
C629	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		R58	RK73HH1J303D	MG RESISTOR	30kΩ 1/16W D	
C630	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		R59	RK73HH1J154D	MG RESISTOR	150kΩ 1/16W D	
C631	CK73GB1H105K	C CAPACITOR	1uF 50V K		R60	RK73HH1J113D	MG RESISTOR	11kΩ 1/16W D	
C632	CK73FXR1E475K	C CAPACITOR	4.7uF 25V K		R61	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	
C633	C93-1959-05	C CAPACITOR	0.1uF 16V		R62	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
C634	C93-1959-05	C CAPACITOR	0.1uF 16V		R63	RK73HH1J113D	MG RESISTOR	11kΩ 1/16W D	
C635	CK73HB1H103K	C CAPACITOR	10000pF 50V K		R64	R92-3769-05	MG RESISTOR	10Ω 0.25W	
C636	CK73GB0J106K	C CAPACITOR	10uF 6.3V K		R65	R92-3769-05	MG RESISTOR	10Ω 0.25W	
C637	CK73GB0J106K	C CAPACITOR	10uF 6.3V K		R66	RK73HB1J334J	MG RESISTOR	330kΩ 1/16W J	
C638	C93-1959-05	C CAPACITOR	0.1uF 16V		R67	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
C639	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		R68	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
C640	C93-1959-05	C CAPACITOR	0.1uF 16V		R69	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
C641	C93-1959-05	C CAPACITOR	0.1uF 16V		R70	RK73HH1J273D	MG RESISTOR	27kΩ 1/16W D	
C642	C93-1959-05	C CAPACITOR	0.1uF 16V		R71	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
C643	C93-1959-05	C CAPACITOR	0.1uF 16V		R72	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
C644	C93-1959-05	C CAPACITOR	0.1uF 16V		R73	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
C645	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		R74	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
C646	CK73GB0J106K	C CAPACITOR	10uF 6.3V K		R75	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
C647	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		R76	RK73JB1H473J	MG RESISTOR	47kΩ 1/20W J	
C648	C93-1959-05	C CAPACITOR	0.1uF 16V		R77	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
C649	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		R78	RK73FB2B332J	MG RESISTOR	3.3kΩ 1/8W J	
C650	C93-1959-05	C CAPACITOR	0.1uF 16V		R79	RK73FB2B332J	MG RESISTOR	3.3kΩ 1/8W J	
C651	CC73JCH1H101J	C CAPACITOR	100pF 50V J		R80	RK73FB2B332J	MG RESISTOR	3.3kΩ 1/8W J	
C652	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		R81	RK73FB2B2R7J	MG RESISTOR	2.7Ω 1/8W J	
C653	CK73HBB1E223K	C CAPACITOR	0.022uF 25V K		R82	RK73FB2B3R3J	MG RESISTOR	3.3Ω 1/8W J	
C655	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		R83	RK73HH1J152D	MG RESISTOR	1.5kΩ 1/16W D	
C656	CK73GB0J106K	C CAPACITOR	10uF 6.3V K		R84	RK73HH1J472D	MG RESISTOR	4.7kΩ 1/16W D	
C657	CK73HB1E104K	C CAPACITOR	0.10uF 25V K		R103	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J	
C658	CC73HCH1H680J	C CAPACITOR	68pF 50V J		R104	RK73HB1J182J	MG RESISTOR	1.8kΩ 1/16W J	
C659	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		R105	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	3820E,3820GE,3820HGK2,3820HK2
C660	CK73HBB1H102K	C CAPACITOR	1000pF 50V K		R105	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	3820HGK,3820HK
C661	CK73HB1C105K	C CAPACITOR	1.0uF 16V K		R106	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	3820HGK,3820HK
C663	CK73HBB1H471K	C CAPACITOR	470pF 50V K		R108	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	3820HGK,3820HK
C664	CK73GB1H105K	C CAPACITOR	1uF 50V K		R109	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	3820HGK,3820HK
C665	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K		R110	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	3820HGK,3820HK
R2	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R111	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R3	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	3820HGK,3820HK	R112	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R4	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	3820E,3820GE,3820HGK2,3820HK2	R113	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
					R114	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R115	RK73HB1J124J	MG RESISTOR	120kΩ 1/16W J		R262	RK73FB2B910J	MG RESISTOR	91Ω 1/8W J	3820HGK,3820HK
R116	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R265	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R117	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R266	RK73HB1J274J	MG RESISTOR	270kΩ 1/16W J	
R118	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R267	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J	
R119	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J		R268	RK73GB2A560J	MG RESISTOR	56Ω 1/10W J	
R120	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J		R269	RK73FB2B820J	MG RESISTOR	82Ω 1/8W J	3820E,3820GE,3820HGK2,3820HK2
R121	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J		R269	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	3820HGK,3820HK
R122	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J		R270	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R123	RK73HH1J391D	MG RESISTOR	390Ω 1/16W D		R271	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R124	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R272	RK73GB2A560J	MG RESISTOR	56Ω 1/10W J	3820E,3820GE,3820HGK2,3820HK2
R125	RK73HB1J106J	MG RESISTOR	10MΩ 1/16W J		R273	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	
R126	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J		R274	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R127	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J		R275	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R128	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J		R276	RK73PB2H560J	MG RESISTOR	56Ω 1/2W J	
R129	RK73HB1J182J	MG RESISTOR	1.8kΩ 1/16W J		R277	RK73PB2H560J	MG RESISTOR	56Ω 1/2W J	
R130	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	3820E,3820GE,3820HGK2,3820HK	R278	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R130	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	3820HGK,3820HK	R280	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R131	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R281	RK73GB2A560J	MG RESISTOR	56Ω 1/10W J	
R132	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J		R282	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	
R133	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		R302	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	
R134	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		R303	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	
R135	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R304	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R136	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J		R305	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R137	RN73HH1J151D	MG RESISTOR	150Ω 0.063W D		R307	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R138	RN73HH1J100D	MF RESISTOR	10Ω 0.063W D		R308	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R139	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R309	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R140	RK73HB1J182J	MG RESISTOR	1.8kΩ 1/16W J		R310	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R141	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J		R311	RK73HH1J391D	MG RESISTOR	390Ω 1/16W D	
R142	RK73HB1J560J	MG RESISTOR	56Ω 1/16W J		R312	RK73HB1J5R6J	MG RESISTOR	5.6Ω 1/16W J	
R143	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J		R313	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
R145	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R314	RK73HB1J120J	MG RESISTOR	12Ω 1/16W J	
R146	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	3820HGK,3820HK	R315	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
R147	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R316	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	
R203	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R317	RK73HH1J473D	MG RESISTOR	47kΩ 1/16W D	
R204	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		R318	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R211	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J		R319	RK73HH1J273D	MG RESISTOR	27kΩ 1/16W D	
R212	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		R320	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R213	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R321	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R214	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J		R322	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R215	RK73HB1J390J	MG RESISTOR	39Ω 1/16W J		R323	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R216	RK73HB1J390J	MG RESISTOR	39Ω 1/16W J		R324	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R217	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J		R325	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	
R218	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J		R326	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R219	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		R407	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R220	RK73HB1J121J	MG RESISTOR	120Ω 1/16W J		R408	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R221	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J		R416	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R222	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J		R418	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R223	RK73HB1J390J	MG RESISTOR	39Ω 1/16W J		R420	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R224	RK73HB1J390J	MG RESISTOR	39Ω 1/16W J		R421	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R225	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J		R422	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R226	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J		R423	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R227	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J		R424	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R228	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J		R425	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R229	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J		R426	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	
R230	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J		R427	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	
R231	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J		R428	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R233	RK73GB2A151J	MG RESISTOR	150Ω 1/10W J		R429	RK73HB1J681J	MG RESISTOR	680Ω 1/16W J	
R235	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		R431	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R238	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J		R432	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R239	RK73GB2A271J	MG RESISTOR	270Ω 1/10W J		R433	RK73JB1H472J	MG RESISTOR	4.7kΩ 1/20W J	
R240	RK73GB2A390J	MG RESISTOR	39Ω 1/10W J		R434	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R241	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J		R435	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
R242	RK73GB2A271J	MG RESISTOR	270Ω 1/10W J		R436	RK73JB1H105J	MG RESISTOR	1MΩ 1/20W J	
R243	RK73GB2A390J	MG RESISTOR	39Ω 1/10W J		R437	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R244	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		R438	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R245	RK73HB1J223J	MG RESISTOR	2.2kΩ 1/16W J		R439	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R247	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		R440	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R248	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J		R441	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R250	RK73HB1J124J	MG RESISTOR	120kΩ 1/16W J		R442	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R251	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J		R443	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R256	RK73GB2A391J	MG RESISTOR	390Ω 1/10W J		R444	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R258	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J		R445	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R259	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J		R446	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R260	RK73HB1J124J	MG RESISTOR	120kΩ 1/16W J		R447	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R261	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J		R448	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R262	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	3820E,3820GE,3820HGK2,3820HK2	R449	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	

△ Symbol No.	Part No.	Part Name	Description	Local
R450	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R451	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R452	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R453	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R454	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R455	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R456	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R457	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R458	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R459	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R460	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R461	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R462	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R463	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R464	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R465	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R466	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R467	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R468	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R469	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R470	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R471	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R472	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R473	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R474	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R475	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R476	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R477	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R478	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R479	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R480	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R481	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R482	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R483	RK73GH2A49R9D	MG RESISTOR	49.9Ω 1/10W D	
R484	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R485	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R486	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R487	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R488	RK73JB1H102J	MG RESISTOR	1kΩ 1/20W J	
R489	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
R490	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R491	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R492	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R493	RK73JB1H220J	MG RESISTOR	22Ω 1/20W J	
R494	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R495	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R496	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R497	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R498	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R499	RK73JB1H103J	MG RESISTOR	10kΩ 1/20W J	
R500	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R501	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R502	RK73JB1H104J	MG RESISTOR	100kΩ 1/20W J	
R503	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R504	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R505	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R506	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	
R507	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R508	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R509	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R511	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	
R512	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R513	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R514	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R516	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R517	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R518	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R519	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R520	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R522	RK73FB2B332J	MG RESISTOR	3.3kΩ 1/8W J	
R523	RK73FB2B332J	MG RESISTOR	3.3kΩ 1/8W J	
R524	RK73FB2B332J	MG RESISTOR	3.3kΩ 1/8W J	
R525	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R526	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
R527	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R528	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R529	RK73HH1J223D	MG RESISTOR	22kΩ 1/16W D	
R530	RK73HH1J223D	MG RESISTOR	22kΩ 1/16W D	

△ Symbol No.	Part No.	Part Name	Description	Local
R531	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R532	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R533	RK73HH1J223D	MG RESISTOR	22kΩ 1/16W D	
R534	RK73HH1J223D	MG RESISTOR	22kΩ 1/16W D	
R535	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R536	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R537	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R538	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R539	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R613	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R614	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R615	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R616	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R617	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R618	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R619	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R620	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R621	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R622	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R623	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R624	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R625	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R626	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
R627	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R628	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R629	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R630	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R631	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R632	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R633	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R634	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R635	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R636	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
R637	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R638	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R639	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R640	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
R641	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R642	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R643	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R644	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R645	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R646	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R647	RK73HB1J682J	MG RESISTOR	6.8kΩ 1/16W J	
R648	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R649	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R650	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R651	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R652	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R653	RK73HB1J682J	MG RESISTOR	6.8kΩ 1/16W J	
R654	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R655	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R656	RK73FB2B102J	MG RESISTOR	1kΩ 1/8W J	
R657	RK73FB2B102J	MG RESISTOR	1kΩ 1/8W J	
R658	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R659	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R660	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R661	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R662	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R663	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R664	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R665	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R666	RK73HB1J683J	MG RESISTOR	68kΩ 1/16W J	
R667	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	
R668	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R669	RK73HB1J681J	MG RESISTOR	680Ω 1/16W J	
R670	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
R671	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R672	RK73HH1J273D	MG RESISTOR	27kΩ 1/16W D	
R673	RK73HB1J681J	MG RESISTOR	680Ω 1/16W J	
R674	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R675	RK73HB1J682J	MG RESISTOR	6.8kΩ 1/16W J	
R676	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R677	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R678	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
R679	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
R680	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
R681	RK73HH1J152D	MG RESISTOR	1.5kΩ 1/16W D	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
L1	L34-4902-05	AIR CORE COIL			L219	LB73Z0DF-001	CHIP FERRITE		
L2	L34-4758-05	AIR CORE COIL	3820E,3820GE,38 20HGK2,3820HK2		L220	LB73Z0DF-001	CHIP FERRITE		
L2	L34-4743-05	AIR CORE COIL	3820HGK,3820HK		L221	LB73Z0DF-001	CHIP FERRITE		
L3	L34-4758-05	AIR CORE COIL			L222	L41-4775-53	CHIP INDUCTOR		
L4	L34-4758-05	AIR CORE COIL			L223	LR77Z0AA68NJ	CHIP INDUCTOR	68nH	3820E,3820GE,38 20HGK2,3820HK2
L5	L34-4743-05	AIR CORE COIL			L223	LR77Z0AAR12J	CHIP INDUCTOR		3820HGK,3820HK
L6	L34-4848-05	AIR CORE COIL			L224	LR79G0GK82NG	CHIP INDUCTOR		
L7	L34-4610-15	AIR CORE COIL			L225	LB73H0AY-004	CHIP FERRITE		
L11	LB73G0AK-001	CHIP FERRITE			L226	LB73H0AV-003	CHIP FERRITE		
L12	LR79Z0FQ100M	CHIP INDUCTOR			L227	LR79G0GK3N9B	CHIP INDUCTOR		
L13	LB73G0AM-004	CHIP FERRITE			L302	LK73H0AM33NJ	M.CHIP INDUCTOR	33nH	
L14	LR79Z0AA150M	CHIP INDUCTOR			L303	LR79G0CQ18NG	CHIP INDUCTOR		
L15	LB73G0AM-004	CHIP FERRITE			L304	LR79G0CQ12NG	CHIP INDUCTOR		
L16	LB73G0AK-001	CHIP FERRITE			L305	LR79G0CQ22NG	CHIP INDUCTOR	22nH	
L17	LB73H0AV-002	CHIP FERRITE			L306	LR79G0CQ3N9C	CHIP INDUCTOR		
L18	LB73H0AV-002	CHIP FERRITE			L307	LR79G0CQ39NG	CHIP INDUCTOR		
L19	LB73G0AK-001	CHIP FERRITE			L308	LR79G0CQ39NG	CHIP INDUCTOR		
L101	LK73H0AM12NJ	M.CHIP INDUCTOR	12nH	3820E,3820GE,38 20HGK2,3820HK2	L309	LR79G0CQ39NG	CHIP INDUCTOR		
L101	LK73H0AM8N2J	M.CHIP INDUCTOR	8.2nH	3820HGK,3820HK	L310	LR79G0CQ22NG	CHIP INDUCTOR	22nH	
L102	LK73H0BX5N1B	M.CHIP INDUCTOR		3820E,3820GE,38 20HGK2,3820HK2	L311	LR79G0CQ22G	CHIP INDUCTOR		
L103	LK73H0AM8N2J	M.CHIP INDUCTOR	8.2nH	3820E,3820GE,38 20HGK2,3820HK2	L312	LK73H0AM33NJ	M.CHIP INDUCTOR	33nH	
L104	LK73H0BX5N1B	M.CHIP INDUCTOR		3820E,3820GE,38 20HGK2,3820HK2	L313	LR79G0CQ18NG	CHIP INDUCTOR		
L105	LK73H0AM8N2J	M.CHIP INDUCTOR	8.2nH	3820E,3820GE,38 20HGK2,3820HK2	L314	LK73H0AMR27J	M.CHIP INDUCTOR		
L106	LK73H0AM15NJ	M.CHIP INDUCTOR	15nH	3820E,3820GE,38 20HGK2,3820HK2	L401	LB73G0AK-001	CHIP FERRITE		
L106	LK73H0AM8N2J	M.CHIP INDUCTOR	8.2nH	3820E,3820GE,38 20HGK2,3820HK2	L402	LB73H0AV-003	CHIP FERRITE		
L107	LB73H0AV-003	CHIP FERRITE		3820HGK,3820HK	L403	LB73G0AK-001	CHIP FERRITE		
L108	L41-2785-53	CHIP INDUCTOR			L404	LR77Z0AE4R7J	CHIP INDUCTOR	4.7uH	
L109	LB73H0AV-003	CHIP FERRITE			L405	LB73G0AM-004	CHIP FERRITE		
L110	L41-2785-53	CHIP INDUCTOR			L406	L92-1101-05	CHIP FERRITE		
L111	L41-2785-53	CHIP INDUCTOR			L407	L92-1101-05	CHIP FERRITE		
L112	L41-2785-53	CHIP INDUCTOR			L408	L92-1101-05	CHIP FERRITE		
L113	L41-2785-53	CHIP INDUCTOR			L409	L92-1101-05	CHIP FERRITE		
L115	L41-2785-53	CHIP INDUCTOR			L410	LB73G0AK-001	CHIP FERRITE		
L116	L41-2785-53	CHIP INDUCTOR			L411	LB73G0AK-001	CHIP FERRITE		
L117	LB73H0AY-004	CHIP FERRITE			L412	LB73G0AK-001	CHIP FERRITE		
L118	LK73H0AM15NJ	M.CHIP INDUCTOR	15nH	3820E,3820GE,38 20HGK2,3820HK2	L413	LB73G0AK-001	CHIP FERRITE		
L118	LK73H0AM10NJ	M.CHIP INDUCTOR	10nH	3820HGK,3820HK	L414	LB73H0AV-002	CHIP FERRITE		
L119	LB73H0AY-004	CHIP FERRITE			L415	L79-1984-05	FILTER		
L120	LK73H0BX3N0B	M.CHIP INDUCTOR		3820E,3820GE,38 20HGK2,3820HK2	L416	L79-1984-05	FILTER		
L120	LK73H0AM2N7S	M.CHIP INDUCTOR	2.7nH	3820HGK,3820HK	L417	LB73H0AY-002	CHIP FERRITE		
L121	LK73H0BX39NG	M.CHIP INDUCTOR		3820E,3820GE,38 20HGK2,3820HK2	L418	LB73H0AY-002	CHIP FERRITE		
L121	LK73H0AM33NJ	M.CHIP INDUCTOR	33nH	3820HGK,3820HK	L419	L79-1984-05	FILTER		
L122	LK73H0BX1N8B	M.CHIP INDUCTOR		3820E,3820GE,38 20HGK2,3820HK2	L420	L92-1101-05	CHIP FERRITE		
L122	LK73H0AM1N8S	M.CHIP INDUCTOR	1.8nH	3820HGK,3820HK	L601	LB73H0AV-003	CHIP FERRITE		
L123	LK73H0BX39NG	M.CHIP INDUCTOR		3820E,3820GE,38 20HGK2,3820HK2	L602	LB73H0AV-003	CHIP FERRITE		
L123	LK73H0AM33NJ	M.CHIP INDUCTOR	33nH	3820HGK,3820HK	L603	LB73H0AV-003	CHIP FERRITE		
L124	LK73H0BX3N0B	M.CHIP INDUCTOR		3820E,3820GE,38 20HGK2,3820HK2	CN1	EC720AA-0560A	FFC FPC CONNE		
L124	LK73H0AM2N7S	M.CHIP INDUCTOR	2.7nH	3820HGK,3820HK	CN2	E40-6862-05	F.C.CONNECTOR		
L207	LB73H0AY-004	CHIP FERRITE			CN3	J19-5386-05	HOLDER		
L208	LB73H0AY-004	CHIP FERRITE			CP301	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	
L209	LK73H0AM15NJ	M.CHIP INDUCTOR	15nH	3820E,3820GE,38 20HGK2,3820HK2	CP302	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	
L210	LK73H0AMR12J	M.CHIP INDUCTOR	0.12uH	3820HGK,3820HK	CP303	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	
L211	LK73H0AM15NJ	M.CHIP INDUCTOR	15nH	3820E,3820GE,38 20HGK2,3820HK2	CP401	RK74HB1J103J	NET RESISTOR	10kΩ 1/16W J	
L212	LK73H0AM15NJ	M.CHIP INDUCTOR	15nH	3820HGK,3820HK	CP402	RK74HB1J222J	NET RESISTOR	2.2kΩ 1/16W J	
L213	LK73H0AM8N2J	M.CHIP INDUCTOR	8.2nH	3820E,3820GE,38 20HGK2,3820HK2	CP403	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	
L214	L41-1575-53	CHIP INDUCTOR		3820E,3820GE,38 20HGK2,3820HK2	CP404	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	
L214	L41-1275-53	CHIP INDUCTOR		3820HGK,3820HK	CP405	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	
L215	LB73F0AW-002	CHIP FERRITE			CP406	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
L216	L41-1575-53	CHIP INDUCTOR		3820E,3820GE,38 20HGK2,3820HK2	CP407	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
L216	L41-1275-53	CHIP INDUCTOR		3820HGK,3820HK	CP408	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
L217	LB73H0AV-003	CHIP FERRITE			CP409	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
L218	LB73G0BA-004	CHIP FERRITE			CP410	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
					CP411	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
					CP412	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
					CP413	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
					CP414	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	
					CP601	RK74HB1J472J	NET RESISTOR	4.7kΩ 1/16W J	
					CP602	RK74HB1J472J	NET RESISTOR	4.7kΩ 1/16W J	
					CP604	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	
					CP605	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	
					E11	F1B-0085-00	SHIELDING CASE		
					E101	F1B-0085-00	SHIELDING CASE		
					F1	F53-0286-05	FUSE		
					F2	F53-0286-05	FUSE		
					F3	F53-0286-05	FUSE		
					F4	FZA10BS-5R0	FUSE (CC)		

△ Symbol No.	Part No.	Part Name	Description	Local
F5	FZA10BS-5R0	FUSE (CC)		
F6	F53-0286-05	FUSE		
IC201	RA60H3847-501	MOS IC	3820E,3820GE,3820HGK2,3820HK2	
IC201	RA60H4452-501	MOS IC	3820HGK,3820HK	
IC601	LA4631VC-XE	ANALOG IC		
J1	E58-0567-05	SUB SOCKET D		
J2	E1B-0001-00	3.5D PHONE JACK		
TH201	NCU15WF104F6S	N THERMISTOR		
TH202	NCU15WF104F6S	N THERMISTOR		
TH203	NCU15WF104F6S	N THERMISTOR		
TH401	NCU15WF104F6S	N THERMISTOR		
X401	L7H-0076-00	TCXO		
X402	L77-1802-05	QUARTZ CRYSTAL		

SUB UNIT

XC3-050M-00

Block No. [0][3]

△ Symbol No.	Part No.	Part Name	Description	Local
IC1	MM3404A50URE	IC		
IC3	TC7WH126FK	IC		
IC4	TC7WT125FUF	IC		
IC5	BD11600NXX	IC		
IC6	TC35894FG	IC		
Q1	SSM3K15AMFV	FET		
Q2	SSM6N37FE	FET		
Q3	LTC014EEBFS8	DIGI TRANSISTOR		
Q4	LTC014EEBFS8	DIGI TRANSISTOR		
Q6	LTC014EEBFS8	DIGI TRANSISTOR		
Q8	SSM6N37FE	FET		
D1	SPC10501A01	VARISTOR		
D2	SPC10501A01	VARISTOR		
D3	B30-2365-05	LED		
D4	B30-2365-05	LED		
D5	B30-2365-05	LED		
D6	B30-2365-05	LED		
D9	NSSW206C-T865	LED		
D10	NSSW206C-T865	LED		
D11	B30-2365-05	LED		
D12	B30-2365-05	LED		
D15	NSSW206C-T865	LED		
D16	NSSW206C-T865	LED		
D17	B30-2365-05	LED		
D18	B30-2365-05	LED		
D20	B30-2364-05	LED		
D21	EDZV6.2B	ZENER DIODE		
D22	RB521CM-30	DIODE		
D24	EDZV6.8B	ZENER DIODE		
D26	RSB12Z	ZENER DIODE		
D27	MINISMDC020F	VARISTOR		
D28	EMZ6.8N	ZENER DIODE		
D30	EDZV6.8B	ZENER DIODE		
D32	RSB12Z	ZENER DIODE		
D33	B30-2365-05	LED		
D34	B30-2365-05	LED		
C1	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C2	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C3	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C6	CK73FXR1E475K	C CAPACITOR	4.7uF 25V K	
C7	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C8	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C9	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C11	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C12	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C13	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C14	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C15	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C16	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	

△ Symbol No.	Part No.	Part Name	Description	Local
C17	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C20	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C21	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C22	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C24	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C25	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C26	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C28	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C30	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C33	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C34	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C35	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C36	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C37	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C38	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	
C39	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C40	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C41	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C45	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C46	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C47	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C49	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C50	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C51	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C52	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C53	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C54	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C55	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C56	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C57	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C58	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C59	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C61	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C62	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C64	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C65	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C66	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C67	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C68	CK73GB1E105K	C CAPACITOR	1uF 25V K	
C70	CC73HCH1H470J	C CAPACITOR	47pF 50V J	
C71	CC73HCH1H470J	C CAPACITOR	47pF 50V J	
C72	CC73HCH1H470J	C CAPACITOR	47pF 50V J	
C73	CC73HCH1H470J	C CAPACITOR	47pF 50V J	
R1	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R2	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R4	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R5	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R6	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R7	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R8	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
R9	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
R10	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
R11	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
R12	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
R13	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
R14	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R15	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R16	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R17	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R18	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R19	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R20	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R21	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R22	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	
R23	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	
R24	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
R25	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
R27	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R28	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R29	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R30	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	
R31	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	
R32	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
R33	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
R36	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R37	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R38	RK73HB1J681J	MG RESISTOR	680Ω 1/16W J	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R39	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J		IC4	NJM2878F4-33	IC		
R40	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J		IC5	-----	IC	*Note	
R41	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J		IC6	74AVC4TD245GU	IC		
R42	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J		IC7	74AVC4TD245GU	IC		
R43	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J						
R44	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J		Q1	EM6M2	FET		
R45	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J						
R46	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		D17	RN262CS	DIODE		
R47	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		D18	RN262CS	DIODE		
R48	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J						
R49	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		C1	CK73HB1A474K	C CAPACITOR	0.47uF 10V K	
R50	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J		C2	CK73HB1A474K	C CAPACITOR	0.47uF 10V K	
R51	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J		C3	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
R56	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		C4	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
R57	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		C5	CK73HB1A105K	C CAPACITOR	1uF 10V K	
R58	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		C6	CK73HB1A474K	C CAPACITOR	0.47uF 10V K	
R60	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		C7	CK73HB1A474K	C CAPACITOR	0.47uF 10V K	
R61	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J		C8	CC73HCH1H220J	C CAPACITOR	22pF 50V J	
R62	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		C9	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
R63	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		C10	CK73HB1A105K	C CAPACITOR	1uF 10V K	
R64	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J		C11	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
R66	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		C12	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
R67	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		C13	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
R68	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		C14	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
R69	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		C15	CK73HB1A105K	C CAPACITOR	1uF 10V K	
R70	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		C16	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
R71	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		C17	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
R72	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		C18	CC73HCH1H180J	C CAPACITOR	18pF 50V J	
R73	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		C19	CC73HCH1H180J	C CAPACITOR	18pF 50V J	
R74	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		C20	CK73HB1A105K	C CAPACITOR	1uF 10V K	
R75	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		C21	CK73HB1A105K	C CAPACITOR	1uF 10V K	
R77	RK73GB2A680J	MG RESISTOR	68Ω 1/10W J		C22	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
R79	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		C23	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
R80	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		C24	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
R81	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		C25	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
R82	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		C26	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
R83	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J		C27	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
R84	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J		C28	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
R85	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J		C29	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
R86	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J		C30	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
R87	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J		C31	CK73HB1A105K	C CAPACITOR	1uF 10V K	
					C32	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
L1	LB73G0AM-004	CHIP FERRITE			C33	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
L2	LB73G0AM-004	CHIP FERRITE			C34	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
L3	LB73H0AV-003	CHIP FERRITE			C35	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
L6	LB73H0AV-003	CHIP FERRITE			C36	CC73HCH1H220J	C CAPACITOR	22pF 50V J	
L8	LB73H0AV-003	CHIP FERRITE			C37	CC73HCH1H220J	C CAPACITOR	22pF 50V J	
L9	LB73H0AV-003	CHIP FERRITE			C38	CC73HCH1H2R5B	C CAPACITOR	2.5pF 50V B	
L10	LB73H0AV-003	CHIP FERRITE			C39	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
L11	LB73G0AM-004	CHIP FERRITE			C40	CC73HCH1H180J	C CAPACITOR	18pF 50V J	
L12	LB73G0AM-004	CHIP FERRITE			C44	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
L13	LB73H0AV-003	CHIP FERRITE			C45	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
L14	LB73G0AM-004	CHIP FERRITE			C46	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
					C47	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
CN3	EC720AK-0512A	FFC FPC CONNE			C48	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
CN5	E41-2671-05	PIN ASSY			C49	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
CN6	EC720AA-0523A	FFC FPC CONNE			C50	CC73HCH1H470J	C CAPACITOR	47pF 50V J	
CN7	EC710AM-0560A	FFC FPC CONNE			C68	CC73HCH1H010B	C CAPACITOR	1pF 50V B	
J1	E58-0535-05	MODULAR JACK							

MODULE UNIT

**XC2-0040-10 (NX-3720GE,NX-3720HGK,
NX-3820GE,NX-3820HGK,NX-3820HGK2)**

***Note : This part cannot be replaced. Therefore,
this part is not supplied as a service part.**

Block No. [0][4]

△ Symbol No.	Part No.	Part Name	Description	Local
IC1	74AVC4TD245GU	IC		
IC2	BU18TD2WNVX	IC		
IC3	XC6209B332D-G	IC		

R1	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R2	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R3	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R4	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R7	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R8	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R9	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R10	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R11	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R12	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R13	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R14	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R15	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R16	RK73EB2E100J	MG RESISTOR	10Ω 1/4W J	
R18	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R19	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R21	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R22	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R23	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	

△ Symbol No.	Part No.	Part Name	Description	Local
R24	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R25	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R26	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R27	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R29	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
L1	LB73H0AV-002	CHIP FERRITE		
L2	LB73G0AK-001	CHIP FERRITE		
L3	LB73G0BJ-002	CHIP FERRITE		
L4	L92-0487-05	CHIP FERRITE		
L5	L92-0487-05	CHIP FERRITE		
L6	LK73H0AG27NJ	M.CHIP INDUCTOR	27nH	
L7	LK73H0AM10NJ	M.CHIP INDUCTOR	10nH	
L8	L92-0487-05	CHIP FERRITE		
L9	L7K-0059-00	FILTER		
L11	L79-1987-05	FILTER		
L13	L92-0487-05	CHIP FERRITE		
L14	L92-0487-05	CHIP FERRITE		
L15	L40-2263-71	CHIP INDUCTOR		
CN1	E40-6879-05	F.C.CONNECTOR		
CN5	E0E-0012-00	RF C.RECEPTACLE		
CP1	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	
CP2	RK74HB1J100J	NET RESISTOR	10Ω 1/16W J	
E1	F10-3226-05	SHIELDING CASE		
X1	L77-3123-05	TCXO		
X2	L77-3121-05	QUARTZ CRYSTAL		