# EXPLODED VIEW

Block No.M1MM

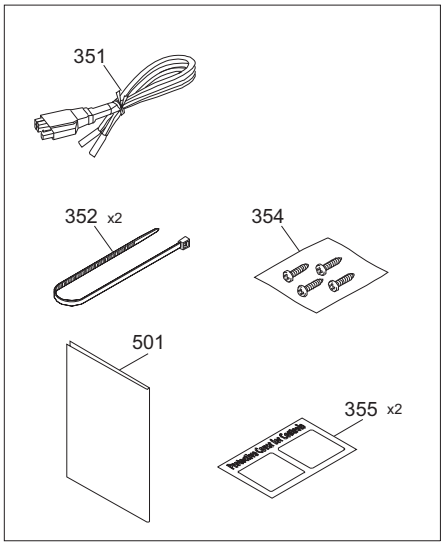


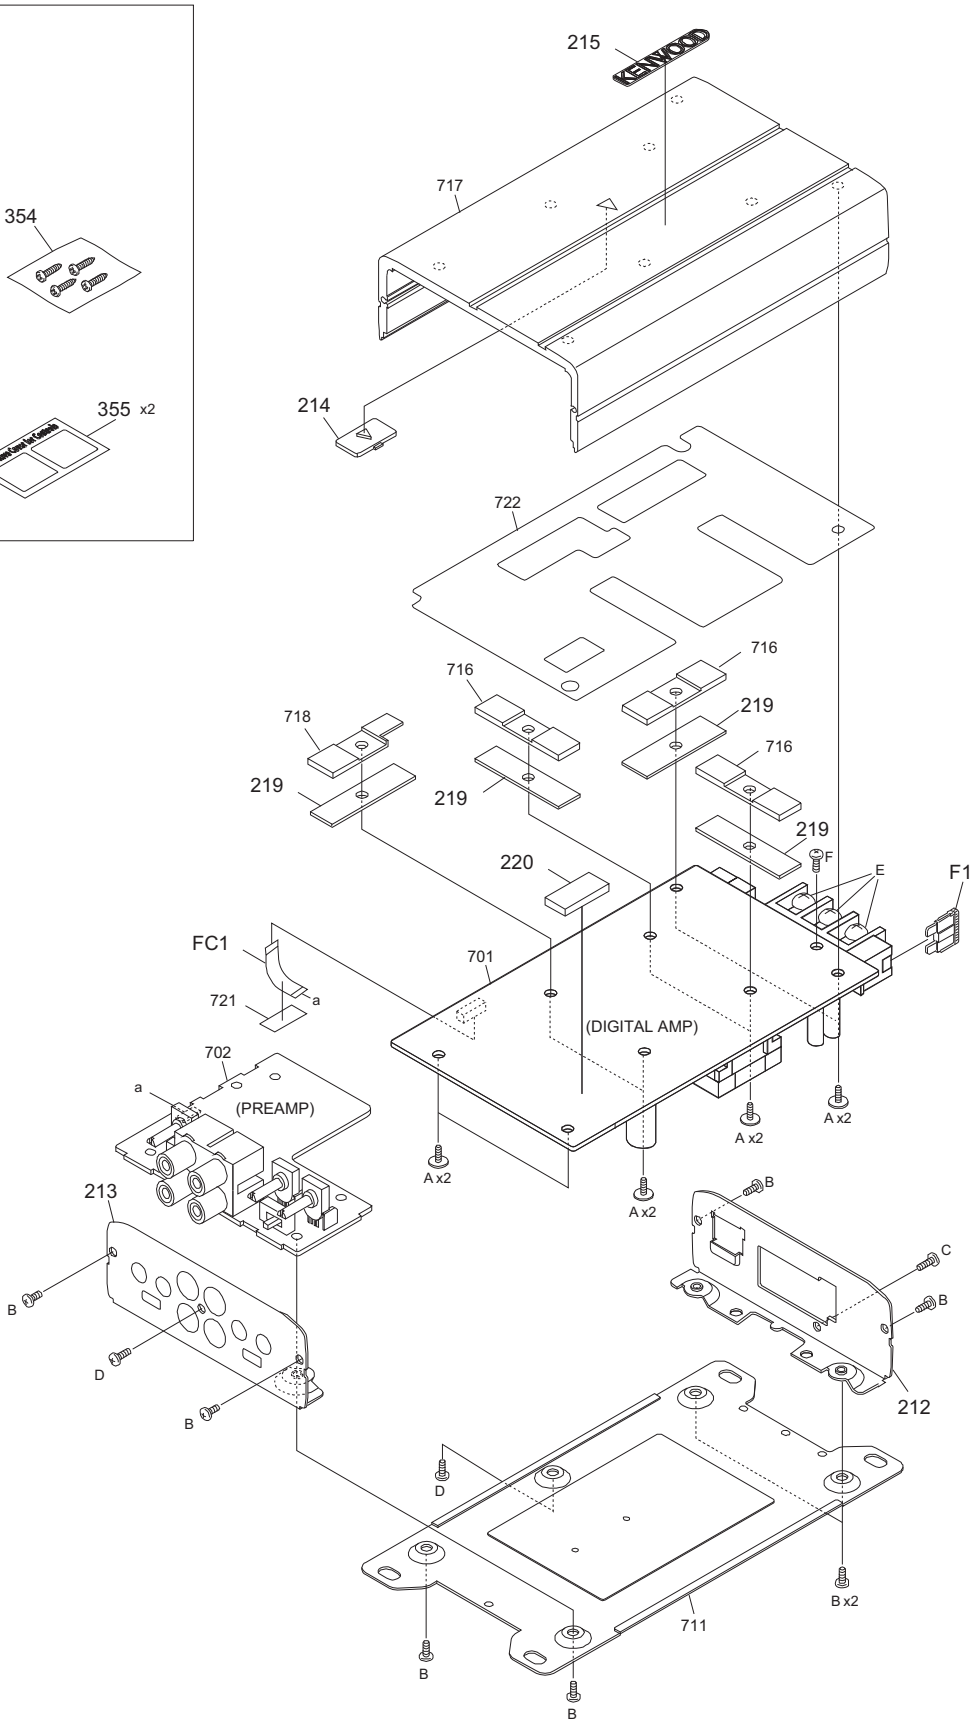


Parts with the exploded numbers larger than 700 are not supplied.

No.WA164

created date:2015-03-13

| MODEL | MARK |
|---|---|
| KAC-M3004 | |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| EXPLODED VIEW <M1MM> | | | | | | |
| ⚠ | F1 | F52-0027-05 | FUSE (30A) | 32V 30A | 1 | |
| | FC1 | E3F-0022-00 | FLAT CABLE | | 1 | |
| | A | N09-6952-05 | TAPTITE SCREW | | 8 | |
| | B | N89-2608-43 | BI.HEAD T.SCREW | | 8 | |
| | C | N80-3010-43 | P.HEAD T.SCREW | | 1 | |
| | D | N89-3008-43 | BI.HEAD T.SCREW | | 2 | |
| | E | N09-4215-08 | SCREW | M4 Ni | 3 | |
| | F | N09-6447-05 | TAPTITE SCREW | | 1 | |
| | 212 | A6D-0032-00 | PANEL | | 1 | |
| | 213 | A6D-0033-00 | PANEL | | 1 | |
| | 214 | B19-2623-04 | LIGHTING BOARD | | 1 | |
| | 215 | B43-1553-04 | BADGE | | 1 | |
| | 219 | F0C-0003-00 | COOL SHEET | | 4 | |
| | 220 | F0C-0006-00 | COOL SHEET | | 1 | |
| | 351 | E3A-0040-00 | SPEAKER CORD | | 1 | |
| | 352 | J6B-0006-00 | WIRE BAND | | 2 | |
| | 354 | N99-1840-05 | SCREW SET | | 1 | |
| | 355 | H2B-0006-00 | PROTECT SHEET | | 2 | |
| | 501 | B5A-0393-00 | INST.MANUAL | | 1 | |

| MODEL | MARK |
|---|---|
| KAC-M3004 | |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| DIGITAL AMP PWB ASSY (XK1-0090-10) <01> | | | | | | |
| | IC1 | IRS2052MPBF | ANALOG IC | | 1 | |
| | IC3 | NJM4565E-ZB | ANALOGUE IC | | 1 | |
| | IC4 | NJM4565E-ZB | ANALOGUE IC | | 1 | |
| | IC101 | IRS2052MPBF | ANALOG IC | | 1 | |
| | IC301 | TL494G-S16-R | ANALOG IC | | 1 | |
| | IC302 | BA4560RF | ANALOGUE IC | | 1 | |
| | Q3 | 2SC4154(F) | TRANSISTOR | | 1 | |
| | Q5 | IRFR4615PBF | FET | | 1 | |
| | Q6 | IRFR4615PBF | FET | | 1 | |
| | Q7 | IRFR4615PBF | FET | | 1 | |
| | Q8 | IRFR4615PBF | FET | | 1 | |
| | Q103 | 2SC4154(F) | TRANSISTOR | | 1 | |
| | Q105 | IRFR4615PBF | FET | | 1 | |
| | Q106 | IRFR4615PBF | FET | | 1 | |
| | Q107 | IRFR4615PBF | FET | | 1 | |
| | Q108 | IRFR4615PBF | FET | | 1 | |
| | Q301 | 2SC4154(F) | TRANSISTOR | | 1 | |
| | Q302 | 2SAR293P | TRANSISTOR | | 1 | |
| | Q303 | 2SC4154(F) | TRANSISTOR | | 1 | |
| | Q304 | LTA014EUBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q305 | LTC014EUBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q306 | 2SA1577 | TRANSISTOR | | 1 | |
| | Q307 | 2SA1577 | TRANSISTOR | | 1 | |
| | Q308 | STD60NF06 | FET | | 1 | |
| | Q309 | STD60NF06 | FET | | 1 | |
| | Q310 | STD60NF06 | FET | | 1 | |
| | Q311 | STD60NF06 | FET | | 1 | |
| | Q312 | 2SCR533D | TRANSISTOR | | 1 | |
| | Q313 | 2SAR533D | TRANSISTOR | | 1 | |
| | Q316 | 2SCR293P | TRANSISTOR | | 1 | |
| | Q317 | 2SAR293P | TRANSISTOR | | 1 | |
| | Q318 | 2SCR533D | TRANSISTOR | | 1 | |
| | Q322 | ISA1602AM1(F) | TRANSISTOR | | 1 | |
| | Q323 | 2SC4154(F) | TRANSISTOR | | 1 | |
| | Q324 | 2SC4154(F) | TRANSISTOR | | 1 | |
| | Q325 | 2SC4154(F) | TRANSISTOR | | 1 | |
| | Q326 | LTC014EUBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q327 | 2SC4154(F) | TRANSISTOR | | 1 | |
| | Q328 | 2SC4154(F) | TRANSISTOR | | 1 | |
| | D1 | DA204U | MULTIPLE DIODE | | 1 | |
| | D2 | DA204U | MULTIPLE DIODE | | 1 | |
| | D3 | DA2J101 | DIODE | | 1 | |
| | D4 | DA2J101 | DIODE | | 1 | |
| | D5 | RF101L2S | DIODE | | 1 | |
| | D6 | RF101L2S | DIODE | | 1 | |
| | D101 | DA204U | MULTIPLE DIODE | | 1 | |
| | D102 | DA204U | MULTIPLE DIODE | | 1 | |
| | D103 | DA2J101 | DIODE | | 1 | |
| | D104 | DA2J101 | DIODE | | 1 | |
| | D105 | RF101L2S | DIODE | | 1 | |
| | D106 | RF101L2S | DIODE | | 1 | |
| | D301 | DZ2J033M | ZENER DIODE | | 1 | |
| | D302 | DZ2J150M | ZENER DIODE | | 1 | |
| | D303 | DA2J101 | DIODE | | 1 | |
| | D304 | DZ2J068M | ZENER DIODE | | 1 | |
| | D306 | B30-1743-05 | LED(RED LED) | | 1 | |
| | D307 | DA2J101 | DIODE | | 1 | |
| | D308 | DA2J101 | DIODE | | 1 | |
| | D309 | RFN3BM2S | DIODE | | 1 | |
| | D310 | RFN3BM2S | DIODE | | 1 | |
| | D311 | RFN3BM2S | DIODE | | 1 | |
| | D312 | RFN3BM2S | DIODE | | 1 | |
| | D313 | DZ2J150M | ZENER DIODE | | 1 | |
| | D314 | DZ2J150M | ZENER DIODE | | 1 | |
| | D315 | DZ2J056M | ZENER DIODE | | 1 | |
| | D316 | DZ2J056M | ZENER DIODE | | 1 | |
| | D317 | DZ2J120M | ZENER DIODE | | 1 | |
| | D320 | LM1MA142WK-G | DIODE | | 1 | |
| | D321 | DA2J101 | DIODE | | 1 | |
| | D322 | DA2J101 | DIODE | | 1 | |
| | D324 | DA2J101 | DIODE | | 1 | |
| | D325 | DA2J101 | DIODE | | 1 | |
| | D326 | DA2J101 | DIODE | | 1 | |
| | C1 | CC73GCH1H331J | C CAPACITOR | 330pF 50V J | 1 | |
| | C2 | CC73GCH1H331J | C CAPACITOR | 330pF 50V J | 1 | |
| | C3 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C4 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C5 | CE32CL1C220M | E CAPACITOR | 22uF 16V M | 1 | |
| | C6 | CE32CL1C220M | E CAPACITOR | 22uF 16V M | 1 | |
| | C9 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C11 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C13 | CK73GBB1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C15 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C17 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C18 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C19 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C20 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C21 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C22 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C23 | CK73GBB1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C24 | CK73GBB1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |

| MODEL | MARK |
|---|---|
| KAC-M3004 | |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | C25 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C26 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C27 | CK73GBB1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C28 | CK73GBB1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C29 | CK73EXR1C226M | C CAPACITOR | 22uF 16V M | 1 | |
| | C30 | CK73EXR1C226M | C CAPACITOR | 22uF 16V M | 1 | |
| | C31 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C32 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C33 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C34 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C35 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C36 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C37 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C38 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C39 | CK73FBB1H224K | C CAPACITOR | 0.22uF 50V K | 1 | |
| | C40 | CK73FBB1H224K | C CAPACITOR | 0.22uF 50V K | 1 | |
| | C41 | CK73FBB1H224K | C CAPACITOR | 0.22uF 50V K | 1 | |
| | C42 | CK73FBB1H224K | C CAPACITOR | 0.22uF 50V K | 1 | |
| | C43 | CC73GCH1H151J | C CAPACITOR | 150pF 50V J | 1 | |
| | C44 | CC73GCH1H151J | C CAPACITOR | 150pF 50V J | 1 | |
| | C45 | CK73GBB1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C46 | CK73GBB1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C47 | CE32CC1V220M | E CAPACITOR | 22uF 35V M | 1 | |
| | C49 | CK73GBB1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C50 | CK73GBB1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C51 | CE32CC1V220M | E CAPACITOR | 22uF 35V M | 1 | |
| | C53 | CF92JV1H474J | MPC CAPACITOR | 0.47uF 50V J | 1 | |
| | C54 | CF92JV1H474J | MPC CAPACITOR | 0.47uF 50V J | 1 | |
| | C55 | CK73GBB1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C56 | CK73GBB1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C57 | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C58 | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C63 | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C64 | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C65 | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C66 | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C101 | CC73GCH1H331J | C CAPACITOR | 330pF 50V J | 1 | |
| | C102 | CC73GCH1H331J | C CAPACITOR | 330pF 50V J | 1 | |
| | C103 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C104 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C105 | CE32CL1C220M | E CAPACITOR | 22uF 16V M | 1 | |
| | C106 | CE32CL1C220M | E CAPACITOR | 22uF 16V M | 1 | |
| | C109 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C111 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C113 | CK73GBB1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C115 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C117 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C118 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C119 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C120 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C121 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C122 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C123 | CK73GBB1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C124 | CK73GBB1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C125 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C126 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C127 | CK73GBB1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C128 | CK73GBB1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C129 | CK73EXR1C226M | C CAPACITOR | 22uF 16V M | 1 | |
| | C130 | CK73EXR1C226M | C CAPACITOR | 22uF 16V M | 1 | |
| | C131 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C132 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C133 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C134 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C135 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C136 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C137 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C138 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C139 | CK73FBB1H224K | C CAPACITOR | 0.22uF 50V K | 1 | |
| | C140 | CK73FBB1H224K | C CAPACITOR | 0.22uF 50V K | 1 | |
| | C141 | CK73FBB1H224K | C CAPACITOR | 0.22uF 50V K | 1 | |
| | C142 | CK73FBB1H224K | C CAPACITOR | 0.22uF 50V K | 1 | |
| | C143 | CC73GCH1H151J | C CAPACITOR | 150pF 50V J | 1 | |
| | C144 | CC73GCH1H151J | C CAPACITOR | 150pF 50V J | 1 | |
| | C145 | CK73GBB1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C146 | CK73GBB1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C147 | CE32CC1V220M | E CAPACITOR | 22uF 35V M | 1 | |
| | C149 | CK73GBB1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C150 | CK73GBB1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C151 | CE32CC1V220M | E CAPACITOR | 22uF 35V M | 1 | |
| | C153 | CF92JV1H474J | MPC CAPACITOR | 0.47uF 50V J | 1 | |
| | C154 | CF92JV1H474J | MPC CAPACITOR | 0.47uF 50V J | 1 | |
| | C155 | CK73GBB1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C156 | CK73GBB1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C157 | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C158 | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C163 | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C166 | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C301 | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C302 | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C303 | CK73EXR1E106K | C CAPACITOR | 10uF 25V K | 1 | |
| | C304 | CK73GBB1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |

| MODEL | MARK |
|---|---|
| KAC-M3004 | |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | C305 | CK73GBB1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C306 | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C307 | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C308 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C309 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C310 | CK73GBB1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C311 | CK73GBB1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C312 | CK73GBB1H104K | C CAPACITOR | 0.1uF 50V K | 1 | |
| | C313 | CK73EXR0J476M | C CAPACITOR | 47uF 6.3V M | 1 | |
| | C314 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C315 | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C316 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C317 | CK73GBB1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C318 | CK73GBB1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C319 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C320 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C321 | CK73GBB1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C322 | CK73GBB1H222K | C CAPACITOR | 2200pF 50V K | 1 | |
| | C323 | CD04DP1V182M2 | E CAPACITOR | | 1 | |
| | C324 | CD04DP1V182M2 | E CAPACITOR | | 1 | |
| | C325 | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C326 | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C327 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C328 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C329 | CE32CL1C470M | E CAPACITOR | 47uF 16V M | 1 | |
| | C330 | CE32CL1C470M | E CAPACITOR | 47uF 16V M | 1 | |
| | C331 | CC73GCH1H050C | C CAPACITOR | 5pF 50V C | 1 | |
| | C332 | CC73GCH1H050C | C CAPACITOR | 5pF 50V C | 1 | |
| | C333 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C334 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C335 | CE32CL1C470M | E CAPACITOR | 47uF 16V M | 1 | |
| | C336 | CE32CL1C470M | E CAPACITOR | 47uF 16V M | 1 | |
| | C337 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C338 | CE32CL1C470M | E CAPACITOR | 47uF 16V M | 1 | |
| | C341 | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C342 | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C343 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C346 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | C347 | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C348 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K | 1 | |
| | C349 | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C350 | CE32CL0J101M | E CAPACITOR | 100uF 6.3V M | 1 | |
| | C351 | C90-6939-05 | E CAPACITOR | | 1 | |
| | C352 | C90-6939-05 | E CAPACITOR | | 1 | |
| | C353 | CK73GBB1C105K | C CAPACITOR | 1uF 16V K | 1 | |
| | C354 | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C356 | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C357 | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C359 | CC73GCH1H050C | C CAPACITOR | 5pF 50V C | 1 | |
| | C360 | CC73GCH1H050C | C CAPACITOR | 5pF 50V C | 1 | |
| | C361 | CE32CL0J101M | E CAPACITOR | 100uF 6.3V M | 1 | |
| | C363 | CC73GCH1H050C | C CAPACITOR | 5pF 50V C | 1 | |
| | C364 | CC73GCH1H050C | C CAPACITOR | 5pF 50V C | 1 | |
| | R1 | RK73GB2A912J | MG RESISTOR | 9.1kΩ 1/10W J | 1 | |
| | R2 | RK73GB2A912J | MG RESISTOR | 9.1kΩ 1/10W J | 1 | |
| | R7 | RK73GB2A512J | MG RESISTOR | 5.1kΩ 1/10W J | 1 | |
| | R8 | RK73GB2A512J | MG RESISTOR | 5.1kΩ 1/10W J | 1 | |
| | R11 | RK73GB2A332J | MG RESISTOR | 3.3kΩ 1/10W J | 1 | |
| | R12 | RK73GB2A332J | MG RESISTOR | 3.3kΩ 1/10W J | 1 | |
| | R13 | RK73GB2A1R0J | MG RESISTOR | 1Ω 1/10W J | 1 | |
| | R15 | RK73GB2A1R0J | MG RESISTOR | 1Ω 1/10W J | 1 | |
| | R17 | RK73GB2A223J | MG RESISTOR | 22kΩ 1/10W J | 1 | |
| | R19 | RK73GB2A223J | MG RESISTOR | 22kΩ 1/10W J | 1 | |
| | R21 | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J | 1 | |
| | R23 | RK73GB2A473J | MG RESISTOR | 47kΩ 1/10W J | 1 | |
| | R24 | RK73GB2A473J | MG RESISTOR | 47kΩ 1/10W J | 1 | |
| | R25 | RK73GB2A152J | MG RESISTOR | 1.5kΩ 1/10W J | 1 | |
| | R26 | RK73GB2A911J | MG RESISTOR | 910Ω 1/10W J | 1 | |
| | R27 | RK73FB2B100J | MG RESISTOR | 10Ω 1/8W J | 1 | |
| | R28 | RK73FB2B100J | MG RESISTOR | 10Ω 1/8W J | 1 | |
| | R29 | RK73FB2B4R7J | MG RESISTOR | 4.7Ω 1/8W J | 1 | |
| | R30 | RK73FB2B4R7J | MG RESISTOR | 4.7Ω 1/8W J | 1 | |
| | R31 | RK73GB2A822J | MG RESISTOR | 8.2kΩ 1/10W J | 1 | |
| | R32 | RK73GB2A822J | MG RESISTOR | 8.2kΩ 1/10W J | 1 | |
| | R33 | RK73FB2B100J | MG RESISTOR | 10Ω 1/8W J | 1 | |
| | R34 | RK73FB2B100J | MG RESISTOR | 10Ω 1/8W J | 1 | |
| | R35 | RK73FB2B100J | MG RESISTOR | 10Ω 1/8W J | 1 | |
| | R36 | RK73FB2B100J | MG RESISTOR | 10Ω 1/8W J | 1 | |
| | R37 | RK73GB2A102J | MG RESISTOR | 1kΩ 1/10W J | 1 | |
| | R38 | RK73GB2A102J | MG RESISTOR | 1kΩ 1/10W J | 1 | |
| | R39 | RK73EB2E100J | MG RESISTOR | 10Ω 1/4W J | 1 | |
| | R40 | RK73EB2E100J | MG RESISTOR | 10Ω 1/4W J | 1 | |
| | R41 | RK73EB2E222J | MG RESISTOR | 2.2kΩ 1/4W J | 1 | |
| | R42 | RK73EB2E222J | MG RESISTOR | 2.2kΩ 1/4W J | 1 | |
| | R43 | RK73GB2A513J | MG RESISTOR | 51kΩ 1/10W J | 1 | |
| | R44 | RK73GB2A513J | MG RESISTOR | 51kΩ 1/10W J | 1 | |
| | R45 | RK73GB2A104J | MG RESISTOR | 100kΩ 1/10W J | 1 | |
| | R46 | RK73GB2A104J | MG RESISTOR | 100kΩ 1/10W J | 1 | |
| | R47 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R48 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R49 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R50 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R51 | RK73GB2A102J | MG RESISTOR | 1kΩ 1/10W J | 1 | |

| MODEL | MARK |
|---|---|
| KAC-M3004 | |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | R53 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R54 | RK73GB2A183J | MG RESISTOR | 18kΩ 1/10W J | 1 | |
| | R55 | RK73GB2A472J | MG RESISTOR | 4.7kΩ 1/10W J | 1 | |
| | R56 | RK73GB2A471J | MG RESISTOR | 470Ω 1/10W J | 1 | |
| | R59 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R60 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R61 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R62 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R63 | RK73GB2A223J | MG RESISTOR | 22kΩ 1/10W J | 1 | |
| | R64 | RK73GB2A223J | MG RESISTOR | 22kΩ 1/10W J | 1 | |
| | R65 | RK73FB2B150J | MG RESISTOR | 15Ω 1/8W J | 1 | |
| | R66 | RK73FB2B150J | MG RESISTOR | 15Ω 1/8W J | 1 | |
| | R67 | RK73FB2B150J | MG RESISTOR | 15Ω 1/8W J | 1 | |
| | R68 | RK73FB2B150J | MG RESISTOR | 15Ω 1/8W J | 1 | |
| | R69 | RK73GB2A203J | MG RESISTOR | 20kΩ 1/10W J | 1 | |
| | R70 | RK73GB2A203J | MG RESISTOR | 20kΩ 1/10W J | 1 | |
| | R101 | RK73GB2A912J | MG RESISTOR | 9.1kΩ 1/10W J | 1 | |
| | R102 | RK73GB2A912J | MG RESISTOR | 9.1kΩ 1/10W J | 1 | |
| | R107 | RK73GB2A512J | MG RESISTOR | 5.1kΩ 1/10W J | 1 | |
| | R108 | RK73GB2A512J | MG RESISTOR | 5.1kΩ 1/10W J | 1 | |
| | R111 | RK73GB2A332J | MG RESISTOR | 3.3kΩ 1/10W J | 1 | |
| | R112 | RK73GB2A332J | MG RESISTOR | 3.3kΩ 1/10W J | 1 | |
| | R113 | RK73GB2A1R0J | MG RESISTOR | 1Ω 1/10W J | 1 | |
| | R115 | RK73GB2A1R0J | MG RESISTOR | 1Ω 1/10W J | 1 | |
| | R117 | RK73GB2A223J | MG RESISTOR | 22kΩ 1/10W J | 1 | |
| | R119 | RK73GB2A223J | MG RESISTOR | 22kΩ 1/10W J | 1 | |
| | R121 | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J | 1 | |
| | R123 | RK73GB2A473J | MG RESISTOR | 47kΩ 1/10W J | 1 | |
| | R124 | RK73GB2A473J | MG RESISTOR | 47kΩ 1/10W J | 1 | |
| | R125 | RK73GB2A621J | MG RESISTOR | 620Ω 1/10W J | 1 | |
| | R126 | RK73GB2A511J | MG RESISTOR | 510Ω 1/10W J | 1 | |
| | R127 | RK73FB2B100J | MG RESISTOR | 10Ω 1/8W J | 1 | |
| | R128 | RK73FB2B100J | MG RESISTOR | 10Ω 1/8W J | 1 | |
| | R129 | RK73FB2B4R7J | MG RESISTOR | 4.7Ω 1/8W J | 1 | |
| | R130 | RK73FB2B4R7J | MG RESISTOR | 4.7Ω 1/8W J | 1 | |
| | R131 | RK73GB2A822J | MG RESISTOR | 8.2kΩ 1/10W J | 1 | |
| | R132 | RK73GB2A822J | MG RESISTOR | 8.2kΩ 1/10W J | 1 | |
| | R133 | RK73FB2B100J | MG RESISTOR | 10Ω 1/8W J | 1 | |
| | R134 | RK73FB2B100J | MG RESISTOR | 10Ω 1/8W J | 1 | |
| | R135 | RK73FB2B100J | MG RESISTOR | 10Ω 1/8W J | 1 | |
| | R136 | RK73FB2B100J | MG RESISTOR | 10Ω 1/8W J | 1 | |
| | R137 | RK73GB2A102J | MG RESISTOR | 1kΩ 1/10W J | 1 | |
| | R138 | RK73GB2A102J | MG RESISTOR | 1kΩ 1/10W J | 1 | |
| | R139 | RK73EB2E100J | MG RESISTOR | 10Ω 1/4W J | 1 | |
| | R140 | RK73EB2E100J | MG RESISTOR | 10Ω 1/4W J | 1 | |
| | R141 | RK73EB2E222J | MG RESISTOR | 2.2kΩ 1/4W J | 1 | |
| | R142 | RK73EB2E222J | MG RESISTOR | 2.2kΩ 1/4W J | 1 | |
| | R143 | RK73GB2A513J | MG RESISTOR | 51kΩ 1/10W J | 1 | |
| | R144 | RK73GB2A513J | MG RESISTOR | 51kΩ 1/10W J | 1 | |
| | R145 | RK73GB2A104J | MG RESISTOR | 100kΩ 1/10W J | 1 | |
| | R146 | RK73GB2A104J | MG RESISTOR | 100kΩ 1/10W J | 1 | |
| | R147 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R148 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R149 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R150 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R151 | RK73GB2A102J | MG RESISTOR | 1kΩ 1/10W J | 1 | |
| | R153 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R154 | RK73GB2A183J | MG RESISTOR | 18kΩ 1/10W J | 1 | |
| | R155 | RK73GB2A472J | MG RESISTOR | 4.7kΩ 1/10W J | 1 | |
| | R156 | RK73GB2A471J | MG RESISTOR | 470Ω 1/10W J | 1 | |
| | R159 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R160 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R161 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R162 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R163 | RK73GB2A223J | MG RESISTOR | 22kΩ 1/10W J | 1 | |
| | R164 | RK73GB2A223J | MG RESISTOR | 22kΩ 1/10W J | 1 | |
| | R165 | RK73FB2B150J | MG RESISTOR | 15Ω 1/8W J | 1 | |
| | R166 | RK73FB2B150J | MG RESISTOR | 15Ω 1/8W J | 1 | |
| | R167 | RK73FB2B150J | MG RESISTOR | 15Ω 1/8W J | 1 | |
| | R168 | RK73FB2B150J | MG RESISTOR | 15Ω 1/8W J | 1 | |
| | R169 | RK73GB2A203J | MG RESISTOR | 20kΩ 1/10W J | 1 | |
| | R170 | RK73GB2A203J | MG RESISTOR | 20kΩ 1/10W J | 1 | |
| | R301 | RK73EB2E392J | MG RESISTOR | 3.9kΩ 1/4W J | 1 | |
| | R302 | RK73GB2A392J | MG RESISTOR | 3.9kΩ 1/10W J | 1 | |
| | R303 | RK73GB2A152J | MG RESISTOR | 1.5kΩ 1/10W J | 1 | |
| | R304 | RK73GB2A153J | MG RESISTOR | 15kΩ 1/10W J | 1 | |
| | R305 | RK73GB2A682J | MG RESISTOR | 6.8kΩ 1/10W J | 1 | |
| | R306 | RK73GB2A682J | MG RESISTOR | 6.8kΩ 1/10W J | 1 | |
| | R307 | RK73GB2A392J | MG RESISTOR | 3.9kΩ 1/10W J | 1 | |
| | R308 | RK73GB2A472J | MG RESISTOR | 4.7kΩ 1/10W J | 1 | |
| | R309 | RK73GB2A472J | MG RESISTOR | 4.7kΩ 1/10W J | 1 | |
| | R310 | RK73GB2A183J | MG RESISTOR | 18kΩ 1/10W J | 1 | |
| | R311 | RK73GB2A154J | MG RESISTOR | 150kΩ 1/10W J | 1 | |
| | R312 | RK73GB2A682J | MG RESISTOR | 6.8kΩ 1/10W J | 1 | |
| | R313 | RK73GB2A331J | MG RESISTOR | 330Ω 1/10W J | 1 | |
| | R314 | RK73GB2A223J | MG RESISTOR | 22kΩ 1/10W J | 1 | |
| | R315 | RK73GB2A102J | MG RESISTOR | 1kΩ 1/10W J | 1 | |
| | R317 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R318 | RK73GB2A202J | MG RESISTOR | 2kΩ 1/10W J | 1 | |
| | R319 | RK73EB2E152J | MG RESISTOR | 1.5kΩ 1/4W J | 1 | |
| | R320 | RK73GB2A102J | MG RESISTOR | 1kΩ 1/10W J | 1 | |
| | R321 | RK73GB2A102J | MG RESISTOR | 1kΩ 1/10W J | 1 | |

| MODEL | MARK |
|---|---|
| KAC-M3004 | |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | R322 | RK73GB2A472J | MG RESISTOR | 4.7kΩ 1/10W J | 1 | |
| | R323 | RK73GB2A472J | MG RESISTOR | 4.7kΩ 1/10W J | 1 | |
| | R324 | RK73GB2A680J | MG RESISTOR | 68Ω 1/10W J | 1 | |
| | R325 | RK73GB2A680J | MG RESISTOR | 68Ω 1/10W J | 1 | |
| | R326 | RK73GB2A680J | MG RESISTOR | 68Ω 1/10W J | 1 | |
| | R327 | RK73GB2A680J | MG RESISTOR | 68Ω 1/10W J | 1 | |
| | R328 | RK73PB2H100J | MG RESISTOR | 10Ω 1/2W J | 1 | |
| | R329 | RK73PB2H100J | MG RESISTOR | 10Ω 1/2W J | 1 | |
| | R330 | RK73PB2H100J | MG RESISTOR | 10Ω 1/2W J | 1 | |
| | R331 | RK73PB2H100J | MG RESISTOR | 10Ω 1/2W J | 1 | |
| | R332 | RK73PB2H100J | MG RESISTOR | 10Ω 1/2W J | 1 | |
| | R333 | RK73EB2E153J | MG RESISTOR | 15kΩ 1/4W J | 1 | |
| | R334 | RK73EB2E153J | MG RESISTOR | 15kΩ 1/4W J | 1 | |
| | R335 | RK73EB2E4R7J | MG RESISTOR | 4.7Ω 1/4W J | 1 | |
| | R336 | RK73EB2E4R7J | MG RESISTOR | 4.7Ω 1/4W J | 1 | |
| | R337 | RK73EB2E392J | MG RESISTOR | 3.9kΩ 1/4W J | 1 | |
| | R338 | RK73EB2E392J | MG RESISTOR | 3.9kΩ 1/4W J | 1 | |
| | R339 | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J | 1 | |
| | R340 | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J | 1 | |
| | R346 | RK73GB2A473J | MG RESISTOR | 47kΩ 1/10W J | 1 | |
| | R347 | RK73GB2A473J | MG RESISTOR | 47kΩ 1/10W J | 1 | |
| | R348 | RK73GH2A100D | MG RESISTOR | 10Ω 1/10W D | 1 | |
| | R349 | RK73GH2A100D | MG RESISTOR | 10Ω 1/10W D | 1 | |
| | R350 | RK73PB2H151J | MG RESISTOR | 150Ω 1/2W J | 1 | |
| | R351 | RK73PB2H151J | MG RESISTOR | 150Ω 1/2W J | 1 | |
| | R352 | RK73GB2A272J | MG RESISTOR | 2.7kΩ 1/10W J | 1 | |
| | R353 | RK73GB2A272J | MG RESISTOR | 2.7kΩ 1/10W J | 1 | |
| | R354 | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J | 1 | |
| | R355 | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J | 1 | |
| | R356 | RK73EB2E4R7J | MG RESISTOR | 4.7Ω 1/4W J | 1 | |
| | R357 | RK73EB2E222J | MG RESISTOR | 2.2kΩ 1/4W J | 1 | |
| | R358 | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J | 1 | |
| | R365 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R366 | RK73GB2A562J | MG RESISTOR | 5.6kΩ 1/10W J | 1 | |
| | R367 | RK73GB2A152J | MG RESISTOR | 1.5kΩ 1/10W J | 1 | |
| | R368 | RK73GB2A223J | MG RESISTOR | 22kΩ 1/10W J | 1 | |
| | R369 | RK73GB2A154J | MG RESISTOR | 150kΩ 1/10W J | 1 | |
| | R372 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R373 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R374 | RK73GB2A333J | MG RESISTOR | 33kΩ 1/10W J | 1 | |
| | R375 | RK73GB2A682J | MG RESISTOR | 6.8kΩ 1/10W J | 1 | |
| | R376 | RK73GB2A102J | MG RESISTOR | 1kΩ 1/10W J | 1 | |
| | R377 | RK73GB2A164J | MG RESISTOR | 160kΩ 1/10W J | 1 | |
| | R378 | RK73GB2A102J | MG RESISTOR | 1kΩ 1/10W J | 1 | |
| | R379 | RK73GB2A273J | MG RESISTOR | 27kΩ 1/10W J | 1 | |
| | R380 | RK73GB2A472J | MG RESISTOR | 4.7kΩ 1/10W J | 1 | |
| | R381 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R382 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R383 | RK73GB2A102J | MG RESISTOR | 1kΩ 1/10W J | 1 | |
| | R384 | RK73GB2A562J | MG RESISTOR | 5.6kΩ 1/10W J | 1 | |
| | R386 | RK73GB2A104J | MG RESISTOR | 100kΩ 1/10W J | 1 | |
| | R387 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R388 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R389 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R390 | RK73GB2A473J | MG RESISTOR | 47kΩ 1/10W J | 1 | |
| | R391 | RK73GB2A102J | MG RESISTOR | 1kΩ 1/10W J | 1 | |
| | R392 | RK73GB2A472J | MG RESISTOR | 4.7kΩ 1/10W J | 1 | |
| | L1 | LR19E0BG220M | LEADED INDUCTOR | | 1 | |
| | L2 | LR19E0BG220M | LEADED INDUCTOR | | 1 | |
| | L101 | LR19E0BG220M | LEADED INDUCTOR | | 1 | |
| | L102 | LR19E0BG220M | LEADED INDUCTOR | | 1 | |
| | L301 | L33-3209-05 | CHOKE COIL | | 1 | |
| | L302 | L1K-0008-00 | CONVERT TRANS | | 1 | |
| | CN1 | EC710AM-0510A | FFC FPC CONNE | | 1 | |
| | J1 | E58-0816-05 | R.RECEPTACLE | | 1 | |
| | J2 | E7A-0004-00 | SCREW TER.BOARD | | 1 | |
| | TH302 | TH11-3H103FT | THERMISTOR | | 1 | |
| | TH303 | TH11-3H103FT | THERMISTOR | | 1 | |
| | TH304 | TH11-3H103FT | THERMISTOR | | 1 | |
| PREAMP PWB ASSY (XKC-0010-10) <02> | | | | | | |
| | IC501 | BA4564RFV | ANALOGUE IC | | 1 | |
| | IC502 | BA4564RFV | ANALOGUE IC | | 1 | |
| | IC503 | BA4564RFV | ANALOGUE IC | | 1 | |
| | IC504 | BA4564RFV | ANALOGUE IC | | 1 | |
| | IC601 | BA4564RFV | ANALOGUE IC | | 1 | |
| | IC603 | BA4564RFV | ANALOGUE IC | | 1 | |
| | IC604 | BA4564RFV | ANALOGUE IC | | 1 | |
| | Q501 | 2SC4154(F) | TRANSISTOR | | 1 | |
| | Q502 | 2SC4154(F) | TRANSISTOR | | 1 | |
| | Q601 | 2SC4154(F) | TRANSISTOR | | 1 | |
| | Q602 | 2SC4154(F) | TRANSISTOR | | 1 | |
| | Q701 | LTA014EUBFS8 | DIGI TRANSISTOR | | 1 | |
| | Q702 | 2SC4154(F) | TRANSISTOR | | 1 | |
| | D501 | LM1MA142WK-G | DIODE | | 1 | |
| | D502 | LM1MA142WK-G | DIODE | | 1 | |
| | D503 | LM1MA142WA-G | DIODE | | 1 | |
| | D504 | LM1MA142WA-G | DIODE | | 1 | |
| | D601 | LM1MA142WK-G | DIODE | | 1 | |
| | D602 | LM1MA142WK-G | DIODE | | 1 | |
| | D603 | LM1MA142WA-G | DIODE | | 1 | |
| | D604 | LM1MA142WA-G | DIODE | | 1 | |
| | D701 | LM1MA142WK-G | DIODE | | 1 | |

| MODEL | MARK |
|---|---|
| KAC-M3004 | |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | C501 | CE32CL1C220M | E CAPACITOR | 22uF 16V M | 1 | |
| | C502 | CE32CL1C220M | E CAPACITOR | 22uF 16V M | 1 | |
| | C503 | CE32CL1C220M | E CAPACITOR | 22uF 16V M | 1 | |
| | C504 | CE32CL1C220M | E CAPACITOR | 22uF 16V M | 1 | |
| | C505 | CC73GCH1H330J | C CAPACITOR | 33pF 50V J | 1 | |
| | C506 | CC73GCH1H330J | C CAPACITOR | 33pF 50V J | 1 | |
| | C507 | CC73GCH1H330J | C CAPACITOR | 33pF 50V J | 1 | |
| | C508 | CC73GCH1H330J | C CAPACITOR | 33pF 50V J | 1 | |
| | C509 | CC73GCH1H560J | C CAPACITOR | 56pF 50V J | 1 | |
| | C510 | CC73GCH1H560J | C CAPACITOR | 56pF 50V J | 1 | |
| | C511 | CC73GCH1H330J | C CAPACITOR | 33pF 50V J | 1 | |
| | C512 | CC73GCH1H330J | C CAPACITOR | 33pF 50V J | 1 | |
| | C513 | CC73GCH1H560J | C CAPACITOR | 56pF 50V J | 1 | |
| | C514 | CC73GCH1H560J | C CAPACITOR | 56pF 50V J | 1 | |
| | C515 | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C516 | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C519 | CC73GCH1H101J | C CAPACITOR | 100pF 50V J | 1 | |
| | C520 | CC73GCH1H101J | C CAPACITOR | 100pF 50V J | 1 | |
| | C521 | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C523 | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C525 | CC73GCH1H560J | C CAPACITOR | 56pF 50V J | 1 | |
| | C526 | CC73GCH1H560J | C CAPACITOR | 56pF 50V J | 1 | |
| | C527 | CK73GBB1H473K | C CAPACITOR | 0.047uF 50V K | 1 | |
| | C528 | CK73GBB1H473K | C CAPACITOR | 0.047uF 50V K | 1 | |
| | C529 | CK73GBB1C334K | C CAPACITOR | 0.33uF 16V K | 1 | |
| | C530 | CK73GBB1C334K | C CAPACITOR | 0.33uF 16V K | 1 | |
| | C531 | CC73GCH1H560J | C CAPACITOR | 56pF 50V J | 1 | |
| | C532 | CC73GCH1H560J | C CAPACITOR | 56pF 50V J | 1 | |
| | C533 | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C601 | CE32CL1C220M | E CAPACITOR | 22uF 16V M | 1 | |
| | C602 | CE32CL1C220M | E CAPACITOR | 22uF 16V M | 1 | |
| | C603 | CE32CL1C220M | E CAPACITOR | 22uF 16V M | 1 | |
| | C604 | CE32CL1C220M | E CAPACITOR | 22uF 16V M | 1 | |
| | C605 | CC73GCH1H330J | C CAPACITOR | 33pF 50V J | 1 | |
| | C606 | CC73GCH1H330J | C CAPACITOR | 33pF 50V J | 1 | |
| | C607 | CC73GCH1H330J | C CAPACITOR | 33pF 50V J | 1 | |
| | C608 | CC73GCH1H330J | C CAPACITOR | 33pF 50V J | 1 | |
| | C609 | CC73GCH1H560J | C CAPACITOR | 56pF 50V J | 1 | |
| | C610 | CC73GCH1H560J | C CAPACITOR | 56pF 50V J | 1 | |
| | C611 | CC73GCH1H330J | C CAPACITOR | 33pF 50V J | 1 | |
| | C612 | CC73GCH1H330J | C CAPACITOR | 33pF 50V J | 1 | |
| | C613 | CC73GCH1H560J | C CAPACITOR | 56pF 50V J | 1 | |
| | C614 | CC73GCH1H560J | C CAPACITOR | 56pF 50V J | 1 | |
| | C617 | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C618 | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K | 1 | |
| | C619 | CC73GCH1H101J | C CAPACITOR | 100pF 50V J | 1 | |
| | C620 | CC73GCH1H101J | C CAPACITOR | 100pF 50V J | 1 | |
| | C625 | CC73GCH1H560J | C CAPACITOR | 56pF 50V J | 1 | |
| | C626 | CC73GCH1H560J | C CAPACITOR | 56pF 50V J | 1 | |
| | C627 | CK73GBB1H473K | C CAPACITOR | 0.047uF 50V K | 1 | |
| | C628 | CK73GBB1H473K | C CAPACITOR | 0.047uF 50V K | 1 | |
| | C629 | CK73GBB1C334K | C CAPACITOR | 0.33uF 16V K | 1 | |
| | C630 | CK73GBB1C334K | C CAPACITOR | 0.33uF 16V K | 1 | |
| | C631 | CC73GCH1H560J | C CAPACITOR | 56pF 50V J | 1 | |
| | C632 | CC73GCH1H560J | C CAPACITOR | 56pF 50V J | 1 | |
| | C701 | CK73FBB0J106K | C CAPACITOR | 10uF 6.3V K | 1 | |
| | C702 | CC73GCH1H102J | C CAPACITOR | 1000pF 50V J | 1 | |
| | R501 | RK73GB2A752J | MG RESISTOR | 7.5kΩ 1/10W J | 1 | |
| | R502 | RK73GB2A153J | MG RESISTOR | 15kΩ 1/10W J | 1 | |
| | R503 | RK73GB2A752J | MG RESISTOR | 7.5kΩ 1/10W J | 1 | |
| | R505 | RK73GB2A224J | MG RESISTOR | 220kΩ 1/10W J | 1 | |
| | R506 | RK73GB2A224J | MG RESISTOR | 220kΩ 1/10W J | 1 | |
| | R507 | RK73GB2A224J | MG RESISTOR | 220kΩ 1/10W J | 1 | |
| | R508 | RK73GB2A224J | MG RESISTOR | 220kΩ 1/10W J | 1 | |
| | R509 | RK73GB2A472J | MG RESISTOR | 4.7kΩ 1/10W J | 1 | |
| | R510 | RK73GB2A472J | MG RESISTOR | 4.7kΩ 1/10W J | 1 | |
| | R511 | RK73GB2A472J | MG RESISTOR | 4.7kΩ 1/10W J | 1 | |
| | R512 | RK73GB2A472J | MG RESISTOR | 4.7kΩ 1/10W J | 1 | |
| | R513 | RK73GH2A103D | MG RESISTOR | 10kΩ 1/10W D | 1 | |
| | R514 | RK73GH2A103D | MG RESISTOR | 10kΩ 1/10W D | 1 | |
| | R515 | RK73GH2A103D | MG RESISTOR | 10kΩ 1/10W D | 1 | |
| | R516 | RK73GH2A103D | MG RESISTOR | 10kΩ 1/10W D | 1 | |
| | R517 | RK73GH2A682D | MG RESISTOR | 6.8kΩ 1/10W D | 1 | |
| | R518 | RK73GH2A682D | MG RESISTOR | 6.8kΩ 1/10W D | 1 | |
| | R519 | RK73GH2A682D | MG RESISTOR | 6.8kΩ 1/10W D | 1 | |
| | R520 | RK73GH2A682D | MG RESISTOR | 6.8kΩ 1/10W D | 1 | |
| | R521 | RK73GB2A431J | MG RESISTOR | 430Ω 1/10W J | 1 | |
| | R522 | RK73GB2A431J | MG RESISTOR | 430Ω 1/10W J | 1 | |
| | R523 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R524 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R525 | RK73GB2A511J | MG RESISTOR | 510Ω 1/10W J | 1 | |
| | R526 | RK73GB2A511J | MG RESISTOR | 510Ω 1/10W J | 1 | |
| | R527 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R528 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R529 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R530 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R531 | RK73GB2A152J | MG RESISTOR | 1.5kΩ 1/10W J | 1 | |
| | R532 | RK73GB2A152J | MG RESISTOR | 1.5kΩ 1/10W J | 1 | |
| | R533 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R534 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R535 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R536 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R537 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |

| MODEL | MARK |
|---|---|
| KAC-M3004 | |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|---|---|---|---|---|---|---|
| | R538 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R539 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R540 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R541 | RK73GB2A302J | MG RESISTOR | 3kΩ 1/10W J | 1 | |
| | R542 | RK73GB2A302J | MG RESISTOR | 3kΩ 1/10W J | 1 | |
| | R543 | RK73GB2A222J | MG RESISTOR | 2.2kΩ 1/10W J | 1 | |
| | R544 | RK73GB2A222J | MG RESISTOR | 2.2kΩ 1/10W J | 1 | |
| | R545 | RK73GB2A163J | MG RESISTOR | 16kΩ 1/10W J | 1 | |
| | R546 | RK73GB2A163J | MG RESISTOR | 16kΩ 1/10W J | 1 | |
| | R553 | RK73GB2A224J | MG RESISTOR | 220kΩ 1/10W J | 1 | |
| | R554 | RK73GB2A224J | MG RESISTOR | 220kΩ 1/10W J | 1 | |
| | R601 | RK73GB2A752J | MG RESISTOR | 7.5kΩ 1/10W J | 1 | |
| | R602 | RK73GB2A153J | MG RESISTOR | 15kΩ 1/10W J | 1 | |
| | R603 | RK73GB2A752J | MG RESISTOR | 7.5kΩ 1/10W J | 1 | |
| | R605 | RK73GB2A224J | MG RESISTOR | 220kΩ 1/10W J | 1 | |
| | R606 | RK73GB2A224J | MG RESISTOR | 220kΩ 1/10W J | 1 | |
| | R607 | RK73GB2A224J | MG RESISTOR | 220kΩ 1/10W J | 1 | |
| | R608 | RK73GB2A224J | MG RESISTOR | 220kΩ 1/10W J | 1 | |
| | R609 | RK73GB2A472J | MG RESISTOR | 4.7kΩ 1/10W J | 1 | |
| | R610 | RK73GB2A472J | MG RESISTOR | 4.7kΩ 1/10W J | 1 | |
| | R611 | RK73GB2A472J | MG RESISTOR | 4.7kΩ 1/10W J | 1 | |
| | R612 | RK73GB2A472J | MG RESISTOR | 4.7kΩ 1/10W J | 1 | |
| | R613 | RK73GH2A103D | MG RESISTOR | 10kΩ 1/10W D | 1 | |
| | R614 | RK73GH2A103D | MG RESISTOR | 10kΩ 1/10W D | 1 | |
| | R615 | RK73GH2A103D | MG RESISTOR | 10kΩ 1/10W D | 1 | |
| | R616 | RK73GH2A103D | MG RESISTOR | 10kΩ 1/10W D | 1 | |
| | R617 | RK73GH2A682D | MG RESISTOR | 6.8kΩ 1/10W D | 1 | |
| | R618 | RK73GH2A682D | MG RESISTOR | 6.8kΩ 1/10W D | 1 | |
| | R619 | RK73GH2A682D | MG RESISTOR | 6.8kΩ 1/10W D | 1 | |
| | R620 | RK73GH2A682D | MG RESISTOR | 6.8kΩ 1/10W D | 1 | |
| | R621 | RK73GB2A431J | MG RESISTOR | 430Ω 1/10W J | 1 | |
| | R622 | RK73GB2A431J | MG RESISTOR | 430Ω 1/10W J | 1 | |
| | R623 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R624 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R625 | RK73GB2A511J | MG RESISTOR | 510Ω 1/10W J | 1 | |
| | R626 | RK73GB2A511J | MG RESISTOR | 510Ω 1/10W J | 1 | |
| | R627 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R628 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R629 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R630 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R631 | RK73GB2A152J | MG RESISTOR | 1.5kΩ 1/10W J | 1 | |
| | R632 | RK73GB2A152J | MG RESISTOR | 1.5kΩ 1/10W J | 1 | |
| | R633 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R634 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R635 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R636 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R637 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R638 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R639 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R640 | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J | 1 | |
| | R641 | RK73GB2A302J | MG RESISTOR | 3kΩ 1/10W J | 1 | |
| | R642 | RK73GB2A302J | MG RESISTOR | 3kΩ 1/10W J | 1 | |
| | R643 | RK73GB2A222J | MG RESISTOR | 2.2kΩ 1/10W J | 1 | |
| | R644 | RK73GB2A222J | MG RESISTOR | 2.2kΩ 1/10W J | 1 | |
| | R645 | RK73GB2A163J | MG RESISTOR | 16kΩ 1/10W J | 1 | |
| | R646 | RK73GB2A163J | MG RESISTOR | 16kΩ 1/10W J | 1 | |
| | R653 | RK73GB2A224J | MG RESISTOR | 220kΩ 1/10W J | 1 | |
| | R654 | RK73GB2A224J | MG RESISTOR | 220kΩ 1/10W J | 1 | |
| | R701 | RK73GB2A163J | MG RESISTOR | 16kΩ 1/10W J | 1 | |
| | R702 | RK73GB2A472J | MG RESISTOR | 4.7kΩ 1/10W J | 1 | |
| | R704 | RK73GB2A222J | MG RESISTOR | 2.2kΩ 1/10W J | 1 | |
| | R705 | RK73GB2A333J | MG RESISTOR | 33kΩ 1/10W J | 1 | |
| | R706 | RK73GB2A563J | MG RESISTOR | 56kΩ 1/10W J | 1 | |
| | VR501 | R31-0264-05 | V RESISTOR | | 1 | |
| | VR502 | R31-0265-05 | V RESISTOR | | 1 | |
| | VR601 | R31-0264-05 | V RESISTOR | | 1 | |
| | VR602 | R31-0265-05 | V RESISTOR | | 1 | |
| | CN502 | EC720AA-0510A | FFC FPC CONNE | | 1 | |
| | J501 | E6D-0003-00 | PIN JACK | | 1 | |
| | P501 | E29-2111-04 | LEAD PLATE | | 1 | |
| | S501 | S31-2630-05 | SLIDE SWITCH | | 1 | |
| | S601 | S31-2630-05 | SLIDE SWITCH | | 1 | |