


2. EXPLODED VIEWS AND PARTS LIST

2.1 PACKING

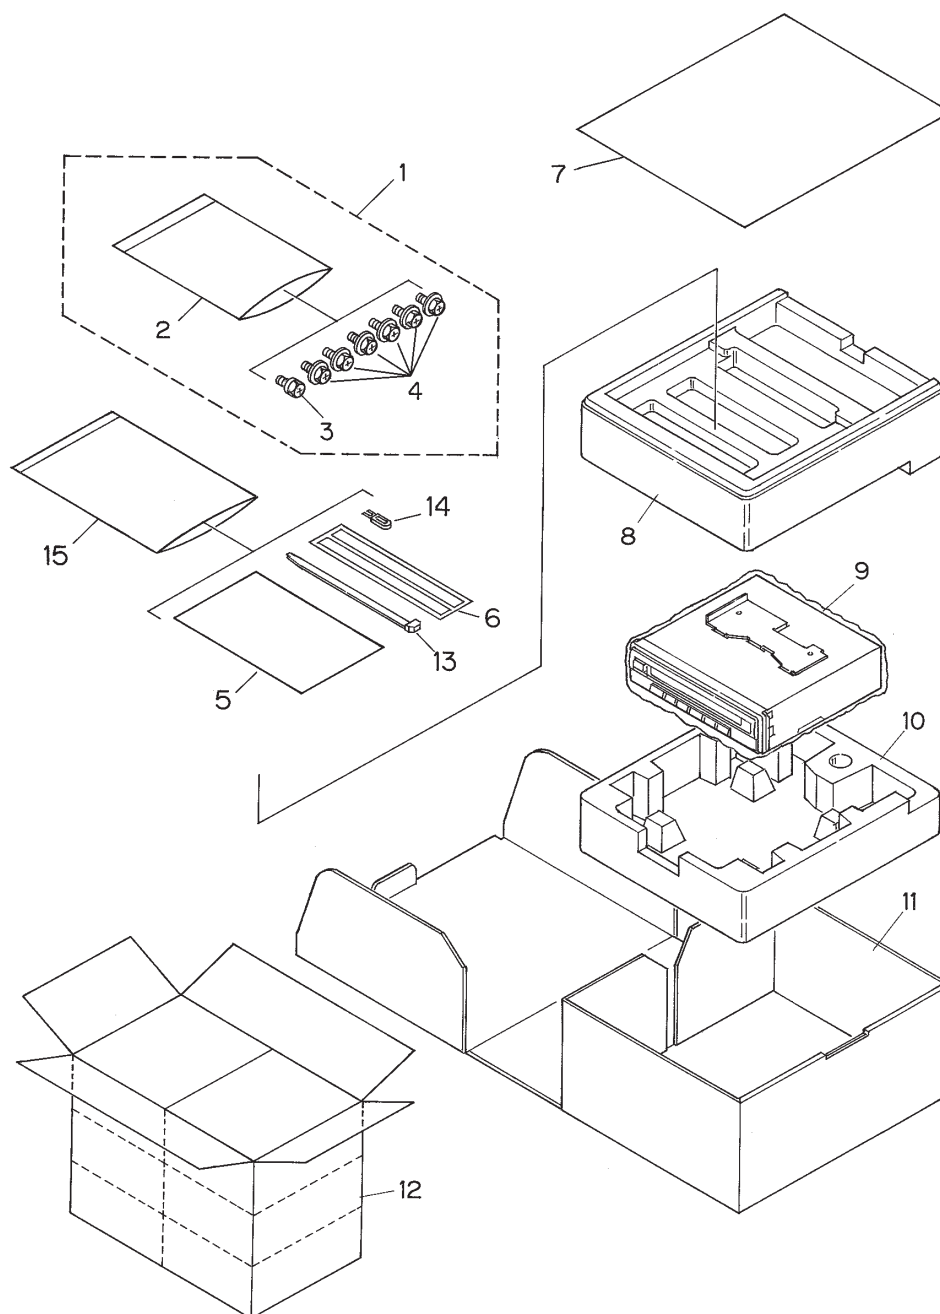


NOTE:

- Parts marked by "*" are generally unavailable because they are not in our Master Spare Parts List.
- Screws adjacent to ∇ mark on the product are used for disassembly.

● PACKING SECTION PARTS LIST

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
	1	Screw Assy	CEA2565		9	Polyethylene Bag	E36-609
*	2	Polyethylene Bag	CEG-127		10	Protector	CHP2124
	3	Screw	HMF40P060FZK		11	Carton	CHG3764
	4	Screw	HMF50P080FMC		12	Contain Box	CHL3764
	5	Owner's Manual(English)	CRB1553		13	Clamper	CNV4042
	6	Spacer	CNM6551				
*	7	Sheet	CHW1402	*	14	Band	CNF-512
	8	Protector	CHP2123		15	Polyethylene Bag	CEG1116


2.2 EXTERIOR

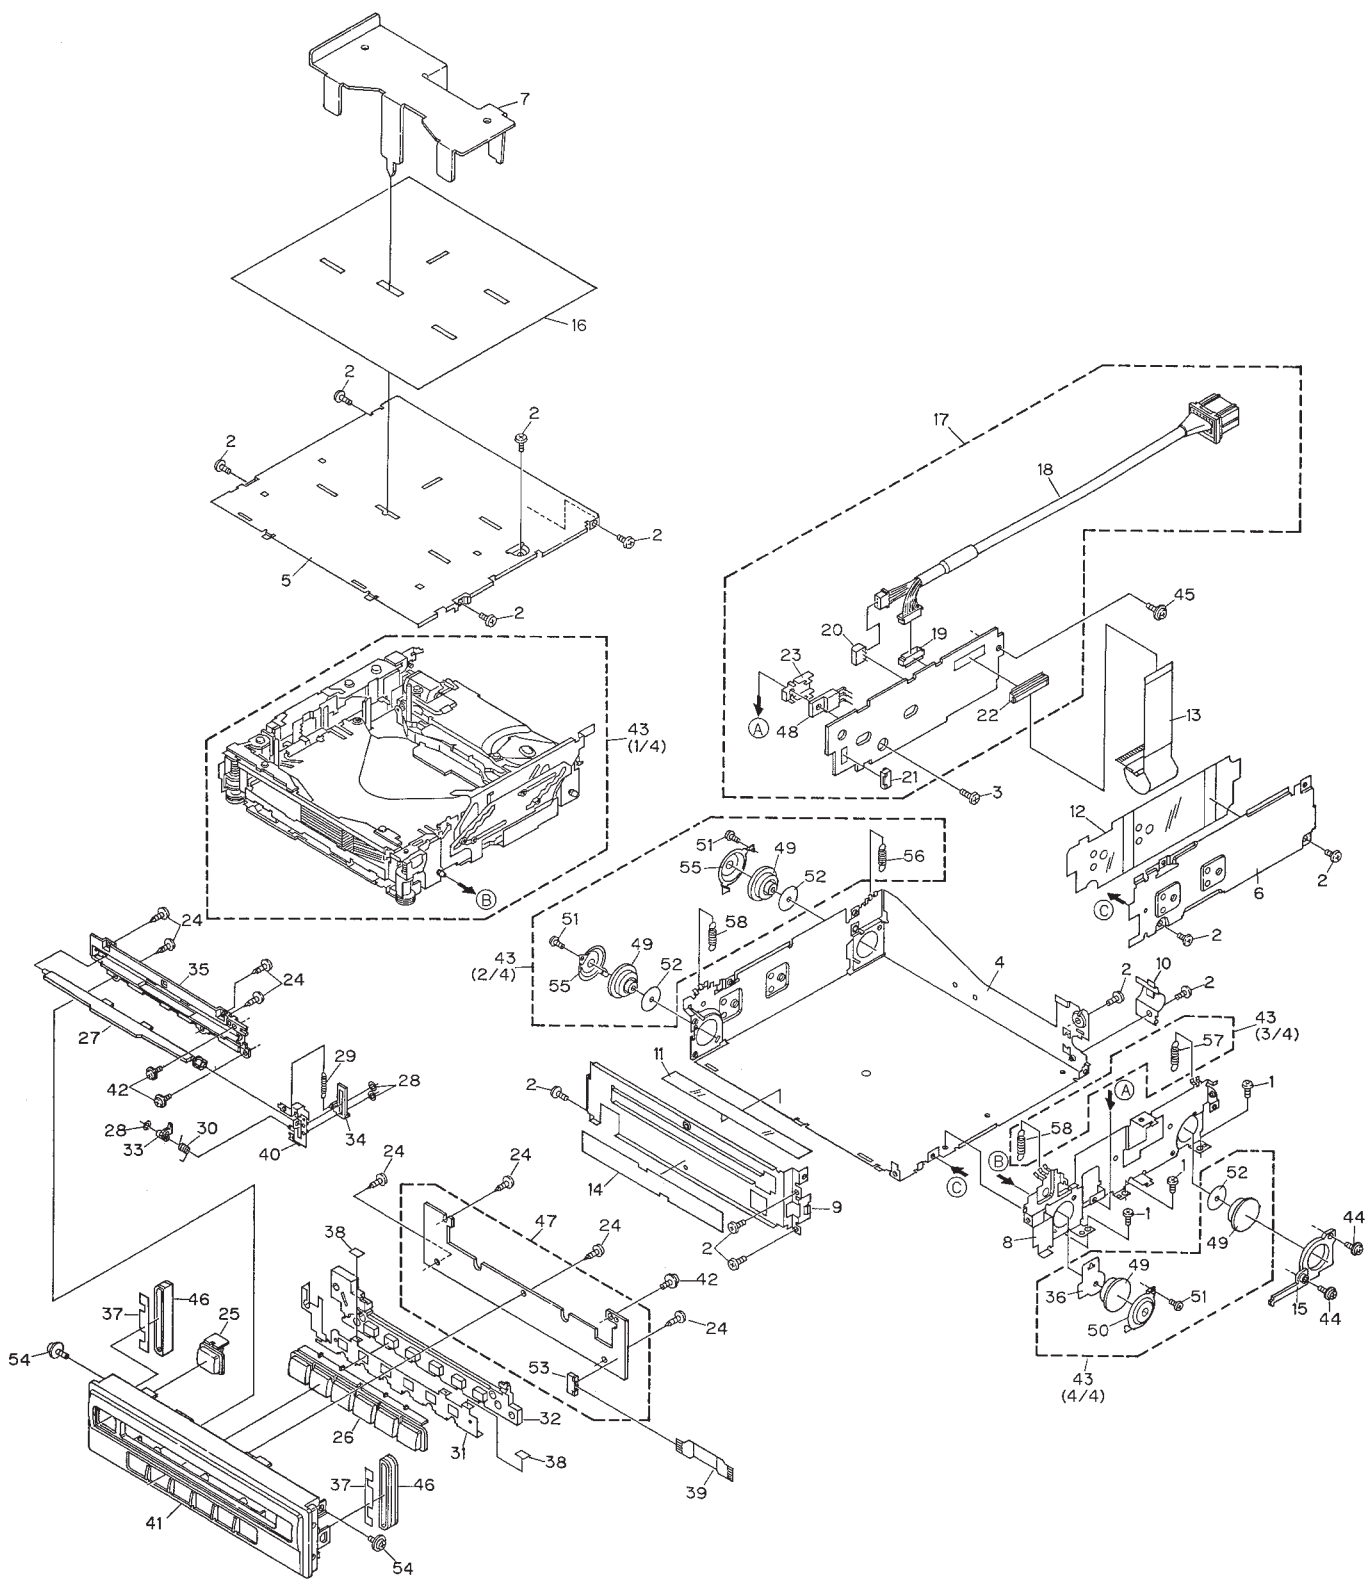

● EXTERIOR SECTION PARTS LIST

Mark No.	Description	Part No.	Mark No.	Description	Part No.
1	Screw	BMZ20P020FMC	31	Conductor	CNC8051
2	Screw	BMZ26P030FMC	32	Lighting Conductor	CNV5901
3	Screw	BMZ26P060FMC	33	Gear	CNV5547
4	Chassis Unit	CXB3407	34	Arm	CNV5548
5	Case	CNB2354	35	Guide	CNV5880
6	Side Frame	CNB2397	36	Sheet	CNM6318
7	Bracket	CNC7878	37	Double Faced Tape	CNM6424
8	Bracket	CNC8026	38	Insulator	CNM6512
9	Front Frame	CNC8110	39	PCB	CNP5373
10	Holder	CNC8111	40	Bracket Unit	CXB3111
11	Insulator	CNM5969	41	Grille Unit	CXB3409
12	Insulator	CNM6112	42	Screw	IMS20P040FMC
13	PCB	CNP5516	43	CD Mechanism Module(G1)	CXK4702
14	Insulator	CNM6409	44	Screw	IMS20P040FMC
15	Holder	CNV5543	45	Screw	IMS26P040FMC
*	16 Caution Label	CRP1200	46	Cushion	CNV5674
	17 Extension Unit	CWM6288	47	Keyboard Unit	CWM6289
	18 Cord	CDE6055	48	Transistor(Q708)	2SB1335A
	19 Connector(CN102)	CKS2200	49	Damper	CNV5120
	20 Connector(CN103)	CKS3597	50	Holder	CNC7826
	21 Connector(CN701)	CKS3785	51	Screw	CBA1250
	22 Connector(CN101)	CKS3989	52	Sheet	CNM5981
	23 Holder	CNC8031	53	Connector(CN901)	CKS3785
	24 Screw	BPZ20P060FMC	54	Screw	IMS26P030FZK
	25 Button	CAC5864	55	Holder	CNC7477
	26 Button	CAC5865	56	Spring(Left Rear)	CBH2065
	27 Door	CAT2003	57	Spring(Right Rear)(Black)	CBH2067
	28 Washer	CBF1038	58	Spring(Front)	CBH2066
	29 Spring	CBH2201			
	30 Spring	CBH2200			

2.3 CD MECHANISM

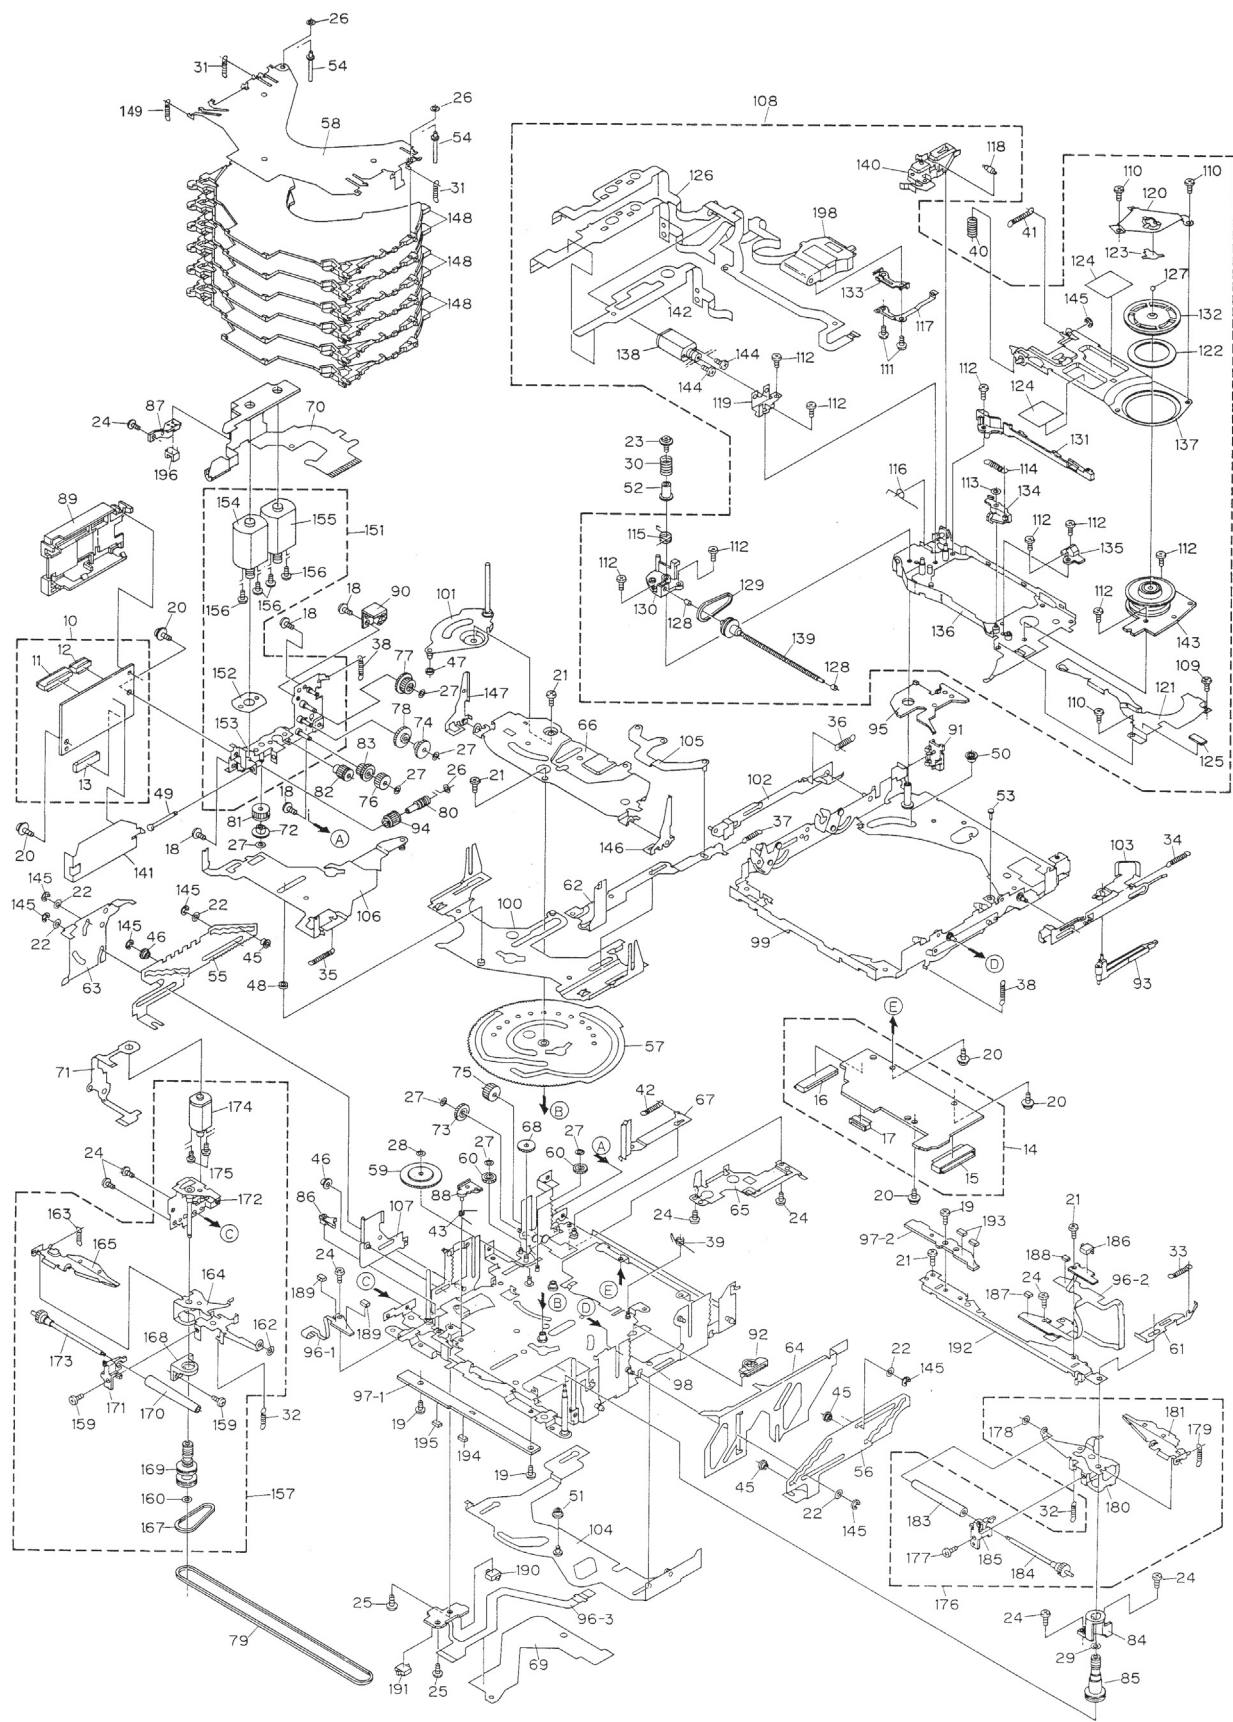

● CD MECHANISM SECTION PARTS LIST

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
	1-9	●●●●●			54	Shaft	CLA3693
	10	CD Core Unit(Servo Unit)	CWX2202		55	Steer	CNC7215
	11	Connector(CN101)	CKS2764		56	Steer	CNC7216
	12	Connector(CN301)	CKS3966		57	Cam	CNC7227
	13	Connector(CN201)	CKS3991	*	58	Holder	CNC7235
	14	CD Core Unit(STS Unit)	CWX2203		59	Gear	CNC7236
	15	Connector(CN701)	CKS3989		60	Gear	CNC7238
	16	Connector(CN801)	CKS3989		61	Lever	CNC7243
	17	Connector(CN802)	CKS4054		62	Lever	CNC7244
	18	Screw	CBA1037		63	Lever	CNC7245
	19	Screw	CBA1041		64	Lever	CNC7246
	20	Screw	CBA1076		65	Cover	CNC7441
	21	Screw	CBA1250		66	Holder	CNC8613
	22	Screw	CBA1405		67	Lever	CNC8024
	23	Screw	CBA1452		68	Gear	CNC8140
	24	Screw	CBA1453		69	Sheet	CNM5831
	25	Screw	CBA1479		70	PCB	CNP5680
	26	Washer	CBF1037		71	PCB	CNP5681
	27	Washer	CBF1038		72	Gear	CNR1479
	28	Washer	CBF1039		73	Gear	CNR1481
	29	Washer	CBF1064		74	Gear	CNR1495
	30	Spring	CBH2007		75	Gear	CNR1501
	31	Spring	CBH2271		76	Gear	CNR1502
	32	Spring	CBH2274		77	Gear	CNR1540
	33	Spring	CBH2014		78	Gear	CNR1541
	34	Spring	CBH2015		79	Belt	CNT1080
	35	Spring	CBH2016		80	Worm Gear	CNV5046
	36	Spring	CBH2017		81	Gear	CNV5047
	37	Spring	CBH2290		82	Gear	CNV5048
	38	Spring	CBH2019		83	Gear	CNV5049
	39	Spring	CBH2064		84	Holder	CNV5056
	40	Spring	CBH2195		85	Pulley	CNV5058
	41	Spring	CBH2196		86	Arm	CNV5061
	42	Spring	CBH2224		87	Spacer	CNV5066
	43	Spring	CBH2250		88	Arm	CNV5189
	44	●●●●●			89	Cover	CNV5207
	45	Roller	CLA3154		90	Cover	CNV5424
	46	Roller	CLA3157		91	Cover	CNV5425
	47	Roller	CLA3159		92	Lever	CNV5427
	48	Roller	CLA3160		93	Arm	CNV5491
	49	Shaft	CLA3179		94	Gear	CNV5519
	50	Spacer	CLA3194		95	Holder	CNV5648
	51	Roller	CLA3248		96	Composite PCB	CNX3141
	52	Bush	CLA3353		97	Composite PCB	CNX2989
*	53	Shaft	CLA3469		98	Chassis Unit	CXB4314

Mark No.	Description	Part No.	Mark No.	Description	Part No.
99	Frame Unit	CXB2702	144	Screw	JFZ14P020FMC
100	Lever Unit	CXB2703	145	Washer	YE15FUC
101	Arm Unit	CXB2704	146	Arm Unit	CXB4953
102	Lever Unit	CXB2708	147	Arm Unit	CXB4954
103	Lever Unit	CXB2709	148	Tray Assy	CXB4307
104	Lever Unit	CXB2711	149	Spring	CBH2269
105	Arm Unit	CXB2712	150	•••••	
106	Lever Unit	CXB2713	151	Cam Motor Assy	CXB3170
107	Lever Unit	CXB2714	152	Spacer	CNC8289
108	Carriage Mechanism Unit(G1)	CXB2998	* 153	Bracket Unit	CXB4165
109	Screw	CBA1041	* 154	Motor Unit(M1 Cam Gear)	CXB3174
110	Screw	CBA1250	* 155	Motor Unit(M3 ELV)	CXB3175
111	Screw	CBA1362	156	Screw	JFZ20P025FMC
112	Screw	CBA1471	157	Loading Arm L Assy	CXB3171
113	Washer	CBF1038	158	•••••	
114	Spring	CBH2008	159	Screw	CBA1453
115	Spring	CBH2009	160	Washer	CBF1038
116	Spring	CBH2010	161	•••••	
117	Spring	CBL1335	162	Washer	CBF1074
118	Roller	CLA3707	163	Spring	CBH2136
* 119	Bracket	CNC7228	* 164	Arm	CNC7241
120	Guide Unit	CXB4417	* 165	Arm	CXB4449
121	Cover	CNC7628	166	•••••	
122	Sheet	CNM6414	167	Belt	CNT1079
123	Sheet	CNM5378	168	Holder	CNV5055
124	Sheet	CNM5695	169	Pulley	CNV5057
125	Sheet	CNM5827	170	Roller	CNV5064
126	PCB	CNP4978	171	Guide	CNV5125
127	Ball	CNR1189	* 172	Bracket Unit	CXB4316
128	Bearing	CNR1423	173	Roller Gear Unit	CXB3176
129	Belt	CNT1079	174	Motor Unit(M2 LOAD)	CXB3177
130	Holder	CNV5037	175	Screw	JFZ14P020FMC
131	Guide	CNV5040	176	Loading Arm R Assy	CXB3172
132	Clamper	CNV5042	177	Screw	CBA1453
133	Rack	CNV5111	178	Washer	CBF1074
134	Arm	CNV5579	179	Spring	CBH2136
135	Holder	CNV5759	* 180	Arm	CNC7242
* 136	Chassis	CXB2698	* 181	Arm	CXB4448
137	Arm Unit	CXB2705	182	•••••	
138	Motor Unit(M4 CARRIAGE)	CXB3178	183	Roller	CNV5064
139	Screw Unit	CXB3179	184	Roller Gear Unit	CXB3176
140	Lever Unit	CXB4450	185	Guide	CNV5126
141	Insulator	CNM6306	186	Switch(S885 MAX)	CSN1052
142	Spacer	CNM6345	187	LED(D883)	CL202IRXTU
143	Motor(M5 SPINDLE)	CXM1120	188	Photo-transistor(Q881)	CPT230SCTD(CD)

Mark	No.	Description	Part No.
	189	LED(D891,892)	CL202IRXTU
	190	Switch(S887 CLAMP)	CSN1051
	191	Switch(S886 ELV HOME)	CSN1052
	192	Bracket Unit	CXB4306
	193	Photo-transistor(Q851,852)	CPT230SCTD(CD)
	194	Resistor(R856)	RS1/8S911J
	195	Resistor(R857)	RS1/8S821J
	196	Photo-interrupter(Q1)	RPI-221
	197	•••••	
	198	Pickup Unit(Service)(P8)	CXX1311

5. ELECTRICAL PARTS LIST

NOTE:

- Parts whose parts numbers are omitted are subject to being not supplied.
- The part numbers shown below indicate chip components.

Chip Resistor
RS1/○S○○○○J,RS1/○○S○○○J
Chip Capacitor (except for CQS.....)
CKS....., CCS....., CSZS.....

====Circuit Symbol and No.==Part Name			Part No.	====Circuit Symbol and No.==Part Name			Part No.
A Unit Number : CWM6288 Unit Name : Extension Unit				RESISTORS			
MISCELLANEOUS				R 101		RS1/16S822J	
IC 101	IC	NJM4558MD		R 102		RS1/16S822J	
IC 601	IC	PD5470A		R 103		RS1/16S682J	
IC 701	IC	M62007FP		R 104		RS1/16S682J	
Q 101	Transistor	DTC343TK		R 105		RS1/16S560J	
Q 102	Transistor	DTC343TK					
Q 103	Transistor	2SA1586		R 106		RS1/16S560J	
Q 105	Transistor	DTC343TK		R 107		RS1/16S470J	
Q 106	Transistor	DTC343TK		R 108		RS1/16S470J	
Q 501	Transistor	DTA144EU		R 109		RS1/16S473J	
Q 502	Transistor	DTC144EU		R 110		RS1/16S473J	
Q 503	Transistor	DTC124EU					
Q 601	Transistor	DTA124EU		R 111		RS1/16S220J	
Q 701	Chip Transistor	2SC2712		R 112		RS1/16S220J	
Q 702	Chip Transistor	2SC2712		R 120		RS1/16S223J	
Q 703	Transistor	2SD2318F5		R 121		RS1/16S153J	
Q 704	Transistor	2SD1007		R 501		RS1/4S221J	
Q 705	Transistor	2SD2318F5					
Q 706	Transistor	2SA1163		R 502		RS1/4S223J	
Q 707	Transistor	2SC2713		R 503		RS1/16S223J	
Q 708	Transistor	2SB1335A		R 504		RS1/16S102J	
Q 709	Transistor	DTA124EU		R 601		RS1/16S473J	
Q 710	Transistor	DTC124EU		R 602		RS1/16S473J	
Q 711	Transistor	FMW1					
Q 712	Transistor	2SK1485		R 603		RS1/16S473J	
Q 713	Chip Transistor	2SC2712		R 604		RS1/16S102J	
Q 714	Transistor	2SC2713		R 605		RS1/16S222J	
Q 715	Transistor	2SA1163		R 606		RS1/16S222J	
Q 720	Chip Transistor	2SC2712		R 607		RS1/16S222J	
Q 723	Transistor	DTC124EU					
Q 724	Chip Transistor	2SC2712		R 608		RS1/16S222J	
Q 725	Transistor	DTC124EU		R 609		RS1/16S222J	
Q 726	Transistor	2SK1485		R 610		RS1/16S222J	
D 101	Diode	MA142WA		R 611		RS1/16S561J	
D 501	Diode	1SS355		R 612		RS1/16S561J	
D 601	Diode	MA142WK					
D 701	Diode	ERC05-10B		R 613		RS1/16S561J	
D 702	Diode	1SR154-400		R 614		RS1/16S561J	
D 703	Diode	UDZS7R5(B)		R 615		RS1/16S103J	
D 704	Diode	1SS355		R 616		RS1/16S103J	
D 705	Diode	UDZS5R6(B)		R 617		RS1/16S163J	
D 706	Diode	HZU8R2(B3)					
D 707	Diode	UDZS6R2(B)		R 618		RS1/16S222J	
D 708	Diode	UDZS8R2(B)		R 619		RS1/16S0R0J	
D 709	Diode	1SS355		R 620		RS1/16S473J	
D 710	Diode	1SS355		R 621		RS1/16S433J	
D 711	Diode	1SS355		R 622		RS1/16S103J	
L 701	Coil	CTH1190					
L 702	Inductor	LCTB100K2125		R 640		RS1/16S471J	
TH 601	Thermistor	CCX1032		R 641		RS1/16S471J	
X 601	Radiator 6.290MHz	CSS1451		R 642		RS1/16S471J	
				R 643		RS1/16S471J	
				R 644		RS1/16S471J	
				R 649		RS1/16S222J	
				R 651		RS1/16S222J	
				R 652		RS1/16S471J	
				R 653		RS1/16S471J	
				R 654		RS1/16S471J	
				R 655		RS1/16S471J	
				R 656		RS1/16S471J	
				R 657		RS1/16S471J	
				R 658		RS1/16S471J	
				R 659		RS1/16S471J	

====Circuit Symbol and No.===Part Name	Part No.	====Circuit Symbol and No.===Part Name	Part No.
R 660	RS1/16S471J	R 730	RS1/10S223J
R 661	RS1/16S102J	R 731	RS1/16S101J
R 662	RS1/16S102J	R 732	RS1/4S221J
R 663	RS1/16S102J	R 733	RS1/16S511J
R 664	RS1/16S102J	R 734	RS1/16S681J
R 665	RS1/16S102J	R 735	RS1/16S561J
R 666	RS1/16S471J	R 736	RS1/16S103J
R 667	RS1/16S471J	R 737	RS1/16S273J
R 668	RS1/16S331J	R 738	RS1/16S473J
R 669	RS1/16S331J	R 740	RS1/16S103J
R 670	RS1/16S331J	R 742	RS1/16S472J
R 671	RS1/16S331J	R 743	RS1/16S362J
R 672	RS1/16S331J	R 744	RS1/16S102J
R 673	RS1/16S471J	R 745	RS1/16S223J
R 674	RS1/16S471J	R 746	RS1/16S102J
R 675	RS1/16S471J	R 747	RS1/16S103J
R 676	RS1/16S471J		
R 677	RS1/16S222J	CAPACITORS	
R 678	RS1/16S222J	C 101	CEV100M16
R 679	RS1/16S222J	C 102	CEV100M16
		C 103	CCSRCH331J50
R 680	RS1/16S154J	C 104	CCSRCH331J50
R 681	RS1/16S222J	C 105	CEV100M16
R 682	RS1/16S102J		
R 683	RS1/16S912J	C 106	CEV100M16
R 684	RS1/16S473J	C 110	CEV4R7M35
		C 112	CKSBYB473K16
R 685	RS1/16S102J	C 113	CKSBYB472K50
R 686	RS1/16S102J	C 114	CKSBYB472K50
R 689	RS1/16S273J		
R 690	RS1/16S273J	C 501	CKSQYB391K50
R 691	RS1/16S273J	C 601	CKSBYB104K16
		C 603	CKSBYB103K50
R 692	RS1/16S202J	C 605	CKSBYB103K50
R 693	RS1/16S512J	C 651	CKSBYB103K50
R 694	RS1/16S104J		
R 695	RS1/16S104J	C 701	CEAT471M16
R 696	RS1/16S104J	C 703	CEAT471M16
		C 704	CKSQYB224K16
R 697	RS1/16S222J	C 705	CEV220M6R3
R 698	RS1/16S222J	C 706	CKSBYB103K50
R 699	RS1/16S222J		
R 701	RS1/16S104J	C 707	CKSBYB473K16
R 702	RS1/16S473J	C 708	CEV4R7M35
		C 709	CKSBYB473K16
R 703	RS1/8S222J	C 710	CKSBYB473K16
R 704	RS1/16S473J	C 711	CKSBYB103K50
R 705	RS1/16S473J		
R 706	RS1/16S473J	C 712	CEV220M16
R 707	RS1/4S103J	C 713	CKSBYB473K16
		C 714	CEV220M6R3
R 708	RS1/16S223J	C 715	CKSBYB473K16
R 709	RS1/16S223J	C 716	CKSQYB103K50
R 710	RS1/16S101J		
R 711	RS1/10S153J	C 717	CKSBYB103K50
R 712	RS1/8S103J	C 720	CKSQYB334K16
		C 721	CKSBYB222K50
R 713	RS1/16S102J	C 722	CKSBYB473K16
R 714	RS1/16S103J	C 723	CKSBYB473K16
R 715	RS1/16S223J		
R 716	RS1/16S103J	C 724	CKSQYB104K25
R 717	RS1/16S473J		
		B Unit Number : CWM6289 Unit Name : Keyboard Unit	
R 718	RS1/16S472J	MISCELLANEOUS	
R 719	RS1/16S222J		
R 720	RS1/10S681J		
R 721	RS1/16S223J		
R 722	RS1/16S362J		
		IC 901	IC
R 723	RS1/16S223J	Q 903	Transistor
R 724	RS1/16S223J	Q 904	Transistor
R 726	RS1/16S223J	Q 905	Chip Transistor
R 727	RS1/4S2R2J	D 901	Diode
R 728	RS1/4S2R2J		
			BU2092FV
			2SA1586
			DTC123JU
			2SC2712
			1SS355

====Circuit Symbol and No.==Part Name			Part No.	====Circuit Symbol and No.==Part Name			Part No.
D	908	LED	CL150DCD(AB)	R	107	RS1/16S822J	
D	909	LED	CL200PGCTU	R	108	RS1/16S333J	
D	910	LED	CL150DCD(AB)	R	109	RS1/16S683J	
D	911	LED	CL200PGCTU	R	110	RS1/16S134J	
D	912	LED	CL150DCD(AB)	R	111	RS1/16S273J	
D	913	LED	CL200PGCTU	R	112	RS1/16S222J	
D	914	LED	CL150DCD(AB)	R	113	RS1/16S103J	
D	915	LED	CL200PGCTU	R	114	RS1/16S103J	
D	916	LED	CL150DCD(AB)	R	115	RS1/16S102J	
D	917	Diode	UDZ2R7(B)	R	116	RS1/16S163J	
D	918	Diode	UDZ2R7(B)	R	117	RS1/16S163J	
S	901	Switch	CSG1043	R	120	RS1/16S101J	
S	902	Switch	CSG1043	R	121	RS1/16S101J	
S	903	Switch	CSG1043	R	125	RS1/16S0R0J	
S	904	Switch	CSG1043	R	201	RS1/16S104J	
S	905	Switch	CSG1043	R	202	RS1/16S103J	
S	906	Switch	CSG1043	R	203	RS1/16S332J	
S	907	Switch	CSG1043	R	204	RS1/16S752J	
S	910	Spring Switch	CSN1033	R	205	RS1/16S752J	
IL	901	Lamp 60mA, 8V	CEL1526	R	206	RS1/16S101J	
IL	902	Lamp 60mA, 8V	CEL1526	R	250	RS1/16S331J	
IL	903	Lamp 60mA, 8V	CEL1568	R	251	RS1/16S331J	
IL	904	Lamp 60mA, 8V	CEL1568	R	252	RS1/16S331J	
RESISTORS				R	253	RS1/16S331J	
				R	254	RS1/16S331J	
R	901		RS1/10S561J	R	255	RS1/16S471J	
R	902		RS1/10S561J	R	256	RS1/16S471J	
R	903		RS1/10S561J	R	259	RS1/16S221J	
R	904		RS1/10S561J	R	263	RS1/16S471J	
R	910		RS1/8S511J	R	269	RS1/16S0R0J	
R	911		RS1/8S511J	R	274	RS1/16S471J	
R	912		RS1/8S511J	R	277	RS1/16S471J	
R	913		RS1/8S511J	R	301	RS1/16S103J	
R	914		RS1/8S511J	R	302	RS1/16S153J	
R	915		RS1/8S511J	R	303	RS1/16S103J	
				R	304	RS1/16S273J	
R	916		RS1/8S511J	R	305	RS1/16S103J	
R	917		RS1/8S511J	R	306	RS1/16S752J	
R	918		RS1/8S511J	R	307	RS1/16S103J	
R	919		RS1/8S511J	R	308	RS1/16S103J	
R	920		RS1/8S511J				
R	921		RS1/8S511J	R	309	RS1/16S471J	
R	931		RS1/8S510J	R	311	RS1/16S471J	
R	932		RS1/8S510J	CAPACITORS			
R	934		RS1/10S223J	C	101	CEV101M6R3	
R	935		RS1/10S102J	C	102	CKSQYB104K16	
				C	103	CEV470M6R3	
R	936		RS1/10S103J	C	104	CKSQYB334K16	
R	937		RS1/10S362J	C	105	CCSRCH240J50	
R	938		RS1/10S472J				
CAPACITORS				C	106	CKSRYB222K50	
C	901	CKSQYB104K50		C	107	CEV4R7M35	
C Unit Number : CWX2202 Unit Name : CD Core Unit(Servo Unit)				C	108	CKSRYB273K25	
MISCELLANEOUS				C	109	CCSRCH101J50	
IC	101	IC	UPC2572GS	C	110	CKSQYB104K16	
IC	201	IC	UPD63702AGF	C	111	CKSRYB332K50	
IC	301	IC	BA5986FM	C	112	CKSQYB473K16	
Q	101	Transistor	2SD1664	C	113	CKSRYB103K25	
Q	102	Transistor	UMD2N	C	114	CKSRYB391K50	
				C	115	CCSRCH121J50	
D	301	Diode	1SR154-400	C	116	CKSRYB682K50	
X	201	Ceramic Resonator 16.934MHz	CSS1457	C	117	CKSRYB333K16	
EF	201	Filter	CCG1076	C	118	CKSQYB334K16	
				C	119	CKSQYB334K16	
				C	120	CKSQYB334K16	
RESISTORS				C	121	CKSQYB334K16	
R	101		RS1/8S100J	C	122	CKSQYB104K16	
R	102		RS1/8S120J	C	123	CKSRYB472K50	
R	104		RS1/16S822J	C	124	CKSQYB104K16	
R	105		RS1/16S682J	C	125	CCSRCH5R0C50	
R	106		RS1/16S183J				

====Circuit Symbol and No.====Part Name	Part No.
C 126	CKSRYP153K25
C 127	CKSRYP102K50
C 201	CKSQYB334K16
C 202	CKSQYB104K16
C 203	CKSQYB104K16
C 204	CKSRYP471K50
C 207	CKSQYB683K16
C 208	CKSRYP821K50
C 209	CKSRYP273K25
C 210	CKSQYB334K16
C 211	CKSQYB334K16
C 212	CKSQYB334K16
C 213 22μF/6.3V	CCH1300
C 301	CEV101M10
C 302	CEV101M10

D Unit Number : CWX2203
Unit Name : CD Core Unit(STS Unit)

MISCELLANEOUS

IC 501 IC	CXD2511R
IC 502 IC	MSM514400DP-60TS
IC 601 IC	AK4321VF
IC 701 IC	BA05SFP
IC 801 IC	LB1836M
IC 802 IC	LB1836M
Q 801 Transistor	DTA123JK
Q 802 Transistor	UN2211
D 701 Diode	1SR154-400
D 702 Diode	1SR154-400
D 703 Diode	1SS355
D 704 Diode	1SS355
D 705 Diode	1SS355
D 706 Diode	1SS355
D 707 Diode	1SS355
D 708 Diode	1SS355
S 801 Spring Switch(LOAD)	CSN1052
S 802 Spring Switch(DOOR)	CSN1052
S 803 Spring Switch(MODE)	CSN1052
EF 701 Filter	CCG1051
EF 702 Filter	CCG1051

RESISTORS

R 501	RS1/16S102J
R 502	RS1/16S202J
R 503	RS1/16S392J
R 504	RS1/16S822J
R 505	RS1/16S163J
R 506	RS1/16S512J
R 507	RS1/16S182J
R 508	RS1/16S222J
R 509	RS1/16S102J
R 510	RS1/16S102J
R 511	RS1/16S102J
R 512	RS1/16S102J
R 513	RS1/16S102J
R 514	RS1/16S471J
R 601	RS1/16S101J
R 602	RS1/16S101J
R 603	RS1/16S471J
R 604	RS1/16S471J
R 701	RS1/10S0R0J
R 702	RS1/10S100J
R 716	RS1/16S471J
R 717	RS1/16S471J
R 718	RS1/16S471J
R 801	RS1/10S102J

====Circuit Symbol and No.====Part Name	Part No.
CAPACITORS	
C 501	CKSQYB334K16
C 502	CKSQYB334K16
C 503	CKSQYB334K16
C 504	CCSRCH471J50
C 506	CCSRCH221J50
C 601	CKSQYB334K16
C 602	CCSRCH221J50
C 603	CKSQYB334K16
C 604	CKSQYB334K16
C 605 22μF/6.3V	CCH1300
C 606	CKSQYB334K16
C 701 22μF/6.3V	CCH1300
C 702	CEVL101M6R3
C 703	CKSQYB334K16
C 704	CKSQYB334K16
C 801	CKSQYB104K25
C 802	CKSQYB104K25
C 803	CEVL220M16

G Unit Number :
Unit Name : PCB Unit(D)

Q 851	Photo-transistor	CPT230SCTD(CD)
Q 852	Photo-transistor	CPT230SCTD(CD)

I Unit Number :
Unit Name : PCB Unit(E)

R 856	RS1/8S911J
R 857	RS1/8S821J

J Unit Number :
Unit Name : PCB Unit(C)

Q 881	Photo-transistor	CPT230SCTD(CD)
D 883	Chip LED	CL202IRXTU
S 885	Spring Switch(MAX)	CSN1052

L Unit Number :
Unit Name : PCB Unit(A)

D 891	Chip LED	CL202IRXTU
D 892	Chip LED	CL202IRXTU

H Unit Number :
Unit Name : PCB Unit(B)

S 886	Spring Switch(ELV Home)	CSN1052
S 887	Spring Switch(Clamp)	CSN1051

F Unit Number :
Unit Name : Motor PCB(A)

Q 1	Photo-interrupter	RPI-221
M 1	Motor Unit(Cam Gear)	CXB3174
M 3	Motor Unit(ELV)	CXB3175

E Unit Number :
Unit Name : Motor PCB(B)

M 4	Motor Unit(Carriage)	CXB3178
M 5	Motor(Spindle)	CXM1120

K Unit Number :
Unit Name : Load Motor PCB

M 2	Motor Unit(Load)	CXB3177
-----	------------------	---------

Miscellaneous Parts List

Pickup Unit(Service)/(P8)	CXX1311
---------------------------	---------