


EXPLODED VIEW/PARTS LIST

Main section

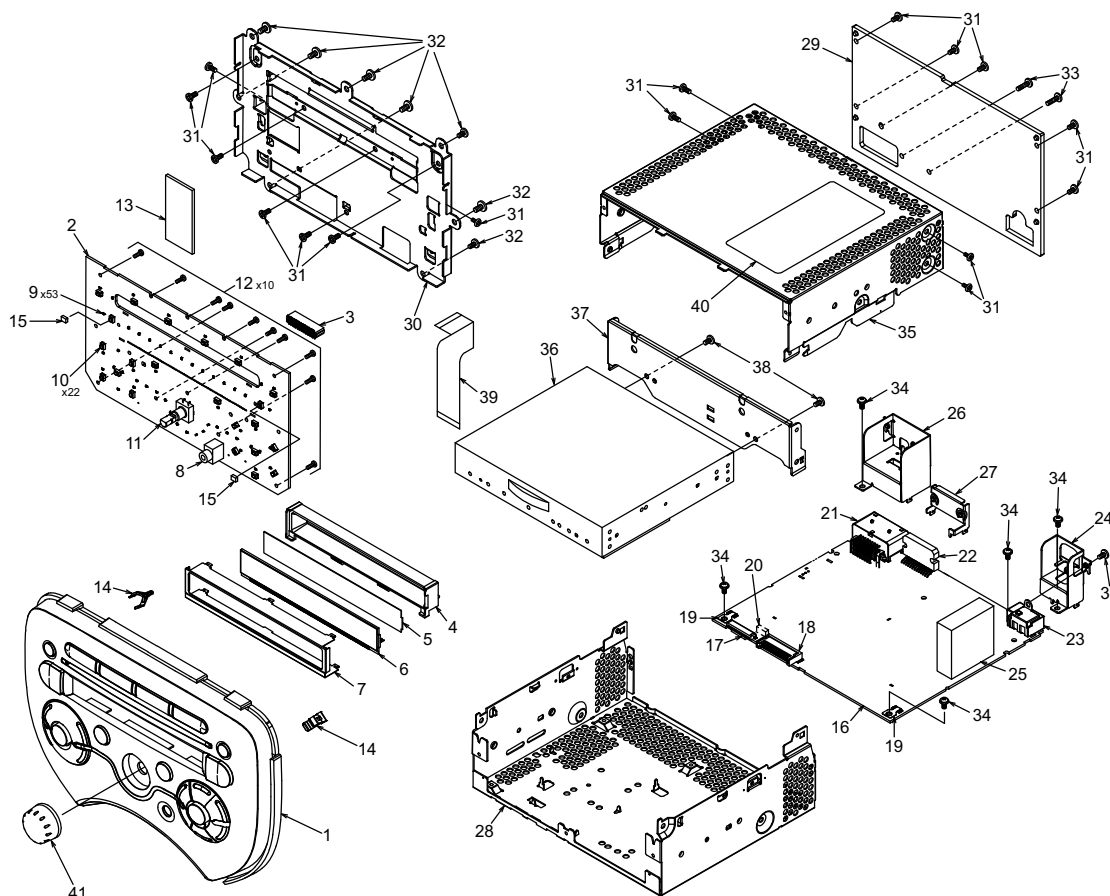

Note) Some parts depend on each model. The model name is specified in the discription. M-A : PN-3237M-A, M-B : PN-3237M-B

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	940-8257-11 940-8257-31	ES-ASSY (M-A) ES-ASSY (M-B)	1	22	051-2064-00	IC (TB2926HQ)	1
2	-----	Switch PWB	1	23	092-2210-01	ANT RECEPT	1
3	074-3033-26	SOCKET (26P)	1	24	331-4753-00	ANT HOLDER	1
4	335-7693-00	LCD HOLDER	1	25	880-2091L	AM/FM TUNER	1
5	335-7801-00	LCD LEFLECTOR	1	26	331-4756-00	SOCKET HOLDER	1
6	379-1441-52	INDICATOR (LCD)	1	27	331-4755-00	IC HOLDER	1
7	331-4166-00	LCD COVER	1	28	311-1975-10	LOWER CASE	1
8	075-9024-00	JACK	1	29	313-2067-10	HEAT SINK	1
9	001-7109-90	DIODE	53	30	309-1901-01	ES PLATE	1
10	013-6312-50	SWITCH	22	31	714-2606-8B	MACHINE SCREW (M2.6x6)	17
11	016-0018-19	VR W/SHAFT	1	32	716-1553-50	TAPTIGHT (3x8)	7
12	716-0778-52	WAVE SCREW (2x6)	10	33	735-2614-1B	D-SEMS SCREW (M2.6x14)	2
13	345-8090-00	CUSHION RUBBER	1	34	716-0878-50	SP-SCREW (M2.6x5)	5
14	321-1057-00	CLIP	2	35	310-1900-20	UPPER CASE	1
15	345-6393-00	RUBBER APACER	2	36	929-5027-81	CD-MECH MODUL	1
16	-----	Main PWB	1	37	331-4758-00	CD BRKT	1
17	074-1189-88	SOCKET (38P)	1	38	714-2603-89	MACHINE SCREW (M2.6x3)	2
18	076-3011-76	PLUG (26P)	1	39	816-3020-51	FLAT WIRE	1
19	073-0762-90	TERMINAL	2	40	276-0564-09 276-0564-12	SET PLATE (M-A) SET PLATE (M-B)	1
20	076-6000-59	PLUG (9P)	1	41	380-5767-00	KNOB	1
21	074-4009-20	SOCKET (20P)	1				

ELECTRICAL PARTS LIST

Main PWB(B1) section

Note) Some parts depend on each model. The model name is specified in the discription.

M-A: PN-3237M-A , M-B: PN-3237M-B

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT101	092-2210-01	AM-RECEPT	C351	168-3322-55	3300pF K	C543	163-4763-35	16V 47uF
BL101	880-2091L	AM/FM TUNER	C352	168-3322-55	3300pF K	C544	163-2273-25	10V 220uF
C104	166-6801-50	68pF CH	C354	043-0554-90	25V 10uF	C545	168-2212-55	220pF K
C112	043-0319-51	200pF J CH	C355	042-1736-90	16V 470uF M	C546	166-2201-50	22pF CH
C113	166-2201-50	22pF CH	C356	168-4722-55	4700pF K	C548	163-4763-35	16V 47uF
C118	168-1022-55	1000pF K	C357	163-1073-15	6.3V 100uF	C549	042-1465-00	16V 3300uF
C121	163-1073-35	16V 100uF	C358	168-2222-55	2200pF K	C550	172-1041-15	0.1uF
C124	168-2222-55	2200pF K	C359	043-0570-90	16V 2.2uF K	C551	163-4763-35	16V 47uF
C127	168-1022-55	1000pF K	C360	043-0570-90	16V 2.2uF K	C552	163-4763-35	16V 47uF
C129	168-1022-55	1000pF K	C361	166-2201-50	22pF CH	C554	168-6822-55	6800pF K
C132	168-1022-55	1000pF K	C362	168-2222-55	2200pF K	C555	168-6822-55	6800pF K
C135	168-1022-55	1000pF K	C363	166-2201-50	22pF CH	C556	168-6822-55	6800pF K
C136	163-1073-35	16V 100uF	C364	166-2201-50	22pF CH	C557	168-6822-55	6800pF K
C152	163-1063-35	16V 10uF	C365	168-2222-55	2200pF K	C558	168-6822-55	6800pF K
C203	168-1042-78	16V 0.1uF K	C366	166-2201-50	22pF CH	C559	168-6822-55	6800pF K
C204	163-3363-25	10V 33uF	C367	168-2222-55	2200pF K	C560	168-6822-55	6800pF K
C227	043-0552-90	6.3V 47uF M	C368	166-2201-50	22pF CH	C561	168-6822-55	6800pF K
C230	168-2242-58	0.22uF K	C369	166-2201-50	22pF CH	C562	168-6822-55	6800pF K
C231	168-3342-58	0.33uF K	C370	043-0570-90	16V 2.2uF K	C563	043-0574-90	25V 1.0uF
C232	043-0554-90	25V 10uF	C371	043-0570-90	16V 2.2uF K	C564	168-1042-78	16V 0.1uF K
C238	163-1063-35	16V 10uF	C372	043-0570-90	16V 2.2uF K	C565	163-1063-35	16V 10uF
C245	168-2222-55	2200pF K	C373	043-0570-90	16V 2.2uF K	C566	168-2232-55	0.022uF K
C257	168-5622-55	5600pF K	C401	168-1042-78	16V 0.1uF K	C567	042-4000-90	16V 470uF
C258	168-5622-55	5600pF K	C402	168-1042-78	16V 0.1uF K	C568	168-1522-55	1500pF K
C259	168-2222-55	2200pF K	C408	166-1801-50	18pF CH	C569	166-2201-50	22pF CH
C301	163-4753-65	50V 4.7uF	C409	168-1042-78	16V 0.1uF K	C570	178-2242-38	0.22uF B
C302	168-1042-78	16V 0.1uF K	C410	163-4763-15	6.3V 47uF	C571	168-1542-58	0.15uF K
C303	166-1811-50	180pF CH	C411	168-1042-78	16V 0.1uF K	C572	168-1542-58	0.15uF K
C304	168-1042-78	16V 0.1uF K	C412	168-1032-55	0.01uF K	C573	168-1542-58	0.15uF K
C305	168-1042-78	16V 0.1uF K	C414	168-2242-58	0.22uF K	C574	168-1542-58	0.15uF K
C306	166-8097-50	8pF +/-0.5pF CH	C415	168-2242-58	0.22uF K	C576	168-1022-55	1000pF K
C307	166-8097-50	8pF +/-0.5pF CH	C416	168-2242-58	0.22uF K	CCT402	050-0140-54	1/32W 1k ohm x4J
C308	168-1022-55	1000pF K	C417	168-2242-58	0.22uF K	CCT403	050-0145-52	1/16W 1k ohm x4
C309	163-4753-65	50V 4.7uF	C418	168-2242-58	0.22uF K	CCT404	050-0145-52	1/16W 1k ohm x4
C310	168-1042-78	16V 0.1uF K	C419	168-1022-55	1000pF K	D104	001-0580-90	1SS352
C311	163-4753-65	50V 4.7uF	C501	168-1042-78	16V 0.1uF K	D106	001-0529-48	MA8091-H
C312	168-1042-78	16V 0.1uF K	C502	168-1042-78	16V 0.1uF K	D210	001-4313-53	HZU9B1L TRF-E
C313	168-1022-55	1000pF K	C503	168-1042-78	16V 0.1uF K	D401	001-2630-90	1SS420-TPL3,F
C314	168-1022-55	1000pF K	C504	168-1042-78	16V 0.1uF K	D501	001-2640-90	D1FJ4
C315	166-1011-50	100pF CH	C506	166-5611-50	560pF CH	D502	001-0529-48	MA8091-H
C316	168-1042-78	16V 0.1uF K	C507	166-5611-50	560pF CH	D504	001-0529-48	MA8091-H
C317	168-5622-55	5600pF K	C509	166-5611-50	560pF CH	D506	001-2015-00	RL253
C318	168-5622-55	5600pF K	C510	166-5611-50	560pF CH	D507	001-0580-90	1SS352
C319	166-1011-50	100pF CH	C511	166-2201-50	22pF CH	D510	001-0529-48	MA8091-H
C320	166-1011-50	100pF CH	C512	166-2201-50	22pF CH	D511	001-4320-50	EDZC6.8C
C322	168-1022-55	1000pF K	C513	166-2201-50	22pF CH			(M-B Only)
C323	168-1022-55	1000pF K	C514	166-2201-50	22pF CH	D512	001-0580-90	1SS352
C324	163-2273-05	4V 220uF	C515	168-1052-78	16V 1uF K	D514	001-4320-50	EDZC6.8C
C325	168-2222-55	2200pF K	C516	163-1073-35	16V 100uF			(M-B Only)
C326	166-4711-50	470pF CH	C518	166-5611-50	560pF CH	D515	001-0529-34	MA8062-L
C327	163-2263-35	16V 22uF	C519	166-5611-50	560pF CH	D517	001-0529-47	MA8091-M
C328	163-4763-15	6.3V 47uF	C520	168-3342-58	0.33uF K	D536	001-2412-90	RR264M-400
C330	166-1011-50	100pF CH	C521	166-5611-50	560pF CH	D538	001-2412-90	RR264M-400
C331	168-1042-78	16V 0.1uF K	C522	166-5611-50	560pF CH	IC202	051-3552-90	NJU7741F15
C332	166-1011-50	100pF CH	C523	168-1042-78	16V 0.1uF K	IC203	051-3518-90	NJM2846DL3-33-TE1
C333	168-1022-55	1000pF K	C524	168-2242-58	0.22uF K	IC301	-----	SAF7730HV/N332
C334	168-1022-55	1000pF K	C525	043-0552-90	6.3V 47uF M	IC302	051-3034-90	NJM4558V
C335	163-1063-35	16V 10uF	C526	043-0566-90	50V 2.2uF K	IC401	051-9426-90	S-24CS16A01-T8T1G
C336	168-1052-78	16V 1uF K	C527	043-0604-90	25V 10uF B	IC403	-----	M30876FJBG
C337	168-3332-78	0.033uF K	C529	168-4742-78	0.47uF K			(3237M-A Only)
C338	168-1022-55	1000pF K	C530	168-1042-38	50V 0.1uF K	IC403	-----	M30876MJB-A46
C340	168-1022-55	1000pF K	C531	163-1073-35	16V 100uF			(3237M-B Only)
C341	166-1011-50	100pF CH	C532	168-1542-58	0.15uF K	IC405	051-5417-08	S-80927CNMC-B8M
C342	168-1022-55	1000pF K	C533	168-1542-58	0.15uF K	IC502	051-3019-90	NJM2060V
C343	168-4712-55	470pF K	C534	168-1542-58	0.15uF K	IC503	051-3551-90	NJM2878F3-33-TE1
C344	168-1042-78	16V 0.1uF K	C535	168-1542-58	0.15uF K	IC504	051-3396-90	NJM2386ADL3-33-TE1
C345	168-1022-55	1000pF K	C536	168-1042-78	16V 0.1uF K			
C347	168-3322-55	3300pF K	C537	168-1052-78	16V 1uF K	IC505	-----	LT3481EMSE#TRP
C348	168-3322-55	3300pF K	C540	042-1760-90	16V 10uF M			BF
C349	168-3322-55	3300pF K	C541	178-2742-78	0.27uF	IC506	051-2064-00	TB2926HQ
C350	168-3322-55	3300pF K	C542	168-1052-78	16V 1uF K	IC507	051-3034-90	NJM4558V

Note) Some parts depend on each model. The model name is specified in the discription.

M-A : PN-3237M-A, M-B : PN-3237M-B

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
IC508	051-5441-08	BD4828G-TR	R258	119-1021-15	1/10W 1k ohm			(M-A Only)
J202	074-1189-88	38P	R259	119-1021-15	1/10W 1k ohm	R407	119-1021-15	1/10W 1k ohm
J502	074-4009-20	20P	R260	119-1021-15	1/10W 1k ohm			(M-A Only)
L104	010-2198-50	0.15uH	R301	119-1031-15	1/10W 10k ohm	R408	119-1021-15	1/10W 1k ohm
L105	010-2003-04	30uH	R302	119-1031-15	1/10W 10k ohm			(M-A Only)
L106	010-4011-20	2.5mH +3/-3%	R303	119-2201-15	1/10W 22 ohm	R411	119-4721-15	1/10W 4.7k ohm
L201	010-3104-54	600 ohm/100MHz	R308	119-1031-15	1/10W 10k ohm	R412	119-4721-15	1/10W 4.7k ohm
L202	010-3104-54	600 ohm/100MHz	R309	119-1011-15	1/10W 100 ohm	R413	119-3311-15	1/10W 330 ohm
L301	010-3104-54	600 ohm/100MHz	R310	119-1021-15	1/10W 1k ohm			(M-B Only)
L302	010-3104-54	600 ohm/100MHz	R311	119-1031-15	1/10W 10k ohm	R414	119-3311-15	1/10W 330 ohm
L303	010-3104-54	600 ohm/100MHz	R312	119-3921-15	1/10W 3.9k ohm			(M-B Only)
L304	010-3104-54	600 ohm/100MHz	R313	119-1031-15	1/10W 10k ohm	R415	119-4731-15	1/10W 47k ohm
L305	010-3104-54	600 ohm/100MHz	R314	119-3921-15	1/10W 3.9k ohm	R416	119-4731-15	1/10W 47k ohm
L306	010-3104-54	600 ohm/100MHz	R315	119-1031-15	1/10W 10k ohm	R417	119-4731-15	1/10W 47k ohm
L307	010-3104-54	600 ohm/100MHz	R316	119-0000-05	1/10W 0 ohm JW	R422	119-0000-05	1/10W 0 ohm JW
L308	010-3104-54	600 ohm/100MHz	R317	119-1031-15	1/10W 10k ohm	R423	119-1011-15	1/10W 100 ohm
L309	010-3104-54	600 ohm/100MHz	R318	119-1041-15	1/10W 100k ohm	R424	119-1011-15	1/10W 100 ohm
L310	010-3104-54	600 ohm/100MHz	R319	119-1041-15	1/10W 100k ohm	R432	119-1011-15	1/10W 100 ohm
L311	010-3104-54	600 ohm/100MHz	R320	119-1001-15	1/10W 10 ohm	R433	119-1011-15	1/10W 100 ohm
L312	010-3104-54	600 ohm/100MHz	R321	119-3921-15	1/10W 3.9k ohm	R434	119-1031-15	1/10W 10k ohm
L313	010-3104-54	600 ohm/100MHz	R322	119-0000-05	1/10W 0 ohm JW			(M-B Only)
L402	010-3406-54	2.2uH J	R323	119-1021-15	1/10W 1k ohm	R435	119-1031-15	1/10W 10k ohm
L501	010-3104-54	600 ohm/100MHz	R324	119-3921-15	1/10W 3.9k ohm			(M-B Only)
L502	010-3414-92	2.2uH	R325	119-0000-05	1/10W 0 ohm JW	R437	119-4731-15	1/10W 47k ohm
L503	010-8050-00	240uH	R327	119-1031-15	1/10W 10k ohm	R439	119-4731-15	1/10W 47k ohm
P402	076-3011-76	26P	R329	119-1031-15	1/10W 10k ohm	R440	119-4731-15	1/10W 47k ohm
P403	076-6000-59	9P (3237M-A Only)	R331	119-1031-15	1/10W 10k ohm	R442	119-4721-15	1/10W 4.7k ohm
Q105	198-3018-00	2SK3018	R332	119-1031-15	1/10W 10k ohm	R444	119-1021-15	1/10W 1k ohm
Q106	198-3018-00	2SK3018	R333	119-1031-15	1/10W 10k ohm	R445	119-4731-15	1/10W 47k ohm
Q107	192-5886-00	2SC5886	R334	119-1031-15	1/10W 10k ohm	R446	119-4731-15	1/10W 47k ohm
Q214	193-1259-50	2SD1259DS R,Q	R335	119-1031-15	1/10W 10k ohm	R447	119-1031-15	1/10W 10k ohm
Q301	125-7007-90	Si5441BDC-TI-E3	R336	119-1031-15	1/10W 10k ohm	R448	119-4731-15	1/10W 47k ohm
Q302	125-2027-91	DTC114EUA	R337	119-1031-15	1/10W 10k ohm	R449	119-4731-15	1/10W 47k ohm
Q407	125-2027-91	DTC114EUA	R338	119-1031-15	1/10W 10k ohm	R450	119-0000-05	1/10W 0 ohm JW
Q408	198-3018-00	2SK3018	R339	119-1011-15	1/10W 100 ohm	R452	119-4731-15	1/10W 47k ohm
Q409	125-2027-91	DTC114EUA	R340	119-1011-15	1/10W 100 ohm	R453	119-1031-15	1/10W 10k ohm
Q410	198-3018-00	2SK3018	R341	119-0000-05	1/10W 0 ohm JW	R454	119-4731-15	1/10W 47k ohm
Q411	125-2027-91	DTC114EUA	R342	119-0000-05	1/10W 0 ohm JW	R456	119-1021-15	1/10W 1k ohm
Q504	125-2027-91	DTC114EUA	R343	119-0000-05	1/10W 0 ohm JW	R458	119-1021-15	1/10W 1k ohm
Q505	191-1197-50	2SB1197K Q,R	R344	119-0000-05	1/10W 0 ohm JW	R459	119-4731-15	1/10W 47k ohm
Q506	192-5886-00	2SC5886	R345	119-0000-05	1/10W 0 ohm JW	R460	119-4731-15	1/10W 47k ohm
Q511	192-5810-00	2SC5810 TE12L	R346	119-0000-05	1/10W 0 ohm JW	R463	119-4731-15	1/10W 47k ohm
Q512	125-2027-91	DTC114EUA	R347	119-1031-15	1/10W 10k ohm	R466	119-4731-15	1/10W 47k ohm
Q513	191-1197-50	2SB1197K Q,R	R348	119-0000-05	1/10W 0 ohm JW	R469	119-1011-15	1/10W 100 ohm
Q514	192-4116-51	2SC4116 G,L	R349	119-4731-15	1/10W 47k ohm	R472	119-1011-15	1/10W 100 ohm
Q515	191-1204-61	2SB1204 R,S,T	R350	119-0000-05	1/10W 0 ohm JW	R474	119-4731-15	1/10W 47k ohm
Q516	125-2027-91	DTC114EUA	R351	119-1021-15	1/10W 1k ohm	R475	119-1011-15	1/10W 100 ohm
Q517	191-1197-50	2SB1197K Q,R	R352	119-1021-15	1/10W 1k ohm	R476	119-1011-15	1/10W 100 ohm
Q518	192-4081-00	2SC4081	R353	119-1021-15	1/10W 1k ohm	R477	119-4721-15	1/10W 4.7k ohm
Q519	192-4116-00	2SC4116	R354	119-1021-15	1/10W 1k ohm	R478	119-4721-15	1/10W 4.7k ohm
Q521	192-4116-51	2SC4116 G,L	R356	119-1001-15	1/10W 10 ohm	R481	119-2231-15	1/10W 22k ohm
R109	119-0000-05	1/10W 0 ohm JW	R357	032-0140-15	1/10W 6.8k ohm F	R484	119-4731-15	1/10W 47k ohm
R125	119-0000-05	1/10W 0 ohm JW	R358	032-0140-15	1/10W 6.8k ohm F	R485	119-4731-15	1/10W 47k ohm
R129	119-0000-05	1/10W 0 ohm JW	R360	032-0140-15	1/10W 6.8k ohm F	R486	119-1041-15	1/10W 100k ohm
R135	119-1011-15	1/10W 100 ohm	R361	032-0140-15	1/10W 6.8k ohm F	R487	119-1041-15	1/10W 100k ohm
R141	119-1011-15	1/10W 100 ohm	R362	032-0140-50	1/10W 10k ohm F	R492	119-4731-15	1/10W 47k ohm
R143	119-1011-15	1/10W 100 ohm	R363	032-0140-50	1/10W 10k ohm F	R493	119-4721-15	1/10W 4.7k ohm
R146	116-6891-15	1/4W 6.8 ohm	R364	032-0140-50	1/10W 10k ohm F	R494	119-4721-15	1/10W 4.7k ohm
R150	119-3321-15	1/10W 3.3k ohm	R365	032-0140-50	1/10W 10k ohm F	R495	119-4731-15	1/10W 47k ohm
R154	119-3321-15	1/10W 3.3k ohm	R366	032-0140-50	1/10W 10k ohm F	R496	119-4721-15	1/10W 4.7k ohm
R155	119-3321-15	1/10W 3.3k ohm	R367	032-0140-50	1/10W 10k ohm F	R497	119-4721-15	1/10W 4.7k ohm
R161	119-0000-05	1/10W 0 ohm JW	R401	119-1021-15	1/10W 1k ohm	R498	119-1041-15	1/10W 100k ohm
R162	119-3321-15	1/10W 3.3k ohm			(M-A Only)			(M-B Only)
R174	116-3911-15	1/4W 390 ohm	R402	119-1021-15	1/10W 1k ohm	R499	119-1041-15	1/10W 100k ohm
R180	119-0000-05	1/10W 0 ohm JW			(M-A Only)			(M-B Only)
R212	119-4731-15	1/10W 47k ohm	R403	119-1021-15	1/10W 1k ohm	R502	119-1031-15	1/10W 10k ohm
R214	119-4721-15	1/10W 4.7k ohm			(M-A Only)	R503	119-1031-15	1/10W 10k ohm
R215	119-4721-15	1/10W 4.7k ohm	R404	119-0000-05	1/10W 0 ohm JW	R504	119-1031-15	1/10W 10k ohm
R241	119-4731-15	1/10W 47k ohm			(M-A Only)	R505	119-1031-15	1/10W 10k ohm
R247	116-3911-15	1/4W 390 ohm	R405	119-1021-15	1/10W 1k ohm	R507	119-1031-15	1/10W 10k ohm
R248	116-3911-15	1/4W 390 ohm			(M-A Only)	R508	119-1031-15	1/10W 10k ohm
R249	119-1041-15	1/10W 100k ohm	R406	119-1021-15	1/10W 1k ohm	R509	119-1031-15	1/10W 10k ohm

Note) Some parts depend on each model. The model name is specified in the discription. M-A: PN-3237M-A, M-B: PN-3237M-B

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R510	119-1031-15	1/10W 10k ohm	R537	032-0140-51	1/10W 15k ohm F	R572	032-0208-51	1/4W 15k ohm
R511	119-1031-15	1/10W 10k ohm	R544	119-4731-15	1/10W 47k ohm	R573	119-2221-15	1/10W 2.2k ohm
R512	119-1031-15	1/10W 10k ohm	R547	119-4721-15	1/10W 4.7k ohm	R575	116-1531-15	1/4W 15k ohm
R514	119-1051-15	1/10W 1M ohm	R548	119-4721-15	1/10W 4.7k ohm	R578	119-0000-05	1/10W 0 ohm JW
R515	119-1051-15	1/10W 1M ohm	R549	119-3331-15	1/10W 33k ohm	R579	119-1031-15	1/10W 10k ohm
R516	119-1051-15	1/10W 1M ohm	R555	116-3911-15	1/4W 390 ohm	R580	119-5611-15	1/10W 560 ohm
R517	119-1051-15	1/10W 1M ohm	R556	119-1521-15	1/10W 1.5k ohm	R581	116-4791-15	1/4W 4.7 ohm
R518	119-1031-15	1/10W 10k ohm	R557	116-1221-15	1/4W 1.2k ohm	R582	116-4791-15	1/4W 4.7 ohm
R519	119-1031-15	1/10W 10k ohm	R558	119-1031-15	1/10W 10k ohm	R588	119-3341-15	1/10W 330k ohm
R520	119-1031-15	1/10W 10k ohm	R559	116-1221-15	1/4W 1.2k ohm	R592	119-1021-15	1/10W 1k ohm
R521	119-1031-15	1/10W 10k ohm	R560	119-1031-15	1/10W 10k ohm	R593	119-1021-15	1/10W 1k ohm
R522	119-1031-15	1/10W 10k ohm	R561	116-1221-15	1/4W 1.2k ohm	R4001	119-1021-15	1/10W 1k ohm
R523	119-1031-15	1/10W 10k ohm	R562	116-1221-15	1/4W 1.2k ohm	R4004	119-1021-15	1/10W 1k ohm
R524	119-4731-15	1/10W 47k ohm	R563	119-1031-15	1/10W 10k ohm	R4005	119-1021-15	1/10W 1k ohm
R525	119-0000-05	1/10W 0 ohm JW	R564	119-4721-15	1/10W 4.7k ohm	SUP102	060-0122-91	DSP-141N-S00B
R527	032-0148-63	1/10W 130k ohm D	R565	119-1521-15	1/10W 1.5k ohm	TC401	004-1580-10	30pF GRN
R528	032-0148-64	1/10W 390k ohm D	R566	119-1031-15	1/10W 10k ohm	TM101	073-0762-90	TERMINAL
R530	119-1031-15	1/10W 10k ohm	R567	032-0148-50	1/10W 100k ohm D	TM502	073-0762-90	TERMINAL
R532	119-1031-15	1/10W 10k ohm	R568	032-0140-16	1/10W 180k ohm F	TM503	073-0768-90	TERMINAL
R533	119-1841-15	1/10W 180k ohm	R570	119-0000-05	1/10W 0 ohm JW	X301	061-3537-90	41.6MHz
R534	119-1031-15	1/10W 10k ohm			(M-B Only)	X401	061-3567-90	8.000MHz AT-41CD2
R535	116-6811-15	1/4W 680 ohm	R571	119-0000-05	1/10W 0 ohm JW	PWB	039-3392-00	PWB(WITHOUT COMPONENT)
R536	119-1031-15	1/10W 10k ohm			(M-B Only)			


Note) Some parts depend on each model. The model name is specified in the discription.

M-A: PN-3237M-A, M-B: PN-3237M-B

Switch PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C601	043-0554-90	25V 10uF	D817	001-7109-90	SML-311DTT86 ORG	R602	119-4731-15	1/10W 47k ohm
C602	043-0554-90	25V 10uF	D818	001-7109-90	SML-311DTT86 ORG	R604	032-0140-53	1/10W 2.2k ohm F
C603	168-1042-78	16V 0.1uF K	D819	001-7109-90	SML-311DTT86 ORG	R605	032-0140-53	1/10W 2.2k ohm F
C604	043-0554-90	25V 10uF	D820	001-7109-90	SML-311DTT86 ORG	R607	119-4731-15	1/10W 47k ohm
C605	168-1042-78	16V 0.1uF K	D821	001-7109-90	SML-311DTT86 ORG	R635	119-0000-05	1/10W 0 ohm JW
D601	001-9210-50	AVR-M1608C270MT AAD	D822	001-7109-90	SML-311DTT86 ORG	R640	119-2221-15	1/10W 2.2k ohm
D602	001-9210-50	AVR-M1608C270MT AAD	D823	001-7109-90	SML-311DTT86 ORG	R812	116-3321-15	1/4W 3.3k ohm
D603	001-9210-50	AVR-M1608C270MTAAD	D824	001-7109-90	SML-311DTT86 ORG	R814	116-2721-15	1/4W 2.7k ohm
D604	001-4320-50	EDZC6.8B	D825	001-7109-90	SML-311DTT86 ORG	R816	116-2721-15	1/4W 2.7k ohm
D662	001-9210-50	AVR-M1608C270MT AAD	D826	001-7109-90	SML-311DTT86 ORG	R818	116-2721-15	1/4W 2.7k ohm
D663	001-9210-50	AVR-M1608C270MT AAD	D827	001-7109-90	SML-311DTT86 ORG	R820	116-2721-15	1/4W 2.7k ohm
D664	001-9210-50	AVR-M1608C270MT AAD	D828	001-7109-90	SML-311DTT86 ORG	R822	116-1221-15	1/4W 1.2k ohm
D665	001-9210-50	AVR-M1608C270MT AAD	D829	001-7109-90	SML-311DTT86 ORG	R824	116-1221-15	1/4W 1.2k ohm
D666	001-9210-50	AVR-M1608C270MT AAD	D830	001-7109-90	SML-311DTT86 ORG	R832	116-1221-15	1/4W 1.2k ohm
D667	001-9210-50	AVR-M1608C270MT AAD	D832	001-7109-90	SML-311DTT86 ORG	R833	116-2221-15	1/4W 2.2k ohm
D668	001-9210-50	AVR-M1608C270MT AAD	D834	001-7109-90	SML-311DTT86 ORG	R834	116-1221-15	1/4W 1.2k ohm
D669	001-9210-50	AVR-M1608C270MT AAD	D835	001-7109-90	SML-311DTT86 ORG	R835	116-1821-15	1/4W 1.8k ohm
D801	001-7109-90	SML-311DTT86 ORG	D836	001-7109-90	SML-311DTT86 ORG	R836	116-1821-15	1/4W 1.8k ohm
D802	001-7109-90	SML-311DTT86 ORG	D837	001-7109-90	SML-311DTT86 ORG	R837	116-1221-15	1/4W 1.2k ohm
D803	001-7109-90	SML-311DTT86 ORG	D838	001-7109-90	SML-311DTT86 ORG	R838	116-1821-15	1/4W 1.8k ohm
D804	001-7109-90	SML-311DTT86 ORG	D839	001-7109-90	SML-311DTT86 ORG	R839	116-1221-15	1/4W 1.2k ohm
D805	001-7109-90	SML-311DTT86 ORG	D840	001-7109-90	SML-311DTT86 ORG	R840	116-1221-15	1/4W 1.2k ohm
D806	001-7109-90	SML-311DTT86 ORG	D841	001-7109-90	SML-311DTT86 ORG	R841	116-1221-15	1/4W 1.2k ohm
D807	001-7109-90	SML-311DTT86 ORG	D842	001-7109-90	SML-311DTT86 ORG	R842	116-1521-15	1/4W 1.5k ohm
D808	001-7109-90	SML-311DTT86 ORG	D843	001-7109-90	SML-311DTT86 ORG	R843	116-1521-15	1/4W 1.5k ohm
D809	001-7109-90	SML-311DTT86 ORG	D844	001-7109-90	SML-311DTT86 ORG	R844	116-1521-15	1/4W 1.5k ohm
D810	001-7109-90	SML-311DTT86 ORG	D845	001-7109-90	SML-311DTT86 ORG	R845	116-1521-15	1/4W 1.5k ohm
D811	001-7109-90	SML-311DTT86 ORG	D846	001-7109-90	SML-311DTT86 ORG	R846	116-1221-15	1/4W 1.2k ohm
D812	001-7109-90	SML-311DTT86 ORG	D847	001-7109-90	SML-311DTT86 ORG	R847	116-1021-15	1/4W 1k ohm
D813	001-7109-90	SML-311DTT86 ORG	D848	001-7109-90	SML-311DTT86 ORG	R848	116-1021-15	1/4W 1k ohm
D814	001-7109-90	SML-311DTT86 ORG	D849	001-7109-90	SML-311DTT86 ORG	R849	116-1221-15	1/4W 1.2k ohm
D815	001-7109-90	SML-311DTT86 ORG	D850	001-7109-90	SML-311DTT86 ORG	R850	116-2221-15	1/4W 2.2k ohm
D816	001-7109-90	SML-311DTT86 ORG	D851	001-7109-90	SML-311DTT86 ORG	R851	116-2221-15	1/4W 2.2k ohm
			D852	001-7109-90	SML-311DTT86 ORG	R852	116-1221-15	1/4W 1.2k ohm
			D853	001-7109-90	SML-311DTT86 ORG	R853	116-1221-15	1/4W 1.2k ohm
			D854	001-7109-90	SML-311DTT86 ORG	R854	116-8211-15	1/4W 820 ohm
			D855	001-7109-90	SML-311DTT86 ORG	R855	116-1821-15	1/4W 1.8k ohm
			IC601	051-6057-00	ML9090A-01GA	R856	116-1221-15	1/4W 1.2k ohm
			J601	074-3033-26	26P	R857	116-1221-15	1/4W 1.2k ohm
			J602	075-9024-00	MINI-JACK	R858	116-1221-15	1/4W 1.2k ohm
			LCD601	379-1441-52	INDICATOR (LCD)	R859	116-1221-15	1/4W 1.2k ohm
			Q601	190-1162-00	2SA1162	R860	116-1221-15	1/4W 1.2k ohm
			Q602	192-2712-51	2SC2712 G,L	R861	116-1221-15	1/4W 1.2k ohm
			R601	032-0140-00	1/10W 56k ohm F	S601	013-6312-50	SKRP-ABE-010

EXPLODED VIEW/PARTS LIST

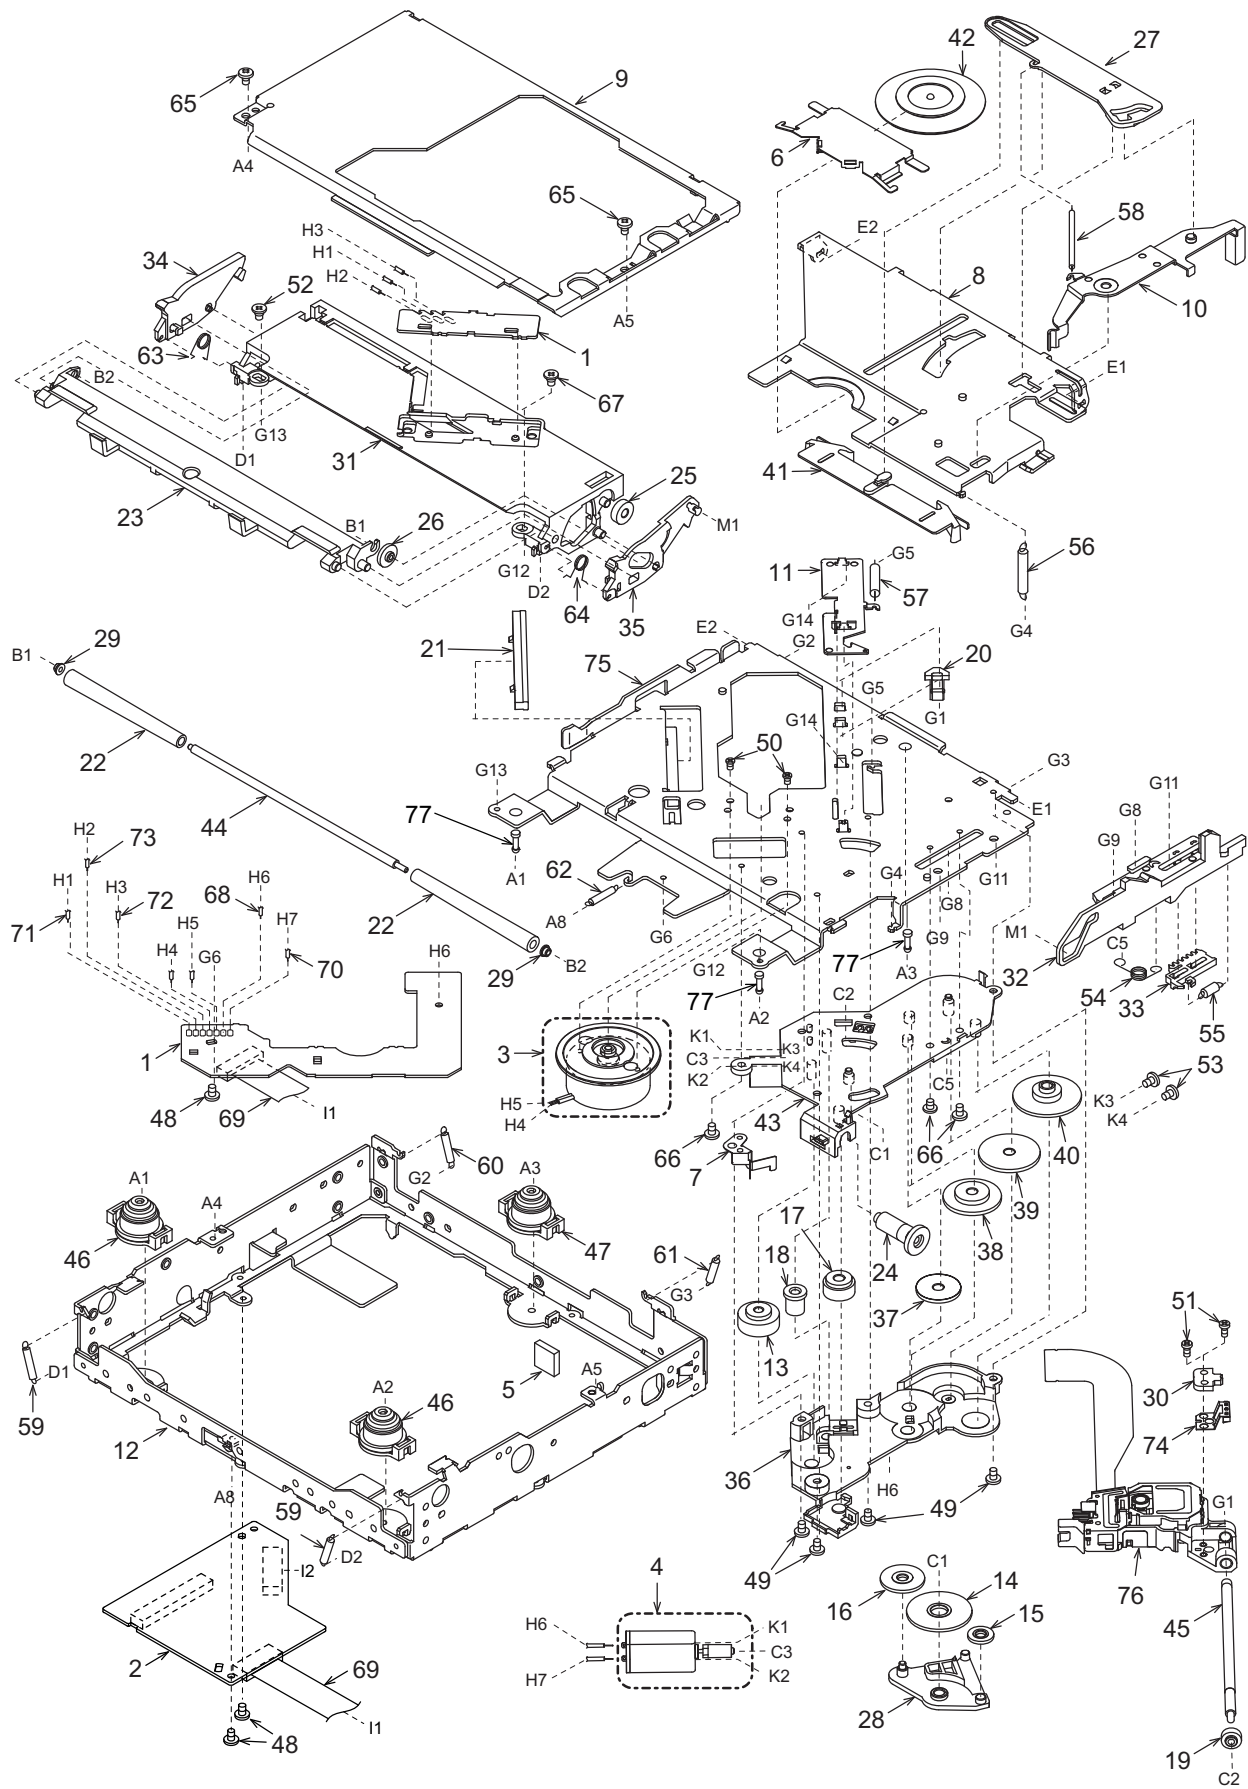

NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	SENSOR PWB	1
2	-----	CD PWB	1
3	SMA-182-100	SPINDLE MOTOR-ASSY	1
4	SMA-183-100	SLED MOTOR-ASSY	1
5	345-5476-20	CUSHION RUBBER	1
6	620-1023-23	CLAMPER PLATE	1
7	620-1026-21	SPRING PLATE	1
8	620-1596-23	CLAMPER LINK	1
9	620-1862-20	UPPER CHASSIS	1
10	620-1752-20	SENSOR ARM	1
11	620-1753-20	ID-LOCK PLATE	1
12	620-1868-20	LOWER CHASSIS	1
13	621-0608-21	SECOND GEAR	1
14	621-0609-20	BASE GEAR	1
15	621-0610-20	IDLE GEAR A	1
16	621-0611-20	IDLE GEAR B	1
17	621-0612-21	ROLLER GEAR A	1
18	621-0620-20	THREAD GEAR A	1
19	621-0621-20	THREAD GEAR B	1
20	621-0623-23	LS-HOLDER	1
21	621-0624-22	GUIDE RAIL	1
22	621-0711-21	LOADING ROLLER	2
23	621-0718-21	ROLLER GUIDE	1
24	621-0719-20	ROLLER GEAR B	1
25	621-0720-20	ROLLER GEAR C	1
26	621-0721-20	ROLLER GEAR D	1
27	621-0728-20	STOPPER LINK	1
28	621-1719-20	IDLE CASE	1
29	621-1726-20	ROLLER SLEEVE	2
30	621-1729-20	SH-BASE	1
31	621-1742-20	UPPER GUIDE	1
32	621-1743-20	SHIFT LEVER	1
33	621-1744-20	RACK	1
34	621-1745-20	LOCK ARM L	1
35	621-1746-20	LOCK ARM R	1
36	621-1747-20	GEAR COVER	1
37	621-1748-20	POWER GEAR A	1
38	621-1749-20	POWER GEAR B	1
39	621-1750-20	POWER GEAR C	1

NO.	PART NO.	DESCRIPTION	Q'TY
40	621-1751-20	POWER GEAR D	1
41	621-1752-20	DISC STOPPER	1
42	621-1753-20	CLAMPER RING	1
43	621-1754-20	GEAR BASE	1
44	622-1571-21	ROLLER SHAFT	1
45	624-3059-00	LEAD SCREW	1
46	629-0086-20	DAMPER F	2
47	629-0087-20	DAMPER R	1
48	716-1507-01	SCREW(M2x3)	3
49	716-1670-01	SCREW(M2x4)	4
50	716-1733-01	SCREW(M1.7x2.3)	2
51	716-3469-01	SCREW(1.7x4)	2
52	716-3473-01	SCREW(M2x3)	1
53	716-3551-00	SCREW(M1.4x2.5)	2
54	750-7865-20	SHIFT SPRING	1
55	750-7866-20	RACK SPRING	1
56	750-7867-20	CLAMPER SPRING	1
57	750-7868-20	ID-LOCK SPRING	1
58	750-7869-20	SENSOR SPRING	1
59	750-7870-20	DR-SPRING F	2
60	750-7871-20	DR-SPRING RA	1
61	750-7872-20	DR-SPRING RB	1
62	750-7873-20	DR-SPRING C	1
63	750-6797-20	ROLLER SPRING L	1
64	750-6798-20	ROLLER SPRING R	1
65	714-2003-8B	SCREW(M2x3)	2
66	780-2025-00	SCREW(M2x2.5)	3
67	781-1730-00	SCREW(M1.7x3)	1
68	803-4906-60	VINYL-COAT-WIRE(ORG)	1
69	816-2542-01	FLAT WIRE	1
70	816-2590-00	VINYL-COAT-WIRE(GRN)	1
71	816-2591-00	VINYL-COAT-WIRE(YEL)	1
72	816-2592-00	VINYL-COAT-WIRE(BLUE)	1
73	816-2593-00	VINYL-COAT-WIRE(PUR)	1
74	966-1722-20	SH-RACK-ASSY	1
75	620-1866-20	DRIVE-PLATE	1
76	969-0075-30	PICKUP-ASSY	1
77	622-1570-21	DAMPER PIN	3

ELECTRICAL PARTS LIST

CD PWB(BM1) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C2	178-1052-78	1uF	C60	168-1042-78	16V 0.1uF	R19	119-0000-05	1/10W 0 ohm JW
C3	042-0627-90	16V 100uF	C63	168-1042-78	16V 0.1uF	R20	119-0000-05	1/10 0ohm JW
C4	168-1042-78	16V 0.1uF	C68	168-1042-78	16V 0.1uF	R22	119-2231-15	1/10W 22k ohm
C6	178-1052-78	1uF	C69	042-1710-90	6.3V 100uF	R23	119-0000-05	1/10 0ohm JW
C7	042-0560-85	6.3V 100uF	C74	042-1709-90	6.3V 47uF	R25	119-1041-15	1/10W 100k ohm
C8	178-1052-78	1uF	C75	168-1042-78	16V 0.1uF	R26	119-0000-05	1/10W 0 ohm JW
C9	166-4711-50	470pF CH	C77	168-1042-78	16V 0.1uF	R27	119-4731-15	1/10W 47k ohm
C10	168-4732-78	0.047uF K	C78	168-1022-55	1000pF K	R29	119-5621-15	1/10W 5.6k ohm
C11	166-4711-50	470pF CH	C79	168-1022-55	1000pF K	R30	119-2231-15	1/10W 22k ohm
C12	168-4732-78	0.047uF K	C80	042-0423-20	10V-10uF	R31	119-4731-15	1/10W 47k ohm
C14	168-1042-78	16V 0.1uF	D1	001-1305-90	DAN217UT106	R32	119-3341-15	1/10W 330k ohm
C15	166-1007-50	10pF CH	IC1	051-6733-30	TC94A73MFG-201	R33	119-1041-15	1/10W 100k ohm
C16	166-1007-50	10pF CH	IC2	051-6079-80	BA5830FM-E2	R34	119-1041-15	1/10W 100k ohm
C17	168-1042-78	16V 0.1uF	IC3	051-3395-90	NJU7780U1-15-TES	R35	119-1041-15	1/10W 100k ohm
C18	168-2222-55	2200pF K	J1	074-1138-65	SOCKET (15P)	R36	119-1011-15	1/10W 100 ohm
C19	168-1042-78	16V 0.1uF	J2	074-1138-60	SOCKET (10P)	R38	119-1041-15	1/10W 100k ohm
C20	168-1042-78	16V 0.1uF	J3	074-1205-88	SOCKET (38P)	R39	119-0000-05	1/10W 0 ohm JW
C22	168-6822-55	6800pF K	L1	119-0000-05	1/10 0ohm JW	R41	119-4721-15	1/10W 4.7k ohm
C24	168-3332-78	0.033uF K	L2	119-0000-05	1/10 0ohm JW	R42	119-4721-15	1/10W 4.7k ohm
C25	168-3332-78	0.033uF K	L3	119-0000-05	1/10 0ohm JW	R45	119-1031-15	1/10W 1k ohm
C26	043-0570-90	16V 2.2uF K	L4	010-3104-50	30ohm/100MHz	R46	119-4731-15	1/10W 47k ohm
C28	168-1042-78	16V 0.1uF	L5	010-3406-26	0.01uH	R47	119-4731-15	1/10W 47k ohm
C29	168-1042-78	16V 0.1uF	Q1	131-1188-50	2SB1188 Q,R	R48	119-1031-15	1/10W 10k ohm
C30	168-1042-78	16V 0.1uF	Q2	198-3018-00	2SK3018	R49	119-1031-15	1/10W 10k ohm
C31	168-1042-78	16V 0.1uF	Q3	198-3018-00	2SK3018	R50	119-2211-15	1/10W 220 ohm
C33	168-1042-78	16V 0.1uF	Q4	192-4155-51	2SC4155A S,T	R51	119-1031-15	1/10W 10k ohm
C34	168-1042-78	16V 0.1uF	Q5	198-3018-00	2SK3018	R52	119-1031-15	1/10W 10k ohm
C35	168-5622-55	5600pF K	Q6	192-4155-51	2SC4155A S,T	R53	119-2211-15	1/10W 220 ohm
C36	168-1042-78	16V 0.1uF	Q7	198-3018-00	2SK3018	R54	119-3331-15	1/10W 33k ohm
C37	168-5622-55	5600pF K	Q8	198-3018-00	2SK3018	R55	119-4721-15	1/10W 4.7k ohm
C38	166-6801-50	68pF	R1	119-2211-15	1/10W 220 ohm	R56	119-3331-15	1/10W 33k ohm
C39	168-1042-78	16V 0.1uF	R2	117-6811-15	1/8W 680 ohm	R57	119-4721-15	1/10W 4.7k ohm
C40	168-1532-55	0.015uF K	R3	117-0000-05	1/8W 0 ohm JW	R58	119-3331-15	1/10W 33k ohm
C41	168-1042-78	16V 0.1uF	R4	119-1001-15	1/10W 10 ohm	R59	119-4721-15	1/10W 4.7k ohm
C42	168-1032-55	0.01uF K	R5	119-2731-15	1/10W 27k ohm	R60	119-3331-15	1/10W 33k ohm
C43	168-1042-78	16V 0.1uF	R6	119-2731-15	1/10W 27k ohm	R61	119-4721-15	1/10W 4.7k ohm
C44	168-1042-78	16V 0.1uF	R7	119-2221-15	1/10W 2.2k ohm	R62	119-3331-15	1/10W 33k ohm
C46	168-1522-55	1500pF K	R8	119-2731-15	1/10W 27k ohm	R63	119-4721-15	1/10W 4.7k ohm
C47	168-3322-55	3300pF K	R9	119-2731-15	1/10W 27k ohm	R64	119-1051-15	1/10W 1M ohm
C48	168-1032-55	0.01uF K	R10	119-1051-15	1/10W 1M ohm	R65	119-4701-15	1/10W 47 ohm
C49	168-1042-78	16V 0.1uF	R11	119-2211-15	1/10W 220 ohm	R66	119-1051-15	1/10W 1M ohm
C54	168-1532-55	0.015uF K	R13	119-8231-15	1/10W 82k ohm	R67	119-0000-05	1/10W 0 ohm JW
C55	168-1042-78	16V 0.1uF	R14	119-1531-15	1/10W 15k ohm	TM1	073-0768-90	TERMINAL
C56	168-1042-78	16V 0.1uF	R15	119-8231-15	1/10W 82k ohm	X1	061-3534-90	16.92MHz
C58	166-6097-50	6pF CH	R16	119-4731-15	1/10W 47k ohm	PWB	039-3205-01	PWB(WITHOUT COMPONENTS)
C59	166-4701-50	47pF CH	R17	119-0000-05	1/10 0ohm JW			

SENSOR PWB(BM2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D1	001-7058-90	AN1105W-RR	Q1	060-4015-91	PS1192HB-32-TR	S2	013-7413-50	LIMIT
D2	001-7058-90	AN1105W-RR	Q2	060-4015-91	PS1192HB-32-TR	PWB	039-1944-21	PWB(WITHOUT COMPONENTS)
J1	074-1138-60	10P	S1	013-7414-50	CHUCKING			

BLOCK DIAGRAM

