



DPX-4010,4010/PH4

EXPLODED VIEW (CASSETTE MECHANISM)

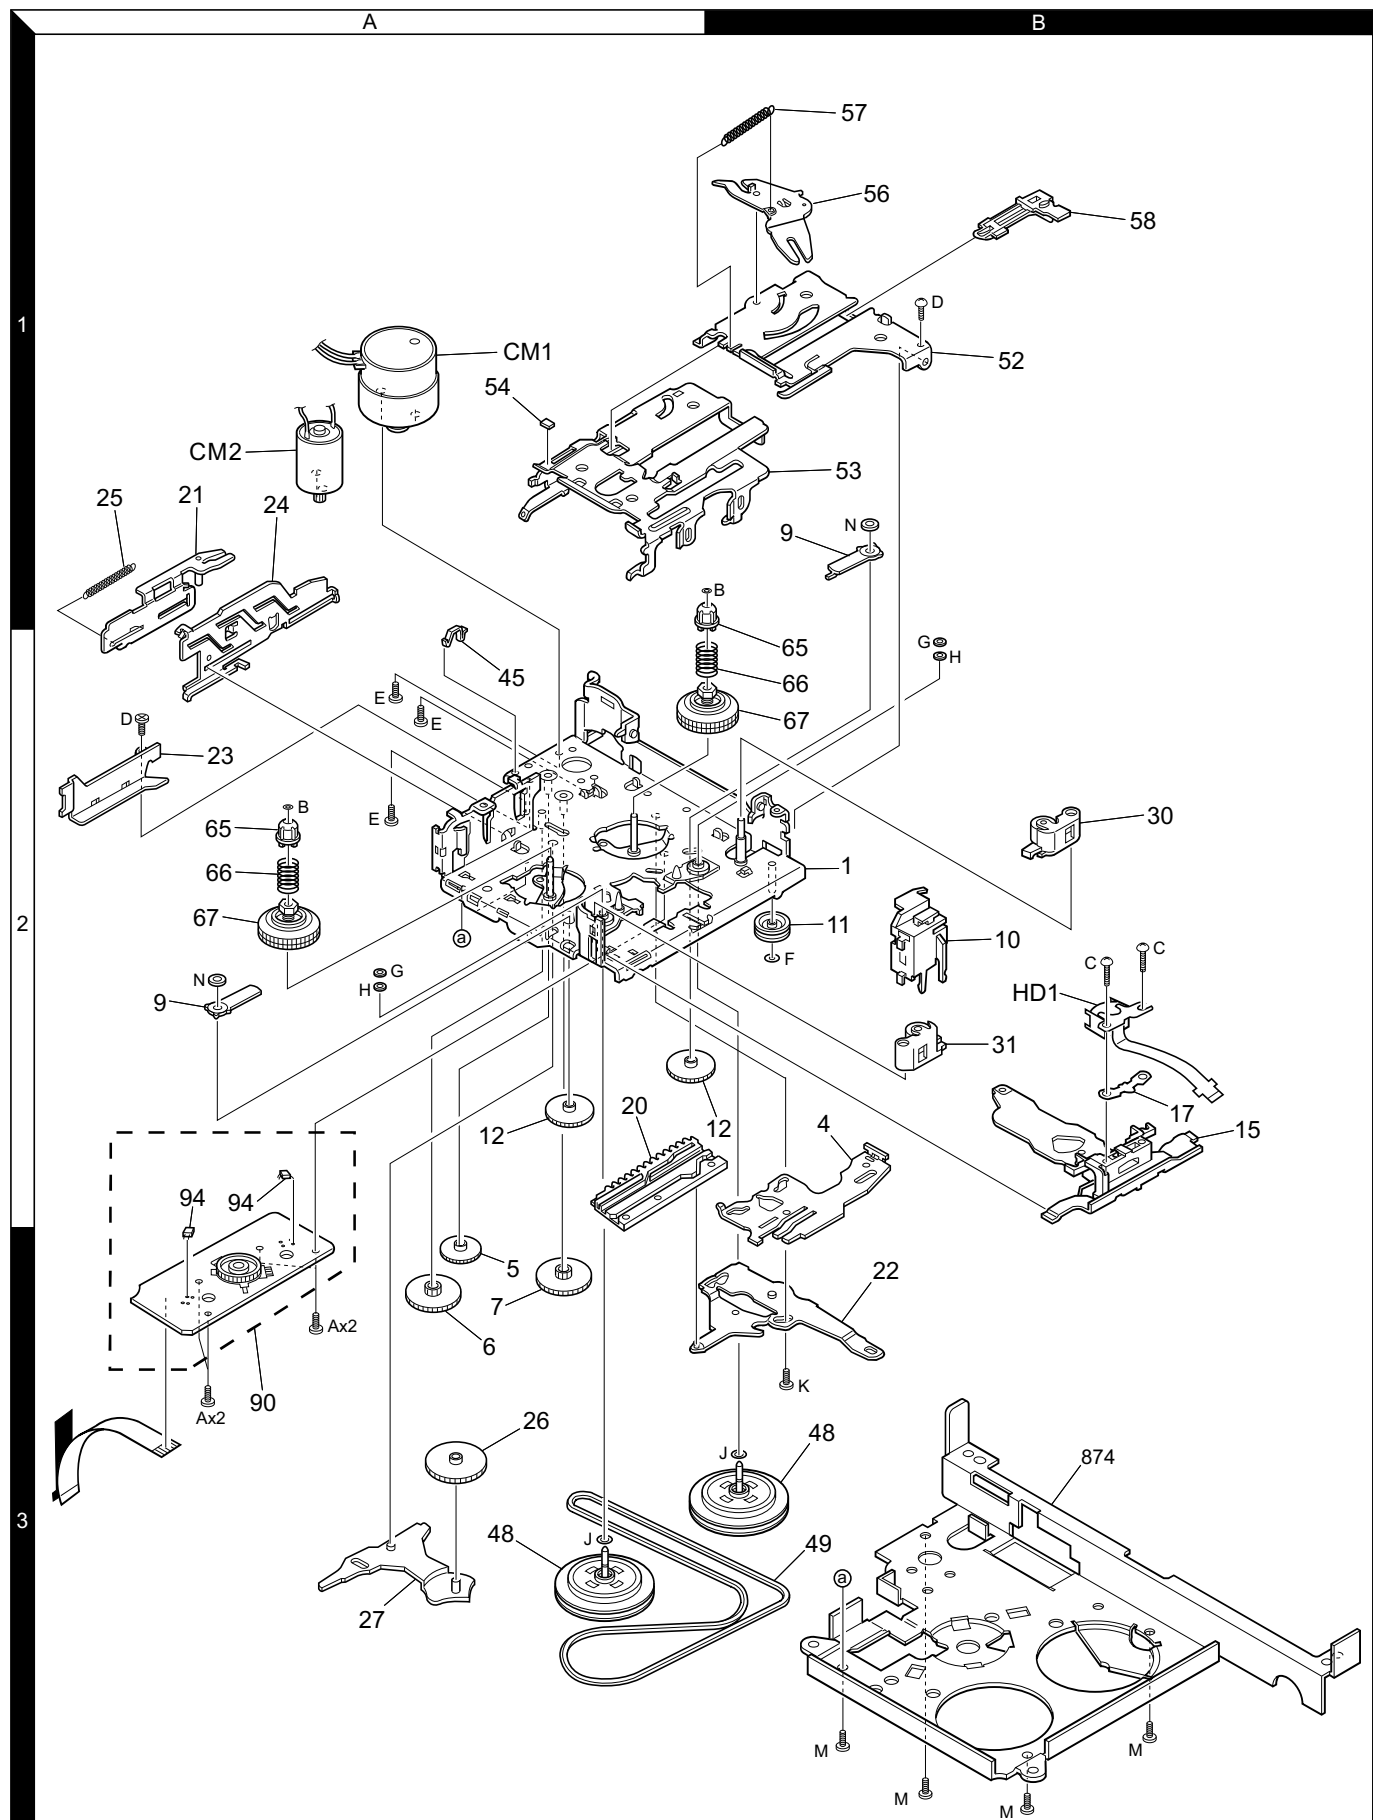

EXPLODED VIEW (UNIT)

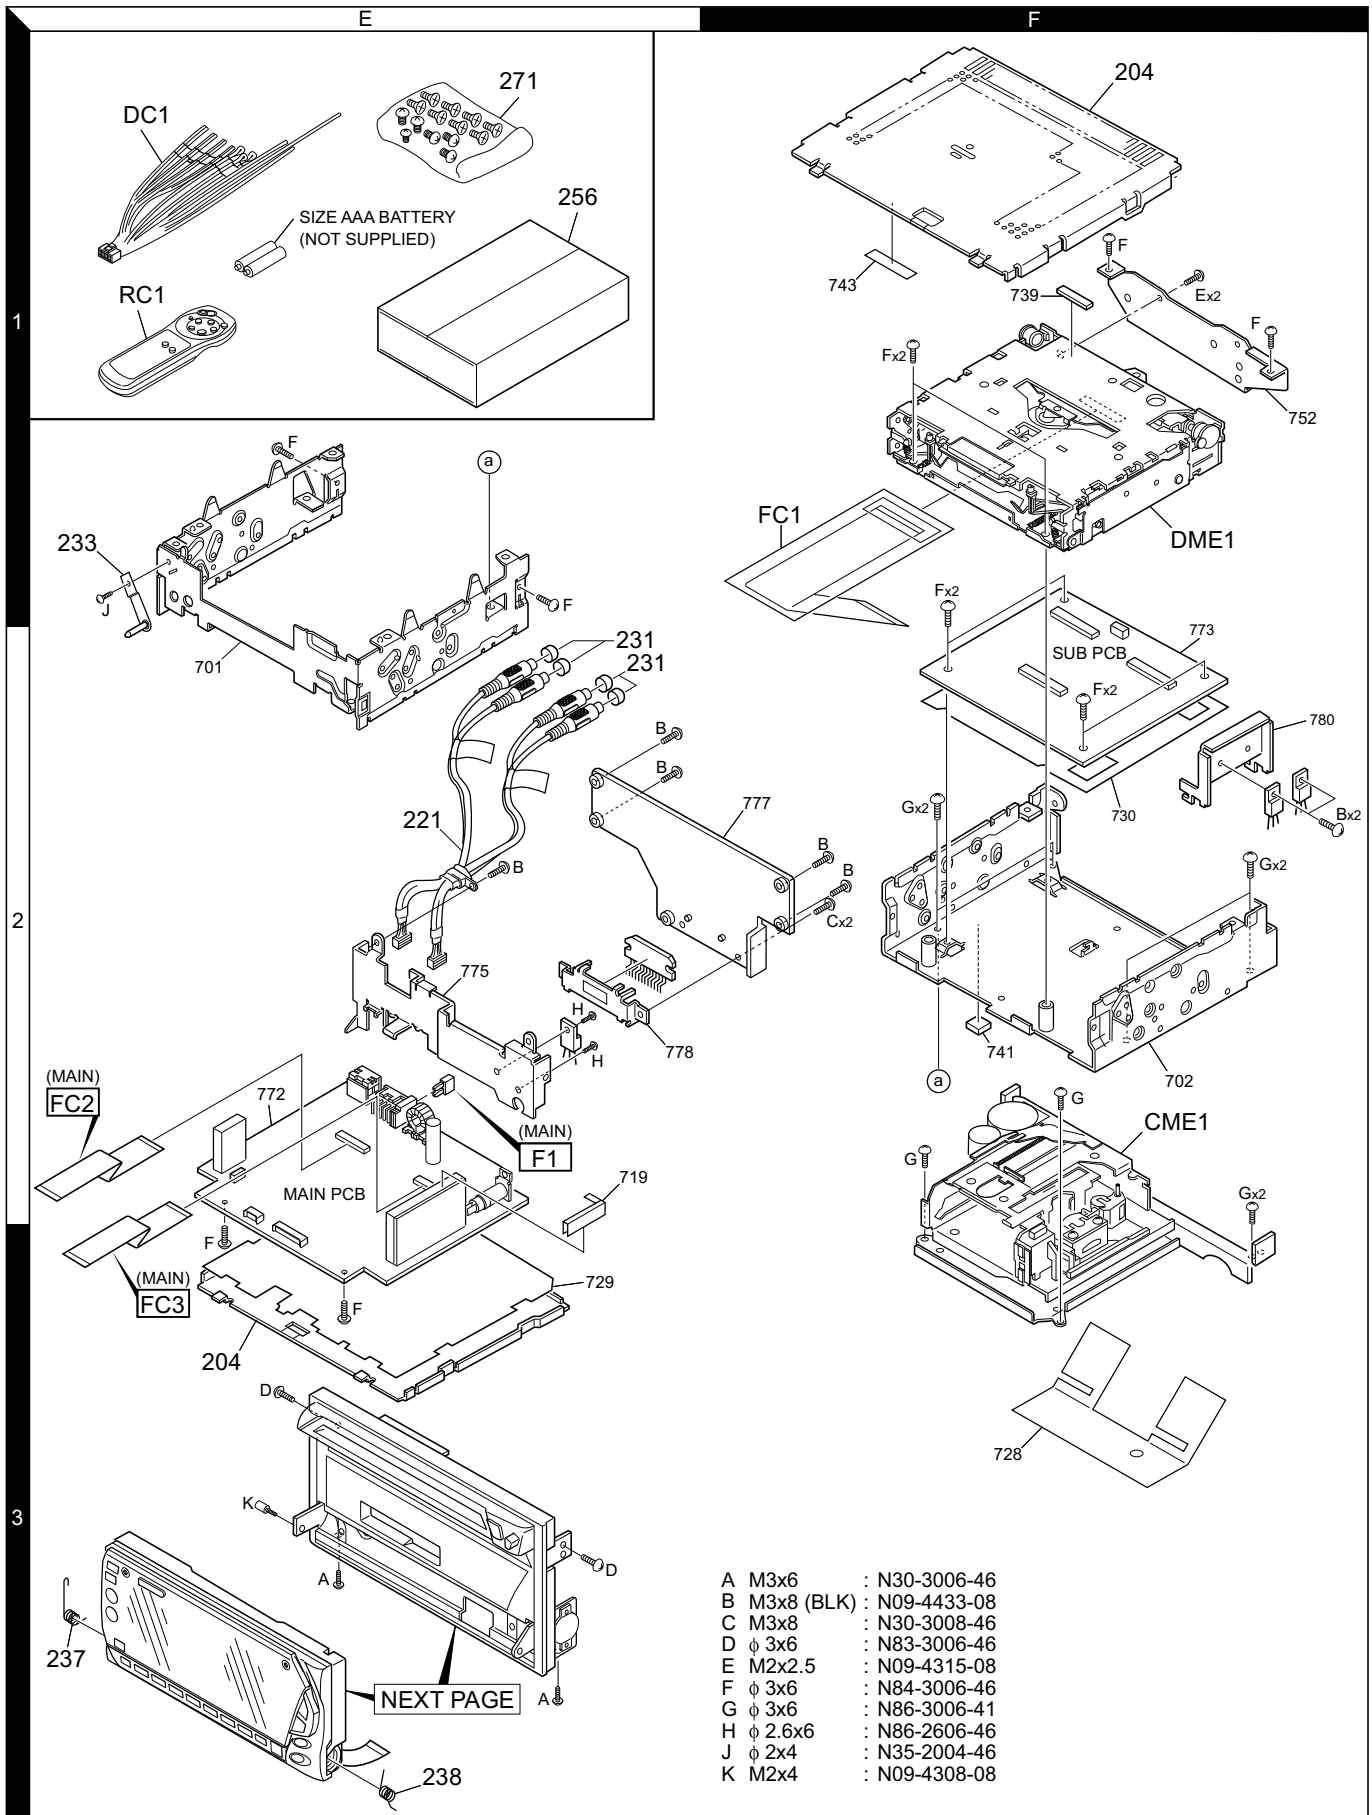


Parts with the exploded numbers larger than 700 are not supplied.

DPX-4010,4010/PH4

EXPLODED VIEW (UNIT)

- L ϕ 2x8 : N80-2008-46
 M ϕ 2x6 (BLK) : N80-2006-45
 N M2.6x3 (BLK) : N09-4436-08
 P M2x3.5 (BLK) : N09-4316-08
 Q ϕ 2x2 (BLK) : N09-4306-08
 R ϕ 2x6 : N82-2006-46
 S ϕ 3x8 : N09-4434-08

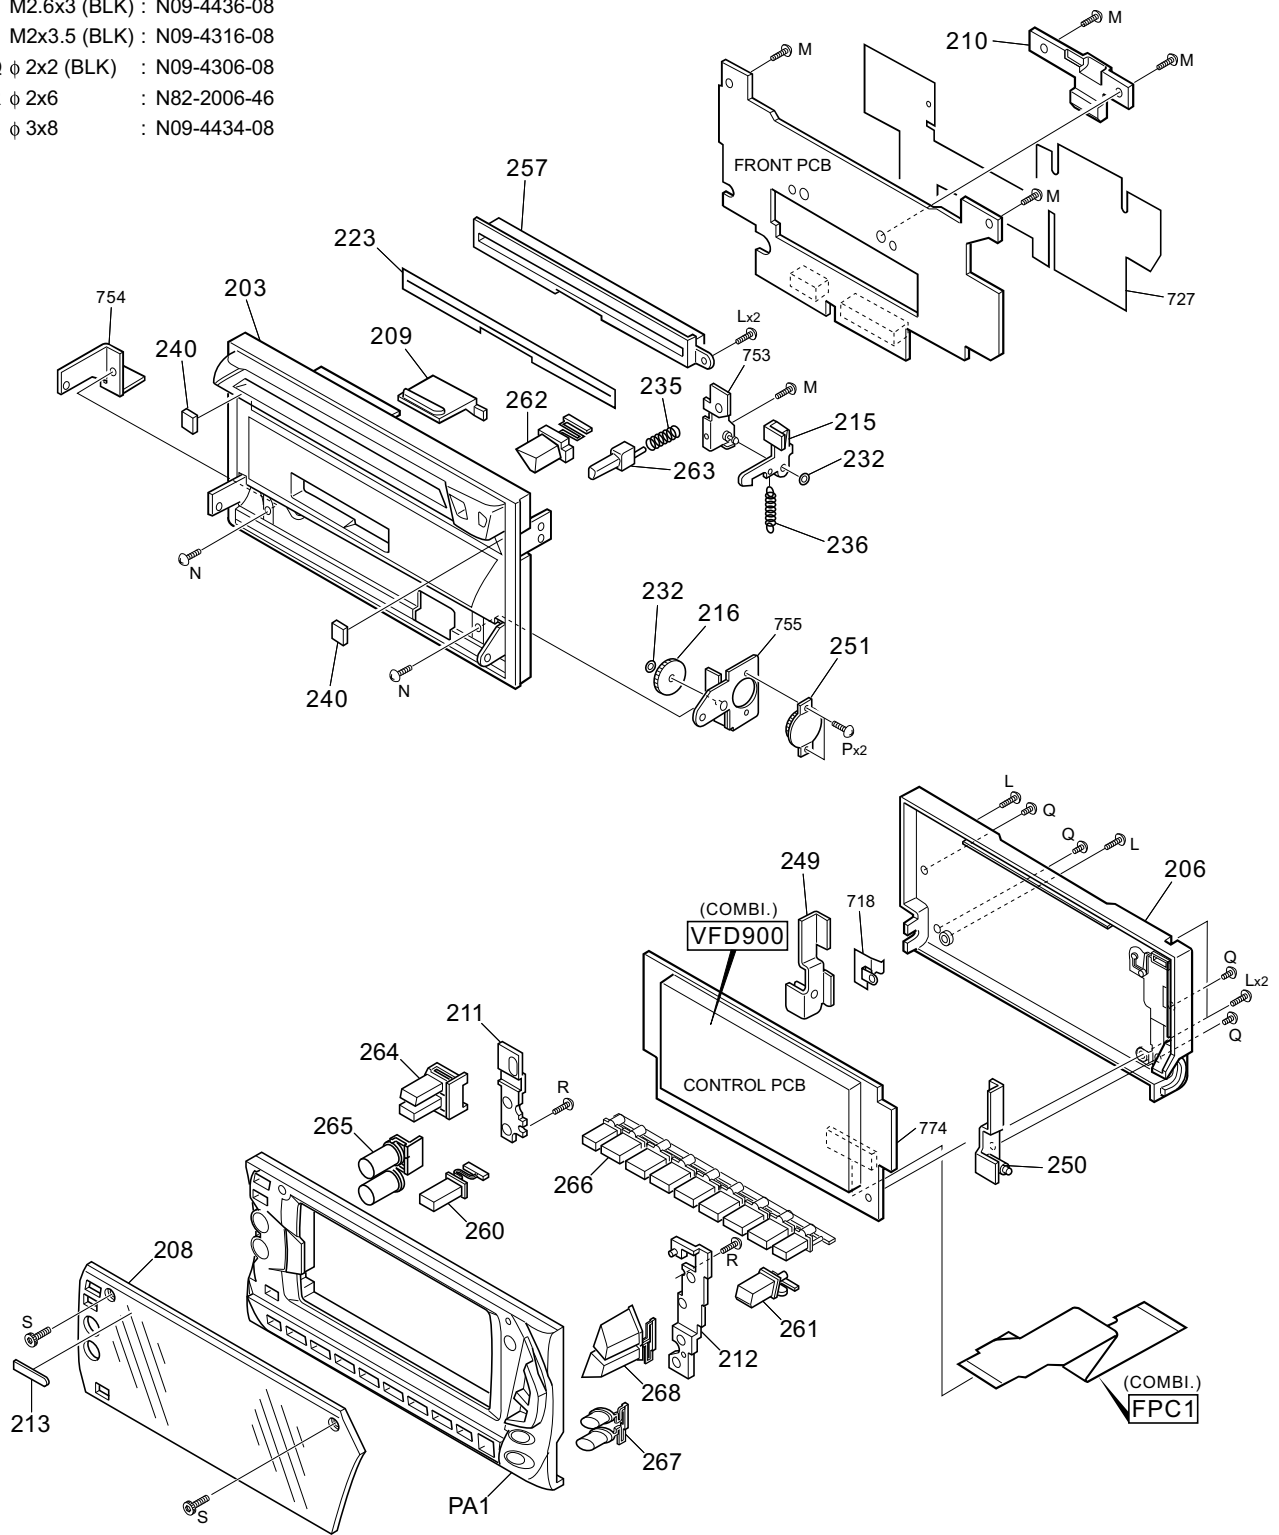

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
DPX-4010, DPX-4010/PH4					
203	1G	*	A22-2880-08	SUB PANEL (CR)	K
203	1G	*	A22-2881-08	SUB PANEL (CR)	MH
204	1F		A52-0743-08	COVER	
206	1H	*	A46-1710-08	REAR PANEL ASSY	K
206	1H	*	A46-1711-08	REAR PANEL ASSY	MH
PA1	3G	*	A64-2284-08	FRONT PANEL ASSY	K
PA1	3G	*	A64-2285-08	FRONT PANEL ASSY	MH
RC1	1E		A70-0883-05	REMOTE CONTROLLER ASSY	
207	3G	*	B10-4041-08	FRONT GLASS ASSY	KM
207	3G	*	B10-4043-08	FRONT GLASS ASSY	H
209	1G		B19-1174-08	LIGHTING BOARD (CD)	
210	1H		B19-1181-08	LIGHTING BOARD (CR)	
211	2G	*	B19-2078-08	LIGHTING BOARD (L)	
212	3H	*	B19-2079-08	LIGHTING BOARD (R)	
213	3G		B43-1240-04	BADGE	
-			B46-0100-50	WARRANTY CARD	
-		*	B64-1724-00	INST.MANUAL (ENG.FRE.SPA.)	K
-		*	B64-1725-00	INST.MANUAL (ENGLISH,CHINESE)	MH
-		*	B64-1729-00	INST.MANUAL (KOREAN)M	
215	1H		D10-4308-08	LEVER (OPENNER)	
216	2G		D13-1452-08	GEAR	
CME1	2F	*	D40-1155-08	CASSETTE MECHANISM ASSY	
221	1E	*	E30-4927-08	4P RCA CORD ASSY	
DC1	1E		E30-4860-08	DC CORD ASSY	KM
FC1	1F	*	E39-0402-08	22P FLAT CABLE	
223	1G	*	F19-1372-08	DUST COVER	
231	2E		F29-0049-05	INSULATING COVER	
232	2H		F29-0618-08	C WASHER	
233	1E		G02-1313-08	FLAT SPRING ASSY	
235	1H		G02-1315-08	SPRING (RELESE)	
236	1H		G02-1316-08	SPRING (LEVER)	
237	3E		G02-1318-08	SPRING (CLOSE)	
238	3E	*	G09-2039-08	SPRING (OPEN)	
240	1G	*	G11-1934-08	CUSHION (ILLUMI)	
-		*	H10-4734-08	POLYSTYRENE FOAMED FIXTURE (L)	
-		*	H10-4735-08	POLYSTYRENE FOAMED FIXTURE (R)	
-			H25-0336-04	PROTECTION BAG (170x290)	
-			H25-1127-04	PROTECTION BAG	
-			H54-1789-08	ITEM CARTON CASE	K
-		*	H54-1790-08	ITEM CARTON CASE	M
-		*	H54-1855-08	ITEM CARTON CASE	H
249	2H	*	J19-4905-08	PANEL HOLDER (R) ASSY	
250	3H	*	J19-4907-08	PANEL HOLDER (L) ASSY	
251	2H		J19-4913-08	OIL DAMPER	
256	1E	*	J21-9578-05	HONDA ATTACH KIT	KM
256	1E	*	J21-9617-05	HONDA ATTACH KIT (PH4)	H
257	1G	*	J90-1000-08	DISC GUIDE	
260	3G	*	K24-3654-08	KNOB (SA)	
261	3H	*	K24-3673-08	KNOB (SRC)	K

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation		
261	3H	*	K24-3674-08	KNOB (SRC)	MH		
262	1G	*	K24-3675-08	KNOB (CD/EJ)	K		
262	1G	*	K24-3676-08	KNOB (CD/EJ)	MH		
263	1G	*	K24-3677-08	KNOB (RELESE)	K		
263	1G	*	K24-3678-08	KNOB (RELESE)	MH		
264	2G	*	K25-1234-08	KNOB (AUD/ATT)			
265	3G	*	K25-1261-08	KNOB (VOL)			
266	3H	*	K25-1236-08	KNOB (PRESET)			
267	3H	*	K25-1262-08	KNOB (AM/FM)	K		
267	3H	*	K25-1263-08	KNOB (AM/FM)	MH		
268	3H	*	K25-1239-08	KNOB (SEEK)			
271	1E		N99-1671-08	SCREW SET			
A	3E	*	N30-3006-46	SCREW (M3X6)			
B	2E		N09-4433-08	SCREW (3X8,BLK)			
D	3E		N83-3006-46	SCREW (3X6,B)			
E	1F		N09-4315-08	SCREW (M2X2.5)			
F	1E		N84-3006-46	SCREW (3X6,S)			
G	2F		N86-3006-41	SCREW (3X6,S)			
J	1E		N35-2004-46	SCREW (2X4,S)			
K	3E		N09-4308-08	SCREW (M2X4)			
L	2H		N80-2008-46	SCREW (2X8,P)			
M	1H		N80-2006-45	SCREW (2X6,P,BLK)			
N	2G	*	N09-4436-08	SCREW (M2.6X3,BLK)			
P	2H		N09-4316-08	SCREW (M2X3.5,BLK)			
Q	2H		N09-4306-08	SCREW (2X2,BLK)			
R	3H		N82-2006-46	SCREW (2X6,P)			
S	3G	*	N09-4434-08	SCREW (3X8)	MH		
DME1	1F		X92-3900-01	CD MECHANISM ASSY (DXM-1051)			
MAIN PWB UNIT							
B600		*	C90-5360-08	ELECTRO	0.047F	5.5V	
C1			CK73GB1H103K	CHIP C	0.010UF	K	
C2			CE04CW1A101M	ELECTRO	100UF	10WV	
C3,4			CC73GCH1H220J	CHIP C	22PF	J	
C5			CE04CW0J220M	ELECTRO	22UF	6.3WV	
C6-8			CK73GB1H103K	CHIP C	0.010UF	K	
C9			CE04CW1A101M	ELECTRO	100UF	10WV	
C10-12			CK73GB1C104K	CHIP C	0.10UF	K	
C13			CE04CW1A101M	ELECTRO	100UF	10WV	
C14			CK73GB1H472K	CHIP C	4700PF	K	
C15			CK73GB1H103K	CHIP C	0.010UF	K	
C16			CK73FB1C225K	CHIP C	2.2UF	K	
C17			CK73GB1E473K	CHIP C	0.047UF	K	
C18			CK73GB1H103K	CHIP C	0.010UF	K	
C20-26			CK73GB1H472K	CHIP C	4700PF	K	
C100			CK73GB1H102K	CHIP C	1000PF	K	
C101A,B			C90-2610-05	ELECTRO	2.2UF	50WV	
C102A,B			CK73GB1E333K	CHIP C	0.033UF	K	H
C102A,B			CK73GB1H123K	CHIP C	0.012UF	K	KM
C108			CK73GB1H103K	CHIP C	0.010UF	K	
C109			C90-2949-08	ELECTRO	470UF	10WV	
C120			CK73GB1H103K	CHIP C	0.010UF	K	
C121			C90-2597-05	ELECTRO	10UF	16WV	
C150			C90-5225-08	ELECTRO	0.1UF	50WV	

E : Europe K : North America M : Other Areas

W : Without Europe

K : DPX-4010 (K type)

M : DPX-4010 (M type)

H : DPX-4010/PH4

△ Indicates safety critical components.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

MAIN PWB UNIT

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation	Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
C151,152 C153 C154 C155 C156			CK73GB1H103K C90-2949-08 CC73GCH1H331J CC73GCH1H150J CK73GB1H103K	CHIP C 0.010UF K ELECTRO 470UF 10WV CHIP C 330PF J CHIP C 15PF J CHIP C 0.010UF K		C405A,B C406 C407,408 C500A,B C501A,B			CC73FCH1H220J CK73FB1H104K CC73FCH1H220J CK73FB1A684K C90-2610-05	CHIP C 22PF J CHIP C 0.10UF K CHIP C 22PF J CHIP C 0.68UF K ELECTRO 2.2UF 50WV	
C157 C158 C159 C200A,B C201A,B			C90-2597-05 CC73GCH1H150J CC73GCH1H331J CK73GB1H102K CE04CW1H0R1M	ELECTRO 10UF 16WV CHIP C 15PF J CHIP C 330PF J CHIP C 1000PF K ELECTRO 0.1UF 50WV		C502 C503A,B C504 C505A,B C506			CE04CW1C220M C90-2610-05 CE04CW1C101M CK73FB1A684K CK73GB1H821K	ELECTRO 22UF 16WV ELECTRO 2.2UF 50WV ELECTRO 100UF 16WV CHIP C 0.68UF K CHIP C 820PF K	
C202A,B C203A,B C204A,B C205A,B C206A,B			CK73GB1C104K CK73GB1H103K C90-2610-05 CC73GCH1H471J CC73GCH1H471J	CHIP C 0.10UF K CHIP C 0.010UF K ELECTRO 2.2UF 50WV CHIP C 470PF J CHIP C 470PF J		C507 C508 C509A,B C510A,B C511			CK73FB1A684K CE04CW1A101M CK73FB1A684K CK73FB1A684K CK73FB1A684K	CHIP C 0.68UF K ELECTRO 100UF 10WV CHIP C 0.68UF K CHIP C 0.68UF K CHIP C 0.68UF K	
C207 C208 C209,210 C211 C212			CE04CW1C220M CK73GB1H223K CK73FB1C225K CE04CW1C220M CK73FB1C474K	ELECTRO 22UF 16WV CHIP C 0.022UF K CHIP C 2.2UF K ELECTRO 22UF 16WV CHIP C 0.47UF K		C600 C601 C602 C603 C604			CE04CW1H3R3M CK73GB1H223K CK73GB1C104K CK73GB1H103K CK73EB1H104K	ELECTRO 3.3UF 50WV CHIP C 0.022UF K CHIP C 0.10UF K CHIP C 0.010UF K CHIP C 0.10UF K	
C213 C214A,B C215A,B C250 C251			CK73GB1H472K CC73GCH1H100D CC73GCH1H100D CK73GB1H472K CK73GB1C104K	CHIP C 4700PF K CHIP C 10PF D CHIP C 10PF D CHIP C 4700PF K CHIP C 0.10UF K		C605 C606 C607 C608 C609			CK73GB1C104K C90-5328-08 CK73GB1C683K CE04CW1H0R1M CE04CW1C101M	CHIP C 0.10UF K ELECTRO 3900UF 16WV CHIP C 0.068UF K ELECTRO 0.1UF 50WV ELECTRO 100UF 16WV	
C252 C253-255 C256 C257,258 C300A,B			CK73GB1H103K CK73GB1E473K CK73GB1C104K CK73GB1H103K C90-2595-05	CHIP C 0.010UF K CHIP C 0.047UF K CHIP C 0.10UF K CHIP C 0.010UF K ELECTRO 4.7UF 16WV		C610 C611-613 C614 C615 C616			CK73GB1H103K CE04CW1A101M CK73GB1H223K CE04CW1C470M C90-2597-05	CHIP C 0.010UF K ELECTRO 100UF 10WV CHIP C 0.022UF K ELECTRO 47UF 16WV ELECTRO 10UF 16WV	
C301 C302 C303A,B C304A,B C306A,B			CK73GB1C104K C90-5327-08 C90-2595-05 C90-2610-05 C90-2610-05	CHIP C 0.10UF K CHIP-TAN 10UF 16WV ELECTRO 4.7UF 16WV ELECTRO 2.2UF 50WV ELECTRO 2.2UF 50WV		C617 C618 C619 C620 C700			CK73GB1H223K CE04CW1A101M CK73GB1C104K CE04CW1C470M CE04CW1C101M	CHIP C 0.022UF K ELECTRO 100UF 10WV CHIP C 0.10UF K ELECTRO 47UF 16WV ELECTRO 100UF 16WV	
C307-310 C314A,B C315A,B C316 C317			CK73GB1C104K C90-2594-05 C90-2594-05 CE04CW1A101M CK73GB1H103K	CHIP C 0.10UF K ELECTRO 10UF 10WV ELECTRO 10UF 10WV ELECTRO 100UF 10WV CHIP C 0.010UF K		C701 C702 C703 C704 C705			CK73GB1C104K CE04CW1C101M CK73GB1C104K CE04DW1H470M CK73FB1H104K	CHIP C 0.10UF K ELECTRO 100UF 16WV CHIP C 0.10UF K ELECTRO 47UF 50WV CHIP C 0.10UF K	
C350,351 C352A,B C353 C354 C355A,B			CE04CW1A101M CK73GB1C104K CK73FB1C475K CE04CW1A101M CK73GB1C104K	ELECTRO 100UF 10WV CHIP C 0.10UF K CHIP C 4.7UF K ELECTRO 100UF 10WV CHIP C 0.10UF K		C706,707 ANT1 CN1 CN2 CN200 CN250		*	E04-0318-08 E40-9671-08 E40-9755-08 E40-3238-05 E41-0050-08	ANT JACK 20P CONNECTOR 14P CONNECTOR 3P PIN ASSY 5P CONNECTOR	
C356,357 C358 C359A,B C360A,B C380			CK73FB1C475K C90-2597-05 C90-2597-05 CC73GCH1H471J CK73GB1H103K	CHIP C 4.7UF K ELECTRO 10UF 16WV ELECTRO 10UF 16WV CHIP C 470PF J CHIP C 0.010UF K		CN251 CN350 CN400 CN600 CN603		*	E41-0051-08 E41-0110-08 E56-0834-05 E03-0403-08 E40-9586-08	11P CONNECTOR 18P CONNECTOR 13P DIN CONNECTOR DC CONNECTOR 6P CONNECTOR	
C381,382 C383 C400 C401A,B C402			CE04CW1A101M CE04CW1C220M CK73GB1H472K C90-2595-05 CE04CW1C470M	ELECTRO 100UF 10WV ELECTRO 22UF 16WV CHIP C 4700PF K ELECTRO 4.7UF 16WV ELECTRO 47UF 16WV		FC2 FC3	2E 2E	*	E39-0403-08 E39-0275-08	18P FLAT CABLE 20P FLAT CABLE	

E : Europe K : North America M : Other Areas

W : Without Europe

K : DPX-4010 (K type)

M : DPX-4010 (M type)

H : DPX-4010/PH4

△ Indicates safety critical components.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

MAIN PWB UNIT

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation	Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
F1	2E		F06-1032-05	FUSE 10A		R157			RK73GB1J2R2J	CHIP R 2.2 J 1/16W	
L1			L33-1111-08	CHOKE COIL 4.7uH		R158			RK73GB1J222J	CHIP R 2.2K J 1/16W	
L2			L33-1112-08	CHOKE COIL 10uH		R161			RK73GB1J102J	CHIP R 1.0K J 1/16W	
L100			L33-1112-08	CHOKE COIL 10uH		R162			RK73GB1J473J	CHIP R 47K J 1/16W	
L102			L33-1111-08	CHOKE COIL 4.7uH		R163			RK73GB1J513J	CHIP R 51K J 1/16W	
L104			L33-1123-05	ANT COIL 52mH		R200			RK73GB1J223J	CHIP R 22K J 1/16W	
L300			L33-1111-08	CHOKE COIL 4.7uH		R201A,B			RK73GB1J181J	CHIP R 180 J 1/16W	
L700			L33-1090-08	CHOKE COIL 56uH		R202A,B			RK73GB1J104J	CHIP R 100K J 1/16W	
X1		*	L77-2761-08	X'TAL 8.388608MHz		R203A,B			RK73GB1J104J	CHIP R 100K J 1/16W	
X150		*	L77-2762-08	X'TAL 7.200MHz		R204			RK73GB1J473J	CHIP R 47K J 1/16W	
B	2E	*	N09-4433-08	SCREW (3X8,S,BLK)		R205			RK73GB1J223J	CHIP R 22K J 1/16W	
C	2E		N30-3008-46	SCREW (3X8,S)		R206			RK73GB1J392J	CHIP R 3.9K J 1/16W	
H	2E		N86-2606-46	SCREW (2.6X8,S)		R207			RK73GB1J393J	CHIP R 39K J 1/16W	
R1			RK73GB1J103J	CHIP R 10K J 1/16W		R208			RK73GB1J104J	CHIP R 100K J 1/16W	
R2			RK73GB1J473J	CHIP R 47K J 1/16W		R209			RK73GB1J100J	CHIP R 10 J 1/16W	
R28,29			RK73GB1J222J	CHIP R 2.2K J 1/16W		R250,251			RK73GB1J433J	CHIP R 43K J 1/16W	
R31			RK73GB1J473J	CHIP R 47K J 1/16W		R252			RK73GB1J473J	CHIP R 47K J 1/16W	
R49			RK73GB1J101J	CHIP R 100 J 1/16W		R253			RK73GB1J121J	CHIP R 120 J 1/16W	
R50			RK73GB1J561J	CHIP R 560 J 1/16W		R254			RK73GB1J473J	CHIP R 47K J 1/16W	
R56			RK73GB1J154J	CHIP R 150K J 1/16W		R255			RK73GB1J471J	CHIP R 470 J 1/16W	
R57			RK73GB1J101J	CHIP R 100 J 1/16W		R256			RK73GB1J473J	CHIP R 47K J 1/16W	
R58			RK73GB1J561J	CHIP R 560 J 1/16W		R258,259			RS14DB2H100J	FL-PROOF RS 10 J 1/2W	
R59			RK73GB1J472J	CHIP R 4.7K J 1/16W		R260,261			RK73GB1J471J	CHIP R 470 J 1/16W	
R60			RK73GB1J473J	CHIP R 47K J 1/16W		R300			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R61			RK73GB1J473J	CHIP R 47K J 1/16W	K	R303			RK73GB1J101J	CHIP R 100 J 1/16W	
R62			RK73GB1J102J	CHIP R 1.0K J 1/16W		R350			RK73GB1J100J	CHIP R 10 J 1/16W	
R63			RK73GB1J473J	CHIP R 47K J 1/16W		R351			RK73GB1J822J	CHIP R 8.2K J 1/16W	
R65,66			RK73GB1J222J	CHIP R 2.2K J 1/16W		R352A,B			RK73GB1J104J	CHIP R 100K J 1/16W	
R67			RK73GB1J102J	CHIP R 1.0K J 1/16W		R353			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R71			RK73GB1J473J	CHIP R 47K J 1/16W		R354			RK73GB1J104J	CHIP R 100K J 1/16W	
R75			RK73GB1J222J	CHIP R 2.2K J 1/16W		R355			RK73GB1J103J	CHIP R 10K J 1/16W	
R76,77			RK73GB1J472J	CHIP R 4.7K J 1/16W		R356A,B			RK73GB1J223J	CHIP R 22K J 1/16W	
R78			RK73GB1J473J	CHIP R 47K J 1/16W		R357A,B			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R79			RK73GB1J104J	CHIP R 100K J 1/16W		R358			RK73GB1J242J	CHIP R 2.4K J 1/16W	
R80			RK73GB1J471J	CHIP R 470 J 1/16W		R359			RK73GB1J333J	CHIP R 33K J 1/16W	
R81			RK73GB1J473J	CHIP R 47K J 1/16W		R360			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R82			RK73GB1J100J	CHIP R 10 J 1/16W		R361			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R83			RK73GB1J104J	CHIP R 100K J 1/16W		R362			RK73GB1J473J	CHIP R 47K J 1/16W	
R84			RK73GB1J100J	CHIP R 10 J 1/16W		R363			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R85			RK73GB1J103J	CHIP R 10K J 1/16W		R364A,B			RK73GB1J473J	CHIP R 47K J 1/16W	
R86			RK73GB1J473J	CHIP R 47K J 1/16W		R365A,B			RK73GB1J473J	CHIP R 47K J 1/16W	
R87			RK73GB1J471J	CHIP R 470 J 1/16W		R366			RK73GB1J104J	CHIP R 100K J 1/16W	
R88			RK73GB1J104J	CHIP R 100K J 1/16W		R367A,B			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R89			RK73GB1J102J	CHIP R 1.0K J 1/16W		R368A,B			RK73GB1J332J	CHIP R 3.3K J 1/16W	
R90			RK73GB1J103J	CHIP R 10K J 1/16W		R369A,B			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R92			RK73GB1J473J	CHIP R 47K J 1/16W		R370A,B			RK73GB1J332J	CHIP R 3.3K J 1/16W	
R104,105			RK73GB1J101J	CHIP R 100 J 1/16W		R371A,B			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R106			RK73GB1J104J	CHIP R 100K J 1/16W		R380			RK73GB1J100J	CHIP R 10 J 1/16W	
R110			RK73GB1J100J	CHIP R 10 J 1/16W		R381A,B			RK73GB1J473J	CHIP R 47K J 1/16W	
R150			RK73GB1J332J	CHIP R 3.3K J 1/16W		R382A,B			RK73GB1J473J	CHIP R 47K J 1/16W	
R151			RK73EB2B181J	CHIP R 180 J 1/8W		R383A,B			RK73GB1J473J	CHIP R 47K J 1/16W	
R152			RK73GB1J183J	CHIP R 18K J 1/16W		R400			RK73GB1J104J	CHIP R 100K J 1/16W	
R153			RK73GB1J473J	CHIP R 47K J 1/16W		R402			RK73FB2A101J	CHIP R 100 J 1/10W	
R155			RK73GB1J222J	CHIP R 2.2K J 1/16W		R403A,B			RK73FB2A101J	CHIP R 100 J 1/10W	
						R404			RK73FB2A101J	CHIP R 100 J 1/10W	

E : Europe K : North America M : Other Areas

W : Without Europe

K : DPX-4010 (K type)

M : DPX-4010 (M type)

H : DPX-4010/PH4

△ Indicates safety critical components.

DPX-4010,4010/PH4

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

MAIN PWB UNIT

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation	Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
R405			RK73FB2A222J	CHIP R 2.2K J 1/10W		VR200A,B			R32-0242-08	SFR 10K	
R408			RK73GB1J102J	CHIP R 1.0K J 1/16W		S990		*	S70-0857-08	PUSH SW	
R409			RK73FB2A222J	CHIP R 2.2K J 1/10W		D1-3			1SS355	DIODE	
R410,411			RK73FB2A472J	CHIP R 4.7K J 1/10W		D104			MA4062(N)-M	ZENER DIODE	
R412			RK73FB2A102J	CHIP R 1.0K J 1/10W		D250			1SR139-400	DIODE	
R413			RK73FB2A101J	CHIP R 100 J 1/10W		D251			UDZ3.6B	ZENER DIODE	
R414-416			RK73GB1J104J	CHIP R 100K J 1/16W		D300			1SS355	DIODE	
R417			RK73GB1J473J	CHIP R 47K J 1/16W		D350-353			1SS355	DIODE	
R500			RK73GB1J103J	CHIP R 10K J 1/16W		D401,402			1SS355	DIODE	
R501A,B			RK73GB1J103J	CHIP R 10K J 1/16W		D404			DTZ9.1A	ZENER DIODE	
R502A,B			RK73GB1J103J	CHIP R 10K J 1/16W		D405-408			NNCD6.2F	ZENER DIODE	
R503			RK73GB1J392J	CHIP R 3.9K J 1/16W		D409A,B			NNCD6.2F	ZENER DIODE	
R504			RK73GB1J391J	CHIP R 390 J 1/16W		D410			NNCD6.2F	ZENER DIODE	
R505			RK73GB1J153J	CHIP R 15K J 1/16W		D500			1SS355	DIODE	
R506			RK73GB1J331J	CHIP R 330 J 1/16W		D501A,B			1SR154-400	DIODE	
R507			RK73EB2B222J	CHIP R 2.2K J 1/8W		D502A,B			1SR154-400	DIODE	
R508			RK73GB1J153J	CHIP R 15K J 1/16W		D503			1SS355	DIODE	
R600			RK73GB1J472J	CHIP R 4.7K J 1/16W		D504A,B			1SR154-400	DIODE	
R601			RD14DB2H102J	SMALL-RD 1.0K J 1/2W		D505A,B			1SR154-400	DIODE	
R603			RK73GB1J472J	CHIP R 4.7K J 1/16W		D506			DTZ18C	ZENER DIODE	
R604			RD14DB2H332J	SMALL-RD 3.3K J 1/2W		D507			1SS355	DIODE	
R605			RK73EB2B473J	CHIP R 47K J 1/8W		D600,601			1SR139-400	DIODE	
R606			RK73EB2B472J	CHIP R 4.7K J 1/8W		D602			MA4220-L	ZENER DIODE	
R607			RK73GB1J104J	CHIP R 100K J 1/16W		D603			MA4056(N)-H	DIODE	
R608			RK73GB1J223J	CHIP R 22K J 1/16W		D604			RM10Z	DIODE	
R609			RS14DB2H561J	FL-PROOF RS 560 J 1/2W		D605			MA4220-L	ZENER DIODE	
R610			RK73GB1J223J	CHIP R 22K J 1/16W		D606			MA4056(N)-H	DIODE	
R611			RK73GB1J183J	CHIP R 18K J 1/16W		D607			1SS355	DIODE	
R612			RK73EB2B103J	CHIP R 10K J 1/8W		D608			1SR139-400	DIODE	
R613			RK73GB1J822J	CHIP R 8.2K J 1/16W		D609			1SS355	DIODE	
R614			RK73GB1J104J	CHIP R 100K J 1/16W		D611			DTZ9.1A	ZENER DIODE	
R615			RK73GB1J822J	CHIP R 8.2K J 1/16W		D612			MA4220-L	ZENER DIODE	
R616			RK73GB1J223J	CHIP R 22K J 1/16W		D613			MA4056(N)-H	DIODE	
R617			RK73GB1J104J	CHIP R 100K J 1/16W		D614			MA4220-L	ZENER DIODE	
R618			RK73EB2B1R0J	CHIP R 1.0 J 1/8W		D615,616			1SR139-400	DIODE	
R622			RK73GB1J103J	CHIP R 10K J 1/16W		D700			PTZ5.6A	ZENER DIODE	
R623,624			RK73GB1J2R2J	CHIP R 2.2 J 1/16W		DSP101			DSP-201M-S00B	SURGE ABSORBER	
R625			RK73GB1J103J	CHIP R 10K J 1/16W		IC1		*	MN101C15FCJ	IC	
R626			RD14DB2H102J	SMALL-RD 1.0K J 1/2W		IC2			S-80738AN-D2	IC	
R627,628			RK73GB1J102J	CHIP R 1.0K J 1/16W		IC150			LC72135M	IC	
R629			RD14DB2H102J	SMALL-RD 1.0K J 1/2W		IC200			CXA2560Q	IC	
R630,631			RK73EB2B222J	CHIP R 2.2K J 1/8W		IC250			BA6219BFP-Y	IC	
R632			RK73GB1J223J	CHIP R 22K J 1/16W		IC300			TDA7400	IC	
R633			RK73GB1J102J	CHIP R 1.0K J 1/16W		IC350			NJM4565MD	IC (OP AMP X2)	
R634			RK73GB1J101J	CHIP R 100 J 1/16W		IC351			BA3129F	IC (SWITCH)	
R635			RK73GB1J152J	CHIP R 1.5K J 1/16W		IC380			BA3131FS	IC	
R641			RK73GB1J332J	CHIP R 3.3K J 1/16W		IC500			TDA7386	IC	
R642			RK73GB1J271J	CHIP R 270 J 1/16W		Q1			DTA114YK	DIGITAL TRANSISTOR	
R700			RK73GB1J102J	CHIP R 1.0K J 1/16W		Q2			DTA114EK	DIGITAL TRANSISTOR	
R701			RK73GB1J473J	CHIP R 47K J 1/16W		Q3,4			DTC124EK	DIGITAL TRANSISTOR	
RN1-4			R90-0724-05	MULTI-COMP 1K X4		Q5			DTA144EK	DIGITAL TRANSISTOR	
RN5			R90-1042-08	MULTI-COMP 1K X4		Q6			2SK536	TRANSISTOR	
RN6-10			R90-0724-05	MULTI-COMP 1K X4		Q150			2SK536	TRANSISTOR	
RN11			R90-0722-05	MULTI-COMP 2.2K X4							
RN12,13			R90-0724-05	MULTI-COMP 1K X4							

E : Europe K : North America M : Other Areas

W : Without Europe

K : DPX-4010 (K type)

M : DPX-4010 (M type)

H : DPX-4010/PH4

△ Indicates safety critical components.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

MAIN PWB UNIT

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
Q151			DTC124EK	DIGITAL TRANSISTOR	
Q152			DTA124EK	DIGITAL TRANSISTOR	
Q300			DTC124EK	DIGITAL TRANSISTOR	
Q350A,B			2SC2412K	TRANSISTOR	
Q351			DTC343TK	DIGITAL TRANSISTOR	
Q352			2SC2412K	TRANSISTOR	
Q353			DTC124EK	DIGITAL TRANSISTOR	
Q400			DTC144EK	DIGITAL TRANSISTOR	
Q401			DTA144EK	DIGITAL TRANSISTOR	
Q500A,B			DTC343TK	DIGITAL TRANSISTOR	
Q501A,B			DTC343TK	DIGITAL TRANSISTOR	
Q502			DTC124EK	DIGITAL TRANSISTOR	
Q600			2SA1703-AN	TRANSISTOR	
Q601			2SA1037K	TRANSISTOR	
Q602			2SA1703-AN	TRANSISTOR	
Q603			DTA124EK	DIGITAL TRANSISTOR	
Q604			DTC144EK	DIGITAL TRANSISTOR	
Q605,606			DTC114EK	DIGITAL TRANSISTOR	
Q607,608			2SC2412K	TRANSISTOR	
Q609-612			2SA1703-AN	TRANSISTOR	
Q613			DTB123YS	DIGITAL TRANSISTOR	
Q614			2SC4483(R,S,T)	TRANSISTOR	
Q615			2SB1565(E,F)	TRANSISTOR	
Q616			2SA1703-AN	TRANSISTOR	
Q617			2SC2412K	TRANSISTOR	
Q621,622			2SC2412K	TRANSISTOR	
Q624			DTC124EK	DIGITAL TRANSISTOR	
Q625			DTC114EK	DIGITAL TRANSISTOR	
Q626			DTC124EK	DIGITAL TRANSISTOR	
Q627			DTA124EK	DIGITAL TRANSISTOR	
Q628			DTC124EK	DIGITAL TRANSISTOR	
TH500			TH104K01J	THERMISTOR 100K	
DC700			W02-3162-08	DC/DC CONVERTER (TMA787A)	
L600			W02-3177-08	CHOKE COIL	
TU100			W02-3181-08	FM/AM FRONT-END	
SUB PWB UNIT					
C800			CK73GB1E473K	CHIP C 0.047UF K	
C801			CE04CW1C470M	ELECTRO 47UF 16WV	
C802			CK73GB1E473K	CHIP C 0.047UF K	
C803			CE04CW1A101M	ELECTRO 100UF 10WV	
C804			CE04CW1C470M	ELECTRO 47UF 16WV	
C805			CK73GB1E473K	CHIP C 0.047UF K	
C806			CE04CW1A101M	ELECTRO 100UF 10WV	
C807			CE04CW1C470M	ELECTRO 47UF 16WV	
C808			CK73GB1E473K	CHIP C 0.047UF K	
C809			CE04CW1A101M	ELECTRO 100UF 10WV	
C810			CK73GB1E473K	CHIP C 0.047UF K	
C820			CE04CW1A101M	ELECTRO 100UF 10WV	
C821			CK73GB1C104K	CHIP C 0.10UF K	
C822			C90-2610-05	ELECTRO 2.2UF 50WV	
C823			CK73GB1A154K	CHIP C 0.15UF K	
C824A,B			C90-2610-05	ELECTRO 2.2UF 50WV	
C825A,B			C90-2597-05	ELECTRO 10UF 16WV	
C826			CE04CW1A101M	ELECTRO 100UF 10WV	
C827			CK73GB1A224K	CHIP C 0.22UF K	
C828			CK73GB1H102K	CHIP C 1000PF K	
C829			CK73GB1H472K	CHIP C 4700PF K	
C830			CK73GB1C683K	CHIP C 0.068UF K	
C831,832			CK73GB1C104K	CHIP C 0.10UF K	
C833			CK73GB1A224K	CHIP C 0.22UF K	
C834			CK73GB1H472K	CHIP C 4700PF K	
C835			CK73GB1H102K	CHIP C 1000PF K	
C836			CK73GB1C683K	CHIP C 0.068UF K	
C837			C90-5327-08	CHIP-TAN 10UF 16WV	
C850			CE04CW1A101M	ELECTRO 100UF 10WV	
C851			CK73GB1E473K	CHIP C 0.047UF K	
C852			CE04CW1A101M	ELECTRO 100UF 10WV	
C853A,B			C90-2610-05	ELECTRO 2.2UF 50WV	
C854A,B			CK73GB1H222K	CHIP C 2200PF K	
C855A,B			CC73GCH1H101J	CHIP C 100PF J	
C856A,B			C90-2610-05	ELECTRO 2.2UF 50WV	
C857A,B			CK73GB1H222K	CHIP C 2200PF K	
C890,891			CC73FCH1H220J	CHIP C 22PF J	
CN800			E40-9608-08	22P CONNECTOR	
CN801			E40-9675-08	20P CONNECTOR	
CN850			E41-0109-08	18P CONNECTOR	
CN851			E40-3300-05	3P PIN ASSY	
CN852			E40-9614-08	3P PIN ASSY	
L820			L33-1116-08	CHOKE COIL 47uH	
B	2F	*	N09-4433-08	SCREW (3X8,S,BLK)	
JC800-803			R92-2053-05	CHIP R 0 J 1/8W	
R800,801			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R802			RK73GB1J223J	CHIP R 22K J 1/16W	
R820			RK73GB1J100J	CHIP R 10 J 1/16W	
R821			RK73GB1J223J	CHIP R 22K J 1/16W	
R822-824			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R850			RK73GB1J100J	CHIP R 10 J 1/16W	
R851,852			RK73GB1J103J	CHIP R 10K J 1/16W	
R853			RK73GB1J104J	CHIP R 100K J 1/16W	
R854A,B			RK73GB1J223J	CHIP R 22K J 1/16W	
R856A,B			RK73GB1J223J	CHIP R 22K J 1/16W	
R857A,B			RK73GB1J223J	CHIP R 22K J 1/16W	
R858A,B			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R859A,B			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R860A,B			RK73GB1J471J	CHIP R 470 J 1/16W	
R861A,B			RK73GB1J223J	CHIP R 22K J 1/16W	
R862A,B			RK73FB2A102J	CHIP R 1.0K J 1/10W	
R863A,B			RK73GB1J223J	CHIP R 22K J 1/16W	
R864A,B			RK73GB1J223J	CHIP R 22K J 1/16W	
R865A,B			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R866A,B			RK73GB1J471J	CHIP R 470 J 1/16W	
R867A,B			RK73GB1J223J	CHIP R 22K J 1/16W	
R868A,B			RK73FB2A102J	CHIP R 1.0K J 1/10W	
D800			MA4082(N)-L	ZENER DIODE	
D801			MA4091(N)-L	ZENER DIODE	
D802			UDZ5.6B	ZENER DIODE	
D850-852			1SS355	DIODE	

E : Europe K : North America M : Other Areas

K : DPX-4010 (K type)

W : Without Europe

M : DPX-4010 (M type)

H : DPX-4010/PH4

△ Indicates safety critical components.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

SUB PWB UNIT

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
D890A,B D891 D892A,B D893 IC820			NNCD6.2F NNCD6.2F NNCD6.2F NNCD6.2F M65849BFP	ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE IC	
IC850 IC851 Q800 Q801 Q802			BA3129F NJM4565MD 2SB1565(E,F) 2SC2412K 2SC4483(R,S,T)	IC (SWITCH) IC (OP AMP X2) TRANSISTOR TRANSISTOR TRANSISTOR	
Q803 Q804 Q850 Q851 Q852			2SB1565(E,F) 2SC2412K DTC124EK DTA124EK DTC124EK	TRANSISTOR TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR	
Q853A,B Q854A,B			DTC343TK DTC343TK	DIGITAL TRANSISTOR DIGITAL TRANSISTOR	
COMB. PWB UNIT (FRONT, CONTROL)					
D950-952 D954,955 D956 D957,958 D959			B30-1488-05 B30-1488-05 B30-1545-05 B30-1488-05 B30-1545-05	LED (YG) LED (YG) LED (UB) LED (YG) LED (UB)	
D990-992			B30-1488-05	LED (YG)	
C900-903 C904 C905 C906 C907			CK73FB1C475K CK73GB1H222K CK73FB1C475K CK73GB1H222K CK73FB1C475K	CHIP C 4.7UF K CHIP C 2200PF K CHIP C 4.7UF K CHIP C 2200PF K CHIP C 4.7UF K	
C950 C951,952 C980 C981 C982,983			CK73GB1H223K CK73FB1C475K CK73GB1E473K CK73FB1C474K CK73GB1C104K	CHIP C 0.022UF K CHIP C 4.7UF K CHIP C 0.047UF K CHIP C 0.47UF K CHIP C 0.10UF K	
C984,985			CK73FB1C475K	CHIP C 4.7UF K	
CN900 CN990 CN992 CN993 FPC1	3H		E40-9676-08 E40-9676-08 E40-9756-08 E40-9588-08 E39-0266-08	22P CONNECTOR 22P CONNECTOR 14P CONNECTOR 6P CONNECTOR FLEXIBLE PRINTED WIRING BOARD	
X900			L78-0592-08	CERAMIC RESONATOR 8.38MHz	
R900 R907 R908 R916,917 R918			RK73GB1J100J RK73GB1J100J RK73GB1J102J RK73GB1J104J RK73GB1J102J	CHIP R 10 J 1/16W CHIP R 10 J 1/16W CHIP R 1.0K J 1/16W CHIP R 100K J 1/16W CHIP R 1.0K J 1/16W	
R919 R928 R929-931 R932,933 R934			RK73GB1J224J RK73GB1J473J RK73GB1J101J RK73GB1J104J RK73GB1J473J	CHIP R 220K J 1/16W CHIP R 47K J 1/16W CHIP R 100 J 1/16W CHIP R 100K J 1/16W CHIP R 47K J 1/16W	
R950-961			RK73EB2B122J	CHIP R 1.2K J 1/8W	
R962,963 R968 R969 R970,971 R972			RK73EB2B152J RK73GB1J101J RK73GB1J102J RK73GB1J101J RK73GB1J100J	CHIP R 1.5K J 1/8W CHIP R 100 J 1/16W CHIP R 1.0K J 1/16W CHIP R 100 J 1/16W CHIP R 10 J 1/16W	
R980 R981 R982 R983 R984			RK73GB1J100J RK73GB1J822J RK73GB1J124J RK73GB1J102J RK73GB1J104J	CHIP R 10 J 1/16W CHIP R 8.2K J 1/16W CHIP R 120K J 1/16W CHIP R 1.0K J 1/16W CHIP R 100K J 1/16W	
R985 R986,987 R990,991 R992,993 RN900,901			RK73GB1J124J RK73GB1J104J RK73EB2B122J RK73EB2B152J R90-0724-05	CHIP R 120K J 1/16W CHIP R 100K J 1/16W CHIP R 1.2K J 1/8W CHIP R 1.5K J 1/8W MULTI-COMP 1K X4	
RN902 RN903			RK73FB2A473J R90-0724-05	CHIP R 47K J 1/10W MULTI-COMP 1K X4	
S900 S950,951 S952,953 S954 S955		*	S70-0856-08 S70-0879-08 S70-0854-08 S70-0879-08 S70-0856-08	TACT SW (SKQRAA) TACT SW (SKQDAB) TACT SW (WITH LED) TACT SW (SKQDAB) TACT SW (SKQRAA)	
S956-961 S962,963 S964 S965-967 S968		*	S70-0854-08 S70-0879-08 S70-0854-08 S70-0879-08 S70-0854-08	TACT SW (WITH LED) TACT SW (SKQDAB) TACT SW (WITH LED) TACT SW (SKQDAB) TACT SW (WITH LED)	
S969 S990		*	S70-0879-08 S70-0854-08	TACT SW (SKQDAB) TACT SW (WITH LED)	
D900-902 D903 D904-908 D953 D960			1SS355 NNCD6.2F 1SS355 B30-1488-05 NNCD6.2F	DIODE ZENER DIODE DIODE LED (YG) ZENER DIODE	
D993 IC900 IC901 IC980 VFD900		*	B30-1541-08 MN101C10AAK RS-21 M61506FP CN1952M	LED (YG) IC IC (RIMOCON SENSOR) IC FLUORESCENT INDICATOR TUBE	
PROCESSOR UNIT (X32-4820-01)					
C1,2 C3 C4 C5 C6			CK73FB1A105K C92-1359-05 C92-0566-05 CC73GCH1H150J CC73GCH1H020C	CHIP C 1.0UF K CHIP-TAN 10UF 16WV CHIP-TAN 10UF 6.3WV CHIP C 15PF J CHIP C 2.0PF C	
C7 C8 C9 C10 C11			CK73GB1C104K CK73FB1A105K CC73GCH1H101J CK73GB1H472K CK73GB1H682K	CHIP C 0.10UF K CHIP C 1.0UF K CHIP C 100PF J CHIP C 4700PF K CHIP C 6800PF K	
C12 C13 C14 C15			CK73GB1H222K CK73GB1C273K CK73GB1H472K CK73GB1C473K	CHIP C 2200PF K CHIP C 0.027UF K CHIP C 4700PF K CHIP C 0.047UF K	

E : Europe K : North America M : Other Areas

K : DPX-4010 (K type)

W : Without Europe

M : DPX-4010 (M type)

H : DPX-4010/PH4

△ Indicates safety critical components.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

PROCESSOR UNIT (X32-4820-01)

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation	Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
C16			CC73GCH1H820J	CHIP C 82PF J		R34			RK73FB2A683J	CHIP R 68K J 1/10W	
C17			CK73GB1H472K	CHIP C 4700PF K		R35			RK73FB2A104J	CHIP R 100K J 1/10W	
C18			CK73GB1H331K	CHIP C 330PF K		R36			RK73FB2A151J	CHIP R 150 J 1/10W	
C19,20			CK73GB1C104K	CHIP C 0.10UF K		R37			RK73FB2A471J	CHIP R 470 J 1/10W	
C21			C92-1359-05	CHIP-TAN 10UF 16WV		R38			RK73FB2A224J	CHIP R 220K J 1/10W	
C22			CK73GB1C104K	CHIP C 0.10UF K		R44			RK73FB2A512J	CHIP R 5.1K J 1/10W	
C23			CK73GB1H102K	CHIP C 1000PF K		R45			RK73FB2A103J	CHIP R 10K J 1/10W	
C24			CK73GB1E223K	CHIP C 0.022UF K		R46			RK73FB2A102J	CHIP R 1.0K J 1/10W	
C25			CK73GB1E123K	CHIP C 0.012UF K		R47			RK73FB2A103J	CHIP R 10K J 1/10W	
C26			CK73FB1A105K	CHIP C 1.0UF K		R49			RK73FB2A472J	CHIP R 4.7K J 1/10W	
C28			CK73FB1A105K	CHIP C 1.0UF K		R50			RK73FB2A102J	CHIP R 1.0K J 1/10W	
C29			CK73GB1C104K	CHIP C 0.10UF K		R52			RK73FB2A104J	CHIP R 100K J 1/10W	
C31,32			CK73GB1H103K	CHIP C 0.010UF K		R54			RK73FB2A104J	CHIP R 100K J 1/10W	
C33			CK73GB1C104K	CHIP C 0.10UF K		R71			RK73FB2A103J	CHIP R 10K J 1/10W	
C34			CK73EB1A335K	CHIP C 3.3UF K		R72			RK73FB2A102J	CHIP R 1.0K J 1/10W	
C35			CK73GB1C104K	CHIP C 0.10UF K		R73			RK73FB2A473J	CHIP R 47K J 1/10W	
C41			CK73EB1C225K	CHIP C 2.2UF K		R74			RK73FB2A103J	CHIP R 10K J 1/10W	
C43			CK73GB1E123K	CHIP C 0.012UF K		R75			RK73FB2A333J	CHIP R 33K J 1/10W	
C44			CK73GB1C104K	CHIP C 0.10UF K		R76			RK73FB2A622J	CHIP R 6.2K J 1/10W	
C45			CK73GB1E123K	CHIP C 0.012UF K		R77			RK73FB2A563J	CHIP R 56K J 1/10W	
C46			CK73GB1C473K	CHIP C 0.047UF K		R78			RK73FB2A243J	CHIP R 24K J 1/10W	
C51			CK73EB1A335K	CHIP C 3.3UF K		R79			RK73FB2A912J	CHIP R 9.1K J 1/10W	
C55			CK73GB1C104K	CHIP C 0.10UF K		R80			RK73FB2A202J	CHIP R 2.0K J 1/10W	
C63			C92-1359-05	CHIP-TAN 10UF 16WV		R81			RK73FB2A333J	CHIP R 33K J 1/10W	
C67,68			CK73FB1A105K	CHIP C 1.0UF K		R82			RK73FB2A103J	CHIP R 10K J 1/10W	
C71,72			CK73GB1H471K	CHIP C 470PF K		R83			RK73FB2A102J	CHIP R 1.0K J 1/10W	
C77,78			CC73GCH1H680J	CHIP C 68PF J		R101,102			RK73FB2A332J	CHIP R 3.3K J 1/10W	
C79,80			C93-1044-05	CERAMIC 2200PF K		R103,104			RK73FB2A562J	CHIP R 5.6K J 1/10W	
C85			CK73GB1C104K	CHIP C 0.10UF K		R107,108			RK73FB2A331J	CHIP R 330 J 1/10W	
C88			CK73GB1C104K	CHIP C 0.10UF K		R117,118			RK73FB2A203J	CHIP R 20K J 1/10W	
CN1			E40-9536-05	FLAT CABLE CONNECTOR		R121,122			RK73FB2A203J	CHIP R 20K J 1/10W	
CN2			E40-9339-05	FLAT CABLE CONNECTOR		R125,126			RK73FB2A203J	CHIP R 20K J 1/10W	
L1			L40-1001-78	SMALL FIXED INDUCTOR (10UH)		R202			RK73FB2A102J	CHIP R 1.0K J 1/10W	
L2			L92-0308-05	FERRITE CORE		R214			RK73FB2A104J	CHIP R 100K J 1/10W	
X1			L78-0572-05	RESONATOR (16.93MHZ)		R218			RK73FB2A473J	CHIP R 47K J 1/10W	
CP1-3			R90-1019-05	MULTI-COMP 100 X2		R221-224			RK73FB2A912J	CHIP R 9.1K J 1/10W	
R1,2			RK73FB2A333J	CHIP R 33K J 1/10W		R225,226			RK73FB2A433J	CHIP R 43K J 1/10W	
R3			RK73FB2A683J	CHIP R 68K J 1/10W		R227			RK73FB2A102J	CHIP R 1.0K J 1/10W	
R5			RK73FB2A910J	CHIP R 91 J 1/10W		R228			RK73FB2A512J	CHIP R 5.1K J 1/10W	
R6			RK73FB2A683J	CHIP R 68K J 1/10W		R229			RK73FB2A102J	CHIP R 1.0K J 1/10W	
R8			RK73EB2B4R7J	CHIP R 4.7 J 1/8W		R230			RK73FB2A512J	CHIP R 5.1K J 1/10W	
R9			RK73EB2B100J	CHIP R 10 J 1/8W		R231			RK73FB2A432J	CHIP R 4.3K J 1/10W	
R10,11			RK73FB2A822J	CHIP R 8.2K J 1/10W		R232			RK73FB2A133J	CHIP R 13K J 1/10W	
R12			RK73FB2A472J	CHIP R 4.7K J 1/10W		W7-9			R92-2052-05	CHIP R 0 J 1/10W	
R13			RK73FB2A683J	CHIP R 68K J 1/10W		W10			R92-2053-05	CHIP R 0 J 1/8W	
R14,15			RK73FB2A824J	CHIP R 820K J 1/10W		W15,16			R92-2052-05	CHIP R 0 J 1/10W	
R16			RK73FB2A223J	CHIP R 22K J 1/10W		S1,2			S68-0838-05	PUSH SWITCH	
R17			RK73FB2A133J	CHIP R 13K J 1/10W		S3			S68-0823-05	PUSH SWITCH	
R18			RK73FB2A392J	CHIP R 3.9K J 1/10W		D1,2			DAN202U	DIODE	
R19			RK73FB2A432J	CHIP R 4.3K J 1/10W		D3			DA204K	DIODE	
R20			RK73FB2A104J	CHIP R 100K J 1/10W		D4			DAN202U	DIODE	
R21			RK73FB2A224J	CHIP R 220K J 1/10W		IC1			AN8806SB	ANALOGUE IC	
R22,23			RK73FB2A333J	CHIP R 33K J 1/10W		IC2			MN662774KE0	MOS-IC	
R32			RK73FB2A104J	CHIP R 100K J 1/10W							

E : Europe K : North America M : Other Areas

W : Without Europe

K : DPX-4010 (K type)

M : DPX-4010 (M type)

H : DPX-4010/PH4

△ Indicates safety critical components.

DPX-4010,4010/PH4

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

PROCESSOR UNIT (X32-4820-01)

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
IC4			BA5917AFP	ANALOGUE IC	
IC5			TA78L05F	IC (VOLTAGE REGULATOR/ +5V)	
IC6			NJM4565MD	IC (OP AMP X2)	
IC10			BU4551BFV	ANALOGUE IC	
Q1			2SB1188	TRANSISTOR	
Q2			DTC124EUA	DIGITAL TRANSISTOR	
Q3,4			2SA1362(Y)	TRANSISTOR	
Q5			DTC124EUA	DIGITAL TRANSISTOR	
Q9-12			DTC114YUA	DIGITAL TRANSISTOR	
CD MECHANISM ASSY (X92-3900-01)					
401	2C		A10-4482-01	CHASSIS	
402	1D		A10-4225-33	CHASSIS CALKING ASSY	
403	2D		A11-0915-43	SUB CHASSIS CALKING ASSY	
405	2C		D10-3082-13	ARM	
405A	2C		D10-4038-23	ARM ASSY	
406	2C		D10-4306-14	ARM ASSY	
407	2C		D10-4305-14	ARM ASSY	
408	3C		D10-3087-44	ARM ASSY	
409	3D		D10-3092-03	SLIDER	
410	3D		D10-3093-04	SLIDER ASSY	
411	2D		D10-3095-04	SLIDER ASSY	
412	2D		D10-3096-04	SLIDER ASSY	
413	1C		D10-3099-24	SLIDER ASSY	
414	1C		D10-3100-04	SLIDER ASSY	
415	2C		D10-4123-24	LEVER ASSY	
416	1D		D10-4004-04	LEVER ASSY	
417	1D		D10-4006-04	LEVER	
418	1C		D10-4007-04	LEVER	
419	2D		D10-4008-14	LEVER	
420	2C		D10-4009-23	ARM	
421	3C		D10-4010-04	LEVER	
422	3C		D10-4307-04	LEVER ASSY	
424	3D		D10-4050-04	ARM	
427	3D		D13-1442-03	RACK (GEAR)	
429	3D		D13-1231-04	GEAR	
430	3C		D13-1240-04	GEAR	
431	3D		D13-1233-04	GEAR	
432	3D		D13-1234-14	GEAR ASSY	
433	3C		D13-1441-03	GEAR	
434	3D		D13-1232-04	GEAR	
435	3D		D13-1241-04	GEAR	
436	3D		D13-1242-04	GEAR	
437	1D		D13-1243-04	GEAR	
438	1D		D13-1244-04	GEAR	
439	1D		D13-1245-14	GEAR	
440	2C		D13-1246-04	GEAR	
441	2D		D13-1247-04	GEAR	
443	2D		D13-1249-04	GEAR ASSY	
444	2D		D13-2090-04	GEAR ASSY	
445	1D		D14-0668-04	ROLLER	
446	1C		D14-0670-04	ROLLER	
447	3D		D14-0674-04	ROLLER	
449	3C		D21-2228-14	SHAFT	
450	1C		D21-2229-04	SHAFT	

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
451	1C		D23-0925-24	RETAINER	
452	2C		D32-0614-04	STOPPER	
453	1D		D39-0223-05	DAMPER	
454	2D		D39-0224-05	DAMPER	
455	3D		F09-1246-04	SHEET	
458	3D		F09-1266-14	SHEET	
460	2C		G01-2770-04	EXTENSION SPRING	
461	3C		G01-2771-04	EXTENSION SPRING	
462	3C		G01-2772-24	EXTENSION SPRING	
463	3C		G01-2773-14	EXTENSION SPRING	
464	3C		G01-2774-34	EXTENSION SPRING	
465	1D		G01-2775-04	TORSION COIL SPRING	
466	1D		G01-2776-14	TORSION COIL SPRING	
467	3D		G01-2777-24	TORSION COIL SPRING	
469	2C		G01-2844-04	EXTENSION SPRING	
470	2C		G02-1231-04	FLAT SPRING	
471	2D		G02-1232-24	FLAT SPRING	
472	2C		G02-1241-24	FLAT SPRING	
475	2C		J11-0613-13	CLAMPER	
476	3C		J19-4678-13	HOLDER	
477	2D		J19-4679-24	HOLDER	
478	3D		J21-7684-13	MOUNTING HARDWARE	
479	2C		J21-7686-13	MOUNTING HARDWARE	
480	1D		J21-7690-03	MOUNTING HARDWARE	
482	3C		J84-0107-05	FLEXIBLE PRINTED WIRING BOARD	
483	1C		J90-0757-22	GUIDE	
A	2C		N09-4249-05	MACHINE SCREW (M1.7X2.5,LOCK)	
B	1D		N09-4172-05	TAPPING SCREW (2X3.5,C)	
C	2D		N09-4202-05	STEPPED SCREW	
D	2C		N38-2020-46	PAN HEAD MACHIN SCREW	
E	3C		N09-4294-05	TAPTITE SCREW (BIND P TAPTIT)	
F	3D		N19-2023-04	FLAT WASHER	
G	2C		N19-2058-04	FLAT WASHER	
H	3C		N19-2093-04	FLAT WASHER	
J	2C		N39-2020-46	PAN HEAD MACHIN SCREW	
DM1	3D		T42-1026-04	DC MOTOR ASSY (SP)	
DM2	3D		T42-1028-04	DC MOTOR ASSY (SLD)	
DPU1	2D		T25-0215-05	OPTICAL PICKUP HEAD	
CASSETTE MECHANISM ASSY (D40-1155-08)					
1	2B		A10-4630-08	CHASSIS ASSY	
4	3B		D10-4375-08	SLIDER (MAIN PLATE)	
5	3A		D13-1494-08	GEAR (B)	
6	3A		D13-1495-08	GEAR (C)	
7	3A		D13-1496-08	GEAR (D)	
9	1B		D10-4376-08	ARM(P-G PLATE)	
10	2B		J90-0948-08	GUID	
11	2B		D15-0919-08	PULLEY (MID)	
12	2B		D13-1497-08	GEAR (P)	
15	2B		J21-9458-08	MOUNTING HARDWARE (HEAD P-AS)	
17	2B		G02-1332-08	FLAT SPRING (HEAD SP-P)	
20	2A		D13-1498-08	RACK GEAR (OP PLATE A)	
21	1A		D10-4377-08	LEVER (EJ-LEV-A)	
22	3B		D10-4378-08	LEVER (SB.PL-AS)	

E : Europe K : North America M : Other Areas
W : Without Europe

K : DPX-4010 (K type)
M : DPX-4010 (M type)
H : DPX-4010/PH4

△ Indicates safety critical components.

Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	Add	New	Parts No.	Description	Destination

⚠ Indicates safety critical components.