


EXPLODED VIEW/PARTS LIST

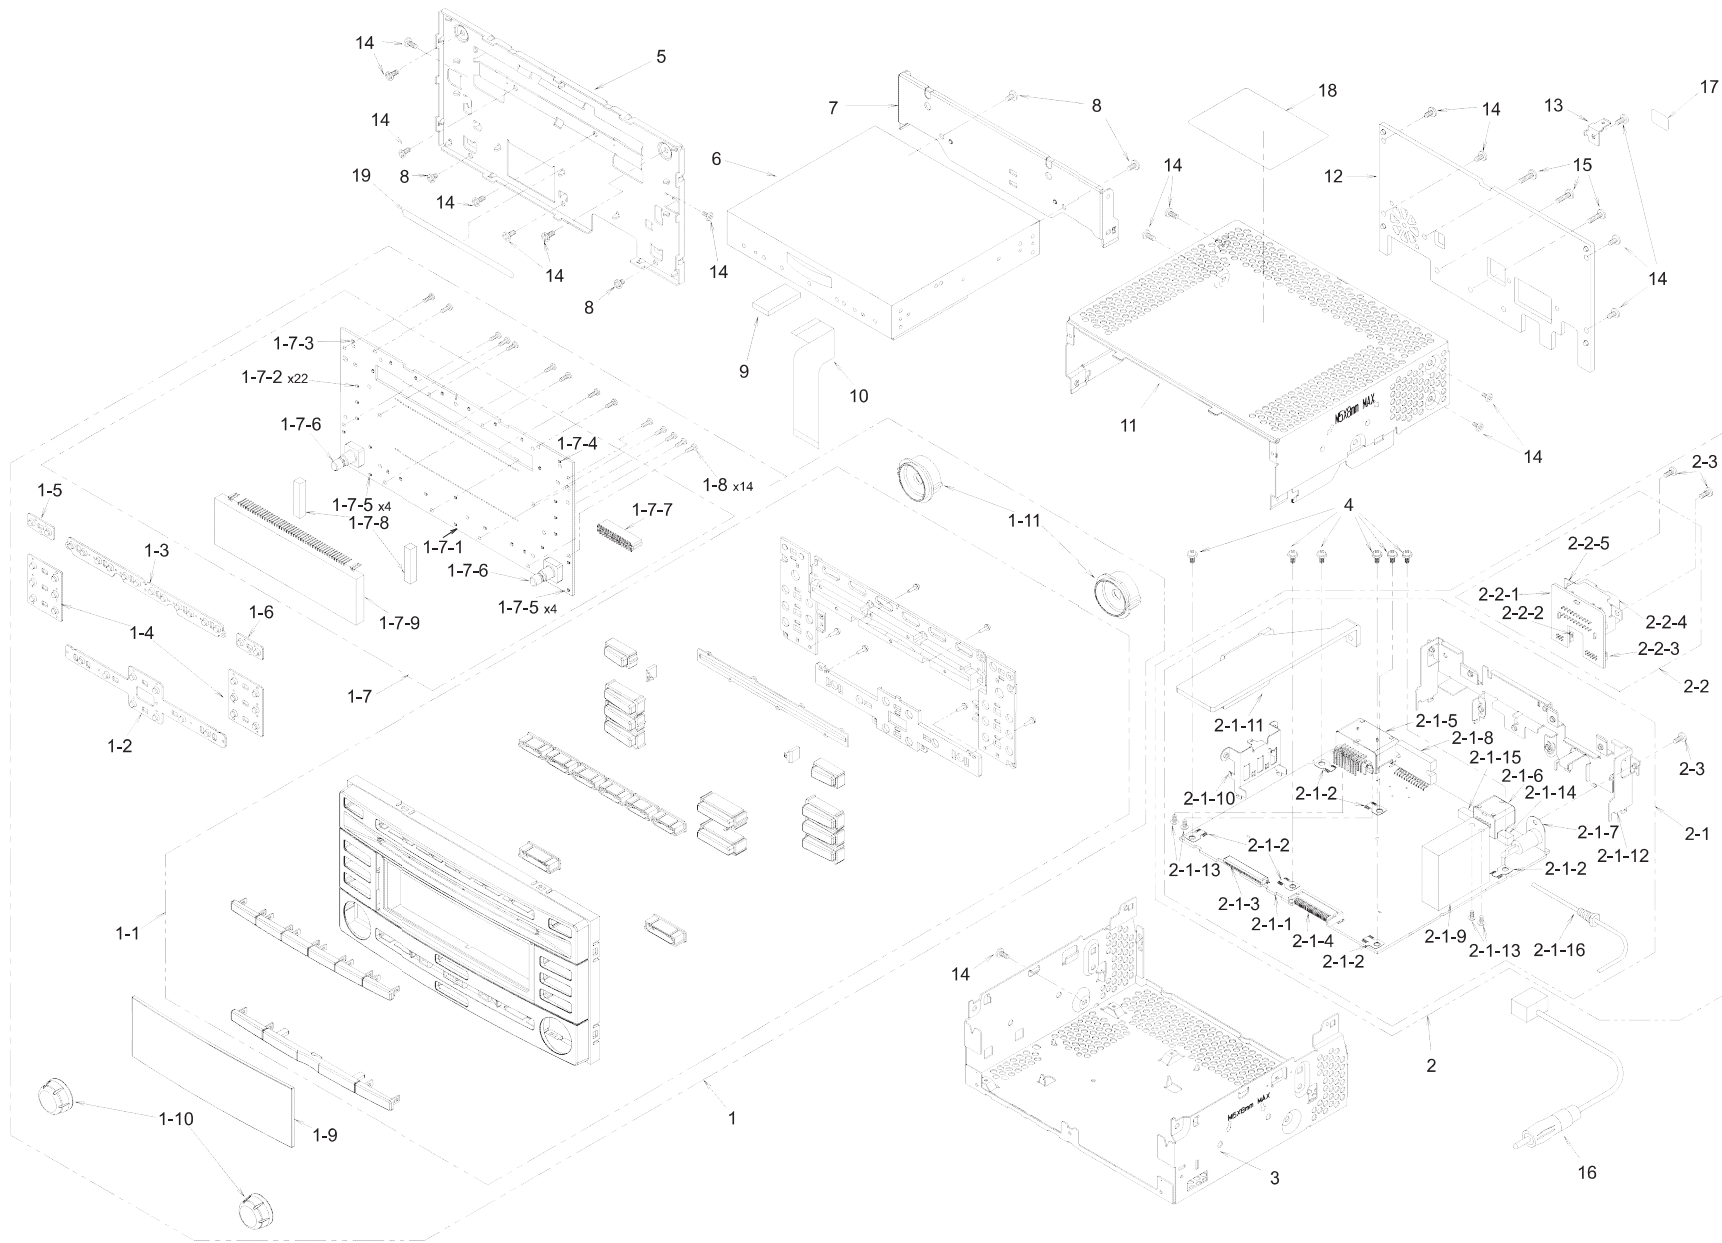

NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	PANEL-ASSY(3381A0-45)	1
1-1	940-8611-12	ES-ASSY	1
1-2	345-6070-00	RUBBER SWITCH A	1
1-3	345-6071-00	RUBBER SWITCH B	1
1-4	345-6072-00	RUBBER SWITCH C	2
1-5	345-6073-00	RUBBER SWITCH D	1
1-6	-	N/A(RUBBER SWITCH D)	-
1-7	-----	SW-PWB-ASSY(3381A7-77)	1
1-7-1	-----	SW PWB(382000-039)	1
1-7-2	001-7094-91	DIODE(VFR1112H-TR)	22
1-7-3	001-7094-91	DIODE(VFR1112H-TR)	1
1-7-4	-	N/A(DIODE)	-
1-7-5	001-7094-92	DIODE(VFR1112H-6A83A2)	8
1-7-6	016-0018-21	VR W/SHAFT	2
1-7-7	074-3014-78	OUTLET SOCKET	1
1-7-8	345-5995-20	SPACER	2
1-7-9	379-4062-24	INDICATOR	1
1-8	716-0778-52	P-TIGHT SCREW(M2x8)	14
1-9	373-1222-10	DIAL-CVR	1
1-10	380-5700-40	KNOB	2
1-11	335-8078-00	ILLUMI RING	2
2	-----	MAIN-PWB-ASSY(3381B7-75)	1
2-1	-----	MAIN-PWB-ASSY	1
2-1-1	-----	MAIN PWB(378602-039)	1
2-1-2	073-0762-90	TERMINAL	6
2-1-3	074-2506-29	OUTLET SOCKET(29P)	1
2-1-4	076-3011-78	PLUG(28P)	1
2-1-5	074-4009-20	OUTLET SOCKET	1
2-1-6	074-1302-08	OUTLET SOCKET	1
2-1-7	092-0702-50	ANT-RECEPT	1
2-1-8	051-2040-00	IC(TA8276HQ)	1
2-1-9	.880-2091E	TUNER	1

NO.	PART NO.	DESCRIPTION	Q'TY
2-1-10	331-4414-00	TR HOLDER	1
2-1-11	313-2019-00	SUB HEAT SINK	1
2-1-12	307-0727-00	REAR PLATE	1
2-1-13	778-3006-00	TAP-SCREW	4
2-1-14	076-0368-10	PLUG(10P)	1
2-1-15	076-0368-06	PLUG(6P)	1
2-1-16	854-7862-50	EXTENSION LEAD	1
2-2	-----	SUB-PWB-ASSY(3381A7-79)	1
2-2-1	-----	SUB PWB(382200-039)	1
2-2-2	074-0898-06	OUTLET SOCKET(6P)	1
2-2-3	074-0898-10	OUTLET SOCKET(10P)	1
2-2-4	074-4027-20	OUTLET SOCKET(20P)	1
2-2-5	331-4413-00	PWB HOLDER	1
2-3	714-2606-8B	MACHINE SCREW(M2.6x6)	3
3	311-1944-01	LOWER CASE	1
4	716-0878-50	IT SCREW(M2.6x5)	6
5	309-0845-01	ES PLATE(1CD)	1
6	929-5038-80	CD-MECH-MODULE	1
7	331-4123-00	CD BRKT	1
8	714-2603-89	MACHINE SCREW	4
9	345-5895-00	CUSHION RUBBER	1
10	816-4025-50	FLAT WIRE	1
11	310-1826-51	UPPER CASE	1
12	313-2018-00	HEAT SINK	1
13	331-3579-20	EARTH PLATE	1
14	714-2606-8B	MACHINE SCREW(M2.6x6)	17
15	714-2610-89	MACHINE SCREW(M2.6x10)	3
16	093-2195-00	ANT-JUMPER	1
17	290-0548-42	LABEL	1
18	276-0903-20	SETPLATE	1
19	347-8295-01	PROTECTOR	1

ELECTRICAL PARTS LIST

MAIN PWB(B1) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT101	092-0702-50	ANT-RECEPT	C317	178-1052-78	25V 1uF	C410	-----	(N/A)
C101	166-8201-50	82pF CH	C318	166-2201-50	22pF CH	C411	-----	(N/A)
C102	166-2201-50	22pF CH	C319	166-2201-50	22pF CH	C412	-----	(N/A)
C103	-----	(N/A)	C320	178-1052-78	25V 1uF	C413	-----	(N/A)
C104	168-1042-78	16V 0.1uF K	C321	168-1042-78	16V 0.1uF K	C414	-----	(N/A)
C105	165-1073-35	16V 100uF	C322	168-1042-78	16V 0.1uF K	C415	-----	(N/A)
C106	168-1022-55	1000pF K	C323	168-1042-78	16V 0.1uF K	C416	-----	(N/A)
C107	-----	(N/A)	C324	166-1007-50	10pF CH	C417	-----	(N/A)
C108	168-1022-55	1000pF K	C325	166-1007-50	10pF CH	C418	-----	(N/A)
C109	168-1022-55	1000pF K	C326	-----	(N/A)	C419	-----	(N/A)
C110	168-1042-78	16V 0.1uF K	C327	168-5622-55	5600pF K	C420	-----	(N/A)
C111	165-1073-35	16V 100uF	C328	168-5622-55	5600pF K	C421	-----	(N/A)
C112	-----	(N/A)	C329	168-1042-78	16V 0.1uF K	C422	-----	(N/A)
C113	-----	(N/A)	C330	168-1042-78	16V 0.1uF K	C423	-----	(N/A)
C114	-----	(N/A)	C331	188-4753-68	50V 4.7uF	C424	-----	(N/A)
C115	-----	(N/A)	C332	-----	(N/A)	C425	-----	(N/A)
C117	168-1042-78	16V 0.1uF K	C333	-----	(N/A)	C426	-----	(N/A)
C118	178-3342-78	0.33uF	C334	168-1022-55	1000pF K	C427	-----	(N/A)
C119	-----	(N/A)	C335	168-1022-55	1000pF K	C428	-----	(N/A)
C120	-----	(N/A)	C336	168-1042-78	16V 0.1uF K	C429	-----	(N/A)
C121	-----	(N/A)	C337	188-4753-68	50V 4.7uF	C430	-----	(N/A)
C122	-----	(N/A)	C338	168-1042-78	16V 0.1uF K	C431	-----	(N/A)
C123	-----	(N/A)	C339	188-4753-68	50V 4.7uF	C432	-----	(N/A)
C124	-----	(N/A)	C340	168-1042-78	16V 0.1uF K	C433	-----	(N/A)
C201	165-4763-15	6.3V 47uF	C341	168-1042-78	16V 0.1uF K	C434	-----	(N/A)
C202	168-1032-55	0.01uF K	C342	168-1042-78	16V 0.1uF K	C435	-----	(N/A)
C203	-----	(N/A)	C343	-----	(N/A)	C436	-----	(N/A)
C204	-----	(N/A)	C344	168-1042-78	16V 0.1uF K	C437	-----	(N/A)
C205	166-1007-50	10pF CH	C345	178-1052-78	25V 1uF	C438	-----	(N/A)
C206	166-1007-50	10pF CH	C346	168-1042-78	16V 0.1uF K	C439	-----	(N/A)
C207	166-1007-50	10pF CH	C347	168-1042-78	16V 0.1uF K	C440	-----	(N/A)
C208	166-1007-50	10pF CH	C348	189-2273-19	6.3V 220uF	C441	-----	(N/A)
C209	168-1042-78	16V 0.1uF K	C349	-----	(N/A)	C442	-----	(N/A)
C210	168-1042-78	16V 0.1uF K	C350	188-2263-38	16V 22uF	C443	-----	(N/A)
C211	166-1007-50	10pF CH	C351	-----	(N/A)	C444	-----	(N/A)
C212	166-1007-50	10pF CH	C352	-----	(N/A)	C445	-----	(N/A)
C213	166-1007-50	10pF CH	C353	168-1042-78	16V 0.1uF K	C446	-----	(N/A)
C214	166-1007-50	10pF CH	C354	042-0423-94	10V 4.7uF	C447	-----	(N/A)
C215	166-1007-50	10pF CH	C355	168-1042-78	16V 0.1uF K	C448	-----	(N/A)
C216	165-4763-15	6.3V 47uF	C356	165-4763-15	6.3V 47uF	C449	-----	(N/A)
C217	168-1042-78	16V 0.1uF K	C357	168-1042-78	16V 0.1uF K	C450	-----	(N/A)
C218	168-1042-78	16V 0.1uF K	C358	168-1042-78	16V 0.1uF K	C451	-----	(N/A)
C219	165-4763-15	6.3V 47uF	C359	168-1042-78	16V 0.1uF K	C501	189-1073-39	16V 100uF
C220	168-1042-78	16V 0.1uF K	C360	168-1042-78	16V 0.1uF K	C502	168-1042-78	16V 0.1uF K
C221	168-1042-78	16V 0.1uF K	C362	-----	(N/A)	C503	178-2732-78	0.027uF
C222	168-1042-78	16V 0.1uF K	C363	168-1022-55	1000pF K	C504	178-2732-78	0.027uF
C223	189-1073-29	10V 100uF	C364	168-1022-55	1000pF K	C505	178-2732-78	0.027uF
C224	-----	(N/A)	C365	-----	(N/A)	C506	178-2732-78	0.027uF
C225	178-3342-78	0.33uF	C366	168-1022-55	1000pF K	C507	166-5611-50	560pF CH
C226	-----	(N/A)	C367	168-1042-78	16V 0.1uF K	C508	166-5611-50	560pF CH
C227	-----	(N/A)	C368	168-1022-55	1000pF K	C509	166-2711-50	270pF CH
C228	-----	(N/A)	C369	168-1022-55	1000pF K	C510	166-2711-50	270pF CH
C229	-----	(N/A)	C370	168-1022-55	1000pF K	C511	166-2201-50	22pF CH
C230	189-2273-29	10V 220uF	C372	-----	(N/A)	C512	166-2201-50	22pF CH
C231	168-1042-78	16V 0.1uF K	C373	166-6811-50	680pF CH	C513	166-2201-50	22pF CH
C232	-----	(N/A)	C374	166-6811-50	680pF CH	C514	166-2201-50	22pF CH
C233	168-1042-38	50V 0.1uF K	C375	166-6811-50	680pF CH	C515	166-5611-50	560pF CH
C234	168-1042-78	16V 0.1uF K	C376	166-6811-50	680pF CH	C516	166-5611-50	560pF CH
C238	189-4763-48	25V 47uF	C377	-----	(N/A)	C517	166-2711-50	270pF CH
C301	178-2255-79	2.2uF	C378	042-0643-58	6.3V 330uF	C518	166-2711-50	270pF CH
C302	166-2201-50	22pF CH	C379	168-1042-78	16V 0.1uF K	C519	166-1011-50	100pF CH
C303	166-2201-50	22pF CH	C380	165-2263-35	16V 22uF	C520	166-1011-50	100pF CH
C304	178-2255-79	2.2uF	C381	189-1073-29	10V 100uF	C521	166-2201-50	22pF CH
C305	178-2255-79	2.2uF	C382	168-1042-78	16V 0.1uF K	C522	166-2201-50	22pF CH
C306	166-2201-50	22pF CH	C383	168-1022-55	1000pF K	C523	166-2201-50	22pF CH
C307	166-2201-50	22pF CH	C384	178-3342-78	0.33uF	C524	166-2201-50	22pF CH
C308	178-2255-79	2.2uF	C401	188-4763-18	6.3V 47uF	C525	166-1011-50	100pF CH
C309	178-2255-79	2.2uF	C402	168-1042-78	16V 0.1uF K	C526	166-1011-50	100pF CH
C310	166-2201-50	22pF CH	C403	168-1022-55	1000pF K	C527	043-0311-92	10V 0.22uF B
C311	166-2201-50	22pF CH	C404	168-1042-38	50V 0.1uF K	C528	043-0311-92	10V 0.22uF B
C312	178-2255-79	2.2uF	C405	-----	(N/A)	C529	043-0311-92	10V 0.22uF B
C313	178-2255-79	2.2uF	C406	-----	(N/A)	C530	043-0311-92	10V 0.22uF B
C314	166-2201-50	22pF CH	C407	-----	(N/A)	C531	168-1032-55	0.01uF K
C315	166-2201-50	22pF CH	C408	-----	(N/A)	C532	188-1053-68	50V 1uF
C316	178-2255-79	2.2uF	C409	-----	(N/A)	C533	165-1063-35	16V 10uF

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C534	188-1053-68	50V 1uF	C834	168-1042-38	50V 0.1uF K	IC402	-----	(N/A)
C535	-----	(N/A)	C835	168-1042-38	50V 0.1uF K	IC403	-----	(N/A)
C536	-----	(N/A)	C836	168-2232-55	0.022uF K	IC404	-----	(N/A)
C537	-----	(N/A)	C837	168-2232-55	0.022uF K	IC405	-----	(N/A)
C538	-----	(N/A)	C838	189-2273-39	16V 220uF	IC406	-----	(N/A)
C539	-----	(N/A)	C839	168-1042-78	16V 0.1uF K	IC501	051-3019-90	NJM2060V
C540	-----	(N/A)	C840	042-1334-75	16V 47uF	IC502	051-3019-90	NJM2060V
C541	-----	(N/A)	C841	188-1063-38	16V 10uF	IC503	051-2040-00	TA8276H
C542	-----	(N/A)	C842	189-2273-39	16V 220uF	IC504	-----	(N/A)
C543	166-2201-50	22pF CH	C843	189-4763-48	25V 47uF	IC507	051-3034-90	NJM4558V
C550	-----	(N/A)	C844	-----	(N/A)	IC508	051-3397-90	NJM2386ADL3-09-TE1
C551	-----	(N/A)	C845	168-1042-78	16V 0.1uF K			
C552	-----	(N/A)	C846	168-1042-78	16V 0.1uF K	IC601	052-3214-51	M30873MHB-753GP (MASK)
C553	-----	(N/A)	C847	166-1007-50	10pF CH			
C554	-----	(N/A)	C848	166-1007-50	10pF CH	IC602	-----	S-24C16CI-T8T5U3 (E2P-ROM)
C555	-----	(N/A)	C849	168-1022-55	1000pF K			(Software should be written on production)
C556	-----	(N/A)	C850	168-1022-55	1000pF K			(942650-051)
C558	168-1042-78	16V 0.1uF K	C851	-----	(N/A)	IC603	051-6600-58	HA12187FP
C559	189-1073-39	16V 100uF	CCT201	050-0140-54	1/32W 1k ohm x4J	IC604	051-0869-58	NJM2103M
C560	189-1073-29	10V 100uF	CCT301	050-0140-53	1/32W 0 ohm x4J	IC802	051-0172-08	TC4011BF
C561	165-1073-35	16V 100uF	CCT302	050-0140-53	1/32W 0 ohm x4J	J201	074-2506-29	29P
C562	168-1042-78	16V 0.1uF K	CCT601	050-0140-54	1/32W 1k ohm x4J	J202	-----	(N/A)
C563	-----	(N/A)	CCT602	050-0140-54	1/32W 1k ohm x4J	J801	074-4009-20	20P
C564	188-1053-68	50V 1uF	CCT603	050-0140-54	1/32W 1k ohm x4J	J802	074-1302-08	8P
C601	168-1032-55	0.01uF K	CCT604	050-0140-54	1/32W 1k ohm x4J	L101	010-2003-04	30uH
C602	168-1042-78	16V 0.1uF K	D101	-----	(N/A)	L104	-----	(N/A)
C603	189-1073-39	16V 100uF	D102	-----	(N/A)	L105	-----	(N/A)
C604	168-1032-55	0.01uF K	D103	-----	(N/A)	L114	010-6009-76	22uH J
C605	168-1032-55	0.01uF K	D106	001-0516-90	MA111	L201	010-3407-66	22uH J
C606	166-8097-50	8pF +/-0.5pF CH	D501	001-0516-90	MA111	L202	010-3104-50	30 ohm/100MHz
C607	166-8097-50	8pF +/-0.5pF CH	D504	-----	(N/A)	L301	010-3104-54	600 ohm/100MHz
C608	042-0559-00	5.5V 0.1F	D601	001-0516-90	MA111	L302	010-3104-54	600 ohm/100MHz
C609	189-1073-39	16V 100uF	D602	001-2403-90	M1F60	L303	010-3104-54	600 ohm/100MHz
C610	168-1042-78	16V 0.1uF K	D603	001-0504-36	HZS7 A1L	L304	010-3104-54	600 ohm/100MHz
C611	188-1063-38	16V 10uF	D604	001-4301-25	HZU4.7B1	L305	010-3104-54	600 ohm/100MHz
C612	168-1042-78	16V 0.1uF K	D701	001-4301-32	HZU 5.6B2	L306	010-3104-54	600 ohm/100MHz
C613	168-1032-55	0.01uF K	D702	001-4301-32	HZU 5.6B2	L307	010-3104-54	600 ohm/100MHz
C614	168-1042-78	16V 0.1uF K	D703	001-4301-68	HZU18B1	L308	010-3104-54	600 ohm/100MHz
C615	165-1053-65	50V 1uF	D704	001-4301-68	HZU18B1	L309	010-3104-54	600 ohm/100MHz
C616	168-1022-55	1000pF K	D801	001-2403-90	M1F60	L310	010-3104-54	600 ohm/100MHz
C617	168-1022-55	1000pF K	D802	001-2403-90	M1F60	L311	010-3104-54	600 ohm/100MHz
C701	166-1007-50	10pF CH	D803	001-0592-00	RM4Z	L312	010-3104-54	600 ohm/100MHz
C702	166-1007-50	10pF CH	D804	001-4301-68	HZU18B1	L313	010-3104-54	600 ohm/100MHz
C703	166-1007-50	10pF CH	D805	001-2403-90	M1F60	L314	010-3104-54	600 ohm/100MHz
C704	166-1007-50	10pF CH	D806	-----	(N/A)	L318	010-3104-54	600 ohm/100MHz
C705	166-1007-50	10pF CH	D807	-----	(N/A)	L328	010-3104-54	600 ohm/100MHz
C706	166-1007-50	10pF CH	D808	001-4301-68	HZU18B1	L329	010-3104-54	600 ohm/100MHz
C801	168-1042-78	16V 0.1uF K	D809	001-2403-90	M1F60	L337	010-3104-54	600 ohm/100MHz
C804	-----	(N/A)	D810	001-2403-90	M1F60	L338	010-3104-54	600 ohm/100MHz
C805	172-1041-19	0.1uF	D811	001-2403-90	M1F60	L347	010-3104-54	600 ohm/100MHz
C806	188-1053-68	50V 1uF	D812	001-0504-87	HZS33-3L-TJ	L350	010-3104-54	600 ohm/100MHz
C807	172-1041-19	0.1uF	D813	001-2403-90	M1F60	L401	-----	(N/A)
C808	042-1624-00	16V 4700uF	D814	001-2403-90	M1F60	L402	-----	(N/A)
C809	-----	(N/A)	D815	001-2403-90	M1F60	L403	-----	(N/A)
C810	-----	(N/A)	D816	001-4301-37	HZU6.8B1	L404	-----	(N/A)
C811	-----	(N/A)	D817	001-0346-69	MTZJ18B	L405	-----	(N/A)
C812	-----	(N/A)	D818	001-0516-90	MA111	L406	-----	(N/A)
C813	-----	(N/A)	D819	-----	(N/A)	L501	010-6009-76	22uH J
C814	-----	(N/A)	IC102	-----	NJM2886DL3-05-TE1 (thermal pad type) (336890-051)	L503	010-3407-66	22uH J
C815	-----	(N/A)				L504	010-3104-54	600 ohm/100MHz
C816	-----	(N/A)				L505	010-3104-54	600 ohm/100MHz
C817	168-1042-78	16V 0.1uF K	IC201	051-3395-90	NJU7780U1-15-TE2	L806	010-8026-00	210uH
C818	-----	(N/A)	IC202	-----	(N/A)	P601	076-0478-59	9P
C819	-----	(N/A)	IC203	051-3395-90	NJU7780U1-15-TE2	P602	076-3011-78	28P
C820	168-1042-78	16V 0.1uF K	IC204	051-6711-10	TC94A34FG-002	P701	076-0368-06	6P
C821	166-1011-50	100pF CH	IC205	051-3396-90	NJM2386ADL3-33-TE1	P702	076-0368-10	10P
C822	168-1032-55	0.01uF K				Q101	192-4116-00	2SC4116
C823	188-1063-38	16V 10uF	IC206	-----	(N/A)	Q102	191-1197-50	2SB1197K Q,R
C824	168-1042-38	50V 0.1uF K	IC207	051-3366-00	NJM2396F08	Q103	125-2027-91	DTC114EUA
C825	189-1073-59	35V 100uF	IC208	051-7513-08	HD74LV541A	Q104	-----	(N/A)
C826	188-1063-68	50V 10uF	IC301	-----	SAF7730HV/N332D (DSP-IC)	Q105	-----	(N/A)
C827	189-4773-62	50V 470uF			(Exposed die pad type)	Q106	-----	(N/A)
C828	189-4773-39	16V 470uF			(670651-051)	Q201	125-2027-91	DTC114EUA
C829	168-1042-38	50V 0.1uF K				Q202	-----	(N/A)
C830	189-4773-39	16V 470uF				Q203	-----	(N/A)
C831	168-1042-38	50V 0.1uF K	IC302	051-3396-90	NJM2386ADL3-33-TE1	Q204	-----	(N/A)
C832	168-1042-38	50V 0.1uF K						
C833	168-1042-38	50V 0.1uF K	IC401	051-3333-00	NJM2396F05			

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
Q205	-----	(N/A)	R125	-----	(N/A)	R346	032-0140-50	1/10W 10k ohm F
Q206	193-0601-00	2SD601A	R126	-----	(N/A)	R348	119-4731-15	1/10W 47k ohm
Q207	198-3018-00	2SK3018	R127	-----	(N/A)	R349	119-1031-15	1/10W 10k ohm
Q208	198-3018-00	2SK3018	R128	-----	(N/A)	R352	119-1021-15	1/10W 1k ohm
Q209	125-0021-91	DTA114EUA	R129	-----	(N/A)	R353	119-1021-15	1/10W 1k ohm
Q210	125-2027-91	DTC114EUA	R130	-----	(N/A)	R354	119-1021-15	1/10W 1k ohm
Q301	125-7005-90	PHK04P02T	R131	-----	(N/A)	R355	119-1021-15	1/10W 1k ohm
Q302	125-2027-91	DTC114EUA	R132	-----	(N/A)	R356	-----	(N/A)
Q303	125-2027-91	DTC114EUA	R133	-----	(N/A)	R358	119-4731-15	1/10W 47k ohm
Q304	125-2027-91	DTC114EUA	R201	119-1521-15	1/10W 1.5k ohm	R359	119-4731-15	1/10W 47k ohm
Q305	125-2027-91	DTC114EUA	R202	119-2251-15	1/10W 2.2M ohm	R360	119-4731-15	1/10W 47k ohm
Q306	125-2027-91	DTC114EUA	R203	119-2211-15	1/10W 220 ohm	R361	119-4731-15	1/10W 47k ohm
Q307	125-2027-91	DTC114EUA	R204	119-1031-15	1/10W 10k ohm	R362	119-4731-15	1/10W 47k ohm
Q308	125-2027-91	DTC114EUA	R205	119-1031-15	1/10W 10k ohm	R363	119-4731-15	1/10W 47k ohm
Q309	125-2027-91	DTC114EUA	R206	119-5121-15	1/10W 5.1k ohm	R364	119-1001-15	1/10W 10 ohm
Q501	125-2027-91	DTC114EUA	R207	119-5121-15	1/10W 5.1k ohm	R365	119-4731-15	1/10W 47k ohm
Q502	192-4116-00	2SC4116	R210	119-1031-15	1/10W 10k ohm	R366	-----	(N/A)
Q601	190-2071-00	2SA2071	R211	119-5121-15	1/10W 5.1k ohm	R367	119-0000-05	1/10W 0 ohm JW
Q602	125-2027-91	DTC114EUA	R219	119-1031-15	1/10W 10k ohm	R401	119-4731-15	1/10W 47k ohm
Q603	193-2118-50	2SD2118F5 R,S	R220	119-3331-15	1/10W 3.3k ohm	R402	-----	(N/A)
Q604	192-4116-00	2SC4116	R221	119-3331-15	1/10W 33k ohm	R403	-----	(N/A)
Q605	192-4116-00	2SC4116	R222	119-4731-15	1/10W 47k ohm	R404	-----	(N/A)
Q701	190-1162-00	2SA1162	R223	-----	(N/A)	R405	-----	(N/A)
Q702	125-2027-91	DTC114EUA	R224	-----	(N/A)	R406	-----	(N/A)
Q703	192-4116-00	2SC4116	R225	-----	(N/A)	R407	-----	(N/A)
Q704	190-1162-00	2SA1162	R226	-----	(N/A)	R408	-----	(N/A)
Q705	125-2027-91	DTC114EUA	R227	119-1021-15	1/10W 1k ohm	R409	-----	(N/A)
Q706	192-4116-00	2SC4116	R228	119-3331-15	1/10W 33k ohm	R410	-----	(N/A)
Q707	-----	(N/A)	R229	119-4731-15	1/10W 47k ohm	R411	-----	(N/A)
Q708	-----	(N/A)	R230	119-3331-15	1/10W 33k ohm	R412	-----	(N/A)
Q709	192-4116-00	2SC4116	R231	119-0000-05	1/10W 0 ohm JW	R413	-----	(N/A)
Q710	190-1162-00	2SA1162	R232	119-4721-15	1/10W 4.7k ohm	R414	-----	(N/A)
Q711	125-2027-91	DTC114EUA	R233	119-3331-15	1/10W 33k ohm	R415	-----	(N/A)
Q801	192-4116-00	2SC4116	R234	119-4721-15	1/10W 4.7k ohm	R416	-----	(N/A)
Q804	192-4116-00	2SC4116	R235	119-4731-15	1/10W 47k ohm	R417	-----	(N/A)
Q805	-----	(N/A)	R236	119-0000-05	1/10W 0 ohm JW	R418	-----	(N/A)
Q806	-----	(N/A)	R237	119-0000-05	1/10W 0 ohm JW	R419	-----	(N/A)
Q807	190-2071-00	2SA2071	R238	119-0000-05	1/10W 0 ohm JW	R420	-----	(N/A)
Q808	192-4116-00	2SC4116	R301	032-0140-51	1/10W 15k ohm F	R421	-----	(N/A)
Q809	192-4116-00	2SC4116	R302	032-0140-51	1/10W 15k ohm F	R422	-----	(N/A)
Q810	190-1048-00	2SA1048	R303	032-0140-51	1/10W 15k ohm F	R423	-----	(N/A)
Q811	192-2873-00	2SC2873	R304	032-0140-51	1/10W 15k ohm F	R424	-----	(N/A)
Q812	190-2071-00	2SA2071	R305	032-0140-51	1/10W 15k ohm F	R425	-----	(N/A)
Q813	192-4116-00	2SC4116	R306	032-0140-51	1/10W 15k ohm F	R426	-----	(N/A)
Q814	192-5886-00	2SC5886	R307	032-0140-51	1/10W 15k ohm F	R427	-----	(N/A)
Q815	190-1428-00	2SA1428	R308	032-0140-51	1/10W 15k ohm F	R428	-----	(N/A)
Q816	192-3668-00	2SC3668	R309	119-1531-15	1/10W 15k ohm	R429	-----	(N/A)
Q817	190-1428-00	2SA1428	R310	119-1531-15	1/10W 15k ohm	R430	-----	(N/A)
Q818	192-3668-00	2SC3668	R311	119-0000-05	1/10W 0 ohm JW	R431	-----	(N/A)
Q819	190-1428-00	2SA1428	R312	119-1031-15	1/10W 10k ohm	R432	-----	(N/A)
Q820	192-3668-00	2SC3668	R313	119-1011-15	1/10W 100 ohm	R433	-----	(N/A)
Q821	103-2012-00	2SD2012	R314	119-1021-15	1/10W 1k ohm	R434	-----	(N/A)
Q822	103-1684-00	2SD1684 R,S,T	R315	119-2201-15	1/10W 22 ohm	R435	-----	(N/A)
Q823	190-1162-00	2SA1162	R316	119-3921-15	1/10W 3.9k ohm	R436	-----	(N/A)
Q824	125-2027-91	DTC114EUA	R317	119-3921-15	1/10W 3.9k ohm	R437	-----	(N/A)
Q825	-----	(N/A)	R319	119-3921-15	1/10W 3.9k ohm	R438	-----	(N/A)
Q826	-----	(N/A)	R320	119-3921-15	1/10W 3.9k ohm	R439	-----	(N/A)
R101	119-0000-05	1/10W 0 ohm JW	R321	119-1031-15	1/10W 10k ohm	R501	119-1031-15	1/10W 10k ohm
R102	-----	(N/A)	R322	119-1031-15	1/10W 10k ohm	R502	119-1031-15	1/10W 10k ohm
R103	-----	(N/A)	R323	-----	(N/A)	R503	119-1031-15	1/10W 10k ohm
R104	119-0000-05	1/10W 0 ohm JW	R324	-----	(N/A)	R504	119-1031-15	1/10W 10k ohm
R105	-----	(N/A)	R325	119-1021-15	1/10W 1k ohm	R505	119-1031-15	1/10W 10k ohm
R106	-----	(N/A)	R326	119-1011-15	1/10W 100 ohm	R506	119-1031-15	1/10W 10k ohm
R107	119-0000-05	1/10W 0 ohm JW	R327	119-1011-15	1/10W 100 ohm	R507	119-0000-05	1/10W 0 ohm JW
R108	119-2741-15	1/10W 270k ohm	R330	119-0000-05	1/10W 0 ohm JW	R508	119-0000-05	1/10W 0 ohm JW
R109	119-1031-15	1/10W 10k ohm	R331	032-0140-89	1/10W 47k ohm F	R509	-----	(N/A)
R110	119-1031-15	1/10W 10k ohm	R332	032-0140-89	1/10W 47k ohm F	R510	-----	(N/A)
R111	119-1011-15	1/10W 100 ohm	R333	032-0140-89	1/10W 47k ohm F	R511	119-4741-15	1/10W 470k ohm
R112	119-1011-15	1/10W 100 ohm	R334	032-0140-89	1/10W 47k ohm F	R512	119-4741-15	1/10W 470k ohm
R113	119-1011-15	1/10W 100 ohm	R335	119-0000-05	1/10W 0 ohm JW	R513	119-4741-15	1/10W 470k ohm
R117	-----	(N/A)	R336	119-0000-05	1/10W 0 ohm JW	R514	119-4741-15	1/10W 470k ohm
R118	-----	(N/A)	R339	032-0140-50	1/10W 10k ohm F	R515	-----	(N/A)
R119	119-4731-15	1/10W 47k ohm	R340	032-0140-50	1/10W 10k ohm F	R516	-----	(N/A)
R120	116-1021-15	1/4W 1k ohm	R341	032-0140-50	1/10W 10k ohm F	R517	119-0000-05	1/10W 0 ohm JW
R121	119-1031-15	1/10W 10k ohm	R342	032-0140-50	1/10W 10k ohm F	R518	119-0000-05	1/10W 0 ohm JW
R122	-----	(N/A)	R343	119-0000-05	1/10W 0 ohm JW	R519	119-1031-15	1/10W 10k ohm
R123	-----	(N/A)	R344	119-0000-05	1/10W 0 ohm JW	R520	119-1031-15	1/10W 10k ohm
R124	-----	(N/A)	R345	032-0140-50	1/10W 10k ohm F	R521	119-1531-15	1/10W 15k ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R522	119-1531-15	1/10W 15k ohm	R628	119-4721-15	1/10W 4.7k ohm	R819	119-3931-15	1/10W 39k ohm
R523	119-0000-05	1/10W 0 ohm JW	R629	032-0140-24	1/10W 82 ohm F	R820	119-4721-15	1/10W 4.7k ohm
R524	119-0000-05	1/10W 0 ohm JW	R630	032-0140-11	1/10W 300 ohm F	R821	-----	(N/A)
R525	119-0000-05	1/10W 0 ohm JW	R631	119-1031-15	1/10W 10k ohm	R822	-----	(N/A)
R526	119-0000-05	1/10W 0 ohm JW	R632	119-1031-15	1/10W 10k ohm	R824	-----	(N/A)
R527	119-1031-15	1/10W 10k ohm	R633	119-1031-15	1/10W 10k ohm	R829	119-1021-15	1/10W 1k ohm
R528	119-1031-15	1/10W 10k ohm	R634	119-1021-15	1/10W 1k ohm	R830	117-1031-15	1/8W 10k ohm
R529	119-1031-15	1/10W 10k ohm	R635	119-1031-15	1/10W 10k ohm	R831	116-2221-15	1/4W 2.2k ohm
R530	119-1031-15	1/10W 10k ohm	R636	116-1001-15	1/4W 10 ohm	R832	119-3321-15	1/10W 3.3k ohm
R531	119-1531-15	1/10W 15k ohm	R637	-----	(N/A)	R833	119-1031-15	1/10W 10k ohm
R532	119-1531-15	1/10W 15k ohm	R638	119-6821-15	1/10W 6.8k ohm	R834	116-2221-15	1/4W 2.2k ohm
R533	119-1031-15	1/10W 10k ohm	R639	119-1011-15	1/10W 100 ohm	R835	119-4731-15	1/10W 47k ohm
R534	119-1031-15	1/10W 10k ohm	R640	119-1011-15	1/10W 100 ohm	R836	119-2231-15	1/10W 22k ohm
R535	119-1031-15	1/10W 10k ohm	R641	119-4721-15	1/10W 4.7k ohm	R837	119-3331-15	1/10W 33k ohm
R536	119-1031-15	1/10W 10k ohm	R642	119-4721-15	1/10W 4.7k ohm	R838	119-3321-15	1/10W 3.3k ohm
R537	119-5631-15	1/10W 56k ohm	R643	119-4731-15	1/10W 47k ohm	R839	119-1031-15	1/10W 10k ohm
R538	119-1521-15	1/10W 1.5k ohm	R644	119-4731-15	1/10W 47k ohm	R840	119-2221-15	1/10W 2.2k ohm
R539	119-1031-15	1/10W 10k ohm	R645	119-6831-15	1/10W 68k ohm	R841	116-4721-15	1/4W 4.7k ohm
R540	119-2221-15	1/10W 2.2k ohm	R646	119-3341-15	1/10W 330k ohm	R842	-----	(N/A)
R541	119-2221-15	1/10W 2.2k ohm	R647	032-0140-22	1/10W 68k ohm F	R843	111-1831-94	1/4W 18k ohm
R542	119-2221-15	1/10W 2.2k ohm	R648	032-0140-00	1/10W 56k ohm F	R844	119-1031-15	1/10W 10k ohm
R543	119-2221-15	1/10W 2.2k ohm	R649	119-4731-15	1/10W 47k ohm	R845	116-2221-15	1/4W 2.2k ohm
R544	119-4731-15	1/10W 47k ohm	R650	119-5621-15	1/10W 5.6k ohm	R846	119-3321-15	1/10W 3.3k ohm
R545	119-4731-15	1/10W 47k ohm	R651	119-2231-15	1/10W 22k ohm	R847	116-2221-15	1/4W 2.2k ohm
R546	119-1031-15	1/10W 10k ohm	R652	119-4731-15	1/10W 47k ohm	R848	111-2221-94	1/4W 2.2k ohm
R547	-----	(N/A)	R653	119-3321-15	1/10W 3.3k ohm	R849	119-5631-15	1/10W 56k ohm
R548	-----	(N/A)	R654	119-1831-15	1/10W 18k ohm	R850	111-2721-88	1/2W 2.7k ohm
R549	-----	(N/A)	R701	119-2231-15	1/10W 22k ohm	R851	111-1521-94	1/4W 1.5k ohm
R550	-----	(N/A)	R702	119-2231-15	1/10W 22k ohm	R852	111-1521-94	1/4W 1.5k ohm
R551	-----	(N/A)	R703	119-1041-15	1/10W 100k ohm	R853	111-1521-94	1/4W 1.5k ohm
R552	-----	(N/A)	R704	119-1021-15	1/10W 1k ohm	R854	119-1231-15	1/10W 12k ohm
R553	-----	(N/A)	R705	119-1021-15	1/10W 1k ohm	R855	119-1231-15	1/10W 12k ohm
R554	-----	(N/A)	R706	119-4731-15	1/10W 47k ohm	R856	119-4731-15	1/10W 47k ohm
R555	-----	(N/A)	R707	119-4731-15	1/10W 47k ohm	R857	119-4731-15	1/10W 47k ohm
R568	-----	(N/A)	R708	119-4731-15	1/10W 47k ohm	R858	116-1021-15	1/4W 1k ohm
R569	-----	(N/A)	R709	119-1021-15	1/10W 1k ohm	R859	119-4711-15	1/10W 470 ohm
R572	119-8211-15	1/10W 820 ohm	R710	119-2231-15	1/10W 22k ohm	R860	116-5621-15	1/4W 5.6k ohm
R573	119-1021-15	1/10W 1k ohm	R711	119-2231-15	1/10W 22k ohm	R861	119-1031-15	1/10W 10k ohm
R574	119-4731-15	1/10W 47k ohm	R712	119-1021-15	1/10W 1k ohm	R862	-----	(N/A)
R601	119-4721-15	1/10W 4.7k ohm	R713	119-1041-15	1/10W 100k ohm	R863	-----	(N/A)
R602	119-4721-15	1/10W 4.7k ohm	R714	119-4731-15	1/10W 47k ohm	R864	-----	(N/A)
R603	119-1011-15	1/10W 100 ohm	R715	119-4731-15	1/10W 47k ohm	R866	-----	(N/A)
R604	119-1011-15	1/10W 100 ohm	R716	119-1021-15	1/10W 1k ohm	R867	-----	(N/A)
R605	119-4731-15	1/10W 47k ohm	R717	-----	(N/A)	R868	-----	(N/A)
R606	119-4731-15	1/10W 47k ohm	R718	-----	(N/A)	SUP102	060-0122-91	DSP-141N-S00B
R607	119-1041-15	1/10W 100k ohm	R719	119-1021-15	1/10W 1k ohm	T101	-----	(N/A)
R608	119-1041-15	1/10W 100k ohm	R720	119-4731-15	1/10W 47k ohm	TH801	002-0318-21	THERMISTOR
R609	119-4721-15	1/10W 4.7k ohm	R721	119-4731-15	1/10W 47k ohm	TH802	-----	(N/A)
R610	119-4721-15	1/10W 4.7k ohm	R722	119-4731-15	1/10W 47k ohm	TM101	073-0762-90	TERMINAL
R611	119-4721-15	1/10W 4.7k ohm	R723	119-1021-15	1/10W 1k ohm	TM201	073-0762-90	TERMINAL
R612	119-4721-15	1/10W 4.7k ohm	R724	119-2231-15	1/10W 22k ohm	TM401	073-0762-90	TERMINAL
R614	119-4721-15	1/10W 4.7k ohm	R725	119-2231-15	1/10W 22k ohm	TM601	073-0762-90	TERMINAL
R615	119-4721-15	1/10W 4.7k ohm	R726	116-1211-15	1/4W 120 ohm	TM801	073-0762-90	TERMINAL
R616	119-4731-15	1/10W 47k ohm	R727	116-1211-15	1/4W 120 ohm	TM802	073-0762-90	TERMINAL
R617	119-4731-15	1/10W 47k ohm	R801	116-4721-15	1/4W 4.7k ohm	X201	061-3534-90	16.92MHz
R618	119-4731-15	1/10W 47k ohm	R802	-----	(N/A)	X301	061-3537-90	41.6MHz
R619	119-4731-15	1/10W 47k ohm	R803	119-3931-15	1/10W 39k ohm	X401	-----	(N/A)
R620	119-4721-15	1/10W 4.7k ohm	R804	119-1531-15	1/10W 15k ohm	X601	061-3541-90	10.00MHz
R621	119-4721-15	1/10W 4.7k ohm	R805	119-4731-15	1/10W 47k ohm	Z101	073-0778-90	TERMINAL
R622	119-1031-15	1/10W 10k ohm	R812	-----	(N/A)	Z201	073-0778-90	TERMINAL
R623	119-1021-15	1/10W 1k ohm	R813	-----	(N/A)	Z301	073-0778-90	TERMINAL
R624	119-1011-15	1/10W 100 ohm	R814	111-5621-94	1/4W 5.6k ohm	PWB	039-3786-02	PWB(WITHOUT COMPONENTS)
R625	119-4721-15	1/10W 4.7k ohm	R815	116-4721-15	1/4W 4.7k ohm			
R626	119-1011-15	1/10W 100 ohm	R817	119-4731-15	1/10W 47k ohm			
R627	119-4721-15	1/10W 4.7k ohm	R818	119-1531-15	1/10W 15k ohm			

SUB PWB(B2) section

REF No.	PART No.	DESCRIPTION
C901	166-1007-50	10pF CH
C902	166-1007-50	10pF CH
C903	172-1041-19	0.1uF
C904	166-1007-50	10pF CH

REF No.	PART No.	DESCRIPTION
C905	166-1007-50	10pF CH
J901	074-0898-06	6P
J902	074-0898-10	10P
J903	074-4027-20	20P

REF No.	PART No.	DESCRIPTION
PWB	039-3822-00	PWB(WITHOUT COMPONENTS)


SW PWB(B3) section

REF No.	PART No.	DESCRIPTION
C1	168-1022-55	1000pF K
C2	168-1042-78	16V 0.1uF K
C3	043-0328-90	50V 0.1uF
C4	043-0328-90	50V 0.1uF
C5	178-1052-78	25V 1uF
C6	-----	(N/A)
D1	-----	(N/A)
D2	-----	(N/A)
D3	-----	(N/A)
D4	-----	(N/A)
D5	001-7094-91	VFR1112H-TR
D7	001-7094-91	VFR1112H-TR
D8	001-7094-91	VFR1112H-TR
D9	001-7094-92	VFR1112H-6A83A2
D10	001-7094-92	VFR1112H-6A83A2
D11	001-7094-92	VFR1112H-6A83A2
D12	001-7094-92	VFR1112H-6A83A2
D13	001-7094-92	VFR1112H-6A83A2
D14	001-7094-92	VFR1112H-6A83A2
D15	001-7094-92	VFR1112H-6A83A2
D16	001-7094-92	VFR1112H-6A83A2
D17	001-7094-91	VFR1112H-TR
D18	001-7094-91	VFR1112H-TR
D19	001-7094-91	VFR1112H-TR
D20	001-7094-91	VFR1112H-TR
D21	001-7094-91	VFR1112H-TR
D22	001-7094-91	VFR1112H-TR
D23	001-7094-91	VFR1112H-TR
D24	001-7094-91	VFR1112H-TR
D25	001-7094-91	VFR1112H-TR

REF No.	PART No.	DESCRIPTION
D26	001-7094-91	VFR1112H-TR
D27	001-7094-91	VFR1112H-TR
D28	001-7094-91	VFR1112H-TR
D29	001-7094-91	VFR1112H-TR
D30	001-7094-91	VFR1112H-TR
D31	001-7094-91	VFR1112H-TR
D32	001-7094-91	VFR1112H-TR
D33	001-7094-91	VFR1112H-TR
D34	001-7094-91	VFR1112H-TR
D35	001-2403-90	M1F60
D36	001-2403-90	M1F60
D37	001-2403-90	M1F60
D38	001-7094-91	VFR1112H-TR
D39	001-7094-91	VFR1112H-TR
IC1	051-6642-08	LC75700T
IC2	051-6059-10	ML9203-06GA
J1	074-3014-78	28P
L1	010-3407-66	22uH J
L2	010-3407-66	22uH J
R1	119-1031-15	1/10W 10k ohm
R2	119-1021-15	1/10W 1k ohm
R3	119-3931-15	1/10W 39k ohm
R4	119-0000-05	1/10W 0 ohm JW
R6	119-6821-15	1/10W 6.8k ohm
R7	119-8221-15	1/10W 8.2k ohm
R10	119-6821-15	1/10W 6.8k ohm
R11	119-6821-15	1/10W 6.8k ohm
R12	119-1031-15	1/10W 10k ohm
R13	119-1231-15	1/10W 12k ohm
R14	119-1031-15	1/10W 10k ohm

REF No.	PART No.	DESCRIPTION
R15	119-1231-15	1/10W 12k ohm
R16	119-1031-15	1/10W 10k ohm
R17	119-1231-15	1/10W 12k ohm
R18	119-1031-15	1/10W 10k ohm
R19	119-1231-15	1/10W 12k ohm
R20	119-4721-15	1/10W 4.7k ohm
R21	119-4721-15	1/10W 4.7k ohm
R22	119-3921-15	1/10W 3.9k ohm
R23	119-3921-15	1/10W 3.9k ohm
R24	119-3921-15	1/10W 3.9k ohm
R25	119-3921-15	1/10W 3.9k ohm
R26	119-3921-15	1/10W 3.9k ohm
R27	119-4721-15	1/10W 4.7k ohm
R28	119-3921-15	1/10W 3.9k ohm
R29	119-4721-15	1/10W 4.7k ohm
R30	119-2721-15	1/10W 2.7k ohm
R31	119-3321-15	1/10W 3.3k ohm
R32	119-2721-15	1/10W 2.7k ohm
R33	119-3321-15	1/10W 3.3k ohm
R34	-----	(N/A)
R35	119-3921-15	1/10W 3.9k ohm
R36	119-4721-15	1/10W 4.7k ohm
R37	119-1021-15	1/10W 1k ohm
TM1	073-0778-90	TERMINAL
TM2	-----	(N/A)
VR1	016-0018-21	ROTALY ENCODER
VR2	016-0018-21	ROTALY ENCODER
X1	060-1550-90	4.023MHz
PWB	039-3820-00	PWB(WITHOUT COMPONENTS)

EXPLODED VIEW/PARTS LIST

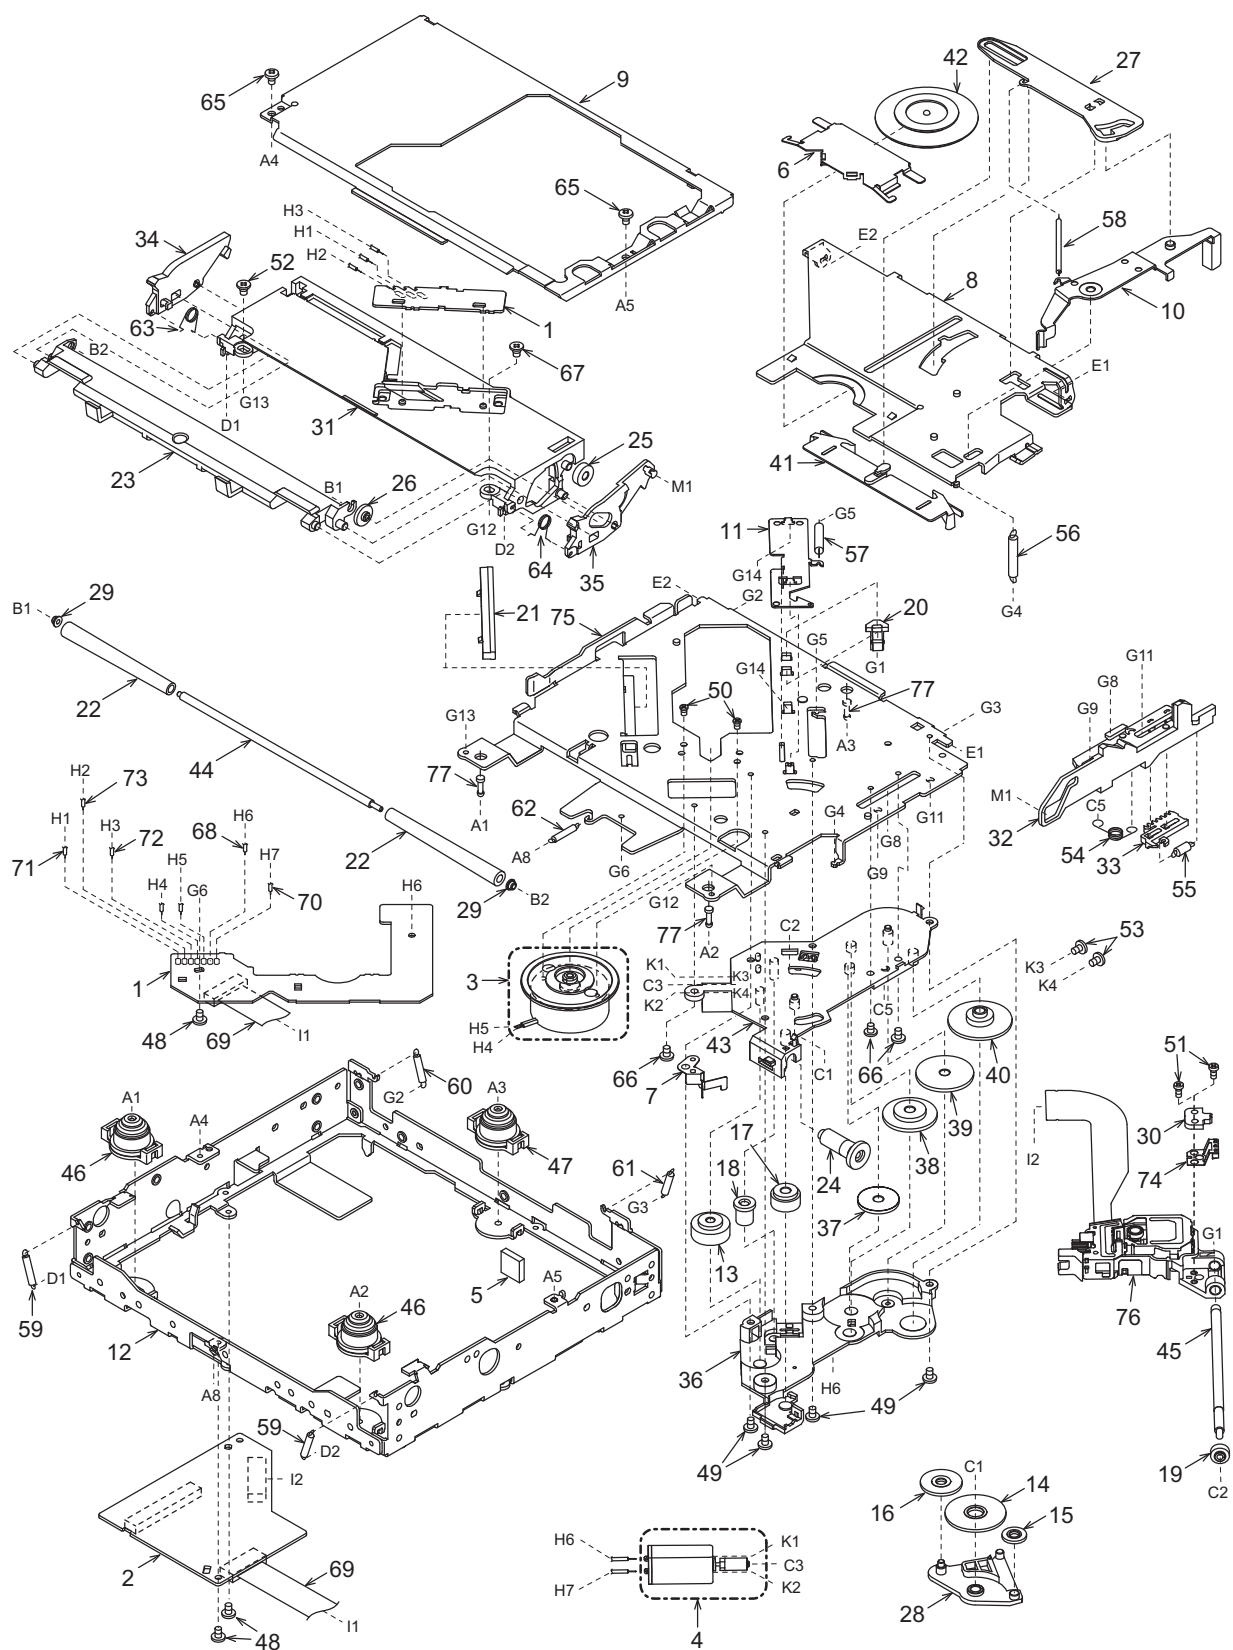

NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	LED PWB	1
2	-----	CD PWB	1
3	SMA-182-100	SPINDLE MOTOR-ASSY	1
4	SMA-183-100	SLED MOTOR-ASSY	1
5	345-5476-20	CUSHION RUBBER	1
6	620-1023-23	CLAMPER PLATE	1
7	620-1026-21	SPRING PLATE	1
8	620-1596-23	CLAMPER LINK	1
9	620-1862-20	UPPER CHASSIS	1
10	620-1752-20	SENSOR ARM	1
11	620-1753-20	ID-LOCK PLATE	1
12	620-1868-20	LOWER CHASSIS	1
13	621-0608-21	SECOND GEAR	1
14	621-0609-21	BASE GEAR	1
15	621-0610-21	IDLE GEAR A	1
16	621-0611-21	IDLE GEAR B	1
17	621-0612-22	ROLLER GEAR A	1
18	621-0620-20	THREAD GEAR A	1
19	621-0621-20	THREAD GEAR B	1
20	621-0623-24	LS-HOLDER	1
21	621-0624-22	GUIDE RAIL	1
22	621-0711-21	LOADING ROLLER	2
23	621-0718-21	ROLLER GUIDE	1
24	621-0719-20	ROLLER GEAR B	1
25	621-0720-20	ROLLER GEAR C	1
26	621-0721-20	ROLLER GEAR D	1
27	621-0728-20	STOPPER LINK	1
28	621-1719-21	IDLE CASE	1
29	621-1726-21	ROLLER SLEEVE	2
30	621-1729-21	SH-BASE	1
31	621-1742-20	UPPER GUIDE	1
32	621-1743-20	SHIFT LEVER	1
33	621-1744-20	RACK	1
34	621-1745-20	LOCK ARM L	1
35	621-1746-20	LOCK ARM R	1
36	621-1747-20	GEAR COVER	1
37	621-1748-20	POWER GEAR A	1
38	621-1749-20	POWER GEAR B	1
39	621-1750-20	POWER GEAR C	1

NO.	PART NO.	DESCRIPTION	Q'TY
40	621-1751-20	POWER GEAR D	1
41	621-1752-20	DISC STOPPER	1
42	621-1753-20	CLAMPER RING	1
43	621-1754-20	GEAR BASE	1
44	622-1571-21	ROLLER SHAFT	1
45	624-3059-00	LEAD SCREW	1
46	629-0086-20	DAMPER F	2
47	629-0087-20	DAMPER R	1
48	716-1507-01	SCREW(M2x3)	3
49	716-1670-01	SCREW(M2x4)	4
50	716-1733-01	SCREW(M1.7x2.3)	2
51	716-3469-01	SCREW(1.7x4)	2
52	716-3473-01	SCREW(M2x3)	1
53	716-3551-00	SCREW(M1.4x2.5)	2
54	750-7865-20	SHIFT SPRING	1
55	750-7866-20	RACK SPRING	1
56	750-7867-20	CLAMPER SPRING	1
57	750-7868-20	ID-LOCK SPRING	1
58	750-7869-20	SENSOR SPRING	1
59	750-7870-20	DR-SPRING F	2
60	750-7871-20	DR-SPRING RA	1
61	750-7872-20	DR-SPRING RB	1
62	750-7873-20	DR-SPRING C	1
63	750-6797-20	ROLLER SPRING L	1
64	750-6798-20	ROLLER SPRING R	1
65	714-2003-8B	SCREW(M2x3)	2
66	780-2025-00	SCREW(M2x2.5)	3
67	781-1730-00	SCREW(M1.7x3)	1
68	803-4906-60	VINYL-COAT-WIRE(ORG)	1
69	816-4065-50	FLAT WIRE	1
70	816-2590-00	VINYL-COAT-WIRE(GRN)	1
71	816-2591-00	VINYL-COAT-WIRE(YEL)	1
72	816-2592-00	VINYL-COAT-WIRE(BLUE)	1
73	816-2593-00	VINYL-COAT-WIRE(PUR)	1
74	966-1722-21	SH-RACK-ASSY	1
75	-----	DRIVE-PLT-ASSY	1
76	969-0075-31	PICKUP-ASSY	1
77	-----	DAMPER PIN	3

ELECTRICAL PARTS LIST

CD PWB(B1) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	168-1042-78	16V 0.1uF	C29	046-6822-58	6800pF	R5	033-0000-05	1/10W 0 ohm
C2	165-1073-35	16V 100uF	C30	168-1042-78	16V 0.1uF	R6	033-5621-15	1/10W 5.6k ohm
C4	178-1052-78	1uF	C31	046-4712-58	470pF	R7	033-4731-15	1/10W 47k ohm
C5	042-0560-85	6.3V 100uF	C32	046-4712-58	470pF	R8	033-3341-15	1/10W 330k ohm
C6	178-1052-78	1uF	C33	168-1042-78	16V 0.1uF	R9	033-2231-15	1/10W 22k ohm
C8	178-1052-78	1uF	C34	168-4732-78	16V 0.047uF	R10	033-2231-15	1/10W 22k ohm
C10	168-1042-78	16V 0.1uF	C35	168-4732-78	16V 0.047uF	R11	033-2731-15	1/10W 27k ohm
C11	168-1042-78	16V 0.1uF	C36	045-1007-50	10pF	R12	033-4731-15	1/10W 47k ohm
C12	045-4701-50	47pF	C37	045-1007-50	10pF	R13	033-2731-15	1/10W 27k ohm
C13	046-1532-78	0.015uF	C38	168-1042-78	16V 0.1uF	R14	033-1531-15	1/10W 15k ohm
C14	168-1042-78	16V 0.1uF	C39	046-5622-58	5600pF	R15	033-2731-15	1/10W 27k ohm
C15	046-1032-78	0.01uF	C40	168-1042-78	16V 0.1uF	R16	033-8231-15	1/10W 82k ohm
C17	046-4722-58	4700pF	CCT1	050-0140-63	1/32W 47k ohm x4J	R17	033-2731-15	1/10W 27k ohm
C18	046-1522-58	1500pF	D1	001-0367-91	1SS226	R18	033-8231-15	1/10W 82k ohm
C19	168-1042-78	16V 0.1uF	IC1	051-6079-90	BA5830FP-E2	R19	033-1051-15	1/10W 1M ohm
C20	168-1042-78	16V 0.1uF	IC2	051-6399-00	TC94A15FG	R20	119-2221-15	1/10W 2.2k ohm
C21	046-6812-58	680pF	J101	074-2505-29	29P	R22	119-0000-05	1/10W 0 ohm JW
C22	168-1042-78	16V 0.1uF	J201	074-2215-65	15P	TM1	073-0768-90	TERMINAL
C23	046-1532-78	0.015uF	J301	074-2504-10	10P	X2	061-3534-90	16.92MHz
C24	168-1042-78	16V 0.1uF	Q1	131-1188-50	2SB1188PQR	PWB	039-2845-21	PWB(WITHOUT COMPONENT)
C25	045-6801-50	68pF	R1	117-6811-15	1/8W 680 ohm			
C26	168-1042-78	16V 0.1uF	R2	117-1001-15	1/8W 10 ohm			
C27	046-3332-78	0.033uF	R3	033-2211-15	1/10W 220 ohm			

Sensor PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D1	001-7058-90	AN1105W-RR	Q1	060-4015-91	PS1192HB	S2	013-7413-50	LIMIT
D2	001-7058-90	AN1105W-RR	Q2	060-4015-91	PS1192HB	PWB	039-2675-20	PWB(WITHOUT COMPONENT)
J1	074-2504-10	10P	S1	013-7414-50	CHUCKING			

BLOCK DIAGRAM

