


2. EXPLODED VIEWS AND PARTS LIST

NOTES: ● Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.
● The  mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
● Screws adjacent to ▼ mark on product are used for disassembly.
● For the applying amount of lubricants or glue, follow the instructions in this manual.
(In the case of no amount instructions, apply as you think it appropriate.)

2.1 PACKING

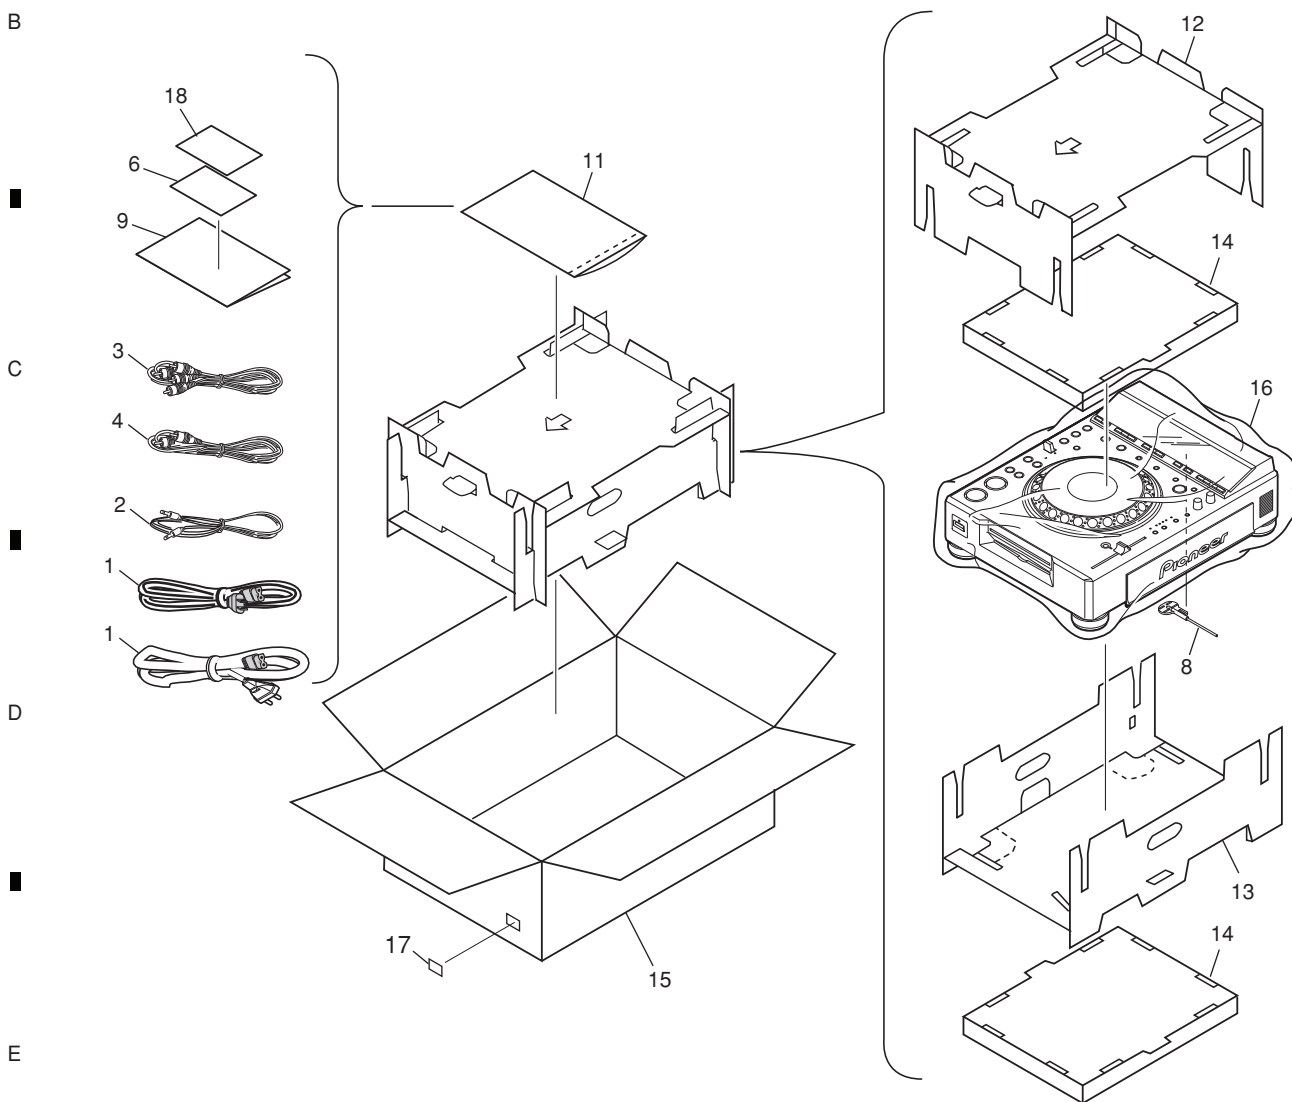

PACKING parts List


Mark No.	Description	Part No.	Mark No.	Description	Part No.
⚠ 1	AC Power Cord	See Contrast table(2)	NSP 11	Polyethylene Bag (230 x 340 x 0.06)	AHG7117
2	Control Cord (L= 1m)	XDE3063	12	Pad (A)	DHA1716
3	Audio Cable (L= 1.5m)	VDE1064	13	Pad (B)	DHA1717
4	Video Cable (L=1.5m)	VDE1065	14	Pad (C)	DHA1718
5			15	Packing Case	See Contrast table(2)
NSP 6	Warranty Card	See Contrast table(2)	16	Mirror mat Sheet	AHG7010
7			17	Label	See Contrast table(2)
8	Forced Eject Pin	DEX1021	NSP 18	User Card	DRM1262
9	Operating Instructions(English)	See Contrast table(2)			
10					

(2) CONTRAST TABLE

DVJ-1000/KUCXJ, /WYXJ5, /TLXJ/RD and TLFJX types are constructed the same except for the following:

Mark	No.	Symbol and Description	DVJ-1000 /KUCXJ	DVJ-1000 /WYXJ5	DVJ-1000 /TLXJ/RD	DVJ-1000 /TLFJX
⚠	1	AC Power Cord	ADG7021	ADG1154	ADG1154	ADG1154
⚠	1	AC Power Cord	Not used	Not used	Not used	ADG7097
NSP	6	Warranty Card	ARY7043	Not used	Not used	Not used
	9	Operating Instructions (English)(KUCXJ)	DRB1413	Not used	Not used	Not used
	9	Operating Instructions (WYXJ5)(English, French, German, Italian, Dutch, Spanish)	Not used	DRB1414	Not used	Not used
	9	Operating Instructions (TLFJX) (English, Chinese)	Not used	Not used	Not used	DRB1415
	9	Operating Instructions (TLXJ/RD) (English, Spanish)	Not used	Not used	DRB1416	Not used
	15	Packing Case	DHG2636	DHG2637	DHG2639	DHG2638
NSP	17	Label	DRW2311	VRW1629	VRW1629	VRW1629

2.2 EXTERIOR SECTION

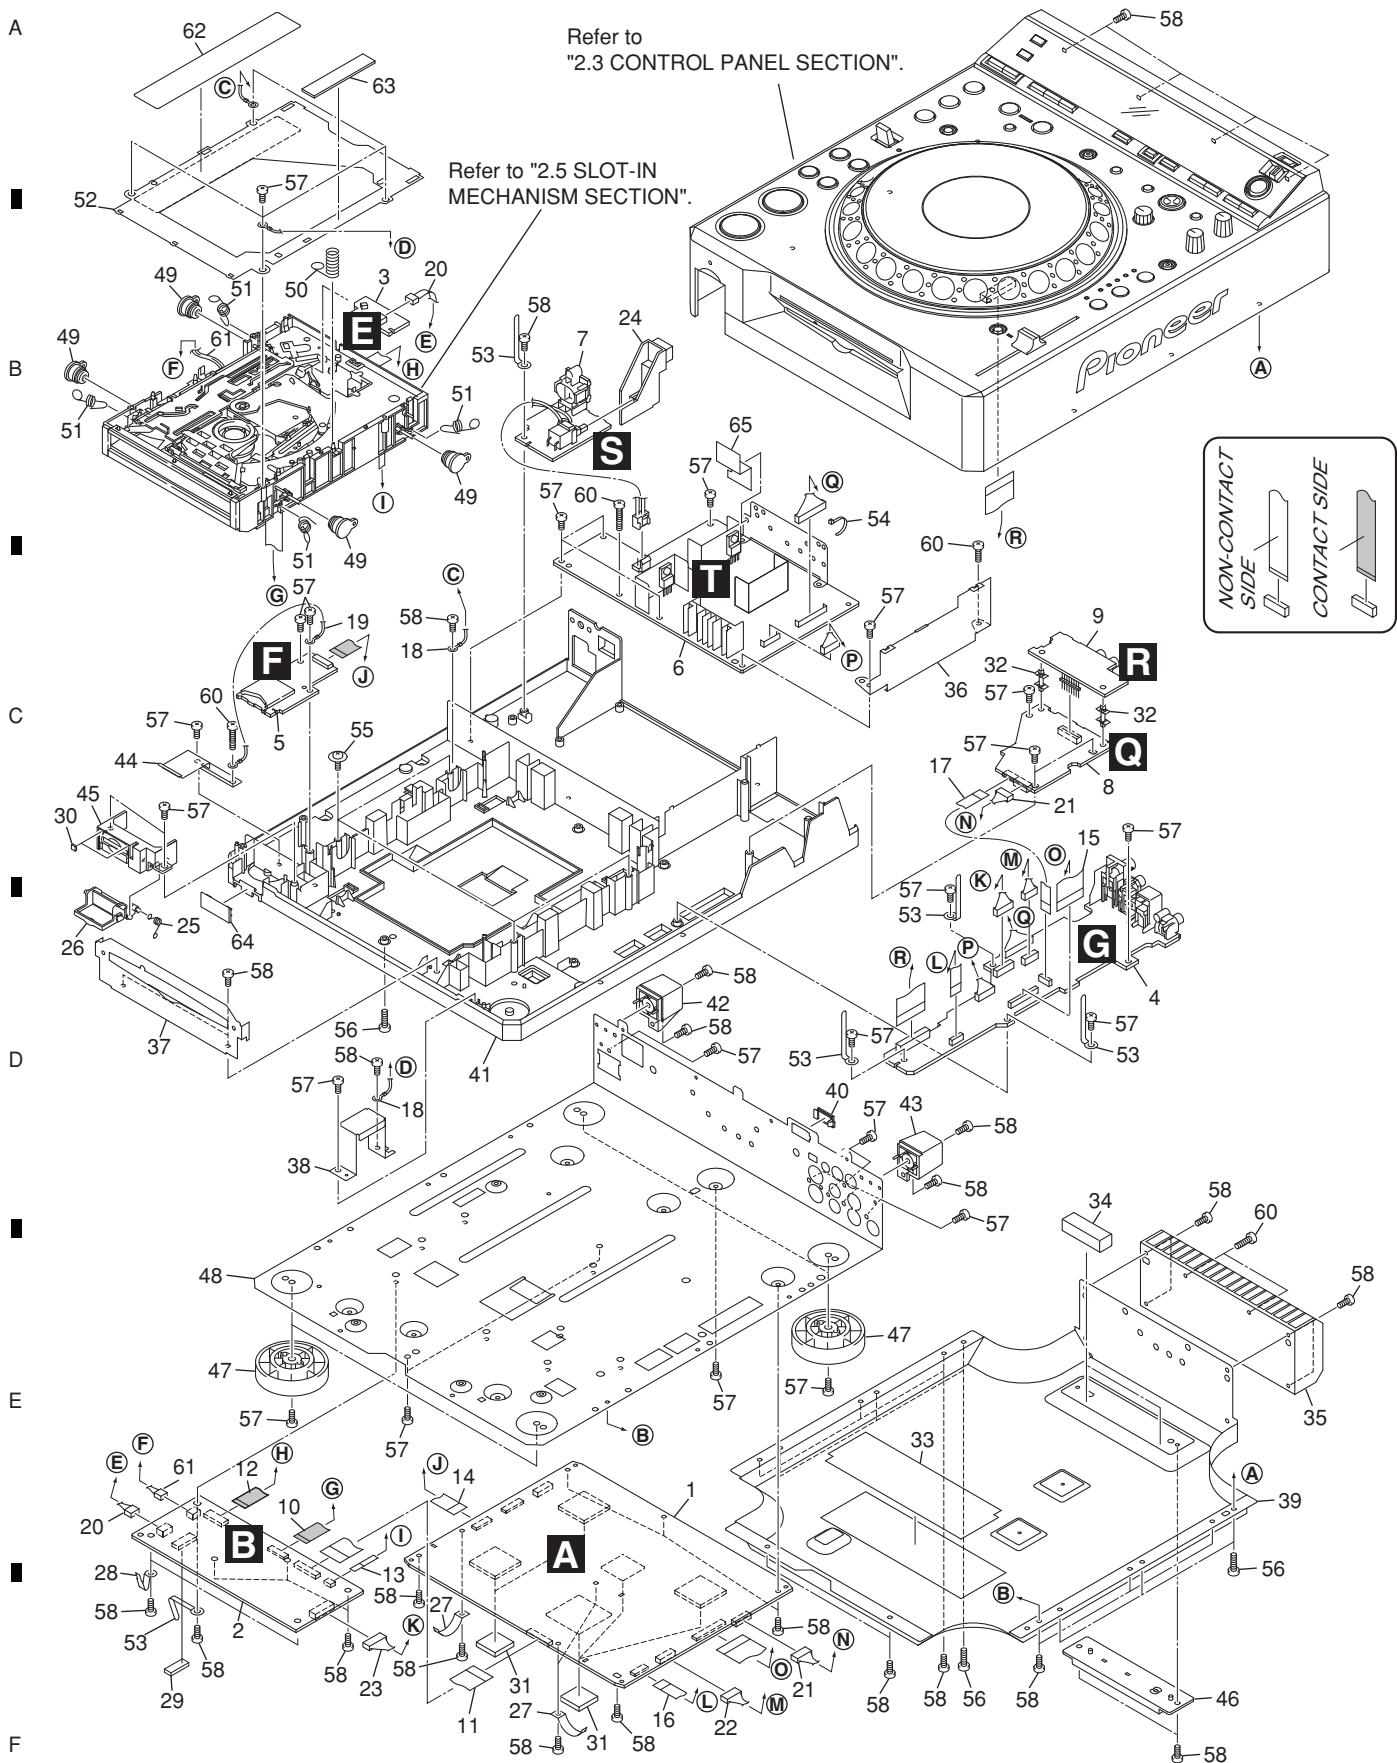

EXTERIOR SECTION parts List

Mark No.	Description	Part No.	Mark No.	Description	Part No.	
1	MAIN Assy	DWG1630	35	Heat Sink	DNG1098	
2	DVPL Assy	DWX2627				
3	SLMB Assy	DWS1395	NSP 36	Shield Plate 2	DNH2723	A
4	MJCB Assy	DWG1633	NSP 37	Front Plate	DNH2724	
5	SDCB Assy	DWX2630	NSP 38	Earth Plate	DNH2726	
			39	Heat Plate	See Contrast table(2)	
⚠ 6	POWER SUPPLY Assy	DWR1436	40	Blind Cap	DNK4218	
⚠ 7	PSWB Assy	See Contrast table(2)				
8	AUDB Assy	DWG1638	NSP 41	Chassis	DNK4591	
9	AJCB Assy	DWG1639	42	Rear Protector (R)	DNK4636	
10	26P FFC/30V	DDD1337	43	Rear Protector (L)	DNK4637	
			44	Card Plate	DBK1296	
11	FFC/30V (40p)	DDD1338	45	Door Holder	DNK4652	B
12	FFC/60V (13p)	DDD1339				
13	FFC/60V (4p)	DDD1340	46	Push Rod Holder	DNK4671	
14	FFC/60V (13p)	DDD1341	47	Insulator Assembly	DXA1904	
15	FFC/60V (27p)	DDD1342	48	Shield Plate 1 Assy	See Contrast table(2)	
			49	Damper	CNV6011	
16	FFC/60V (10p)	DDD1343	50	Earth Spring	DBH1398	
17	FFC/60V (9p)	DDD1344				
18	Earth Lead Unit	DDF1032	51	Float Spring G11	DBH1526	
19	Earth Lead Unit	DDF1033	52	Mecha Plate	DNH2339	
20	Connector Assy	PF03PP-B35	53	Cord Clamper (STEEL)	RNH-184	
			54	Binder	ZCA-SKB90BK	C
21	Connector Assy	DKP3778	55	DM Screw (FTC)	DBA1260	
22	6P Connector Assy	PF06PP6D15				
23	8P Connector Assy	PF08PP-D25	56	Screw	BPZ30P120FTB	
24	Power Knob	DNK4635	57	Screw	BPZ30P080FTB	
25	Door Spring	DBH1565	58	Screw	BBZ30P080FTC	
			59	Screw	BPZ30P080FZK	
26	Card Door	DNK4651	60	Screw	BBZ30P140FTC	
27	Earth Plate 1(CU)	DBK1300				
28	Earth Plate 2(CU)	DBK1301	61	2P Connector	PF02PY-B37	
NSP 29	Silicon Rubber D5 L	DEB1456	62	Laser Caution (7L)	See Contrast table(2)	D
30	Door Cushion	DEB1780	63	Guard Cushion	DEC2984	
			64	Door Plate	DNK4650	
31	Insulation Sheet	DEC2694	65	Shield Sheet Assy	DXB1941	
32	PC Support	DEC2736				
33	Shield Cushion	DEC2905				
34	Gasket L40	DEC2979				

(2) CONTRAST TABLE

DVJ-1000/KUCXJ, /WYXJ5, /TLXJ/RD and TLFXJ types are constructed the same except for the following:

Mark	No.	Symbol and Description	DVJ-1000 /KUCXJ	DVJ-1000 /WYXJ5	DVJ-1000 /TLXJ/RD	DVJ-1000 /TLFXJ	
⚠	7	PSWB ASSY	DWS1392	DWS1396	DWS1396	DWS1396	E
	39	Heat Plate	DNH2744	DNH2749	DNH2750	DNH2750	
	48	Shield Plate 1 Assy	DXB1883	DXB1892	DXB1894	DXB1893	
	62	Laser Caution	DRW2317	DRW2317	DRW2317	VRW2159	

2.3 CONTROL PANEL SECTION

A


B

C

D

E

F

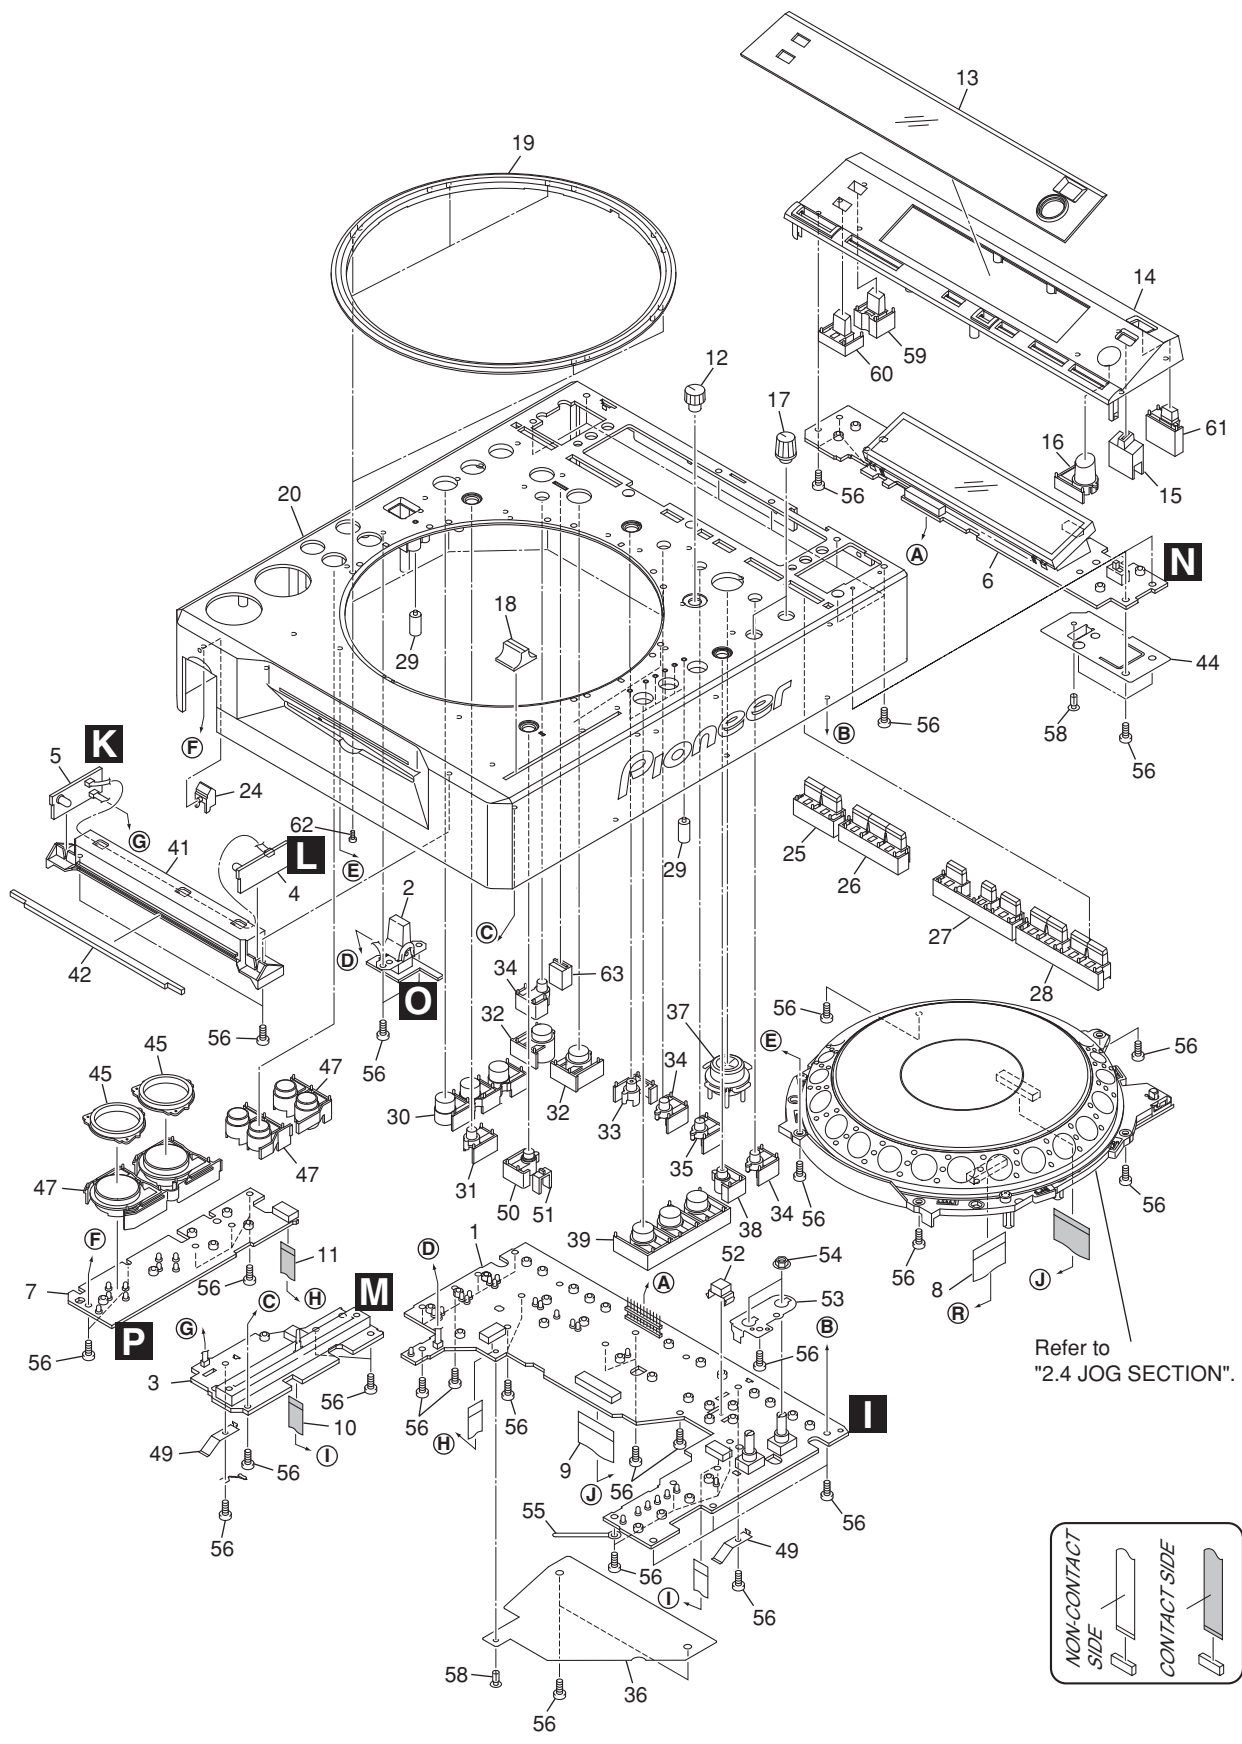

CONTROL PANEL SECTION parts List

Mark No.	Description	Part No.	Mark No.	Description	Part No.
1	DIPB Assy	See Contrast table(2)	33	RELOOP Knob	DAC2325
2	RSWB Assy	DWS1391	34	ENTER Knob	DAC2326
3	SLDB Assy	DWS1393	35	CALL Knob	DAC2323
4	LED 1 Assy	DWG1634			
5	LED 2 Assy	DWG1635	36	Shield Sheet 1	DEC2899
			37	Cross Key	DAC2327
6	DFLB Assy	DWG1632	38	Change Knob	DAC2328
7	KSWB Assy	DWS1394	39	SET Knob (TEMPO)	DAC2329
8	22P FFC/60V	DDD1345	40	• • • •	
9	25P FFC/60V	DDD1346			
10	10P FFC/60V	DDD1347	41	Reflector	DNK4597
			42	Front Lens	DNK4595
11	9P FFC/60V	DDD1348	43	• • • •	
12	Adjust Knob	DAC2350	44	Shield Sheet 2	DEC2909
13	Display Panel(PMMA)	DNK4601	45	Ring Lens	DNK3880
14	Top Panel	DNK4599			
15	Slide SW Knob	DNK4592	46	• • • •	
			47	SET Knob (PLAY) Assy	DXB1912
16	Eject Knob	DAC2335	48	• • •	
17	Rotary Knob	DAA1182	49	Earth Plate (CU)	DBK1224
18	Slide Knob	DAC2376	50	RESET Knob	DAC2330
19	Jog Ring	DNK4600			
20	Control Panel	DNK4598	51	TEMPO RESET Lens	DNK4708
			52	Cross Key Holder	DNK4798
21	• • • •		53	VR Stay	DNF1663
22	• • • •		54	Flange Nut M9	DBN1008
23	• • • •		55	Cord Clamper (steel)	RNH-184
24	Card Lens	DNK4596			
25	SETKnob 1	DAC2331	56	Screw	BPZ30P080FTB
			57	• • • •	
26	SETKnob 2	DAC2332	58	Rivet (PLASTIC)	RBM-003
27	SETKnob 3	DAC2333	59	TIMX Knob	DAC2336
28	SETKnob 4	DAC2334	60	TEXT Knob	DAC2338
29	TEMPO Lens	DNK4593			
30	SET Knob (H. C.)	DAC2321	61	STOP Knob	DAC2354
			62	Screw	OBA8038
31	REC Knob	DAC2322	63	LOOP MODE Lens	DNK4594
32	SET Knob (LOOP)	DAC2324			


(2) CONTRAST TABLE

DVJ-1000/KUCXJ, /WYXJ5, /TLXJ/RD and TLFXJ types are constructed the same except for the following:

Mark	No.	Symbol and Description	DVJ-1000 /KUCXJ	DVJ-1000 /WYXJ5	DVJ-1000 /TLXJ/RD	DVJ-1000 /TLFXJ
	1	DIPB ASSY	DWG1631	DWG1640	DWG1642	DWG1641

4

F





JOG SECTION parts List

Mark No.	Description	Part No.	
1	JFLB Assy	DWG1636	
2	JOGB Assy	DWG1637	A
3	Sheet SW	DSX1065	
4	Connector Assy	PF04PP-B07	
5	Jog Panel (PMMA)	DAH2182	
6	• • • •		
7	JOG Plate	DAH2438	
8	JOG A	DNK4586	
9	JOG B	DNK4557	
10	Protector Sheet	DEC2945	
11	SW Ring	DNK4070	B
12	Roller A Assy	DXB1825	
13	SW Spring 25	DBH1514	
14	Ring Cushion L24/2.0	DEC2958	
15	JOG Stay Assy	DXB1876	
16	JOG Holder 1000	DNK4558	
17	SW Cushion HH48/2	DEC2538	
18	Arm Spring	DBH1566	
19	Gear	DNK4560	
20	ENCORDER Plate	DEC2889	C
21	Gear Arm	DNK4559	
22	Load Gear A	DNK4562	
23	Smoother	DNK4561	
24	Adjust Plate	DNK4178	
25	Gear Spring 200	DBH1525	
26	Washer	WA52D120D025	
27	Screw	IPZ30P100FTC	
28	Screw (FE)	DBA1265	
29	Screw	BPZ20P100FTC	D
30	Screw	BPZ20P060FTC	
31	Screw	BPZ30P080FTB	
32	25P FFC / 60V	DDD1346	
33	FL Sheet	DEC2946	
34	CAM Plate	DNK4567	
35	PRESS Plate	DNK4566	
36	GEAR Plate	DNH2713	
37	Link Gear 3	DNK4565	
38	Link Gear 2	DNK4564	E
39	Link Gear 1	DNK4563	
40	Roller B Assy	DXB1877	

2.5 SLOT-IN MECHANISM SECTION

*1 :  Lubricating oil
GYA1001


*2 :  Daifree
GEM1036

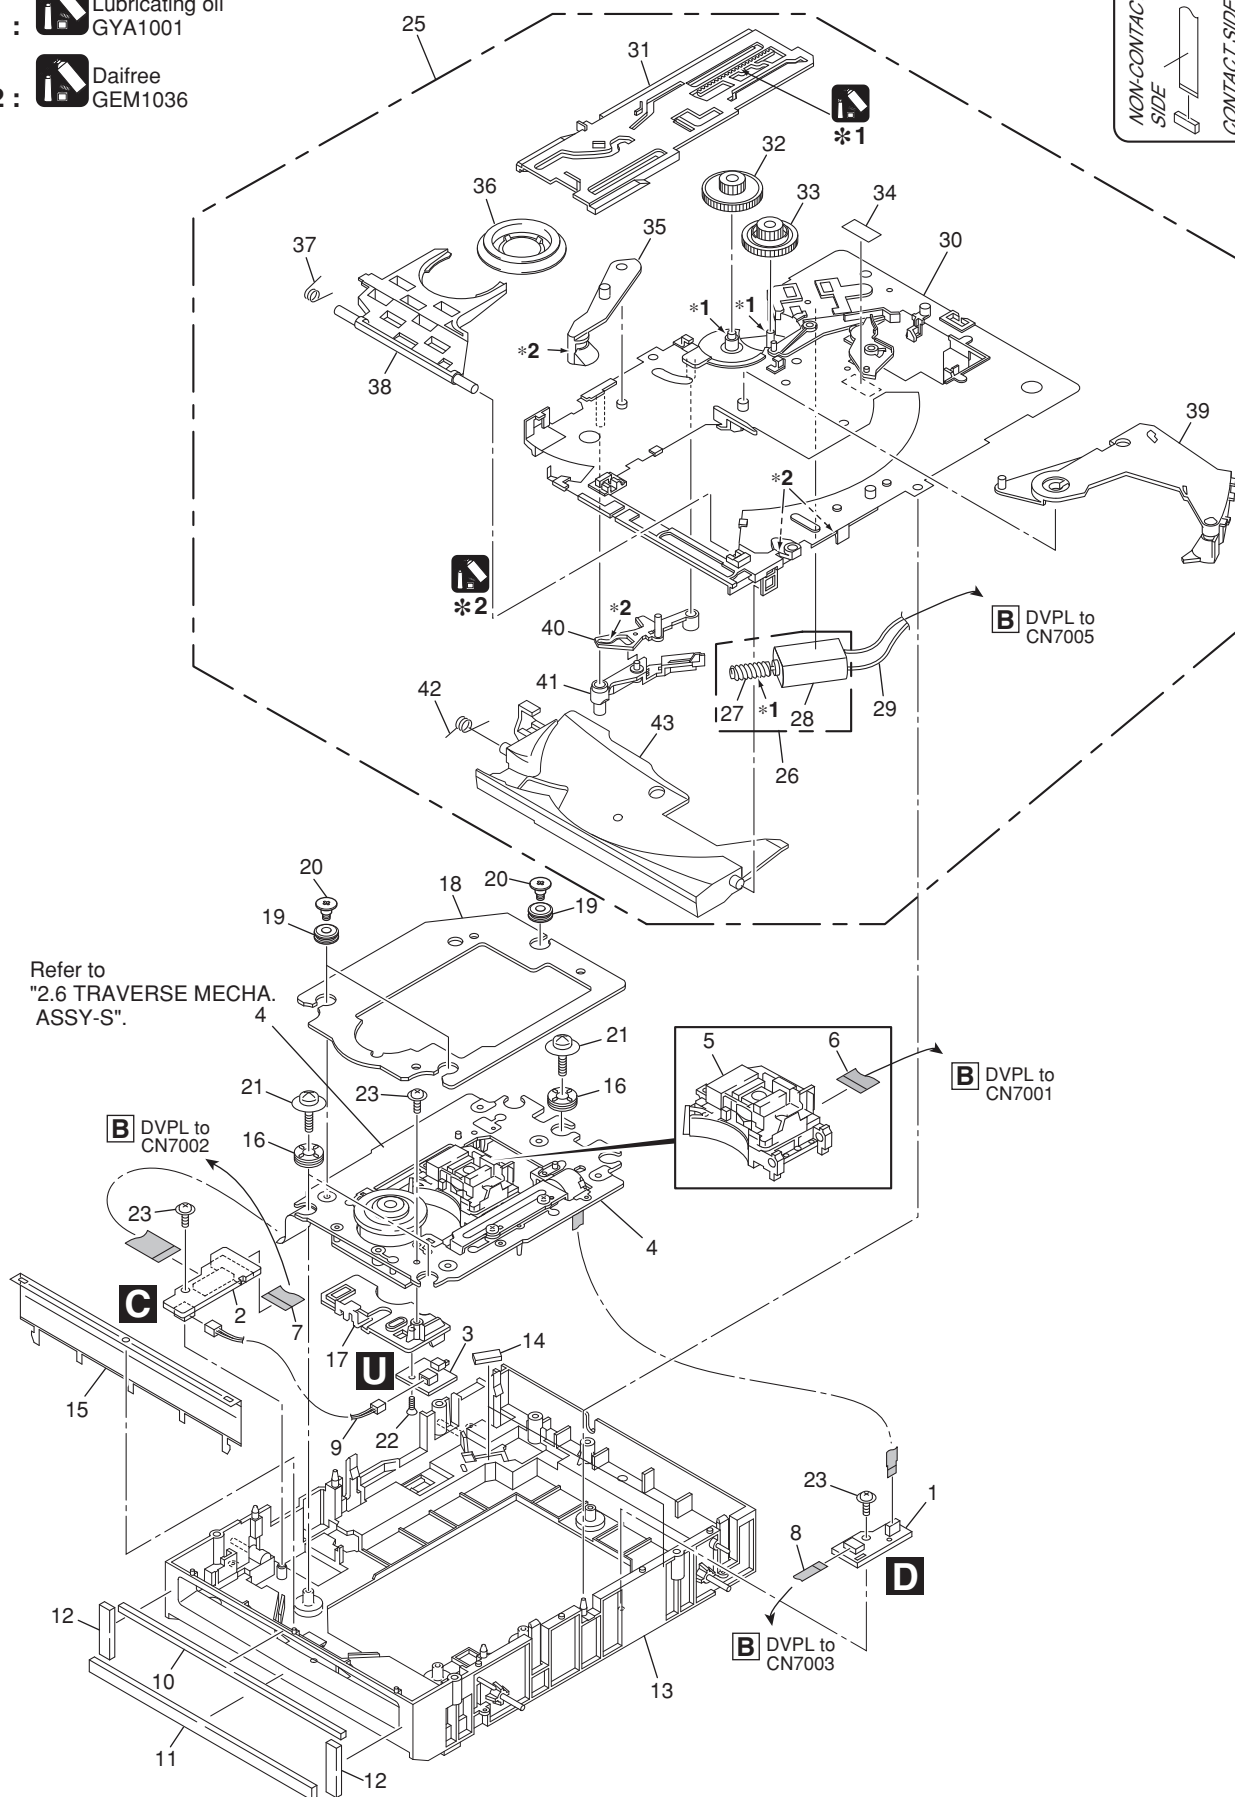

SLOT-IN MECHANISM SECTION parts List

Mark No.	Description	Part No.
1	STCN Assy	DWX2628
2	SPCN Assy	DWX2629
3	INSW Assy	DWS1398
4	Traverse Mechanism G11 Assy-S	DXX2566
NSP 5	Pickup Assy	OWY8071
6	26P Flexible Cable/30V	DDD1337
7	13P Flexible Cable/60V	DDD1339
8	4P Flexible Cable/60V	DDD1340
9	Connector Assy	DKP3769
10	Vessel Cushion A	DEC2852
11	Vessel Cushion B	DEC2853
12	Vessel Cushion C	DEC2854
13	Float Base (G11) Assy	DXB1793
14	Spacer POR (T3)	DEB1566
15	Front Sheet	DED1132
16	Float Rubber D3	DEB1404
17	Inside SW Base	DNK4236
18	Weight G11	DNH2775
NSP 19	DRA Rubber G5	DEB1454
20	DRA Screw R (G7)	DBA1264
21	Float Fastener	DBA1286
22	Screw	VBA1062
23	Screw	IPZ20P060FTC
24		
NSP 25	Slot-in Mechanism G11 assy	DXA2085
26	Loading Motor Assy-S	DEA1008
NSP 27	Worm Gear	DNK3910
NSP 28	DC Motor	DXM1229
29	Connector Assy	PF02PY-B37
30	Loading Base Assy-S	DEA1022
31	Main Cam	DNK3407
32	Driver Gear	DNK3912
33	Loading Gear	DNK3911
34	SW Lever Spacer	DEC2420
35	Loading Lever Assy	DXB1880
36	Clamper D4 Assy	DXA2043
37	Clamper Spring	DBH1374
38	Clamper Arm	DNK3576
39	Eject Lever	DNK3684
40	Lever AP	DNK3835
41	Lever BP	DNK3836
42	Guide Spring	DBH1375
43	Disc Guide	DNK3478

2.6 TRAVERSE MECHA ASSY-S SECTION

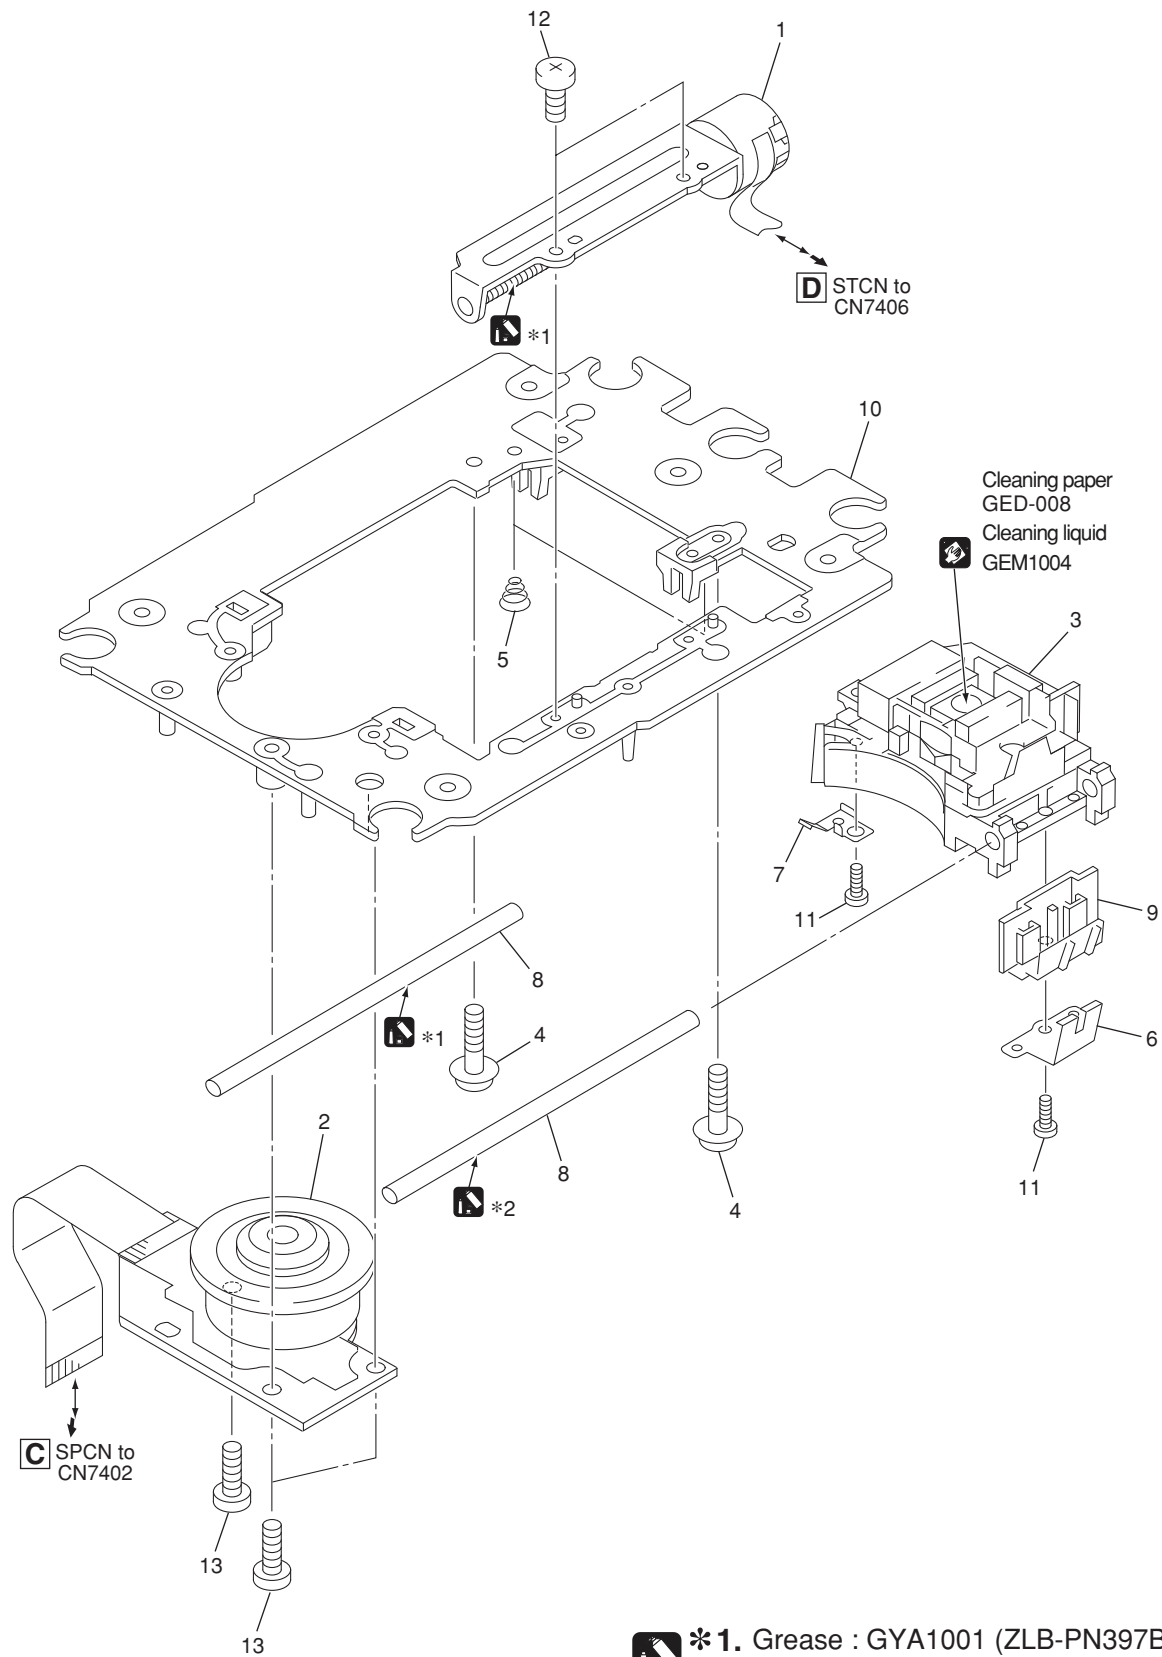

TRAVERSE MECHA ASSY-S SECTION parts List

Mark No.	Description	Part No.	
NSP 1	Spindle Motor	DXM1227	
NSP 2	Stepping Motor	DXM1231	A
NSP 3	Pickup Assy-S	OXX8071	
NSP 4	Skew Screw	DBA1263	
NSP 5	Skew Spring	DBH1437	
NSP 6	Joint Spring	DBK1261	
NSP 7	Leaf Spring G11	DBK1262	■
NSP 8	Guide Bar (S)	DLA1918	
9	Joint	DNK3858	
NSP 10	Mecha.Chassis G11	DNK4307	
11	Tapping Screw 04	VBA1092	B
12	Screw	BPZ20P080FTC	
13	Screw	BPZ26P080FTC	



C



D



E



F

5. PCB PARTS LIST

NOTES: ● Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.

● The Δ mark found on some component parts indicates the importance of the safety factor of the part.

Therefore, when replacing, be sure to use parts of identical designation.

● When ordering resistors, first convert resistance values into code form as shown in the following examples.

Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47k ohm (tolerance is shown by J=5%, and K=10%).

560 Ω $\rightarrow$ 56×10^1 $\rightarrow$ 561 RD1/4PU $\boxed{5}\boxed{6}\boxed{1}\boxed{J}$

47k Ω $\rightarrow$ 47×10^3 $\rightarrow$ 473 RD1/4PU $\boxed{4}\boxed{7}\boxed{3}\boxed{J}$

0.5 Ω $\rightarrow$ R50 RN2H $\boxed{R}\boxed{5}\boxed{0}\boxed{K}$

1 Ω $\rightarrow$ 1R0 RS1P $\boxed{1}\boxed{R}\boxed{0}\boxed{K}$

Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).

5.62k Ω $\rightarrow$ 562×10^1 $\rightarrow$ 5621 RN1/4PC $\boxed{5}\boxed{6}\boxed{2}\boxed{1}\boxed{F}$

■ LIST OF HOLE PCB ASSEMBLIES

Mark	Symbol and Description	DVJ-1000/ /KUCXJ	DVJ-1000/ WYXJ5	DVJ-1000/ TLXJ/RD	DVJ-1000/ TLFXJ
NSP	1..MAIN ASSY	DWG1630	DWG1630	DWG1630	DWG1630
	1..DVPB ASSY	DWM2267	DWM2267	DWM2267	DWM2267
	2..DVPB ASSY	DWX2627	DWX2627	DWX2627	DWX2627
	2..STCN ASSY	DWX2628	DWX2628	DWX2628	DWX2628
	2..SPCN ASSY	DWX2629	DWX2629	DWX2629	DWX2629
	2..SDCB ASSY	DWX2630	DWX2630	DWX2630	DWX2630
NSP	2..INSW ASSY	DWS1398	DWS1398	DWS1398	DWS1398
	1..SUB 1 ASSY	DWM2268	DWM2269	DWM2271	DWM2270
	2..DIPB ASSY	DWG1631	DWG1640	DWG1642	DWG1641
	2..DFLB ASSY	DWG1632	DWG1632	DWG1632	DWG1632
	2..MJCB ASSY	DWG1633	DWG1633	DWG1633	DWG1633
	2..RSWB ASSY	DWS1391	DWS1391	DWS1391	DWS1391
NSP	1..SUB 2 ASSY	DWM2274	DWM2275	DWM2275	DWM2275
	2..LED 1 ASSY	DWG1634	DWG1634	DWG1634	DWG1634
	2..LED 2 ASSY	DWG1635	DWG1635	DWG1635	DWG1635
	2..JFLB ASSY	DWG1636	DWG1636	DWG1636	DWG1636
	2..JOGB ASSY	DWG1637	DWG1637	DWG1637	DWG1637
	2..AUSB ASSY	DWG1638	DWG1638	DWG1638	DWG1638
	2..AJCB ASSY	DWG1639	DWG1639	DWG1639	DWG1639
	2..PSWB ASSY	DWS1392	DWS1396	DWS1396	DWS1396
	2..SLDB ASSY	DWS1393	DWS1393	DWS1393	DWS1393
	2..KSWB ASSY	DWS1394	DWS1394	DWS1394	DWS1394
	2..SLMB ASSY	DWS1395	DWS1395	DWS1395	DWS1395
Δ	1..POWER SUPPLY ASSY	DWR1436	DWR1436	DWR1436	DWR1436

■ CONTRAST OF PCB ASSEMBLIES

I DIPB ASSY

DWG1631, DWG1640, DWG1642 and DWG1641 are constructed the same except for the following :

Mark	Symbol and Description	DWG1631	DWG1640	DWG1642	DWG1641
	R 3014	RS1/16S0R0J	Not used	RS1/16S183J	RS1/16S332J
	R 3013	Not used	RS1/16S0R0J	RS1/16S332J	RS1/16S182J

S PSWB ASSY

DWS1392 and DWS1396 are constructed the same except for the following :

Mark	Symbol and Description	DWS1392	DWS1396
Δ	AN3400 AC INLET ASSY	AKP7032	Not used
Δ	AN3400 1P AC INLEET	Not used	BKP1046

PCB PARTS LIST FOR DVJ-1000 UNLESS OTHER WISE NOTED

Mark No.	Description	Part No.	Mark No.	Description	Part No.
A	A MAIN ASSY		△ IC1507		NJM78L05UA
	MISCELLANEOUS		IC1510		PCM1738EG-3
	L101	LCYA1R5J2520	IC1511,1512		NJM5532MD
	L1701	LCYA2R2J2520	IC1513		PD0274A
	L2004,2010-2013	CTH1254	IC1701		TC7SHU04FUS1
	L2005	ATH7011			
	L2100-2109	CTF1305	IC1702		TC4W53FU
			IC1703		NJU7013F
			IC1707		SM8707HV
	F102,111,112,305	CCG1160	IC2000		EP2C20F484C8N
	F306,501-503,506	CCG1160	IC2001-2004		EDD5108AFTA-6B-E
	F507,701,702,706	CCG1160			
	F901-903,905,1501	CCG1160	△ IC2006,2013,2014		R1224N102H
B	F1502,1703-1706	CCG1160	IC2010		SN0406014PW
			△ IC2011		LP2996M
	F1708-1711,1714,1715	DTF1070	Q1501,1503,1504,1511		2SA1576A
	F2000-2003,2006,2007	CCG1160	Q1506,1509		RN4982
	KN1701-1704	VNF1109			
	VC1701	VCM1012	Q1512,1514		2SA1576A
	X101 CRYSTAL RES. (65.97MHz)	DSS1144	Q1518		2SD2114K
			Q1523,2003		DTC114YK
	X501 CERAMIC OSCILLATOR	DSS1161	Q1701		DTC124EUA
	X1701 CRYSTAL RES. (27MHz)	VSS1146	Q2000		CPH6314
	CN102,1704 PH CNNECTOR	AKM1292			
	CN501 13P FFC CONNECTOR	VKN1305	△ Q2005,2006		2SJ598
	CN701 40P FFC CONNECTOR	VKN1811	D1701		KV1837K
C			D2000,2009,2011		RB051L-40
	CN1701 PH CNNECTOR	DKN1482	D2001,2008,2010		1SS355
	CN1702 10P FFC CNNECTOR	VKN1302			
	CN1703 27P FFC CNNECTOR	VKN1319			
	0 ID LABEL ASSY	VXW1006			
	SEMICONDUCTORS		RESISTORS		
	IC101,102	TC74VHC04FTS1	R102,104-106,113		RAB4C103J
	IC104,110,112,115	TC74LCX541FTS1	R112,203,204		RAB4C560J
	IC105,116,118,123	TC7SH08FUS1	R115-119,123,127		RAB4C220J
	IC106,107	TC7SZ08FU	R120,124,125,145		RAB4C103J
	IC108	TC74LCX16245AFT	R136-138,141-144		RAB4C220J
D					
	IC111	HD6417709SHF200B	R147-154,157,159		RAB4C220J
	IC113	DYW1756	R155,164,167,177		RAB4C103J
	IC114	TC74LCX32FTS1	R161-163,165,166		RAB4C220J
	IC117	BU4230G	R168,176,178-186		RAB4C220J
	IC119,910	TC7SZU04FU	R197,198,202,210		RAB4C220J
	IC120,2012	TC74LCX541FTS1	R220		RS1/16S3300F
△ IC121,902,2005		PQ070XZ02ZP	R229		RS1/16S2700F
IC122,911		TC7SH04FUS1	R232,908,914,2162		RS1/16S1001F
IC124,1514,1515		TC7SH08FUS1	R301,302,306,307		RAB4C220J
△ IC301		MM1562FF	R322,326,327,332		RAB4C220J
	IC303,904-907	K4S641632K-UC75	R336,349,352,357		RAB4C220J
	IC305	M65774BFPA	R365,367,383,385		RAB4C220J
	IC503	TE4300PF	R387,542,543,560		RAB4C220J
△ IC504,1708		MM1561JF	R507,508,563		RAB4C223J
IC505		TMS320DA150PGE16D	R511		RAB4C0R0J
	IC506	DSPD56367PV150	R515,522-524		RAB4C330J
△ IC507		MM1661GH	R573,574,584,586		RAB4C472J
IC103,109,702,703		K4S561632H-UC75	R578,579,704		RAB4C220J
IC701		PE5337B	R701,712,719,727		RAB4C102J
IC903		PD6449A	R703,718,725,733		RAB4C103J
	△ IC912	NJM2872BF33	R709-711,752		RAB4C220J
F	IC1102,2015	TC7WH34FU	R743,744,808,813		RAB4C102J
	IC1104	LM1881M	R758-760,769,776		RAB4C220J
	IC1501,1505	LA73054	R782,789,790,795		RAB4C220J
	IC1502,1506	ADV7172KSTZ	R797,798,802,803		RAB4C220J
			R805,823,830,910		RAB4C220J
			R814		RAB4C102J
			R819-822,824-829		RAB4C560J

5			6			7			8		
Mark No.	Description	Part No.	Mark No.	Description	Part No.	Mark No.	Description	Part No.	Mark No.	Description	Part No.
R911,2003–2019		RAB4C220J	C906,907,986,987		CEHVKW101M6R3						
R921,924,928,931		RAB4C101J									
R925,929,932,937		RAB4C560J	C910–915,917–978		CKSRYB105K6R3						
R933		RAB4C101J	C980–984,990,991		CKSRYB105K6R3						A
R939–944,947,948		RAB4C560J	C992,993		CCSRCH180J50						
R950,954–964		RAB4C560J	C1112,1113,1503,1506		CKSRYB104K16						
R967		RAB4C103J	C1118		DCH1260						
R1504,1513,1515,1549		RS1/16S1500F	C1507,1511–1513,1515		CKSRYB104K16						
R1509,1543		RS1/16S6800F	C1508,1514,1520,1534		CKSRYB103K50						
R1510,1544		RS1/16S5101F	C1509,1530,1546,1580		CEHVW470M10						
R1519		RN1/16SE1602D	C1510,1517,1526,1531		CKSRYB105K10						
R1525,1572		RS1/16S4701F	C1516,1518,1519,1521		CKSRYB104K16						
R1526–1529		RN1/16SE2200D	C1522,1527,1528,1540		CKSRYB104K16						
R1561,1573,1740,1741		RS1/16S1500F	C1541,1627,6157		CEHVW470M6R3						
R1743		RS1/16S3301F	C1543,1544,1552–1556		CKSRYB104K16						B
R2022–2040		RAB4C220J	C1545,1567,1579,1629		CKSRYB103K50						
R2091		RS1/16S1502F	C1547,1557,1575,1581		CKSRYB105K6R3						
R2094		RS1/16S7502F	C1566,1568,1573,1574		CKSRYB104K16						
R2096,2164,2175		RS1/10S100J	C1577,1578,1587,1590		CKSRYB104K16						
R2123–2130		RAB4C221J	C1586,1592,1593,1622		CEHVW470M16						
R2163		RS1/16S1001F	C1588,1603,1619,1740		CEHVKW101M6R3						
R2166,2177		RS1/16S2202F	C1589,1623,1721,6003		CKSRYB105K6R3						
R2170,2171		RS1/16S5102F	C1591,1620,1621,1630		CKSRYB104K16						
Other Resistors		RS1/16S###J	C1614,1616		CCSRCH222J50						
			C1625,1710,1712,1714		CEHVW470M16						
			C1631,1636,1637,1709		CKSRYB104K16						C
			C1711,1713,1715–1717		CKSRYB104K16						
			C1719,1732–1734,1736		CKSRYB104K16						
			C1720		CCSRCH470J50						
			C1723		CCSRCK2R0C50						
			C1725,6005,6007,6015		CKSRYB103K50						
			C1727–1729		CCSRCH221J50						
			C1735		CKSRYB332K50						
			C1737		CKSRYB472K50						
			C1741,1742,5007–5010		CKSRYB104K16						
			C1743		CCSRCH471J50						
			C1794		CCSRCH680J50						D
			C5012–5014,5017–5020		CKSRYB104K16						
			C5024,5037–5039		CKSRYB104K16						
			C5049–5052,5054,5055		CKSRYB104K16						
			C5057,5058,5083–5085		CKSRYB104K16						
			C5201–5209,6004,6010		CKSRYB104K16						
			C6009,6011,6013,6016		CKSRYB105K6R3						
			C6012,6018,6019,6024		CKSQYB106K6R3						
			C6014,6021,6023		CKSRYB104K16						
			C6017,6020,6025,6041		CKSRYB103K50						
			C6022,6029,6039,6043		CKSRYB105K6R3						
			C6026–6028,6030–6036		CKSRYB104K16						E
			C6037,6046,6064		CKSQYB106K6R3						
			C6038,6040,6042,6044		CKSRYB104K16						
			C6045,6047,6054,6058		CKSRYB105K6R3						
			C6048,6051–6053		CKSRYB104K16						
			C6049,6050,6059,6110		CKSRYB103K50						
			C6055–6057,6060–6063		CKSRYB104K16						
			C6065,6178,6186		CCSRCH121J50						
			C6066,6068–6070,6176		DCH1165						
			C6072,6184,6190		CKSQYB104K25						
			C6074–6082,6084,6156		CEHVKW101M6R3						F
			C6104,6106,6107,6109		CKSRYB104K16						
			C6105		CEHVW220M6R3						
			C6111,6113,6117,6119		CKSRYB104K16						

CAPACITORS

C101,102,104–108
C103,164–166,304
C109,110,162,163
C112–114,116–124
C115,312,516,1119

C125,140,159,318
C126–139,141,142
C144–158,170,171
C167
C168

C169
C301–303,305
C306,503,513,515
C313–317,326–331
C333,334,339,340

C343,346–348
C353–355,357,359
C360,369,371–376
C501,916,1731,6008
C502,538,539,546

C504–507,517,543
C508,509,512,514
C518–523,525–537
C540,541,544,545
C542

C547–552,554–557
C558,560,710,734
C559
C561,994,995,1101
C601–604,1610,1612

C701–709,712–728
C729,909,1501,1502
C730–733,736–746
C902,903,908

CKSRYB104K16
CEHVKW101M6R3
CKSRYB105K6R3
CKSRYB104K16
CCSRCH471J50

CKSRYB103K50
CKSRYB104K16
CKSRYB104K16
CCSRCJ3R0C50
CCSRCH5R0C50

CCSRCH102J50
CKSRYB104K16
CEHVKW101M6R3
CKSRYB104K16
CKSRYB104K16

CKSRYB104K16
CKSRYB104K16
CKSRYB104K16
CKSQYB106K6R3
CKSRYB103K50

CKSRYB105K6R3
CKSRYB104K16
CKSRYB104K16
CKSRYB104K16
CKSRYB222K50

CKSRYB104K16
CEHVKW101M6R3
CKSRYB471K50
CKSRYB104K16
CCSRCH222J50

CKSRYB105K6R3
CKSRYB103K50
CKSRYB105K6R3
CKSRYB105K6R3

Mark No. Description**Part No.****Mark No. Description****Part No.**

C6114,6123,6126,6131

CKSRYB105K6R3

C7013,7015,7021,7023

CKSRYB104K16

C6116,6118,6120,6124
C6121,6122,6125,6128
C6127,6129,6132,6140
C6130,6133,6134,6141
C6135-6139,6142,6145CKSRYB103K50
CKSRYB104K16
CKSRYB103K50
CKSRYB104K16
CKSRYB105K6R3C7014,7114,7115,7121
C7016,7204
C7020,7022,7308,7312
C7100,7103,7167
C7104,7300CKSRYB102K50
CCSRCH151J50
CEHVW470M6R3
CKSSYB105K6R3
CKSRYB105K6R3C6143,6146,6147,6151
C6144,6149,6150,6160
C6148,6152,6172,6175
C6153-6155,6158,6159
C6161CKSRYB104K16
CKSRYB103K50
CKSRYB105K6R3
CKSRYB104K16
CKSRYB103K50C7105-7107,7110,7116
C7108,7111,7120,7122
C7109,7211
C7113,7144,7145,7147
C7117,7138,7141,7142CKSRYB104K16
CKSSYB104K10
CKSRYB103K50
CCSRCH101J50
CKSRYB104K16C6162-6171,6195
C6173,6174,6180-6182
C6177,6179,6183,6185
C6187,6188,6192
C6189,6191,6193CKSRYB104K16
CEHVKW101M6R3
DCH1165
DCH1165
CEHVKW101M6R3C7118
C7119,7208,7209
C7123,7135
C7124,7136,7137,7140
C7125CKSRYB122K50
CKSRYB472K50
CKSRYB471K50
CKSRYB182K50
CKSRYB222K50

C6201,6202

CKSRYB105K6R3

C7126
C7127-7130,7132,7165
C7133
C7139,7149,7154
C7148CKSRYB562K50
CKSSYB104K10
CKSRYB474K10
CKSRYB102K50
CCSRCH101J50**B DVPL ASSY
SEMICONDUCTORS**IC7000
IC7100
IC7101
IC7200
⚠ IC7300AN22022A
MN103S71F
PEA008C8
BD7905BFS
MM1478DFBEC7160-7164,7166,7168
C7169
C7170-7173
C7201,7202,7315,7316
C7203,7206,7217,7221CCSSCH221J50
CKSSYB104K10
CCSSCH221J50
CEHVW470M16
CKSRYB104K16⚠ IC7301
Q7001,7002
Q7003
Q7201
Q7202BA15BC0WFP
2SA1577
UM5K1N
DTC124EUA
2SJ598C7205
C7207,7303,7305,7310
C7218-7220
C7301,7304,7306,7307
C7302CCSRCH121J50
CEHVW101M6R3
CKSRYB102K50
CKSRYB104K16
CCH1426

Q7301,7302

DTC114YK

C7309,7313,7317
C7311CKSRYB104K16
CEHVW101M6R3**MISCELLANEOUS**L7101-7116 CHIP BEAD
L7300 CHIP COIL
KN7004 EARTH METAL FITING
X7100 CHIP CERALOCK(16MHz)
CN7001 26P FFC CONNECTORCTF1334
OTL1009
VNF1109
DSS1107
DKN1448CN7002 13P FFC CONNECTOR
CN7003 4P FFC CONNECTOR
CN7004 3P PH CONNECTOR
CN7005 2P PH CONNECTOR
CN7007 40P FFC CONNECTORDKN1275
DKN1288
AKM1289
AKM1288
VKN1811

CN7008 8P PH CONNECTOR

AKM1294

**C SPCN ASSY
MISCELLANEOUS**CN7401 13P FFC CONNECTOR
CN7402 12P FFC CONNECTOR
CN7403 2P ZH CONNECTORDKN1275
DKN1205
VKN1940**D STCN ASSY
MISCELLANEOUS**CN7405 4P FFC CONNECTOR
CN7406 4P FFC CONNECTORDKN1288
VKN1409**E SLMB ASSY
MISCELLANEOUS**S4401,4402 SWICHES
CN4401 KR CONNECTORDSG1017
S3B-PH**F SDCB ASSY
MISCELLANEOUS**CN7501 SD CONNECTOR
CN7502 13P CONNECTOR
S7501 SWICHEDKP3748
VKN1305
CSN1068**RESISTORS**R7010
R7011,7302-7304
R7112
R7114,7115,7201-7203
R7151-7155,7163RS1/4SA120J
RS1/4SA240J
RS1/16S1502F
DCN1143
RAB4C330JR7214,7215
R7221-7223
Other ResistorsRS1/4SA2R0J
DCN1143
RS1/16S###J**CAPACITORS**C7001-7004,7006-7008
C7009
C7010,7112
C7011,7134CKSRYB104K16
CKSRYB561K50
CKSRYB273K16
CKSRYB473K16

5	6	7	8
Mark No. Description	Part No.	Mark No. Description	Part No.
SEMICONDUCTORS			
D7501,7503,7505,7507	DAP202K	C4514	CEAT470M16
D7502,7504,7506,7508	DAN202K	C4516,4517	CCSRCH220J50
D7509	DAN217		
CAPACITORS		H JFLB ASSY	
C7501,7503	CKSRYB104K16	MISCELLANEOUS	
C7504	CEHVW101M6R3	0 FL HOLDER	DNF1735
RESISTORS		SEMICONDUCTORS	
All Resistors	RS1/16S###J	Q4001,4002	2SC1815
		⚠ Q4003	2SD1760F5
		D4002,4003,4005	UDZS9R1(B)
		D4004	1SR154-400
		D4006	PTZ6R8(B)
G MJCB ASSY		MISCELLANEOUS	
SEMICONDUCTORS		V4000 FL TUBE	DEL1058
⚠ IC4500 (250mA)	AEK7002	CN4000 22P FFC CONNECTOR	52492-2220
⚠ IC4501,4510 (800mA)	AEK7008	CN4001 25P FFC CONNECTOR	52492-2520
⚠ IC4502 (2A)	AEK7013	CN4002 CONNECTOR	CKS1072
⚠ IC4503 (315mA)	AEK7003	CN4003 KR CONNECTOR	S4B-PH
⚠ IC4504,4507 (1.6A)	AEK7012		
		RESISTORS	
⚠ IC4505,4506 (2.5A)	AEK7014	R4000	RD1/2VM272J
IC4508	TC7SET08FUS1	R4013,4018	RD1/2VM220J
IC4509	TC7SET04FUS1	R4021-4023	RS1/10S0R0J
⚠ Q4500 MOS FET	CPH3323	Other Resistors	RS1/16S###J
Q4501,4503	2SC1740S		
Q4502	2SD1859X	CAPACITORS	
Q4504	2SC2412K	C4000	CKSRYB103K50
D4500-4503	DF3A5.6FU	C4001	CKSRYB104K50
D4504-4506	1SS355	C4002,4003,4008,4011	CCSRCH221J50
		C4004	CKSRYB102K50
MISCELLANEOUS		C4005,4007,4010,4012	CEHAZL100M50
L4501 CHIP BEAD	VTL1169		
J4501 CONNECTOR ASSY 6P	DKP3771	C4006,4009	CEHAR470M16
J4507 11P CONNECTOR ASSY	DKP3772		
JA4500 2P PIN JACK	VKB1123		
JA4502 4P MINI DIN SOCKET	AKP7116		
		I DIPB ASSY	
JA4503 1P PIN JACK	VKB1074	MISCELLANEOUS	
JA4504 BNC CONNECTOR	DKN1415	X3001 CERAMIC RESO.(16MHz)	DSS1149
CN4500 KR CONNECTOR	B8B-PH	0 2P CABLE HOLDER	51048-0200
CN4502 10P FFC CONNECTOR	VKN1241	CN3005 FFC CONNECTOR 9P	52492-0920
CN4504 KR CONNECTOR	B6B-PH-K-E	CN3004 FFC CONNECTOR 10P	52492-1020
		S3001-S3003, S3007-S3009	DSG1079
CN4505 27P FFC CONNECTOR	VKN1258		
CN4506 9P FFC CONNECTOR	VKN1240	S3004-S3006, S3010-S3014	VSG1024
CN4508 22P FFC CONNECTOR	HLEM22S-1	S3017-S3032, S3102	VSG1024
RESISTORS		CN3002 FFC CONNECTOR 25P	52492-2520
R4509	RD1/2VM470J	CN3001 B TO B CONNECTOR 16P	DKN1468
R4513,4514,4521	RS1/16S1100F	L3002, 3003 CHIP INDUCTOR	CTF1306
R4523-4525,4527	RS1/16S1100F		
R4531	RS1/16S75R0F	L3001 INDUCTOR	LRCA331J
R4534	RS1/16S1801F		
		SEMICONDUCTORS	
R4537	RS1/16S3901F	IC3004	PEG237B
R4542-4548	RS1/16S2000F	IC3009	BU4242G
Other Resistors	RS1/16S###J	Q3002-Q3022	DTC124EUA
CAPACITORS		IC3002, 3007, 3008	TC7SET08FUS1
C4500	CKSRYB103K50	D3005, 3007, 3009, 3011, 3019, 3021	SLI-343URCW(RST)
C4501-4505	CKSRYB104K16		
C4506	CEANP220M10	D3012- 3015, 3022- 3026	SLI-343YYW(RST)
C4507	CEHAT100M50	D3003	SLR-343BBT(HJKL)
C4508-4511,4515	CEAT102M10	D3006, 3008, 3010	SLR-343EBT(KLMN)
		D3016- 3018, 3020	TLGE68TG
C4512	CEAT470M10		
C4513	CEHAT221M25		

Mark No. Description**Part No.****Mark No. Description****Part No.****CAPACITORS**

C3005, 3006
C3002
C3004, 3011
C3012, 3015, 3018, 3020, 3023
C2025, 3047, 3048, 3049, 3050

CCSRCH150J50
CEAT331M10
CEHAT470M16
CKSRYB102K50
CKSRYB102K50

C3051- 3054
C3007, 3009, 3027- 3031, 3036
C3045, 3063, 3065
C3003, 3013, 3014, 3032, 3033
C3010
C3008

CKSRYB102K50
CKSRYB103K50
CKSRYB103K50
CKSRYB104K16
CKSRYB105K10
CKSRYB221K50

RESISTORS

VR3001, VR3002 (10KB)
Other Resistors

DCS1045
RS1/16S###J

**J JOGB ASSY
SEMICONDUCTORS**

D4100

GP1A038RBK

MISCELLANEOUS

CN4100 KR CONNECTOR
All Resistors

B4B-PH
RS1/16S###J

CAPACITORS

C4100,4101

CKSRYB104K16

**K LED2 ASSY
MISCELLANEOUS**

0 2P CABLE HOLDER

51048-0200

SEMICONDUCTORS

D3370

NSPB500-0008

MISCELLANEOUS

All Resistors

RS1/16S273J

CAPACITORS

C3370

CKSRYB103K50

**L LED1 ASSY
MISCELLANEOUS**

0 2P CABLE HOLDER

51048-0200

SEMICONDUCTORS

D3350

NSPB500-0008

RESISTORS

All Resistors

RS1/16S###J

CAPACITORS

C3350

CKSRYB103K50

**M SLDB ASSY
MISCELLANEOUS**

0 2P CABLE HOLDER

51048-0200

SEMICONDUCTORS

Q3300
D3300
D3301-3304

DTC124EUA
TLGE68TG(NP)
1SS355

MISCELLANEOUS

VR3300
VR3301
S3300
CN3300
All Resistors

DCV1013
DCP1105
VSG1024
52492-1020
RS1/16S###J

CAPACITORS

C3300,3303,3304
C3302
C3305

CKSRYB104K16
CKSRYB103K50
CCSRCH101J50

**N DFLB ASSY
MISCELLANEOUS**

0 FL HOLDER

DNF1737

SEMICONDUCTORS

D3202

PTZ11(B)

MISCELLANEOUS

JV3200
S3200
S3201-3204
CN3200
CN3201

DEL1062
DSH1049
VSG1024
S6B-PH
VKN1368

All Resistors

RS1/16S###J

CAPACITORS

C3200
C3201
C3202-3204
C3205
C3206

CCSRCH101J50
CKSRYB103K50
CKSRYB104K16
CEHAT470M50
CEHAT100M50

C3207
C3208-3211

CEHAR470M16
CCSRCH221J50

**O RSWB ASSY
MISCELLANEOUS**

0 2P CABLE HOLDER
S3180

51048-0200
DSK1047

**P KSWB ASSY
SEMICONDUCTORS**

Q4201-4203
D4201-4204
D4207-4209,4211
D4213

DTC124EUA
SLI-343YYW(RST)
SLR-343BBT(HJKL)
TLGE68TG(NP)

MISCELLANEOUS

S4201,4202 SWITCH
S4203-4206 SWITCH
CN4201 9P FFC CONNECTOR
All Resistors

DSG1079
VSG1024
52492-0920
RS1/16S###J

5	6
Mark No.	Description
Part No.	
CAPACITORS	
C4203-4206	CKSRYB103K50
C4209,4210,4212	CCSRCH101J50

Q AUDB ASSY SEMICONDUCTORS

IC4300	NJM4580D
⚠ IC4301	NJM2374AM
Q4304	DTA124EUA
Q4305	DTC124EUA
D4301-4303	1SS355
D4309	EC10QS04
D4310	1SR154-400
D4313	EP05Q04

MISCELLANEOUS

L4300	INDUCTER	DTL1122
CN4300	KR CONNECTOR	S6B-PH
CN4301	9P FFC KR CONNECTOR	VKN1269
CN4302	B TO B CONNECTOR	VKN1362

RESISTORS

R4300,4301,4314,4315	RN1/16SE4702D
R4302,4303,4306-4309	RN1/16SE3301D
R4310,4311,4338,4339	RN1/16SE1002D
R4331,4337	RS1/16S5101F
R4334	RS1/16S2202F
R4342,4343	RN1/16SE4702D
R4344,4345	RN1/16SE3301D
Other Resistors	RS1/16S###J

CAPACITORS

C4300,4301,4303,4305	CEAT101M50
C4302	CEAT471M25
C4304	CEAT221M16
C4306,4307	CQMBA561J50
C4308-4311,4321	CCSRCH220J50
C4312,4313,4323	CKSRYB104K16
C4322	CCSRCH181J50
C4324,4326,4327	CEHAT101M16
C4325	CEHAT330M25
C4328,4329	CEAT101M50

R AJCB ASSY SEMICONDUCTORS

Q4302,4303,4306,4307	2SD2144S
D4304,4311,4312	1SS355
D4305,4306	UDZS5R6(B)
D4308	NNCD6.2MF

MISCELLANEOUS

JA4300	2P PIN JACK	DKB1074
JA4301	REMOTE CONTROL JACK	RKN1004
S4300	SWITCH	DSH1025
CN4303	B TO B CONNECTOR	DKN1477

7	8
Mark No.	Description
Part No.	
RESISTORS	
R4329	RD1/2VM271J
Other Resistors	RS1/16S###J

CAPACITORS

C4314,4315	CQMBA102J50
C4316,4317	CKSRYB103K50
C4318,4319	CKSRYB104K16

S PSWB ASSY MISCELLANEOUS

⚠ AN3400	1P AC INLET	BKP1046
⚠ J3400	CONNECTOR ASSY	DKP3779
⚠ S3400	AC SWITCH	DSA1029

U INSW ASSY MISCELLANEOUS

S7404	CSN1031
CN7404	VKN1940

T POWER SUPPLY ASSY

There is no service parts.