EXPLODED VEIW / PARTS LIST

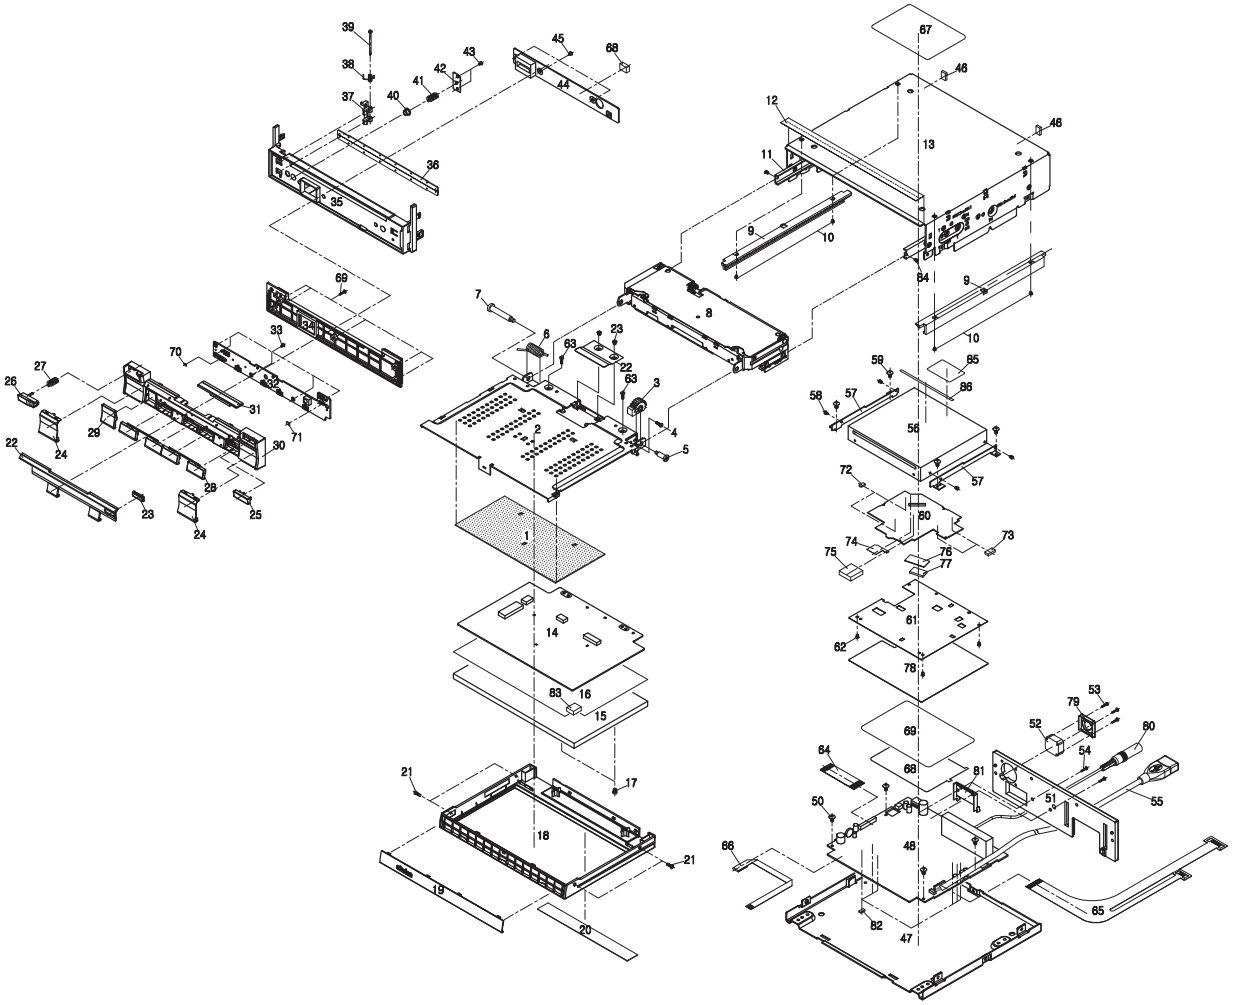

NO.	PARTS	CODE NO.	MATERIAL	Q'TY	REMARKS
1	MONITOR REAR FELT	5461-682-001	FELT 0.2t, 142x74	1	
2	MONITOR REAR CH.	5213-682-002	CR 1.0t, BK	1	
3	GEAR MONITOR	5184-682-001	"M62700115"	1	
4	SCREW (MACHINE)	5619-320-060	CH M2x6, NI(Ø3.5)	1	
5	SCREW MONITOR	5610-326-087	M2.6x8.7x3.5	1	
6	SPRING MONITOR	5361-682-003	Ø7.6x16.3xØ1.4	1	
7	SCREW LCD	5610-326-266	"M8SPSS026-005"	1	
8	TILT MECHA	2054-270-301	'SHT-2703'-1DIN	1	
9	RACK LOAD-L/R	5179-682-003	POM, MILKY	1	
10	SCREW (MACHINE)	5619-320-025	CH M2x2.5(Ø3), NI	4	
11	MECHA GUIDE BRK'T-L/R	5222-682-002/003	EGI 1.0t, (149x10x3.5)	1	
12	CH TOP SHEET	5554-682-005	PVC 0.08t, BK	1	
13	TOP CHASSIS	5213-682-001	EGI 1.0t	1	
14	LCD PCB	0114-682-030	QC6825K-A	1	
15	LCD MODULE	1273-682-001	AU "A070FW03"	1	
16	PANEL SHEET	5554-682-002	PET 0.2t, 투명	1	
17	SCREW	5619-320-030	CH M2x3(Ø3), NI	2	
18	MONITOR FRONT	5114-682-003	PC+ABS, BK	1	
19	MONITOR BRAND PLATE	5215-682-103	AL 0.5t BK(ASIA)	1	VRX575USB
20	MONITOR BRAND SHEET	5554-682-103	PC 0.5t, SILVER	1	
21	SCREW (MACHINE)	5619-220-030	CH M2x3, BK	4	
22	ES FRONT DECO.	5122-682-002	PC+ABS, SILVER	1	
23	SENSOR FILTER	5142-682-001	PC SENSOR	1	
24	ES AL PLATE-L	5215-682-001	AL 0.5t, BLACK	2	
25	CD EJECT BUTTON	5134-682-005	PC+ABS, SILVER	1	
26	RELEASE BUTTON	5134-682-004	PC+ABS, SILVER	1	
27	RELEASE SPRING	5361-682-001	COMPRESS SPRING	1	120gf
28	FUNCTION KNOB-L/R	5134-682-002/003	PC MILKY	1	
29	VOLUME KNOB	5134-682-001	PC MILKY	1	
30	ESCUTCHEON FRONT	5114-682-002	PC+ABS, BK	1	
31	REFLECTOR TRIM	5176-682-001	PC MILKY	1	
32	KEY PCB	0114-682-040	QC6825K-A	1	
33	SCREW (TAPPING)	5621-320-050	WPHT2 2x5, NI	5	
34	ESCUTCHEON REAR	5214-682-002	PC+ABS, BK	1	
35	ESCUTCHEON	5114-682-001	PC+ABS, BK	1	
36	CHAMUDE FELT(7")	5469-682-001	0.5t+PVC 0.3t	1	
37	OPEN LOCK	5179-682-001	PC+ABC, BK	1	
38	OPEN LOCK SPRING	5361-682-002	Ø3.4x6.8xØ0.6	1	
39	OPEN LOCK PIN	5331-682-001	BS, BLSCK	1	
40	OPEN TENSION	5179-682-002	PC+ABS, BK	1	
41	RELEASE SPRING	5361-682-001	COMPRESS SPRING	1	
42	OPEN TENSION BRK'T	5222-682-001	EGI 0.5t	1	
43	SCREW (TAPPING)	5629-320-040	CHT2 2x4(Ø3), NI	2	

NO.	PARTS	CODE NO.	MATERIAL	Q'TY	REMARKS
44	FRONT PCB	0114-682-050	QC6825K-A	1	
45	SCRW (MACHINE)	5618-220-030	WPH M2x3, BK	3	
46	CUSHION MECHA	6161-682-003	PORON 2t	2	
47	CHASSIS BOTTOM	5461-682-003	EGI T1.0	1	
48	MAIN PCB ASSY	0114-682-110	QC6825B-A	1	
49	MAIN PCB SHEET	5554-682-006	PET T0.2, 투명	1	
50	SCREW (MACHINE)	5472-682-001	BH M2.6 X 4NI	4	
51	HEAT SINK	5241-682-001	DIE-CASTING T5	1	
52	FAN	2081-682-001	F2510CT-05UCV	1	
53	SCREW (MACHINE)	5611-326-150	BH M2.6 x 15NI	3	FAN FIX
54	SCREW MACHINE	5611-326-120	BH M2.6 x 12NI	2	POWER IC FIX
55	CABLE USB	2141-682-004	"JT-USA8004-010"	1	
56	DECK ASSY	1914-700-001	"DVX-700"	1	
57	DECK BRACKET L/R	5221-700-001/002	EGI T1.0	1	
58	SCREW (MACHINE)	5472-682-001	BH M2.6 x 4NI	4	BRCK FIX
59	SCREW (MACHINE)	5472-682-001	BH M2.6 x 4NI	4	DECK FIX
60	DECK PCB	0114-682-120	QC6825B-A	1	
61	DECK PCB COVER	5154-700-001	ET0.3T	1	
62	SCREW (MACHINE)	5612-326-020	M2.6x2(H:0.6T)	4	COVER FIX
63	SCREW (TAPPING)	5629-220-060	CH 2x6(Ø3.5), BK	4	
64	FLEXIBLE CABLE(28P)	2133-682-281	1.0P, L=70mm	1	
65	FPC CABLE	2149-700-001	107x209x0.08t	1	
66	FLEXIBLE CABLE(10P)	2133-682-101	0.5P, L=150mm	1	
67	SPEC PLATE(ASIA)	6234-682-001	ART PAPER 0.1t(WHITE)	1	
68	EMI GASKET-1	5479-682-003	FABRIC FOAM(9x10x6t)	1	
69	SCREW (TAPPING)	5629-220-050	CH 2x5(Ø3.5), BK	5	
70	VOL.TACT SHEET	5554-682-004	PET 0.2t, BK	1	
71	EMI GASKET-3	5479-682-005	FABRIC FOAM(3x3x1t)	1	
72	THERMAL PAD-4	6151-700-003	(3x5x1t)	2	
73	THERMAL PAD-2	6151-700-002	(5x15x1t)	2	
74	DECK PCB SHEET-2	5531-700-003	PC 0.18T, BK(25x17)	1	
75	THERMAL PAD-1	6151-700-001	(20x20x2t)	1	
76	DECK PCB SHEET-1	5531-700-002	PC 0.18T, BK(15x30)	1	
77	DECK CUSHION(EVA)	6161-682-005	EVA 2.5t(10x20)	1	
78	DECK COVER SHEET	5531-700-004	PET 0.2T(139x127.6)	1	
79	FAN BRACKET	5222-682-004	EGI 0.5t(26.6x26.6x5)	1	
80	ANT. CABLE ASS'Y	2141-682-002	PVE, 200mm	1	
81	POWER IC BRK'T	5222-682-005	EGI 0.8t(31x24.5)	1	
82	THERMAL PAD-3	5421-682-001	(5x7x2.5t)	6	
83	EMI GASKET-2	5479-682-002	FABRIC FOAM(5x5x3t)	1	
84	SCREW (MACHINE)	5619-320-035	CH M2x3.5, NI(Ø3.5)	2	
85	DECK TOP SHEET	5531-700-001	PC 0.5t, BK(40x30)	1	
86	FPC CABLE SHEET	8931-700-002	PC 0.5t, BK(7x100)	1	

ELECTRICAL PART LIST

PART CODE	DESCRIPTION	Q'TY [EA]	REF No.
	MAIN PWB ASS'Y SECTION		
0114-682-110	**MAIN PWB ASSY**	**1**	
9114-682-010	**MAIN PWB T/UP ASSY**	**1**	
1253-141-001	DIODE WSP-141N	1	D12
1291-840-001	TUNER AM/FM	1	TUNER1
1862-224-921	TAP, 5.5V, 0.22F-M, SCDCS5R5224	1	C158
1862-228-961	KMG25VN2200M, 25V 2200uF 12.5*25 105℃	1	C8
1961-121-201	BUZZER HSE-1212S	1	BZ1
2115-200-034	CONN, R-Angle,2.0,SMAW200-34C,YEONHO	1	J2
2141-254-001	CONNECTOR-POWER WS25401615 , JOINTEC	1	J1
0124-682-110	**MAIN PWB REF ASSY**	**1**	
1114-682-010	MAIN PWB(WITHOUT COMPONENT)	1	
1211-033-001	IC Voltage Regulator, BA033CC0FP, ROHM	1	U29
1211-050-001	IC Voltage Regulator, BA05CC0FP, ROHM	1	U8
1211-111-718	IC LDO REGULATORS,1.8V/1A, AMS1117-1.8, AMS	1	U15
1211-457-001	IC Voltage Regulator, MIC4576WU, MICREL	1	U24
1211-500-001	IC Voltage Regulator, BA50DD0WHFP, ROHM	2	U26, U27
1211-900-001	IC Voltage Regulator, BA90DD0WHFP, ROHM	4	U16,U19,U22,U25
1212-290-001	IC AUDIO POWER, TB2906HQ, TOSHIBA	1	U80
1213-154-001	IC VIDEO LINE DRIVER, TK15420MI, TOKO	1	U14
1213-205-001	IC QUAD OP AMP, NJM2058V, JRC	1	U49
1213-240-001	IC EEPROM, BR24L04FV-W, ROHM	1	U46
1213-312-001	IC Ground Isolation AMP, BA3121F, ROHM	1	U32
1213-390-001	IC SST39VF1601-70-4I-EKE, FLASH-ROM, SST	1	U36
1213-405-001	IC 4-CH MULTIPLEXER, NJU4052BV, JRC	1	U45
1213-405-002	IC 2-CH MULTIPLEXER, NJU4053BV, JRC	1	U48
1213-453-001	IC 2-CH MULTI/Demultiplexer,TC4W53F,TOSHIBA	1	U47
1213-456-001	IC OP AMP, BA4560RFVM, ROHM	1	U6
1213-458-001	IC DUAL OP AMP, NJM4580V, JRC	8	U10,U11,U13,U17,U21,U28,U30,U33
1213-570-001	IC ANALOG SEMI CUSTOM LSI, UPC5701GR, NEC	1	U23
1213-615-001	IC ELECTRONIC Volume, M61523FP, RENESAS	1	U1
1213-640-001	IC SDRAM,64MB, IS42S16400D-7TLI, ISSI	1	U18
1213-700-001	IC 2-INPUT NAND GATE, KIC7S00FU, KEC	1	U38
1213-702-501	IC LDO REGULATORS, KIA7025AT, KEC	1	Q17
1213-704-201	IC LDO REGULATORS, KIA7042AT, KEC	1	Q54
1213-708-001	IC AND GATE, TC7S08FU, TOSHIBA	2	U31, U43
1213-732-001	IC 2-INPUT OR GATE, KIC7S32FU, KEC	1	U37
1213-761-001	IC VIDEO, BA7613F, ROHM	1	U2
1213-765-001	IC VIDEO, BA7652AF, ROHM	1	U3
1213-780-051	IC LDO REGULATORS, KIA78L05F, KEC	1	U40
1213-852-001	IC STEREO DAC, WM8521H9, WOLFSON	1	U9
1213-862-001	IC POWER SWITCH, RYC8620-2M, TYCO	1	U39
1213-925-001	IC DTS PLL, TC9257F, TOSHIBA	1	U4
1214-780-001	IC MICOM, RF8879-627, UPD78F1165_14*20, NEC	1	U5
1214-860-001	IC MICOM FOR HOST PLAYER,TCC8600, TELECHIPS	1	U7
1245-106-001	TR-CHIP KRC106S, NPN TR, KEC	9	Q2,Q11,Q14,Q32,Q38,Q41,Q50,Q65,Q66
1245-202-201	TR-CHIP KTC2022D, NPN TR, KEC	5	Q5,Q10,Q29,Q43,Q49
1245-222-202	TR-CHIP KTN2222S, NPN TR, KEC	2.0	Q9,Q37
1245-231-001	TR-CHIP KRC231S, NPN TR, KEC	8	Q18,Q19,Q23,Q24,Q25,Q26,Q44,Q45
1245-387-501	TR-CHIP KTC3875, NPN TR, KEC	10	Q1,Q4,Q6,Q8,Q15,Q20,Q21,Q22,Q28,Q39
1246-103-002	TR-CHIP KRA103S, PNP TR, KEC	3	Q36,Q61,Q63
1246-104-201	TR-CHIP KTA1042D, PNP TR, KEC	1	Q40
1246-106-001	TR-CHIP KRA106S, PNP TR, KEC	4	Q3,Q46,Q47,Q48
1246-150-401	TR-CHIP KTA1504, PNP TR, KEC	2	Q7, Q35
1246-166-301	TR-CHIP KTA1663, PNP TR, KEC	4	Q12,Q13,Q34,Q42
1246-173-001	TR-CHIP 2SA1736, PNP TR, TOSHIBA	2	Q67,Q68
1247-220-001	TR-CHIP UMD22N, DUAL DIGITAL TR, ROHM	1	Q27
1247-300-001	TR-CHIP UMH3N, DUAL DIGITAL TR, ROHM	1	Q16
1251-111-001	DIODE SMALL S-MINI TYPE, MA111, PANASONIC	1	D9
1251-154-400	DIODE 1SR154_400, ROHM	2	D10,D89
1251-184-001	DIODE KDS184, KEC	1	D62
1251-245-001	DIODE RLS245, ROHM	9	D2,D4,D5,D7,D20,D21,D32,D86,D88
1251-355-001	DIODE 1SS355, ROHM	16	D11,D28,D29,D40,D50,D73,D85,D87,D92,D93,D94,D95,D96,D97,D98,D99
1252-100-001	DIODE ZENER UDZS10B, ROHM	1	D78
1252-110-001	DIODE ZENER UDZS11B, ROHM	1	D8
1252-470-001	DIODE ZENER UDZS4.7B, ROHM	1	D15
1252-560-001	DIODE ZENER UDZS5.6B, ROHM	2	D16,D18
1252-620-001	DIODE ZENER UDZS6.2B, ROHM	26	D17,D35,D54,D55,D56,D57,D58,D59,D60,D61,D63,D64,D65,D66,D67,D68,D69,D70,D71, D72,D76,D79,D80,D81,D82,D83
1252-750-001	DIODE ZENER UDZS7.5B, ROHM	12	D3,D30,D31,D38,D39,D41,D42,D47,D48,D49,D53,D74
1252-910-001	DIODE ZENER UDZS9.1B, ROHM	2	D13, D91
1255-214-001	DIODE DO-214AC, FORWARD CURRENT, SK38A	1	D14
1255-729-001	DIODE KDR729, KEC	5	D1,D19,D51,D59,D75
1351-072-001	X-TAL 7.2MHz, HC-49US,18pF±30PPM,	1	Y1
1351-120-001	X-TAL 12MHz,18pF ±20PPM,	1	Y6
1351-200-001	X-TAL 20MHz, 18pF +-30PPM.	1	Y3
1351-327-681	X-TAL 32.768KHz, SSP-T7-F, SEIKO	1	Y5
1416-121-001	FERRITE BEAD-CHIP CIM21U121NE, SEM	2	BD77,BD80
1416-601-001	FERRITE BEAD-CHIP CIM21U601NE, SEM,	39	BD3,BD4,BD5,BD6,BD7,BD9,BD10,BD11,BD12,BD13, BD14,BD15,BD16,BD32,BD34,BD35,BD43,BD45,BD46,BD48B,D50,BD51,BD54,BD55,B D56,BD57,BD58,BD59,BD60,BD66,BD67,BD68 BD70,BD71,BD72,BD73,BD74,BD75,BD82
1416-601-002	FERRITE BEAD-CHIP MPZ2012S601A, TDK	3	BD22,BD44,BD47
1417-310-001	FERRITE BEAD-CHIP CIB31P310NE, SEM	1	BD39
1417-601-001	FERRITE BEAD-CHIP CIM31U601NE, SEM	7	BD37,BD38,BD40,BD63,BD64,BD65
1448-106-701	INDUCTOR-CHIP NLV32T-100J, TDK	1	L7
1448-107-701	INDUCTOR-CHIP NLV32T-101J, TDK	2	L17, L26
1448-335-701	INDUCTOR-CHIP NLV32T-3R3J, TDK	3	L1,L3,L4

PART CODE	DESCRIPTION	Q'TY [EA]	REF No.
1448-564-701	INDUCTOR-CHIP NLV32T-R56J, TDK	4	L27,L28,L29,30
1449-107-002	INDUCTOR-POWER 100uH, SM1208MCR,C&T Korea	1	L6
1745-000-001	1608, 1/16, 0-F	44	R21,R22,R53,R59,R60,R64,R69,R70,R72,R116,R124,R171,R212,R215,R216,R222,R223,R240,R242,R243,R258,R259,R269,R317,R377,R378 R392,R393,R397,R491,R492,R493,R497,R499,R500,R501,R545,R700,R701,R702,R703,R718,R719,R295
1745-100-711	1608, 1/16, 10-J	3	R35,R324,R414
1745-101-711	1608, 1/16, 100-J	38	R1,R51,R67,R104,R105,R113,R133,R137,R138,R153,R154,R170,R172,R174,R183,R184,R197,R217,R218,R220,R221,R225,R226,R228 R270,R275,R294,R302,R303,R333,R337,R385,R386,R387,R437,R439,R464,R518
1745-102-711	1608, 1/16, 1K-J	60	R2,R6,R10,R13,R27,R38,R56,R97,R119,R120,R121,R122,R130,R135,R143,R144,R151,R155,R159,R160,R164,R165,R188,R189,R224,R252,R253,R299,R300 R307,R308,R314,R319,R330,R331,R336,R339,R342,R350,R351,R358,R359,R360,R364,R365,R370,R371,R383,R384,R389,R390,R434,R435,R450,R451,R452,R453,R454,R463,R546
1745-103-711	1608, 1/16, 10K-J	45	R9,R16,R17,R25,R26,R43,R57,R73,R74,R75,R76,R85,R195,R206,R207,R210,R268,R276,R278,R285,R286,R292,R316,R323,R325,R326,R329 R432,R433,R446,R447,R448,R449,R459,R460,R469,R472,R494,R503,R505,R508,R509,R511,R514,R528
1745-104-711	1608, 1/16, 100K-J	18	R7,R48,R102,R117,R132,R201,R272,R273,R279,R290,R318,R356,R357,R388,R423,R486,R487,R515
1745-105-711	1608, 1/16, 1M-J	4	R29,R166,R232,R297
1745-122-711	1608, 1/16, 1.2K-J	14	R111,R112,R229,R254,R255,R256,R257,R265,R341,R343,R456,R457,R482,R483
1745-123-711	1608, 1/16, 12K-J	1	R373
1745-124-711	1608, 1/16, 120K-J	1	R28
1745-151-711	1608, 1/16, 150-J	2	R173,R321
1745-152-711	1608, 1/16, 1.5K-J	5	R175,R177,R361,R362,R496
1745-153-711	1608, 1/16, 15K-J	2	R114,R150
1745-183-711	1608, 1/16, 18K-J	2	R436,R470
1745-202-711	1608, 1/16, 2K-J	1	R322
1745-203-711	1608, 1/16, 20K-J	2	R455,R458
1745-220-711	1608, 1/16, 22-J	4	R379,R380,R405,R406
1745-222-711	1608, 1/16, 2.2K-J	10	R24,R46,R199,R204,R238,R274,R332,R334,R368,R369
1745-223-711	1608, 1/16, 22K-J	16	R8,R91,R92,R93,R94,R95,R96,R106,R107,R262,R263,R502,R504,R506,R507,R526
1745-224-711	1608, 1/16, 220K-J	4	R108,R348,R349,R381
1745-273-711	1608, 1/16, 27K-J	1	R40
1745-330-711	1608, 1/16, 33-J	2	R398,R399
1745-331-711	1608, 1/16, 330-J	12	R30,R50,R180,R181,R211,R233,R400,R401,R402,R403,R404,R425
1745-332-711	1608, 1/16, 3.3K-J	9	R66,R250,R251,R442,R443,R444,R445,R524,R525
1745-334-711	1608, 1/16, 330K-J	1	R327
1745-392-711	1608, 1/16, 3.9K-J	2	R363,R366
1745-393-711	1608, 1/16, 39K-J	1	R335
1745-430-711	1608, 1/16, 43-J	1	R62
1745-471-711	1608, 1/16, 470-J	3	R213,R214,R320
1745-472-711	1608, 1/16, 4.7K-J	39	R5,R19,R45,R54,R77,R78,R79,R80,R88,R118,R125,R134,R176,R198,R205,R208,R230,R231,R234,R235,R245,R264,R277,R283,R340,R344,R345 R346,R347,R367,R372,R374,R375,R395,R471,R473,R474,R476,R495
1745-473-711	1608, 1/16, 47K-J	53	R3,R4,R14,R15,R36,R37,R42,R47,R49,R55,R65,R68,R71,R89,R90,R103,R126,R127,R128,R131,R147,R148,R163,R169,R178,R192,R193,R219,R227,R266
			R267,R281,R284,R289,R291,R296,R311,R312,R354,R355,R394,R412,R416,R418,R419,R426,R461,R462,R467,R478,R521,R522,R123
1745-515-711	1608, 1/16, 5.1M-J	1	R413
1745-561-711	1608, 1/16, 560-J	3	R98,R200,R328
1745-562-711	1608, 1/16, 5.6K-J	18	R141,R142,R145,R146,R157,R158,R161,R162,R186,R187,R190,R191,R304,R305,R306,R310,R484,R485
1745-622-711	1608, 1/16, 6.2K-J	8	R136,R139,R152,R156,R182,R185,R301,R309
1745-625-711	1608, 1/16, 6.2M-J	1	R417
1745-680-711	1608, 1/16, 68-J	1	R298
1745-681-711	1608, 1/16, 680-J	1	R396
1745-750-711	1608, 1/16, 75-J	3	R86,R109,R376
1745-752-711	1608, 1/16, 7.5K-J	1	R287
1745-822-711	1608, 1/16, 8.2K-J	1	R481
1745-823-711	1608, 1/16, 82K-J	4	R260,R261,R352,R353
1746-000-722	2012, 0Ω, 1/8W, MCR10EZPJ000	12	BD69,R704,R705,R706,R707,R708,R709,R710,R711,R712,R713,R720
1747-000-732	3216, 0Ω, 1/4W, MCR18EZPJ000	4	R99,R715,R716,R717
1747-102-732	3216, 1K, 1/4W, MCR18EZPJ102	8	R23,R167,R168,R271,R315,R407,R408,R411
1747-103-732	3216, 10K, 1/4W, MCR18EZPJ103	3	R32,R33,R44
1747-122-732	3216, 1.2K, 1/4W, MCR18EZPJ122	4	R424,R427,R527,R529
1747-1R5-732	3216, 1.5J, 1/4W, MCR18EZPJ1R5	8	R11,R12,R61,R140,R288,R293,R519,R520
1747-222-732	3216, 2.2K-J, 1/4W, MCR18EZPJ222	4	R415,R420,R421,R422
1747-750-732	3216, 75-J, 1/4W, MCR18EZPJ750	1	R209
1749-2R2-742	5025, 2.2, 1/2W, MCR50JZHJ2R2	1	R722
1749-2R7-742	5025, 2.7, 1/2W, MCR50JZHJ2R7	1	R723
1789-101-711	MNR14EOAPJ100, 100-J, ROHM	11	NR8,NR9,NR14,NR15,NR16,NR17,NR18,NR19,NR20,NR21,NR22
1789-102-711	MNR14EOAPJ102, 1K-J, ROHM	7	NR4,NR5,NR6,NR7,NR10,NR13,NR23
1789-224-791	VARISTOR-CHIP, Potentiometer	1	R58
1795-472-576	THERMISTROR-CHIP	1	TS1
1845-030-791	1608, 50V, CH, 3pF-Z	1	C145
1845-070-791	1608, 50V, C0G, 7pF-J	2	C332,C333
1845-100-791	1608, 50V, C0G, 10pF-J	2	C205,C206
1845-102-791	1608, 50V, C0G, 1nF-J	18	C123,C124,C125,C330,C501,C502,C503,C504,C505,C507,C510,C511,C512,C513,C514,C515,C516,C517
1845-103-791	1608, 50V, C0G, 10nF-J	7	C20,C25,C28,C66,C130,C261,C386
1845-104-791	1608, 50V, C0G, 100nF-J	99	C4,C6,C10,C13,C17,C29,C30,C31,C35,C36,C37,C39,C40,C45,C46,C47,C55,C56,C60,C64,C73,C119,C134,C140,C146,C149,C150,C151,C156,C159,C161,C162,C165,C166,C170,C172,C173,C175,C179,C194,C199,C202,C208 C220,C221,C222,C223,C224,C225,C229,C230,C231C232,C238,C239,C240,C246,C252,C256,C257,C260,C264,C266,C267,C268,C269,C280,C284,C309,C310,C312,C313,C314,C315,C316,,C317,C320,C322,C324,C326,C327 C328,C329,C350,C374,C389,C394,C395,C396,C397,C398,C399,C400,C401,C402,C403,C404,C405,C500
1845-105-791	1608, 50V, C0G, 1uF-J	1	C336

PART CODE	DESCRIPTION	Q'TY [EA]	REF No.
1845-106-791	1608, 50V, C0G, 10uF-J	2	C187,C200
1845-120-791	1608, 50V, C0G, 12pF-J	2	C241,C242
1845-122-791	1608, 50V, C0G, 1.2nF-J	1	C341
1845-220-791	1608, 50V, C0G, 22pF-J	9	C19,C127,C128,C167,C168,C249,C250,C337,C338
1845-222-791	1608, 50V, C0G, 2.2nF-J	2	C163,C164
1845-223-791	1608, 50V, C0G, 22nF-J	27	C26,C27,C34,C59,C63,C84,C110,C118,C122,C139,C157,C183,C216,C219,C228,C234, C235,C245,C253,C279,C281,C283,C285,C287,C385,C388,C391
1845-270-791	1608, 50V, C0G, 27pF-J	17	C210,C212,C213,C214,C215,C227,C259,C270,C271,C274,C288,C289,C290,C291,C292 C294,C295
1845-361-791	1608, 50V, C0G, 360pF-J	1	C263
1845-470-791	1608, 50V, C0G, 47pF-J	10	C42,C68,C106,C109,C114,C115,C135,C136,C299,C302
1845-472-791	1608, 50V, C0G, 4.7nF-J	4	C32,C33,C190,C191
1857-105-981	3216, 35V, 1uF-M	3	C18,C57,C169
1857-106-951	3216, 16V, 10uF-M	20	C15,C41,C78,C79,C80,C81,C99,C132,C133,C148,C171,C174,C203,C204,C207,C254,C 304,C321,C331,C349
1857-224-981	3216, 35V, 0.22uF-M	1	C262
1857-225-951	3216, 16V, 2.2uF-M	4	C14,C16,C67,C129
1857-475-951	3216, 16V, 4.7uF-M	62	C61,C72,C74,C75,C76,C77,C85,C86,C87,C88,C89,C90,C91,C92,C93,C94,C95,C96,C97, C98,C104,C105,C107,C108,C112,C113,C116,C117,C120,C121 C137,C138,C188,C189,C195,C196,C243,C244,C247,C248,C275,C276,C277,C278,C297 C298,C300,C301,C305,C306,C307,C308,C371,C372,C393,C406,C407,C408,C409,C410 C411,C412
1859-106-986	6032, 35V, 10uF-M	2	C11,C311
1859-107-936	6032, 10V, 100uF-M	5	C5,C44,C323,C344,C345
1859-107-957	7343, 16V, 100uF-M	13	C1,C21,C22,C23,C58,C62,C154,C155,C160,C176,C184,C265,C286
1859-226-953	3528, 16V, 22uF-M	7	C2,C43,C70,C82,C142,C144,C293
1859-227-937	7343, 10V, 220uF-M	7	C12,C71,C102,C152,C233,C237,C251
1859-476-933	3528, 10V, 47uF-M	5	C24,C131,C143,C201,C325
1859-476-956	6032, 16V, 47uF-M	5	C69,C83,C100,C185,C209
1861-104-991	4*5, 50V 0.1uF, MVG50VCR1MD56	1	C38
1861-106-951	4*5, 16V, 10uF, MVG35VC10MD56	2	C9,C153
1861-106-981	4*5, 35V 10uF, MVG35VC10MD56	2	C318,C319
1861-336-961	5*5, 25V 33uF, MVG25VC33ME56	1	C7
1862-227-951	10.3mm, 16V, 220uF, MVG16VC10MD56	1	C258
1862-227-961	8*10, 25V 220uF, MVG25VC220MH10	2	C217,C255
1862-337-961	10.3mm, 25V, 330uF, MVG25VC330MD56	2	C3,C218
1862-477-931	8*10, 10V 470uF, MVG16VC470MH10	2	C147,C226
2113-545-501	CONN, ZIF, R/Angle,10P, 0.5, 54550-1094, MOLEX	1	J13
2113-622-428	CONN, ZIF R/Angle,28P, 6224-028-001-800, KYO	1	J3
2113-627-440	CONN, ZIF, 40P, 0.5, 04-6274-040-000-800, KYO	1	J8
2115-125-051	CONN, 5P, 1.25, 12505WS-05, YOENHO	1	J5
2115-533-914	CONN,14P, 1.25, 53398-1471,MOLEX	1	J11
2115-533-982	CONN, 2P, 1.25, 53398-0271,MOLEX	1	J4
2115-533-987	CONN, 7P, 1.25, 53398-0771,MOLEX	1	J6
	MONITOR PWB(B2) SECTION		
0164-682-110	**MONITOR ASSY**	**1**	
0144-682-130	**MONITOR PWB T/UP ASSY**	**1**	
5114-682-003	CASE MONITOR FRONT	1	
5215-682-103	PLATE MONITOR BRAND-USA	1	HAIR-LINE,ANODIGING,DIE-CUTTING
5514-682-001	SHEET LCD 7" PROTECTION	1	
5554-682-103	SHEET MONITOR BRAND USA/EU/ITALY	1	SPRAY 1DEGREE ,SILKPRINT 1DEGREE(DIGITAL VIDEO)
5619-220-030	SCREW-M	4	MONITOR FRONT+MONITOR REAR CH.(4)
5619-320-035	SCREW-M	2	MECHA ASS'Y FOR SECESSION CHECK(2)
5629-220-060	SCREW-TAP	2	MONITOR FRONT+MONITOR REAR CH.(2)
9164-682-010	**LCD ASSY**	**1**	
1273-682-001	DISPLAY-LCD	1	FROM V1, CHANGE TO V6
2091-682-001	TOUCH SCREEN 7"	1	
2141-682-001	CABLE LCD GROUND 7"	1	
5479-682-002	GASKET EMI	1	
5479-682-003	GASKET EMI	1	FOR MONITOR PWB
5554-682-001	SHEET-INSULATOR	1	
5554-682-002	SHEET PANEL	1	
5619-320-020	SCREW-M	1	GROUND WIRE+LCD DISPLAY
5619-320-030	SCREW-M	2	MONITOR REAR CH.+MONITOR PWB(2)
0114-682-030	**MONITOR PWB REF ASSY**	**1**	
1114-682-030	MONITOR PWB(WITHOUT COMPONENT)	1	
1211-111-718	IC LDO REGULATORS,1.8V/1A, AMS1117-1.8, AMS	1	U4
1211-111-733	IC LDO REGULATORS,3.3V/1A, AMS1117-3.3, AMS	2	U3,U6
1211-111-750	IC LDO REGULATORS, 5V/1A, AMS1117-5.0, AMS	1	U2
1212-236-001	IC DC/DC Converter, NJM2360AM, JRC	1	U5
1213-371-501	IC PWM Controller, BIT3715, BIT	1	U8
1213-704-201	IC LDO REGULATORS, KIA7042AT, KEC	1	Q13
1214-880-601	IC LCD Controler, TW8806, TECHWELL	1	U1
1245-222-204	TR MMBT2222, FIRECHILD	2	Q4,Q6
1246-290-701	TR MMBT2907, FAIRCHILD	2	Q3,Q5
1247-220-001	TR UMD22N, DUAL DIGITAL TR, ROHM	1	Q14
1247-230-001	TR APM2301	1	Q1
1247-241-001	TR 2SC2412K, ROHM	5	Q2,Q7,Q8,Q9,Q11
1247-450-001	TR AP4503GM, APEC	1	Q12
1248-303-001	TR FDV303N, FAIRCHILD	2	Q15,Q16
1251-217-001	DIODE DAN217U, ROHM	1	D2
1251-355-001	DIODE 1SS355, ROHM	6	D1,D5,D12,D13,D14,D15
1252-100-001	DIODE UDZS10B, ROHM	1	D3
1252-150-001	DIODE UDZS15B, ROHM	1	D11
1252-620-001	DIODE UDZS6.2B, ROHM	9	D6,D7,D8,D9,D10,ZD3,ZD4,ZD5,ZD6
1252-750-001	DIODE UDZS7.5B, ROHM	2	ZD1,ZD2
1336-500-001	MEM2012T50R0T, TDK	1	FT1
1351-270-001	X-TAL 27MHz,HC-49,±20PPM	1	X1
1416-330-001	FERRITE BEAD-CHIP CIB21P330NE, SEM	10	BD1,BD2,BD3,BD4,BD8,BD11,BD12,BD13,BD14, BD15
1416-601-002	FERRITE BEAD-CHIP MPZ2012S601A, TDK	3	BD6,BD7,BD17

PART CODE	DESCRIPTION	Q'TY [EA]	REF No.
1448-107-801	INDUCTOR-CHIP NLCV32T-101K, TDK	1	L1
1448-125-701	INDUCTOR-CHIP NLV32T-1R2J, TDK	1	L8
1448-226-801	INDUCTOR-CHIP NLCV32T-220K, TDK	3	L2,L3,L4
1448-335-901	INDUCTOR-CHIP NLCV32T-3R3K, TDK	2	L10, L11
1448-476-801	INDUCTOR-CHIP NLCV32T-470K, TDK	1	L7
1449-157-901	INDUCTOR-POWER YP-1035R-151M, YEWON	4	L5,L6,L15,L16
1471-700-401	TRANS-INVERTER M-7004WI, 1:18, 2:2200, WorldElec	1	T1
1745-000-001	1608, 1/16, 0-F	15	R1,R5,R11,R21,R24,R25,R28,R29,R35,R60,R73,R74,R75,R103,R156
1745-101-711	1608, 1/16, 100-J	17	R141,R142,R143,R144,R145,R146,R147,R148,R149,R151,R152,R153,R154,R155,R80,R88,R95
1745-102-711	1608, 1/16, 1K-J	5	R6,R18,R105,R114,R136
1745-103-711	1608, 1/16, 10K-J	8	R4,R17,R33,R63,R64,R69,R72,R133
1745-105-711	1608, 1/16, 1M-J	1	R32
1745-122-711	1608, 1/16, 1.2K-J	1	R118
1745-153-711	1608, 1/16, 15K-J	1	R15
1745-200-711	1608, 1/16, 20-J	2	R157,R158
1745-202-711	1608, 1/16, 2K-J	1	R8
1745-203-711	1608, 1/16, 20K-J	1	R65
1745-221-711	1608, 1/16, 220-J	1	R119
1745-223-711	1608, 1/16, 22K-J	4	R79,R87,R94,R128
1745-224-511	1608, 1/16, 220K-F	1	R123
1745-243-711	1608, 1/16, 24K-J	1	R9
1745-272-711	1608, 1/16, 2.7K-J	1	R31
1745-303-511	1608, 1/16, 30K-F	1	R115
1745-330-711	1608, 1/16, 33-J	1	R150
1745-331-711	1608, 1/16, 330-J	3	R76,R84,R91
1745-333-711	1608, 1/16, 33K-J	1	R121
1745-390-711	1608, 1/16, 39-J	1	R62
1745-471-711	1608, 1/16, 470-J	3	R38,R39,134
1745-472-711	1608, 1/16, 4.7K-J	16	R19,R20,R22,R23,R36,R37,R40,R41,R81,R82,R85,R89,R92,R96,R106,R107
1745-473-711	1608, 1/16, 47K-J	5	R42,R43,R77,R83,R90
1745-474-711	1608, 1/16, 470K-J	1	R132
1745-561-711	1608, 1/16, 560-J	4	R78,R86,R93,R135
1745-683-511	1608, 1/16, 68K-F	1	R117
1745-683-711	1608, 1/16, 68K-J	1	R122
1745-750-711	1608, 1/16, 75-J	2	R27,R30
1745-820-711	1608, 1/16, 82-J	1	R125
1745-822-711	1608, 1/16, 8.2K-J	1	R16
1746-000-001	2012, 1/8, 0-F	2	R3,R139
1789-102-711	MNR14EOAPJ102, 1K-J, ROHM	7	AR1,AR2,AR3,AR4,AR5,AR6,AR13
1789-103-791	3Ø, 10K, PVZ3G103C01,MURATA	1	R66
1789-303-791	3Ø, 33K, PVZ3G333C01,MURATA	1	R68
1789-472-711	MNR14EOAPJ472, 4.7K-J, ROHM	5	AR8,AR9,AR10,AR11,AR12
1845-070-861	1608, 25V, CH, 7pF-K	3	C38,C39,C40
1845-101-861	1608, 25V, CH, 100pF-K	10	C80,C82,C85,C87,C89,C91,C127,C136,C137,C138
1845-102-861	1608, 25v, CH, 1nF-K	1	C131
1845-103-861	1608, 25V, CH, 10nF-K	2	C68,C69
1845-104-951	1608, 16V, X7R, 100nF-M	46	C12,C13,C14,C15,C16,C19,C20,C21,C23,C26,C27,C28,C29,C30,C41,C46,C48,C49,C50,C51,C52,C53,C58,C59,C60,C61,C62,C73,C75,C77,C94,C95,C96,C98,C99,C100,C101,C102,C111,C113, C116,C128,C133,C134, C135,C141
1845-105-851	1608, 16V, CH, 1uF-K	5	C104,C105,C106,C118,C132
1845-153-861	1608, 25V, X7R, 15nF-K	1	C117
1845-180-861	1608, 25V, CH, 18pF-K	1	C44
1845-220-861	1608, 25V, CH, 22pF-K	2	C65,C66
1845-221-861	1608, 25V, CH, 220pF-K	1	C36
1845-223-861	1608, 25V, X7R, 22nF-K	3	C71,C121,C129
1845-270-861	1608, 25V, CH, 27pF-K	1	C139
1845-301-861	1608, 25V, CH, 300pF-K	1	C17
1845-331-861	1608, 25V, CH, 330pF-K	4	C54,C55,C56,C57
1845-392-861	1608, 25V, CH, 3.9nF-K	1	C130
1845-471-861	1608, 25V, CH, 470pF-K	4	C107,C108,C109,C110
1845-823-961	1608, 25V, X7R, 82nF-M	2	C63,C64
1846-105-862	2012, 25V, CH, 1uF-K, TDK	3	C31,C33,C35
1846-474-851	2012, 16V, CH, 470nF-K	3	C119,C123,C126
1846-475-951	2012, 16V, CH, 4.7uF-M	1	C24
1847-475-862	3216, 25V, X7R, 4.7uF-K, TDK	1	C124
1849-150-904	4520,3000V, CH, 15pF-K	1	C122
1857-106-951	3216, 16V, 10uF-M	21	C6,C7,C8,C25,C37,C45,,C70,C72,C76,C78,C79,C81,,C83,C84,C86,C88,C90,C92,C112,,C114,C115
1859-106-953	3528, 16V, 10uF-M	7	C9,C10,C11,C47,C67,C93,C97
1859-107-957	7343, 16V, 100uF-M	13	C1,C2,C3,C4,C5,C18,C32,C42,C43,C74,C125,C142,C143
1859-226-966	6032, 25V, 22uF-M	2	C22,C34
2113-040-711	CONN, ZIF, R/Angle, 4P, 1.0, 52271-0471,MOLEX	1	CON4
2113-260-051	CONN, ZIF, R/Angle, 26P, 0.5, 52435-2672,MOLEX	1	CON1
2113-260-052	CONN, ZIF, R/Angle, 26P, 0.5, 52437-2671,MOLEX	1	CON3
2135-040-351	CONN, ZIF, R/Angle, 2P, 3.5, SM02B-BHSS-1-TB	1	CON5
DVD MECH ASSY / DVD PWB(B3) SECTION			
0134-682-110	**DVD MECH ASSY**	**1**	
9134-682-010	**DVD PWB T/UP ASSY**	**1**	
1914-700-001	DVD DECK DVX-700, KOMEC	1	
2149-700-001	CABLE-FPC	1	
5154-682-001	COVER MONITOR REAR CH	1	
5154-700-001	COVER-DECK PWB	1	
5221-700-001	DECK-BRACKET L	1	
5221-700-002	DECK-BRACKET R	1	
5421-700-001	PAD THERMAL	1	FOR DECK PWB(U2)
5421-700-002	PAD THERMAL	2	FOR DECK PWB(U4,U5)
5421-700-003	PAD THERMAL	2	FOR DECK PWB(U1,U12)
5441-682-004	CUSHION-DECK(EVA)	1	FOR DECK SHEET
5531-700-001	SHEET-DECK TOP	1	FOR UPSIDE DECK

PART CODE	DESCRIPTION	Q'TY [EA]	REF No.
5531-700-002	SHEET-DECK PWB-1	1	FOR DECK PWB
5531-700-005	SHEET FPC CABLE	1	FOR UPSIDE DECK, FOR FPC CABLE
5610-326-020	SCREW-M	4	DECK+DECK PWB COVER(4)
5616-226-050	SCREW-M	2	ESCUTCHEON+DECK ASS'Y(2)
5616-326-040	SCREW-M	12	DECK+DECK BRK'T(4),DECK BRK'T+CH.BOTTOM(4),CH.TOP+CH.BOTTOM(4)
5616-326-060	SCREW-M	4	CHASSIS TOP+HEAT-SINK(4)
5619-220-030	SCREW-M	2	MONITOR REAR CH.+MONITOR REAR CH.COVER(2)
5619-220-035	SCREW-M	2	ESCUTCHEON+CHASSIS TOP LEFT/RIGHT(2)
5619-320-030	SCREW-M	4	DECK+DECK PWB(4)
8931-700-002	TAPE-FPC CABLE	1	FOR FPC CABLE
0114-682-120	**DVD PWB REF ASSY**	**1**	
1114-682-020	DVD PWB(WITHOUT COMPONENT)	1	
1211-111-002	IC LDO REGULATORS, IP1117L_ADJ, INTERPION	2	U1,U12
1212-240-001	IC EEPROM, AT24C02-2KB, ATMEL	1	U9
1213-080-001	IC FLASH-ROM, 8MB, EN29LV800BB70TIP, EON	1	U6
1213-340-001	IC DUAL OP AMP, NJM3404AM, JRC	1	U3
1213-450-001	IC 5-CH MOTOR DRIVER, IP4504AL, IITERPION	1	U5
1213-640-001	IC SDRAM,64MB, IS42S16400D-7TLI, ISSI	1	U7
1213-684-001	IC MOTOR DRIVER, BA6849FP, ROHM	1	U4
1214-500-001	IC MPEG CHIP, S5L5009, SAMSUNG	1	U2
1245-162-301	TR-CHIP KSC1623GMTF, NPN TR, FAIRCHILD	6	Q1,Q5,Q6,Q7,Q10,Q12
1246-103-001	TR-CHIP KRC103S, PNP TR, KEC	3	Q2,Q3,Q4
1246-103-002	TR-CHIP KRA103S, PNP TR, KEC	1	Q11
1246-118-201	TR-CHIP KSA1182YMTF, PNP TR, FAIRCHILD	2	Q8,Q9
1251-154-400	DIODE 1SR154_400, ROHM	2	D2,D5
1251-160-001	DIODE KDS160, USC, KEC	2	D6,D7
1275-152-001	IR15-21C/L10,IR-LED 2012 EVERLIGHT	2	D3,D4
1351-270-001	X-TAL 27MHz,HC-49,±20PPM	1	X1
1415-330-001	FERRITE BEAD-CHIP CIB10P330NC, SEM	2	FB1, R135
1416-330-001	FERRITE BEAD-CHIP CIB21P330NE, SEM	5	L1,L2,L6,L7,L17
1446-106-801	INDUCTOR-CHIP MLF2012E1000KT000, TDK	5	L3,L4,L5,L19,L20
1745-000-001	1608, 1/16, 0-F	12	R34,R35,R47,R59,R68,R69,R106,R122,R123,R124,BD1,BD2
1745-100-511	1608, 1/16, 10-F	4	R82,R83,R87,R88
1745-101-711	1608, 1/16, 100-J	8	R100,R102,R113,R128,R129,R130,R132,R133
1745-102-511	1608, 1/16, 1K-F	4	R30,R40,R42,R126
1745-102-711	1608, 1/16, 1K-J	2	R60,R64
1745-103-511	1608, 1/16, 10K-F	5	R11,R27,R28,R33,R38
1745-103-711	1608, 1/16, 10K-J	11	R3,R24,R25,R96,R97,R104,R107,R108,R109,R110,R134
1745-104-711	1608, 1/16, 100K-J	7	R8,R32,R48,R53,R54,R85,R105
1745-105-711	1608, 1/16, 1M-J	1	R95
1745-113-711	1608, 1/16, 11K-J	4	R37,R86,R89,R93
1745-121-711	1608, 1/16, 120-J	3	R80,R81,R118
1745-152-711	1608, 1/16, 1.5K-J	1	R94
1745-153-511	1608, 1/16, 15K-F	1	R67
1745-153-711	1608, 1/16, 15K-J	3	R22,R114,R115
1745-1R1-511	1608, 1/16, 1-F	6	R41,R44,R45,R46,R77,R111
1745-221-511	1608, 1/16, 220-F	2	R55,R58
1745-222-711	1608, 1/16, 2.2K-J	5	R31,R50,R51,R62,R66
1745-223-711	1608, 1/16, 22K-J	2	R6.R92
1745-241-711	1608, 1/16, 240-J	2	R78,R79
1745-303-511	1608, 1/16, 30K-F	4	R43,R56,R57,R63
1745-331-711	1608, 1/16, 330-J	1	R120
1745-332-711	1608, 1/16, 3.3K-J	6	R4,R16,R19,R21,R90,R121
1745-333-511	1608, 1/16, 33K-F	2	R10,R26
1745-391-711	1608, 1/16, 390-J	1	R29
1745-393-711	1608, 1/16, 39K-J	1	R49
1745-471-511	1608, 1/16, 470-F	2	R84,R91
1745-471-711	1608, 1/16, 470-J	1	R119
1745-472-511	1608, 1/16, 4.7K-F	1	R112
1745-472-711	1608, 1/16, 4.7K-J	8	R2,R7,R13,R17,R23,R98,R99,R103
1745-473-511	1608, 1/16, 47K-F	3	R1,R39,R52
1745-473-711	1608, 1/16, 47K-J	3	R12,R61,R65
1745-510-711	1608, 1/16, 51-J	1	R117
1745-512-711	1608, 1/16, 5.1K-J	2	R18,R20
1745-750-711	1608, 1/16, 75-J	4	R70,R71,R72,R131
1745-822-711	1608, 1/16, 8.2K-J	2	R5,R15
1745-823-711	1608, 1/16, 82K-J	2	R9,R116
1845-101-791	1608, 50V, C0G, 100pF-J	2	C15,C45
1845-102-791	1608, 50V, C0G, 1nF-J	12	C3,C4,C51,C53,C54,C55,C59,C74,C75,C87,C89,C134
1845-103-791	1608, 50V, C0G, 10nF-J	2	C19,C22
1845-104-791	1608, 50V, C0G, 100nF-J	57	C2,C5,C6,C7,C8,C10,C11,C13,C16,C17,C18,C20,C21,C25,C26,C27,C28,C29,C31,C32,C33,C34,C35,C36,C37,C38,C39 C40,C41,C42,C43,C44,C47,C48,C57,C58,C60,C61,C63,C68,C69,C70,C71,C72,C73,C76,C77,C78,C81,C83,C85,C90,C96,C97,C102,C107,C133
1845-151-791	1608, 50V, C0G, 150pF-J	2	C86,C88
1845-152-891	1608, 50V, X7R, 1.5nF-K	2	C64,C67
1845-180-711	1608, 50V, CH, 18pF-K	1	C129
1845-182-891	1608, 50V, X7R, 1.8nF-K	1.0	C62
1845-202-891	1608, 50V, X7R, 2.0nF-K	2	C49,C52
1845-222-791	1608, 50V, C0G, 2.2nF-J	3	C1,C23,C24
1845-224-891	1608, 50V, X7R, 220nF-K	2	C46,C66
1845-270-711	1608, 50V, CH, 27pF-K	2	C79,C80
1845-272-891	1608, 50V, X7R, 2.7nF-K	1	C84
1845-333-891	1608, 50V, X7R, 33nF-K	1	C50
1845-334-891	1608, 50V, X7R, 330nF-K	1	C65
1845-472-791	1608, 50V, C0G, 4.7nF-J	1	C14
1845-821-891	1608, 50V, X7R, 820pF-K	1	C56
1857-106-951	3216, 16V, 10uF-M	2	CPE14,CPE15
1859-106-953	3528, 16V, 10uF-M	6	CPE9,CPE11,CPE13,CPE20,CPE22,CPE23
1859-107-857	7343, 16V, 100uF-K	4	CPE3,CPE10,CPE16,CPE17
1859-476-833	3528, 10V, 47uF-K	1	CPE12

PART CODE	DESCRIPTION	Q'TY [EA]	REF No.
1859-476-933	3528, 10V, 47uF-M	6	CPE1,CPE2,CPE4,CPE5,CPE6,CPE7
1859-476-956	6032, 16V, 47uF-M	1	CPE8
2113-201-050	CONN, ZIF,R/Angle,20P,0.5,SFV20R-1STE1LF, FCI	1	CN10
2113-242-050	CONN, ZIF,R/Angle,24P,0.5,SFV24R-2STE1LF, FCI	1	CN2
2113-622-406	CONN, ZIF R/Angle,6P, 6224-006-001-800 KYO	1	CN4
2113-622-428	CONN, ZIF R/Angle,28P, 6224-028-001-800, KYO	1	CN1
	FRONT PWB(B4) SECTION		
0144-682-010	**FRONT ASSY**	**1**	
9144-682-010	**FRONT PWB T/UP ASSY**	**1**	
5114-682-001	ESCUTCHEON	1	
5179-682-001	LOCK OPEN	1	
5179-682-002	TENSION OPEN	1	
5222-682-001	BRACKET OPEN TENSION	1	
5331-682-001	PIN OPEN LOCK	1	FOR OPEN LOCK(1)
5361-682-001	SPRING-RELEASE	1	
5361-682-002	SPRING-OPEN LOCK	1	
5469-682-001	FELT-CHAMUDE 7″	1	
5479-682-003	GASKET EMI	1	FOR FRONT PWB
5618-220-030	SCREW-M	3	ESCUTCHEON+FRONT PWB(3)
5629-320-040	SCREW-TAP	2	ESCUTCHEON+OPEN TENSION BRK'T(2)
0114-682-050	**FRONT PWB REF ASSY**	**1**	
1114-682-050	FRONT PWB(WITHOUT COMPONENT)	1	
1252-620-001	DIODE ZENER UDZS6.2B, ROHM	1	D1
1675-010-002	SW-TACT SKQGABE010, ALPS	1	SW1
1845-104-951	1608, 16V, X7R, 100nF-M	1	C1
2113-545-501	CONN, ZIF, R/Angle,10P, 0.5, 54550-1094, MOLEX	1	J1
2141-144-402	CONN, 12FPP1443X, JOINTEC	1	J3
	KEY PWB(B4) SECTION		
0154-682-020	**KEY ASSY**	**1**	
9154-682-020	**KEY PWB T/UP ASSY**	**1**	
5114-682-002	ESCUTCHEON FRONT	1	
5116-682-001	ESCUTCHEON REAR	1	
5122-682-002	DECO ESCUTCHEON FRONT	1	
5134-682-001	KNOB VOLUME SEESAW TYPE	1	
5134-682-002	KNOB FUNCTION L	1	FOR SOUND/ADJ, URETHANE COATING
5134-682-003	KNOB FUNCTION R	1	FOR SOURCE/OPEN, URETHANE COATING
5134-682-004	BUTTON RELEASE	1	
5134-682-005	BUTTON CD EJECT	1	
5142-682-001	FILTER-SENSOR	1	
5176-682-001	REFLECTOR TRIM	1	
5215-682-001	PLATE-ES AL-L NON PRINT	2	HAIR-LINE,ANODIZONG
5361-682-001	SPRING-RELEASE	1	
5479-682-005	GASKET EMI	1	FOR KEY PWB
5554-682-004	SHEET-VOL TACT	1	
5621-320-050	SCREW-TAP	5	ES FRONT+KEY PWB(5)
5629-220-050	SCREW-TAP	5	ES FRONT+ES REAR(5)
0114-682-040	**KEY PWB REF ASSY**	**1**	
1114-682-040	KEY PWB(WITHOUT COMPONENT)	1	
1252-820-001	DIODE ZENER UDZS8.2B, ROHM	3	D1,D2,D3
1264-938-001	IR SENSOR, HIR-938HF2, HANSE	1	J1
1275-194-501	LED-CHIP YTN-194SW-5M	8	D5,D6,D7,D8,D9,D10,D11,D12
1448-107-801	INDUCTOR-CHIP NLCV32T-101K, TDK	2	L1,L2
1675-010-001	SW-TACT, SKQYPBE010, ALPS	7	SW1,SW2,SW3,SW4,SW5,SW6,SW7
1745-000-001	1608, 1/16, 0-F	2	R1,R2
1745-100-711	1608, 1/16, 10-J	1	R14
1745-102-711	1608, 1/16, 1K-J	1	R16
1745-123-711	1608, 1/16, 12K-J	1	R19
1745-152-711	1608, 1/16, 1.5K-J	1	R22
1745-181-711	1608, 1/16, 180-J	2	R12,R24
1745-203-711	1608, 1/16, 20K-J	1	R20
1745-221-711	1608, 1/16, 220-J	1	R13
1745-222-711	1608, 1/16, 2.2K-J	2	R18,R23
1745-272-711	1608, 1/16, 2.7K-J	1	R21
1745-301-711	1608, 1/16, 300-J	8	R3,R4,R5,R6,R7,R8,R9,R10
1745-471-711	1608, 1/16, 470-J	1	R15
1745-472-711	1608, 1/16, 4.7K-J	1	R17
1845-104-951	1608, 16V, X7R, 100nF-M	5	C1,C2,C3,C6,C8
1857-106-951	3216, 16V, 10uF-M	3	C4,C5,C7
2141-144-401	CONN, 12FPP1444HD, JOINTEC	1	J2