

EXPLODED VIEW

A		: N09-2292-05
B	M3 x 8	: N67-3008-48
C	M2.6 x 6 (Br-Tap)	: N87-2606-43
D	M2.6 x 8 (Br-Tap)	: N87-2608-48

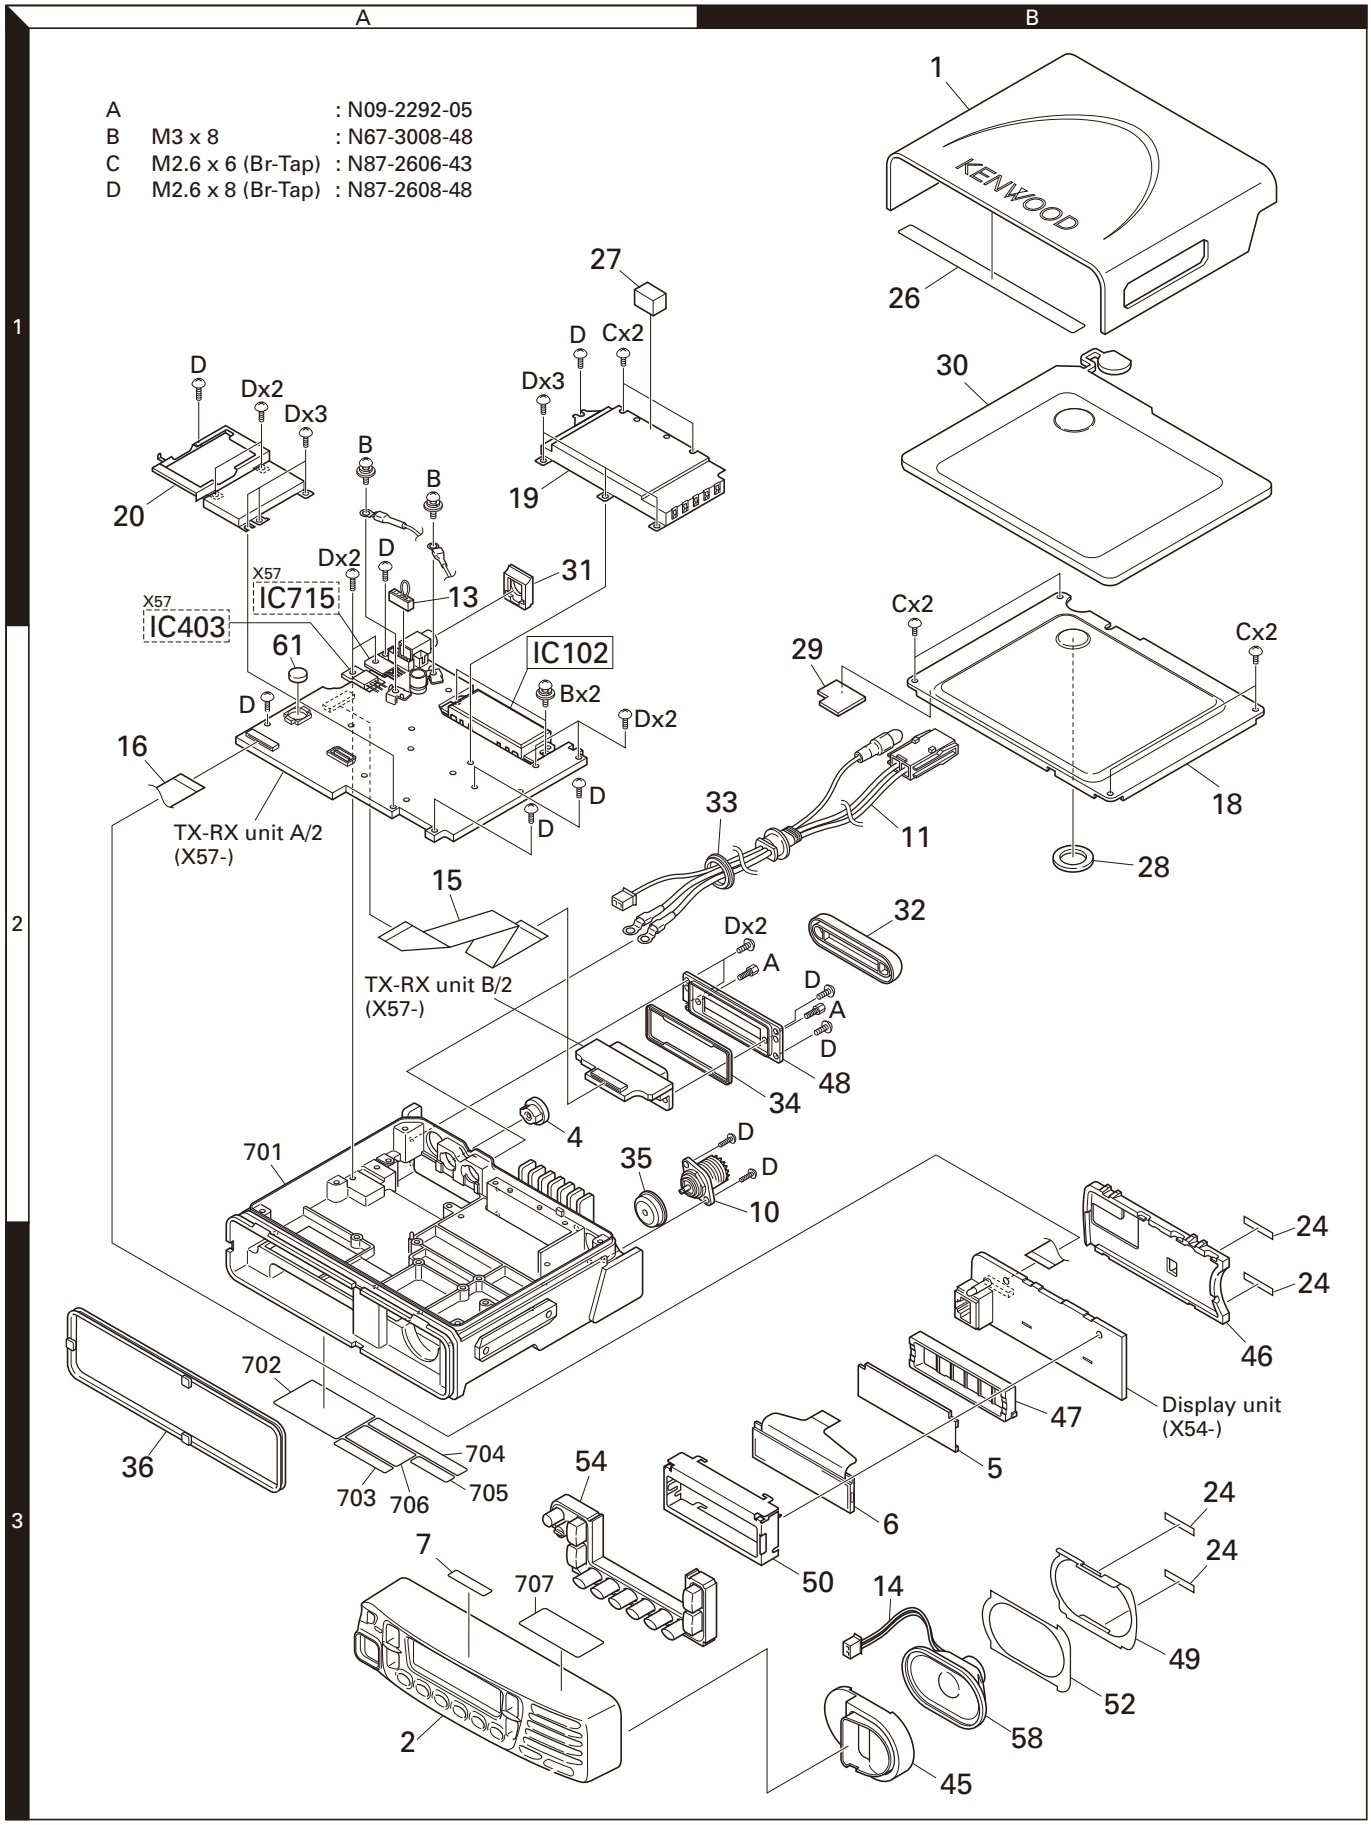

Parts with the exploded numbers larger than 700 are not supplied.
If a part reference number is listed in a box on the exploded view of the PCB (for example, IC123), that part does not come with the PCB. These parts must be ordered separately.

PACKING

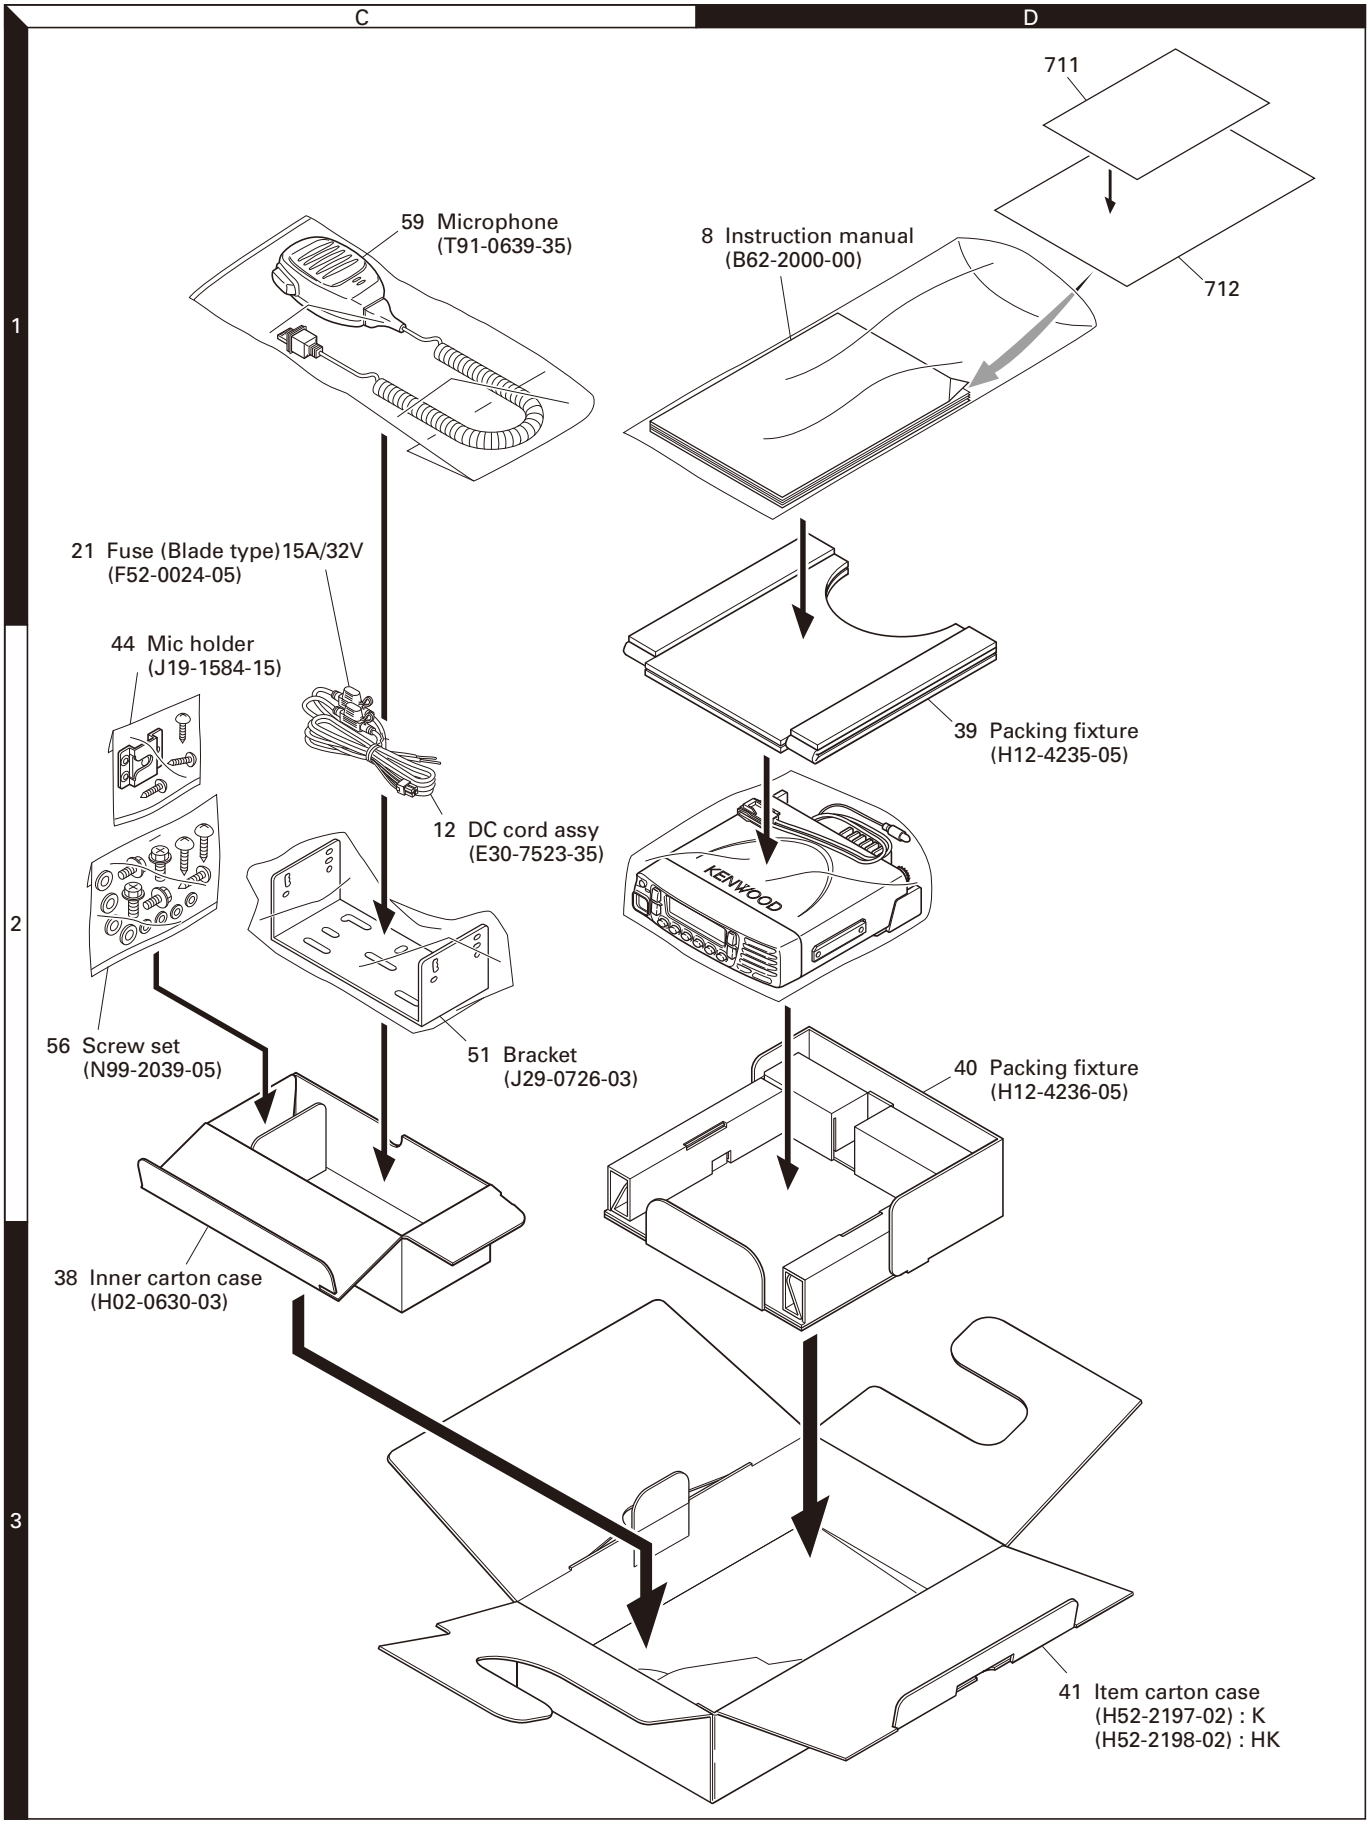

Parts with the exploded numbers larger than 700 are not supplied.

PARTS LIST

✻ New Parts. ⚠indicates safety critical components.
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

L : Scandinavia **K** : USA **P** : Canada
Y : PX (Far East, Hawaii) **T** : England **E** : Europe
Y : AAFES (Europe) **X** : Australia **M** : Other Areas

NX-800 (Y51-5150-10)
NX-800H (Y51-5200-10)
DISPLAY UNIT (X54-3640-10)

Ref. No.	Address	New parts	Parts No.	Description	Destination
NX-800/800H					
1	1B		A01-2194-11	COVER	
2	3A		A62-1162-03	PANEL ASSY	
4	2A		B09-0681-03	CAP (KAP-2)	
5	3B		B11-1850-04	FILTER (LCD)	
6	3B		B38-0922-05	LCD ASSY	
7	3A		B42-7296-04	STICKER (NEXEGE)	
8	1D		B62-2000-00	INSTRUCTION MANUAL	
10	2B		E04-0167-15	RF COAXIAL RECEPTACLE (M)	
11	2B		E30-7520-15	DC CORD (PIG TAIL)	
12	2C		E30-7523-35	DC CORD ASSY ACCESSORY	
13	1A		E37-1118-05	LEAD WIRE WITH CONNECTOR (SHORT CABLE)	
14	3B		E37-1124-05	LEAD WIRE WITH CONNECTOR (2P SP)	
15	2A		E37-1378-05	FLAT CABLE (30P/D-SUB)	
16	2A		E37-1379-05	FLAT CABLE (30P/PANEL)	
18	2B		F10-2488-12	SHIELDING PLATE (CHASSIS)	
19	1A		F10-2489-13	SHIELDING CASE (FINAL)	
20	1A		F10-2490-13	SHIELDING CASE (VCO)	
21	2C		F52-0024-05	FUSE (BLADE TYPE) 15A/32V	
-			G10-1322-04	FIBROUS SHEET (PANEL-SP)	
24	3B		G10-1342-04	FIBROUS SHEET (BIRITUKI)	
-			G11-4336-04	SHEET (PANEL-FG)	
26	1B		G11-4343-04	SHEET (STEP)	
27	1A		G13-2018-04	CUSHION (FINAL)	
28	2B		G13-2047-04	CUSHION (DC SCREW)	
29	2B	✻	G13-2262-04	CUSHION (PLATE FFC)	
30	1B		G53-1613-11	PACKING (SHIELD PLATE)	
31	1A		G53-1616-03	PACKING (PHONE JACK)	
32	2B		G53-1626-03	PACKING (D-SUB OUTER)	
33	2B		G53-1643-04	PACKING (DC CORD)	
34	2A		G53-1645-03	PACKING (D-SUB INNER)	
35	2A		G53-1662-04	PACKING (ANT)	
36	3A		G53-1676-03	PACKING (CHASSIS)	
38	3C	✻	H02-0630-03	INNER CARTON CASE	
39	2D	✻	H12-4235-05	PACKING FIXTURE	
40	2D	✻	H12-4236-05	PACKING FIXTURE	
41	3D	✻	H52-2197-02	ITEM CARTON CASE	K
41	3D	✻	H52-2198-02	ITEM CARTON CASE	HK
44	2C		J19-1584-15	MIC HOLDER ACCESSORY	
45	3B		J19-5464-13	HOLDER (SP)	
46	3B		J19-5485-12	HOLDER (PANEL)	
47	3B		J19-5502-03	HOLDER (LCD)	
48	2B		J21-8479-02	MOUNTING HARDWARE (D-SUB)	
49	3B		J21-8481-03	MOUNTING HARDWARE (SP)	
50	3B		J21-8569-03	MOUNTING HARDWARE (LCD)	
51	2C		J29-0726-03	BRACKET ACCESSORY	
52	3B		J30-1289-04	SPACER (SP SHEET)	
54	3A		K29-9401-03	KEY TOP	
A	2B		N09-2292-05	HEXAGON HEAD SCREW	
B	1A,2A		N67-3008-48	PAN HEAD SEMS SCREW	
C	1A,2B		N87-2606-43	BRAZIER HEAD TAPTITE SCREW	
D	1A,2A,2B		N87-2608-48	BRAZIER HEAD TAPTITE SCREW	
56	2C		N99-2039-05	SCREW SET ACCESSORY	
58	3B		T07-0757-15	SPEAKER	
59	1C		T91-0639-35	MICROPHONE ACCESSORY	
61	2A		W09-0971-05	LITHIUM CELL	
DISPLAY UNIT (X54-3640-10)					
D914			B30-2304-05	LED (RED/GREEN)	
D915-926			B30-2281-05	LED (Y)	
D927-936			B30-2282-05	LED (Y)	
C903			CK73HB1E103K	CHIP C 0.010UF K	
C905			CK73HB1A104K	CHIP C 0.10UF K	
C906			CK73HB1H222K	CHIP C 2200PF K	
C907-909			CK73HB1H102K	CHIP C 1000PF K	
C910-912			CC73HCH1H101J	CHIP C 100PF J	
C913			CK73HB1A104K	CHIP C 0.10UF K	
C914			CK73HB1H102K	CHIP C 1000PF K	
C915			CK73FB1E475K	CHIP C 4.7UF K	
C916			CK73GB1E105K	CHIP C 1.0UF K	
C917,918			CK73HB1A104K	CHIP C 0.10UF K	
C919			CK73HB1H102K	CHIP C 1000PF K	
C920			CC73HCH1H121J	CHIP C 120PF J	
C921			CK73HB1A104K	CHIP C 0.10UF K	
C922-925			CK73HB1H102K	CHIP C 1000PF K	
C926-929			CK73HB1A104K	CHIP C 0.10UF K	
C930			CK73GB1E105K	CHIP C 1.0UF K	
C931,932			CK73HB1H102K	CHIP C 1000PF K	
C933			CK73GB1E105K	CHIP C 1.0UF K	
C934			CK73HB1H102K	CHIP C 1000PF K	
C935			CS77BA1E4R7M	CHIP TNTL 4.7UF 25WV	
C936			CC73HCH1H100D	CHIP C 10PF D	
C938			CC73HCH1H100D	CHIP C 10PF D	
C939			CK73GB1C104K	CHIP C 0.10UF K	
C940			CK73FB1A106K	CHIP C 10UF K	
C941,942			CK73HB1H102K	CHIP C 1000PF K	
C943,944			CS77BA1E4R7M	CHIP TNTL 4.7UF 25WV	
C945			CK73GB1H103K	CHIP C 0.010UF K	
C946			CC73HCH1H101J	CHIP C 100PF J	
C947			CK73HB1A104K	CHIP C 0.10UF K	
C948			CC73HCH1H101J	CHIP C 100PF J	
C949-954			CK73GB1E105K	CHIP C 1.0UF K	
C955			CC73HCH1H101J	CHIP C 100PF J	
C956,957			CK73HB1E103K	CHIP C 0.010UF K	
C958			CK73HB1H102K	CHIP C 1000PF K	
C959,960			CK73HB1E103K	CHIP C 0.010UF K	
C961			CK73HB0J105K	CHIP C 1.0UF K	
C962			CK73HB1A104K	CHIP C 0.10UF K	
C963			CC73HCH1H101J	CHIP C 100PF J	
C964			CK73GB1E105K	CHIP C 1.0UF K	
C965			CK73HB1A104K	CHIP C 0.10UF K	
C966,967			CK73HB1H102K	CHIP C 1000PF K	
CN901			E40-6559-05	FLAT CABLE CONNECTOR	

PARTS LIST

DISPLAY UNIT (X54-3640-10)
TX-RX UNIT (X57-7390-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination
CN902			E41-2671-05	PIN ASSY	
CN905			E40-6557-05	FLAT CABLE CONNECTOR	
J901			E58-0522-05	MODULAR JACK	
-			J31-0551-05	COLLAR	
L901,902			L41-1095-39	SMALL FIXED INDUCTOR (1.0UH)	
L903-905			L92-0140-05	CHIP FERRITE	
L906			L92-0163-05	BEADS CORE	
L907			L92-0140-05	CHIP FERRITE	
L908			L92-0163-05	BEADS CORE	
X901			L77-1950-05	CRYSTAL RESONATOR (11.0592MHZ)	
CP907,908			RK75HA1JR00J	CHIP-COM 0.00 J 1/16W	
CP909			RK74HA1J104J	CHIP-COM 100K J 1/16W	
CP910		✻	RK74HA1J101J	CHIP-COM 100 J 1/16W	
CP912		✻	RK74HA1J101J	CHIP-COM 100 J 1/16W	
CP917			RK74HA1J104J	CHIP-COM 100K J 1/16W	
R900			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R901			RK73GB2A000J	CHIP R 0.0 J 1/10W	
R902			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R904			RK73HB1J101J	CHIP R 100 J 1/16W	
R905			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R906			RK73HB1J331J	CHIP R 330 J 1/16W	
R907			RK73HB1J104J	CHIP R 100K J 1/16W	
R908			RK73HB1J473J	CHIP R 47K J 1/16W	
R909			RK73HB1J104J	CHIP R 100K J 1/16W	
R911			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R912			RK73HB1J333J	CHIP R 33K J 1/16W	
R913			RK73HB1J823J	CHIP R 82K J 1/16W	
R914			RK73HB1J104J	CHIP R 100K J 1/16W	
R915			RK73HB1J473J	CHIP R 47K J 1/16W	
R916,917			RK73HB1J103J	CHIP R 10K J 1/16W	
R918			RK73GB2A100J	CHIP R 10 J 1/10W	
R919			RK73HB1J103J	CHIP R 10K J 1/16W	
R920,921			RK73HB1J101J	CHIP R 100 J 1/16W	
R922-925			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R926			RK73HB1J103J	CHIP R 10K J 1/16W	
R927			RK73HB1J473J	CHIP R 47K J 1/16W	
R928			RK73HB1J103J	CHIP R 10K J 1/16W	
R929			RK73HB1J474J	CHIP R 470K J 1/16W	
R930			RK73HB1J103J	CHIP R 10K J 1/16W	
R931			RK73FB2B561J	CHIP R 560 J 1/8W	
R932			RK73FB2B471J	CHIP R 470 J 1/8W	
R933			RK73HB1J101J	CHIP R 100 J 1/16W	
R934-937			RK73HB1J473J	CHIP R 47K J 1/16W	
R938,939			RK73HB1J103J	CHIP R 10K J 1/16W	
R940			RK73HB1J274J	CHIP R 270K J 1/16W	
R941			RK73HB1J124J	CHIP R 120K J 1/16W	
R942			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R943			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R944			RK73HB1J104J	CHIP R 100K J 1/16W	
R945,946			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R947			RK73HB1J474J	CHIP R 470K J 1/16W	
R948			RK73HB1J103J	CHIP R 10K J 1/16W	
R949			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R950			RK73HB1J473J	CHIP R 47K J 1/16W	
R952			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R953			RK73GB2A271J	CHIP R 270 J 1/10W	
R954			RK73GB2A470J	CHIP R 47 J 1/10W	
R955			RK73GB2A271J	CHIP R 270 J 1/10W	

Ref. No.	Address	New parts	Parts No.	Description	Destination
R956			RK73GB2A101J	CHIP R 100 J 1/10W	
R957,958			RK73GB2A271J	CHIP R 270 J 1/10W	
R960			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R962			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R963,964			RK73GB2A391J	CHIP R 390 J 1/10W	
R965,966			RK73GB2A821J	CHIP R 820 J 1/10W	
R967-974			RK73HB1J103J	CHIP R 10K J 1/16W	
R976			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R977-979			RK73HB1J473J	CHIP R 47K J 1/16W	
R981,982			RK73HB1J103J	CHIP R 10K J 1/16W	
R986			RK73HB1J103J	CHIP R 10K J 1/16W	
R988			RK73HB1J473J	CHIP R 47K J 1/16W	
R989			RK73HB1J474J	CHIP R 470K J 1/16W	
R990			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R991			RK73HB1J474J	CHIP R 470K J 1/16W	
R992			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R996			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R997			RK73GB2A000J	CHIP R 0.0 J 1/10W	
R998			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R999			RK73HB1J101J	CHIP R 100 J 1/16W	
D901,902			AVRM16080MAAB	VARISTOR	
D903			02DZ18F-X	ZENER DIODE	
D904			AVRM16080MAAB	VARISTOR	
D906			MINISMDC020F	VARISTOR	
D907			02DZ18F-X	ZENER DIODE	
D908			HSC119	DIODE	
D910			1SS416	DIODE	
D911,912			HSC119	DIODE	
D913			DA204U	DIODE	
D937			1SS416	DIODE	
IC901			TC7W66FK-F	MOS-IC	
IC902			TC75S51FE(F)	MOS-IC	
IC903			XC6204B502PR	MOS-IC	
IC904			XC6204B332M	MOS-IC	
IC905			TC7SH126FU-F	MOS-IC	
IC906			LM2682MMX	MOS-IC	
IC907			TC7WH126FU-F	MOS-IC	
IC908			TC7SH08FU-F	MOS-IC	
IC909			LMC7101BIM5	MOS-IC	
IC910			TC74LCX245FK	MOS-IC	
IC911			30620SPGPU3C	MICROPROCESSOR IC	
IC912			TC7WZ245FK-F	MOS-IC	
IC913			29AL16D7KCCA	ROM IC	
Q901			SSM3K15TE(F)	FET	
Q902			DTC144EE	DIGITAL TRANSISTOR	
Q904			DTC144EE	DIGITAL TRANSISTOR	
Q905,906			DTC114EE	DIGITAL TRANSISTOR	
Q908,909			DTC114EE	DIGITAL TRANSISTOR	
Q910			12A02CH	TRANSISTOR	
Q911			SSM3K15TE(F)	FET	
Q913			UPA672T-A	FET	
TH901			ERTJ0EV104H	THERMISTOR	

TX-RX UNIT (X57-7390-XX for service) -11 : NX-800 -13 : NX-800H

C1			CK73HB0J105K	CHIP C 1.0UF K	
C2			CC73HCH1H101J	CHIP C 100PF J	
C3			CK73HB1H471K	CHIP C 470PF K	
C4			CK73HB1A104K	CHIP C 0.10UF K	

PARTS LIST

TX-RX UNIT (X57-7390-XX)

Ref. No.	Address	New parts	Parts No.	Description			Destination
C5			CK73HB1E103K	CHIP C	0.010UF	K	
C6			CC73HCH1H101J	CHIP C	100PF	J	
C7			CC73HCH1H180J	CHIP C	18PF	J	
C8			CC73HCH1H080B	CHIP C	8.0PF	B	
C9			CK73HB1E103K	CHIP C	0.010UF	K	
C10			CC73HCH1H390J	CHIP C	39PF	J	
C11			CK73FB1A106K	CHIP C	10UF	K	
C12			CC73HCH1H080B	CHIP C	8.0PF	B	
C13			CK73HB1E103K	CHIP C	0.010UF	K	
C14			CK73GB1E105K	CHIP C	1.0UF	K	
C15			CC73HCH1H101J	CHIP C	100PF	J	
C16,17			CK73HB1E103K	CHIP C	0.010UF	K	
C18-23			CC73HCH1H101J	CHIP C	100PF	J	
C24			CK73HB1A104K	CHIP C	0.10UF	K	
C25,26			CC73HCH1H101J	CHIP C	100PF	J	
C27			CK73HB1A104K	CHIP C	0.10UF	K	
C28,29			CC73HCH1H101J	CHIP C	100PF	J	
C31			CC73HCH1H101J	CHIP C	100PF	J	
C32			CS77CA1VR15M	CHIP TNTL	0.15UF	35WV	
C33			CC73HCH1H330J	CHIP C	33PF	J	
C34			CC73HCH1H470J	CHIP C	47PF	J	
C35			CS77BA1D100M	CHIP TNTL	10UF	20WV	
C36			CC73HCH1H050B	CHIP C	5.0PF	B	
C37			C92-0863-05	CHIP TNTL	0.047UF	35WV	
C38			C93-0787-05	CHIP C	0.1UF	K	
C39			CC73HCH1H030B	CHIP C	3.0PF	B	
C41			CK73HB1H471K	CHIP C	470PF	K	
C43			CK73HB1H471K	CHIP C	470PF	K	
C44,45			CC73HCH1H101J	CHIP C	100PF	J	
C46			CC73HCH1H050B	CHIP C	5.0PF	B	
C47			CC73HCH1H470J	CHIP C	47PF	J	
C48			CK73HB0J105K	CHIP C	1.0UF	K	
C49			CC73HCH1H100B	CHIP C	10PF	B	
C50,51			CC73HCH1H151J	CHIP C	150PF	J	
C52,53			CK73HB1H471K	CHIP C	470PF	K	
C54			CK73HB1A104K	CHIP C	0.10UF	K	
C55			CK73HB0J105K	CHIP C	1.0UF	K	
C56			CK73HB1H471K	CHIP C	470PF	K	
C58			CC73HCH1H120G	CHIP C	12PF	G	
C59			CC73HCH1H150G	CHIP C	15PF	G	
C60			CC73HCH1HR75B	CHIP C	0.75PF	B	
C61			CC73HCH1H0R5B	CHIP C	0.5PF	B	
C63			CC73HCH1HR75B	CHIP C	0.75PF	B	
C64			CC73HCH1H070B	CHIP C	7.0PF	B	
C65			CK73FB1A106K	CHIP C	10UF	K	
C66,67			CC73HCH1H060B	CHIP C	6.0PF	B	
C68			CC73HCH1H040B	CHIP C	4.0PF	B	
C69			CC73HCH1H050B	CHIP C	5.0PF	B	
C70			CK73HB1H471K	CHIP C	470PF	K	
C71			CK73GB1E105K	CHIP C	1.0UF	K	
C72			CC73HCH1H030B	CHIP C	3.0PF	B	
C73			CK73HB1H471K	CHIP C	470PF	K	
C74			CC73HCH1H0R5B	CHIP C	0.5PF	B	
C75			CK73HB1H471K	CHIP C	470PF	K	
C76			CC73HCH1H0R5B	CHIP C	0.5PF	B	
C77,78			CK73HB1H471K	CHIP C	470PF	K	
C79			CC73HCH1H070B	CHIP C	7.0PF	B	
C80			CK73HB1H471K	CHIP C	470PF	K	
C81			CC73HCH1H100B	CHIP C	10PF	B	
C82			CC73HCH1H330J	CHIP C	33PF	J	
C83,84			CK73HB1H471K	CHIP C	470PF	K	
C85			CK73HB1A104K	CHIP C	0.10UF	K	
C86			CC73HCH1H070B	CHIP C	7.0PF	B	
C88			CK73HB1E103K	CHIP C	0.010UF	K	
C90-92			CK73HB1E103K	CHIP C	0.010UF	K	
C98			CK73HB1H471K	CHIP C	470PF	K	
C101			CK73HB1H102K	CHIP C	1000PF	K	
C102			CK73HB1H471K	CHIP C	470PF	K	
C103			CK73HB1E103K	CHIP C	0.010UF	K	
C104-107			CC73HCH1H101J	CHIP C	100PF	J	
C108			CK73FB1E475K	CHIP C	4.7UF	K	
C109			CC73HCH1H060D	CHIP C	6.0PF	D	
C110-112			CC73HCH1H101J	CHIP C	100PF	J	
C115-117			CC73HCH1H101J	CHIP C	100PF	J	
C118			CC73HCH1H060D	CHIP C	6.0PF	D	
C120			CK73HB1H471K	CHIP C	470PF	K	
C123			CC73HCH1H220J	CHIP C	22PF	J	
C125			CK73HB1H471K	CHIP C	470PF	K	
C127			CK73HB1H471K	CHIP C	470PF	K	
C128			CC73HCH1H470J	CHIP C	47PF	J	
C131			CC73HCH1H101J	CHIP C	100PF	J	
C132			CK73HB1H471K	CHIP C	470PF	K	
C133			CC73HCH1H220J	CHIP C	22PF	J	
C134			CK73HB1H471K	CHIP C	470PF	K	
C135			CC73HCH1H101J	CHIP C	100PF	J	
C136			CK73FB1H471K	CHIP C	470PF	K	
C138		✻	CS77CA1A6R8M	CHIP TNTL	6.8UF	10WV	
C141			CC73HCH1H220J	CHIP C	22PF	J	
C142			CC73HCH1H470J	CHIP C	47PF	J	
C145			CC73HCH1H101J	CHIP C	100PF	J	
C147			CK73HB1H471K	CHIP C	470PF	K	
C150			C92-0875-05	ELECTRO	47UF	25WV	
C152,153			CC73HCH1H101J	CHIP C	100PF	J	
C155,156			CC73HCH1H220J	CHIP C	22PF	J	
C157			CC73HCH1H101J	CHIP C	100PF	J	
C158			CK73HB1H471K	CHIP C	470PF	K	
C162			CC73FCH1H020C	CHIP C	2.0PF	C	
C164			CC73GCH1H0R5B	CHIP C	0.5PF	B	
C165			CC73GCH1H010B	CHIP C	1.0PF	B	K
C165			CC73GCH1H030B	CHIP C	3.0PF	B	HK
C166			CC73HCH1H101J	CHIP C	100PF	J	
C168			C93-0550-05	CHIP C	1.0PF	C	HK
C170			CC73GCH1H0R5B	CHIP C	0.5PF	B	
C171			CC73GCH1H020B	CHIP C	2.0PF	B	HK
C171			CC73GCH1H030B	CHIP C	3.0PF	B	K
C172			CC73HCH1H101J	CHIP C	100PF	J	
C174			C93-0553-05	CHIP C	3.0PF	C	K
C177			C93-0556-05	CHIP C	6.0PF	D	K
C178			CC73GCH1H0R5B	CHIP C	0.5PF	B	
C179			CC73GCH1H020B	CHIP C	2.0PF	B	HK
C179			CC73GCH1H030B	CHIP C	3.0PF	B	K
C180			CC73HCH1H101J	CHIP C	100PF	J	
C183			C93-0550-05	CHIP C	1.0PF	C	HK
C184			CM73F2H010C	CHIP C	1.0PF	C	K
C185			CM73F2H040C	CHIP C	4.0PF	C	HK
C185			CM73F2H060D	CHIP C	6.0PF	D	K
C186			CM73F2H121J	CHIP C	120PF	J	
C187			CM73F2H050C	CHIP C	5.0PF	C	HK
C187			C93-0553-05	CHIP C	3.0PF	C	K
C188			CM73F2H080D	CHIP C	8.0PF	D	K

PARTS LIST

TX-RX UNIT (X57-7390-XX)

Ref. No.	Address	New parts	Parts No.	Description			Destination
C188,189			CM73F2H080D	CHIP C	8.0PF	D	HK
C189			CM73F2H070D	CHIP C	7.0PF	D	K
C190			CM73F2H040C	CHIP C	4.0PF	C	HK
C190			C93-0555-05	CHIP C	5.0PF	C	K
C193,194			CK73HB1H471K	CHIP C	470PF	K	
C201			CK73HB1E103K	CHIP C	0.010UF	K	
C202-205			CK73HB1A104K	CHIP C	0.10UF	K	
C206			CC73HCH1H100B	CHIP C	10PF	B	
C207,208			CK73HB1E103K	CHIP C	0.010UF	K	
C210			CK73HB1A104K	CHIP C	0.10UF	K	
C211			CC73HCH1H100B	CHIP C	10PF	B	
C212,213			CK73HB1A104K	CHIP C	0.10UF	K	
C214			CC73HCH1H680J	CHIP C	68PF	J	
C215			CC73HCH1H101J	CHIP C	100PF	J	
C216			CC73HCH1H680J	CHIP C	68PF	J	
C217			CK73HB1A104K	CHIP C	0.10UF	K	
C218,219			CK73GB0J475K	CHIP C	4.7UF	K	
C220			CC73HCH1H470J	CHIP C	47PF	J	
C221			CK73FB1A106K	CHIP C	10UF	K	
C222-224			CK73HB1E103K	CHIP C	0.010UF	K	
C225			CK73HB1A104K	CHIP C	0.10UF	K	
C226			CK73FB1A106K	CHIP C	10UF	K	
C227			CC73HCH1H820J	CHIP C	82PF	J	
C228-230			CK73HB1A104K	CHIP C	0.10UF	K	
C231			CK73HB1E103K	CHIP C	0.010UF	K	
C232			CK73HB1A104K	CHIP C	0.10UF	K	
C233			CK73HB0J105K	CHIP C	1.0UF	K	
C234			CK73HB1E103K	CHIP C	0.010UF	K	
C236			CC73HCH1H470J	CHIP C	47PF	J	
C237			CK73HB1H471K	CHIP C	470PF	K	
C238-240			CK73HB1E103K	CHIP C	0.010UF	K	
C242			CK73HB1H471K	CHIP C	470PF	K	
C243			CK73HB1E103K	CHIP C	0.010UF	K	
C244			CC73HCH1H470J	CHIP C	47PF	J	
C245			CK73HB1H471K	CHIP C	470PF	K	
C246			CK73HB1E103K	CHIP C	0.010UF	K	
C247			CK73HB1A104K	CHIP C	0.10UF	K	
C252			CC73HCH1H010B	CHIP C	1.0PF	B	
C256			CC73HCH1H010B	CHIP C	1.0PF	B	
C257			CK73HB1H471K	CHIP C	470PF	K	
C260			CK73HB1E103K	CHIP C	0.010UF	K	
C261			CC73HCH1H101J	CHIP C	100PF	J	
C262			CK73HB1E103K	CHIP C	0.010UF	K	
C263,264			CK73HB1H471K	CHIP C	470PF	K	
C265			CK73HB1E103K	CHIP C	0.010UF	K	
C266			CK73HB1H102K	CHIP C	1000PF	K	
C267			CC73HCH1H070B	CHIP C	7.0PF	B	
C268			CK73HB1E103K	CHIP C	0.010UF	K	
C269,270			CK73HB1H471K	CHIP C	470PF	K	
C271			CC73HCH1H100B	CHIP C	10PF	B	
C272			CC73HCH1H020B	CHIP C	2.0PF	B	
C273			CC73HCH1H120G	CHIP C	12PF	G	
C275			CC73HCH1H010B	CHIP C	1.0PF	B	
C276			CC73HCH1H060B	CHIP C	6.0PF	B	
C278-281			CK73HB1H471K	CHIP C	470PF	K	
C283			CC73HCH1H080B	CHIP C	8.0PF	B	
C284			CK73HB1H471K	CHIP C	470PF	K	
C285			CC73HCH1H220G	CHIP C	22PF	G	
C286			CC73HCH1H070B	CHIP C	7.0PF	B	
C287			CC73HCH1H050B	CHIP C	5.0PF	B	

Ref. No.	Address	New parts	Parts No.	Description			Destination
C288			CK73HB1H471K	CHIP C	470PF	K	
C289			CK73GB1H104K	CHIP C	0.10UF	K	
C290			CC73HCH1H180G	CHIP C	18PF	G	
C291			CC73HCH1H070B	CHIP C	7.0PF	B	
C292			CK73HB1H471K	CHIP C	470PF	K	
C293			CC73HCH1H100B	CHIP C	10PF	B	
C294			CK73HB1H471K	CHIP C	470PF	K	
C295			CC73HCH1H180G	CHIP C	18PF	G	
C296,297			CC73HCH1H070B	CHIP C	7.0PF	B	
C298			CK73HB1H471K	CHIP C	470PF	K	
C299			CC73HCH1H220G	CHIP C	22PF	G	
C301			CC73HCH1H100B	CHIP C	10PF	B	
C302			CK73GB1H104K	CHIP C	0.10UF	K	
C307,308			CK73HB1H471K	CHIP C	470PF	K	
C310			CC73HCH1H330G	CHIP C	33PF	G	
C315			CC73HCH1H050B	CHIP C	5.0PF	B	
C316			CK73HB1H471K	CHIP C	470PF	K	
C317			CC73HCH1H100B	CHIP C	10PF	B	
C318,319			CC73HCH1H020B	CHIP C	2.0PF	B	
C320			CK73HB1H471K	CHIP C	470PF	K	
C321			CC73HCH1H040B	CHIP C	4.0PF	B	
C322			CC73HCH1H080B	CHIP C	8.0PF	B	
C323			CC73HCH1H101J	CHIP C	100PF	J	
C324			CC73HCH1H120G	CHIP C	12PF	G	
C325			CC73HCH1H040B	CHIP C	4.0PF	B	
C327			CK73HB1H471K	CHIP C	470PF	K	
C330-334			CK73HB1A104K	CHIP C	0.10UF	K	
C335			CC73HCH1H120G	CHIP C	12PF	G	
C336			CK73HB1E103K	CHIP C	0.010UF	K	
C337,338			CK73HB1A104K	CHIP C	0.10UF	K	
C339			CK73HB1E103K	CHIP C	0.010UF	K	
C341			CK73HB0J105K	CHIP C	1.0UF	K	
C342			CK73FB1A106K	CHIP C	10UF	K	
C343			CK73HB1A104K	CHIP C	0.10UF	K	
C344			CC73HCH1H101J	CHIP C	100PF	J	
C347			CK73HB1H471K	CHIP C	470PF	K	
C348			CK73HB1E103K	CHIP C	0.010UF	K	
C358			CK73HB1H102K	CHIP C	1000PF	K	
C401			C92-0777-05	ELECTRO	1000UF	25WV	
C403			CK73HB1H471K	CHIP C	470PF	K	
C405			CK73HB1H471K	CHIP C	470PF	K	
C406			CK73HB1H102K	CHIP C	1000PF	K	
C409			CK73HB1E103K	CHIP C	0.010UF	K	
C410			CK73GB1H103K	CHIP C	0.010UF	K	
C411			CK73HB1H471K	CHIP C	470PF	K	
C413			CK73GB1E105K	CHIP C	1.0UF	K	
C415			CK73HB1H471K	CHIP C	470PF	K	
C417			CK73HB1H471K	CHIP C	470PF	K	
C419			CK73HB1H102K	CHIP C	1000PF	K	
C420			CK73HB1A104K	CHIP C	0.10UF	K	
C421			CK73GB1H473K	CHIP C	0.047UF	K	
C422			CK73FB1E475K	CHIP C	4.7UF	K	
C424			CK73GB1E105K	CHIP C	1.0UF	K	
C425			CK73GB1H104K	CHIP C	0.10UF	K	
C426			CK73HB1E103K	CHIP C	0.010UF	K	
C427			CK73HB1H471K	CHIP C	470PF	K	
C428			CC73HCH1H101J	CHIP C	100PF	J	
C429			CK73GB1H104K	CHIP C	0.10UF	K	
C430,431			CK73FB1E475K	CHIP C	4.7UF	K	
C432			C92-0875-05	ELECTRO	47UF	25WV	

PARTS LIST

TX-RX UNIT (X57-7390-XX)

Ref. No.	Address	New parts	Parts No.	Description			Destination
C433			CK73GB1H104K	CHIP C	0.10UF	K	
C434			CK73HB1H102K	CHIP C	1000PF	K	
C435			CK73FB1A106K	CHIP C	10UF	K	
C436			CS77BA1A100M	CHIP TNTL	10UF	10WV	
C437			CK73HB1A224K	CHIP C	0.22UF	K	
C438			CK73FB1A106K	CHIP C	10UF	K	
C439			CK73HB1E103K	CHIP C	0.010UF	K	
C440			CK73GB1E105K	CHIP C	1.0UF	K	
C441,442			CK73HB1E103K	CHIP C	0.010UF	K	
C443,444			CK73GB1E105K	CHIP C	1.0UF	K	
C445			CK73FB1A106K	CHIP C	10UF	K	
C446			C92-0765-05	CHIP TNTL	4.7UF	16WV	
C447			CK73HB1A224K	CHIP C	0.22UF	K	
C448			CK73HB1E103K	CHIP C	0.010UF	K	
C449			CK73GB1C225K	CHIP C	2.2UF	K	
C450			CK73HB1E103K	CHIP C	0.010UF	K	
C451			CK73GB1C225K	CHIP C	2.2UF	K	
C452			CK73HB0J105K	CHIP C	1.0UF	K	
C453			CK73GB1E105K	CHIP C	1.0UF	K	
C454			CK73HB1H471K	CHIP C	470PF	K	
C455,456			CK73HB1E103K	CHIP C	0.010UF	K	
C457,458			CK73GB1E105K	CHIP C	1.0UF	K	
C459			C92-0765-05	CHIP TNTL	4.7UF	16WV	
C460			CK73HB1A104K	CHIP C	0.10UF	K	
C461			CC73HCH1H181J	CHIP C	180PF	J	
C462			CK73HB1H471K	CHIP C	470PF	K	
C463			CK73HB0J105K	CHIP C	1.0UF	K	
C464			CC73HCH1H220J	CHIP C	22PF	J	
C465-467			CK73GB1E105K	CHIP C	1.0UF	K	
C468			CK73HB1E103K	CHIP C	0.010UF	K	
C471			CK73HB0J105K	CHIP C	1.0UF	K	
C473			CS77BA1E4R7M	CHIP TNTL	4.7UF	25WV	
C474			CK73HB1E103K	CHIP C	0.010UF	K	
C475			CK73FB1A106K	CHIP C	10UF	K	
C501,502			CK73HB0J105K	CHIP C	1.0UF	K	
C503-507			CK73HB1A104K	CHIP C	0.10UF	K	
C508			CK73HB1H102K	CHIP C	1000PF	K	
C509			CK73HB1A104K	CHIP C	0.10UF	K	
C511-514			CK73HB1A104K	CHIP C	0.10UF	K	
C515			CK73HB0J105K	CHIP C	1.0UF	K	
C516,517			CK73HB1A104K	CHIP C	0.10UF	K	
C518			CK73GB1E105K	CHIP C	1.0UF	K	
C520-523			CK73HB1E103K	CHIP C	0.010UF	K	
C527			CK73HB1E103K	CHIP C	0.010UF	K	
C528			CK73HB1A104K	CHIP C	0.10UF	K	
C529,530			CK73HB1E103K	CHIP C	0.010UF	K	
C531			CK73HB1A104K	CHIP C	0.10UF	K	
C532			CK73HB1E103K	CHIP C	0.010UF	K	
C533			CK73HB1A104K	CHIP C	0.10UF	K	
C534			CC73HCH1H101J	CHIP C	100PF	J	
C535			CS77CP0J100M	CHIP TNTL	10UF	6.3WV	
C536			CK73HB1E103K	CHIP C	0.010UF	K	
C537,538			CK73HB1A104K	CHIP C	0.10UF	K	
C539			CK73HB1E103K	CHIP C	0.010UF	K	
C540			CK73HB0J105K	CHIP C	1.0UF	K	
C541			CK73HB1A104K	CHIP C	0.10UF	K	
C542			CS77CP0J100M	CHIP TNTL	10UF	6.3WV	
C543-546			CC73HCH1H101J	CHIP C	100PF	J	
C547-550			CK73HB1A104K	CHIP C	0.10UF	K	
C551			CK73HB1E103K	CHIP C	0.010UF	K	
C552			CK73HB0J105K	CHIP C	1.0UF	K	
C553			CC73HCH1H101J	CHIP C	100PF	J	
C554-558			CK73HB1A104K	CHIP C	0.10UF	K	
C559			CK73HB1E103K	CHIP C	0.010UF	K	
C560			CK73HB0J105K	CHIP C	1.0UF	K	
C561-563			CC73HCH1H101J	CHIP C	100PF	J	
C565,566			CC73HCH1H101J	CHIP C	100PF	J	
C567			CK73HB1H102K	CHIP C	1000PF	K	
C568-578			CC73HCH1H101J	CHIP C	100PF	J	
C579			CK73HB1H102K	CHIP C	1000PF	K	
C580			CC73HCH1H101J	CHIP C	100PF	J	
C581-583			CK73HB1H102K	CHIP C	1000PF	K	
C584,585			CC73HCH1H101J	CHIP C	100PF	J	
C586			CK73HB1E103K	CHIP C	0.010UF	K	
C587-589			CK73HB1H102K	CHIP C	1000PF	K	
C590,591			CK73HB1E103K	CHIP C	0.010UF	K	
C592,593			CC73HCH1H101J	CHIP C	100PF	J	
C594,595			CK73HB1E103K	CHIP C	0.010UF	K	
C596			CK73HB1A104K	CHIP C	0.10UF	K	
C597-607			CK73HB1H102K	CHIP C	1000PF	K	
C608			CC73HCH1H101J	CHIP C	100PF	J	
C609			CK73HB1H102K	CHIP C	1000PF	K	
C610			CC73HCH1H101J	CHIP C	100PF	J	
C611			CK73HB1H102K	CHIP C	1000PF	K	
C612			CK73GB1H103K	CHIP C	0.010UF	K	
C613-616			CK73GB1E105K	CHIP C	1.0UF	K	
C618			CK73HB1E103K	CHIP C	0.010UF	K	
C620,621			CK73HB1E103K	CHIP C	0.010UF	K	
C630			CK73GB1H104K	CHIP C	0.10UF	K	
C701			CK73GB0J335K	CHIP C	3.3UF	K	
C702			CK73HB0J105K	CHIP C	1.0UF	K	
C705			CK73HB1H122K	CHIP C	1200PF	K	
C706			CK73HB1H331K	CHIP C	330PF	K	
C707			CK73HB1A104K	CHIP C	0.10UF	K	
C708			CK73HB1H122K	CHIP C	1200PF	K	
C709			CC73HCH1H221J	CHIP C	220PF	J	
C710			CK73HB1E103K	CHIP C	0.010UF	K	
C711			CC73HCH1H181J	CHIP C	180PF	J	
C712			CC73HCH1H680J	CHIP C	68PF	J	
C714			CK73HB1E103K	CHIP C	0.010UF	K	
C715			CK73HB1H122K	CHIP C	1200PF	K	
C716			CC73HCH1H221J	CHIP C	220PF	J	
C717			CK73HB1A104K	CHIP C	0.10UF	K	
C718			CC73HCH1H221J	CHIP C	220PF	J	
C719,720			CK73HB1A104K	CHIP C	0.10UF	K	
C721			CC73HCH1H221J	CHIP C	220PF	J	
C722			CC73HCH1H470J	CHIP C	47PF	J	
C723,724			CK73HB1A104K	CHIP C	0.10UF	K	
C725			CK73HB1E103K	CHIP C	0.010UF	K	
C726			CK73HB1A104K	CHIP C	0.10UF	K	
C727			CC73HCH1H820J	CHIP C	82PF	J	
C729			CK73HB1A104K	CHIP C	0.10UF	K	
C730			CK73HB1H561K	CHIP C	560PF	K	
C731			CK73HB1A104K	CHIP C	0.10UF	K	
C732			CK73HB1E103K	CHIP C	0.010UF	K	
C734			CK73HB1E103K	CHIP C	0.010UF	K	
C735			CK73FB1E475K	CHIP C	4.7UF	K	
C736			CC73HCH1H101J	CHIP C	100PF	J	
C737			CK73HB1A104K	CHIP C	0.10UF	K	
C738			CK73HB1H102K	CHIP C	1000PF	K	

PARTS LIST

TX-RX UNIT (X57-7390-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination
C740			CK73HB1H472K	CHIP C 4700PF K	
C741			CK73HB1A154K	CHIP C 0.15UF K	
C742			CK73HB1A104K	CHIP C 0.10UF K	
C743			CK73HB1E103K	CHIP C 0.010UF K	
C744			CK73HB1A104K	CHIP C 0.10UF K	
C745-747			CK73HB1E103K	CHIP C 0.010UF K	
C748-751			CK73HB1A104K	CHIP C 0.10UF K	
C752,753			CK73HB1E103K	CHIP C 0.010UF K	
C754			CK73HB1H102K	CHIP C 1000PF K	
C757			CC73HCH1H150J	CHIP C 15PF J	
C761			CK73HB1E103K	CHIP C 0.010UF K	
C762,763			CK73HB1A104K	CHIP C 0.10UF K	
C764			CC73HCH1H220J	CHIP C 22PF J	
C765,766			CK73GB1E105K	CHIP C 1.0UF K	
C767			CK73HB1A104K	CHIP C 0.10UF K	
C768,769			CK73HB1E103K	CHIP C 0.010UF K	
C770			CK73HB1A104K	CHIP C 0.10UF K	
C773			CK73HB1A104K	CHIP C 0.10UF K	
C774			CK73HB1H102K	CHIP C 1000PF K	
C775			CK73HB1A104K	CHIP C 0.10UF K	
C776			CK73HB0J105K	CHIP C 1.0UF K	
C777			CK73HB1H102K	CHIP C 1000PF K	
C778			CK73HB1A104K	CHIP C 0.10UF K	
C779			CC73HCH1H680J	CHIP C 68PF J	
C782-786			CK73HB1A104K	CHIP C 0.10UF K	
C787			CK73FB1A106K	CHIP C 10UF K	
C788			CK73HB1A104K	CHIP C 0.10UF K	
C789			CK73FB1E475K	CHIP C 4.7UF K	
C790			CK73FB1A106K	CHIP C 10UF K	
C791			CK73HB1H102K	CHIP C 1000PF K	
C792			CC73HCH1H470J	CHIP C 47PF J	
C793			CK73HB1H102K	CHIP C 1000PF K	
C794,795			CK73FB1A106K	CHIP C 10UF K	
C796-799			CK73HB1A104K	CHIP C 0.10UF K	
C801,802			CK73GB1E105K	CHIP C 1.0UF K	
C803-805			CK73HB1H102K	CHIP C 1000PF K	
C806			C92-0906-05	ELECTRO 330UF 16WV	
C807			C92-0875-05	ELECTRO 47UF 25WV	
C809			CK73HB1H102K	CHIP C 1000PF K	
C810			CK73HB1H471K	CHIP C 470PF K	
C811			CK73HB1H102K	CHIP C 1000PF K	
C813			CK73FB1A106K	CHIP C 10UF K	
C814			CK73HB1H471K	CHIP C 470PF K	
C815,816			CK73FB1A106K	CHIP C 10UF K	
C817			CK73HB1E103K	CHIP C 0.010UF K	
C818			CK73HB0J105K	CHIP C 1.0UF K	
C820			CK73GB1E105K	CHIP C 1.0UF K	
C821			CK73HB1H102K	CHIP C 1000PF K	
C824			CK73HB1H102K	CHIP C 1000PF K	
C825			CC73HCH1H101J	CHIP C 100PF J	
C901			CC73HCH1H101J	CHIP C 100PF J	
C902			CK73HB1H102K	CHIP C 1000PF K	
C903-906			CC73HCH1H101J	CHIP C 100PF J	
C907			CK73HB1H102K	CHIP C 1000PF K	
C908-921			CC73HCH1H101J	CHIP C 100PF J	
C922,923			CK73HB1H102K	CHIP C 1000PF K	
CN401,402			E23-1260-04	TERMINAL	
CN403			E41-1682-05	PIN ASSY	
CN502-513			E23-1278-05	TERMINAL	

Ref. No.	Address	New parts	Parts No.	Description	Destination
CN516,517			E23-1278-05	TERMINAL	
CN520			E23-1278-05	TERMINAL	
CN527			E23-1278-05	TERMINAL	
CN540			E23-1278-05	TERMINAL	
CN542,543			E23-1278-05	TERMINAL	
CN549			E40-6720-05	SOCKET FOR PIN ASSY	
CN595			E40-6361-05	PIN ASSY	
CN597			E40-6558-05	FLAT CABLE CONNECTOR	
CN600			E40-6560-05	FLAT CABLE CONNECTOR	
CN611,612			E23-1278-05	TERMINAL	
CN614			E23-1278-05	TERMINAL	
CN705			E40-6582-05	PIN ASSY	
CN901			E40-6560-05	FLAT CABLE CONNECTOR	
J701			E11-0425-05	3.5D PHONE JACK (3P)	
J901			E58-0521-05	SUB SOCKET (D)	
F401			F53-0328-05	FUSE 5A	
F501			F53-0352-05	FUSE 2A	
CN405			J19-5386-05	HOLDER	
CD201			L79-1850-05	TUNING COIL	
CF201			L72-1017-05	CERAMIC FILTER	
CF202			L72-1021-05	CERAMIC FILTER	
CF203			L72-1020-05	CERAMIC FILTER	
L1			L41-4795-39	SMALL FIXED INDUCTOR (4.7UH)	
L3			L92-0163-05	BEADS CORE	
L4			L40-1275-92	SMALL FIXED INDUCTOR (12NH)	
L6,7			L40-1001-86	SMALL FIXED INDUCTOR (10UH)	
L10			L40-1878-92	SMALL FIXED INDUCTOR (18NH)	
L11			L40-2285-92	SMALL FIXED INDUCTOR (220NH)	
L12			L40-1885-92	SMALL FIXED INDUCTOR (180NH)	
L13			L40-2285-92	SMALL FIXED INDUCTOR (220NH)	
L14			L40-1885-92	SMALL FIXED INDUCTOR (180NH)	
L15			L40-2285-92	SMALL FIXED INDUCTOR (220NH)	
L16			L40-1885-92	SMALL FIXED INDUCTOR (180NH)	
L17			L34-4607-05	AIR-CORE COIL	
L18			L34-4608-05	AIR-CORE COIL	
L19			L40-2285-92	SMALL FIXED INDUCTOR (220NH)	
L20			L92-0446-05	BEADS CORE	
L21			L40-1885-92	SMALL FIXED INDUCTOR (180NH)	
L22			L40-2285-92	SMALL FIXED INDUCTOR (220NH)	
L23			L40-1885-92	SMALL FIXED INDUCTOR (180NH)	
L25			L40-2775-71	SMALL FIXED INDUCTOR (27NH)	
L26			L40-2275-92	SMALL FIXED INDUCTOR (22NH)	
L31-36			L92-0163-05	BEADS CORE	
L40,41			L92-0163-05	BEADS CORE	
L101			L40-1875-92	SMALL FIXED INDUCTOR (18NH)	
L102			L92-0140-05	CHIP FERRITE	
L103			L40-2275-92	SMALL FIXED INDUCTOR (22NH)	
L106			L92-0140-05	CHIP FERRITE	
L107-109			L92-0179-05	CHIP FERRITE	HK
L108,109			L92-0179-05	CHIP FERRITE	K
L110			L34-4638-05	AIR-CORE COIL	
L111			L34-4758-05	AIR-CORE COIL	
L112-114			L34-4743-05	AIR-CORE COIL	
L115			L34-4848-05	AIR-CORE COIL	
L201			L40-1085-71	SMALL FIXED INDUCTOR (100NH)	
L202			L40-5681-86	SMALL FIXED INDUCTOR (0.56UH)	
L204			L41-4778-45	SMALL FIXED INDUCTOR (47NH)	
L205			L40-5681-86	SMALL FIXED INDUCTOR (0.56UH)	

PARTS LIST

TX-RX UNIT (X57-7390-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination
L206			L92-0138-05	CHIP FERRITE	
L207			L40-5681-86	SMALL FIXED INDUCTOR (0.56UH)	
L208			L92-0138-05	CHIP FERRITE	
L209			L40-2275-92	SMALL FIXED INDUCTOR (22NH)	
L210			L39-1498-05	TOROIDAL COIL	
L211			L92-0138-05	CHIP FERRITE	
L212			L39-1498-05	TOROIDAL COIL	
L213			L40-1575-92	SMALL FIXED INDUCTOR (15NH)	
L214			L40-1875-92	SMALL FIXED INDUCTOR (18NH)	
L215			L39-1498-05	TOROIDAL COIL	
L216-219			L34-4565-05	AIR-CORE COIL	
L221			L41-1878-14	SMALL FIXED INDUCTOR (18NH)	
L222			L41-6878-14	SMALL FIXED INDUCTOR (68NH)	
L223,224			L34-4568-05	AIR-CORE COIL	
L225			L41-6878-14	SMALL FIXED INDUCTOR (68NH)	
L228			L40-2763-92	SMALL FIXED INDUCTOR (2.7NH)	
L230			L92-0138-05	CHIP FERRITE	
L401-403			L92-0179-05	CHIP FERRITE	HK
L402,403			L92-0179-05	CHIP FERRITE	K
L404			L92-0639-05	CHIP FERRITE	
L405			L33-1496-05	SMALL FIXED INDUCTOR	
L406			L33-1462-05	SMALL FIXED INDUCTOR	
L501-503			L92-0138-05	CHIP FERRITE	
L506-511			L92-0138-05	CHIP FERRITE	
L512			L92-0140-05	CHIP FERRITE	
L517,518			L92-0138-05	CHIP FERRITE	
L521-523			L92-0162-05	BEADS CORE	
L901,902			L92-0140-05	CHIP FERRITE	
L903-905			L92-0162-05	BEADS CORE	
X1			L77-3016-05	TCXO (19.2MHZ)	
X501			L77-1802-05	CRYSTAL RESONATOR (32768HZ)	
X502			L77-3015-05	TCXO (18.432MHZ)	
XF202			L71-0649-05	MCF (58.05MHZ)	
R1,2			RK73HH1J223D	CHIP R 22K D 1/16W	
R3			RK73HB1J334J	CHIP R 330K J 1/16W	
R4			RK73HB1J101J	CHIP R 100 J 1/16W	
R5			RK73HB1J224J	CHIP R 220K J 1/16W	
R6			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R7			RK73HB1J103J	CHIP R 10K J 1/16W	
R8			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R10			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R12			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R13			RK73HB1J473J	CHIP R 47K J 1/16W	
R15-19			RK73HB1J100J	CHIP R 10 J 1/16W	
R21			RK73HB1J100J	CHIP R 10 J 1/16W	
R22,23			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R25			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R26			RK73HB1J104J	CHIP R 100K J 1/16W	
R27			RK73HB1J473J	CHIP R 47K J 1/16W	
R28			RK73HB1J683J	CHIP R 68K J 1/16W	
R29			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R30			RK73HB1J184J	CHIP R 180K J 1/16W	
R31			RK73HB1J473J	CHIP R 47K J 1/16W	
R32			RK73HB1J151J	CHIP R 150 J 1/16W	
R34			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R35			RK73HH1J391D	CHIP R 390 D 1/16W	
R36			RK73HB1J106J	CHIP R 10M J 1/16W	
R37			RK73HB1J103J	CHIP R 10K J 1/16W	
R40,41			RK73HB1J000J	CHIP R 0.0 J 1/16W	

Ref. No.	Address	New parts	Parts No.	Description	Destination
R42			RK73HB1J104J	CHIP R 100K J 1/16W	
R43			RK73HB1J100J	CHIP R 10 J 1/16W	
R44			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R45			RK73HB1J104J	CHIP R 100K J 1/16W	
R46			RK73HB1J271J	CHIP R 270 J 1/16W	
R47			RK73HB1J154J	CHIP R 150K J 1/16W	
R49			RK73HB1J683J	CHIP R 68K J 1/16W	
R53,54			RK73HB1J473J	CHIP R 47K J 1/16W	
R55			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R56			RK73HB1J474J	CHIP R 470K J 1/16W	
R57			RK73HH1J181D	CHIP R 180 D 1/16W	
R58			RK73HB1J181J	CHIP R 180 J 1/16W	
R59			RK73HH1J181D	CHIP R 180 D 1/16W	
R60			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R61			RK73HB1J473J	CHIP R 47K J 1/16W	
R62			RK73HB1J154J	CHIP R 150K J 1/16W	
R63			RK73HB1J101J	CHIP R 100 J 1/16W	
R64			RK73HB1J682J	CHIP R 6.8K J 1/16W	
R65			RK73HB1J103J	CHIP R 10K J 1/16W	
R66			RK73HB1J331J	CHIP R 330 J 1/16W	
R67			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R68			RK73HB1J470J	CHIP R 47 J 1/16W	
R69			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R70			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R71			RK73HB1J474J	CHIP R 470K J 1/16W	
R72			RK73HB1J183J	CHIP R 18K J 1/16W	
R74			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R75			RK73HB1J221J	CHIP R 220 J 1/16W	
R76			RK73HB1J474J	CHIP R 470K J 1/16W	
R77			RK73HB1J101J	CHIP R 100 J 1/16W	
R79-83			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R84,85			RK73GB2A000J	CHIP R 0.0 J 1/10W	
R86			RK73GB2A272J	CHIP R 2.7K J 1/10W	
R101			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R102			RK73HB1J821J	CHIP R 820 J 1/16W	
R103			RK73HB1J5R6J	CHIP R 5.6 J 1/16W	
R104			RK73HB1J821J	CHIP R 820 J 1/16W	
R105			RK73HB1J333J	CHIP R 33K J 1/16W	
R106			RK73HB1J221J	CHIP R 220 J 1/16W	
R107			RK73HB1J682J	CHIP R 6.8K J 1/16W	
R108			RK73GB2A100J	CHIP R 10 J 1/10W	
R109			RK73HB1J471J	CHIP R 470 J 1/16W	
R110			RK73GB2A220J	CHIP R 22 J 1/10W	
R111			RK73HB1J561J	CHIP R 560 J 1/16W	
R112			RK73HB1J272J	CHIP R 2.7K J 1/16W	
R113			RK73GB2A100J	CHIP R 10 J 1/10W	
R114			RK73HB1J331J	CHIP R 330 J 1/16W	
R115			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R116			RK73GB2A000J	CHIP R 0.0 J 1/10W	
R117			RK73HB1J103J	CHIP R 10K J 1/16W	
R119			RK73HB1J473J	CHIP R 47K J 1/16W	
R120			RK73HB1J104J	CHIP R 100K J 1/16W	
R121			RK73GB2A000J	CHIP R 0.0 J 1/10W	
R122			RK73HB1J683J	CHIP R 68K J 1/16W	
R123			RK73HB1J273J	CHIP R 27K J 1/16W	
R124			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R125			RK73FB2B271J	CHIP R 270 J 1/8W	
R126,127			RK73FB2B390J	CHIP R 39 J 1/8W	
R129			RK73FB2B271J	CHIP R 270 J 1/8W	
R131			RK73HB1J331J	CHIP R 330 J 1/16W	

PARTS LIST

TX-RX UNIT (X57-7390-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination
R132,133			RK73HB1J104J	CHIP R 100K J 1/16W	
R134			RK73HB1J224J	CHIP R 220K J 1/16W	HK
R134			RK73HB1J274J	CHIP R 270K J 1/16W	K
R136			RK73HB1J104J	CHIP R 100K J 1/16W	
R137			RK73HB1J334J	CHIP R 330K J 1/16W	
R138			RK73EB2E301J	CHIP R 300 J 1/4W	
R140			RK73HB1J104J	CHIP R 100K J 1/16W	
R141			RK73HB1J124J	CHIP R 120K J 1/16W	
R142			RK73HB1J104J	CHIP R 100K J 1/16W	
R143			RK73GB2A000J	CHIP R 0.0 J 1/10W	
R144			RK73HB1J824J	CHIP R 820K J 1/16W	
R145			RK73HB1J393J	CHIP R 39K J 1/16W	HK
R145			RK73HB1J823J	CHIP R 82K J 1/16W	K
R146,147			RK73HB1J104J	CHIP R 100K J 1/16W	
R148			RK73HB1J103J	CHIP R 10K J 1/16W	
R149			RK73HB1J104J	CHIP R 100K J 1/16W	
R150			RK73HB1J823J	CHIP R 82K J 1/16W	
R151			RK73HB1J104J	CHIP R 100K J 1/16W	HK
R151			RK73HB1J124J	CHIP R 120K J 1/16W	K
R152			R92-1061-05	JUMPER REST 0 OHM	
R153			RK73HB1J121J	CHIP R 120 J 1/16W	
R154			RK73EB2E301J	CHIP R 300 J 1/4W	
R156			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R158			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R160			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R161			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R201			RK73HB1J153J	CHIP R 15K J 1/16W	
R202,203			RK73HB1J223J	CHIP R 22K J 1/16W	
R204			RK73HB1J470J	CHIP R 47 J 1/16W	
R205,206			RK73HB1J223J	CHIP R 22K J 1/16W	
R207			RK73HB1J334J	CHIP R 330K J 1/16W	
R208			RK73HB1J153J	CHIP R 15K J 1/16W	
R209,210			RK73HB1J100J	CHIP R 10 J 1/16W	
R211			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R212			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R213			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R215			RK73HB1J272J	CHIP R 2.7K J 1/16W	
R216			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R218,219			RK73HB1J103J	CHIP R 10K J 1/16W	
R220			RK73HB1J473J	CHIP R 47K J 1/16W	
R221			RK73HB1J183J	CHIP R 18K J 1/16W	
R222			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R223			RK73HB1J274J	CHIP R 270K J 1/16W	
R224			RK73HB1J103J	CHIP R 10K J 1/16W	
R225			RK73HB1J153J	CHIP R 15K J 1/16W	
R226			RK73HB1J473J	CHIP R 47K J 1/16W	
R227			RK73HB1J104J	CHIP R 100K J 1/16W	
R228			RK73HB1J223J	CHIP R 22K J 1/16W	
R229			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R230			RK73HB1J223J	CHIP R 22K J 1/16W	
R231			RK73HB1J221J	CHIP R 220 J 1/16W	
R232			RK73HB1J101J	CHIP R 100 J 1/16W	
R234			RK73HB1J103J	CHIP R 10K J 1/16W	
R235			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R237			RK73HB1J104J	CHIP R 100K J 1/16W	
R238			RK73HB1J103J	CHIP R 10K J 1/16W	
R239			RK73HB1J104J	CHIP R 100K J 1/16W	
R242			RK73HB1J221J	CHIP R 220 J 1/16W	
R243			RK73HB1J101J	CHIP R 100 J 1/16W	
R244			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R245,246			RK73HB1J104J	CHIP R 100K J 1/16W	
R248			RK73HB1J474J	CHIP R 470K J 1/16W	
R250			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R256			RK73HB1J181J	CHIP R 180 J 1/16W	
R257			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R261			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R262			RK73HB1J682J	CHIP R 6.8K J 1/16W	
R263			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R265			RK73HB1J103J	CHIP R 10K J 1/16W	
R266			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R267			RK73HB1J271J	CHIP R 270 J 1/16W	
R268,269			RK73HB1J470J	CHIP R 47 J 1/16W	
R270			RK73HB1J680J	CHIP R 68 J 1/16W	
R271			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R272			RK73HB1J271J	CHIP R 270 J 1/16W	
R273			RK73HB1J180J	CHIP R 18 J 1/16W	
R274			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R275			RK73HB1J271J	CHIP R 270 J 1/16W	
R276			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R277			RK73GB2A000J	CHIP R 0.0 J 1/10W	
R279			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R282			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R283,284			RK73HB1J104J	CHIP R 100K J 1/16W	
R285			RK73HB1J103J	CHIP R 10K J 1/16W	
R286,287			RK73HB1J104J	CHIP R 100K J 1/16W	
R288			RK73HB1J101J	CHIP R 100 J 1/16W	
R289			RK73HB1J104J	CHIP R 100K J 1/16W	
R290			RK73HB1J274J	CHIP R 270K J 1/16W	
R291			RK73HB1J104J	CHIP R 100K J 1/16W	
R294			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R296			RK73HB1J103J	CHIP R 10K J 1/16W	
R297			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R299			RK73HB1J221J	CHIP R 220 J 1/16W	
R301			RK73HB1J564J	CHIP R 560K J 1/16W	
R302,303			RK73HB1J104J	CHIP R 100K J 1/16W	
R306,307			RK73HB1J183J	CHIP R 18K J 1/16W	
R310			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R313			RK73GB2A000J	CHIP R 0.0 J 1/10W	
R314			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R315,316			RK73HB1J104J	CHIP R 100K J 1/16W	
R317			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R320,321			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R324,325			RK73HB1J182J	CHIP R 1.8K J 1/16W	
R327			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R328			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R329			RK73HB1J562J	CHIP R 5.6K J 1/16W	
R330			RK73GB2A100J	CHIP R 10 J 1/10W	
R331			RK73HB1J473J	CHIP R 47K J 1/16W	
R332			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R333			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R334			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R338			RK73HB1J103J	CHIP R 10K J 1/16W	
R339			RK73HB1J470J	CHIP R 47 J 1/16W	
R340,341			RK73HB1J121J	CHIP R 120 J 1/16W	
R342,343			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R344			RK73HB1J152J	CHIP R 1.5K J 1/16W	
R345			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R346			RK73HB1J223J	CHIP R 22K J 1/16W	
R352,353			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R401			RK73HH1J105D	CHIP R 1.0M D 1/16W	

PARTS LIST

TX-RX UNIT (X57-7390-XX)

Ref. No.	Address	New parts	Parts No.	Description				Destination
R402			RK73HB1J471J	CHIP R	470	J	1/16W	
R403			RK73HH1J104D	CHIP R	100K	D	1/16W	
R404			RK73HB1J103J	CHIP R	10K	J	1/16W	
R405			RK73HH1J274D	CHIP R	270K	D	1/16W	
R406			RK73HH1J104D	CHIP R	100K	D	1/16W	
R407			RK73HB1J473J	CHIP R	47K	J	1/16W	
R408			RK73HB1J103J	CHIP R	10K	J	1/16W	
R409			RK73HB1J683J	CHIP R	68K	J	1/16W	
R410			RK73HB1J684J	CHIP R	680K	J	1/16W	
R411			RK73HB1J104J	CHIP R	100K	J	1/16W	
R413			RK73HB1J474J	CHIP R	470K	J	1/16W	
R415			RK73HB1J332J	CHIP R	3.3K	J	1/16W	
R417			RK73HB1J473J	CHIP R	47K	J	1/16W	
R418,419			RK73HB1J103J	CHIP R	10K	J	1/16W	
R420			RK73HB1J473J	CHIP R	47K	J	1/16W	
R421			RK73HB1J474J	CHIP R	470K	J	1/16W	
R422			RK73HB1J103J	CHIP R	10K	J	1/16W	
R423-425			RK73GB2A472J	CHIP R	4.7K	J	1/10W	
R426			RK73HB1J474J	CHIP R	470K	J	1/16W	
R428,429			RK73HB1J103J	CHIP R	10K	J	1/16W	
R430			RK73HH1J124D	CHIP R	120K	D	1/16W	
R431			RK73HH1J183D	CHIP R	18K	D	1/16W	
R432			RK73HH1J223D	CHIP R	22K	D	1/16W	
R433			RK73HB1J102J	CHIP R	1.0K	J	1/16W	
R434			RK73HB1J330J	CHIP R	33	J	1/16W	
R435			RK73GB2A100J	CHIP R	10	J	1/10W	
R436			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R437			RK73HB1J474J	CHIP R	470K	J	1/16W	
R438			RK73HB1J154J	CHIP R	150K	J	1/16W	
R440			RK73HB1J102J	CHIP R	1.0K	J	1/16W	
R441			RK73HB1J123J	CHIP R	12K	J	1/16W	
R442			RK73HH1J334D	CHIP R	330K	D	1/16W	
R443			RK73HH1J223D	CHIP R	22K	D	1/16W	
R444			RK73HB1J272J	CHIP R	2.7K	J	1/16W	
R445			RK73HB1J473J	CHIP R	47K	J	1/16W	
R446			RK73GB2A100J	CHIP R	10	J	1/10W	
R447			RK73HB1J473J	CHIP R	47K	J	1/16W	
R448			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R449			RK73GB2A220J	CHIP R	22	J	1/10W	
R450			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R501			RK73HB1J104J	CHIP R	100K	J	1/16W	
R503			RK73HB1J102J	CHIP R	1.0K	J	1/16W	
R504			RK73HB1J104J	CHIP R	100K	J	1/16W	
R506			RK73HB1J474J	CHIP R	470K	J	1/16W	
R507			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R509			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R510			RK73HB1J474J	CHIP R	470K	J	1/16W	
R511			RK73HB1J220J	CHIP R	22	J	1/16W	
R512			RK73HB1J104J	CHIP R	100K	J	1/16W	
R514			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R515,516			RK73HB1J104J	CHIP R	100K	J	1/16W	
R520,521			RK73HB1J473J	CHIP R	47K	J	1/16W	
R522			RK73HB1J474J	CHIP R	470K	J	1/16W	
R523			RK73HB1J473J	CHIP R	47K	J	1/16W	
R524			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R525			RK73HB1J104J	CHIP R	100K	J	1/16W	
R527			RK73HB1J104J	CHIP R	100K	J	1/16W	
R528,529			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R531			RK73HB1J104J	CHIP R	100K	J	1/16W	
R532			RK73HB1J101J	CHIP R	100	J	1/16W	
R533,534			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R536,537			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R538			RK73HB1J101J	CHIP R	100	J	1/16W	
R539			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R540,541			RK73HB1J101J	CHIP R	100	J	1/16W	
R542			RK73HB1J104J	CHIP R	100K	J	1/16W	
R543			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R544			RK73HB1J104J	CHIP R	100K	J	1/16W	
R545			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R548			RK73GB2A000J	CHIP R	0.0	J	1/10W	
R550			RK73GB2A000J	CHIP R	0.0	J	1/10W	
R551			RK73HB1J101J	CHIP R	100	J	1/16W	
R552-554			RK73HB1J104J	CHIP R	100K	J	1/16W	
R556-558			RK73HB1J104J	CHIP R	100K	J	1/16W	
R560			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R561			RK73HB1J473J	CHIP R	47K	J	1/16W	
R562			RK73GB2A000J	CHIP R	0.0	J	1/10W	
R565			RK73GB2A000J	CHIP R	0.0	J	1/10W	
R567			RK73HB1J151J	CHIP R	150	J	1/16W	
R568			RK73HB1J102J	CHIP R	1.0K	J	1/16W	
R569			RK73HB1J220J	CHIP R	22	J	1/16W	
R572			RK73HB1J220J	CHIP R	22	J	1/16W	
R574			RK73GB2A000J	CHIP R	0.0	J	1/10W	
R575			RK73HB1J103J	CHIP R	10K	J	1/16W	
R576			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R577			RK73HB1J102J	CHIP R	1.0K	J	1/16W	
R578-580			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R581			RK73HB1J474J	CHIP R	470K	J	1/16W	
R582-586			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R587			RK73HB1J102J	CHIP R	1.0K	J	1/16W	
R588-590			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R591			RK73HB1J102J	CHIP R	1.0K	J	1/16W	
R592,593			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R594			RK73HB1J102J	CHIP R	1.0K	J	1/16W	
R595			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R596			RK73HB1J104J	CHIP R	100K	J	1/16W	
R597			RK73HB1J102J	CHIP R	1.0K	J	1/16W	
R598-601			RK73FB2B102J	CHIP R	1.0K	J	1/8W	
R602			RK73HB1J102J	CHIP R	1.0K	J	1/16W	
R603,604			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R605			RK73HB1J102J	CHIP R	1.0K	J	1/16W	
R606			RK73HB1J103J	CHIP R	10K	J	1/16W	
R607,608			RK73HB1J102J	CHIP R	1.0K	J	1/16W	
R610			RK73HB1J102J	CHIP R	1.0K	J	1/16W	
R611,612			RK73HB1J105J	CHIP R	1.0M	J	1/16W	
R614			RK73HB1J474J	CHIP R	470K	J	1/16W	
R615,616			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R617-620			RK73HB1J102J	CHIP R	1.0K	J	1/16W	
R621,622			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R623-625			RK73HB1J104J	CHIP R	100K	J	1/16W	
R627,628			RK73HB1J104J	CHIP R	100K	J	1/16W	
R629			RK73HB1J105J	CHIP R	1.0M	J	1/16W	
R630			RK73HB1J102J	CHIP R	1.0K	J	1/16W	
R632			RK73HB1J103J	CHIP R	10K	J	1/16W	
R633			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R634			RK73HB1J103J	CHIP R	10K	J	1/16W	
R636			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R637			RK73HB1J103J	CHIP R	10K	J	1/16W	
R638			RK73HB1J104J	CHIP R	100K	J	1/16W	
R639			RK73HB1J102J	CHIP R	1.0K	J	1/16W	

PARTS LIST

TX-RX UNIT (X57-7390-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination
R640			RK73HB1J103J	CHIP R 10K J 1/16W	
R641,642			RK73HB1J104J	CHIP R 100K J 1/16W	
R644			RK73GB2A000J	CHIP R 0.0 J 1/10W	
R646			RK73HB1J682J	CHIP R 6.8K J 1/16W	
R648			RK73HB1J682J	CHIP R 6.8K J 1/16W	
R650			RK73GB2A000J	CHIP R 0.0 J 1/10W	
R651			RK73FB2B102J	CHIP R 1.0K J 1/8W	
R652			RK73HB1J104J	CHIP R 100K J 1/16W	
R654			RK73GB2A000J	CHIP R 0.0 J 1/10W	
R656			RK73HB1J471J	CHIP R 470 J 1/16W	
R658			RK73GB2A000J	CHIP R 0.0 J 1/10W	
R659-661			RK73HB1J104J	CHIP R 100K J 1/16W	
R662,663			RK73HB1J474J	CHIP R 470K J 1/16W	
R664-674			RK73HB1J104J	CHIP R 100K J 1/16W	
R676			RK73HB1J104J	CHIP R 100K J 1/16W	
R677			RK73HB1J474J	CHIP R 470K J 1/16W	
R678			RK73HB1J104J	CHIP R 100K J 1/16W	
R680-683			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R684-686			RK73HB1J104J	CHIP R 100K J 1/16W	
R687,688			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R689,690			RK73HB1J474J	CHIP R 470K J 1/16W	
R691-696			RK73HB1J104J	CHIP R 100K J 1/16W	
R697,698			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R701			RK73HB1J104J	CHIP R 100K J 1/16W	
R703			RK73HB1J103J	CHIP R 10K J 1/16W	
R704			RK73HB1J563J	CHIP R 56K J 1/16W	
R705			RK73HB1J104J	CHIP R 100K J 1/16W	
R706			RK73HB1J683J	CHIP R 68K J 1/16W	
R707			RK73HB1J153J	CHIP R 15K J 1/16W	
R708			RK73HB1J683J	CHIP R 68K J 1/16W	
R709			RK73HB1J822J	CHIP R 8.2K J 1/16W	
R710			RK73HB1J104J	CHIP R 100K J 1/16W	
R712			RK73HB1J683J	CHIP R 68K J 1/16W	
R713			RK73HB1J563J	CHIP R 56K J 1/16W	
R714			RK73HB1J104J	CHIP R 100K J 1/16W	
R715			RK73HB1J473J	CHIP R 47K J 1/16W	
R716			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R717			RK73HB1J473J	CHIP R 47K J 1/16W	
R718			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R720			RK73HB1J104J	CHIP R 100K J 1/16W	
R721			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R722			RK73HB1J683J	CHIP R 68K J 1/16W	
R724			RK73HB1J563J	CHIP R 56K J 1/16W	
R725			RK73HB1J683J	CHIP R 68K J 1/16W	
R726			RK73HB1J100J	CHIP R 10 J 1/16W	
R727			RK73HB1J274J	CHIP R 270K J 1/16W	
R728			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R729			RK73HB1J104J	CHIP R 100K J 1/16W	
R730			RK73HB1J103J	CHIP R 10K J 1/16W	
R731			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R732			RK73HB1J473J	CHIP R 47K J 1/16W	
R733			RK73HB1J333J	CHIP R 33K J 1/16W	
R734			RK73HB1J223J	CHIP R 22K J 1/16W	
R737			RK73HB1J473J	CHIP R 47K J 1/16W	
R738			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R739			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R740,741			RK73HB1J104J	CHIP R 100K J 1/16W	
R744			RK73HB1J473J	CHIP R 47K J 1/16W	
R745			RK73HB1J104J	CHIP R 100K J 1/16W	
R746			RK73HB1J103J	CHIP R 10K J 1/16W	
R747			RK73HB1J334J	CHIP R 330K J 1/16W	
R748			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R749			RK73HB1J823J	CHIP R 82K J 1/16W	
R750			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R751			RK73HB1J271J	CHIP R 270 J 1/16W	
R752			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R753			RK73HB1J563J	CHIP R 56K J 1/16W	
R755			RK73HB1J103J	CHIP R 10K J 1/16W	
R756			RK73HB1J153J	CHIP R 15K J 1/16W	
R758			RK73HB1J103J	CHIP R 10K J 1/16W	
R759			RK73HB1J104J	CHIP R 100K J 1/16W	
R760			RK73HB1J152J	CHIP R 1.5K J 1/16W	
R761			RK73HB1J104J	CHIP R 100K J 1/16W	
R762			RK73HB1J474J	CHIP R 470K J 1/16W	
R763			RK73HB1J183J	CHIP R 18K J 1/16W	
R764			RK73HB1J124J	CHIP R 120K J 1/16W	
R765			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R766			RK73HB1J104J	CHIP R 100K J 1/16W	
R767,768			RK73HB1J473J	CHIP R 47K J 1/16W	
R769			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R770			RK73HB1J563J	CHIP R 56K J 1/16W	
R771			RK73HB1J104J	CHIP R 100K J 1/16W	
R772			RK73HB1J123J	CHIP R 12K J 1/16W	
R773			RK73HB1J684J	CHIP R 680K J 1/16W	
R774			RK73HB1J474J	CHIP R 470K J 1/16W	
R775			RK73HB1J823J	CHIP R 82K J 1/16W	
R776			RK73HB1J334J	CHIP R 330K J 1/16W	
R777			RK73HB1J154J	CHIP R 150K J 1/16W	
R778			RK73HB1J394J	CHIP R 390K J 1/16W	
R779			RK73HB1J474J	CHIP R 470K J 1/16W	
R780,781			RK73HB1J104J	CHIP R 100K J 1/16W	
R782			RK73HB1J153J	CHIP R 15K J 1/16W	
R783			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R784			RK73HB1J154J	CHIP R 150K J 1/16W	
R785			RK73HB1J103J	CHIP R 10K J 1/16W	
R786			RK73HB1J393J	CHIP R 39K J 1/16W	
R787			RK73HB1J274J	CHIP R 270K J 1/16W	
R788			RK73HB1J223J	CHIP R 22K J 1/16W	
R789			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R790			RK73HB1J224J	CHIP R 220K J 1/16W	
R791			RK73HB1J564J	CHIP R 560K J 1/16W	
R792			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R793,794			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R795			RK73HB1J224J	CHIP R 220K J 1/16W	
R796			RK73HB1J103J	CHIP R 10K J 1/16W	
R797			RK73HB1J334J	CHIP R 330K J 1/16W	
R798			RK73HB1J684J	CHIP R 680K J 1/16W	
R799			RK73HB1J563J	CHIP R 56K J 1/16W	
R800			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R801			RK73HB1J104J	CHIP R 100K J 1/16W	
R802			RK73HB1J273J	CHIP R 27K J 1/16W	
R803			RK73HB1J153J	CHIP R 15K J 1/16W	
R804			RK73HB1J681J	CHIP R 680 J 1/16W	
R805			RK73HB1J823J	CHIP R 82K J 1/16W	
R806			RK73HB1J562J	CHIP R 5.6K J 1/16W	
R807,808			RK73HB1J103J	CHIP R 10K J 1/16W	
R809			RK73HB1J104J	CHIP R 100K J 1/16W	
R810			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R812,813			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R814-816			RK73HB1J104J	CHIP R 100K J 1/16W	

PARTS LIST

TX-RX UNIT (X57-7390-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination
R817			RK73HB1J473J	CHIP R 47K J 1/16W	
R818			RK73HB1J333J	CHIP R 33K J 1/16W	
R819			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R820			RK73HB1J474J	CHIP R 470K J 1/16W	
R821			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R822			RK73HB1J101J	CHIP R 100 J 1/16W	
R823			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R825,826			RK73HB1J103J	CHIP R 10K J 1/16W	
R827			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R828			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R831			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R833-835			RK73HB1J101J	CHIP R 100 J 1/16W	
R836			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R837			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R838			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R841			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R842			RK73FB2B102J	CHIP R 1.0K J 1/8W	
R843			RK73HB1J471J	CHIP R 470 J 1/16W	
R845			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R846			RK73HB1J332J	CHIP R 3.3K J 1/16W	
R901			RK73GB2A471J	CHIP R 470 J 1/10W	
R902,903			RK73HB1J101J	CHIP R 100 J 1/16W	
R904-913			RK73HB1J471J	CHIP R 470 J 1/16W	
R914			RK73GB2A471J	CHIP R 470 J 1/10W	
R915-917			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R918,919			RK73HB1J101J	CHIP R 100 J 1/16W	
R921			RK73HB1J474J	CHIP R 470K J 1/16W	
R922			RK73HB1J000J	CHIP R 0.0 J 1/16W	
D2			DA221	DIODE	
D3,4			1SV325F	VARIABLE CAPACITANCE DIODE	
D7-12			1SV282-F	VARIABLE CAPACITANCE DIODE	
D14			1SV278F	VARIABLE CAPACITANCE DIODE	
D21			HVC131	DIODE	
D101			HVC131	DIODE	
D102			02DZ5.6F-X,Y	ZENER DIODE	
D103,104			L407CDB	DIODE (50V/1W)	HK
D104			L407CDB	DIODE (50V/1W)	K
D106			L7091CER	DIODE	
D108-110			HSM88AS-E	DIODE	
D201,202			DAN235E	DIODE	
D205			HVC131	DIODE	
D207-210			1SV286F	VARIABLE CAPACITANCE DIODE	
D212,213			1SV286F	VARIABLE CAPACITANCE DIODE	
D216			HVC131	DIODE	
D401			02DZ18F-X	ZENER DIODE	
D403			1SS416	DIODE	
D404			22ZR-10D	SURGE ABSORBER	
D405			DSA3A1	DIODE	
D406			HSC119	DIODE	
D407			CRS02-Q	DIODE	
D408			1SS301F	DIODE	
D409-412			1SS388F	DIODE	
D501,502			1SS388F	DIODE	
D503,504			1SS416	DIODE	
D506,507			1SS416	DIODE	
D508			DA204U	DIODE	
D509,510			1SS416	DIODE	
D511,512			DA204U	DIODE	
D702			HSC119	DIODE	

Ref. No.	Address	New parts	Parts No.	Description	Destination
D703-705			RB706F-40	DIODE	
D706,707			EMZ6.8N	ZENER DIODE	
D901-904			DA204U	DIODE	
D905,906			02DZ18F-X	ZENER DIODE	
D907,908			DA204U	DIODE	
D909			1SS355	DIODE	
D910			02DZ18F-X	ZENER DIODE	
D911,912			DA204U	DIODE	
D913			1SS355	DIODE	
D914			02DZ18F-X	ZENER DIODE	
IC1			LM73CIMKX-0	MOS-IC	
IC2			LMC7101BIM5	MOS-IC	
IC3			**Note 1**	MOS-IC	
IC4			LMC7101BIM5	MOS-IC	
IC5			TC75W51FK(F)	MOS-IC	
IC101			NJM2904V-ZB	MOS-IC	
IC102	2A		RA30H4452M123	MOS-IC	K
IC102	2A		RA55H4452M123	MOS-IC	HK
IC103			NJM2904V-ZB	MOS-IC	
IC201			MCP6021-E/OT	MOS-IC	
IC202			TK10931VTL-G	ANALOGUE IC	
IC203			TC75W51FK(F)	MOS-IC	
IC204			SPM5001	MOS-IC	
IC205,206			LMC7101BIM5	MOS-IC	
IC401			XC6108C23CMN	MOS-IC	
IC402			XC6204B332P1	ANALOGUE IC	
IC403	2A		NJM78M08FA-ZB	ANALOGUE IC	
IC404			TA7805FQ	MOS-IC	
IC405			LT1616ES6-PBF	ANALOGUE IC	
IC406			TK71733S	BI-POLAR IC	
IC407,408			XC6204B332M	MOS-IC	
IC409			XC6205B152PRN	ANALOGUE IC	
IC410			XC9101D09AKR	ANALOGUE IC	
IC501			**Note 1 (BGA)**	ROM IC	
IC502			**Note 1 (BGA)**	MICROPROCESSOR IC	
IC503			**Note 1 (BGA)**	SRAM IC	
IC504			RV5C386A	MOS-IC	
IC505			TC7SH08FU-F	MOS-IC	
IC506			XC6109C29ANN	ANALOGUE IC	
IC507			TC7SH126FU-F	MOS-IC	
IC508			SM5023CNDH-G	MOS-IC	
IC509			TC7WT125FUF	MOS-IC	
IC510			**Note 1 (BGA)**	MOS-IC	
IC511			TC7SH08FU-F	MOS-IC	
IC512,513			TC7SET08FU-F	MOS-IC	
IC514			TC7WBD125AFK	MOS-IC	
IC515			TC7WT126FU-F	MOS-IC	
IC516			TC7WH126FU-F	MOS-IC	
IC517			**Note 1**	MOS-IC	
IC518			ADM202EARNZ	MOS-IC	
IC701			TC75S51FE(F)	MOS-IC	
IC702,703			TC75W51FK(F)	MOS-IC	
IC704			MCP6021-E/OT	MOS-IC	
IC705,706			TC75W51FK(F)	MOS-IC	
IC707,708			TC7W53FK(F)	MOS-IC	
IC709			TC75W51FK(F)	MOS-IC	
IC710			TC7W53FK(F)	MOS-IC	
IC711			TC75W51FK(F)	MOS-IC	
IC712			M62364FP-F	MOS-IC	
IC713			TC7W53FK(F)	MOS-IC	

Note 1: This part cannot be replaced. Therefore, this part is not supplied as a service part.
If a part reference number is listed in a shaded box, that part does not come with the PCB.

PARTS LIST

TX-RX UNIT (X57-7390-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination
IC714			TC75S51FE(F)	MOS-IC	
IC715	2A		LA4425A	MOS-IC	
Q1			2SC5383-T111	TRANSISTOR	
Q3			2SC5636	TRANSISTOR	
Q4			2SC5383-T111	TRANSISTOR	
Q5,6			2SK508NV(K52)	FET	
Q7			SSM6L05FU-F	FET	
Q8			2SJ347F	FET	
Q9,10			2SC5636	TRANSISTOR	
Q11			2SK1215-E(E)	FET	
Q101			2SC5108(Y)F	TRANSISTOR	
Q102			2SC5455-A	TRANSISTOR	
Q105			DTC114EE	DIGITAL TRANSISTOR	
Q106			2SK1830F	FET	
Q201			DTA114EE	DIGITAL TRANSISTOR	
Q202			DTC144EE	DIGITAL TRANSISTOR	
Q203			2SC5636	TRANSISTOR	
Q204,205			2SC3356(R23)	TRANSISTOR	
Q208			2SC5636	TRANSISTOR	
Q210			2SC3357-A	TRANSISTOR	
Q212			EMD9	TRANSISTOR	
Q401,402			DTC114EE	DIGITAL TRANSISTOR	
Q403			DTC114TE	DIGITAL TRANSISTOR	
Q404			2SJ645	FET	
Q405			2SA1955A-F	TRANSISTOR	
Q406			UPA672T-A	FET	
Q407-409			12A02CH	TRANSISTOR	
Q410			SSM3K15TE(F)	FET	
Q411,412			2SA1955A-F	TRANSISTOR	
Q413-415			DTC114EE	DIGITAL TRANSISTOR	
Q416			SSM6L05FU-F	FET	
Q417			SSM5H01TU-F	FET	
Q501			UPA672T-A	FET	
Q701			SSM3K15TE(F)	FET	
Q702			2SC4617(Q)	TRANSISTOR	
Q703			SSM3K15TE(F)	FET	
Q704			2SC4738(GR)F	TRANSISTOR	
Q705			2SA1832(GR)F	TRANSISTOR	
Q706,707			2SJ243-A	FET	
Q708			2SA1832(GR)F	TRANSISTOR	
Q709			DTC114EE	DIGITAL TRANSISTOR	
Q710			DTC363EU	DIGITAL TRANSISTOR	
Q901,902			QSX6	TRANSISTOR	
TH101,102			ERTJ0EV104H	THERMISTOR	
TH701			ERTJ0EV104H	THERMISTOR	

Ref. No.	Address	New parts	Parts No.	Description	Destination