


TK-760G/762G


EXPLODED VIEW (TK-760G)

42

Parts with the exploded numbers larger than 700 are not supplied.

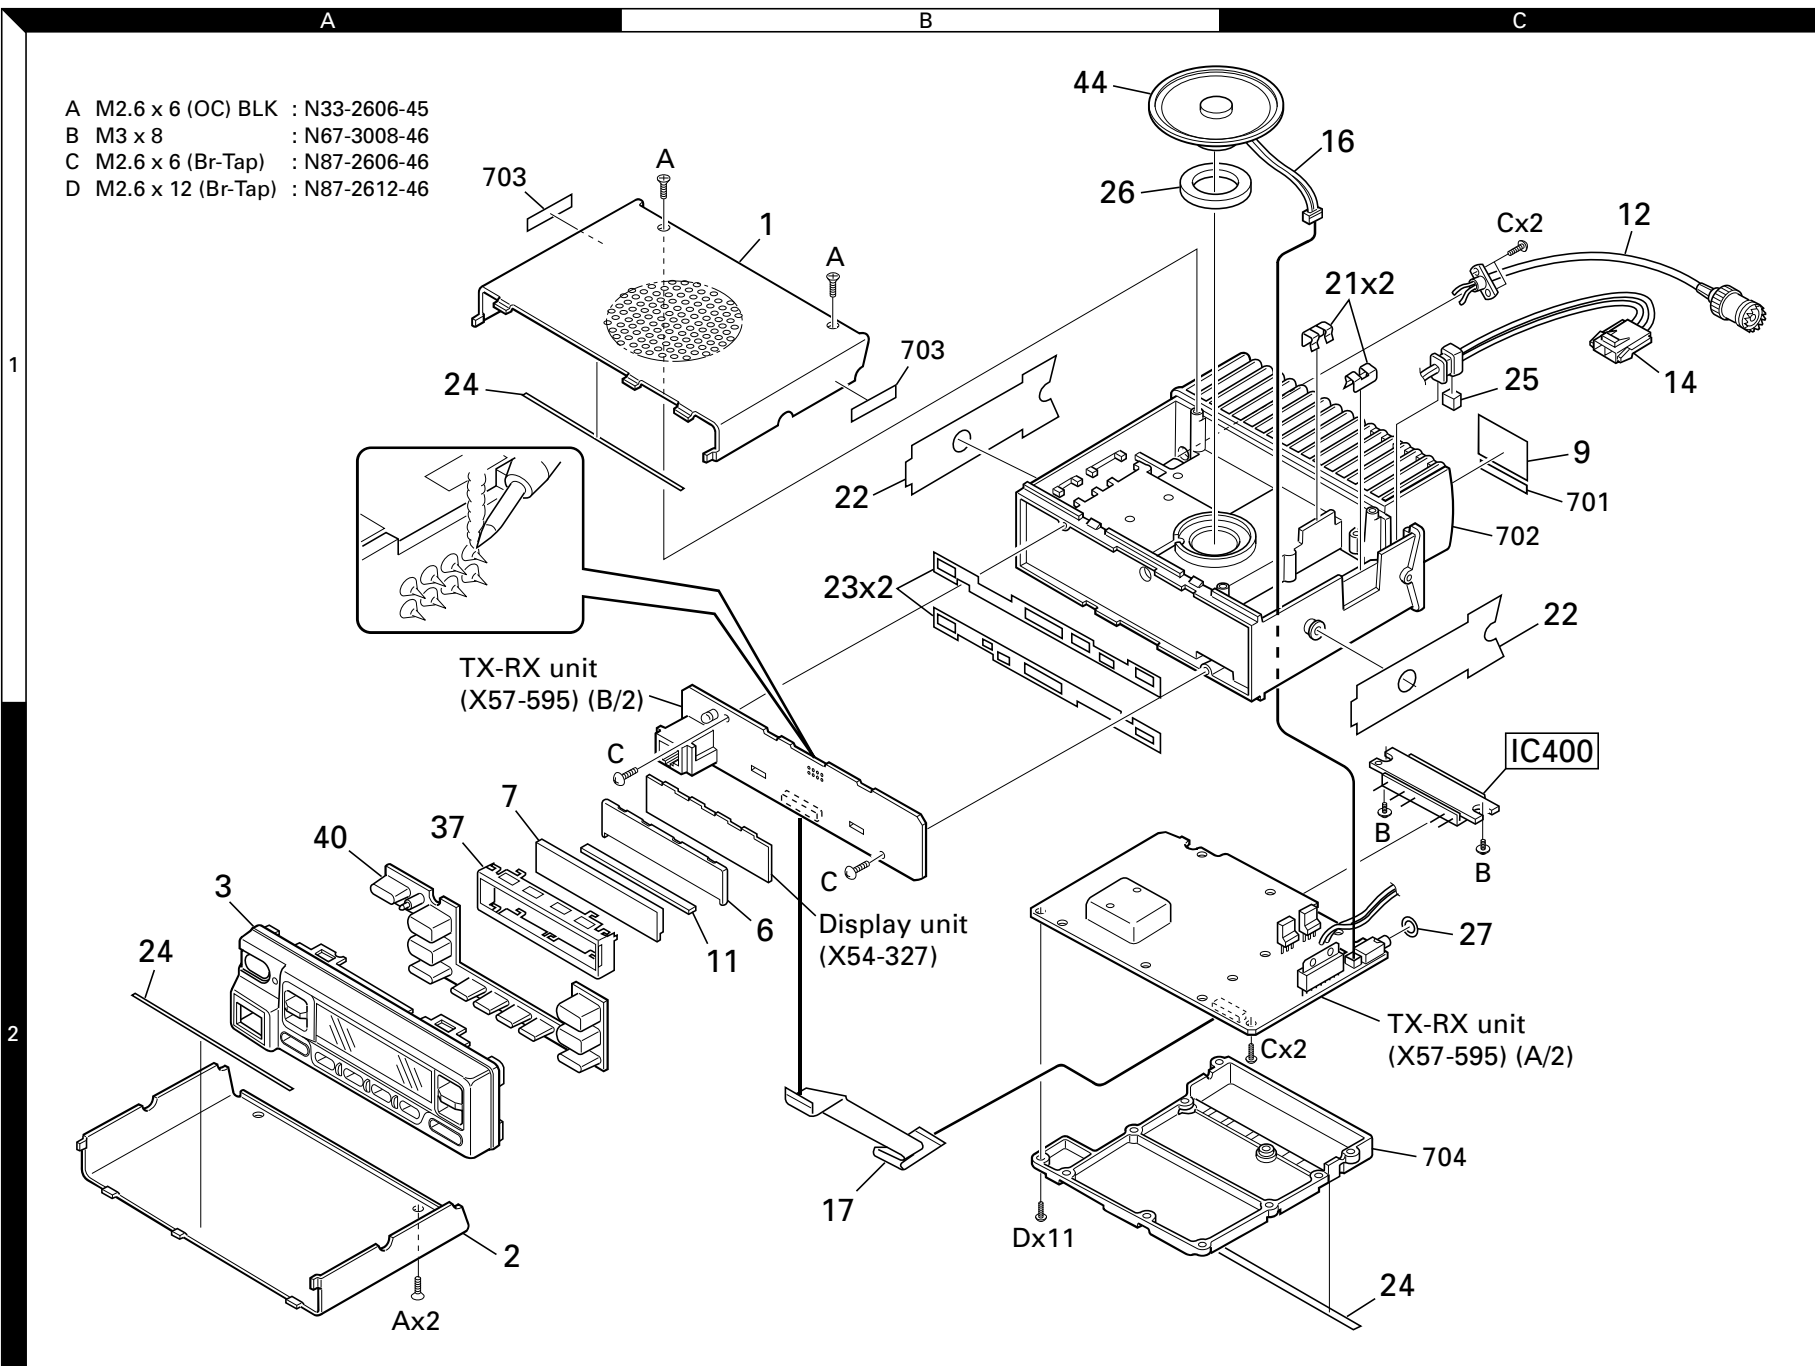

PACKING

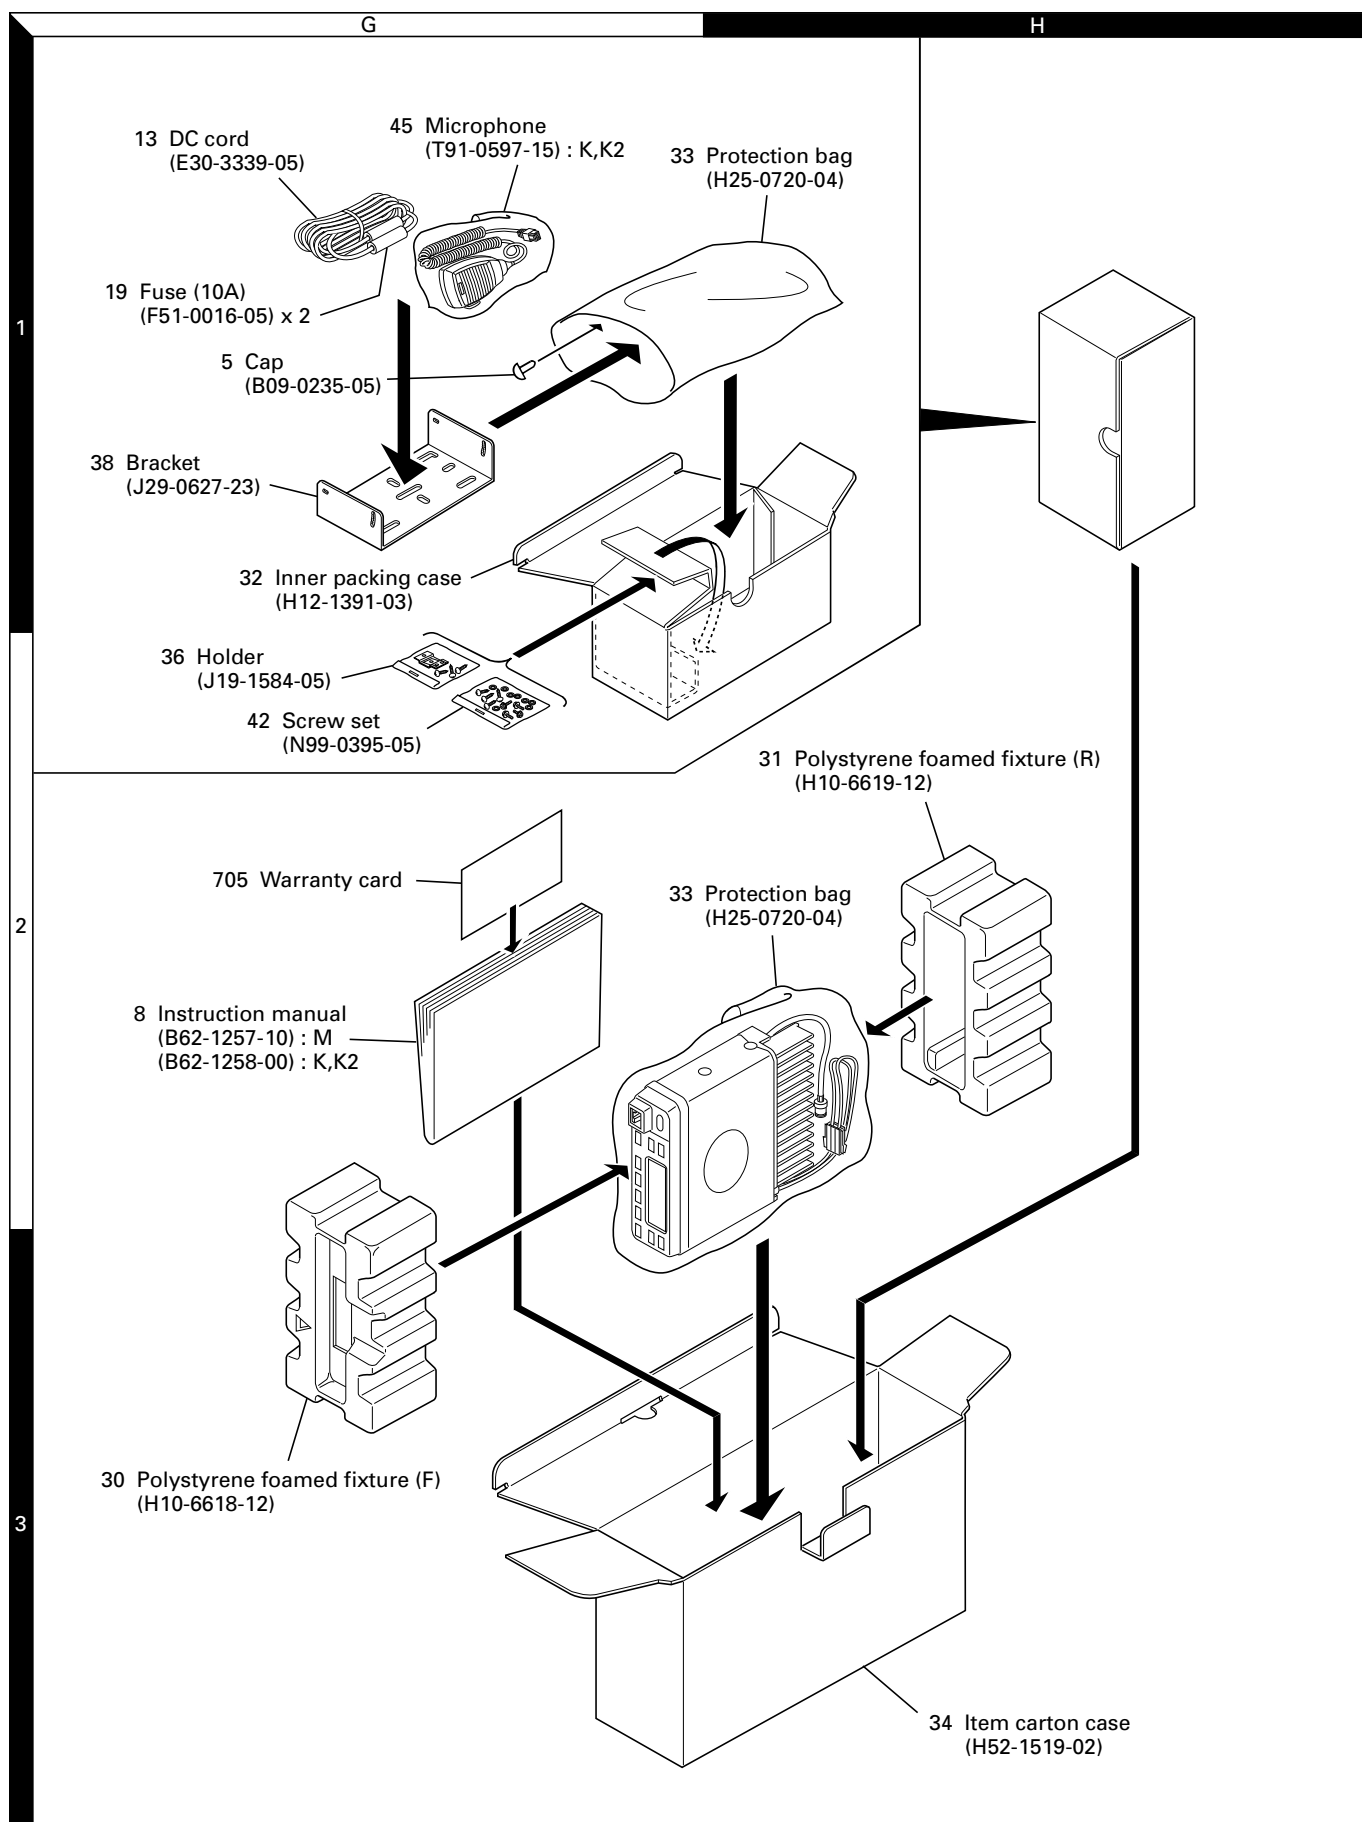

TK-760G/762G

PARTS LIST

* New Parts. ⚠ indicates safety critical components.

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

L : Scandinavia

Y : PX (Far East, Hawaii)

Y : AAFES (Europe)

K : USA

T : England

X : Australia

P : Canada

E : Europe

M : Other Areas

TK-760G/762G

DISPLAY UNIT (X54-3270-10) : TK-760G, DISPLAY UNIT (X54-3280-10) : TK-762G

Ref. No.	Address	New parts	Parts No.	Description	Destination
TK-760G/762G					
1	1B,1E		A01-2165-13	CABINET UPPER	
2	2A,2D		A01-2166-13	CABINET LOWER	
3	2A		A62-0642-03	PANEL ASSY	760
3	2D		A62-0731-03	PANEL ASSY	762
5	1G		B09-0235-05	CAP	
6	2B		B11-1226-03	ILLUMINATION GUIDE	760
6	2E		B11-1230-03	ILLUMINATION GUIDE	762
7	2A		B38-0824-05	LCD	760
7	2E		B38-0825-05	LCD	762
8	2G	*	B62-1257-10	INSTRUCTION MANUAL	M
8	2G		B62-1258-00	INSTRUCTION MANUAL	K,K2
9	1C		B72-1690-04	MODEL NAME PLATE	760K
9	1C		B72-1691-04	MODEL NAME PLATE	760M
9	1F		B72-1694-04	MODEL NAME PLATE	762K
9	1C		B72-1742-04	MODEL NAME PLATE	760K2
9	1F		B72-1744-04	MODEL NAME PLATE	762K2
11	2B		E29-1179-04	INTER CONNECTOR	760
11	2E		E29-1183-04	INTER CONNECTOR	762
12	1C		E30-2145-15	ANTENNA CABLE	
13	1G		E30-3339-05	DC CORD ACC	
14	1C,1F		E30-3340-05	DC CORD RADIO	
-	-		E30-3404-05	TRUNK CABLE	
16	1C,1F		E37-0790-15	LEAD WIRE WITH CONNECTOR (SP)	
17	2B,2E		E37-0815-05	FLAT CABLE	
19	1G		F51-0016-05	FUSE (6*30) 10A	
21	1C,1F		G02-0791-04	FLAT SPRING AF,APC	
22	1B,1E		G10-1221-04	FIBROUS SHEET SIDE	
23	1B,1E		G10-1222-14	FIBROUS SHEET UP,DOWN	
24	1A,1D		G10-1223-14	FIBROUS SHEET SHIELD	
25	1C,1F		G13-1468-04	CUSHION DC CORD	
26	1B,1E		G13-1759-04	CUSHION SP	
27	2C,2F		G53-0796-04	PACKING PHONE JACK	
28	2E		G53-0889-04	PACKING DISPLAY UNIT	762
30	3G		H10-6618-12	POLYSTYRENE FOAMED FIXTURE (F)	
31	2H		H10-6619-12	POLYSTYRENE FOAMED FIXTURE (R)	
32	1G		H12-1391-03	INNER PACKING CASE	
33	1H,2H		H25-0720-04	PROTECTION BAG (200X350)	
34	3H		H52-1519-02	ITEM CARTON CASE	
36	2G		J19-1584-05	HOLDER ACC	
37	2A,2D		J21-8382-03	HARDWARE FIXTURE	
38	1G		J29-0627-23	BRACKET	
40	2A		K29-5343-02	KEY TOP	760
40	2D		K29-5344-02	KEY TOP	762
A	2A,2D		N33-2606-45	OVAL HEAD MACHINE SCREW	
B	2C,2F		N67-3008-46	PAN HEAD SEMS SCREW W	
C	2B,2E		N87-2606-46	BRAZIER HEAD TAPTITE SCREW	
D	2B,2E		N87-2612-46	BRAZIER HEAD TAPTITE SCREW	
42	2G		N99-0395-05	SCREW SET	
44	1B,1E		T07-0368-05	SPEAKER	
45	1G		T91-0597-15	MICROPHONE	K,K2

Ref. No.	Address	New parts	Parts No.	Description	Destination
DISPLAY UNIT (X54-3270-10) : TK-760G					
D802-805		*	B30-2220-05	LED (2P/YELLOW)	
C801-803			CC73GCH1H101J	CHIP C 100PF J	
C804			CK73GF1A105Z	CHIP C 1.0UF Z	
C805			CK73GB1H102K	CHIP C 1000PF K	
C806,807			CK73GB1H471K	CHIP C 470PF K	
CN801			E40-6020-05	PIN ASSY	
L801			L92-0138-05	FERRITE CHIP	
R801-803			RK73GB1J103J	CHIP R 10K J 1/16W	
R804			RK73GB1J473J	CHIP R 47K J 1/16W	
R805			RK73GB1J474J	CHIP R 470K J 1/16W	
R806			R92-1252-05	CHIP R 0 OHM	
R808			RK73GB1J392J	CHIP R 3.9K J 1/16W	
R809			RK73FB2A270J	CHIP R 27 J 1/10W	
D801			MA2S111	DIODE	
D808			HSB123	DIODE	
IC801			LC75823W	IC (MOS-IC)	
Q801			2SB1132(Q,R)	TRANSISTOR	
DISPLAY UNIT (X54-3280-10) : TK-762G					
D801			B30-2204-05	LED (RED/YELLOW)	
D803			B30-2220-05	LED (2P/YELLOW)	
D804			B30-2204-05	LED (RED/YELLOW)	
C801			CK73GB1H471K	CHIP C 470PF K	
C802-804			CC73GCH1H101J	CHIP C 100PF J	
C805			CK73GF1A105Z	CHIP C 1.0UF Z	
C806			CK73GB1H471K	CHIP C 470PF K	
C807			CK73GB1H102K	CHIP C 1000PF K	
C808			CK73GB1H471K	CHIP C 470PF K	
C812			CK73GB1H471K	CHIP C 470PF K	
CN801			E40-6020-05	PIN ASSY	
L801			L92-0138-05	FERRITE CHIP	
R801,802			RK73GB1J103J	CHIP R 10K J 1/16W	
R803			RK73FB2A123J	CHIP R 12K J 1/10W	
R804			RK73GB1J103J	CHIP R 10K J 1/16W	
R805			RK73FB2A332J	CHIP R 3.3K J 1/10W	
R806			RK73GB1J474J	CHIP R 470K J 1/16W	
R807			R92-1252-05	CHIP R 0 OHM	
R808			RK73GB1J393J	CHIP R 39K J 1/16W	
R809			RK73FB2A123J	CHIP R 12K J 1/10W	
R810			RK73FB2A332J	CHIP R 3.3K J 1/10W	
R812			RK73FB2A561J	CHIP R 560 J 1/10W	
R813-816			RK73GB1J473J	CHIP R 47K J 1/16W	
D802			MA2S111	DIODE	
IC801			LC75833W	IC (LCD DRIVER)	
Q801-803			DTA114EKA	DIGITAL TRANSISTOR	
Q804			KRA225S	TRANSISTOR	
Q805			DTA114EKA	DIGITAL TRANSISTOR	
Q806-809			2SK1824	FET	

PARTS LIST

TX-RX UNIT (X57-5950-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
TX-RX UNIT (X57-5950-XX) -10 : TK-760G K -11 : TK-762G K -12 : TK-760G K2 -13 : TK-762G K2 -21 : TK-760G M											
D509-514 D521			B30-2050-05 B30-2151-05	LED LED (RED/GRN)		C98			CK73GB1H103K	CHIP C 0.010UF K	
C1-19			CK73GB1H102K	CHIP C 1000PF K		C99			C92-0004-05	CHIP-TAN 1.0UF 16WV	
C20			C92-0507-05	CHIP-TAN 4.7UF 6.3WV		C100			CK73GB1H102K	CHIP C 1000PF K	
C21			CK73GB1H102K	CHIP C 1000PF K		C101			CC73GCH1H040C	CHIP C 4.0PF C	
C22			CK73GB1C104K	CHIP C 0.10UF K		C102,103			CK73GB1H102K	CHIP C 1000PF K	
C23,24			C92-0507-05	CHIP-TAN 4.7UF 6.3WV							
C26			CK73GB1H102K	CHIP C 1000PF K		C104			C92-0002-05	CHIP-TAN 0.22UF 35WV	
C29			C92-0507-05	CHIP-TAN 4.7UF 6.3WV		C105			CK73GB1H102K	CHIP C 1000PF K	
C30			CC73GCH1H050C	CHIP C 5.0PF C		C106			CC73GCH1H180J	CHIP C 18PF J	
C31			CK73GB1H102K	CHIP C 1000PF K		C107			CK73GB1H102K	CHIP C 1000PF K	
C32			C92-0662-05	CHIP-TAN 15UF 6.3WV		C110			CC73GCH1H180J	CHIP C 18PF J	
C33			CC73GCH1H220J	CHIP C 22PF J		C111			CC73GCH1H040C	CHIP C 4.0PF C	
C35			CK73GB1C104K	CHIP C 0.10UF K		C112			CK73GB1H102K	CHIP C 1000PF K	
C36			CK73GB1H102K	CHIP C 1000PF K		C113			C92-0507-05	CHIP-TAN 4.7UF 6.3WV	
C37			CK73FB1C334K	CHIP C 0.33UF K		C114			C92-0697-05	CHIP-TAN 3.3UF 16WV	
C40,41			CK73GB1H103K	CHIP C 0.010UF K		C115			CK73GB1H102K	CHIP C 1000PF K	
C43			C92-0507-05	CHIP-TAN 4.7UF 6.3WV		C116			CK73GB1H103K	CHIP C 0.010UF K	
C44			CK73GB1H331K	CHIP C 330PF K		C117			CK73GB1H102K	CHIP C 1000PF K	
C45			CK73GB1H102K	CHIP C 1000PF K		C118			CC73GCH1H100D	CHIP C 10PF D	
C46			CK73GB1H103K	CHIP C 0.010UF K		C119			CK73GB1H103K	CHIP C 0.010UF K	
C47			C92-0561-05	CHIP-ELE 22UF 16WV		C120			CC73GCH1H220J	CHIP C 22PF J	K,M
C49			CK73GB1H102K	CHIP C 1000PF K		C120			CC73GCH1H330J	CHIP C 33PF J	K2
C50			CC73GCH1H220J	CHIP C 22PF J		C121			CK73GB1H102K	CHIP C 1000PF K	
C51			CK73GB1C104K	CHIP C 0.10UF K		C122,123			CK73GB1C104K	CHIP C 0.10UF K	
C52			CC73GCH1H680J	CHIP C 68PF J		C124			CC73GCH1H101J	CHIP C 100PF J	
C53			CK73GB1C104K	CHIP C 0.10UF K		C125			C92-0004-05	CHIP-TAN 1.0UF 16WV	
C54			CK73GB1H103K	CHIP C 0.010UF K		C126			CC73GCH1H180J	CHIP C 18PF J	
C56			CC73GCH1H220J	CHIP C 22PF J		C127			CK73GB1H103K	CHIP C 0.010UF K	
C58			CK73GB1E223K	CHIP C 0.022UF K		C128			C92-0543-05	CHIP-TAN 3.3UF 10WV	
C60,61			CK73GB1H102K	CHIP C 1000PF K		C129			CK73FF1C105Z	CHIP C 1.0UF Z	
C62			CC73GCH1H101J	CHIP C 100PF J		C130			CK73GB1H103K	CHIP C 0.010UF K	
C63			CK73GB1C104K	CHIP C 0.10UF K		C131-133			CK73GB1H102K	CHIP C 1000PF K	
C64			CK73GB1H103K	CHIP C 0.010UF K		C134			CK73FB1E104K	CHIP C 0.10UF K	
C66,67			CK73GB1H102K	CHIP C 1000PF K		C135			CC73GCH1H090D	CHIP C 9.0PF D	K,M
C69			CK73GB1E223K	CHIP C 0.022UF K		C135			CC73GCH1H120J	CHIP C 12PF J	K2
C70			C92-0507-05	CHIP-TAN 4.7UF 6.3WV		C136			CK73GB1C104K	CHIP C 0.10UF K	
C72			C92-0507-05	CHIP-TAN 4.7UF 6.3WV		C137			CC73GCH1H101J	CHIP C 100PF J	
C74,75			CK73GB1H102K	CHIP C 1000PF K		C138			CK73FB1E104K	CHIP C 0.10UF K	
C77			C90-2046-05	ELECTRO 22UF 10WV		C139			CK73GB1H102K	CHIP C 1000PF K	
C78			CK73GB1H102K	CHIP C 1000PF K		C141			C92-0719-05	ELECTRO 47UF 25WV	
C79,80			CK73GB1H221K	CHIP C 220PF K		C142-144			CK73GB1H102K	CHIP C 1000PF K	
C81			CK73GB1H102K	CHIP C 1000PF K		C146-149			CK73GB1H102K	CHIP C 1000PF K	
C82			C92-0507-05	CHIP-TAN 4.7UF 6.3WV		C150			CK73FF1C105Z	CHIP C 1.0UF Z	
C83			CC73GCH1H270J	CHIP C 27PF J		C151			CK73GB1H102K	CHIP C 1000PF K	
C84			C92-0507-05	CHIP-TAN 4.7UF 6.3WV		C152			CC73GCH1H030C	CHIP C 3.0PF C	K,M
C86			C92-0662-05	CHIP-TAN 15UF 6.3WV		C152			CC73GCH1H050C	CHIP C 5.0PF C	K2
C87			CC73GCH1H330J	CHIP C 33PF J		C153			CC73GCH1H330J	CHIP C 33PF J	
C88			CK73GB1H103K	CHIP C 0.010UF K		C154			CK73GB1H102K	CHIP C 1000PF K	
C91			CC73GCH1H050C	CHIP C 5.0PF C		C155			CC73GCH1H220J	CHIP C 22PF J	
C92			CK73GB1H102K	CHIP C 1000PF K		C156,157			CK73GB1H102K	CHIP C 1000PF K	
C93			C92-0555-05	CHIP-TAN 0.047UF 35WV		C158			CC73GCH1H390J	CHIP C 39PF J	
C94			CK73GB1H102K	CHIP C 1000PF K		C159			CC73GCH1H180J	CHIP C 18PF J	
C95			CC73GCH1H020B	CHIP C 2.0PF B		C160,161			C92-0719-05	ELECTRO 47UF 25WV	
C96			CK73GB1H102K	CHIP C 1000PF K		C162			CK73GB1H102K	CHIP C 1000PF K	
C97			C92-0546-05	CHIP-TAN 68UF 6.3WV		C163			CC73GCH1H010B	CHIP C 1.0PF B	
						C164			CK73GB1H102K	CHIP C 1000PF K	
						C165			C92-0719-05	ELECTRO 47UF 25WV	
						C166			CE04EW1E471M	ELECTRO 470UF 25WV	
						C167			CC73GCH1H150J	CHIP C 15PF J	
						C168-170			CK73GB1H102K	CHIP C 1000PF K	
						C171			CC73GCH1H020B	CHIP C 2.0PF B	

TK-760G/762G

PARTS LIST

TX-RX UNIT (X57-5950-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
C172			CE04EW1E471M	ELECTRO 470UF 25WV		C503			CK73GB1H471K	CHIP C 470PF K	
C173			CK73GB1C104K	CHIP C 0.10UF K		C504			CK73GB1H103K	CHIP C 0.010UF K	
C174			CK73GB1H102K	CHIP C 1000PF K		C505			CK73GB1C104K	CHIP C 0.10UF K	
C175			CC73GCH1H080D	CHIP C 8.0PF D	K,M	C506,507			CK73GB1H103K	CHIP C 0.010UF K	
C175			CC73GCH1H100D	CHIP C 10PF D	K2	C508			CK73GB1H472K	CHIP C 4700PF K	
C177			CK73GB1H102K	CHIP C 1000PF K		C509			C92-0507-05	CHIP-TAN 4.7UF 6.3WV	
C179			CK73GB1H102K	CHIP C 1000PF K		C514			CC73GCH1H680J	CHIP C 68PF J	
C180			CK73GB1H103K	CHIP C 0.010UF K		C515			CK73GB1H103K	CHIP C 0.010UF K	
C181			CC73FCH1H120J	CHIP C 12PF J		C516			CC73GCH1H270J	CHIP C 27PF J	
C183			CK73GB1H102K	CHIP C 1000PF K		C517			CK73GB1C683K	CHIP C 0.068UF K	
C185			CK73GB1C104K	CHIP C 0.10UF K		C518			CC73GCH1H270J	CHIP C 27PF J	
C186,187			CK73GB1H102K	CHIP C 1000PF K		C519			CK73GB1H102K	CHIP C 1000PF K	
C189,190			CK73GB1H102K	CHIP C 1000PF K		C520			CK73GB1C104K	CHIP C 0.10UF K	
C192			CK73GB1H102K	CHIP C 1000PF K		C521			CK73GB1H102K	CHIP C 1000PF K	
C194			CK73GB1C104K	CHIP C 0.10UF K		C522			C92-0507-05	CHIP-TAN 4.7UF 6.3WV	
C195			C92-0719-05	ELECTRO 47UF 25WV		C523			CC73GCH1H221J	CHIP C 220PF J	
C196			CK73GB1H102K	CHIP C 1000PF K		C524			CK73GB1H103K	CHIP C 0.010UF K	
C198			CK73GB1H102K	CHIP C 1000PF K		C525			CK73GB1E123K	CHIP C 0.012UF K	
C200			CK73GB1H102K	CHIP C 1000PF K		C526			CK73GB1C683K	CHIP C 0.068UF K	
C201			CK73GB1C104K	CHIP C 0.10UF K		C527			CK73GB1H222K	CHIP C 2200PF K	
C203			CK73GB1H102K	CHIP C 1000PF K		C528			CK73GB1H103K	CHIP C 0.010UF K	
C204			C92-0004-05	CHIP-TAN 1.0UF 16WV		C529			CK73GB1H272K	CHIP C 2700PF K	
C205			C93-0558-05	CHIP C 8.0PF D	K2	C530			CK73GB1H152K	CHIP C 1500PF K	
C205			C93-0560-05	CHIP C 10PF D	K,M	C531			CK73GB1H272K	CHIP C 2700PF K	
C207			CK73GB1H103K	CHIP C 0.010UF K		C532,533			CK73GB1C104K	CHIP C 0.10UF K	
C208			CC73FCH1H030C	CHIP C 3.0PF C	K,M	C534,535			CK73GB1H103K	CHIP C 0.010UF K	
C208			CC73FCH1H040C	CHIP C 4.0PF C	K2	C536,537			CK73GB1C104K	CHIP C 0.10UF K	
C209			C93-0563-05	CHIP C 18PF J	K2	C538			C92-0566-05	CHIP-TAN 10UF 6.3WV	
C209			C93-0564-05	CHIP C 22PF J	K,M	C539			CK73GB1H103K	CHIP C 0.010UF K	
C210			CK73GB1H103K	CHIP C 0.010UF K		C540,541			CK73GB1C104K	CHIP C 0.10UF K	
C211			C93-0564-05	CHIP C 22PF J		C542			CC73GCH1H331J	CHIP C 330PF J	
C212			CK73GB1H102K	CHIP C 1000PF K		C543			CK73GB1H102K	CHIP C 1000PF K	
C213			C93-0563-05	CHIP C 18PF J		C544-546			CK73GB1H562K	CHIP C 5600PF K	
C214			C93-0603-05	CHIP C 1000PF K		C547			CC73GCH1H030C	CHIP C 3.0PF C	
C215			C93-0561-05	CHIP C 12PF J		C548-550			CK73GB1H272K	CHIP C 2700PF K	
C216			CC73GCH1H0R5B	CHIP C 0.5PF B		C551			CC73GCH1H151J	CHIP C 150PF J	
C217			CC73GCH1H010B	CHIP C 1.0PF B		C552			CC73GCH1H030C	CHIP C 3.0PF C	
C218			CK73GB1C104K	CHIP C 0.10UF K	K,M	C553			CK73GB1H102K	CHIP C 1000PF K	
C219			C93-0565-05	CHIP C 27PF J		C554			CK73GB1H122K	CHIP C 1200PF K	
C220			CK73GB1H102K	CHIP C 1000PF K		C555			C92-0566-05	CHIP-TAN 10UF 6.3WV	
C221			C93-0563-05	CHIP C 18PF J	K,M	C556			CK73GB1C333K	CHIP C 0.033UF K	
C221			C93-0565-05	CHIP C 27PF J	K2	C557			CK73GB1C104K	CHIP C 0.10UF K	
C222			CC73GCH1H0R5B	CHIP C 0.5PF B		C558			CC73GCH1H101J	CHIP C 100PF J	
C223			CC73GCH1H010B	CHIP C 1.0PF B	K,M	C559			CK73GB1H102K	CHIP C 1000PF K	
C223			CC73GCH1H020B	CHIP C 2.0PF B	K2	C560-563			CK73GB1C104K	CHIP C 0.10UF K	
C224			CK73GB1H102K	CHIP C 1000PF K		C564			C92-0507-05	CHIP-TAN 4.7UF 6.3WV	
C230,231			CK73GB1C104K	CHIP C 0.10UF K		C565,566			CK73GB1H472K	CHIP C 4700PF K	
C241			C93-0554-05	CHIP C 4.0PF C	K,M	C567			CC73GCH1H101J	CHIP C 100PF J	
C241			C93-0555-05	CHIP C 5.0PF C	K2	C568			C92-0507-05	CHIP-TAN 4.7UF 6.3WV	
C248			C92-0585-05	CHIP-TAN 4.7UF 16WV		C569			CK73GB1E223K	CHIP C 0.022UF K	
C259			CK73GB1C104K	CHIP C 0.10UF K		C570			CK73FF1C105Z	CHIP C 1.0UF Z	
C260			CK73GB1H103K	CHIP C 0.010UF K		C571,572			CK73GB1H102K	CHIP C 1000PF K	
C261			CK73FF1C105Z	CHIP C 1.0UF Z		C573			CK73FB1H563K	CHIP C 0.056UF K	
C270			CK73GB1C104K	CHIP C 0.10UF K		C574			CC73GCH1H470J	CHIP C 47PF J	
C271			CK73GB1H472K	CHIP C 4700PF K		C575			CK73GB1H102K	CHIP C 1000PF K	
C272			CS15E1C010M	TANTAL 1.0UF 16WV		C576			CK73GB1C104K	CHIP C 0.10UF K	
C274			CK73GB1C104K	CHIP C 0.10UF K		C577,578			CK73GB1H103K	CHIP C 0.010UF K	
C275			C92-0004-05	CHIP-TAN 1.0UF 16WV	K2	C579			CC73GCH1H101J	CHIP C 100PF J	
C501			CK73GB1H102K	CHIP C 1000PF K		C580			CK73GB1C104K	CHIP C 0.10UF K	
C502			CK73GB1C104K	CHIP C 0.10UF K		C581			CK73GB1H102K	CHIP C 1000PF K	

PARTS LIST

TX-RX UNIT (X57-5950-XX)

Ref. No.	Address	New parts	Parts No.	Description	Desti-nation	Ref. No.	Address	New parts	Parts No.	Description	Desti-nation
C582			CK73GB1C473K	CHIP C 0.047UF K		L12			L40-3375-34	SMALL FIXED INDUCTOR (33NH/8)	
C583			C92-0566-05	CHIP-TAN 10UF 6.3WV		L13			L34-4473-05	COIL	
C584			CK73GB1H103K	CHIP C 0.010UF K		L14			L40-6875-34	SMALL FIXED INDUCTOR (68NH/8)	
C585			CC73GCH1H101J	CHIP C 100PF J		L15			L34-4473-05	COIL	
C587			CK73GB1H103K	CHIP C 0.010UF K		L17			L92-0179-05	FERRITE CHIP	
C589			C92-0606-05	CHIP-TAN 4.7UF 10WV		L18			L34-4472-05	COIL	
C590			CK73GB1H102K	CHIP C 1000PF K		L20			L34-4480-05	AIR-CORE COIL	K2
C594			CK73GB1H102K	CHIP C 1000PF K		L20			L34-4481-05	AIR-CORE COIL	K,M
C596			CK73GB1H102K	CHIP C 1000PF K		L21			L34-4478-05	AIR-CORE COIL	
C597			CC73GCH1H101J	CHIP C 100PF J		L22			L34-4480-05	AIR-CORE COIL	
C598			CK73GB1H102K	CHIP C 1000PF K		L23			L34-0742-05	AIR-CORE COIL	
C599			CC73GCH1H101J	CHIP C 100PF J		L24			L34-4481-05	AIR-CORE COIL	
C600			CK73GB1H102K	CHIP C 1000PF K		L25			L34-4478-05	AIR-CORE COIL	
C601,602			CC73GCH1H101J	CHIP C 100PF J		L26			L40-4775-77	SMALL FIXED INDUCTOR (47NH/1608)	
C603			CK73GB1H102K	CHIP C 1000PF K		L27			L40-1581-86	SMALL FIXED INDUCTOR (0.15U/160)	
C604-606			CC73GCH1H101J	CHIP C 100PF J		L33			L92-0179-05	FERRITE CHIP	
C608-610			CC73GCH1H101J	CHIP C 100PF J		L501			L92-0138-05	FERRITE CHIP	
C611,612			CK73GB1H471K	CHIP C 470PF K		L503,504			L92-0138-05	FERRITE CHIP	
C613			CC73GCH1H101J	CHIP C 100PF J		L510			L92-0138-05	FERRITE CHIP	
C615			CK73GB1H471K	CHIP C 470PF K		X1			L77-1826-05	TCXO (16.8M)	
C616			CC73GCH1H101J	CHIP C 100PF J		X501			L77-1708-05	CRYSTAL RESONATOR (3.579545MHZ)	
C618			CK73GB1H102K	CHIP C 1000PF K		X502			L78-0462-05	RESONATOR (9.8304M/8*2.5)	
C620			CK73GB1H471K	CHIP C 470PF K		XF1			L71-0551-15	MCF (49.95MHZ/5.0K)	
C621			CK73GB1H102K	CHIP C 1000PF K		CP501-505			R90-0741-05	MULTIPLE RESISTOR	
C623			CK73GB1H102K	CHIP C 1000PF K		CP508-514			R90-0741-05	MULTIPLE RESISTOR	
C626			CK73GB1C104K	CHIP C 0.10UF K		CP516-524			R90-0741-05	MULTIPLE RESISTOR	
C628			CK73GB1C104K	CHIP C 0.10UF K		CP526,527			R90-0741-05	MULTIPLE RESISTOR	
C629			CC73GCH1H470J	CHIP C 47PF J		CP529-536			R90-0741-05	MULTIPLE RESISTOR	
C630			C92-0507-05	CHIP-TAN 4.7UF 6.3WV		CP538			R90-0741-05	MULTIPLE RESISTOR	
C631			CK73GB1H103K	CHIP C 0.010UF K		CP539			R90-0724-05	MULTI-COMP 1K X4	
C632			CK73GB0J105K	CHIP C 1.0UF K		R1			R92-1252-05	CHIP R 0 OHM	
C633			CK73GB1C104K	CHIP C 0.10UF K		R2			RK73GB1J102J	CHIP R 1.0K J 1/16W	
C720			C92-0566-05	CHIP-TAN 10UF 6.3WV		R3			R92-1252-05	CHIP R 0 OHM	
CN1			E40-6047-05	PIN ASSY		R4			RK73GB1J333J	CHIP R 33K J 1/16W	
CN2			E40-6021-05	FLAT CABLE CONNECTOR		R5,6			R92-1252-05	CHIP R 0 OHM	
CN3			E40-3247-05	PIN ASSY		R7,8			RK73GB1J102J	CHIP R 1.0K J 1/16W	
CN4			E40-5737-05	PIN ASSY		R9,10			R92-1252-05	CHIP R 0 OHM	
CN5			E40-5738-05	PIN ASSY		R11			RK73GB1J102J	CHIP R 1.0K J 1/16W	
CN7			E40-3247-05	PIN ASSY		R12			RK73GB1J104J	CHIP R 100K J 1/16W	
CN8			E40-3246-05	PIN ASSY		R13			RK73GB1J473J	CHIP R 47K J 1/16W	
CN501			E40-6021-05	FLAT CABLE CONNECTOR		R14			RK73GB1J474J	CHIP R 470K J 1/16W	
J1			E11-0442-05	3.5D PHONE JACK (3P)		R15			RK73GB1J104J	CHIP R 100K J 1/16W	
J501			E08-0877-05	MODULAR JACK		R16			RK73GB1J220J	CHIP R 22 J 1/16W	
W1		*	E37-0856-05	PROCESSED LEAD WIRE		R17			RK73GB1J154J	CHIP R 150K J 1/16W	
F1			F53-0108-05	FUSE		R18			RK73GB1J104J	CHIP R 100K J 1/16W	
-			J31-0543-05	COLLAR (LH-5-1.5)		R19			RK73GB1J392J	CHIP R 3.9K J 1/16W	
CF1			L72-0959-05	CERAMIC FILTER		R20			RK73GB1J224J	CHIP R 220K J 1/16W	
CF2			L72-0973-05	CERAMIC FILTER		R21			RK73GB1J102J	CHIP R 1.0K J 1/16W	
L1			L40-1005-34	SMALL FIXED INDUCTOR (10UH/8)		R22			RK73GB1J474J	CHIP R 470K J 1/16W	
L2-4			L40-3381-86	SMALL FIXED INDUCTOR (0.33U/160)		R23			RK73GB1J223J	CHIP R 22K J 1/16W	
L5			L34-4530-05	COIL		R24			RK73GB1J183J	CHIP R 18K J 1/16W	
L6			L40-1581-86	SMALL FIXED INDUCTOR (0.15U/160)		R25,26			R92-1252-05	CHIP R 0 OHM	
L7			L40-4785-85	SMALL FIXED INDUCTOR (0.47U/252)		R29			R92-1252-05	CHIP R 0 OHM	
L8			L40-8285-85	SMALL FIXED INDUCTOR (0.82U/252)		R30			RK73GB1J103J	CHIP R 10K J 1/16W	
L9			L40-1085-77	SMALL FIXED INDUCTOR (100NH/160)		R31			RK73GB1J152J	CHIP R 1.5K J 1/16W	
L10			L40-6875-77	SMALL FIXED INDUCTOR (68NH/1608)		R32			RK73GB1J103J	CHIP R 10K J 1/16W	
L11			L34-4472-05	COIL		R33			R92-1252-05	CHIP R 0 OHM	
						R34			RK73GB1J104J	CHIP R 100K J 1/16W	
						R35			RK73GB1J224J	CHIP R 220K J 1/16W	

TK-760G/762G

PARTS LIST

TX-RX UNIT (X57-5950-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
R36			RK73GB1J223J	CHIP R 22K J 1/16W		R107			RK73GB1J473J	CHIP R 47K J 1/16W	
R37			RK73GB1J220J	CHIP R 22 J 1/16W		R108			RK73GB1J271J	CHIP R 270 J 1/16W	
R38-40			RK73GB1J103J	CHIP R 10K J 1/16W		R109			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R41			RK73GB1J224J	CHIP R 220K J 1/16W		R110			RK73GB1J220J	CHIP R 22 J 1/16W	
R42			RK73GB1J473J	CHIP R 47K J 1/16W		R111			RK73GB1J180J	CHIP R 18 J 1/16W	
R43			RK73GB1J683J	CHIP R 68K J 1/16W		R112			RK73GB1J333J	CHIP R 33K J 1/16W	
R44			RK73GB1J153J	CHIP R 15K J 1/16W		R113			RK73GB1J271J	CHIP R 270 J 1/16W	
R46			RK73GB1J223J	CHIP R 22K J 1/16W		R114			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R47			RK73GB1J101J	CHIP R 100 J 1/16W		R115			RK73GB1J103J	CHIP R 10K J 1/16W	
R48			RK73GB1J334J	CHIP R 330K J 1/16W		R116			RK73GB1J473J	CHIP R 47K J 1/16W	
R49			RK73GB1J152J	CHIP R 1.5K J 1/16W		R117			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R50			RK73GB1J473J	CHIP R 47K J 1/16W		R118			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R51-53			RK73GB1J102J	CHIP R 1.0K J 1/16W		R119			RK73GB1J103J	CHIP R 10K J 1/16W	
R54			R92-1252-05	CHIP R 0 OHM		R120			R92-1252-05	CHIP R 0 OHM	
R55			RK73GB1J104J	CHIP R 100K J 1/16W		R121			RK73GB1J100J	CHIP R 10 J 1/16W	
R56			RK73GB1J101J	CHIP R 100 J 1/16W		R122			R92-1215-05	CHIP R 470 J 1/2W	
R57			RK73GB1J471J	CHIP R 470 J 1/16W		R123			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R58			RK73GB1J332J	CHIP R 3.3K J 1/16W		R124			RK73GB1J103J	CHIP R 10K J 1/16W	
R59			RK73GB1J472J	CHIP R 4.7K J 1/16W		R125			RK73GB1J333J	CHIP R 33K J 1/16W	
R60			RK73GB1J334J	CHIP R 330K J 1/16W		R126			RK73GB1J471J	CHIP R 470 J 1/16W	
R61			RK73GB1J102J	CHIP R 1.0K J 1/16W		R127			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R62			RK73GB1J224J	CHIP R 220K J 1/16W		R128			RK73GB1J220J	CHIP R 22 J 1/16W	
R63			RK73GB1J474J	CHIP R 470K J 1/16W		R129			RK73GB1J152J	CHIP R 1.5K J 1/16W	
R64			RK73GB1J223J	CHIP R 22K J 1/16W		R130			RK73GB1J103J	CHIP R 10K J 1/16W	
R65			RK73GB1J183J	CHIP R 18K J 1/16W		R131			RK73GB1J681J	CHIP R 680 J 1/16W	
R66			RK73GB1J101J	CHIP R 100 J 1/16W		R132			RK73FB2A470J	CHIP R 47 J 1/10W	
R67			RK73GB1J472J	CHIP R 4.7K J 1/16W		R133-136			R92-1252-05	CHIP R 0 OHM	
R68			RK73GB1J182J	CHIP R 1.8K J 1/16W		R137			RK73FB2A100J	CHIP R 10 J 1/10W	
R69			R92-1252-05	CHIP R 0 OHM		R138			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R70			RK73GB1J562J	CHIP R 5.6K J 1/16W		R139			RK73GB1J103J	CHIP R 10K J 1/16W	
R71			RK73GB1J103J	CHIP R 10K J 1/16W		R140			RK73FB2A2R2J	CHIP R 2.2 J 1/10W	
R72			R92-1252-05	CHIP R 0 OHM		R141			RK73GB1J103J	CHIP R 10K J 1/16W	
R73			RK73GB1J223J	CHIP R 22K J 1/16W		R142			RK73GB1J473J	CHIP R 47K J 1/16W	
R75			RK73GB1J471J	CHIP R 470 J 1/16W		R144			R92-0685-05	CHIP R 22 J 1/2W	
R76			RK73GB1J223J	CHIP R 22K J 1/16W		R145,146			RK73GB1J473J	CHIP R 47K J 1/16W	
R77			RK73GB1J154J	CHIP R 150K J 1/16W	K,M	R147			RK73GB1J102J	CHIP R 1.0K J 1/16W	K,M
R77			RK73GB1J184J	CHIP R 180K J 1/16W	K2	R147			RK73GB1J152J	CHIP R 1.5K J 1/16W	K2
R78			RK73GB1J104J	CHIP R 100K J 1/16W		R148			RK73GB1J104J	CHIP R 100K J 1/16W	
R79			RK73GB1J681J	CHIP R 680 J 1/16W		R149			RK73GB1J470J	CHIP R 47 J 1/16W	
R80			RK73GB1J471J	CHIP R 470 J 1/16W		R150			RK73GB1J104J	CHIP R 100K J 1/16W	
R81			RK73GB1J101J	CHIP R 100 J 1/16W		R151			RK73FB2A331J	CHIP R 330 J 1/10W	
R82			RK73GB1J152J	CHIP R 1.5K J 1/16W		R152			R92-1252-05	CHIP R 0 OHM	
R83			RK73GB1J684J	CHIP R 680K J 1/16W		R153			R92-0670-05	CHIP R 0 OHM	
R85			RK73GB1J272J	CHIP R 2.7K J 1/16W		R154			RK73GB1J152J	CHIP R 1.5K J 1/16W	
R86			RK73GB1J122J	CHIP R 1.2K J 1/16W		R155			RK73FB2A150J	CHIP R 15 J 1/10W	
R87			RK73GB1J102J	CHIP R 1.0K J 1/16W		R157			RK73GB1J271J	CHIP R 270 J 1/16W	
R88			RK73GB1J271J	CHIP R 270 J 1/16W		R159			RK73GB1J473J	CHIP R 47K J 1/16W	
R89			RK73GB1J102J	CHIP R 1.0K J 1/16W		R160			RK73FB2A331J	CHIP R 330 J 1/10W	
R90,91			RK73GB1J104J	CHIP R 100K J 1/16W		R161			RK73GB1J334J	CHIP R 330K J 1/16W	
R92			R92-1252-05	CHIP R 0 OHM		R162			RK73GB1J333J	CHIP R 33K J 1/16W	
R93			RK73GB1J152J	CHIP R 1.5K J 1/16W		R163			R92-0670-05	CHIP R 0 OHM	
R94			R92-1252-05	CHIP R 0 OHM		R164			R92-1213-05	CHIP R 100 J 1/2W	
R95			RK73GB1J103J	CHIP R 10K J 1/16W		R166			RK73GB1J181J	CHIP R 180 J 1/16W	
R97			RK73GB1J473J	CHIP R 47K J 1/16W		R167			R92-1252-05	CHIP R 0 OHM	
R98			RK73GB1J223J	CHIP R 22K J 1/16W		R168,169			RK73GB1J103J	CHIP R 10K J 1/16W	
R99			RK73GB1J271J	CHIP R 270 J 1/16W		R170			RK73FB2A222J	CHIP R 2.2K J 1/10W	
R100,101			RK73GB1J101J	CHIP R 100 J 1/16W		R171			RK73GB1J153J	CHIP R 15K J 1/16W	
R103			RK73GB1J472J	CHIP R 4.7K J 1/16W		R172			RK73GB1J334J	CHIP R 330K J 1/16W	
R105			RK73GB1J470J	CHIP R 47 J 1/16W		R173			RK73GB1J332J	CHIP R 3.3K J 1/16W	
R106			RK73GB1J222J	CHIP R 2.2K J 1/16W		R174			RK73GB1J103J	CHIP R 10K J 1/16W	

PARTS LIST

TX-RX UNIT (X57-5950-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
R175			RK73GB1J682J	CHIP R 6.8K J 1/16W		R550			RN73GH1J683D	CHIP R 68K D 1/16W	
R176			RK73GB1J104J	CHIP R 100K J 1/16W		R551,552			RK73GB1J223J	CHIP R 22K J 1/16W	
R177			R92-1261-05	CHIP R 150 J 1/2W		R553			RK73GB1J105J	CHIP R 1.0M J 1/16W	
R178			RK73GB1J103J	CHIP R 10K J 1/16W		R554			RN73GH1J913D	CHIP R 91K D 1/16W	
R179-181			RK73GB1J223J	CHIP R 22K J 1/16W		R555,556			RK73GB1J104J	CHIP R 100K J 1/16W	
R182			RK73GB1J102J	CHIP R 1.0K J 1/16W		R557			RN73GH1J274D	CHIP R 270K D 1/16W	
R183			R92-0670-05	CHIP R 0 OHM		R558			R92-1252-05	CHIP R 0 OHM	
R184			R92-1252-05	CHIP R 0 OHM		R559			RK73GB1J333J	CHIP R 33K J 1/16W	
R185			RK73GB1J473J	CHIP R 47K J 1/16W		R560			RK73GB1J474J	CHIP R 470K J 1/16W	
R186			R92-1252-05	CHIP R 0 OHM		R561			RK73GB1J273J	CHIP R 27K J 1/16W	
R188			RK73GB1J102J	CHIP R 1.0K J 1/16W		R562			R92-1252-05	CHIP R 0 OHM	
R189			RK73GB1J101J	CHIP R 100 J 1/16W		R563			RK73GB1J473J	CHIP R 47K J 1/16W	
R190			RK73GB1J473J	CHIP R 47K J 1/16W		R564			RK73GB1J223J	CHIP R 22K J 1/16W	
R192			RK73GB1J103J	CHIP R 10K J 1/16W		R565			R92-1252-05	CHIP R 0 OHM	
R193			RK73GB1J102J	CHIP R 1.0K J 1/16W		R566			RK73GB1J563J	CHIP R 56K J 1/16W	
R194			RK73GB1J473J	CHIP R 47K J 1/16W		R567			RK73GB1J334J	CHIP R 330K J 1/16W	
R195			RK73GB1J154J	CHIP R 150K J 1/16W		R568			RK73GB1J473J	CHIP R 47K J 1/16W	
R196			RK73GB1J332J	CHIP R 3.3K J 1/16W		R569			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R197			R92-1252-05	CHIP R 0 OHM		R570			RK73GB1J155J	CHIP R 1.5M J 1/16W	
R208			R92-0670-05	CHIP R 0 OHM		R571			RN73GH1J682D	CHIP R 6.8K D 1/16W	
R210			RK73GB1J223J	CHIP R 22K J 1/16W		R572			RK73GB1J473J	CHIP R 47K J 1/16W	
R501			RK73GB1J473J	CHIP R 47K J 1/16W		R573			RK73GB1J474J	CHIP R 470K J 1/16W	
R502			RK73GB1J472J	CHIP R 4.7K J 1/16W		R574			RN73GH1J683D	CHIP R 68K D 1/16W	
R503			RK73GB1J102J	CHIP R 1.0K J 1/16W		R575			RK73GB1J101J	CHIP R 100 J 1/16W	
R504-507			RK73GB1J473J	CHIP R 47K J 1/16W		R576			RK73GB1J224J	CHIP R 220K J 1/16W	
R508			RK73GB1J102J	CHIP R 1.0K J 1/16W		R577			RK73GB1J103J	CHIP R 10K J 1/16W	
R509,510			R92-1252-05	CHIP R 0 OHM		R578			RN73GH1J682D	CHIP R 6.8K D 1/16W	
R511			RK73GB1J473J	CHIP R 47K J 1/16W		R579			RK73GB1J223J	CHIP R 22K J 1/16W	
R512			RK73GB1J104J	CHIP R 100K J 1/16W		R580			R92-1252-05	CHIP R 0 OHM	
R513			RK73GB1J223J	CHIP R 22K J 1/16W		R581			RK73GB1J394J	CHIP R 390K J 1/16W	
R514			RK73GB1J473J	CHIP R 47K J 1/16W		R582			RK73GB1J273J	CHIP R 27K J 1/16W	
R515,516			RK73GB1J223J	CHIP R 22K J 1/16W		R583			RK73GB1J470J	CHIP R 47 J 1/16W	
R517			RK73GB1J473J	CHIP R 47K J 1/16W		R584			RK73GB1J220J	CHIP R 22 J 1/16W	
R518			RK73GB1J472J	CHIP R 4.7K J 1/16W		R585			R92-1252-05	CHIP R 0 OHM	
R519			RK73GB1J103J	CHIP R 10K J 1/16W		R586			RK73GB1J473J	CHIP R 47K J 1/16W	
R520-523			RK73GB1J102J	CHIP R 1.0K J 1/16W		R587			R92-1252-05	CHIP R 0 OHM	
R526			RK73GB1J154J	CHIP R 150K J 1/16W		R588			RK73GB1J103J	CHIP R 10K J 1/16W	
R527			R92-1252-05	CHIP R 0 OHM		R590			RK73GB1J333J	CHIP R 33K J 1/16W	
R528			RK73GB1J472J	CHIP R 4.7K J 1/16W		R591			R92-1252-05	CHIP R 0 OHM	
R529			RK73GB1J154J	CHIP R 150K J 1/16W		R592			RK73GB1J103J	CHIP R 10K J 1/16W	
R530			RK73GB1J473J	CHIP R 47K J 1/16W		R593			RK73GB1J181J	CHIP R 180 J 1/16W	
R531			RK73GB1J394J	CHIP R 390K J 1/16W		R594			RK73GB1J392J	CHIP R 3.9K J 1/16W	
R532			RK73GB1J103J	CHIP R 10K J 1/16W		R595			RK73GB1J181J	CHIP R 180 J 1/16W	
R533			RK73GB1J104J	CHIP R 100K J 1/16W		R598			RK73GB1J473J	CHIP R 47K J 1/16W	
R534			RK73GB1J823J	CHIP R 82K J 1/16W		R599			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R535			RK73GB1J103J	CHIP R 10K J 1/16W		R600			R92-1252-05	CHIP R 0 OHM	
R536			RK73GB1J153J	CHIP R 15K J 1/16W		R602			RK73GB1J473J	CHIP R 47K J 1/16W	
R537			RK73GB1J105J	CHIP R 1.0M J 1/16W		R603			RK73GB1J101J	CHIP R 100 J 1/16W	
R538			RK73GB1J103J	CHIP R 10K J 1/16W		R604			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R539			R92-1252-05	CHIP R 0 OHM		R605			RK73GB1J332J	CHIP R 3.3K J 1/16W	
R540			RK73GB1J223J	CHIP R 22K J 1/16W		R606			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R541			RK73GB1J184J	CHIP R 180K J 1/16W		R607			RK73GB1J101J	CHIP R 100 J 1/16W	
R542			RK73GB1J102J	CHIP R 1.0K J 1/16W		R608			RK73GB1J122J	CHIP R 1.2K J 1/16W	
R543			RK73GB1J184J	CHIP R 180K J 1/16W		R610,611			RK73GB1J473J	CHIP R 47K J 1/16W	
R544			RK73GB1J103J	CHIP R 10K J 1/16W		R612			RC05GF2H221J	RC 220 J 1/2W	
R545			RK73GB1J472J	CHIP R 4.7K J 1/16W		R613			RK73GB1J103J	CHIP R 10K J 1/16W	
R546			RN73GH1J913D	CHIP R 91K D 1/16W		R614,615			R92-1252-05	CHIP R 0 OHM	
R547			RK73GB1J103J	CHIP R 10K J 1/16W		R616			RK73GB1J474J	CHIP R 470K J 1/16W	
R548			RN73GH1J333D	CHIP R 33K D 1/16W		R617			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R549			RN73GH1J913D	CHIP R 91K D 1/16W		R618			RK73GB1J683J	CHIP R 68K J 1/16W	

TK-760G/762G

PARTS LIST

TX-RX UNIT (X57-5950-XX)
PLL/VCO (X58-4670-XX)

Ref. No.	Address	New parts	Parts No.	Description	Desti-nation
R619			RK73GB1J104J	CHIP R 100K J 1/16W	
R620,621			RK73GB1J103J	CHIP R 10K J 1/16W	
R622			RK73GB1J473J	CHIP R 47K J 1/16W	
R701			RD14BB2C473J	RD 47K J 1/6W	
R704			RK73GB1J223J	CHIP R 22K J 1/16W	
D1			HSB123	DIODE	
D2			02DZ20(Y,Z)	ZENER DIODE	
D3-5			HSB123	DIODE	
D8			DAN235K	DIODE	
D9			1SS355	DIODE	
D10			DAN235K	DIODE	
D11			MA742	DIODE	
D14			1SS355	DIODE	
D15			DAN202K	DIODE	
D16			DAN235K	DIODE	
D17			1SS355	DIODE	
D18			HVC350B	VARIABLE CAPACITANCE DIODE	
D19,20			1SS355	DIODE	
D21			02DZ18(X,Y)	ZENER DIODE	
D22			HSB123	DIODE	
D23			HVC350B	VARIABLE CAPACITANCE DIODE	
D24			02DZ15(X,Y)	ZENER DIODE	
D25			22ZR-10D	SURGE ABSORBER	
D27			1SS355	DIODE	
D28			HVC350B	VARIABLE CAPACITANCE DIODE	
D29			DSM3MA1	DIODE	
D30,31			HVC350B	VARIABLE CAPACITANCE DIODE	
D33		*	XB15A709	DIODE	
D34			MA4PH633	DIODE	
D35,36			MA742	DIODE	
D39			UDZ4.7(B)	ZENER DIODE	
D40			MA742	DIODE	
D41			HZU5ALL	DIODE	
D501-504			MA2S111	DIODE	
D505			MA2S111	DIODE	762
D506,507			MA2S111	DIODE	
D508			MA742	DIODE	
D523			DAN202U	DIODE	
D524,525			HSB123	DIODE	
D526			1812L075PR	VARISTOR	
D527,528			HSB123	DIODE	
D529			MA742	DIODE	
IC1,2			TA75S01F	IC (OP AMP)	
IC3			MB15A02	IC	
IC4			NJM4558M	IC (OP AMP X2)	
IC5			TA31136FN	IC (FM IF DETECTOR)	
IC6			M62363FP	IC (8bit D/A CONVERTER)	
IC7			NJM2904M	IC (OP AMP X2)	
IC8			UPB1509GV	IC	
IC9			BU4094BCF	IC (8-STAGE SHIFT/STORE REGISTE	
IC10			NJM78L05UA	IC (VOLTAGE REGULATOR/ +5V)	
IC11			AN8009M	IC (REGULATOR)	
IC12			TA7808S	IC (REGULATOR)	
IC13			LA4422	IC (AF POWER AMP/ 5.8W)	
IC14			TC4013BF(N)	IC (MEMORY)	
IC15			TA75S01F	IC (OP AMP)	
IC400	2C,2F		M67741H-32	IC (POWER MODULE)	K,M
IC400	2C,2F		M67741L-35	IC (POWER MODULE)	K2
IC501			AT29C020-90TI	IC	
IC502			30622M4102GP	MPU	

Ref. No.	Address	New parts	Parts No.	Description	Desti-nation
IC503			RH5VL42C	IC (REGULATOR)	
IC505			AT2408N10SI2.5	IC (8kbit SERIAL EEPROM)	
IC507			NJM2904V	IC (APC)	
IC508			TC35453F	IC (AUDIO PROCESSOR)	
IC509			BU4066BCFV	IC (ANALOG SWITCH X4)	
IC510			BU4094BCFV	IC (8bit SHIFT/STORE REGISTER)	
IC511			LC73872M	IC (DTMF RECEIVER)	
IC512			S-81350HG-KD	IC (VOLTAGE REGULATOR)	
IC513			TA75W558FU	IC (OP AMP X2)	
IC514			TC75W51FU	IC (OP AMP X2)	
Q1			DTD114EK	DIGITAL TRANSISTOR	
Q2,3			DTA114EKA	DIGITAL TRANSISTOR	
Q4-6			DTC114EKA	DIGITAL TRANSISTOR	
Q7			2SC4649(N,P)	TRANSISTOR	
Q8			2SC2412K	TRANSISTOR	
Q9			2SC4215(Y)	TRANSISTOR	
Q10			2SC2412K	TRANSISTOR	
Q11			2SA1832(GR)	TRANSISTOR	
Q12			2SC4738(GR)	TRANSISTOR	
Q13,14			2SC4649(N,P)	TRANSISTOR	
Q15			3SK228	FET	
Q16			DTC114EKA	DIGITAL TRANSISTOR	
Q17			DTC363EU	DIGITAL TRANSISTOR	
Q18			2SA1745(6,7)	TRANSISTOR	
Q19			DTC114EKA	DIGITAL TRANSISTOR	
Q20			DTA114EKA	DIGITAL TRANSISTOR	
Q21			DTC114EKA	DIGITAL TRANSISTOR	
Q22			2SC3357	TRANSISTOR	
Q23			2SA1641(S,T)	TRANSISTOR	
Q24			DTA114EKA	DIGITAL TRANSISTOR	
Q25			2SC2954	TRANSISTOR	
Q26			DTA114EKA	DIGITAL TRANSISTOR	
Q27			3SK241(R)	FET	
Q28			2SB1132(Q,R)	TRANSISTOR	
Q29			DTC114EKA	DIGITAL TRANSISTOR	
Q31			2SC2412K	TRANSISTOR	
Q32			2SB1565(E,F)	TRANSISTOR	
Q33			DTC114EKA	DIGITAL TRANSISTOR	
Q35			DTC144EKA	DIGITAL TRANSISTOR	
Q36			2SC2412K	TRANSISTOR	
Q37-39			2SK1824	FET	
Q501			2SC4619	TRANSISTOR	
Q502,503			DTC114EE	DIGITAL TRANSISTOR	
Q504			2SC4617(S)	TRANSISTOR	
Q505			2SB1132(Q,R)	TRANSISTOR	
Q506			DTC114EE	DIGITAL TRANSISTOR	
Q508			2SC4617(S)	TRANSISTOR	
Q509			DTC363EU	DIGITAL TRANSISTOR	
TH1			157-153-65001	THERMISTOR	
-			212-2013-05	INSULATING TUBE	
PLL/VCO (X58-4670-XX) -10 : K,M -11 : K2					
C102			CK73GB1H471K	CHIP C 470PF K	
C104			CC73GCH1H150J	CHIP C 15PF J	K2
C104,105			CC73GCH1H150J	CHIP C 15PF J	K,M
C105			CC73GCH1H270J	CHIP C 27PF J	K2
C107			CC73GCH1H060D	CHIP C 6.0PF D	K2

PARTS LIST

PLL/VCO (X58-4670-XX)

Ref. No.	Address	New parts	Parts No.	Description	Desti-nation	Ref. No.	Address	New parts	Parts No.	Description	Desti-nation
C107			CC73GCH1H080D	CHIP C 8.0PF D	K,M						
C110			CC73GCH1H040B	CHIP C 4.0PF B	K,M						
C110			CC73GCH1H120J	CHIP C 12PF J	K2						
C111			CC73GCH1H040B	CHIP C 4.0PF B	K2						
C111			CC73GCH1H050B	CHIP C 5.0PF B	K,M						
C112,113			CC73GCH1H020B	CHIP C 2.0PF B							
C114			CC73GCH1H070D	CHIP C 7.0PF D	K2						
C114,115			CC73GCH1H060D	CHIP C 6.0PF D	K,M						
C115			CC73GCH1H050B	CHIP C 5.0PF B	K2						
C116			CC73GCH1H120J	CHIP C 12PF J							
C117			CK73GB1H471K	CHIP C 470PF K							
C118			CC73GCH1H050B	CHIP C 5.0PF B							
C119,120			CK73GB1H471K	CHIP C 470PF K							
C121			CC73GCH1H090D	CHIP C 9.0PF D							
C122			CC73GCH1H0R5B	CHIP C 0.5PF B							
C123			CK73GB1H471K	CHIP C 470PF K							
C124			CC73GCH1H0R5B	CHIP C 0.5PF B							
C125			CK73GB1H102K	CHIP C 1000PF K							
C126			CK73GB1H471K	CHIP C 470PF K							
C127			CC73GCH1H100D	CHIP C 10PF D							
TC106			C05-0384-05	CERAMIC TRIMMER CAP (10P/8)							
TC109			C05-0384-05	CERAMIC TRIMMER CAP (10P/8)							
CN101			E40-6019-05	PIN ASSY							
-			F10-2279-04	SHIELDING CASE							
L101-104			L40-1595-34	SMALL FIXED INDUCTOR (1.5UH/8)							
L105			L40-3975-34	SMALL FIXED INDUCTOR (39NH/8)							
L106			L40-2775-34	SMALL FIXED INDUCTOR (27NH/8)							
L107,108			L40-1098-76	SMALL FIXED INDUCTOR (1UH/2522)							
L109,110			L40-1595-34	SMALL FIXED INDUCTOR (1.5UH/8)							
L111			L34-4547-05	AIR-CORE COIL	K,M						
L112			L34-4548-05	AIR-CORE COIL	K2						
L116			L34-4549-05	AIR-CORE COIL							
R101,102			RK73GB1J101J	CHIP R 100 J 1/16W							
R103			RK73GB1J102J	CHIP R 1.0K J 1/16W							
R104			RK73GB1J470J	CHIP R 47 J 1/16W							
R105			RK73GB1J154J	CHIP R 150K J 1/16W							
R106			RK73GB1J470J	CHIP R 47 J 1/16W							
R107-110			RK73GB1J103J	CHIP R 10K J 1/16W							
R111			RK73GB1J331J	CHIP R 330 J 1/16W							
R112,113			RK73GB1J181J	CHIP R 180 J 1/16W							
R114			RK73GB1J470J	CHIP R 47 J 1/16W							
R115			RK73GB1J103J	CHIP R 10K J 1/16W							
R116			RK73GB1J392J	CHIP R 3.9K J 1/16W							
R117			RK73GB1J101J	CHIP R 100 J 1/16W							
D101-104			1SV283	VARIABLE CAPACITANCE DIODE							
D105			HVU363A	DIODE							
Q101			2SK508NV(K52)	FET							
Q102			DTC114EUA	DIGITAL TRANSISTOR							
Q103			2SK508NV(K52)	FET							
Q104,105			2SC4081	TRANSISTOR							
Q106			2SC4226(R24)	TRANSISTOR							