


EXPLODED VIEW

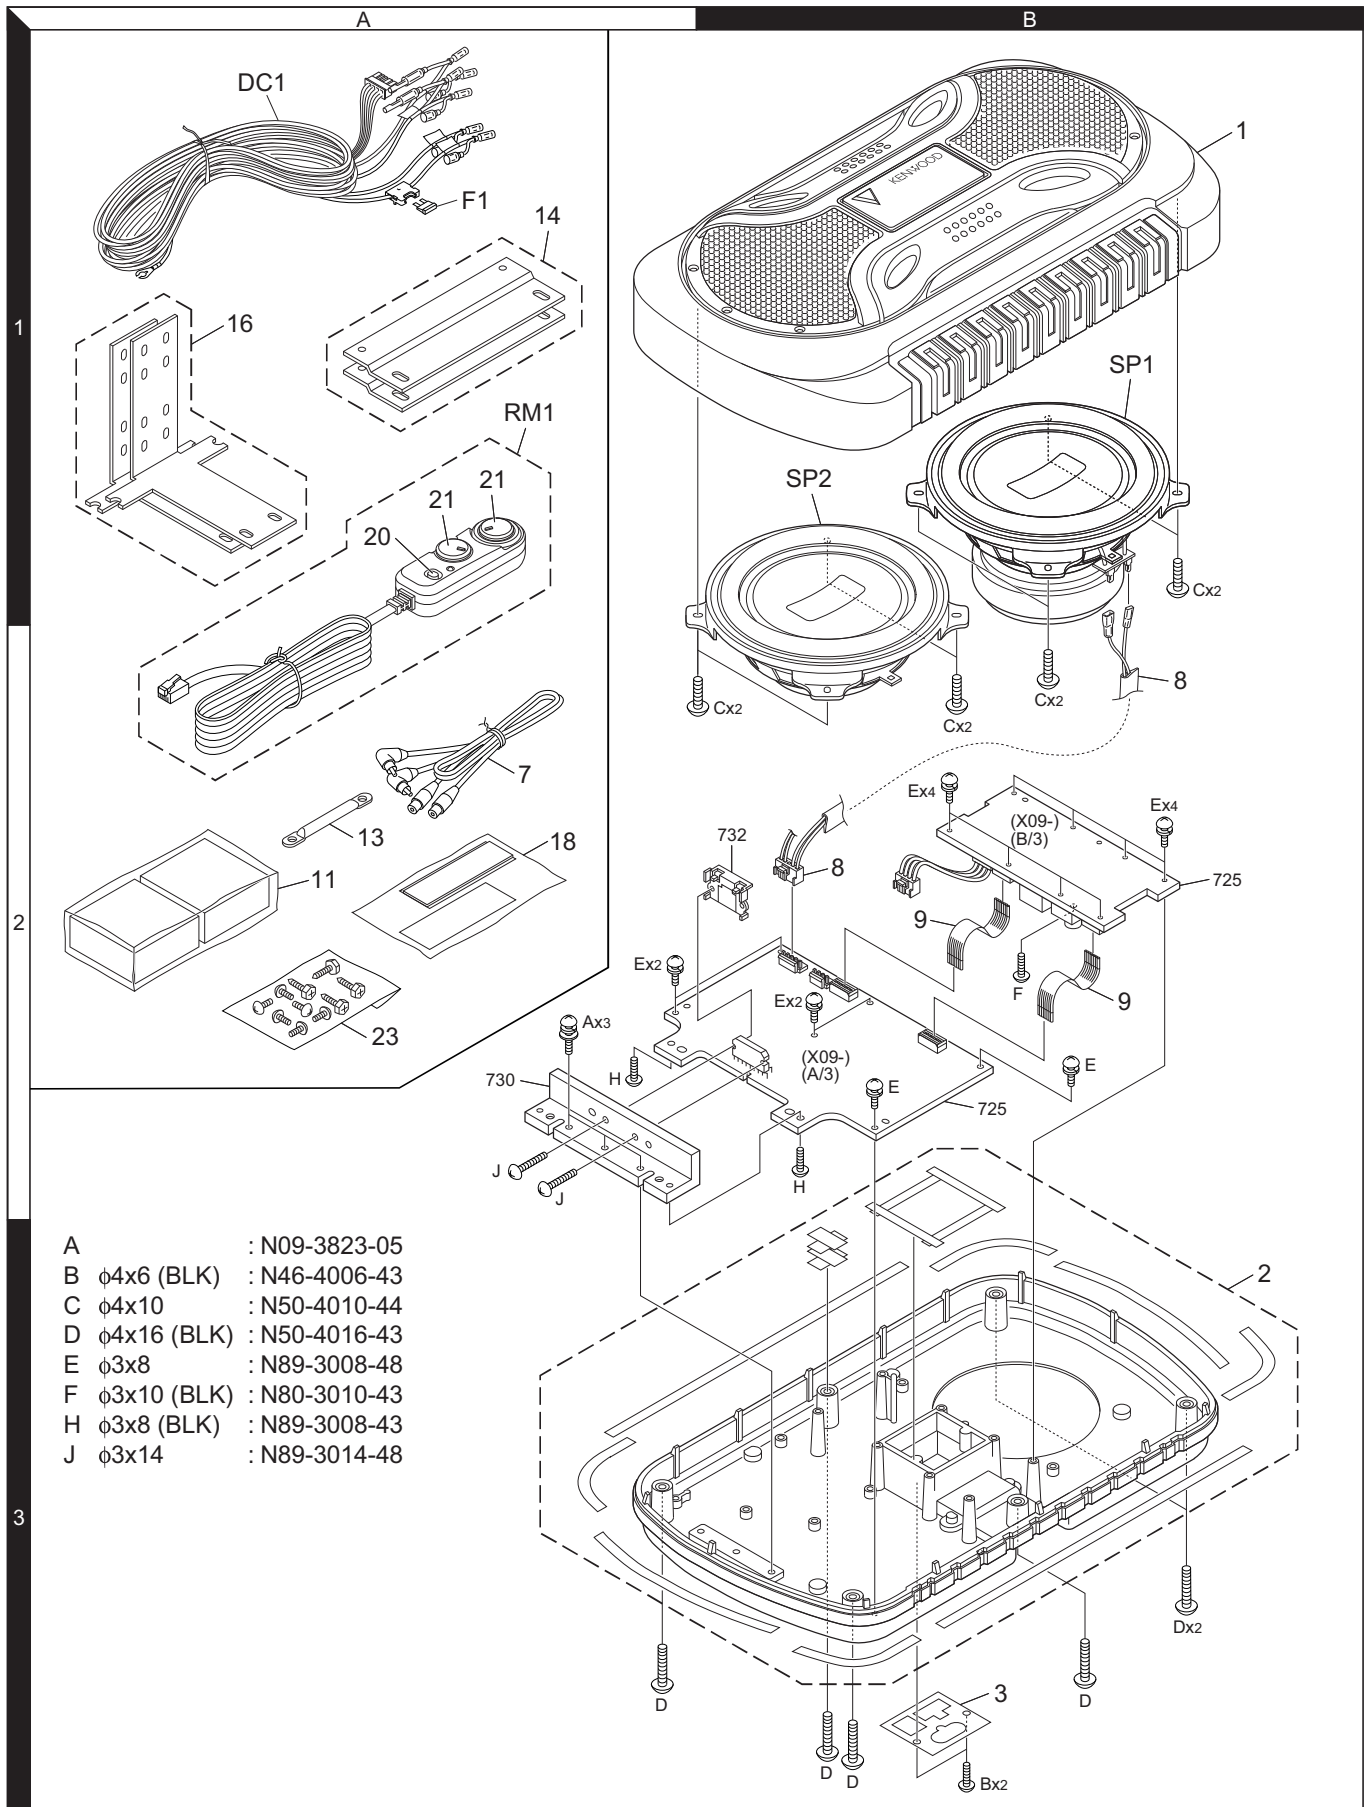

Parts with the exploded numbers larger than 700 are not supplied.

KSC-SW1

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
KSC-SW1					
1	1B	*	A02-2622-08	PLASTIC CABINET ASSY	
2	3B	*	A02-2624-08	PLASTIC CABINET ASSY	
3	3B	*	A29-0979-04	PANEL	
RM1	1A	*	A70-0417-08	REMOTE CONTROLLER ASSY	
-		*	B61-1254-00	INSTRUCTION MANUAL	
7	2A	*	E30-7095-05	CORD WITH PINJACK	
8	2B	*	E36-0505-05	CONNECTING CORD	
9	2B	*	E36-0506-05	CONNECTING CORD	
DC1	1A	*	E30-7094-05	DC CORD	
11	2A	*	G13-3064-08	CUSHION	
-		*	H10-8474-08	POLYSTYRENE FOAMED FIXTURE	
-		*	H12-4011-08	PACKING FIXTURE	
-		*	H13-1950-08	CARTON BOARD	
-		*	H25-2621-18	PROTECTION BAG	
-		*	H25-2622-08	PROTECTION BAG	
-		*	H51-2155-08	ITEM CARTON CASE	
-		*	H51-2156-08	ITEM CARTON CASE	
13	2A	*	J11-0213-04	CLAMPER	
14	1A	*	J19-4269-08	BRACKET	
16	1A	*	J19-4271-08	BRACKET	
18	2A	*	J69-0168-08	FASTENER	
20	2A	*	K27-0215-04	KNOB (BUTTON)	
21	1A	*	K29-0597-04	KNOB	
23	2A	*	N99-2192-08	SCREW SET	
A	2A	*	N09-3823-05	TAPTITE SCREW	
B	3B	*	N46-4006-43	PAN HEAD TAPPING SCREW	
C	2B	*	N50-4010-44	BINDING HEAD TAPPING SCREW	
D	3B	*	N50-4016-43	BINDING HEAD TAPPING SCREW	
E	2B		N89-3008-48	BINDING HEAD TAPTITE SCREW	
SP1	1B	*	T10-1256-05	WOOFER	
SP2	1B	*	T19-0088-05	PASSIVE RADIATOR	
AUDIO UNIT (X09-5880-00)					
C1			CD04AX1C4R7M	ELECTRO 4.7UF 16WV	
C3			CK73FB1H104K	CHIP C 0.10UF K	
C4			CD04BJ1E101M	ELECTRO 100UF 25WV	
C5			CK73GB1H103K	CHIP C 0.010UF K	
C6			CC73GCH1H220J	CHIP C 22PF J	
C7			CC73GCH1H101J	CHIP C 100PF J	
C8,9		*	CD04AX1C100M	ELECTRO 10UF 16WV	
C10			CC73GCH1H220J	CHIP C 22PF J	
C11			CC73GCH1H102J	CHIP C 1000PF J	
C12-15		*	CD04AX1C100M	ELECTRO 10UF 16WV	
C16			CC73GCH1H102J	CHIP C 1000PF J	
C17			CC73GCH1H101J	CHIP C 100PF J	
C20			C90-5629-05	ELECTRO 4700UF 16WV	
C21			CD04BJ1E101M	ELECTRO 100UF 25WV	
C22			CK73FB1H104K	CHIP C 0.10UF K	
C23			CC73GCH1H102J	CHIP C 1000PF J	
C24			CD04BJ1E470M	ELECTRO 47UF 25WV	

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
C25			CD04BJ1A221M	ELECTRO 220UF 10WV	
C26,27		*	CD04BJ1C331M	ELECTRO 330UF 16WV	
C28		*	CD04BJ1H220M	ELECTRO 22UF 50WV	
C29			CD04BJ1A101M	ELECTRO 100UF 10WV	
C30			CD04BJ1H100M	ELECTRO 10UF 50WV	
C31			CD04BJ1H010M	ELECTRO 1.0UF 50WV	
C32			CD04BJ1E101M	ELECTRO 100UF 25WV	
C33			CD04BJ1H100M	ELECTRO 10UF 50WV	
C50-54			CK73FB1H104K	CHIP C 0.10UF K	
C55			CC73GCH1H101J	CHIP C 100PF J	
C56-59			CD04BJ1A101M	ELECTRO 100UF 10WV	
C60			CD04BJ1H100M	ELECTRO 10UF 50WV	
C100			CQ92FM1H104J	MYLAR 0.10UF J	
C101			CD04BJ1H010M	ELECTRO 1.0UF 50WV	
C102,103			CD04BJ1H100M	ELECTRO 10UF 50WV	
C104			CD04BJ1H010M	ELECTRO 1.0UF 50WV	
C105			CQ92FM1H104J	MYLAR 0.10UF J	
C106		*	CD04AX1C220M	ELECTRO 22UF 16WV	
C107			CC73GCH1H470J	CHIP C 47PF J	
C108,109			CD04BJ1H010M	ELECTRO 1.0UF 50WV	
C110			CD04BJ1E470M	ELECTRO 47UF 25WV	
C111			CC73GCH1H470J	CHIP C 47PF J	
C112			CD04BJ1H100M	ELECTRO 10UF 50WV	
C113		*	CD04AX1C220M	ELECTRO 22UF 16WV	
C114			CD04BJ1A101M	ELECTRO 100UF 10WV	
C115			CD04AX1HR47M	ELECTRO 0.47UF 50WV	
C116			CC73GCH1H470J	CHIP C 47PF J	
C117			CD04BJ1A101M	ELECTRO 100UF 10WV	
C118			CK73GB1C224K	CHIP C 0.22UF K	
C119		*	CD04BJ1V330M	ELECTRO 33UF 35WV	
C120,121			C90-5620-05	ELECTRO 0.47UF 50WV	
C123			CD04BJ1H010M	ELECTRO 1.0UF 50WV	
C124,125		*	CD04BJ1HR47M	ELECTRO 0.47UF 50WV	
C126			CD04BJ1E101M	ELECTRO 100UF 25WV	
C127			CK73GB1H103K	CHIP C 0.010UF K	
C128			CD04BJ1A101M	ELECTRO 100UF 10WV	
C130			CC73GCH1H102J	CHIP C 1000PF J	
C131			CD04AY1C102M	ELECTRO 1000UF 16WV	
C132,133			CC73GCH1H102J	CHIP C 1000PF J	
C134			CD04BJ1H010M	ELECTRO 1.0UF 50WV	
C135			CD04BJ1E101M	ELECTRO 100UF 25WV	
C136			CD04BJ1H010M	ELECTRO 1.0UF 50WV	
C137			CD04BJ1E101M	ELECTRO 100UF 25WV	
C139			CD04BJ1H010M	ELECTRO 1.0UF 50WV	
C140			CD04BJ1H100M	ELECTRO 10UF 50WV	
C141			CK73GB1C224K	CHIP C 0.22UF K	
C142			CK73GB1H103K	CHIP C 0.010UF K	
CN1,2			E40-4233-05	FLAT CABLE CONNECTOR (8P)	
CN11,12			E40-4233-05	FLAT CABLE CONNECTOR (8P)	
CN13		*	E41-1011-05	PIN ASSY (4P)	
CN14		*	E41-1012-05	PIN ASSY (5P)	
J1		*	E63-0924-05	PIN JACK (2P)	
J2		*	E58-1015-05	RECTANGULAR RECEPTACLE (10P)	
J3		*	E58-1014-05	RECTANGULAR RECEPTACLE (6P)	

△ Indicates safety critical components.

PARTS LIST

AUDIO UNIT (X09-5880-00)

Ref. No.	Add	New	Parts No.	Description	Destination	Ref. No.	Add	New	Parts No.	Description	Destination
WH1		*	E39-0723-05	WIRING HARNESS (4P)		R115			RK73GB2A204J	CHIP R 200K J 1/10W	
L1			L33-1809-05	CHOKE COIL		R116			RK73GB2A104J	CHIP R 100K J 1/10W	
F	2B		N80-3010-43	PAN HEAD TAPTITE SCREW		R117			RK73GB2A112J	CHIP R 1.1K J 1/10W	
G	3A	*	N83-2608-43	PAN HEAD TAPTITE SCREW		R118			RK73GB2A101J	CHIP R 100 J 1/10W	
H	2B		N89-3008-43	BINDING HEAD TAPTITE SCREW		R119			RK73GB2A103J	CHIP R 10K J 1/10W	
J	2A	*	N89-3014-48	BINDING HEAD TAPTITE SCREW		R120			RK73GB2A203J	CHIP R 20K J 1/10W	
R1,2			RD14BB2C103J	RD 10K J 1/6W		R121			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R3			RK73EB2E102J	CHIP R 1.0K J 1/4W		R122			RK73GB2A203J	CHIP R 20K J 1/10W	
R5			RK73GB2A202J	CHIP R 2.0K J 1/10W		R123			RK73GB2A103J	CHIP R 10K J 1/10W	
R6-9			RK73GH2A103D	CHIP R 10K D 1/10W		R124,125			RK73GB2A132J	CHIP R 1.3K J 1/10W	
R10			RK73GB2A103J	CHIP R 10K J 1/10W		R126			RK73GB2A101J	CHIP R 100 J 1/10W	
R11			RK73GB2A133J	CHIP R 13K J 1/10W		R127-130			RK73EB2E103J	CHIP R 10K J 1/4W	
R12-15			RD14BB2C103J	RD 10K J 1/6W		R131			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R16,17			RK73GB2A221J	CHIP R 220 J 1/10W		R132,133			RK73GB2A223J	CHIP R 22K J 1/10W	
R20			RK73GB2A392J	CHIP R 3.9K J 1/10W		R135,136			RK73GB2A223J	CHIP R 22K J 1/10W	
R21-23			RK73GB2A332J	CHIP R 3.3K J 1/10W		R137			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R24,25			RK73GB2A103J	CHIP R 10K J 1/10W		R138			RK73GB2A332J	CHIP R 3.3K J 1/10W	
R26			RK73GB2A472J	CHIP R 4.7K J 1/10W		R139			RK73GB2A512J	CHIP R 5.1K J 1/10W	
R27,28			RK73GB2A333J	CHIP R 33K J 1/10W		R140			RK73GB2A103J	CHIP R 10K J 1/10W	
R29			RK73GB2A223J	CHIP R 22K J 1/10W		R144			RK73GB2A103J	CHIP R 10K J 1/10W	
R30			RK73GB2A103J	CHIP R 10K J 1/10W		R146			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R31			RK73GB2A562J	CHIP R 5.6K J 1/10W		R147			RK73GB2A223J	CHIP R 22K J 1/10W	
R32			RK73GB2A101J	CHIP R 100 J 1/10W		R148,149			RK73GB2A303J	CHIP R 30K J 1/10W	
R33			RK73GB2A102J	CHIP R 1.0K J 1/10W		R150			RK73GB2A561J	CHIP R 560 J 1/10W	
R34-37			RK73GB2A223J	CHIP R 22K J 1/10W		R151			RK73GB2A221J	CHIP R 220 J 1/10W	
R38			RK73GB2A332J	CHIP R 3.3K J 1/10W		R152			RK73GB2A473J	CHIP R 47K J 1/10W	
R39			RK73GB2A512J	CHIP R 5.1K J 1/10W		R153			RK73GB2A103J	CHIP R 10K J 1/10W	
R40			RK73EB2E201J	CHIP R 200 J 1/4W		R154			RK73GB2A132J	CHIP R 1.3K J 1/10W	
R41			RK73GB2A681J	CHIP R 680 J 1/10W		R155			RK73GB2A101J	CHIP R 100 J 1/10W	
R42			RK73GB2A182J	CHIP R 1.8K J 1/10W		R156			RK73GB2A473J	CHIP R 47K J 1/10W	
R43			RK73GB2A392J	CHIP R 3.9K J 1/10W		R157,158			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R44			RK73GB2A152J	CHIP R 1.5K J 1/10W		R159			RK73GB2A101J	CHIP R 100 J 1/10W	
R50-54			RK73EB2E101J	CHIP R 100 J 1/4W		R201			RK73GB2A683J	CHIP R 68K J 1/10W	
R55			RK73GB2A102J	CHIP R 1.0K J 1/10W		R202			RK73EB2E101J	CHIP R 100 J 1/4W	
R56			RK73GB2A362J	CHIP R 3.6K J 1/10W		R203			RK73GB2A512J	CHIP R 5.1K J 1/10W	
R57			RK73GB2A473J	CHIP R 47K J 1/10W		VR1	*		R31-0246-05	VARIABLE RESISTOR 10K C	
R58,59			RK73EB2E101J	CHIP R 100 J 1/4W		VR2	*		R31-0244-05	VARIABLE RESISTOR 10K X2 B	
R60-63			RD14BB2C101J	RD 100 J 1/6W		W100-102			RK73EB2E000J	CHIP R 0.0 J 1/4W	
R64			RK73EB2E101J	CHIP R 100 J 1/4W		W104			RK73EB2E000J	CHIP R 0.0 J 1/4W	
R65,66			RD14BB2C222J	RD 2.2K J 1/6W		W105			R92-1252-05	CHIP R 0 OHM J 1/16W	
R68-70			RK73GB2A102J	CHIP R 1.0K J 1/10W		W106,107			RK73EB2E000J	CHIP R 0.0 J 1/4W	
R100,101			RK73GB2A103J	CHIP R 10K J 1/10W		W108,109			R92-1252-05	CHIP R 0 OHM J 1/16W	
R102			RK73GB2A682J	CHIP R 6.8K J 1/10W		W110			RK73EB2E000J	CHIP R 0.0 J 1/4W	
R103			RK73GB2A103J	CHIP R 10K J 1/10W		W112,113			RK73EB2E000J	CHIP R 0.0 J 1/4W	
R104			RK73GB2A153J	CHIP R 15K J 1/10W		W116-125			RK73EB2E000J	CHIP R 0.0 J 1/4W	
R106			RK73GB2A104J	CHIP R 100K J 1/10W		S1	*		S68-0900-05	PUSH SWITCH SPPH1	
R107			RK73GB2A224J	CHIP R 220K J 1/10W		D1			LM1MA142WK-G	DIODE	
R108			RK73GB2A153J	CHIP R 15K J 1/10W		D2			LM1MA142WA-G	DIODE	
R109,110			RK73GB2A103J	CHIP R 10K J 1/10W		D3			LM1MA142WK-G	DIODE	
R111			RK73GB2A104J	CHIP R 100K J 1/10W		D4			LM1MA142WA-G	DIODE	
R112			RK73GB2A223J	CHIP R 22K J 1/10W		D5			RM10ZLFNF	DIODE	
R113			RK73GB2A102J	CHIP R 1.0K J 1/10W		D6			UDZS6.8B	ZENER DIODE	
R114			RK73GB2A363J	CHIP R 36K J 1/10W		D7			UDZS5.6B	ZENER DIODE	
						D8			1SR154-400	DIODE	

△ Indicates safety critical components.

PARTS LIST

AUDIO UNIT (X09-5880-00)

Ref. No.	Add	New	Parts No.	Description	Destination	Ref. No.	Add	New	Parts No.	Description	Destination
D9-11			1SS133	DIODE		IC105		*	E-TDA7575	ANALOGUE IC	
D12		*	UDZS9.1B	ZENER DIODE		Q1			2SB1241	TRANSISTOR	
D13			UDZS5.1B	ZENER DIODE		Q2-4			2SC4081	TRANSISTOR	
D14		*	UDZS15B	ZENER DIODE		Q5			2SD1863	TRANSISTOR	
D15			UDZS5.6B	ZENER DIODE		Q6			2SA1576A	TRANSISTOR	
D16			B30-1365-05	LED		Q7			2SC4081	TRANSISTOR	
D17		*	UDZS9.1B	ZENER DIODE		Q9-12			2SC4081	TRANSISTOR	
D18-20			1SS133	DIODE		Q100,101			2SC4081	TRANSISTOR	
D21			UDZS6.8B	ZENER DIODE		Q102			DTA124EUA	TRANSISTOR	
D22			UDZS4.7B	ZENER DIODE		Q103			2SC4081	TRANSISTOR	
D100-105			DA204U	DIODE		Q104			2SA1576A	TRANSISTOR	
D106			LM1MA142WK-G	DIODE		Q105			DTA124EUA	TRANSISTOR	
D107,108			1SS133	DIODE		Q106,107			2SC4081	TRANSISTOR	
D109			UDZS5.1B	ZENER DIODE							
D110			UDZS5.6B	ZENER DIODE							
D111,112			1SS133	DIODE							
IC1,2			BA4560F	ANALOGUE IC							
IC100			BA10358F	ANALOGUE IC							
IC101,102		*	NJM2172V-ZBTE2	ANALOGUE IC							
IC103,104			BA4560F	ANALOGUE IC							

△ Indicates safety critical components.

SPECIFICATIONS

Amplifier Section

Maximum power output 150W
 Rated power output 75W
 Frequency response 35~120Hz
 S/N ratio 85dB
 Harmonic component distortion 1%, 1kHz
 Rated input level
 RCA 50mV
 SP 1000mV
 Cutoff frequency 50~120Hz
 Operating voltage (Minus earth) 14.4V
 Maximum current consumption 8A

Cabinet Section

Type Passive rageetar
 Speaker
 Woofer 160mm silver corting corn
 Passive 160mm silver corting corn
 Impedance 2+2Ω
 Maximum power input 150W
 Rated power input 75W
 Frequency response 35~1700Hz
 Installation size (W x H x D) 400 x 91 x 228 mm
 Weight 3.6kg

KENWOOD follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.

