Exploded view of general assembly and parts list

Block No.M1MM

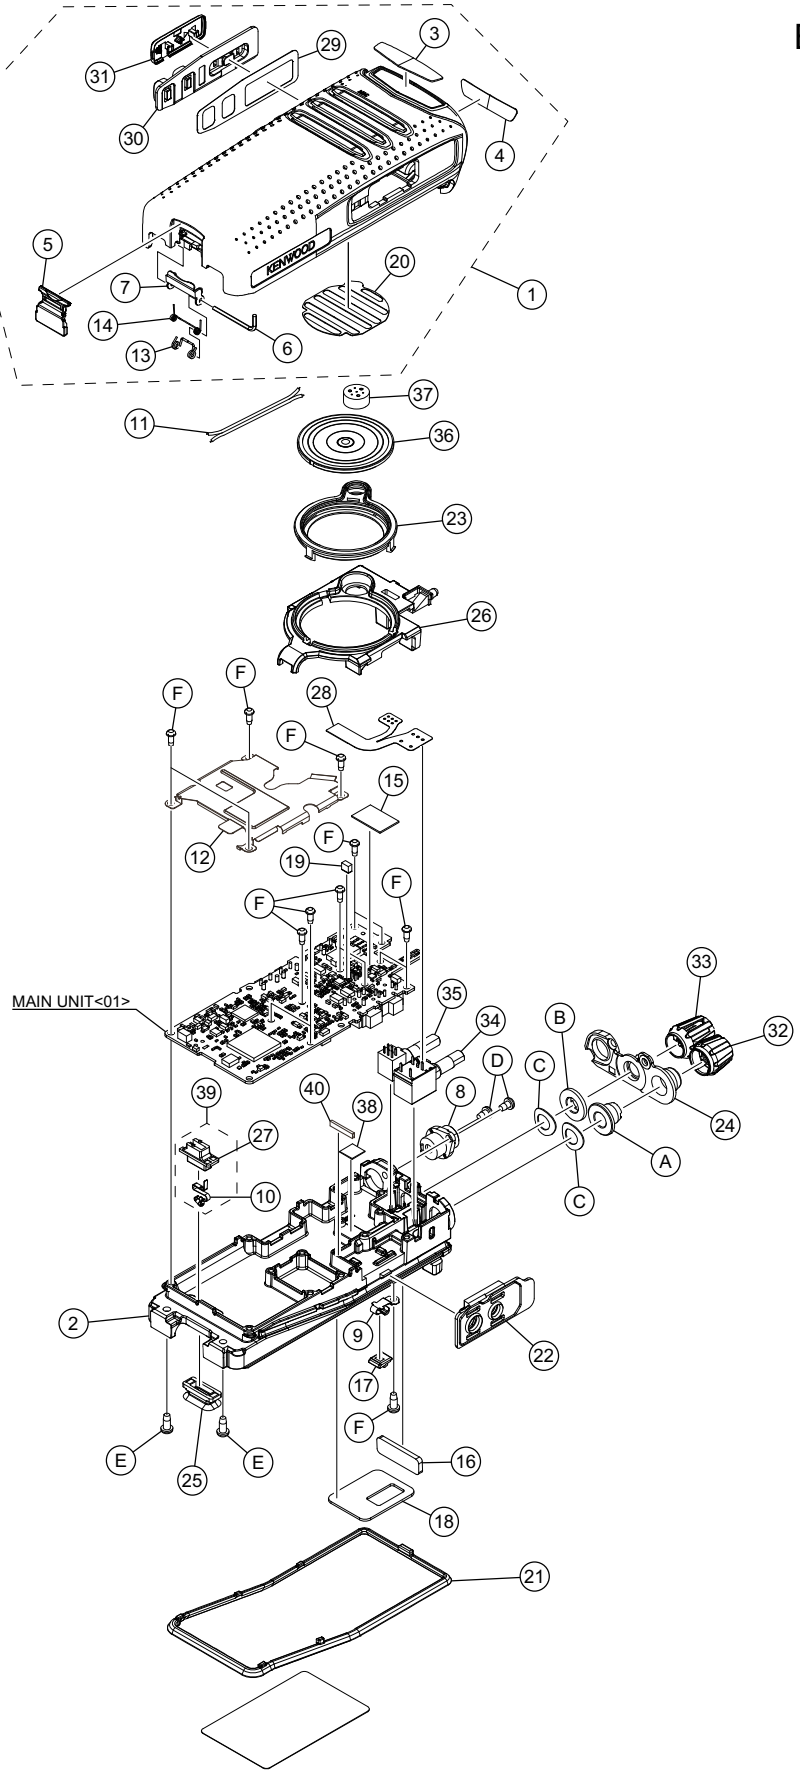

General assembly

Block No. [M][1][M][M]

⚠ Symbol No.	Part No.	Part Name	Description	Local
1	A0C-0117-00	P.CABINET ASSEMBLY		
2	A1A-0029-00	CHASSIS		
3	B4D-0034-00	BADGE	FRONT	
4	B4D-0035-00	BADGE	REAR	
5	D10-0649-03	LEVER		
6	D21-0863-04	SHAFT		
7	D32-0441-13	STOPPER		
8	E04-0477-15	C.RECEPTACLE-SM		
9	E23-1253-24	TERMINAL	GROUND	
10	E23-1395-04	TERMINAL		
11	E37-1288-05	PARALLEL CORD	SP	
12	F0G-0149-00	SHIELDING CASE		
13	G01-4543-14	COIL SPRING	STOPPER	
14	G01-4542-04	COIL SPRING	LEVER	
15	G10-1348-04	FIBROUS SHEET	PCB AMP	
16	G13-2009-04	CUSHION	CHASSIS	
17	G13-2033-04	CUSHION	GROUND	
18	G13-2034-24	CUSHION	CHASSIS(-)	
19	G13-2448-04	CUSHION	PCB,SP	
20	G1A-0033-00	FIBROUS SHEET	SP	
21	G53-1604-03	PACKING	CHASSIS	
22	G53-2215-03	PACKING	SP/MIC	
23	G53-2216-03	PACKING	SP	
24	G53-2217-02	PACKING	VOL/CH	
25	G53-2218-03	PACKING	TERMINAL	
26	J19-5578-22	HOLDER	SP	
27	J19-5579-03	HOLDER		
28	J87-0054-05	FPC(LEAD FREE)	VOL/CH	
29	J9K-0012-00	ADHESIVE SHEET	PTT	
30	K2K-0187-00	BUTTON KNOB	MONI/PF	
31	K2K-0188-00	BUTTON KNOB	PTT	
32	K2K-0189-00	KNOB	VOL	
33	K2K-0190-00	KNOB	CH	
34	R31-0670-35	V RESISTOR	VOL	
35	S60-0450-05	ROTARY SWITCH	CH	
36	T0H-0011-00	SPEAKER		
37	T91-0659-15	MIC ELEMENT		
38	G11-4465-04	RUBBER SHEET	FET	
39	J19-5580-03	HOLDER AASSEMBLY		
40	E2K-0038-00	RELAY HARDWARE		
A	N14-0849-05	CIRCULAR NUT	VOL	
B	N14-0869-05	CIRCULAR NUT	CH	
C	N19-2214-05	SPECIAL WASHER	VOL/CH(x2)	
D	N30-2604-48	P.HEAD M.SCREW	RF RECE(x2)	
E	N09-6621-05	PAN HEAD SCREW	CH(x2)	
F	N83-2005-48	P.HEAD T.SCREW	PCB,TERM(x14)	
-	XCA-002E-00S	MAIN UNIT	SERVICE UNIT	

Packing materials and accessories parts list (TK-D340_K2,TK-D340_E,TK-D340U_K2)

Block No.M2MM

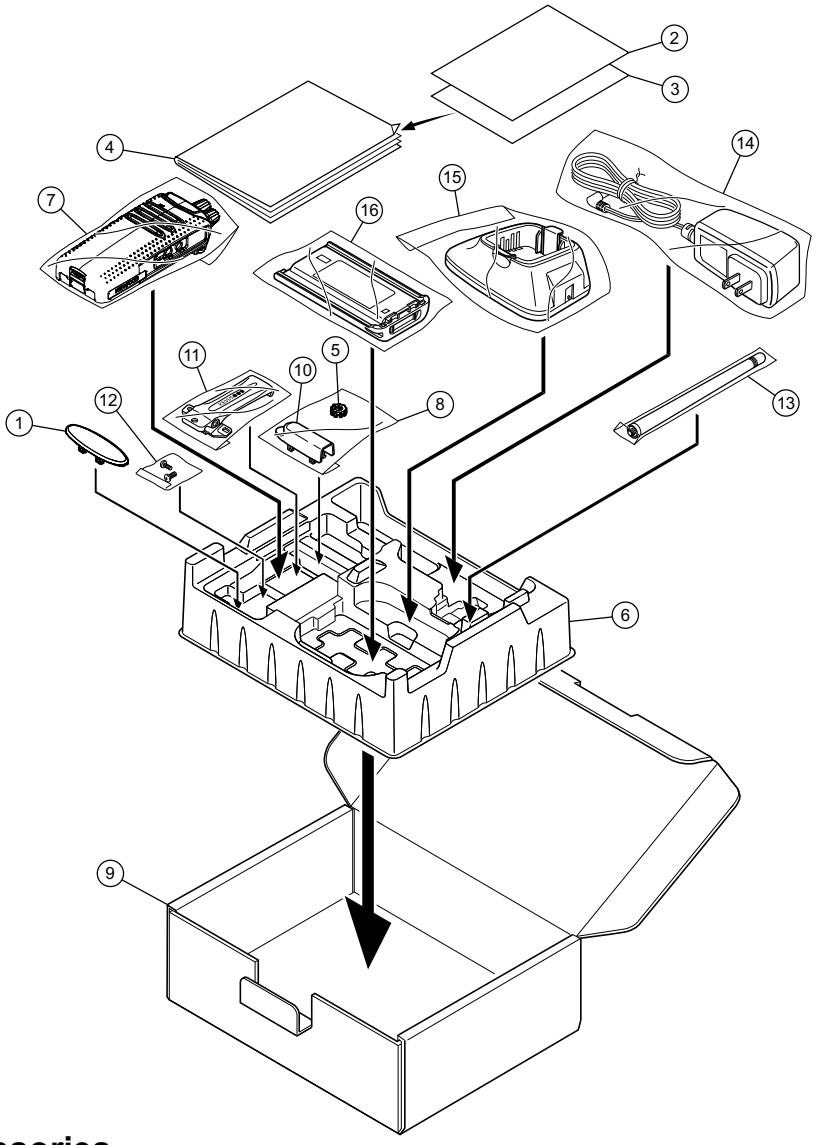

Packing and accessories

Block No. [M][2][M][M]

⚠ Symbol No.	Part No.	Part Name	Description	Local
1	B0K-0032-00	CAP		
2	----------	PAMPHLET		D340_K2,D340U_K2
3	----------	PAMPHLET	ROHS2	D340_E
4	B5A-0929-00	INST.MANUAL		D340_K2,D340U_K2
4	B5A-0930-00	INST.MANUAL		D340_E
5	D32-0456-03	STOPPER		
6	H12-4319-05	PACKING FIXTURE	ACC	
7	----------	PROTECTION BAG		
8	----------	PROTECTION BAG		
9	H52-2589-01	ITEM CARTON	ACC	
10	J19-5577-03	HOLDER		
11	J29-0734-15	HOOK ASSEMBLY		
12	N99-2089-05	SCREW SET		
13	T90-1039-25	WHIP ANTENNA		D340_K2,D340U_K2
14	W08-1247-25	AC ADAPTER (CC)		D340_K2,D340U_K2
14	W08-1246-25	AC ADAPTER (CC)	KSC-35SE	D340_E
15	W08-1249-45	CHARGER (CC)	KSC-35S	
16	W0K-0020-00	LI-ION BAT.P(CC)	45L TWS	

Packing materials and accessories parts list (TK-D340_M2,TK-D340_E2)

Block No.M3MM

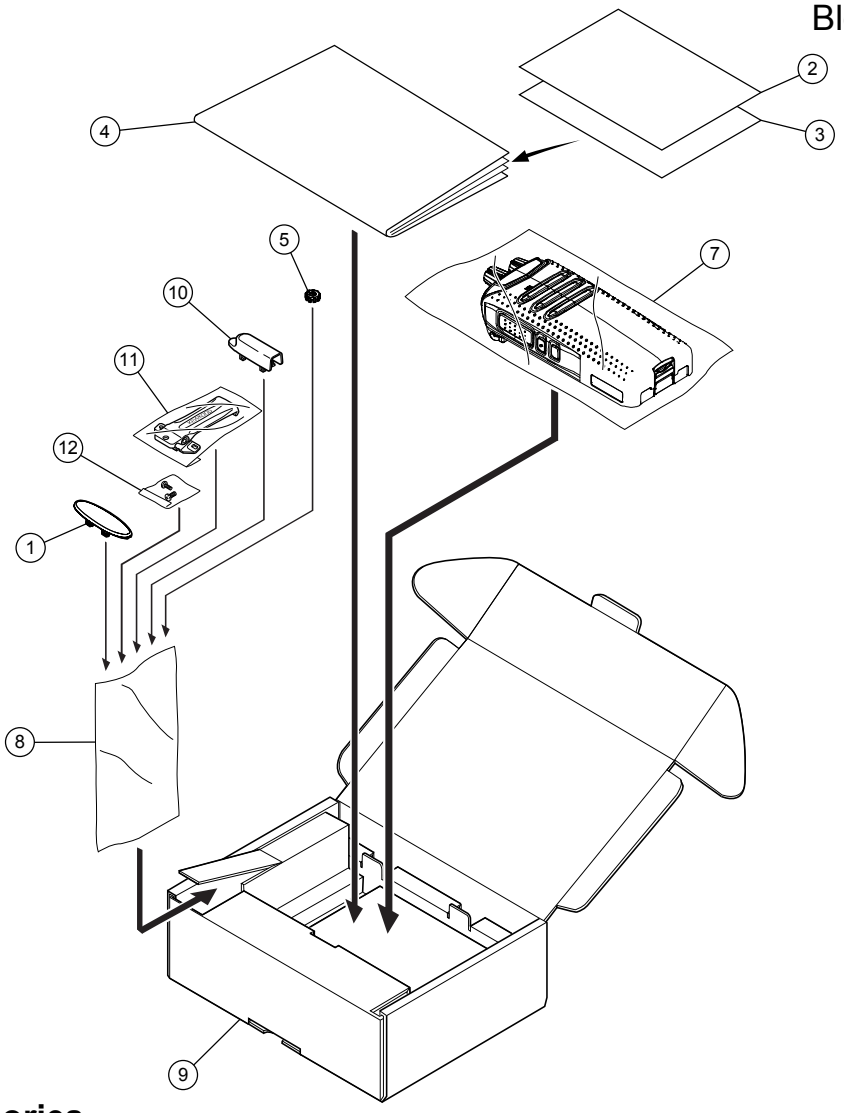

Packing and accessories

Block No. [M][3][M][M]

⚠ Symbol No.	Part No.	Part Name	Description	Local
1	B0K-0032-00	CAP		
2	----------	PAMPHLET		D340_M2
3	----------	PAMPHLET	ROHS2	D340_E2
4	B5A-0931-00	INST.MANUAL		D340_M2
4	B5A-0930-00	INST.MANUAL		D340_E2
5	D32-0456-03	STOPPER		
7	----------	PROTECTION BAG		
8	----------	PROTECTION BAG		
9	H52-2588-01	ITEM CARTON	NO ACC	
10	J19-5577-03	HOLDER		
11	J29-0734-15	HOOK ASSEMBLY		
12	N99-2089-05	SCREW SET		

Electrical parts list

MAIN UNIT

XC1-1172-70

Block No. [0][1]

⚠ Symbol No.	Part No.	Part Name	Description	Local
IC2	AK1541	IC		
IC3	BD7542FVM	IC		
IC400	AK2365A	IC		
IC600	PST8256U	IC		
IC601	XC6209B502P-G	IC		
IC602	MM1856A50N	IC		
IC603	XC6209B502P-G	IC		
IC604	LDK220M33R	IC		
IC605	BU4830F	IC		
IC606	LDK220M33R	IC		
IC650	TPS62140RGT	IC		
IC700	E25Q40A104GIP	IC		
IC703	MM1856A33N	IC		
IC704	BU7465HFV	IC		
IC705	CMX7241	IC		
IC706	BU7465HFV	IC		
IC707	TA7368FG	IC		
IC708	BU7465HFV	IC		
IC709	NJU7089KV1	IC		
IC710	2F405VGT6KGEA	IC		
IC713	SM5023CNDH-G	IC		
IC715	MM1856A33N	IC		
IC717	BU7465HFV	IC		
IC719	TC7W53FKF	IC		
IC720	TC7W53FKF	IC		
IC721	BU7465HFV	IC		
IC832	BU7465HFV	IC		
Q1	SSM3J05FU-F	FET		
Q3	RE1C001UN	FET		
Q4	KTC4075EP/YG/	TRANSISTOR		
Q5	MCH3914-H/8/	FET		
Q6	MCH3914-H/8/	FET		
Q7	EM6M2	FET		
Q8	SSM3J36TUT	FET		
Q9	2SC5108F/Y/	TRANSISTOR		
Q10	2SC5108F/Y/	TRANSISTOR		
Q11	2SC5108F/Y/	TRANSISTOR		
Q201	2SC5455-A	TRANSISTOR		
Q206	RFM01U7PF	FET		
Q208	RD07MUS2BT214	FET		
Q290	SSM3J36TUT	FET		
Q291	SSM3J36TUT	FET		
Q297	EMD9	TRANSISTOR		
Q298	LTC044EEBFS8	DIGI TRANSISTOR		
Q400	2SC5108F/Y/	TRANSISTOR		
Q403	KTC4075EP/YG/	TRANSISTOR		
Q404	3SK318YB-E	FET		
Q405	3SK318YB-E	FET		
Q600	LTC014EEBFS8	DIGI TRANSISTOR		
Q601	EM6M2	FET		
Q602	EM6M2	FET		
Q603	SSM3K127TUT	FET		
Q604	LTC014EEBFS8	DIGI TRANSISTOR		
Q605	LTC014EEBFS8	DIGI TRANSISTOR		
Q606	SSM3J36TUT	FET		
Q620	LTC044EEBFS8	DIGI TRANSISTOR		
Q703	UM6K34N	FET		
Q704	KTC4075EP/YG/	TRANSISTOR		
Q705	2SC4116F/G/	TRANSISTOR		
Q706	2SA1586F/YG/	TRANSISTOR		
Q707	NTJD4001NG	FET		
Q708	LTC014EEBFS8	DIGI TRANSISTOR		
Q709	LTC014EEBFS8	DIGI TRANSISTOR		
Q710	2SB1694	TRANSISTOR		
Q711	LTC014EEBFS8	DIGI TRANSISTOR		
Q712	LTC044EEBFS8	DIGI TRANSISTOR		
Q713	SSM3K324RF	FET		
Q714	2SB1132(Q,R)	TRANSISTOR		
Q715	UMG3N	DIGI TR ARRAY		
Q716	SSM3K324RF	FET		
D4	BBY56-02V	VARI CAP DIODE		
D5	BBY56-02V	VARI CAP DIODE		
D8	1SV325FT	VARI CAP DIODE		
D9	1SV325FT	VARI CAP DIODE		
D10	KDS160E-P	DIODE		
D11	1SV325FT	VARI CAP DIODE		
D12	1SV325FT	VARI CAP DIODE		
D13	BB664-02V	VARI CAP DIODE		
D14	1SS390	DIODE		
D15	1SS390	DIODE		
D16	1SV325FT	VARI CAP DIODE		
D17	1SV325FT	VARI CAP DIODE		
D201	RN142S	DIODE		
D202	RN142S	DIODE		
D203	RN142S	DIODE		
D204	RN142S	DIODE		
D400	1SV305F	VARI CAP DIODE		
D401	1SV305F	VARI CAP DIODE		
D402	1SV305F	VARI CAP DIODE		
D403	1SV305F	VARI CAP DIODE		
D404	1SV305F	VARI CAP DIODE		
D405	1SV305F	VARI CAP DIODE		
D600	RB521S-30-TP	DIODE		
D601	SML-512MW	LED		
D602	SML-512VWA	LED		
D603	GS1G-L	DIODE		
D604	SMLE12BC7TV	LED		
D605	UDZW5.1B	ZENER DIODE		
D620	DAN222	DIODE ARRAY		
D630	DB2S310	SCHOTTKY DIODE		
D700	RB706F-40-MC	DIODE		
D701	RB706F-40-MC	DIODE		
D702	1SS372F	SCHOTTKY DIODE		
D703	MC2850-1	DIODE ARRAY		
D754	RB706F-40-MC	DIODE		
C6	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C7	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C8	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	
C9	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C11	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C13	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C15	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	
C16	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	
C18	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C19	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	
C20	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	
C22	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C23	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	
C26	CS77MA1D010M	TA E CAPACITOR	1uF 20V M	
C27	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C28	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C29	CS77AAV1V0R1M	TA E CAPACITOR	0.1uF 35V M	
C30	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C32	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C33	CC73HCH1H330J	C CAPACITOR	33pF 50V J	
C34	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	
C35	CC73HCH1H050B	C CAPACITOR	5pF 50V B	
C36	CC730AD1H104J	C CAPACITOR	0.1uF 50V J	
C37	CC73HCH1H030B	C CAPACITOR	3pF 50V B	
C38	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C39	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C40	CC73HCH1H050B	C CAPACITOR	5pF 50V B	
C42	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	
C46	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C47	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C54	CC73HCH1H0R5B	C CAPACITOR	0.5pF 50V B	
C56	CS77PBQ1C100M	TA E CAPACITOR	10uF 16V M	
C57	CC73HCH1H050B	C CAPACITOR	5pF 50V B	
C58	CC73HCH1H040B	C CAPACITOR	4pF 50V B	
C60	CC73HCH1H050B	C CAPACITOR	5pF 50V B	
C61	CC73HCH1H050B	C CAPACITOR	5pF 50V B	
C62	CC73HCH1H050B	C CAPACITOR	5pF 50V B	
C63	CC73HCH1H050B	C CAPACITOR	5pF 50V B	

⚠ Symbol No.	Part No.	Part Name	Description	Local
C64	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C65	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C66	CC73HCH1H0R5B	C CAPACITOR	0.5pF 50V B	
C67	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C68	CC73HCH1H0R5B	C CAPACITOR	0.5pF 50V B	
C69	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C71	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C72	CC73HCH1H060B	C CAPACITOR	6pF 50V B	
C74	CC73HCH1H150J	C CAPACITOR	15pF 50V J	
C75	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C76	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C77	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	
C79	CC73HCH1H080B	C CAPACITOR	8pF 50V B	
C80	CC73HCH1H090B	C CAPACITOR	9pF 50V B	
C82	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C83	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C84	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C85	CK73HB1A473K	C CAPACITOR	0.047uF 10V K	
C86	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	
C87	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C88	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C89	CK73HB1A224K	C CAPACITOR	0.22uF 10V K	
C90	CK73HB1A224K	C CAPACITOR	0.22uF 10V K	
C92	CC73HCH1H120G	C CAPACITOR	12pF 50V G	
C93	CC73HCH1H060B	C CAPACITOR	6pF 50V B	
C94	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C95	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C96	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C97	CC73HCH1H060B	C CAPACITOR	6pF 50V B	
C99	CC73HCH1H060B	C CAPACITOR	6pF 50V B	
C100	CC73HCH1H090B	C CAPACITOR	9pF 50V B	
C104	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C105	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C108	CC73HCH1H271J	C CAPACITOR	270pF 50V J	
C109	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C200	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C202	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C207	CC73HCH1H050B	C CAPACITOR	5pF 50V B	
C208	CC73HCH1H150J	C CAPACITOR	15pF 50V J	
C210	CK73HB1A224K	C CAPACITOR	0.22uF 10V K	
C211	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C212	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C213	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C214	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C216	CC73HCH1H050B	C CAPACITOR	5pF 50V B	
C219	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C220	CC73HCH1H100C	C CAPACITOR	10pF 50V C	
C222	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C223	CC73HCH1H100B	C CAPACITOR	10pF 50V B	
C224	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C228	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C229	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C232	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C233	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C234	CC73HCH1H220J	C CAPACITOR	22pF 50V J	
C237	CC73HCH1H470J	C CAPACITOR	47pF 50V J	
C239	CC73HCH1H151J	C CAPACITOR	150pF 50V J	
C240	CC73HCH1H151J	C CAPACITOR	150pF 50V J	
C241	CC73GCH1H470G	C CAPACITOR	47pF 50V G	
C243	CC73GCH1H090B	C CAPACITOR	9pF 50V B	
C245	CK73GXR1A105K	C CAPACITOR	1uF 10V K	
C247	CK73GBB1C104K	C CAPACITOR	0.1uF 16V K	
C250	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	
C251	CC73HCH1H470J	C CAPACITOR	47pF 50V J	
C252	CC73HCH1H470J	C CAPACITOR	47pF 50V J	
C253	CC73GCH1H010B	C CAPACITOR	1pF 50V B	
C259	CC73GCH1H030B	C CAPACITOR	3pF 50V B	
C262	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	
C266	CC73GCH1H090B	C CAPACITOR	9pF 50V B	
C267	CC73GCH1H070B	C CAPACITOR	7pF 50V B	
C268	CC73GCH1H101J	C CAPACITOR	100pF 50V J	
C269	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C270	CC73HCH1H070B	C CAPACITOR	7pF 50V B	
C271	CC73GCH1H050B	C CAPACITOR	5pF 50V B	
C272	CC73GCH1H101J	C CAPACITOR	100pF 50V J	
C273	CC73GCH1H1R5B	C CAPACITOR	1.5pF 50V B	
C274	CC73GCH1H050B	C CAPACITOR	5pF 50V B	
C275	CC73GCH1H070B	C CAPACITOR	7pF 50V B	

⚠ Symbol No.	Part No.	Part Name	Description	Local
C276	CC73GCH1H010B	C CAPACITOR	1pF 50V B	
C277	CC73GCH1HR75B	C CAPACITOR	0.75pF 50V B	
C278	CC73GCH1H070B	C CAPACITOR	7pF 50V B	
C279	CC73GCH1H020B	C CAPACITOR	2pF 50V B	
C280	CC73GCH1H3R5B	C CAPACITOR	3.5pF 50V B	
C290	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	
C291	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	
C304	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C400	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	
C402	CC73HCH1H330J	C CAPACITOR	33pF 50V J	
C403	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	
C404	CC73HCH1H220J	C CAPACITOR	22pF 50V J	
C405	CC73HCH1H820J	C CAPACITOR	82pF 50V J	
C406	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C407	CC73HCH1H390J	C CAPACITOR	39pF 50V J	
C409	CC73HCH1H820J	C CAPACITOR	82pF 50V J	
C410	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C412	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C413	CK73HB1H182K	C CAPACITOR	1800pF 50V K	
C414	CK73HBB1H681K	C CAPACITOR	680pF 50V K	
C415	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C416	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C419	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C421	CK73HB1A333K	C CAPACITOR	0.033uF 10V K	
C422	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	
C424	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	
C426	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	
C428	CC73HCH1H040B	C CAPACITOR	4pF 50V B	
C429	CC73HCH1H150G	C CAPACITOR	15pF 50V G	
C430	CC73HCH1H040B	C CAPACITOR	4pF 50V B	
C431	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C432	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	
C433	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C434	CC73HCH1H050B	C CAPACITOR	5pF 50V B	
C435	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	
C436	CC73HCH1H030B	C CAPACITOR	3pF 50V B	
C437	CC73HCH1H120G	C CAPACITOR	12pF 50V G	
C438	CC73HCH1H080B	C CAPACITOR	8pF 50V B	
C439	CC73HCH1H030B	C CAPACITOR	3pF 50V B	
C440	CC73HCH1H040B	C CAPACITOR	4pF 50V B	
C441	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	
C442	CC73HCH1H010B	C CAPACITOR	1pF 50V B	
C443	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C444	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C445	CC73HCH1H2R5B	C CAPACITOR	2.5pF 50V B	
C446	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C447	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C448	CC73HCH1H2R5B	C CAPACITOR	2.5pF 50V B	
C449	CC73HCH1H180G	C CAPACITOR	18pF 50V G	
C451	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C452	CC73HCH1H010B	C CAPACITOR	1pF 50V B	
C453	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C454	CC73HCH1H010B	C CAPACITOR	1pF 50V B	
C455	CC73HCH1H220G	C CAPACITOR	22pF 50V G	
C457	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C458	CC73HCH1H1R5B	C CAPACITOR	1.5pF 50V B	
C459	CC73HCH1H180G	C CAPACITOR	18pF 50V G	
C460	CC73HCH1H010B	C CAPACITOR	1pF 50V B	
C461	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C463	CC73HCH1H0R5B	C CAPACITOR	0.5pF 50V B	
C464	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C465	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C466	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C468	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	
C469	CC73HCH1H271J	C CAPACITOR	270pF 50V J	
C470	CC73HCH1H010B	C CAPACITOR	1pF 50V B	
C471	CC73HCH1H180G	C CAPACITOR	18pF 50V G	
C472	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C474	CC73HCH1H1R5B	C CAPACITOR	1.5pF 50V B	
C475	CC73HCH1H180G	C CAPACITOR	18pF 50V G	
C476	CC73HCH1H010B	C CAPACITOR	1pF 50V B	
C477	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C478	CC73HCH1H050B	C CAPACITOR	5pF 50V B	
C480	CC73HCH1H090B	C CAPACITOR	9pF 50V B	
C481	CC73HCH1H080B	C CAPACITOR	8pF 50V B	
C482	CC73HCH1H010B	C CAPACITOR	1pF 50V B	
C483	CC73HCH1H020B	C CAPACITOR	2pF 50V B	
C485	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	

⚠ Symbol No.	Part No.	Part Name	Description	Local
C486	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C487	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	
C488	CK73HB1A224K	C CAPACITOR	0.22uF 10V K	
C489	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C491	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C492	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C493	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C494	CK73HB1A224K	C CAPACITOR	0.22uF 10V K	
C495	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	
C496	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C497	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	
C499	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C500	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	
C501	CK73HBB1H681K	C CAPACITOR	680pF 50V K	
C504	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C505	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	
C508	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	
C600	CK73GXR1A105K	C CAPACITOR	1uF 10V K	
C601	CK73GXR1A105K	C CAPACITOR	1uF 10V K	
C602	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C603	CK73GXR1A105K	C CAPACITOR	1uF 10V K	
C604	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C605	CK73GXR1A105K	C CAPACITOR	1uF 10V K	
C606	CK73GXR1A105K	C CAPACITOR	1uF 10V K	
C607	CK73GXR1A105K	C CAPACITOR	1uF 10V K	
C609	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C610	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C611	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C612	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	
C615	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C616	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C618	CK73GXR1A105K	C CAPACITOR	1uF 10V K	
C620	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C621	CK73GBB0J225K	C CAPACITOR	2.2uF 6.3V K	
C623	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C624	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C625	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C626	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C628	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C629	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	
C630	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C631	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C650	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C651	CK73FB1C106K	C CAPACITOR	10uF 16V K	
C652	CK73HBB1H332K	C CAPACITOR	3300pF 50V K	
C653	CK73HB1E104K	C CAPACITOR	0.10uF 25V K	
C655	CK73FB0J226M	C CAPACITOR	22uF 6.3V M	
C700	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C703	CC73HCH1H471J	C CAPACITOR	470pF 50V J	
C704	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C711	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C718	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	
C719	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C720	CK73GXR1A105K	C CAPACITOR	1uF 10V K	
C723	CK73GBB0J225K	C CAPACITOR	2.2uF 6.3V K	
C730	CK73GXR1A105K	C CAPACITOR	1uF 10V K	
C732	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C734	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C735	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C736	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C737	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C738	CS77MA0J470M	TA E CAPACITOR	47uF 6.3V M	
C740	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	
C741	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C742	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C743	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C744	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C745	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	
C747	CK73HBB1H152K	C CAPACITOR	1500pF 50V K	
C748	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C749	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C750	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C751	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C754	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C756	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C758	CK73HB0J475M	C CAPACITOR	4.7uF 6.3V M	
C759	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C760	CK73HB1A474K	C CAPACITOR	0.47uF 10V K	

⚠ Symbol No.	Part No.	Part Name	Description	Local
C761	CK73HB1A474K	C CAPACITOR	0.47uF 10V K	
C762	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C763	CK73HB1A473K	C CAPACITOR	0.047uF 10V K	
C764	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C765	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C766	CK73HB1A474K	C CAPACITOR	0.47uF 10V K	
C767	CK73GBB0J225K	C CAPACITOR	2.2uF 6.3V K	
C768	CK73GBB0J225K	C CAPACITOR	2.2uF 6.3V K	
C769	CK73HB1A474K	C CAPACITOR	0.47uF 10V K	
C770	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C771	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C772	CC73HCH1H470J	C CAPACITOR	47pF 50V J	
C773	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C774	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C775	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	
C777	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C778	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C779	CK73HB0J475M	C CAPACITOR	4.7uF 6.3V M	
C780	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C781	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	
C782	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C783	CK73GXR1A105K	C CAPACITOR	1uF 10V K	
C784	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	
C785	CK73GB0J106K	C CAPACITOR	10uF 6.3V K	
C786	CK73HB1A224K	C CAPACITOR	0.22uF 10V K	
C787	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	
C788	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	
C789	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C790	CK73HB1A473K	C CAPACITOR	0.047uF 10V K	
C791	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	
C792	CC73HCH1H101J	C CAPACITOR	100pF 50V J	
C794	CK73HBB1A683K	C CAPACITOR	0.068uF 10V K	
C795	CK73GXR1A105K	C CAPACITOR	1uF 10V K	
C796	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	
C798	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C801	CK73GXR1A105K	C CAPACITOR	1uF 10V K	
C802	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C805	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C806	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C808	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	
C809	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	
C812	CK73HB1H271K	C CAPACITOR	270pF 50V K	
C814	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	
C815	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C816	CC73HCH1H271J	C CAPACITOR	270pF 50V J	
C818	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C819	CK73HBB1H332K	C CAPACITOR	3300pF 50V K	
C820	CK73HBB1H332K	C CAPACITOR	3300pF 50V K	
C832	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C835	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	
C836	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C840	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	
C841	CK73HB1H272K	C CAPACITOR	2700pF 50V K	
C842	CK73HBB1H332K	C CAPACITOR	3300pF 50V K	
C851	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	
C852	CK73HBB1H152K	C CAPACITOR	1500pF 50V K	
C853	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	
C882	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C885	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	
C886	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C887	CC73HCH1H471J	C CAPACITOR	470pF 50V J	
C905	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	
C906	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C907	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C908	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	
C909	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	
C910	CK73HB0J225K	C CAPACITOR	2.2uF 6.3V K	
C911	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	
C912	CK73HB0J225K	C CAPACITOR	2.2uF 6.3V K	
C913	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	
C914	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C915	CK73HB1H103K	C CAPACITOR	10000pF 50V K	
C924	CK73GXR1A105K	C CAPACITOR	1uF 10V K	
C925	CK73HB1A105K	C CAPACITOR	1uF 10V K	
C970	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C971	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	
C972	CK73HBB1H471K	C CAPACITOR	470pF 50V K	
C980	CS77FAV0J101M	TA E CAPACITOR	100uF 6.3V M	

⚠ Symbol No.	Part No.	Part Name	Description	Local
C981	CK73HB0J475M	C CAPACITOR	4.7uF 6.3V M	
C982	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	
C983	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C984	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C985	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C986	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	
C989	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	
C999	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	
R1	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R2	RK73HB1J334J	MG RESISTOR	330kΩ 1/16W J	
R3	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R7	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R8	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
R9	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R10	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R11	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	
R13	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R16	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R17	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R18	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	
R19	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R21	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	
R22	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R23	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R24	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R25	RK73HB1J106J	MG RESISTOR	10MΩ 1/16W J	
R26	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R27	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R29	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R30	RK73HB1J154J	MG RESISTOR	150kΩ 1/16W J	
R31	RK73HB1J184J	MG RESISTOR	180kΩ 1/16W J	
R32	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R34	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R35	RK73HH1J121D	MG RESISTOR	120Ω 1/16W D	
R36	RK73HH1J181D	MG RESISTOR	180Ω 1/16W D	
R37	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R38	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R39	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R40	RK73HB1J154J	MG RESISTOR	150kΩ 1/16W J	
R41	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R42	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R43	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R44	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R45	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J	
R46	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R48	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R51	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R52	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R53	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R54	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R55	RK73HB1J273J	MG RESISTOR	27kΩ 1/16W J	
R56	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R58	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R60	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R61	RK73HB1J682J	MG RESISTOR	6.8kΩ 1/16W J	
R62	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J	
R63	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R65	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R66	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R67	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R68	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	
R69	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R70	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R71	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R200	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R202	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R210	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R211	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	
R212	RK73HB1J182J	MG RESISTOR	1.8kΩ 1/16W J	
R213	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R214	RK73HB1J561J	MG RESISTOR	560Ω 1/16W J	
R215	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	
R217	RK73HB1J5R6J	MG RESISTOR	5.6Ω 1/16W J	
R219	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	
R224	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	
R225	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	
R227	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	

⚠ Symbol No.	Part No.	Part Name	Description	Local
R229	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R232	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	
R236	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	
R239	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	
R249	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	
R251	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	
R252	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R253	RK73GB2A823J	MG RESISTOR	82kΩ 1/10W J	
R254	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R290	RK73HH1J394D	MG RESISTOR	390kΩ 1/16W D	
R291	RK73HH1J824D	MG RESISTOR	820kΩ 1/16W D	
R292	RK73HH1J394D	MG RESISTOR	390kΩ 1/16W D	
R293	RK73HH1J824D	MG RESISTOR	820kΩ 1/16W D	
R295	RK73HB1J274J	MG RESISTOR	270kΩ 1/16W J	
R296	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	
R301	RK73EB2ER39J	MG RESISTOR	0.39Ω J	
R302	RK73EB2ER39J	MG RESISTOR	0.39Ω J	
R303	RK73EB2ER39J	MG RESISTOR	0.39Ω J	
R314	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R320	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R323	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R324	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R400	RK73HB1J334J	MG RESISTOR	330kΩ 1/16W J	
R401	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R403	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R404	RK73HB1J564J	MG RESISTOR	560kΩ 1/16W J	
R405	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	
R407	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	
R408	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	
R409	RK73HB1J563J	MG RESISTOR	56kΩ 1/16W J	
R412	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R413	RK73HB1J184J	MG RESISTOR	180kΩ 1/16W J	
R414	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R417	RK73HB1J684J	MG RESISTOR	680kΩ 1/16W J	
R418	RK73HB1J334J	MG RESISTOR	330kΩ 1/16W J	
R419	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	
R420	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R421	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	
R422	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R423	RK73HB1J681J	MG RESISTOR	680Ω 1/16W J	
R424	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	
R425	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R426	RK73HB1J154J	MG RESISTOR	150kΩ 1/16W J	
R427	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	
R428	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R429	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R430	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	
R434	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	
R435	RK73HB1J121J	MG RESISTOR	120Ω 1/16W J	
R436	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R438	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R439	RK73HB1J683J	MG RESISTOR	68kΩ 1/16W J	
R440	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R441	RK73HH1J473D	MG RESISTOR	47kΩ 1/16W D	
R443	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R444	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R447	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R448	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R449	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	
R450	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R451	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R452	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R453	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R454	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R455	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R457	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R458	RK73HB1J561J	MG RESISTOR	560Ω 1/16W J	
R459	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	
R460	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	
R461	RK73HB1J124J	MG RESISTOR	120kΩ 1/16W J	
R464	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R600	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	
R601	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R602	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R603	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R604	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	
R605	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R606	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	

⚠ Symbol No.	Part No.	Part Name	Description	Local
R607	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R608	RK73GB2A271J	MG RESISTOR	270Ω 1/10W J	
R609	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R610	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R611	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R612	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R613	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R616	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R620	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R621	RK73HB1J393J	MG RESISTOR	39kΩ 1/16W J	
R622	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R623	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R624	RK73HB1J683J	MG RESISTOR	68kΩ 1/16W J	
R650	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	
R651	RK73HH1J683D	MG RESISTOR	68kΩ 1/16W D	
R653	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R654	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	
R701	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	
R702	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	
R703	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	
R705	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R708	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R709	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R711	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	
R712	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R718	RK73HB1J820J	MG RESISTOR	82Ω 1/16W J	
R720	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R722	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R723	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R725	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R726	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R736	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R737	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R738	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R740	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R744	RK73HB1J150J	MG RESISTOR	15Ω 1/16W J	
R746	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	
R748	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R751	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R752	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R755	RK73HB1J563J	MG RESISTOR	56kΩ 1/16W J	
R756	RK73HB1J2R2J	MG RESISTOR	2.2Ω 1/16W J	
R757	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R759	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	
R762	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R763	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R765	RK73HB1J273J	MG RESISTOR	27kΩ 1/16W J	
R766	RK73HB1J334J	MG RESISTOR	330kΩ 1/16W J	
R767	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R768	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R769	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R770	RK73HB1J124J	MG RESISTOR	120kΩ 1/16W J	
R772	RK73HB1J154J	MG RESISTOR	150kΩ 1/16W J	
R773	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R774	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R775	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R777	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R780	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	
R781	RK73HB1J682J	MG RESISTOR	6.8kΩ 1/16W J	
R782	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R783	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	
R784	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	
R785	RK73HB1J273J	MG RESISTOR	27kΩ 1/16W J	
R786	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R787	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	
R788	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R789	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R790	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R792	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
R793	RK73HB1J182J	MG RESISTOR	1.8kΩ 1/16W J	
R794	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	
R795	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R796	RK73HB1J561J	MG RESISTOR	560Ω 1/16W J	
R800	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	
R801	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R802	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	
R803	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	
R804	RK73HB1J124J	MG RESISTOR	120kΩ 1/16W J	
R805	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R806	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R807	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	
R809	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R810	RK73HB1J334J	MG RESISTOR	330kΩ 1/16W J	
R811	RK73HB1J274J	MG RESISTOR	270kΩ 1/16W J	
R812	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R813	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	
R814	RK73HB1J273J	MG RESISTOR	27kΩ 1/16W J	
R815	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	
R816	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R817	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R824	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R825	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R826	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R828	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	
R830	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R831	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	
R835	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R836	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	
R837	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	
R838	RK73HB1J824J	MG RESISTOR	820kΩ 1/16W J	
R840	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	
R841	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R842	RK73HB1J273J	MG RESISTOR	27kΩ 1/16W J	
R844	RK73HH1J473D	MG RESISTOR	47kΩ 1/16W D	
R845	RK73HH1J473D	MG RESISTOR	47kΩ 1/16W D	
R850	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	
R852	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	
R853	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	
R857	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	
R862	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	
R863	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R877	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R881	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R885	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R886	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	
R887	RK73HB1J563J	MG RESISTOR	56kΩ 1/16W J	
R888	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	
R901	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R902	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
R903	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	
R904	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	
R905	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	
R907	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R960	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R970	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	
R977	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R978	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R979	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R980	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	
R999	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	
L1	LR77Z0AE4R7J	CHIP INDUCTOR	4.7uH	
L2	LB73G0BJ-001	CHIP FERRITE		
L3	LB73H0AV-003	CHIP FERRITE		
L4	LK73H0AM12NJ	M.CHIP INDUCTOR	12nH	
L7	L41-2785-53	CHIP INDUCTOR		
L8	L41-2785-53	CHIP INDUCTOR		
L13	L41-2785-53	CHIP INDUCTOR		
L14	L41-2785-53	CHIP INDUCTOR		
L15	L41-1578-08	CHIP INDUCTOR		
L16	L41-2278-08	CHIP INDUCTOR		
L17	LB73H0AV-003	CHIP FERRITE		
L18	L41-2785-53	CHIP INDUCTOR		
L19	L41-2785-53	CHIP INDUCTOR		
L21	L41-2785-53	CHIP INDUCTOR		
L23	L41-2785-53	CHIP INDUCTOR		
L24	LK73H0AM33NJ	M.CHIP INDUCTOR	33nH	
L25	LK73H0AM27NJ	M.CHIP INDUCTOR	27nH	
L27	L41-2785-53	CHIP INDUCTOR		
L28	LK73H0AM27NJ	M.CHIP INDUCTOR	27nH	
L29	LK73H0AM33NJ	M.CHIP INDUCTOR	33nH	
L30	LK73H0AM27NJ	M.CHIP INDUCTOR	27nH	
L32	L41-2785-53	CHIP INDUCTOR		
L33	L41-2785-53	CHIP INDUCTOR		
L34	L41-2785-53	CHIP INDUCTOR		
L35	LK73H0AM22NJ	M.CHIP INDUCTOR	22nH	

⚠ Symbol No.	Part No.	Part Name	Description	Local
L204	LK73H0AM10NJ	M.CHIP INDUCTOR	10nH	
L205	LK73H0AM33NJ	M.CHIP INDUCTOR	33nH	
L206	LB73H0AV-002	CHIP FERRITE		
L207	LK73H0AM12NJ	M.CHIP INDUCTOR	12nH	
L208	LR79Z0DC27N9J	CHIP INDUCTOR	27.9nH	
L209	LB73F0AW-002	CHIP FERRITE		
L211	L41-1563-53	CHIP INDUCTOR		
L212	LB73F0AW-002	CHIP FERRITE		
L213	LR79Z0DD21N9J	CHIP INDUCTOR	21.9nH	
L216	LR79Z0CAR22J	CHIP INDUCTOR	0.22uH	
L217	LR79Z0DD16N9J	CHIP INDUCTOR	16.9nH	
L218	LR79Z0DD12N2J	CHIP INDUCTOR	12.2nH	
L219	LR79Z0DD21N9J	CHIP INDUCTOR	21.9nH	
L220	LR79Z0DD16N9J	CHIP INDUCTOR	16.9nH	
L400	L41-1885-53	CHIP INDUCTOR		
L401	LK73H0AMR10J	M.CHIP INDUCTOR	0.1uH	
L402	LK73G0AQ1R5K	M.CHIP INDUCTOR	1.5uH	
L403	LB73G0BD-005	CHIP FERRITE		
L404	LR77Z0AER56J	CHIP INDUCTOR	0.56uH	
L405	LK73H0AM15NJ	M.CHIP INDUCTOR	15nH	
L406	LR77Z0AER27J	CHIP INDUCTOR	0.27uH	
L407	LK73H0AM15NJ	M.CHIP INDUCTOR	15nH	
L408	L41-3375-53	CHIP INDUCTOR		
L410	L41-8268-14	CHIP INDUCTOR		
L411	L41-8268-14	CHIP INDUCTOR		
L412	LB73G0BD-005	CHIP FERRITE		
L413	L41-8268-14	CHIP INDUCTOR		
L414	L41-2285-14	CHIP INDUCTOR		
L415	L41-8268-14	CHIP INDUCTOR		
L416	L41-8268-14	CHIP INDUCTOR		
L417	LR79G0GK39NG	CHIP INDUCTOR		
L420	L41-1075-53	CHIP INDUCTOR		
L600	L92-0472-05	CHIP FERRITE		
L601	LB73G0BD-005	CHIP FERRITE		
L650	LB73G0CQ-001	CHIP FERRITE		
L651	L33-3034-05	CHIP INDUCTOR		
L652	LB73G0CQ-001	CHIP FERRITE		
L653	LB73G0CQ-001	CHIP FERRITE		
L700	LB73H0AV-001	CHIP FERRITE		
L701	LB73H0AV-001	CHIP FERRITE		
L702	LB73H0AV-001	CHIP FERRITE		
L703	LB73H0AV-003	CHIP FERRITE		
L901	LB73H0AV-003	CHIP FERRITE		
L902	LB73H0AV-003	CHIP FERRITE		
L903	LB73H0AV-003	CHIP FERRITE		
L904	L41-5669-16	CHIP INDUCTOR		
CN600	E40-6922-05	F.C.CONNECTOR		
CN912	E23-1167-05	TERMINAL		
CN913	E23-1167-05	TERMINAL		
CN914	E23-1167-05	TERMINAL		
CN915	E23-1167-05	TERMINAL		
CN916	E23-1167-05	TERMINAL		
CN918	E23-1167-05	TERMINAL		
CN919	E23-1167-05	TERMINAL		
CN920	E23-1167-05	TERMINAL		
CN921	E23-1167-05	TERMINAL		
CN922	G0B-0005-00	EARTH SPRING		
CN923	G0B-0005-00	EARTH SPRING		
CP1	RK74HA1J101J	NET RESISTOR	100Ω 1/16W J	
CP20	RK74HA1J473J	NET RESISTOR	47kΩ 1/16W J	
CP21	RK74HA1J473J	NET RESISTOR	47kΩ 1/16W J	
CP23	RK74HA1J473J	NET RESISTOR	47kΩ 1/16W J	
CP24	RK74HA1J102J	NET RESISTOR	1kΩ 1/16W J	
CP25	RK74HA1J473J	NET RESISTOR	47kΩ 1/16W J	
CP26	RK74HA1J103J	NET RESISTOR	10kΩ 1/16W J	
CP27	RK74HA1J474J	NET RESISTOR	470kΩ 1/16W J	
CP28	RK74HA1J103J	NET RESISTOR	10kΩ 1/16W J	
CP401	RK74HA1J104J	NET RESISTOR	100kΩ 1/16W J	
CP402	RK74HA1J474J	NET RESISTOR	470kΩ 1/16W J	
F600	FZA10AW-2R5	FUSE (CC)	2.5A	
F701	FZA10BH-R315	FUSE (CC)	0.315A	
J601	E11-0703-05	PHONE JACK		
S601	S70-0414-05	TACTILE PUSH SW		
S602	S70-0414-05	TACTILE PUSH SW		
S603	S70-0414-05	TACTILE PUSH SW		
TH200	ERTJ0EV104J	THERMISTOR		
TH400	NCP18WM224J03	THERMISTOR		
TH401	ERTJ0EV104J	THERMISTOR		
X1	L77-3128-05	TCXO		
X2	L77-3129-05	TCXO		
XF400	L71-0655-05	MCF		