



PARTS LIST

MONITOR WITH DVD RECEIVER

KW-V40BTA	KW-V40BTE	KW-V40BTEE
KW-V40BTEU	KW-V40BTJ	KW-V40BTJW
KW-V40BTU	KW-V40BTUI	

■ PRECAUTIONS ON SCHEMATIC DIAGRAMS

- Due to the improvement in performance, some part numbers shown in the circuit diagrams may not agree with those indicated in the Parts List.
- The parts numbers, values and rated voltage etc. in the Schematic Diagrams are for reference only.
- Since the circuit diagrams are standard ones, the circuits and circuit constants may be subject to change for improvement without any notice.

■ PRECAUTIONS ON PARTS LIST

- The parts identified by the $\triangle$ symbol are critical for safety. Whenever replacing these parts, be sure to use specified ones to secure the safety.
- The parts not indicated in this Parts List and those which are filled with lines --- in the Parts No. columns will not be supplied.
- P.W. BOARD Ass'y will not be supplied, but those which are filled with the Parts No. in the Parts No. columns will be supplied.
- When ordering chips, screws etc., place bulk orders (unit of tens) whenever possible to improve shipping efficiency.
- There are cases where the actual implemented parts in the sets and the service parts are different. When ordering parts, make sure to refer to the Parts List.

■ PRECAUTIONS ON SERVICE


Certain parts of the power circuits and the GNDs differ according to the models. Care must be taken for the following points as the differences are indicated separately in the LIVE GND () and the ISOLATED (NEUTRAL) GND ()

1. Do not touch the LIVE GND, or do not touch the LIVE GND and the ISOLATED (NEUTRAL) GND at the same time. It may cause an electric shock.
Before pulling out the chassis or other parts, make sure to pull out the power cord from the wall outlet first.
2. Do not short circuit between the LIVE GND and ISOLATED (NEUTRAL) GND, or never measure the LIVE GND and ISOLATED (NEUTRAL) GND at the same time using measuring instruments (oscilloscope, etc.). It may blow fuses or damage other parts.

■ DEVIATION TOLERANCE RANGE

DEVIATION TOLERANCE RANGE									
F	G	J	K	M	N	R	H	Z	P
± 1%	± 2%	± 5%	±10%	±20%	±30%	+30% -10%	+50% -10%	+80% -20%	+100% -0%

EXPLODED VIEW(UNIT)

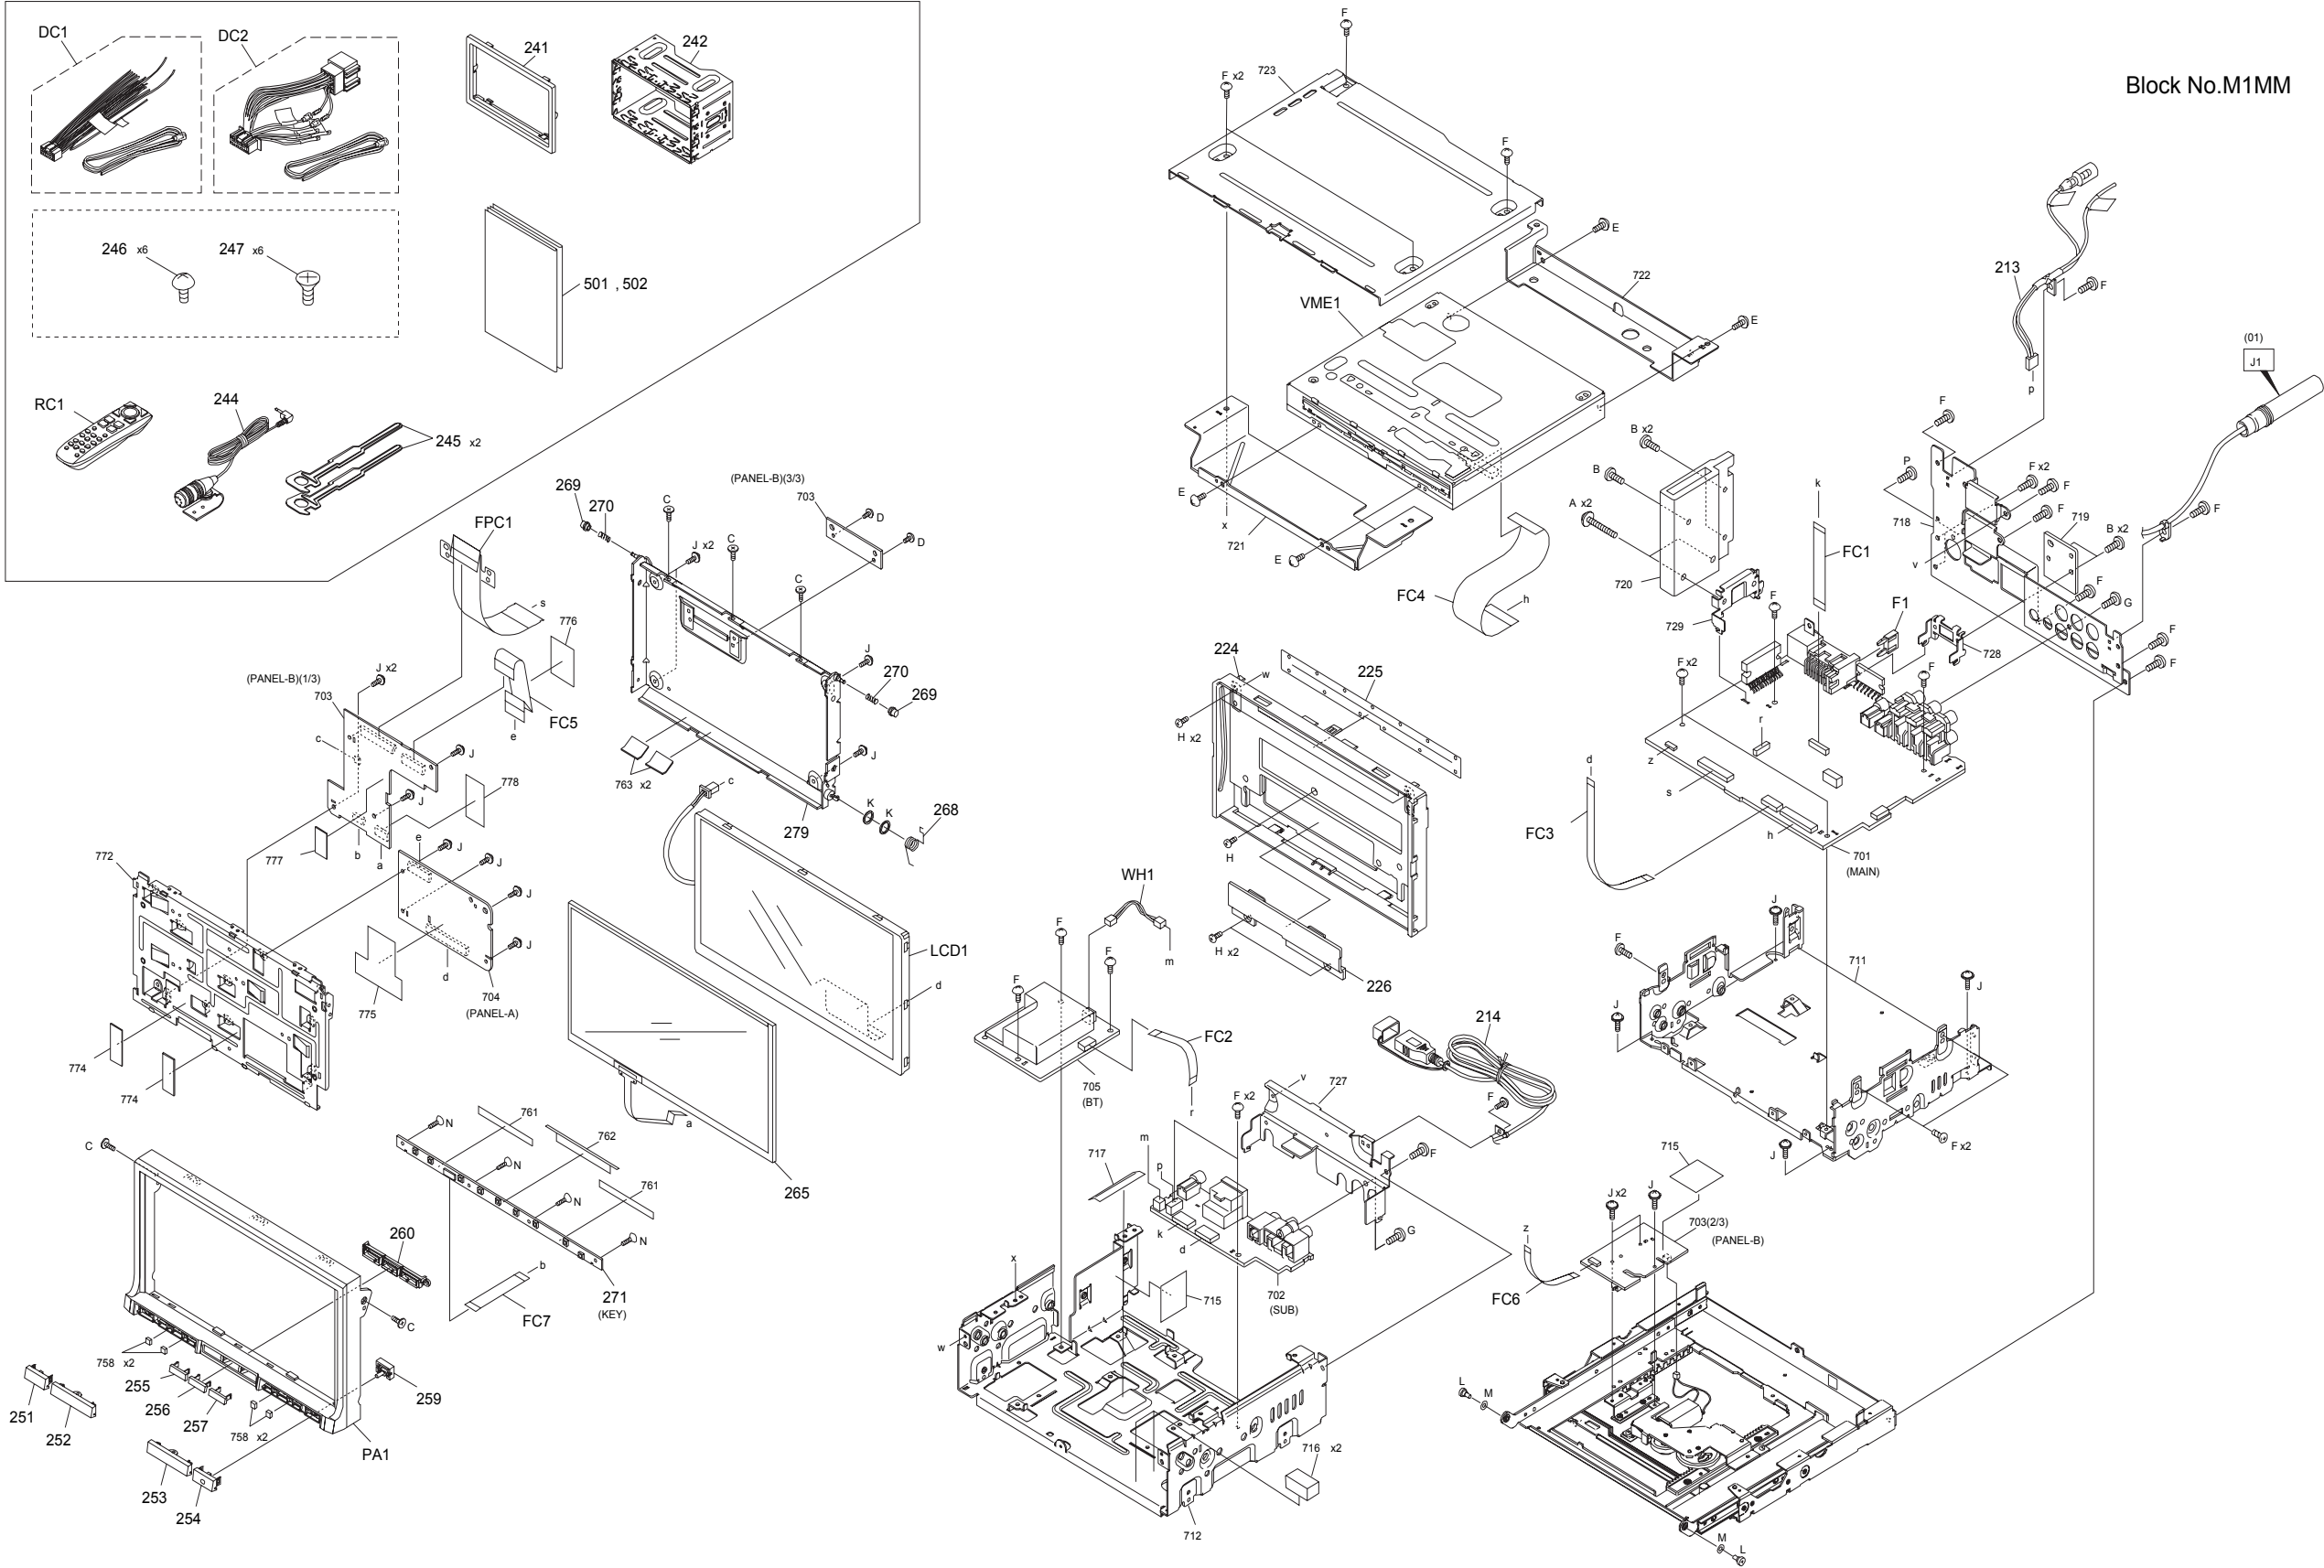

Block No.M1MM

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-V40BTA	A	KW-V40BTE	B	KW-V40BTEE	C	KW-V40BTEU	D
KW-V40BTJ	E	KW-V40BTJW	F	KW-V40BTU	G	KW-V40BTUI	H


Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
------	------------	-----------	------------	-------------	-----	-------

EXPLODED VIEW (UNIT) <M1MM>

△	DC1	QAM1561-001	DC CORD		1	A,E,F,G,H
△	DC2	QAM1562-001	DC CORD		1	B,C,D
△	F1	QMF2064-100-J1	FUSE	10A	1	
	FC1	QUQY05-2005AC-E	FFC WIRE	20pin 5cm	1	
	FC2	QUQY05-1205AC-E	FFC WIRE	12pin 5cm	1	
	FC3	QUQY05-2014BC-E	FFC WIRE	20pin 14cm	1	
	FC4	QUQY05-5013BC-E	FFC WIRE	50pin 13cm	1	
	FC5	QUQY05-3005BC-E	FFC WIRE	30pin 5cm	1	
	FC6	QUQY05-08X3BC-E	FFC WIRE	8pin 3.5cm	1	
	FC7	WJT0343-001A-E	E-CARD WIRE		1	
	FPC1	QAL1376-001	FPC		1	
	LCD1	QLD0737-001	LCD MODULE		1	
	PA1	LV11743-025A	FRONT PANEL		1	A,B,C,D,F,G,H
	PA1	LV11743-024A	FRONT PANEL		1	E
	RC1	RM-RK256	REMOTE CONTROL UNI		1	A,D,F,G,H
	VME1	FD2-5A00NXN	DVD MECHA MODUL		1	
	WH1	WJJ1272-001A-E	E-SI C WIRE C-C		1	
	A	QYSDST2616ZA	TAP SCREW	M2.6 x 16mm	2	
	B	QYSDST2610ZA	TAP SCREW	M2.6 x 10mm	5	
	C	LV45701-003A	SPECIAL SCREW		5	
	D	LV45701-001A	SPECIAL SCREW		2	
	E	LV45552-003A	SPECIAL SCREW		4	
	F	LV44800-005A	SPECIAL SCREW		28	
	G	QYSDSF3010ZA	TAP SCREW	M3 x 10mm	2	
	H	QYSDST2006MA	TAP SCREW	M2 x 6mm	5	
	J	LV44615-003A	SPECIAL SCREW		19	
	K	QYWFM628050	WASHER	8mm/6.2mm x 0.5mm	2	
	L	LV44470-002A	SPECIAL SCREW		2	
	M	LV45039-001A	WAVE WASHER		2	
	N	LV44464-001A	SPECIAL SCREW		4	
	P	LV44800-005A	SPECIAL SCREW		1	E
	213	QAM1564-001	CAR CABLE		1	
	214	QAM1417-002	USB CABLE		1	A,E,F
	214	QAM1520-001	USB CABLE		1	B,C,D,G,H
	224	LV11908-004A	FRONT CHASSIS		1	
	225	LV3A421-001A	BLIND		1	
	226	LV22941-001A	FPC GUIDE		1	
	241	B07-3369-01	ESCUTCHEON		1	B,C,D,F,H
	242	LV22876-001A	SLEEVE ASSY		1	B,C,D,F
	244	QAN0126-001	MICROPHONE		1	
	245	LV45516-001A	LEVER		2	B,C,D,F
	246	N34-5006-48	TR.HEAD M.SCREW		6	A,D,E,F,G,H
	247	N32-5007-48	MACHINE SCREW		6	A,D,E,F,G,H
	251	LV3A345-001A	REMOTE LENS		1	
	252	LV39134-005A	BUTTON L2		1	
	253	LV39136-008A	BUTTON R2		1	
	254	LV39963-001A	BUTTON COVER		1	
	255	LV39130-007A	BUTTON TOP(L)		1	
	256	LV39131-005A	BUTTON TOP(C)		1	
	257	LV39132-007A	BUTTON TOP(R)		1	
	259	LV39962-001A	RESET BUTTON		1	
	260	LV22885-002A	BUTTON BASE		1	
	265	QAL1307-001	TOUCH PANEL		1	
	268	LV44471-003A	TOR SPRING		1	
	269	LV44469-001A	ROLLER		2	
	270	LV44468-002A	SPRING		2	
	271	CB-14KWVKEYD	KEY PWB		1	
	279	LV39961-002A	F.BKT ASSY		1	
	501	LVT2522-001A	INST BOOK	ENG	1	A
	501	LVT2517-001A	INST BOOK	SPA ITA POR SWE	1	B
	501	LVT2518-001A	INST BOOK	RUS UKR	1	C
	501	LVT2519-001A	INST BOOK	TUR	1	D
	501	LVT2516-001A	INST BOOK	ENG SPA FRE	1	E,F
	501	LVT2520-001A	INST BOOK	ENG CHI(TAIWAN) THA	1	G
	501	LVT2521-001A	INST BOOK	ENG	1	H
	502	LVT2517-002A	INST BOOK	SPA ITA POR SWE	1	B
	502	LVT2519-002A	INST BOOK	TUR	1	D
	502	LVT2516-002A	INST BOOK	ENG SPA FR	1	F

EXPLODED VIEW (PANEL MECHA ASSY)

Block No.M2MM

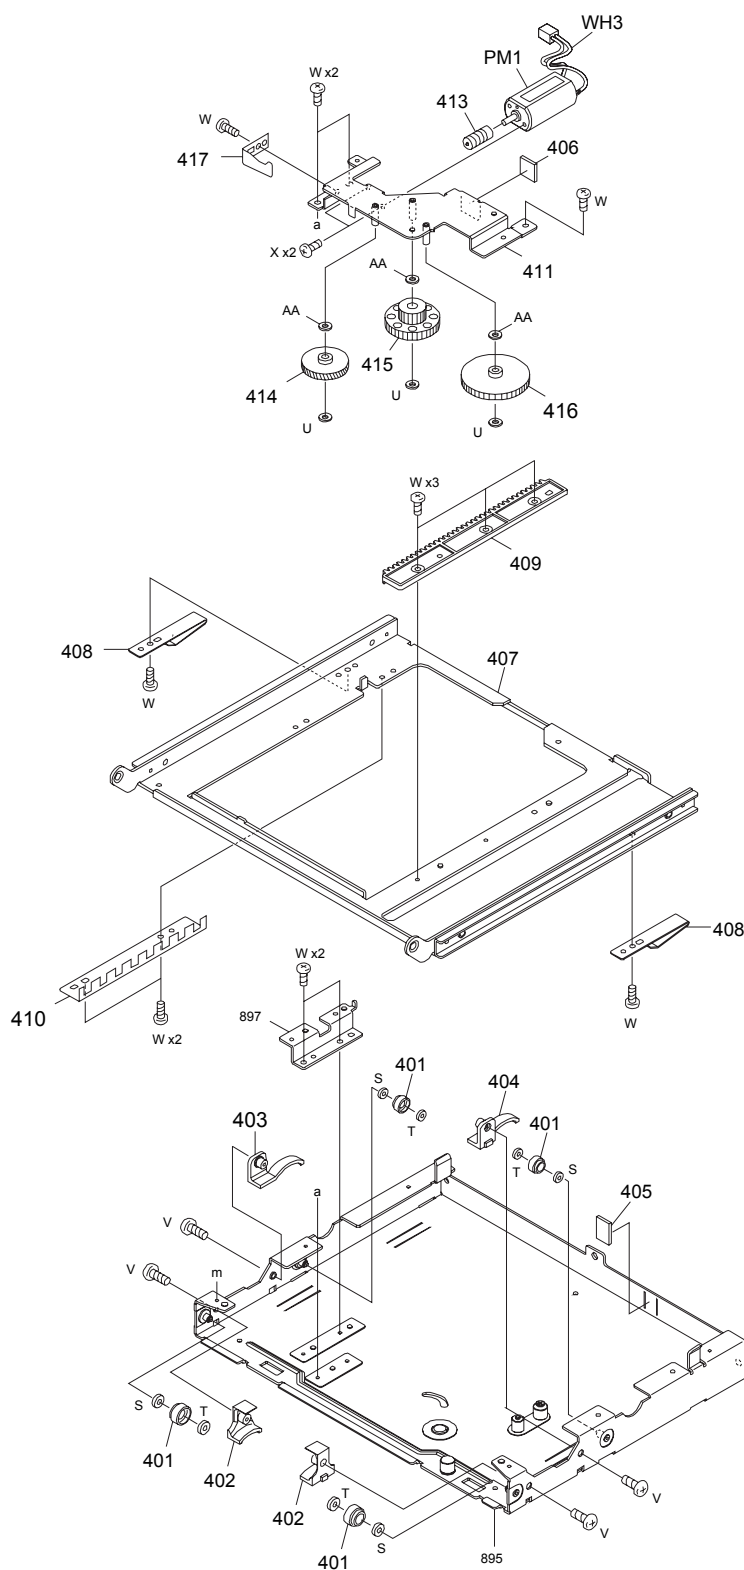

Parts with the exploded numbers larger than 800 are not supplied.

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-V40BTA	A	KW-V40BTE	B	KW-V40BTEE	C	KW-V40BTEU	D
KW-V40BTJ	E	KW-V40BTJW	F	KW-V40BTU	G	KW-V40BTUI	H


Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (PANEL MECHA ASSY) <M2MM>						
PM1		QAR0378-002	FEED MOTOR		1	
WH3		WJM0460-001A-E	E-SI C WIRE C-F		1	
AA		QYWFM265013	WASHER	5mm/2.6mm x 0.13mm	3	
S		QYWFM315013	WASHER	5mm/3.1mm x 0.13mm	4	
T		QYWDL164035	SLIT WASHER	4mm/1.6mm x 0.35mm	4	
U		QYWDM215025	SLIT WASHER	5mm/2.1mm x 0.25mm	3	
V		QYSPSFT1745ZA	TAP SCREW	M1.7 x 4.5mm	4	
W		LV44159-004A	MINI SCREW		13	
X		QYSPSPT2020ZA	SCREW	M2 x 2mm	2	
401		LV44666-003A	ROLLER(SLD)		4	
402		LV36940-002A	RAIL GUIDE		2	
403		LV37308-001A	GUIDE SPRING(L)		1	
404		LV37309-001A	GUIDE SPRING(R)		1	
405		LV40846-053A	SPACER(F)		1	
406		LV40846-057A	SPACER(F)		1	
407		LV36514-012A	DRIVE PLATE ASS		1	
408		LV44453-004A	FRICTION SPRING		2	
409		LV36516-001A	RACK GEAR		1	
410		LV36517-003A	PHOTO PLATE		1	
411		LV36509-002A	DR.CHASSIS ASSY		1	
413		LV44451-001A	WORM GEAR		1	
414		LV36511-001A	SECOND GEAR		1	
415		LV36512-001A	THIRD GEAR		1	
416		LV36513-001A	FORTH GEAR		1	
417		LV44452-001A	SPRING(WORM)		1	

EXPLODED VIEW (DVD MECHANISM: FD2-5A00NXN)

Block No.MJMM

Grease

- ★ W01-2067-08
- ▲ JVS-1003
- FG-87HS

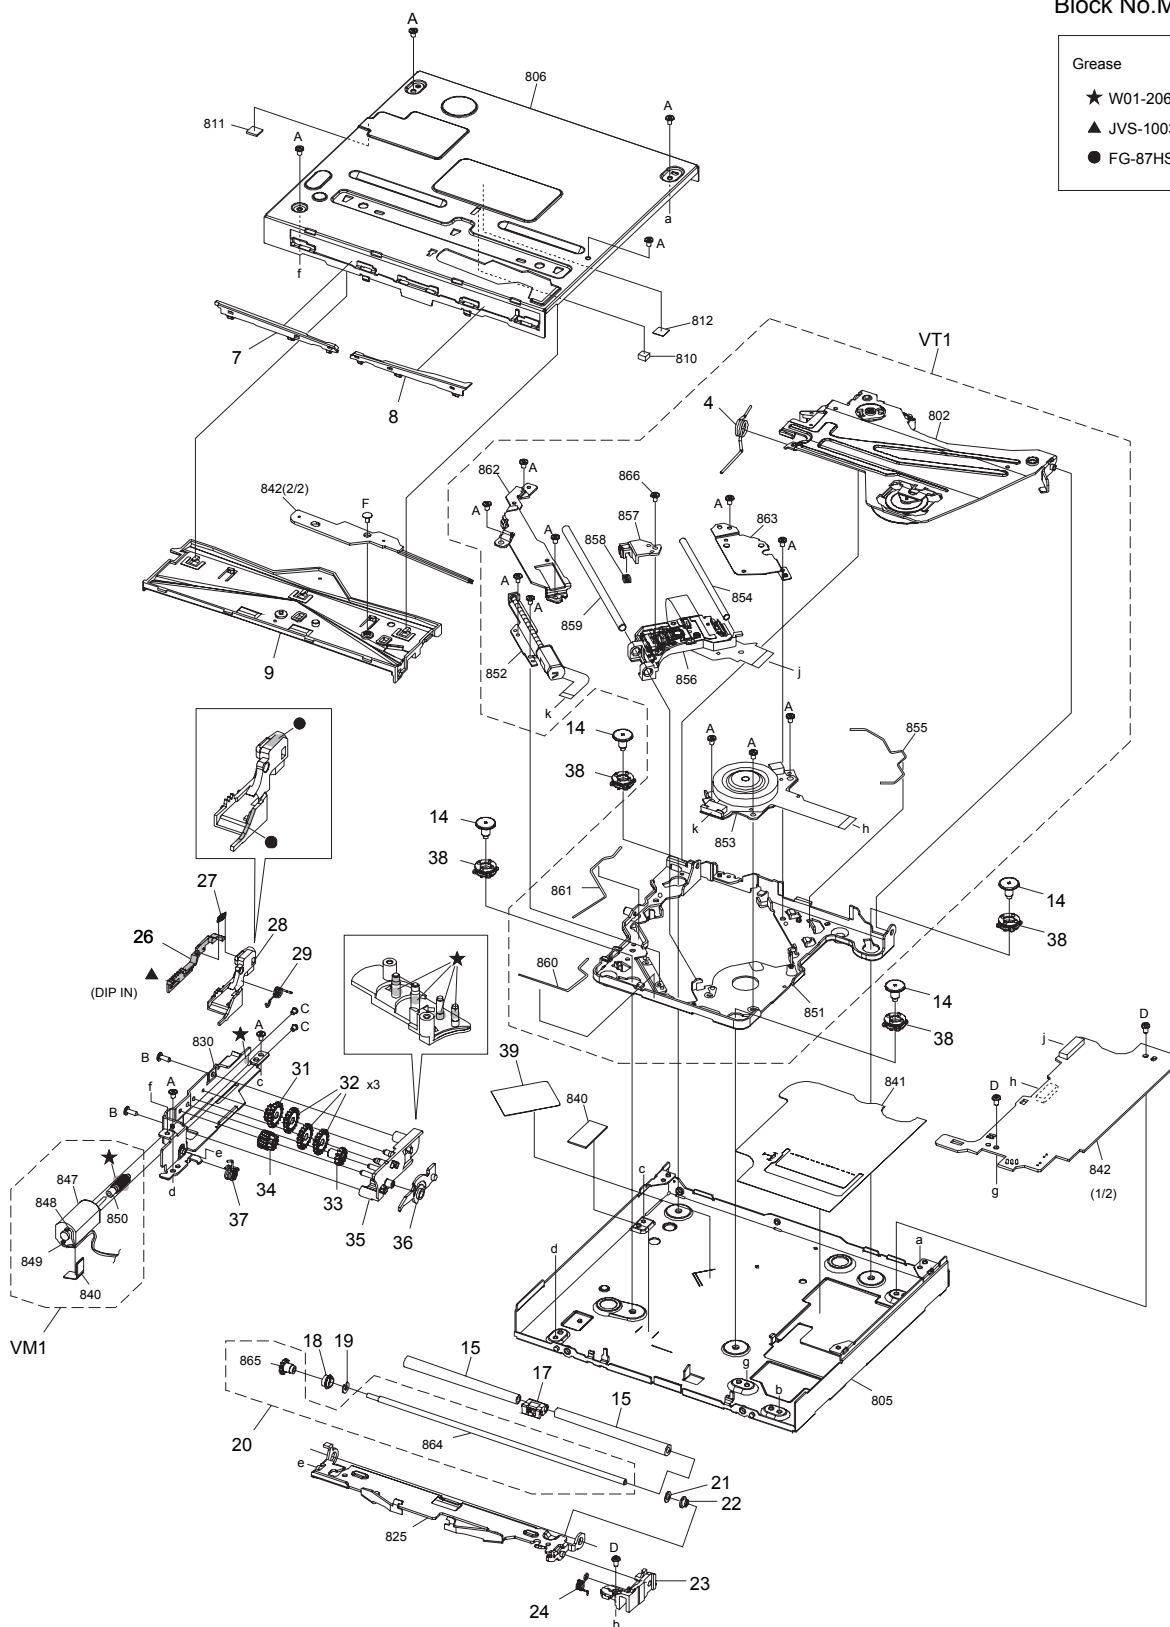

Parts with the exploded numbers larger than 800 are not supplied.

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-V40BTA	A	KW-V40BTE	B	KW-V40BTEE	C	KW-V40BTEU	D
KW-V40BTJ	E	KW-V40BTJW	F	KW-V40BTU	G	KW-V40BTUI	H

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
------	------------	-----------	------------	-------------	-----	-------

EXPLODED VIEW (DVD MECHANISM: FD2-5A00NXN) <MJMM>

VM1	CM-FD2-ALM	LOADING M ASSY		1
VT1	CM-FD2-ATM2	TM ASSY		1
A	LV44959-002A	SPECIAL SCREW		16
B	LV45727-001A	GEAR SCREW		2
C	QYSPSPU1425MA	SCREW	M1.4 x 2.5mm	2
D	VKZ4539-054	MINI SCREW		3
F	LV44586-001A	SPECIAL SCREW		1
4	LV45709-001A	CLAMP SPRING		1
7	LV23006-002A	GUIDE 2 L		1
8	LV23007-002A	GUIDE 2 R		1
9	LV11842-003A	DISC GUIDE		1
14	LV45704-001A	DAMPER SHAFT		4
15	LV45724-001A	RUBBER ROLLER		2
17	LV37652-002A	SHAFT GUIDE		1
18	LV39938-001A	GEAR RETAINER		1
19	LV45730-001A	ROLLER C WASHER		1
20	CM-FD2-AROS	RO SHAFT ASSY		1
21	LV45731-001A	ROLLER WASHER		1
22	LV45718-001A	ROLLER RETAINER		1
23	LV23003-001A	ROLLER HOLDER		1
24	LV45713-001A	ROLLER SPRING R		1
26	LV39932-002A	TRIGGER SLIDER		1
27	LV45715-001A	TRIGGER SPRING		1
28	LV23004-003A	SLIDER		1
29	LV39935-002A	SLIDER SPRING		1
31	LV39929-001A	DRIVE GEAR 4		1
32	LV39928-001A	DRIVE GEAR 3		3
33	LV39927-001A	DRIVE GEAR 2		1
34	LV39926-001A	DRIVE GEAR 1		1
35	LV23005-001A	GEAR HOLDER		1
36	LV39923-002A	UD LEVER		1
37	LV45712-003A	ROLLER SPRING L		1
38	LV39934-001A	DAMPER		4
39	LV45719-001A	PU FPC SHEET		1

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-V40BTA	A	KW-V40BTE	B	KW-V40BTEE	C	KW-V40BTEU	D
KW-V40BTJ	E	KW-V40BTJW	F	KW-V40BTU	G	KW-V40BTUI	H

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
MAIN PWB ASSY (LVA11285-xxA) <01>						
	IC1	LV5680NPVC	IC		1	
	IC111	BD9876AEFJ-X	IC		1	
	IC131	BD9876AEFJ-X	IC		1	
	IC151	LM3481MMX-X	IC		1	
	IC171	BD9876AEFJ-X	IC		1	
	IC201	JCV8031	IC		1	
	IC301	TDA7715	IC		1	
	IC401	TEF6642HW	IC		1	
	IC402	BU12TD3WG-W	IC		1	
	IC501	JVM677B	IC(MCU)		1	
	IC502	BU4824F-W	IC		1	
	IC503	R1EX24016ATAA-X	IC		1	
	IC591	XC6223B331PG-X	IC		1	
	IC711	TC7SET08FU-J-X	IC(DIGITAL)		1	E
	IC721	TC7SH17FU-X	IC(DIGITAL)		1	D,E,G,H
	IC731	NJM2584AM-X	SV-ANALOGUE IC		1	D,G,H
	IC791	BA6956AN	IC		1	
	IC851	MM3423DHE	ANALOG IC		1	
	Q31	LSCR523EBFS8	TRANSISTOR		1	
	Q32	LSCR523EBFS8	TRANSISTOR		1	
	Q41	LSCR523EBFS8	TRANSISTOR		1	
	Q51	LSCR523EBFS8	TRANSISTOR		1	
	Q101	MTM98140-X	TRANSISTOR		1	
	Q102	LTA014EEBFS8	DIGI TRANSISTOR		1	
	Q103	LTA014EEBFS8	DIGI TRANSISTOR		1	
	Q104	LTC014EEBFS8	DIGI TRANSISTOR		1	
	Q105	LTC044EEBFS8	DIGI TRANSISTOR		1	
	Q111	LTC014EEBFS8	DIGI TRANSISTOR		1	
	Q131	LTC014EEBFS8	DIGI TRANSISTOR		1	
	Q151	RTQ035N03-W	MOS FET		1	
	Q171	LTC014EEBFS8	DIGI TRANSISTOR		1	
	Q251	LTC014YEBFS8	DIGI TRANSISTOR		1	
	Q252	LTA043ZEBFS8	DIGI TRANSISTOR		1	
	Q255	LTC014YEBFS8	DIGI TRANSISTOR		1	
	Q256	LTA043ZEBFS8	DIGI TRANSISTOR		1	
	Q261	LTC043TEB-X	DIGI TRANSISTOR		1	
	Q262	LTC043TEB-X	DIGI TRANSISTOR		1	
	Q263	LTC043TEB-X	DIGI TRANSISTOR		1	
	Q264	LTC043TEB-X	DIGI TRANSISTOR		1	
	Q265	LTC043TEB-X	DIGI TRANSISTOR		1	
	Q292	LTA043ZEBFS8	DIGI TRANSISTOR		1	
	Q293	LTC043TEB-X	DIGI TRANSISTOR		1	
	Q294	LTC043TEB-X	DIGI TRANSISTOR		1	
	Q511	LTA014EEBFS8	DIGI TRANSISTOR		1	
	Q512	DSC5001/R/	TRANSISTOR		1	
	Q521	2SA812/5-6/-X	TRANSISTOR		1	
	Q591	LTA023JEB-X	DIGI TRANSISTOR		1	A,D,G,H
	Q591	LTA014EEBFS8	DIGI TRANSISTOR		1	B,C,E,F
	Q592	LTC044EEBFS8	DIGI TRANSISTOR		1	
	Q611	LTC043ZEBFS8	DIGI TRANSISTOR		1	
	Q612	LTC043ZEBFS8	DIGI TRANSISTOR		1	
	Q613	LTA043ZEBFS8	DIGI TRANSISTOR		1	
	Q614	LTA043ZEBFS8	DIGI TRANSISTOR		1	
	Q761	RE1C002ZP-X	MOS FET		1	A,D,G,H
	Q762	LTC014YEBFS8	DIGI TRANSISTOR		1	A,D,G,H
	Q771	RE1C002ZP-X	MOS FET		1	A,D,G,H
	Q791	LTC014YEBFS8	DIGI TRANSISTOR		1	
	D1	1N5402-BPC04	SI DIODE		1	
	D2	GS1J-LTP-X	SI DIODE		1	
	D31	DZ2J056M	Z DIODE		1	
	D32	DZ2J068M	Z DIODE		1	
	D41	DZ2J062M	Z DIODE		1	
	D71	DZ2J062M	Z DIODE		1	
	D81	MBRX130	SCHOTTKY DIODE		1	
	D82	MBRX130	SCHOTTKY DIODE		1	A,D,E,F,G,H
	D83	MBRX130	SCHOTTKY DIODE		1	
	D84	MBRX130	SCHOTTKY DIODE		1	A,D,E,F,G,H
	D101	DZ2J180M	Z DIODE		1	
	D121	RB051L-40	SCHOTTKY DIODE		1	
	D122	DZ2J062M	Z DIODE		1	
	D141	RB051L-40	SCHOTTKY DIODE		1	
	D142	DZ2J062M	Z DIODE		1	
	D161	RB160L-40	SCHOTTKY DIODE		1	
	D162	RB521S-30	SCHOTTKY DIODE		1	
	D163	RB521S-30	SCHOTTKY DIODE		1	
	D164	RB521S-30	SCHOTTKY DIODE		1	
	D181	RB051L-40	SCHOTTKY DIODE		1	
	D182	DZ2J062M	Z DIODE		1	
	D241	DAP202U-X	SI DIODE		1	
	D251	DAP202U-X	SI DIODE		1	
	D255	DAP202U-X	SI DIODE		1	
	D291	DAP202U-X	SI DIODE		1	
	D301	DAP202U-X	SI DIODE		1	
	D302	DAP202U-X	SI DIODE		1	
	D303	DAP202U-X	SI DIODE		1	
	D312	DA2J101	DIODE		1	
	D402	RN731V	DIODE		1	
	D403	RN731V	DIODE		1	
	D511	DA2J101	DIODE		1	
	D512	DAP202U-X	SI DIODE		1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-V40BTA	A	KW-V40BTE	B	KW-V40BTEE	C	KW-V40BTEU	D
KW-V40BTJ	E	KW-V40BTJW	F	KW-V40BTU	G	KW-V40BTUI	H

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	D761	DA2J101	DIODE		1	A,D,G,H
	D771	DA2J101	DIODE		1	A,D,G,H
	D791	MBRX130	SCHOTTKY DIODE		1	
	D792	DZ2J056M	Z DIODE		1	
	C1	QEZO934-338	E CAPACITOR	3300uF	1	
	C11	CD04CZ1E101M	E CAPACITOR	100uF 25V M	1	
	C12	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C13	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	1	
	C14	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	1	
	C16	QETN1CM-227Z	E CAPACITOR	220uF 16V M	1	
	C18	CK730BY1E106K	C CAPACITOR	10uF 25V K	1	A,D,E,F,G,H
	C19	CK730BY1E106K	C CAPACITOR	10uF 25V K	1	
	C21	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C23	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C24	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C25	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	
	C26	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C41	CK73FBB1E474K	C CAPACITOR	0.47uF 25V K	1	
	C51	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C52	CK730BS0J105K	C CAPACITOR	1uF 6.3V K	1	
	C101	NCB21HK-334X	C CAPACITOR	0.33uF 50V K	1	
	C102	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C112	CK730BY1E106K	C CAPACITOR	10uF 25V K	1	
	C118	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C121	QEZO852-337Z	E CAPACITOR	330uF	1	
	C124	CK730BW1C106K	C CAPACITOR	10uF 16V K	1	
	C125	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C126	CK73HBB1H682K	C CAPACITOR	6800pF 50V K	1	
	C132	CK730BY1E106K	C CAPACITOR	10uF 25V K	1	
	C138	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C141	QEZO852-337Z	E CAPACITOR	330uF	1	
	C144	CK730BW1C106K	C CAPACITOR	10uF 16V K	1	
	C145	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C146	CK73HBB1H682K	C CAPACITOR	6800pF 50V K	1	
	C151	CK730BY1E106K	C CAPACITOR	10uF 25V K	1	
	C152	CK730BY1E106K	C CAPACITOR	10uF 25V K	1	
	C153	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C154	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C155	CK73HBB1H681K	C CAPACITOR	680pF 50V K	1	
	C161	CD04CZ1E101M	E CAPACITOR	100uF 25V M	1	
	C162	CD04AZ1H220M	E CAPACITOR	22uF 50V M	1	
	C163	CK730BY1E106K	C CAPACITOR	10uF 25V K	1	
	C164	CK73HBB1H821K	C CAPACITOR	820pF 50V K	1	
	C165	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C166	CK73FBB1H224K	C CAPACITOR	0.22uF 50V K	1	
	C172	CK730BY1E106K	C CAPACITOR	10uF 25V K	1	
	C178	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C181	QEZO852-337Z	E CAPACITOR	330uF	1	
	C184	CK730BW1C106K	C CAPACITOR	10uF 16V K	1	
	C185	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C186	CK73HBB1H682K	C CAPACITOR	6800pF 50V K	1	
	C200	CD04BR1C330M	E CAPACITOR	33uF 16V M	1	
	C201	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	
	C202	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	
	C203	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	
	C204	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	
	C206	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C221	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	
	C222	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	
	C223	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	
	C224	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	
	C225	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	
	C226	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	
	C227	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	
	C228	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	
	C241	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C245	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C251	CK730DK1E106K	C CAPACITOR	10uF 25V K	1	
	C252	CK730DK1E106K	C CAPACITOR	10uF 25V K	1	
	C253	CK730DK1E106K	C CAPACITOR	10uF 25V K	1	
	C254	CK730DK1E106K	C CAPACITOR	10uF 25V K	1	
	C255	CK730DK1E106K	C CAPACITOR	10uF 25V K	1	
	C271	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C272	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C273	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C274	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C275	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C291	CK730DK1E106K	C CAPACITOR	10uF 25V K	1	
	C292	CK730DK1E106K	C CAPACITOR	10uF 25V K	1	
	C295	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C296	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C301	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	1	
	C302	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C303	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C304	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	1	
	C305	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C306	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C307	CK730AU0J474K	C CAPACITOR	0.47uF 6.3V K	1	
	C308	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C309	CK730AU0J474K	C CAPACITOR	0.47uF 6.3V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-V40BTA	A	KW-V40BTE	B	KW-V40BTEE	C	KW-V40BTEU	D
KW-V40BTJ	E	KW-V40BTJW	F	KW-V40BTU	G	KW-V40BTUI	H

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C313	CK730BU0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C314	CK730BU0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C401	CC73GCH1H220J	C CAPACITOR	22pF 50V J	1	
	C402	CC73GCH1H060D	C CAPACITOR	6pF 50V D	1	
	C406	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C407	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C411	CC73GCH1H470J	C CAPACITOR	47pF 50V J	1	
	C412	CC73GCH1H030C	C CAPACITOR	3pF 50V C	1	
	C415	CK73GBB1H222K	C CAPACITOR	2200pF 50V K	1	
	C416	CC73GCH1H150J	C CAPACITOR	15pF 50V J	1	
	C417	CC73GCH1H060D	C CAPACITOR	6pF 50V D	1	
	C418	CC73GCH1H120J	C CAPACITOR	12pF 50V J	1	
	C419	CC73GCH1H080D	C CAPACITOR	8pF 50V D	1	
	C420	CC73GCH1H120J	C CAPACITOR	12pF 50V J	1	
	C421	CC73GCH1H080D	C CAPACITOR	8pF 50V D	1	
	C422	CC73GCH1H471J	C CAPACITOR	470pF 50V J	1	
	C423	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C424	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C425	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C426	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C427	CK730BW1C106K	C CAPACITOR	10uF 16V K	1	
	C428	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	
	C429	CK73HBB1H332K	C CAPACITOR	3300pF 50V K	1	
	C430	CK730BW1C106K	C CAPACITOR	10uF 16V K	1	
	C432	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C433	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	
	C434	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C435	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	
	C436	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C437	CK730BW1C106K	C CAPACITOR	10uF 16V K	1	
	C439	CK730BU0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C440	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C441	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C444	CC73GCH1H221J	C CAPACITOR	220pF 50V J	1	
	C445	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C446	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C449	CK730BW1C106K	C CAPACITOR	10uF 16V K	1	
	C451	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C452	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C453	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C460	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C461	CK730BW1C106K	C CAPACITOR	10uF 16V K	1	
	C484	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C485	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C501	QETN1CM-227Z	E CAPACITOR	220uF 16V M	1	
	C503	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C504	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
	C505	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C506	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C507	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C508	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C509	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C510	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C511	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C513	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C516	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C520	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C522	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C523	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C524	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C525	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C527	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C530	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C531	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C532	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C533	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C535	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C536	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C537	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C541	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C542	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C544	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C551	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1	
	C552	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1	
	C561	CC73GCH1H220J	C CAPACITOR	22pF 50V J	1	
	C562	CC73GCH1H220J	C CAPACITOR	22pF 50V J	1	
	C571	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C591	QETN1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C592	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C593	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C611	CK73HBB1C103K	C CAPACITOR	0.01uF 16V K	1	
	C612	CK73HBB1C103K	C CAPACITOR	0.01uF 16V K	1	
	C651	QETN1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C652	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C653	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C654	CK730BU0J106M	C CAPACITOR	10uF 6.3V M	1	
	C655	CK730BU0J106M	C CAPACITOR	10uF 6.3V M	1	
	C656	CK730BU0J106M	C CAPACITOR	10uF 6.3V M	1	
	C671	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
	C672	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
	C673	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
	C674	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-V40BTA	A	KW-V40BTE	B	KW-V40BTEE	C	KW-V40BTEU	D
KW-V40BTJ	E	KW-V40BTJW	F	KW-V40BTU	G	KW-V40BTUI	H

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C682	CK73HBB1C103K	C CAPACITOR	0.01uF 16V K	1	
	C693	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C701	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	E
	C702	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	E
	C703	CK730BU0J106M	C CAPACITOR	10uF 6.3V M	1	E
	C711	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E
	C721	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	D,E,G,H
	C731	CK730BS0J105K	C CAPACITOR	1uF 6.3V K	1	D,G,H
	C732	CK730BS0J105K	C CAPACITOR	1uF 6.3V K	1	D,G,H
	C733	CK730BS0J105K	C CAPACITOR	1uF 6.3V K	1	D,G,H
	C734	CK730BS0J105K	C CAPACITOR	1uF 6.3V K	1	D,G,H
	C735	CK730BS0J105K	C CAPACITOR	1uF 6.3V K	1	D,G,H
	C736	CK730BS0J105K	C CAPACITOR	1uF 6.3V K	1	D,G,H
	C737	CK730BU0J106M	C CAPACITOR	10uF 6.3V M	1	
	C738	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	D,G,H
	C741	CK730BU0J475K	C CAPACITOR	4.7uF 6.3V K	1	D,G,H
	C745	CK730BU0J106M	C CAPACITOR	10uF 6.3V M	1	D,G,H
	C761	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	A,D,G,H
	C791	QETN1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C851	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C852	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C853	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C854	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C855	CK730BU0J106M	C CAPACITOR	10uF 6.3V M	1	
	C951	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	D,G,H
	C952	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	D,G,H
	C2011	CC73HCH1H030C	C CAPACITOR	3pF 50V C	1	
	C2012	CC73HCH1H070D	C CAPACITOR	7pF 50V D	1	
	C2013	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1	
	R11	RK73GH2A562D	MG RESISTOR	5.6kΩ 1/10W D	1	
	R12	RK73GH2A431D	MG RESISTOR	430Ω 1/10W D	1	
	R13	RK73GH2A751D	MG RESISTOR	750Ω 1/10W D	1	
	R15	RK73GH2A273D	MG RESISTOR	27kΩ 1/10W D	1	
	R16	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R17	RK73GH2A472D	MG RESISTOR	4.7kΩ 1/10W D	1	
	R18	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R19	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R23	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	1	
	R24	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	1	
	R26	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	1	
	R27	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	1	
	R31	RK73GB2A683J	MG RESISTOR	68kΩ 1/10W J	1	
	R32	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R33	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	
	R34	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R35	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R36	RK73HB1J912J	MG RESISTOR	9.1kΩ 1/16W J	1	
	R41	RK73EB2E153J	MG RESISTOR	15kΩ 1/4W J	1	
	R44	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1	
	R45	RK73EB2E102J	MG RESISTOR	1kΩ 1/4W J	1	
	R46	RK73EB2E102J	MG RESISTOR	1kΩ 1/4W J	1	
	R47	RK73EB2E102J	MG RESISTOR	1kΩ 1/4W J	1	
	R51	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	
	R52	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R53	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R54	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	
	R55	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R71	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	1	
	R81	RK73FB2B472J	MG RESISTOR	4.7kΩ 1/8W J	1	
	R82	RK73FB2B472J	MG RESISTOR	4.7kΩ 1/8W J	1	
	R101	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	A,D,E,F,G,H
	R102	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R103	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R104	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R105	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R111	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R112	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R113	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R120	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R121	RK73HH1J623D	MG RESISTOR	62kΩ 1/16W D	1	
	R122	RK73HH1J273D	MG RESISTOR	27kΩ 1/16W D	1	
	R123	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R124	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R125	RK73PB2H100J	MG RESISTOR	10Ω 1/2W J	1	
	R126	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R131	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R132	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R133	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R140	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R141	RK73HH1J124D	MG RESISTOR	120kΩ 1/16W D	1	
	R142	RK73HH1J303D	MG RESISTOR	30kΩ 1/16W D	1	
	R143	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R144	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R145	RK73PB2H100J	MG RESISTOR	10Ω 1/2W J	1	
	R146	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R151	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R152	RK73HH1J563D	MG RESISTOR	56kΩ 1/16W D	1	
	R153	RK73PB2H100J	MG RESISTOR	10Ω 1/2W J	1	
	R154	RK73HH1J472D	MG RESISTOR	4.7kΩ 1/16W D	1	
	R155	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-V40BTA	A	KW-V40BTE	B	KW-V40BTEE	C	KW-V40BTEU	D
KW-V40BTJ	E	KW-V40BTJW	F	KW-V40BTU	G	KW-V40BTUI	H

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R156	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R157	RK73HH1J164D	MG RESISTOR	160kΩ 1/16W D	1	
	R158	RK73EB2E560J	MG RESISTOR	56Ω 1/4W J	1	
	R161	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	
	R162	RK73HH1J563D	MG RESISTOR	56kΩ 1/16W D	1	
	R163	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R164	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R165	NR20126-R062X	MG RESISTOR	0.062Ω	1	
	R171	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R172	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R173	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R181	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	
	R182	RK73HH1J243D	MG RESISTOR	24kΩ 1/16W D	1	
	R183	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R184	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R185	RK73PB2H100J	MG RESISTOR	10Ω 1/2W J	1	
	R186	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R187	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R188	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R205	RK73HB1J6R8J	MG RESISTOR	6.8Ω 1/16W J	1	
	R240	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R241	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	
	R242	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	
	R243	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R244	RK73HB1J182J	MG RESISTOR	1.8kΩ 1/16W J	1	
	R245	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	
	R246	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R248	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R251	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R252	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R253	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R254	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R255	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R261	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R262	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R263	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R264	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R265	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R271	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R272	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R273	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R274	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R275	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R281	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R282	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R283	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R284	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R285	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R291	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R292	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R293	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	
	R294	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	
	R295	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R296	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R297	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R301	RK73GB2A2R2J	MG RESISTOR	2.2Ω 1/10W J	1	
	R302	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R304	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R305	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R306	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R307	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R401	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R402	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	
	R403	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R404	RK73GB2A271J	MG RESISTOR	270Ω 1/10W J	1	
	R405	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	
	R407	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	
	R408	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	
	R409	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R410	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R411	RK73GB2A120J	MG RESISTOR	12Ω 1/10W J	1	
	R442	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R443	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R444	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R450	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R451	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R452	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R453	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R454	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R457	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	
	R460	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R461	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R462	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R463	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R464	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R465	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R466	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R467	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R468	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R501	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R502	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R504	RK73GB2A154J	MG RESISTOR	150kΩ 1/10W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-V40BTA	A	KW-V40BTE	B	KW-V40BTEE	C	KW-V40BTEU	D
KW-V40BTJ	E	KW-V40BTJW	F	KW-V40BTU	G	KW-V40BTUI	H

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R505	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R506	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R507	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R509	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R510	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R511	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	A,D,G,H
	R512	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	B,C,E,F
	R514	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R516	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R519	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R520	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R521	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	A,B,C,D,F,G,H
	R522	RK73HB1J243J	MG RESISTOR	24kΩ 1/16W J	1	A
	R522	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1	B
	R522	RK73HB1J622J	MG RESISTOR	6.2kΩ 1/16W J	1	C
	R522	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	D,H
	R522	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	E
	R522	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	1	F
	R522	RK73HB1J912J	MG RESISTOR	9.1kΩ 1/16W J	1	G
	R523	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	
	R524	RK73HB1J622J	MG RESISTOR	6.2kΩ 1/16W J	1	
	R526	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	
	R527	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R529	RK73HB1J106J	MG RESISTOR	10MΩ 1/16W J	1	
	R531	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R532	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R533	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	
	R534	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	
	R535	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R536	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R537	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R538	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R539	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R540	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	1	
	R541	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R545	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R546	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R547	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R548	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	
	R549	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R550	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R551	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R552	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R553	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R554	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R555	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R556	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R557	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R558	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	
	R559	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R561	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R562	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R563	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	
	R564	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R565	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R566	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R570	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R571	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R572	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R573	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R574	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R575	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R576	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R578	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R579	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R581	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R582	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R583	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R584	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R585	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	
	R586	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R587	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	
	R588	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R589	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R591	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R592	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R593	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R611	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	
	R612	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	
	R621	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R622	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R623	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R661	RK73HH1J151D	MG RESISTOR	150Ω 1/16W D	1	
	R662	RK73HH1J151D	MG RESISTOR	150Ω 1/16W D	1	
	R663	RK73HH1J151D	MG RESISTOR	150Ω 1/16W D	1	
	R664	RK73HH1J151D	MG RESISTOR	150Ω 1/16W D	1	
	R671	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	
	R672	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	
	R673	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	
	R674	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-V40BTA	A	KW-V40BTE	B	KW-V40BTEE	C	KW-V40BTEU	D
KW-V40BTJ	E	KW-V40BTJW	F	KW-V40BTU	G	KW-V40BTUI	H

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R681	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R682	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R683	RK73GB2A751J	MG RESISTOR	750Ω 1/10W J	1	
	R701	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	E
	R702	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	E
	R703	RK73GB2A4R7J	MG RESISTOR	4.7Ω 1/10W J	1	E
	R704	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	E
	R707	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E
	R708	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E
	R709	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E
	R711	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	E
	R712	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	E
	R713	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	E
	R714	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	E
	R715	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	E
	R716	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R721	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	D,E,G,H
	R722	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	D,E,G,H
	R723	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	D,E,G,H
	R724	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	D,E,G,H
	R725	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,E,F
	R726	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,F,G,H
	R731	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	D,G,H
	R732	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	D,G,H
	R733	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	D,G,H
	R734	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	D,G,H
	R735	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	D,G,H
	R736	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	D,G,H
	R737	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A,B,C,E,F
	R738	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A,B,C,E,F
	R739	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A,B,C,E,F
	R741	RK73GB2A683J	MG RESISTOR	68kΩ 1/10W J	1	D,G,H
	R743	RK73GB2A362J	MG RESISTOR	3.6kΩ 1/10W J	1	D,G,H
	R744	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	D,G,H
	R747	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	D,G,H
	R748	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	D,G,H
	R749	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	D,G,H
	R751	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R752	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R753	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R754	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R756	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R761	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	A,D,G,H
	R762	RK73GH2A472D	MG RESISTOR	4.7kΩ 1/10W D	1	A,D,G,H
	R763	RK73EB2E511J	MG RESISTOR	510Ω 1/4W J	1	A,D,G,H
	R764	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	1	A,D,G,H
	R765	RK73GB2A681J	MG RESISTOR	680Ω 1/10W J	1	A,D,G,H
	R766	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	A,D,G,H
	R767	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	A,D,G,H
	R768	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,D,G,H
	R771	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	A,D,G,H
	R772	RK73GH2A472D	MG RESISTOR	4.7kΩ 1/10W D	1	A,D,G,H
	R773	RK73EB2E511J	MG RESISTOR	510Ω 1/4W J	1	A,D,G,H
	R774	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	1	A,D,G,H
	R775	RK73GB2A681J	MG RESISTOR	680Ω 1/10W J	1	A,D,G,H
	R776	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	A,D,G,H
	R777	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	A,D,G,H
	R778	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A,D,G,H
	R783	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R786	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R791	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R792	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R793	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R810	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	1	
	R891	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R892	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R951	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	E
	R952	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	E
	R2011	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	
	RA561	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	1	
	RA581	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	1	
	RA781	RK74HB1J470J	NET RESISTOR	47Ω 1/16W J	1	
	RA791	RK74HB1J102J	NET RESISTOR	1kΩ 1/16W J	1	
	L1	QQR1883-002	CHOKE COIL		1	
	L121	NQLL8EM-220X	COIL	22uH M	1	
	L141	NQLL8EM-220X	COIL	22uH M	1	
	L151	NQLL8EM-470X	COIL	47uH M	1	
	L181	NQLL8EM-220X	COIL	22uH M	1	
	L405	NQLD8DJ-1R8X	COIL	1.8uH J	1	
	L406	NQLE6DJ-R27X	COIL	0.27uH J	1	
	L410	NQR0592-004X	FERRITE BEADS		1	
	L411	NQLD8DJ-R68X	COIL	0.68uH J	1	
	L413	NQLD8DJ-R68X	COIL	0.68uH J	1	
	L414	NQLD8DJ-R47X	COIL	0.47uH J	1	
	L416	NQL114K-561X	P COIL	560uH K	1	
	L417	NQL114K-561X	P COIL	560uH K	1	
	L421	QQR1905-001	RF COIL		1	
	L482	LR73Z0AD4R7M	COIL	4.7uH	1	
	L501	NQR0199-003X	FERRITE BEADS		1	
	L601	LR73Z0AD4R7M	COIL	4.7uH	1	
	L602	LR73Z0AD4R7M	COIL	4.7uH	1	
	L651	LR73Z0AD4R7M	COIL	4.7uH	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-V40BTA	A	KW-V40BTE	B	KW-V40BTEE	C	KW-V40BTEU	D
KW-V40BTJ	E	KW-V40BTJW	F	KW-V40BTU	G	KW-V40BTUI	H

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	L652	LR79Z0AG100M	COIL	10uH	1	
	L681	NQR0704-001X	CHOKE COIL		1	
	L701	LR73Z0AD4R7M	COIL	4.7uH	1	E
	L851	LR73Z0AD4R7M	COIL	4.7uH	1	
	CN501	QGF0534F7-20X	CONNECTOR	FFC/FPC (1-20)	1	
	CN502	QGF0536CA-20W	CONNECTOR	FFC/FPC (1-20)	1	
	CN602	QGF0567F1-45W	CONNECTOR	FFC/FPC (1-45)	1	
	CN651	QGF0534F7-50X	CONNECTOR	FFC/FPC (1-50)	1	
	CN681	QGA2001C1-05	CONNECTOR	W-B (1-5)	1	
	CN781	QGF0516C2-12X	CONNECTOR	FFC/FPC (1-12)	1	
	CN791	QGF0534F7-08X	CONNECTOR	FFC/FPC (1-8)	1	
	EP1	NNZ0165-001X	EARTH TERMINAL		1	
△	F101	NMFZ032-4R0X-H	FUSE	4A	1	
	J1	QNZ0607-001	CAR CONNECTOR		1	
	J271	QNN0861-001	PIN JACK		1	
	J291	QNS0307-001	3.5 JACK		1	
	J701	QNZ0907-001	CIR CONNECTOR		1	E
	J761	QNS0307-001	3.5 JACK		1	A,D,G,H
	TH241	NAD0052-471X	P THERMISTOR	470Ω	1	
	VA271	NAF0045-180X	VARISTOR(ZNR)		1	
	VA272	NAF0045-180X	VARISTOR(ZNR)		1	
	VA273	NAF0045-180X	VARISTOR(ZNR)		1	
	VA274	NAF0045-180X	VARISTOR(ZNR)		1	
	VA275	NAF0045-180X	VARISTOR(ZNR)		1	
	VA277	NAF0045-180X	VARISTOR(ZNR)		1	
	VA295	NAF0046-180X	VARISTOR(ZNR)		1	
	VA296	NAF0046-180X	VARISTOR(ZNR)		1	
	VA297	NAF0046-180X	VARISTOR(ZNR)		1	
	VA400	NAF0024-001X	ESD SUPPRESSOR		1	
	VA601	NAF0044-270X	VARISTOR(ZNR)		1	
	VA602	NAF0044-270X	VARISTOR(ZNR)		1	
	VA603	NAF0044-270X	VARISTOR(ZNR)		1	
	VA604	NAF0044-270X	VARISTOR(ZNR)		1	
	VA605	NAF0044-270X	VARISTOR(ZNR)		1	
	VA606	NAF0044-270X	VARISTOR(ZNR)		1	
	VA607	NAF0044-270X	VARISTOR(ZNR)		1	
	VA608	NAF0046-180X	VARISTOR(ZNR)		1	
	VA611	NAF0044-270X	VARISTOR(ZNR)		1	
	VA612	NAF0044-270X	VARISTOR(ZNR)		1	
	VA613	NAF0044-270X	VARISTOR(ZNR)		1	
	VA614	NAF0044-270X	VARISTOR(ZNR)		1	
	VA620	NAF0044-270X	VARISTOR(ZNR)		1	
	VA622	NAF0044-270X	VARISTOR(ZNR)		1	
	VA623	NAF0044-270X	VARISTOR(ZNR)		1	
	VA624	NAF0044-270X	VARISTOR(ZNR)		1	
	VA625	NAF0045-180X	VARISTOR(ZNR)		1	
	VA626	NAF0045-180X	VARISTOR(ZNR)		1	
	VA627	NAF0045-180X	VARISTOR(ZNR)		1	
	VA628	NAF0044-270X	VARISTOR(ZNR)		1	
	VA629	NAF0044-270X	VARISTOR(ZNR)		1	
	VA630	NAF0044-270X	VARISTOR(ZNR)		1	
	VA631	NAF0044-270X	VARISTOR(ZNR)		1	
	VA632	NAF0044-270X	VARISTOR(ZNR)		1	
	VA633	NAF0044-270X	VARISTOR(ZNR)		1	
	VA638	NAF0044-270X	VARISTOR(ZNR)		1	
	VA639	NAF0044-270X	VARISTOR(ZNR)		1	
	VA641	NAF0044-270X	VARISTOR(ZNR)		1	
	VA643	NAF0044-270X	VARISTOR(ZNR)		1	
	VA644	NAF0044-270X	VARISTOR(ZNR)		1	
	VA645	NAF0044-270X	VARISTOR(ZNR)		1	
	VA701	NAF0045-180X	VARISTOR(ZNR)		1	E
	VA702	NAF0045-180X	VARISTOR(ZNR)		1	E
	VA703	NAF0045-180X	VARISTOR(ZNR)		1	E
	VA711	NAF0044-270X	VARISTOR(ZNR)		1	E
	VA712	NAF0044-270X	VARISTOR(ZNR)		1	E
	VA713	NAF0045-180X	VARISTOR(ZNR)		1	E
	VA761	NAF0045-180X	VARISTOR(ZNR)		1	A,D,G,H
	VA762	NAF0045-180X	VARISTOR(ZNR)		1	A,D,G,H
	VA771	NAF0045-180X	VARISTOR(ZNR)		1	A,D,G,H
	W400	QAM1427-001	CAR CABLE		1	
	X403	NAX1221-001X	CRYSTAL		1	
	X501	NAX1253-001X	CRYSTAL		1	
	X502	QAX0401-001	CRYSTAL	32.768KHz	1	
SUB PWB ASSY (LVA11269-xxA) <02>						
	IC41	BH7673G-W	IC		1	
	IC51	NJM2535V-X	IC		1	
	IC61	NJM2535V-X	IC		1	
	IC62	NJM2561F1	BIPOLAR IC		1	
	IC491	TC7SET08FU-J-X	IC(DIGITAL)		1	D,G,H
	Q11	LSCR523EBFS8	TRANSISTOR		1	
	Q12	LTA014YEB-X	DIGI TRANSISTOR		1	
	Q13	LSCR523EBFS8	TRANSISTOR		1	
	Q21	LTC024EEB-X	DIGI TRANSISTOR		1	
	D11	DA2J101	DIODE		1	
	D21	DA2J101	DIODE		1	
	C11	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	1	
	C21	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C41	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C42	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C43	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C44	CK730BU0J106M	C CAPACITOR	10uF 6.3V M	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-V40BTA	A	KW-V40BTE	B	KW-V40BTEE	C	KW-V40BTEU	D
KW-V40BTJ	E	KW-V40BTJW	F	KW-V40BTU	G	KW-V40BTUI	H

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C52	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C53	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C54	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C62	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C63	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C64	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C65	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C66	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C67	QETL1AM-477	E CAPACITOR	470uF 10V M	1	
	C112	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C113	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C122	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C123	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C124	CK730BU0J106M	C CAPACITOR	10uF 6.3V M	1	
	C401	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	D,G,H
	C412	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	D,G,H
	C413	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	D,G,H
	C414	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	D,G,H
	C491	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	D,G,H
	R11	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R12	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R13	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R14	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R15	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R16	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R21	RK73GB2A272J	MG RESISTOR	2.7kΩ 1/10W J	1	
	R22	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R31	RK73HH1J750D	MG RESISTOR	75Ω 1/16W D	1	
	R32	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R36	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R52	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	
	R61	RK73GH2A750D	MG RESISTOR	75Ω 1/10W D	1	
	R62	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	
	R112	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R113	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R114	RK73GB2A4R7J	MG RESISTOR	4.7Ω 1/10W J	1	
	R115	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R116	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R117	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R120	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R121	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R201	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R202	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R203	RK73GB2A620J	MG RESISTOR	62Ω 1/10W J	1	
	R204	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	1	
	R301	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R302	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R401	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	D,G,H
	R412	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	D,G,H
	R413	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	D,G,H
	R414	RK73GB2A4R7J	MG RESISTOR	4.7Ω 1/10W J	1	D,G,H
	R421	RK73HH1J750D	MG RESISTOR	75Ω 1/16W D	1	D,G,H
	R422	RK73HH1J750D	MG RESISTOR	75Ω 1/16W D	1	D,G,H
	R423	RK73HH1J750D	MG RESISTOR	75Ω 1/16W D	1	D,G,H
	R425	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	D,G,H
	R426	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	D,G,H
	R427	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	D,G,H
	R428	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	D,G,H
	R491	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	D,G,H
	R492	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	D,G,H
	R493	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	D,G,H
	R901	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R902	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	
	L41	LR73Z0AD4R7M	COIL	4.7uH	1	
	CN1	QGF0534F7-20X	CONNECTOR	FFC/FPC (1-20)	1	
	CN2	QGF0534F7-20X	CONNECTOR	FFC/FPC (1-20)	1	
	CN3	QGA2501C1-03	CONNECTOR	W-B (1-3)	1	
	CN301	QGA2001C1-02	CONNECTOR	W-B (1-2)	1	
	J31	QNN0011-002	PIN JACK		1	
	J101	QNS0291-001	3.5 JACK		1	
	J301	QNS0307-001	3.5 JACK		1	
	J401	QND0160-001	DIN CONNECTOR		1	D,G,H
	VA11	NAF0044-270X	VARIATOR(ZNR)		1	
	VA21	NAF0045-180X	VARIATOR(ZNR)		1	
	VA31	NAF0044-270X	VARIATOR(ZNR)		1	
	VA61	NAF0044-270X	VARIATOR(ZNR)		1	
	VA101	NAF0044-270X	VARIATOR(ZNR)		1	
	VA112	NAF0045-180X	VARIATOR(ZNR)		1	
	VA113	NAF0045-180X	VARIATOR(ZNR)		1	
	VA201	NAF0044-270X	VARIATOR(ZNR)		1	
	VA202	NAF0044-270X	VARIATOR(ZNR)		1	
	VA301	NAF0045-180X	VARIATOR(ZNR)		1	
	VA302	NAF0045-180X	VARIATOR(ZNR)		1	
	VA401	NAF0045-180X	VARIATOR(ZNR)		1	D,G,H
	VA412	NAF0045-180X	VARIATOR(ZNR)		1	D,G,H
	VA413	NAF0045-180X	VARIATOR(ZNR)		1	D,G,H
	VA414	NAF0045-180X	VARIATOR(ZNR)		1	D,G,H
	VA421	NAF0044-270X	VARIATOR(ZNR)		1	D,G,H
	VA422	NAF0044-270X	VARIATOR(ZNR)		1	D,G,H
	VA423	NAF0044-270X	VARIATOR(ZNR)		1	D,G,H

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-V40BTA	A	KW-V40BTE	B	KW-V40BTEE	C	KW-V40BTEU	D
KW-V40BTJ	E	KW-V40BTJW	F	KW-V40BTU	G	KW-V40BTUI	H

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	VA424	NAF0044-270X	VARISTOR(ZNR)		1	D,G,H
	VA491	NAF0045-180X	VARISTOR(ZNR)		1	D,G,H
	VA492	NAF0045-180X	VARISTOR(ZNR)		1	D,G,H
PANEL-A PWB ASSY (LVA11279-03A) <03>						
	IC401	MN103SH23	SVMCU IC		1	
	IC404	TC7SZ17FE-X	SV-MOS-IC		1	
	IC405	XC6213B122N-G	MOS IC		1	
	IC431	A3V28S40FTP-G6	IC		1	
	IC441	JVM684B	PROGRAMED IC	IC441 IC451 will need to be replaced in pairs.	1	
	IC451	JVM685B	PROGRAMED IC	IC441 IC451 will need to be replaced in pairs.	1	
	IC501	NJM2831F92-X	SV-ANALOGUE IC		1	
	IC511	NJM2904V-X	IC		1	
	Q4601	LSAR523UBFS8	TRANSISTOR		1	
	Q4611	LSAR523UBFS8	TRANSISTOR		1	
	Q4621	LSAR523UBFS8	TRANSISTOR		1	
	Q4631	LSAR523UBFS8	TRANSISTOR		1	
	Q5201	LTC014EEBFS8	DIGI TRANSISTOR		1	
	Q5202	LSCR523UBFS8	TRANSISTOR		1	
	Q5203	LSCR523UBFS8	TRANSISTOR		1	
	Q5301	LSAR523UBFS8	TRANSISTOR		1	
	Q5302	LSAR523UBFS8	TRANSISTOR		1	
	D5201	DA2J101	DIODE		1	
	D5202	DZ2J180M	Z DIODE		1	
	C4001	CC73HCH1H060D	C CAPACITOR	6pF 50V D	1	
	C4002	CC73HCH1H060D	C CAPACITOR	6pF 50V D	1	
	C4010	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4013	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4019	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4020	CK730AU0J105K	C CAPACITOR	1uF 6.3V K	1	
	C4028	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4038	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4039	CK730AU0J105K	C CAPACITOR	1uF 6.3V K	1	
	C4049	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4051	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4055	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4056	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C4057	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C4066	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4067	CK730AU0J105K	C CAPACITOR	1uF 6.3V K	1	
	C4069	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4074	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4075	CK730AU0J105K	C CAPACITOR	1uF 6.3V K	1	
	C4085	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4094	CK73HBB1C103K	C CAPACITOR	0.01uF 16V K	1	
	C4095	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4097	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4103	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4106	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4107	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4120	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4121	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4122	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4129	CC73GCH1H151J	C CAPACITOR	150pF 50V J	1	
	C4135	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4145	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4154	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C4155	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C4157	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4160	CC73HCH1H330J	C CAPACITOR	33pF 50V J	1	
	C4163	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4164	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4165	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4166	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4168	CK730BW0J226M	C CAPACITOR	22uF 6.3V M	1	
	C4169	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4171	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4172	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4173	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4176	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4177	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4178	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4182	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4183	CK730AU0J105K	C CAPACITOR	1uF 6.3V K	1	
	C4190	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4196	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4201	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4210	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4217	NCB20JK-475X	C CAPACITOR	4.7uF 6.3V K	1	
	C4218	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4301	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4303	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4309	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4314	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4327	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C4343	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4349	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4354	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C4408	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4409	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-V40BTA	A	KW-V40BTE	B	KW-V40BTEE	C	KW-V40BTEU	D
KW-V40BTJ	E	KW-V40BTJW	F	KW-V40BTU	G	KW-V40BTUI	H

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C4508	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4601	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4602	CC73HCH1H680J	C CAPACITOR	68pF 50V J	1	
	C4604	CC73HCH1H180J	C CAPACITOR	18pF 50V J	1	
	C4605	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C4614	CC73HCH1H560J	C CAPACITOR	56pF 50V J	1	
	C4615	CK730AU0J105K	C CAPACITOR	1uF 6.3V K	1	
	C4616	CK730AU0J105K	C CAPACITOR	1uF 6.3V K	1	
	C4624	CC73HCH1H560J	C CAPACITOR	56pF 50V J	1	
	C4625	CK730AU0J105K	C CAPACITOR	1uF 6.3V K	1	
	C4626	CK730AU0J105K	C CAPACITOR	1uF 6.3V K	1	
	C4634	CC73HCH1H560J	C CAPACITOR	56pF 50V J	1	
	C4635	CK730AU0J105K	C CAPACITOR	1uF 6.3V K	1	
	C4636	CK730AU0J105K	C CAPACITOR	1uF 6.3V K	1	
	C5001	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C5002	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C5003	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C5004	CK730BW1C106K	C CAPACITOR	10uF 16V K	1	
	C5005	CK730AU0J105K	C CAPACITOR	1uF 6.3V K	1	
	C5010	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C5011	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C5103	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C5201	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C5202	NCB21EK-105X	C CAPACITOR	1uF 25V K	1	
	C5203	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C5301	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C5302	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	R4001	RK73HB1J681J	MG RESISTOR	680Ω 1/16W J	1	
	R4002	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	
	R4030	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R4053	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R4054	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R4058	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R4060	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R4062	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R4063	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R4064	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R4065	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R4066	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R4067	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R4069	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R4070	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R4077	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R4078	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R4079	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R4083	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R4087	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R4091	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R4127	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R4128	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R4129	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R4130	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R4131	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R4132	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R4133	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R4136	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R4137	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R4138	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R4146	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R4157	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R4161	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R4164	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1	
	R4166	RK73HB1J2R2J	MG RESISTOR	2.2Ω 1/16W J	1	
	R4167	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R4402	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R4501	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R4502	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R4503	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R4516	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R4517	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R4601	RK73HB1J391J	MG RESISTOR	390Ω 1/16W J	1	
	R4606	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	1	
	R4608	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R4611	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R4613	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R4614	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R4615	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R4618	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R4621	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R4623	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R4624	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R4625	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R4628	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R4631	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R4633	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R4634	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R4635	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R4638	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R4640	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	1	
	R5001	RK73HH1J101D	MG RESISTOR	100Ω 1/16W D	1	
	R5002	RK73HH1J161D	MG RESISTOR	160Ω 1/16W D	1	
	R5003	RK73HH1J430D	MG RESISTOR	43Ω 1/16W D	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-V40BTA	A	KW-V40BTE	B	KW-V40BTEE	C	KW-V40BTEU	D
KW-V40BTJ	E	KW-V40BTJW	F	KW-V40BTU	G	KW-V40BTUI	H

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R5004	RK73HH1J360D	MG RESISTOR	36Ω 1/16W D	1	
	R5005	RK73HH1J101D	MG RESISTOR	100Ω 1/16W D	1	
	R5006	RK73HH1J161D	MG RESISTOR	160Ω 1/16W D	1	
	R5007	RK73HH1J101D	MG RESISTOR	100Ω 1/16W D	1	
	R5008	RK73HH1J360D	MG RESISTOR	36Ω 1/16W D	1	
	R5009	RK73HH1J430D	MG RESISTOR	43Ω 1/16W D	1	
	R5010	RK73HH1J161D	MG RESISTOR	160Ω 1/16W D	1	
	R5011	RK73HH1J620D	MG RESISTOR	62Ω 1/16W D	1	
	R5020	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5106	RK73HH1J822D	MG RESISTOR	8.2kΩ 1/16W D	1	
	R5107	RK73HH1J472D	MG RESISTOR	4.7kΩ 1/16W D	1	
	R5109	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	
	R5201	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R5203	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	1	
	R5204	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	1	
	R5205	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R5302	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5303	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1	
	R5304	RK73HH1J562D	MG RESISTOR	5.6kΩ 1/16W D	1	
	RA401	RK74HB1J680J	NET RESISTOR	68Ω 1/16W J	1	
	RA402	RK74HB1J680J	NET RESISTOR	68Ω 1/16W J	1	
	RA403	RK74HB1J680J	NET RESISTOR	68Ω 1/16W J	1	
	RA404	RK74HB1J680J	NET RESISTOR	68Ω 1/16W J	1	
	RA405	RK74HB1J680J	NET RESISTOR	68Ω 1/16W J	1	
	RA406	RK74HB1J680J	NET RESISTOR	68Ω 1/16W J	1	
	RA407	RK74HB1J680J	NET RESISTOR	68Ω 1/16W J	1	
	RA408	RK74HB1J680J	NET RESISTOR	68Ω 1/16W J	1	
	RA409	RK74HB1J680J	NET RESISTOR	68Ω 1/16W J	1	
	RA415	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	1	
	RA416	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	1	
	RA417	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	1	
	RA418	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	1	
	RA419	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	1	
	RA420	RK74HB1J330J	NET RESISTOR	33Ω 1/16W J	1	
	L4001	LR73Z0AD470M	COIL	47uH	1	
	L4601	NQLD8DJ-470X	COIL	47uH J	1	
	CN401	QGF0534F7-30X	CONNECTOR	FFC/FPC (1-30)	1	
	CN501	QGF0572F1-60X	CONNECTOR	FFC/FPC (1-60)	1	
	EP401	NNZ0129-001X	EARTH TERMINAL		1	
	X4001	NAX1038-001X	CRYSTAL		1	
PANEL-B PWB ASSY (LVA11291-02A) <04>						
△	IC351	CPI-210/BC-X	PHOTO TRANSISTOR		1	
	Q3501	2SC1623/5-6/-X	TRANSISTOR		1	
	Q6010	2SA1577/QR/	TRANSISTOR		1	
	Q6011	LTC014YEBFS8	DIGI TRANSISTOR		1	
	Q6041	LSCR523UBFS8	TRANSISTOR		1	
	Q6042	LSCR523UBFS8	TRANSISTOR		1	
	Q6043	LSCR523UBFS8	TRANSISTOR		1	
	Q6044	LSCR523UBFS8	TRANSISTOR		1	
	Q6045	LSCR523UBFS8	TRANSISTOR		1	
	Q6046	LSCR523UBFS8	TRANSISTOR		1	
	Q6047	LSCR523UBFS8	TRANSISTOR		1	
	Q6048	LSCR523UBFS8	TRANSISTOR		1	
	Q6201	LSCR523UBFS8	TRANSISTOR		1	
	Q6202	LSCR523UBFS8	TRANSISTOR		1	
	Q6203	LSCR523UBFS8	TRANSISTOR		1	
	Q6204	LSCR523UBFS8	TRANSISTOR		1	
	Q6205	LSCR523UBFS8	TRANSISTOR		1	
	Q6206	LSCR523UBFS8	TRANSISTOR		1	
	Q6207	LSCR523UBFS8	TRANSISTOR		1	
	Q6208	LSCR523UBFS8	TRANSISTOR		1	
	Q6301	LSCR523UBFS8	TRANSISTOR		1	
	Q6302	LSCR523UBFS8	TRANSISTOR		1	
	Q6303	LSCR523UBFS8	TRANSISTOR		1	
	Q6304	LSCR523UBFS8	TRANSISTOR		1	
	Q6305	LSCR523UBFS8	TRANSISTOR		1	
	Q6306	LSCR523UBFS8	TRANSISTOR		1	
	D6010	DA2J101	DIODE		1	
	D6101	DZ2J062M	Z DIODE		1	
	D6102	DZ2J062M	Z DIODE		1	
	D6103	DZ2J062M	Z DIODE		1	
	D6104	DZ2J062M	Z DIODE		1	
	C6015	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C6101	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	
	C6102	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	
	C6103	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	
	C6104	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	
	R3501	RK73GB2A751J	MG RESISTOR	750Ω 1/10W J	1	
	R3503	RK73HB1J393J	MG RESISTOR	39kΩ 1/16W J	1	
	R3504	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	
	R3505	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	
	R3507	RK73HB1J682J	MG RESISTOR	6.8kΩ 1/16W J	1	
	R3508	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R3509	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R3510	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R6010	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R6011	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	
	R6012	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	
	R6013	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R6017	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R6018	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-V40BTA	A	KW-V40BTE	B	KW-V40BTEE	C	KW-V40BTEU	D
KW-V40BTJ	E	KW-V40BTJW	F	KW-V40BTU	G	KW-V40BTUI	H

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R6019	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R6020	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R6021	RK73PB2H8R2J	MG RESISTOR	8.2Ω 1/2W J	1	
	R6022	RK73PB2H8R2J	MG RESISTOR	8.2Ω 1/2W J	1	
	R6023	RK73PB2H8R2J	MG RESISTOR	8.2Ω 1/2W J	1	
	R6024	RK73PB2H8R2J	MG RESISTOR	8.2Ω 1/2W J	1	
	R6025	RK73PB2H8R2J	MG RESISTOR	8.2Ω 1/2W J	1	
	R6026	RK73PB2H8R2J	MG RESISTOR	8.2Ω 1/2W J	1	
	R6027	RK73PB2H8R2J	MG RESISTOR	8.2Ω 1/2W J	1	
	R6028	RK73PB2H8R2J	MG RESISTOR	8.2Ω 1/2W J	1	
	R6041	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R6042	RK73HH1J241D	MG RESISTOR	240Ω 1/16W D	1	
	R6043	RK73HH1J241D	MG RESISTOR	240Ω 1/16W D	1	
	R6044	RK73HH1J241D	MG RESISTOR	240Ω 1/16W D	1	
	R6045	RK73HH1J241D	MG RESISTOR	240Ω 1/16W D	1	
	R6046	RK73HH1J241D	MG RESISTOR	240Ω 1/16W D	1	
	R6047	RK73HH1J241D	MG RESISTOR	240Ω 1/16W D	1	
	R6048	RK73HH1J241D	MG RESISTOR	240Ω 1/16W D	1	
	R6049	RK73HH1J241D	MG RESISTOR	240Ω 1/16W D	1	
	R6201	RK73HH1J241D	MG RESISTOR	240Ω 1/16W D	1	
	R6202	RK73HH1J241D	MG RESISTOR	240Ω 1/16W D	1	
	R6203	RK73HH1J241D	MG RESISTOR	240Ω 1/16W D	1	
	R6204	RK73HH1J241D	MG RESISTOR	240Ω 1/16W D	1	
	R6205	RK73HH1J241D	MG RESISTOR	240Ω 1/16W D	1	
	R6206	RK73HH1J241D	MG RESISTOR	240Ω 1/16W D	1	
	R6207	RK73HH1J241D	MG RESISTOR	240Ω 1/16W D	1	
	R6208	RK73HH1J241D	MG RESISTOR	240Ω 1/16W D	1	
	R6209	RK73HB1J121J	MG RESISTOR	120Ω 1/16W J	1	
	R6301	RK73HH1J561D	MG RESISTOR	560Ω 1/16W D	1	
	R6303	RK73HH1J222D	MG RESISTOR	2.2kΩ 1/16W D	1	
	R6305	RK73HH1J621D	MG RESISTOR	620Ω 1/16W D	1	
	R6307	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R6308	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R6309	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R6310	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R6311	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R6312	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R6321	RK73HH1J561D	MG RESISTOR	560Ω 1/16W D	1	
	R6323	RK73HH1J222D	MG RESISTOR	2.2kΩ 1/16W D	1	
	R6325	RK73HH1J621D	MG RESISTOR	620Ω 1/16W D	1	
	R6327	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R6328	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R6329	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R6330	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R6331	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R6332	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	RA601	RK74HB1J102J	NET RESISTOR	1kΩ 1/16W J	1	
	RA602	RK74HB1J102J	NET RESISTOR	1kΩ 1/16W J	1	
	RA603	RK74HB1J102J	NET RESISTOR	1kΩ 1/16W J	1	
	RA604	RK74HB1J102J	NET RESISTOR	1kΩ 1/16W J	1	
	L6001	LR73Z0AD470M	COIL	47uH	1	
	CN351	QGF0534F7-08X	CONNECTOR	FFC/FPC (1-8)	1	
	CN352	QGA1002F1-02X	CONNECTOR	W-B (1-2)	1	
	CN601	QGF0523F6-45W	CONNECTOR	FFC/FPC (1-45)	1	
	CN602	QGF0534F7-30X	CONNECTOR	FFC/FPC (1-30)	1	
	CN603	QGF1039F5-04X	CONNECTOR	FFC/FPC (1-4)	1	
	CN605	QGF0534F7-15X	CONNECTOR	FFC/FPC (1-15)	1	
	CN607	QGA1002F1-02X	CONNECTOR	W-B (1-2)	1	
	EP601	NNZ0129-001X	EARTH TERMINAL		1	
	S3501	NSW0225-001X	DETECT SWITCH		1	
	S3502	NSW0126-001X	DETECT SWITCH		1	

KEY PWB ASSY (LVA11274-01A) <05>

IC651	RS-771	IR DETECT UNIT		1	
D651	SMLP36RGB2W/JX	SV-DIODE		1	
D652	SMLP36RGB2W/JX	SV-DIODE		1	
D653	SMLP36RGB2W/JX	SV-DIODE		1	
D654	SMLP36RGB2W/JX	SV-DIODE		1	
D656	SMLP36RGB2W/JX	SV-DIODE		1	
D657	SMLP36RGB2W/JX	SV-DIODE		1	
D658	SMLP36RGB2W/JX	SV-DIODE		1	
D659	SMLP36RGB2W/JX	SV-DIODE		1	
C651	CK73GBB1C104K	C CAPACITOR	0.1uF 16V K	1	
C652	CK73GBB1C104K	C CAPACITOR	0.1uF 16V K	1	
C653	CK73GBB1C104K	C CAPACITOR	0.1uF 16V K	1	
C654	CK73GBB1C104K	C CAPACITOR	0.1uF 16V K	1	
C655	CK73GBB0J105K	C CAPACITOR	1uF 6.3V K	1	
R651	RK73GB2A182J	MG RESISTOR	1.8kΩ 1/10W J	1	
R652	RK73GB2A242J	MG RESISTOR	2.4kΩ 1/10W J	1	
R653	RK73GB2A302J	MG RESISTOR	3kΩ 1/10W J	1	
R654	RK73GB2A182J	MG RESISTOR	1.8kΩ 1/10W J	1	
R655	RK73GB2A242J	MG RESISTOR	2.4kΩ 1/10W J	1	
CN651	QGF0545F2-15X	CONNECTOR	FFC/FPC (1-15)	1	
S651	NSW0335-001X	TACT SWITCH		1	
S652	NSW0335-001X	TACT SWITCH		1	
S653	NSW0335-001X	TACT SWITCH		1	
S654	NSW0335-001X	TACT SWITCH		1	
S655	NSW0335-001X	TACT SWITCH		1	
S656	NSW0335-001X	TACT SWITCH		1	
S657	NSW0335-001X	TACT SWITCH		1	
S659	NSW0331-001X	TACT SWITCH		1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-V40BTA	A	KW-V40BTE	B	KW-V40BTEE	C	KW-V40BTEU	D
KW-V40BTJ	E	KW-V40BTJW	F	KW-V40BTU	G	KW-V40BTUI	H

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
BT PWB ASSY (LVA11275-02A) <06>						
	Q3001	LSCR523UBFS8	TRANSISTOR		1	
	D3001	DA204U-X	SI DIODE		1	
	D3002	DA204U-X	SI DIODE		1	
	D3003	DA204U-X	SI DIODE		1	
	D3004	DA2J101	DIODE		1	
	D3005	DA2J101	DIODE		1	
	D3006	DZ2J056M	Z DIODE		1	
	D3007	DA204U-X	SI DIODE		1	
	C3003	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C3004	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C3005	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C3006	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C3007	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C3008	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C3009	CK730BW0J226M	C CAPACITOR	22uF 6.3V M	1	
	C3010	CK730BW1C106K	C CAPACITOR	10uF 16V K	1	
	R3007	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R3010	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R3012	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R3013	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R3014	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	1	
	L3002	LR7320AD470M	COIL	47uH	1	
	A301	QAU0559-001	RF MODULE		1	
	CN301	QGA2001C1-02	CONNECTOR	W-B (1-2)	1	
	CN302	QGF0534F7-12X	CONNECTOR	FFC/FPC (1-12)	1	
DVD MECHA PWB ASSY (LVA11172-05A) IN DVD MECHA <20>						
	IC101	RT3CLLM-1/EF/	DUAL TRANSISTOR		1	
	IC102	RT3K11M-X	MOS FET ARRAY		1	
	IC201	AN41250A-X	IC		1	
	IC301	MN2DS0041MD	IC		1	
	IC381	JVM661D	PROGRAMED IC		1	
	IC391	M12L128168A6TG	IC		1	
	IC401	AK4387ET	ANALOG IC		1	
	IC551	MFI337S3959-X	IC		1	
	IC921	BD12KA5FP-X	IC		1	
	Q4	2SC1623/5-6/-X	TRANSISTOR		1	
	Q11	2SC1623/5-6/-X	TRANSISTOR		1	
	Q12	LTC044EEBFS8	DIGI TRANSISTOR		1	
	Q101	2SB1709-X	TRANSISTOR		1	
	Q102	2SB1709-X	TRANSISTOR		1	
	Q103	LSCR523EBFS8	TRANSISTOR		1	
	Q302	LTC044EEBFS8	DIGI TRANSISTOR		1	
	Q341	RT1N441U-1	DIGI TRANSISTOR		1	
	D6	TAN1102W-22-X	IR LED		1	
	D7	TAN1102W-22-X	IR LED		1	
	D9	PS1192HB-22-X	PHOTO TRANSISTOR		1	
	D11	PS1192HB-22-X	PHOTO TRANSISTOR		1	
	C101	CK730BW0J226M	C CAPACITOR	22uF 6.3V M	1	
	C102	CK730BY0J476M	C CAPACITOR	47uF 6.3V M	1	
	C103	CK730BY0J476M	C CAPACITOR	47uF 6.3V M	1	
	C105	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C106	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C107	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C109	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C110	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C111	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C112	CK730BW0J226M	C CAPACITOR	22uF 6.3V M	1	
	C113	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C114	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C121	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C122	CK73HBB1C333K	C CAPACITOR	0.033uF 16V K	1	
	C123	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C124	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C131	CK73HBB1H272K	C CAPACITOR	2700pF 50V K	1	
	C133	NCJA1AK-684W-A	C CAPACITOR	0.68uF 10V K	1	
	C134	NCJA1AK-684W-A	C CAPACITOR	0.68uF 10V K	1	
	C135	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C136	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C137	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C138	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C139	CC73HCH1H150J	C CAPACITOR	15pF 50V J	1	
	C151	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C170	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C201	CK730BW0J226M	C CAPACITOR	22uF 6.3V M	1	
	C202	CK730AX0J106K	C CAPACITOR	10uF 6.3V K	1	
	C203	CK730AX0J106K	C CAPACITOR	10uF 6.3V K	1	
	C204	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C205	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C206	CK730BU0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C207	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C208	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C241	CK73HBB1E153K	C CAPACITOR	0.015uF 25V K	1	
	C242	CK73HBB1E153K	C CAPACITOR	0.015uF 25V K	1	
	C243	CK73HBB1E223K	C CAPACITOR	0.022uF 25V K	1	
	C244	CK73HBB1E223K	C CAPACITOR	0.022uF 25V K	1	
	C251	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C261	CK73HBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C291	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C301	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-V40BTA	A	KW-V40BTE	B	KW-V40BTEE	C	KW-V40BTEU	D
KW-V40BTJ	E	KW-V40BTJW	F	KW-V40BTU	G	KW-V40BTUI	H

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C302	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C303	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C304	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C305	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C306	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C307	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C311	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C312	CK73GBB1H222K	C CAPACITOR	2200pF 50V K	1	
	C313	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	
	C314	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
	C315	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
	C316	CK730BS0J105K	C CAPACITOR	1uF 6.3V K	1	
	C317	CK730BS0J105K	C CAPACITOR	1uF 6.3V K	1	
	C318	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C319	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C320	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C322	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C324	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C325	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C326	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C327	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C329	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C330	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C331	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C332	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C333	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C351	CC73HCH1H120J	C CAPACITOR	12pF 50V J	1	
	C352	CC73HCH1H120J	C CAPACITOR	12pF 50V J	1	
	C382	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C391	CK730AX0J106K	C CAPACITOR	10uF 6.3V K	1	
	C392	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C396	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C398	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C401	CK730BY1A476K	C CAPACITOR	47uF 10V K	1	
	C402	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C403	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C404	NCB10JK-226X-R	C CAPACITOR	22uF 6.3V K	1	
	C405	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C406	CK73HBB1H331K	C CAPACITOR	330pF 50V K	1	
	C411	CK73HBB1C473K	C CAPACITOR	0.047uF 16V K	1	
	C412	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C511	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C701	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C702	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C703	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C704	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C705	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C901	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C911	CK730BY0J476M	C CAPACITOR	47uF 6.3V M	1	
	C912	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C913	CK730BW0J226M	C CAPACITOR	22uF 6.3V M	1	
	C914	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C921	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C923	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	R11	RK73GB2A112J	MG RESISTOR	1.1kΩ 1/10W J	1	
	R12	RK73HB1J184J	MG RESISTOR	180kΩ 1/16W J	1	
	R13	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R15	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1	
	R17	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R21	RK73GB2A112J	MG RESISTOR	1.1kΩ 1/10W J	1	
	R101	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R102	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R103	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R104	RK73HB1J2R2J	MG RESISTOR	2.2Ω 1/16W J	1	
	R111	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R112	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R113	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R114	RK73HB1J2R2J	MG RESISTOR	2.2Ω 1/16W J	1	
	R115	NR20122-180X	MG RESISTOR	18Ω	1	
	R116	RK73HB1J242J	MG RESISTOR	2.4kΩ 1/16W J	1	
	R117	RK73HB1J432J	MG RESISTOR	4.3kΩ 1/16W J	1	
	R121	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R122	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R123	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	
	R124	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R125	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R131	RK73HH1J122D	MG RESISTOR	1.2kΩ 1/16W D	1	
	R132	RK73HH1J122D	MG RESISTOR	1.2kΩ 1/16W D	1	
	R139	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R151	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R165	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R170	RK73HH1J332D	MG RESISTOR	3.3kΩ 1/16W D	1	
	R171	RK73HH1J162D	MG RESISTOR	1.6kΩ 1/16W D	1	
	R182	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R201	NR20098-R22X	MG RESISTOR	0.22Ω	1	
	R202	RK73EB2E301J	MG RESISTOR	300Ω 1/4W J	1	
	R204	RK73GB2A271J	MG RESISTOR	270Ω 1/10W J	1	
	R212	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	
	R213	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R231	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R232	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R233	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-V40BTA	A	KW-V40BTE	B	KW-V40BTEE	C	KW-V40BTEU	D
KW-V40BTJ	E	KW-V40BTJW	F	KW-V40BTU	G	KW-V40BTUI	H

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R241	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R242	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R243	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R244	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R251	RK73GH2A333D	MG RESISTOR	33kΩ 1/10W D	1	
	R252	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1	
	R261	RK73GH2A822D	MG RESISTOR	8.2Ω 1/10W D	1	
	R262	RK73GB2A242J	MG RESISTOR	2.4kΩ 1/10W J	1	
	R271	RK73HB1J163J	MG RESISTOR	16kΩ 1/16W J	1	
	R272	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R302	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R303	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R304	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R306	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	
	R307	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	
	R308	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	
	R309	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R310	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	1	
	R311	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R313	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R314	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R315	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R316	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R319	RK73GH2A243D	MG RESISTOR	24kΩ 1/10W D	1	
	R323	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	
	R327	RK73HB1J270J	MG RESISTOR	27Ω 1/16W J	1	
	R328	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R329	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R341	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R351	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	
	R352	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R365	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R376	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1	
	R386	RK73HB1J184J	MG RESISTOR	180kΩ 1/16W J	1	
	R400	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	
	R401	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R402	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	
	R403	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R511	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R512	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R515	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R601	RK73GH2A330D	MG RESISTOR	33Ω 1/10W D	1	
	R602	RK73GH2A330D	MG RESISTOR	33Ω 1/10W D	1	
	R611	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	
	R612	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	
	R702	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R911	NRZ0098-R18X	MG RESISTOR	0.18Ω	1	
	CN101	QGF0534F7-26X	CONNECTOR	FFC/FPC (1-26)	1	
	CN201	QGF0534F7-18X	CONNECTOR	FFC/FPC (1-18)	1	
	CN401	QGF0534F7-50X	CONNECTOR	FFC/FPC (1-50)	1	
	S1	NSW0351-001X	LEVER		1	
	TH491	NAD0055-103X	N THERMISTOR	10kΩ	1	
	W411	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	X351	NAX1135-001X	CRYSTAL		1	