


EXPLODED VIEW / PARTS LIST


Escutcheon section

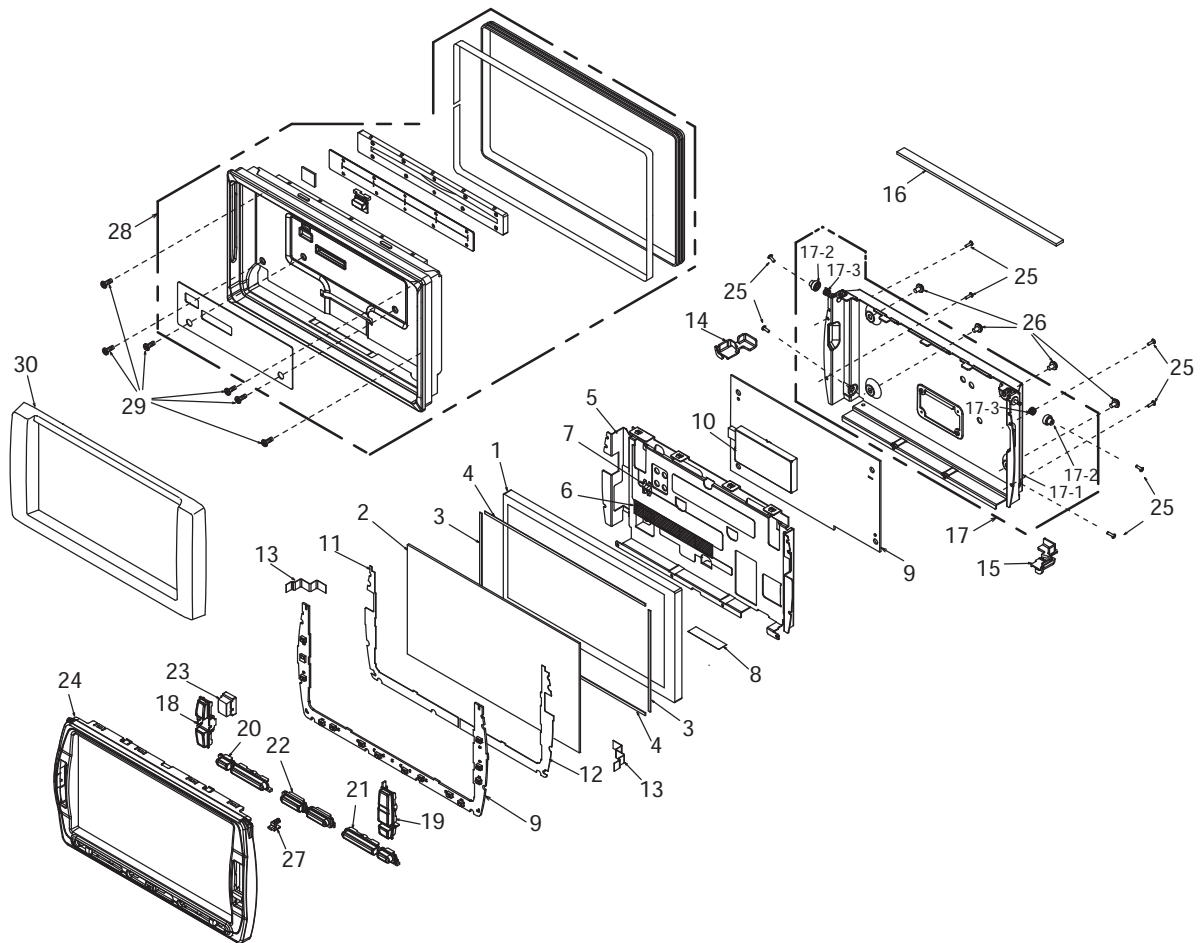

NO.	PART NO.	DESCRIPTION	Q'TY
1	379-0478-00	INDICATOR	1
2	013-9723-00	SWITCH	1
3	347-7038-00	SPACER	2
4	347-7423-00	SPACER	2
5	331-4626-00	LCD HOLDER	1
6	347-8574-00	DOUBLE FACE	1
7	331-3038-10	EARTH PLATE	1
8	347-8517-00	TP SHEET	1
9	-----	LCD PWB	1
10	331-3672-11	SHIELD CASE	1
11	347-8495-00	INSLATOR L	1
12	347-8496-00	INSLATOR R	1
13	816-3030-55	FLAT WIRE	2
14	335-8393-00	PROTECTOR-L	1
15	335-8394-00	PROTECTOR-R	1
16	345-5849-00	CUSHION RUBBER	1
17	948-0852-10	REAR-CVR-ASSY	1

NO.	PART NO.	DESCRIPTION	Q'TY
17-1	331-4627-10	REAR COVER	1
17-2	335-7306-00	ROLLER	2
17-3	750-6746-10	ROLLERSPRING	2
18	382-8845-10	BUTTON-L	1
19	382-8846-10	BUTTON-R	1
20	382-8847-10	BUTTON-UL	1
21	382-8848-10	BUTTON-UR	1
22	382-8849-10	BUTTON-UC	1
23	335-8392-10	IR-FILTER	1
24	370-6352-10	ESCUTCHEON	1
25	716-0872-52	PAD SCREW(M1.7x5)	8
26	716-1611-50	SPECIAL-SCREW(M2.6x4)	4
27	335-8689-00	INDICATOR	1
28	940-8230-10	INNER-ES-ASSY	1
29	780-2604-52	SPECIAL SCREW(M2.6x4)	6
30	347-8497-00	PROTECT PART	1

Main section

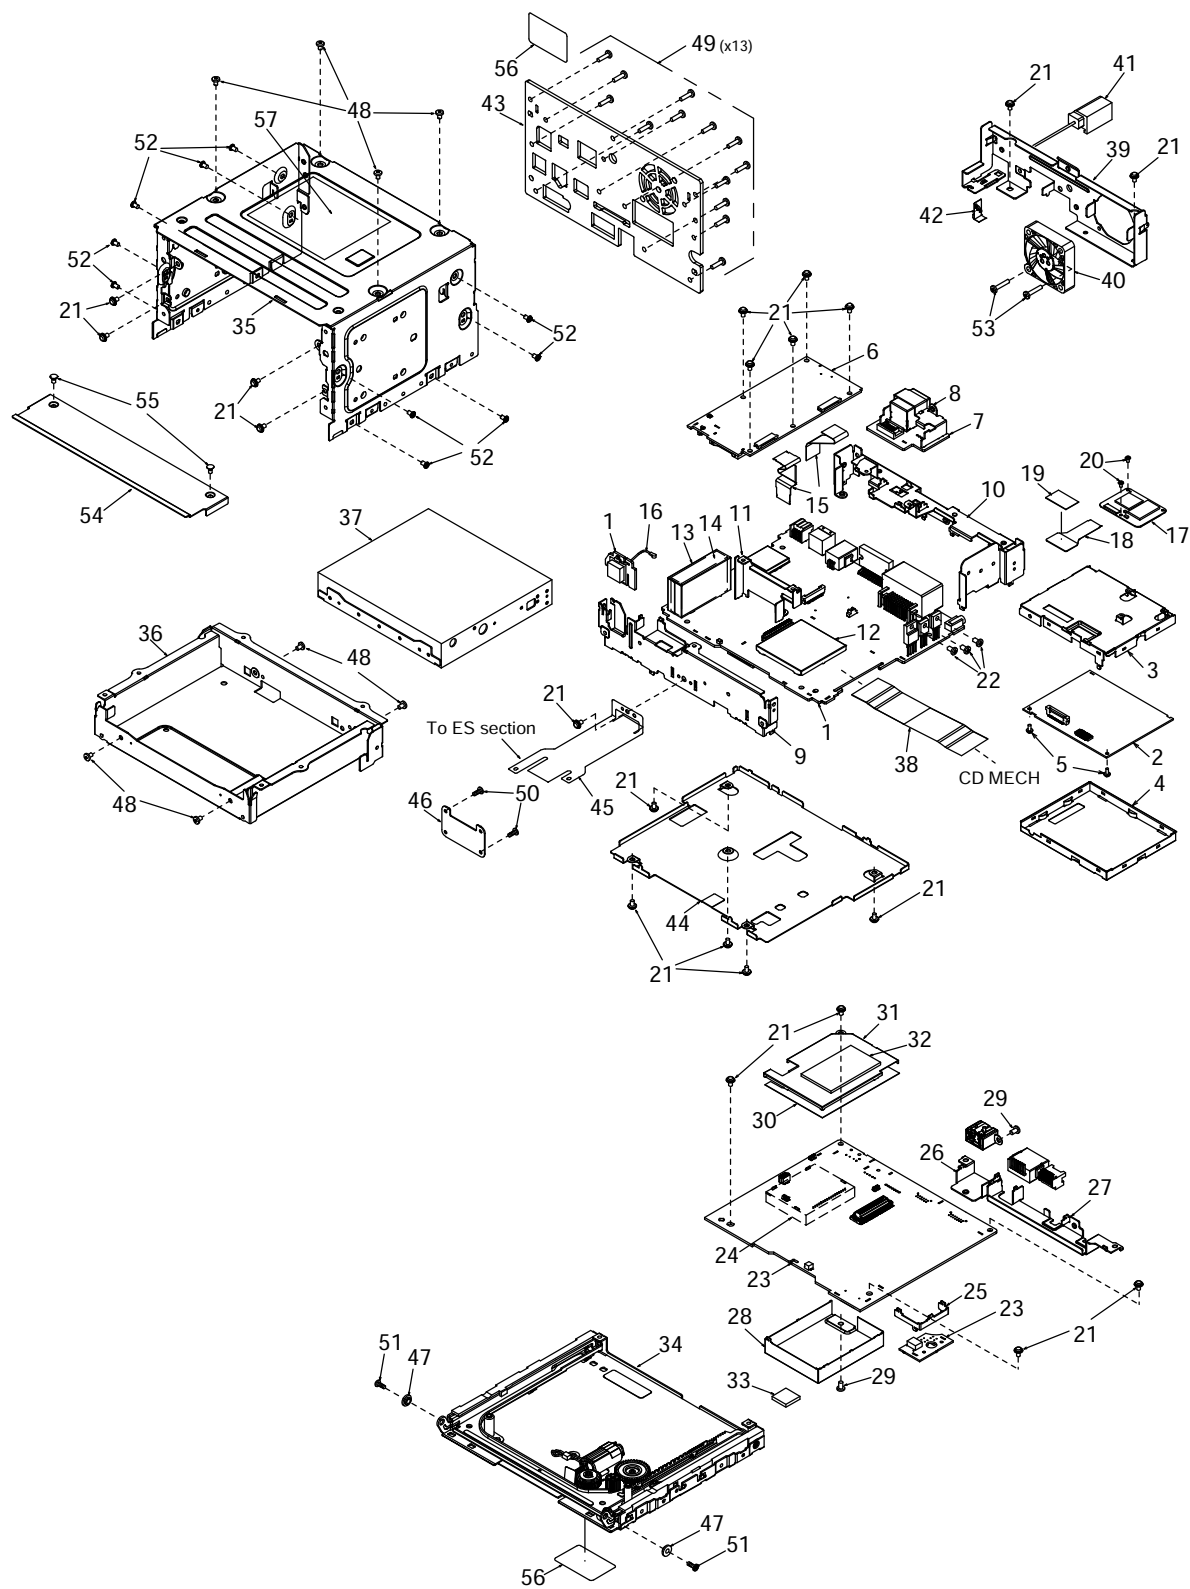

* Do not reuse the screw of SEALOCK.

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	BASE PWB	1	30	347-8761-00	INSULATOR	1
2	-----	CPU PWB	1	31	331-4872-00	SHIELD PLATE	1
3	310-1886-01	UPPER CASE	1	32	345-6408-00	CUSHION	1
4	311-1968-01	BOTTOM CASE	1	33	345-6409-00	RUBBER	1
5	782-2005-50	D-SEMS SCREW(M2x5)	2	34	932-0125-81	SLIDE MECH	1
6	-----	BT-SD-USB PWB ASSY	1	35	310-1885-01	UPPER CASE	1
7	-----	CONNECTOR PWB	1	36	331-4631-01	CD MECH BRKT	1
8	331-4855-00	CN-HOLDER-SENS	1	37	929-5035-80	CD-MECH-MODULE	1
9	331-4636-01	FRONT PLATE	1	38	816-3042-55	FLAT WIRE	1
10	331-4853-00	CN-HOLDER-BASE	1	39	331-4861-00	REAR PLATE	1
11	331-4638-00	PWB HOLDER-SD	1	40	020-3056-10	DC-MOTOR	1
12	331-4665-00	SHIELD CASE	1	41	092-2242-00	ANT-RECEPT	1
13	331-4830-00	SHIELD CASE	1	42	331-2978-00	EARTH PLATE	1
14	880-1431E	RDS-TUNER	1	43	313-2087-00	HEAT SINK	1
15	816-3044-55	FLAT WIRE	2	44	331-4633-01	SHIELD PLATE	1
16	092-2239-00	ANT-RECEPT	1	45	039-2336-10	FPC(PANEL+BL)	1
17	-----	SSD MODULE	1	46	039-1742-00	PWB	1
18	948-0828-10	FPC-ASSY	1	47	335-7903-00	BUSH	2
19	335-8406-00	SUPPORT PLATE	1	48	714-2603-8B	MACHINE SCREW(M2.6x3)	8
20	716-1757-01	SPECIAL SCREW(M1.7x3.5)	2	49	714-2610-8B	MACHINE SCREW(M2.6x10)	13
21	780-2604-50	IT SCREW(M2.6x4)	21	50	716-1851-02	SPECIAL SCREW	2
22	780-3005-01	SPECIAL-M-SCREW(M3x5)	3	51	716-3577-00	DECORATIVE SCREW	2
23	-----	TUNER PWB	1	52	780-2604-51	SPECIAL SCREW(M2.6x4)	10
24	880-2091S	TUNER	1	53	780-2614-50	SCREW(M2.6×14 SEALOCK)	2
25	331-4285-00	PWB HOLDER-SENS	1	54	331-4635-00	UPPER PLATE	1
26	331-4848-00	ANT-HOLDER-CE 2	1	55	714-2605-45	MACHINE SCREW(M2.6x5)	2
27	331-4847-00	CN-HOLDER-TU	1	56	347-7924-00	MASK PART	2
28	331-4873-00	SHIELD CASE	1	57	276-0665-00	SETPLATE	1
29	780-3005-01	SPECIAL-M-SCREW(M3x5)	2				

* It is necessary to record program to SSD(Solid State Disk) with special equipment when changed it.

ELECTRICAL PARTS LIST

CPU PWB(B1) section

Note) Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C101	045-1011-50	100pF CH	C232	046-1042-78	0.1uF	C609	168-1062-98	10uF K
C102	045-1011-50	100pF CH	C233	045-1011-50	100pF CH	C610	046-1042-78	0.1uF
C103	168-1052-78	16V 1uF K	C234	045-1011-50	100pF CH	C611	168-1062-98	10uF K
C104	042-1716-90	6.3V 100uF	C235	046-1042-78	0.1uF	C612	046-1042-78	0.1uF
C105	168-1052-78	16V 1uF K	C301	045-1011-50	100pF CH	C613	045-1011-50	100pF CH
C106	042-1716-90	6.3V 100uF	C302	168-1052-78	16V 1uF K	C614	045-1011-50	100pF CH
C107	046-1042-78	0.1uF	C303	042-1716-90	6.3V 100uF	C615	168-1062-98	10uF K
C108	045-1011-50	100pF CH	C304	168-1062-98	10uF K	C617	046-1042-78	0.1uF
C109	046-1042-78	0.1uF	C305	045-1011-50	100pF CH	C619	046-1042-78	0.1uF
C110	045-1011-50	100pF CH	C306	045-1011-50	100pF CH	C620	168-1062-98	10uF K
C111	046-1042-78	0.1uF	C307	046-1042-78	0.1uF	C621	168-1062-98	10uF K
C113	046-1042-78	0.1uF	C308	046-1042-78	0.1uF	C622	046-1042-78	0.1uF
C114	045-1011-50	100pF CH	C309	046-1042-78	0.1uF	C625	046-1042-78	0.1uF
C115	046-1042-78	0.1uF	C310	046-1042-78	0.1uF	C626	168-1062-98	10uF K
C116	045-1011-50	100pF CH	C311	045-1011-50	100pF CH	C627	168-1062-98	10uF K
C117	046-1042-78	0.1uF	C312	046-1042-78	0.1uF	C628	168-1062-98	10uF K
C118	046-1042-78	0.1uF	C313	045-1011-50	100pF CH	C701	046-1042-78	0.1uF
C119	046-1042-78	0.1uF	C314	046-1042-78	0.1uF	C702	042-1716-90	6.3V 100uF
C120	045-1011-50	100pF CH	C315	046-1042-78	0.1uF	C703	046-1042-78	0.1uF
C121	045-1011-50	100pF CH	C316	045-1011-50	100pF CH	C704	042-1716-90	6.3V 100uF
C122	045-1011-50	100pF CH	C318	046-1042-78	0.1uF	C705	046-1042-78	0.1uF
C125	046-1042-78	0.1uF	C319	045-1011-50	100pF CH	C706	043-0603-90	16V 10uF
C126	046-1042-78	0.1uF	C320	046-1042-78	0.1uF	C708	168-1062-98	10uF K
C127	046-1042-78	0.1uF	C321	045-1011-50	100pF CH	C709	045-1011-50	100pF CH
C128	045-1011-50	100pF CH	C322	168-1062-98	10uF K	C710	168-1052-78	16V 1uF K
C129	045-1011-50	100pF CH	C323	046-2732-78	0.027uF B	C711	042-1716-90	6.3V 100uF
C130	046-1042-78	0.1uF	C324	046-1022-58	1000pF B	C712	046-1042-78	0.1uF
C131	046-1042-78	0.1uF	C325	046-1022-58	1000pF B	C714	046-1042-78	0.1uF
C133	046-1042-78	0.1uF	C326	046-1042-78	0.1uF	C715	046-1022-58	1000pF B
C137	046-1042-78	0.1uF	C401	046-1042-78	0.1uF	C716	046-1042-78	0.1uF
C138	045-1011-50	100pF CH	C402	046-1042-78	0.1uF	C717	046-1032-78	0.01uF B
C139	046-1042-78	0.1uF	C403	042-1716-90	6.3V 100uF	C718	046-1032-78	0.01uF B
C140	045-1011-50	100pF CH	C404	046-2732-78	0.027uF B	C719	046-1042-78	0.1uF
C141	046-1042-78	0.1uF	C405	046-1042-78	0.1uF	C720	042-1716-90	6.3V 100uF
C142	046-1042-78	0.1uF	C406	045-1011-50	100pF CH	C730	045-1011-50	100pF CH
C143	046-1042-78	0.1uF	C407	168-1062-98	10uF K	C731	045-1011-50	100pF CH
C144	045-1011-50	100pF CH	C408	046-1042-78	0.1uF	C732	045-1011-50	100pF CH
C147	046-1042-78	0.1uF	C409	045-1011-50	100pF CH	CCT101	050-0140-52	1/32W 100 ohm x4J
C148	045-1011-50	100pF CH	C410	046-1042-78	0.1uF	CCT102	050-0140-52	1/32W 100 ohm x4J
C149	046-1042-78	0.1uF	C411	046-1022-58	1000pF B	CCT103	050-0140-69	1/32W 56 ohm x4J
C201	045-1011-50	100pF CH	C412	045-1011-50	100pF CH	CCT104	050-0140-69	1/32W 56 ohm x4J
C202	168-1052-78	16V 1uF K	C413	046-1042-78	0.1uF	CCT105	050-0140-52	1/32W 100 ohm x4J
C203	042-1716-90	6.3V 100uF	C414	046-1042-78	0.1uF	CCT106	050-0140-70	1/32W 10 ohm x4J
C204	046-1042-78	0.1uF	C415	045-1011-50	100pF CH	CCT107	050-0140-52	1/32W 100 ohm x4J
C205	045-1011-50	100pF CH	C416	168-1062-98	10uF K	CCT108	050-0140-52	1/32W 100 ohm x4J
C206	046-1042-78	0.1uF	C417	046-1042-78	0.1uF	CCT109	050-0140-69	1/32W 56 ohm x4J
C207	045-1011-50	100pF CH	C418	046-1042-78	0.1uF	CCT110	050-0140-69	1/32W 56 ohm x4J
C208	168-1062-98	10uF K	C419	046-1042-78	0.1uF	CCT112	050-0140-69	1/32W 56 ohm x4J
C209	168-1062-98	10uF K	C420	046-1042-78	0.1uF	CCT113	050-0140-69	1/32W 56 ohm x4J
C210	046-1042-78	0.1uF	C421	045-1011-50	100pF CH	CCT114	050-0140-52	1/32W 100 ohm x4J
C211	046-1042-78	0.1uF	C422	045-1011-50	100pF CH	CCT115	050-0140-69	1/32W 56 ohm x4J
C212	045-1011-50	100pF CH	C423	045-1011-50	100pF CH	CCT116	050-0140-69	1/32W 56 ohm x4J
C213	045-1011-50	100pF CH	C424	045-1011-50	100pF CH	CCT117	050-0140-69	1/32W 56 ohm x4J
C214	046-1042-78	0.1uF	C425	045-1011-50	100pF CH	CCT118	050-0140-69	1/32W 56 ohm x4J
C215	046-1042-78	0.1uF	C426	046-1042-78	0.1uF	CCT119	050-0140-52	1/32W 100 ohm x4J
C216	046-1042-78	0.1uF	C427	168-1062-98	10uF K	CCT120	050-0140-69	1/32W 56 ohm x4J
C217	045-1011-50	100pF CH	C428	045-1011-50	100pF CH	CCT121	050-0140-59	1/32W 33 ohm x4J
C218	045-1011-50	100pF CH	C440	168-1062-98	10uF K	CCT122	050-0140-59	1/32W 33 ohm x4J
C219	046-1042-78	0.1uF	C441	168-1062-98	10uF K	CCT123	050-0140-69	1/32W 56 ohm x4J
C220	046-1042-78	0.1uF	C442	168-1062-98	10uF K	CCT124	050-0140-69	1/32W 56 ohm x4J
C221	045-1011-50	100pF CH	C443	168-1062-98	10uF K	CCT125	050-0140-59	1/32W 33 ohm x4J
C222	046-1042-78	0.1uF	C444	168-1062-98	10uF K	CCT126	050-0140-59	1/32W 33 ohm x4J
C223	045-1011-50	100pF CH	C445	045-1011-50	100pF CH	CCT127	050-0140-69	1/32W 56 ohm x4J
C224	168-1062-98	10uF K	C524	045-1011-50	100pF CH	CCT128	050-0140-69	1/32W 56 ohm x4J
C225	168-1062-98	10uF K	C525	168-1062-98	10uF K	CCT129	050-0140-69	1/32W 56 ohm x4J
C226	046-1042-78	0.1uF	C603	043-0603-90	16V 10uF	CCT130	050-0140-69	1/32W 56 ohm x4J
C227	046-1042-78	0.1uF	C604	046-1042-78	0.1uF	CCT131	050-0140-69	1/32W 56 ohm x4J
C228	045-1011-50	100pF CH	C605	046-1042-78	0.1uF	CCT132	050-0140-69	1/32W 56 ohm x4J
C229	045-1011-50	100pF CH	C606	168-1062-98	10uF K	CCT133	050-0140-69	1/32W 56 ohm x4J
C230	046-1042-78	0.1uF	C607	168-1062-98	10uF K	CCT134	050-0140-57	1/32W 10k ohm x4J
C231	046-1042-78	0.1uF	C608	046-1042-78	0.1uF	CCT135	050-0140-57	1/32W 10k ohm x4J

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
CCT140	050-0140-63	1/32W 47k ohm x4J	L402	010-3124-92	1k ohm/100MHz	R113	033-5601-15	1/10W 56 ohm
CCT150	050-0140-57	1/32W 10k ohm x4J	L403	010-3124-92	1k ohm/100MHz	R114	033-1021-15	1/10W 1k ohm
CCT401	050-0140-68	1/32W 3.3k ohm x4J	L404	010-3124-92	1k ohm/100MHz	R116	033-5601-15	1/10W 56 ohm
CCT402	050-0140-57	1/32W 10k ohm x4J	L504	010-3124-92	1k ohm/100MHz	R117	033-5601-15	1/10W 56 ohm
CCT405	050-0140-69	1/32W 56 ohm x4J	L601	010-3132-90	600 ohm/100MHz	R118	033-5601-15	1/10W 56 ohm
CCT406	050-0140-75	1/32W 330 ohm X4j	L602	010-3132-90	600 ohm/100MHz	R119	033-1031-15	1/10W 10k ohm
CCT430	050-0140-75	1/32W 330 ohm X4j	L604	010-3127-91	220 ohm/100MHz	R120	033-5601-15	1/10W 56 ohm
CCT431	050-0140-75	1/32W 330 ohm X4j	L605	010-3127-91	220 ohm/100MHz	R122	033-2221-15	1/10W 2.2k ohm
CCT601	050-0140-59	1/32W 33 ohm x4J	L606	010-3124-92	1k ohm/100MHz	R123	033-2221-15	1/10W 2.2k ohm
CCT602	050-0140-63	1/32W 47k ohm x4J	L607	010-3127-91	220 ohm/100MHz	R124	033-1001-15	1/10W 10 ohm
CCT703	050-0140-57	1/32W 10k ohm x4J	L608	010-3127-91	220 ohm/100MHz	R126	033-5601-15	1/10W 56 ohm
CCT704	050-0140-57	1/32W 10k ohm x4J	L701	010-3127-91	220 ohm/100MHz	R127	033-1011-15	1/10W 100 ohm
CCT710	050-0140-57	1/32W 10k ohm x4J	L702	010-3127-91	220 ohm/100MHz	R129	033-1011-15	1/10W 100 ohm
CCT714	050-0140-67	1/32W 220 ohm x4J	L703	010-3127-91	220 ohm/100MHz	R131	033-5601-15	1/10W 56 ohm
CCT715	050-0140-57	1/32W 10k ohm x4J	L704	010-3127-91	220 ohm/100MHz	R137	033-1031-15	1/10W 10k ohm
CCT716	050-0140-52	1/32W 100 ohm x4J	L710	010-3304-90	1000ohm	R138	033-1031-15	1/10W 10k ohm
CCT721	050-0140-53	1/32W 0 ohm x4J			BK20104M102-T	R139	033-1031-15	1/10W 10k ohm
CCT722	050-0140-57	1/32W 10k ohm x4J	L712	010-3303-90	120ohm	R140	033-1011-15	1/10W 100 ohm
CCT723	050-0140-52	1/32W 100 ohm x4J			BK20104M121-T	R141	033-2201-15	1/10W 22 ohm
CCT725	050-0140-57	1/32W 10k ohm x4J	L720	010-3124-92	1k ohm/100MHz	R142	033-1031-15	1/10W 10k ohm
CCT730	050-0140-53	1/32W 0 ohm x4J	L721	010-3124-92	1k ohm/100MHz	R143	033-1031-15	1/10W 10k ohm
CCT750	050-0140-57	1/32W 10k ohm x4J	L729	010-3125-90	120ohm	R144	033-1011-15	1/10W 100 ohm
D601	001-4321-50	MALS068XUL			BK1005HM121-T	R145	033-1031-15	1/10W 10k ohm
D602	001-4321-50	MALS068XUL	L731	010-3127-91	220 ohm/100MHz	R301	033-5601-15	1/10W 56 ohm
D701	001-2630-90	1SS420-TPL3,F	L739	010-3304-90	1000ohm	R302	033-3301-15	1/10W 33 ohm
IC101	-----	R5S77641P300BG (BGA 042700-052)	L740	010-3304-90	1000ohm	R311	033-4731-15	1/10W 47k ohm
IC102	051-7521-38	TC7WZ74FU			BK20104M102-T	R312	033-1011-15	1/10W 100 ohm
IC104	051-7524-38	TC7SZ08FU-TE85L	L742	010-3304-90	1000ohm	R315	033-1031-15	1/10W 10k ohm
IC201	051-9329-20	MT48LC16M16A2TG-75	L743	010-3304-90	1000ohm	R316	033-4731-15	1/10W 47k ohm
	051-9329-63	K4S561632J-UC75			BK20104M102-T	R317	033-0000-05	1/10W 0 ohm
IC202	051-9329-20	MT48LC16M16A2TG-75	L745	010-3304-90	1000ohm	R321	033-0000-05	1/10W 0 ohm
	051-9329-63	K4S561632J-UC75	L747	010-3125-90	120ohm	R401	119-8201-15	1/10W 82 ohm
IC203	051-9329-20	MT48LC16M16A2TG-75			BK20104M102-T	R403	119-8201-15	1/10W 82 ohm
	051-9329-63	K4S561632J-UC75	L748	010-3304-90	1000ohm	R405	033-1011-15	1/10W 100 ohm
IC204	051-9329-20	MT48LC16M16A2TG-75			BK1005HM121-T	R406	033-1011-15	1/10W 100 ohm
	051-9329-63	K4S561632J-UC75	L749	010-3304-90	1000ohm	R407	033-1031-15	1/10W 10k ohm
IC301	051-7226-18	TC7SZ00FU-TE85L			BK20104M102-T	R408	033-1011-15	1/10W 100 ohm
IC302	051-9125-30	IS62WV25616BLL-55TL1	L750	010-3124-92	1k ohm/100MHz	R409	033-1031-15	1/10W 10k ohm
	051-9125-72	R1LV0416DSB-7LI	L751	010-3124-92	1k ohm/100MHz	R410	033-1011-15	1/10W 100 ohm
IC303	-----	SN74LVCHR16245AZQLR (BGA 750328-051)	L752	010-3304-90	1000ohm	R412	033-1031-15	1/10W 10k ohm
IC304	-----	SST39VF3201 (BGA 982200-051)	L753	010-3304-90	1000ohm	R413	033-5601-15	1/10W 56 ohm
IC305	051-7534-90	SN74LVC1G97DCKR			BK20104M102-T	R414	119-1511-15	1/10W 150 ohm
IC306	-----	SN74LVCHR16245AZQLR (BGA 750328-051)	L754	010-3304-90	1000ohm	R416	033-5601-15	1/10W 56 ohm
IC307	051-5464-90	R3112N251A-TR-F	L755	010-3303-90	120ohm	R417	033-0000-05	1/10W 0 ohm
IC308	051-7553-90	TC7PA175FU			BK20104M121-T	R419	033-1031-15	1/10W 10k ohm
IC401	-----	uPD65946FI-Y40-ENL-A (BGA 684000-051)	L757	010-3127-91	220 ohm/100MHz	R420	033-0000-05	1/10W 0 ohm
			L758	010-3125-90	120ohm	R422	119-3301-15	1/10W 33 ohm
IC402	051-5408-38	R3112N211A-TR			BK1005HM121-T	R424	033-1011-15	1/10W 100 ohm
IC601	051-6736-90	WM8728EDS/R	L761	010-3125-90	120ohm	R425	033-1031-15	1/10W 10k ohm
IC602	051-6429-00	CXA2106R	L762	010-3125-90	120ohm	R427	033-3311-15	1/10W 330 ohm
IC603	051-6464-90	ICS1526GILF			BK1005HM121-T	R429	033-3301-15	1/10W 33 ohm
IC606	051-7550-90	SN74LVC1G57DCKR	L765	010-3124-92	1k ohm/100MHz	R432	033-1031-15	1/10W 10k ohm
IC701	051-7524-38	TC7SZ08FU-TE85L	Q302	198-3018-00	2SK3018	R433	033-1031-15	1/10W 10k ohm
J701	074-3029-00	100P	Q601	192-4081-00	2SC4081	R434	033-1011-15	1/10W 100 ohm
J704	074-2234-24	24P	Q602	125-0021-91	DTA114EUA	R435	119-1511-15	1/10W 150 ohm
J705	074-3022-90	40P	Q603	193-2114-00	2SD2114K	R437	033-1011-15	1/10W 100 ohm
L101	010-3127-91	220 ohm/100MHz	Q701	125-9027-90	UPA1981TE	R438	033-1031-15	1/10W 10k ohm
L102	010-3127-91	220 ohm/100MHz	R101	033-1001-15	1/10W 10 ohm	R439	032-0221-58	1/16W 1.6k ohm F
L103	010-3132-90	600 ohm/100MHz	R102	033-1011-15	1/10W 100 ohm	R441	032-0221-60	1/16W 3.9k ohm F
L201	010-3127-91	220 ohm/100MHz	R103	033-1031-15	1/10W 10k ohm	R442	033-3311-15	1/10W 330 ohm
L301	010-3127-91	220 ohm/100MHz	R104	032-0140-57	1/10W 5.6k ohm F	R443	033-1011-15	1/10W 100 ohm
L302	010-3127-91	220 ohm/100MHz	R105	033-2211-15	1/10W 220 ohm	R444	033-1011-15	1/10W 100 ohm
L303	010-3127-91	220 ohm/100MHz	R106	033-1011-15	1/10W 100 ohm	R451	033-1031-15	1/10W 10k ohm
L401	010-3127-91	220 ohm/100MHz	R107	033-1031-15	1/10W 10k ohm	R540	119-5601-15	1/10W 56 ohm
			R110	033-1031-15	1/10W 10k ohm	R601	033-1031-15	1/10W 10k ohm
			R111	033-1001-15	1/10W 10 ohm	R602	032-0150-66	1/16W 75 ohm F
						R603	032-0150-66	1/16W 75 ohm F
						R604	032-0150-66	1/16W 75 ohm F
						R606	033-1011-15	1/10W 100 ohm
						R607	033-2221-15	1/10W 2.2k ohm
						R608	033-1011-15	1/10W 100 ohm
						R609	033-3311-15	1/10W 330 ohm
						R610	033-4731-15	1/10W 47k ohm
						R611	033-1011-15	1/10W 100 ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R613	033-3311-15	1/10W 330 ohm	R719	033-1011-15	1/10W 100 ohm	R747	033-1011-15	1/10W 100 ohm
R614	033-3311-15	1/10W 330 ohm	R723	033-4731-15	1/10W 47k ohm	R748	033-1011-15	1/10W 100 ohm
R615	033-1021-15	1/10W 1k ohm	R724	033-1031-15	1/10W 10k ohm	R751	033-1031-15	1/10W 10k ohm
R616	033-1031-15	1/10W 10k ohm	R725	033-1031-15	1/10W 10k ohm	R752	033-0000-05	1/10W 0 ohm
R617	033-1031-15	1/10W 10k ohm	R726	033-1031-15	1/10W 10k ohm	R755	033-1031-15	1/10W 10k ohm
R618	033-3301-15	1/10W 33 ohm	R727	033-1031-15	1/10W 10k ohm	TM703	073-0785-90	TERMINAL
R619	033-3301-15	1/10W 33 ohm	R731	033-1011-15	1/10W 100 ohm	TM704	073-0785-90	TERMINAL
R620	119-0000-05	1/10W 0 ohm JW	R738	033-1031-15	1/10W 10k ohm	X401	061-4552-90	NZ2520SB-48MHz
R701	033-0000-05	1/10W 0 ohm	R739	033-1031-15	1/10W 10k ohm	X402	061-4559-90	9.5979MHz
R702	033-3311-15	1/10W 330 ohm	R740	033-5621-15	1/10W 5.6k ohm	X403	061-4558-90	7.3728MHz
R703	033-1011-15	1/10W 100 ohm	R741	033-1031-15	1/10W 10k ohm	X501	061-4550-90	16.92MHz
R704	033-0000-05	1/10W 0 ohm	R742	033-1031-15	1/10W 10k ohm	PWB	039-3460-00	PWB(WITHOUT COMPONENTS)
R705	033-0000-05	1/10W 0 ohm	R743	033-1031-15	1/10W 10k ohm			
R715	033-1011-15	1/10W 100 ohm	R745	033-4721-15	1/10W 4.7k ohm			
R718	033-1011-15	1/10W 100 ohm	R746	033-4721-15	1/10W 4.7k ohm			

BASE PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT301	092-2203-00	ANT-RECEPT	C265	046-1042-78	0.1uF	C418	046-1032-78	0.01uF B
ANT1000	092-2203-00	ANT-RECEPT	C266	046-1042-78	0.1uF	C419	046-1022-58	1000pF B
ANT1001	060-8092-50	CHIP-ANT	C269	046-1042-78	0.1uF	C420	165-1073-35	16V 100uF
		CABPB1240A	C271	046-1042-78	0.1uF	C421	046-1032-78	0.01uF B
		2.4GHz	C287	043-0603-90	16V 10uF	C423	043-0603-90	16V 10uF
BL401	880-1431E	TUNER-PACK	C290	043-0603-90	16V 10uF	C424	046-1042-78	0.1uF
C101	042-6301-90	6.3V 47uF	C292	046-1042-78	0.1uF	C425	046-1042-78	0.1uF
C102	043-0603-90	16V 10uF	C293	043-0559-90	6.3V 22uF	C426	043-0603-90	16V 10uF
C103	168-1232-55	0.012uF K	C294	046-1042-78	0.1uF	C427	046-6812-58	680pF B
C104	046-1032-78	0.01uF B	C296	168-1042-78	16V 0.1uF K	C428	046-8212-38	820pF B
C105	046-1042-78	0.1uF	C301	168-4745-79	0.47uF Z	C429	046-1032-78	0.01uF B
C106	046-1042-78	0.1uF	C302	046-1042-78	0.1uF	C430	043-0603-90	16V 10uF
C107	046-1042-78	0.1uF	C303	043-0563-90	16V 47uF	C431	046-2232-78	0.022uF B
C108	046-1042-78	0.1uF	C304	046-1042-78	0.1uF	C432	046-1032-78	0.01uF B
C109	046-1042-78	0.1uF	C305	046-1042-78	0.1uF	C433	046-1032-78	0.01uF B
C113	046-1042-78	0.1uF	C308	046-5612-58	560pF B	C434	046-1042-78	0.1uF
C114	046-1042-78	0.1uF	C309	046-1042-78	0.1uF	C435	045-4701-50	47pF CH
C115	046-1042-78	0.1uF	C310	046-1042-78	0.1uF	C436	045-5601-50	56pF CH
C117	046-1042-78	0.1uF	C311	046-1032-78	0.01uF B	C437	046-1042-78	0.1uF
C118	046-1042-78	0.1uF	C312	046-1032-78	0.01uF B	C438	045-1011-50	100pF CH
C120	042-6301-90	6.3V 47uF	C314	046-1032-78	0.01uF B	C439	046-1042-78	0.1uF
C200	046-4722-58	4700pF B	C315	046-1032-78	0.01uF B	C440	046-2232-78	0.022uF B
C201	165-1073-35	16V 100uF	C316	168-1042-78	16V 0.1uF K	C441	046-1042-78	0.1uF
C207	043-0603-90	16V 10uF	C317	043-0559-90	6.3V 22uF	C442	165-4763-15	6.3V 47uF
C214	046-1042-78	0.1uF	C318	046-1042-78	0.1uF	C444	046-5612-58	560pF B
C215	043-0603-90	16V 10uF	C319	045-1011-50	100pF CH	C445	046-1032-78	0.01uF B
C216	043-0603-90	16V 10uF	C320	166-1011-50	100pF CH	C446	045-3311-50	330pF CH
C217	045-2211-50	220P	C321	168-1042-78	16V 0.1uF K	C447	043-0548-50	10V 2.2uF
C218	043-0603-90	16V 10uF	C322	168-1042-78	16V 0.1uF K	C448	045-1011-50	100pF CH
C219	043-0603-90	16V 10uF	C323	043-0603-90	16V 10uF	C449	043-0603-90	16V 10uF
C220	046-1042-78	0.1uF	C324	045-1011-50	100pF CH	C450	043-0603-90	16V 10uF
C224	168-1042-78	16V 0.1uF K	C325	046-1042-78	0.1uF	C451	168-1052-78	16V 1uF K
C228	046-1042-78	0.1uF	C326	046-1042-78	0.1uF	C454	043-0603-90	16V 10uF
C230	043-0603-90	16V 10uF	C327	168-1052-78	16V 1uF K	C465	046-1042-78	0.1uF
C231	043-0603-90	16V 10uF	C329	046-1042-78	0.1uF	C468	043-0603-90	16V 10uF
C232	043-0603-90	16V 10uF	C330	043-0603-90	16V 10uF	C471	045-2211-50	220P
C233	043-0603-90	16V 10uF	C331	168-1052-78	16V 1uF K	C473	168-1042-78	16V 0.1uF K
C234	043-0603-90	16V 10uF	C332	168-1052-78	16V 1uF K	C475	043-0603-90	16V 10uF
C237	046-4722-58	4700pF B	C401	166-1801-50	18pF CH	C476	168-1032-55	0.01uF K
C238	046-4722-58	4700pF B	C402	046-1042-78	0.1uF	C477	166-1011-50	100pF CH
C239	046-4722-58	4700pF B	C403	045-1011-50	100pF CH	C478	043-0603-90	16V 10uF
C240	045-2211-50	220P	C404	046-1042-78	0.1uF	C499	043-0559-90	16V 22uF
C241	043-0603-90	16V 10uF	C405	045-1011-50	100pF CH	C501	046-1042-78	0.1uF
C245	045-2211-50	220P	C406	046-1032-78	0.01uF B	C502	046-1042-78	0.1uF
C246	045-2211-50	220P	C408	046-1042-78	0.1uF	C507	166-2211-50	220pF CH
C247	046-1032-78	0.01uF B	C409	045-1011-50	100pF CH	C508	166-2211-50	220pF CH
C248	043-0603-90	16V 10uF	C410	046-1042-78	0.1uF	C509	166-2211-50	220pF CH
C252	045-2211-50	220P	C411	046-1042-78	0.1uF	C512	043-0603-90	16V 10uF
C253	046-1032-78	0.01uF B	C412	046-1022-58	1000pF B	C513	168-1052-78	16V 1uF K
C254	045-2211-50	220P	C413	045-1011-50	100pF CH	C516	046-1042-78	0.1uF
C255	045-2211-50	220P	C414	046-1042-78	0.1uF	C556	046-1042-78	0.1uF
C256	045-2211-50	220P	C415	045-1011-50	100pF CH	C557	046-1042-78	0.1uF
C257	046-1022-58	1000pF B	C416	045-1011-50	100pF CH	C601	046-1042-78	0.1uF
C258	046-1022-58	1000pF B	C417	046-1042-78	0.1uF	C603	046-1042-78	0.1uF

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C604	168-1042-78	16V 0.1uF K	C931	046-1022-58	1000pF B	D702	001-1324-90	MA2S111
C605	046-1042-78	0.1uF	C932	168-1052-78	16V 1uF K	D703	001-1324-90	MA2S111
C606	046-1042-78	0.1uF	C933	043-0563-90	16V 47uF	D704	001-0529-36	MA8062-H
C607	042-6300-90	6.3V 220uF	C934	043-0563-90	16V 47uF	D801	001-4100-50	PTZ TE25 9.1B
C608	042-6300-90	6.3V 220uF	C935	165-1053-65	50V 1uF	D803	001-1324-90	MA2S111
C609	042-6300-90	6.3V 220uF	C936	043-0604-90	25V 10uF B	D901	001-2629-90	D1FM3-5063
C610	046-1042-78	0.1uF	C937	043-0563-90	16V 47uF	D902	001-2629-90	D1FM3-5063
C701	043-0603-90	16V 10uF	C938	043-0603-90	16V 10uF	D903	001-2630-90	1SS420-TPL3,F
C702	043-0603-90	16V 10uF	C939	042-4009-90	16V 680uF	D904	001-2630-90	1SS420-TPL3,F
C703	046-1042-78	0.1uF	C940	046-3332-78	0.033uF B	D905	001-2629-90	D1FM3-5063
C704	042-6302-90	6.3V 10uF M	C941	043-0603-90	16V 10uF	D906	001-4310-01	RLZ TE-11 10B
C705	046-1042-78	0.1uF	C942	043-0499-51	50V 0.1uF J	D907	001-1324-90	MA2S111
C706	043-0605-90	10V 2.2uF	C943	043-0603-90	16V 10uF	D908	001-2629-90	D1FM3-5063
C707	046-1042-78	0.1uF	C944	042-1717-00	16V 3300uF	D910	001-2630-90	1SS420-TPL3,F
C708	046-1042-78	0.1uF	C945	046-1042-78	0.1uF	D911	001-1324-90	MA2S111
C709	165-1073-35	16V 100uF	C946	042-1717-00	16V 3300uF	D912	001-4100-50	PTZ TE25 9.1B
C710	043-0603-90	16V 10uF	C947	178-3342-78	0.33uF	D913	001-4912-90	SM5S22A-HE3/2D
C711	042-6302-90	6.3V 10uF M	C948	168-1052-78	16V 1uF K	D914	001-2403-90	M1F60
C712	043-0603-90	16V 10uF	C949	166-3321-50	3300pFJ CH	D915	001-1324-90	MA2S111
C713	042-6302-90	6.3V 10uF M	C950	046-1042-78	0.1uF	D916	001-2630-90	1SS420-TPL3,F
C714	046-1042-78	0.1uF	C951	046-1042-78	0.1uF	D917	001-2630-90	1SS420-TPL3,F
C715	046-1042-78	0.1uF	C952	043-0559-90	6.3V 22uF	D918	001-2630-90	1SS420-TPL3,F
C716	046-1042-78	0.1uF	C954	166-1221-50	1200pF CH	D919	001-1324-90	MA2S111
C717	165-1073-35	16V 100uF	C955	166-2221-50	2200pF CH	D920	001-1324-90	MA2S111
C718	046-1042-78	0.1uF	C956	166-2221-50	2200pF CH	D921	001-2412-90	RR264M-400
C719	046-1042-78	0.1uF	C957	165-1063-35	16V 10uF	FIL301	060-3117-51	CKD510JB1E223ST
C720	046-1042-78	0.1uF	C958	166-2221-50	2200pF CH	FIL302	060-3117-51	CKD510JB1E223ST
C721	046-1032-78	0.01uF B	C959	166-2221-50	2200pF CH	FIL501	060-3115-52	CKD310JB1C474ST
C722	045-1011-50	100pF CH	C960	168-1042-78	16V 0.1uF K	FIL601	060-3114-52	LFA20-2A1
C724	046-1042-78	0.1uF	C961	165-4763-35	16V 47uF	FIL602	060-3114-52	LFA20-2A1
C726	168-1022-55	1000pF K	C962	166-2221-50	2200pF CH	FIL603	060-3114-52	LFA20-2A1
C727	043-0566-90	50V 2.2uF K	C963	166-2221-50	2200pF CH	IC101	051-5417-38	R3112N271A-TR-FA
C728	043-0603-90	16V 10uF	C964	043-0603-90	16V 10uF	IC102	052-0327-00	M30878FJBG
C729	168-1022-55	1000pF K	C965	046-1022-58	1000pF B	IC105	051-9402-78	BR93L56RFVM-W
C730	043-0603-90	16V 10uF	C966	043-0603-90	16V 10uF	IC106	051-7537-80	TC7SZ14FU-TH85L
C731	165-4763-35	16V 47uF	C967	166-2221-50	2200pF CH	IC107	051-7537-80	TC7SZ14FU-TH85L
C732	046-1042-78	0.1uF	C968	166-2221-50	2200pF CH	IC108	051-7537-80	TC7SZ14FU-TH85L
C739	046-1042-78	0.1uF	C969	043-0603-90	16V 10uF	IC109	051-7537-80	TC7SZ14FU-TH85L
C740	046-1042-78	0.1uF	C970	043-0603-90	16V 10uF	IC110	051-5465-90	R3111Q211B-TR-F
C741	046-1022-58	1000pF B	C971	165-1063-35	16V 10uF	IC111	051-5465-90	R3111Q211B-TR-F
C742	046-1042-78	0.1uF	C972	168-1052-78	16V 1uF K	IC112	051-5465-90	R3111Q211B-TR-F
C801	165-4763-35	16V 47uF	C973	043-0603-90	16V 10uF	IC204	051-3034-90	NJM4558V
C802	043-0603-90	16V 10uF	C975	042-0650-01	5.5V 0.22F	IC205	051-3026-90	NJM4580V
C803	043-0603-90	16V 10uF	C976	046-3332-78	0.033uF B	IC206	051-3026-90	NJM4580V
C804	042-1716-90	6.3V 100uF	C977	168-1022-55	1000pF K	IC207	051-3034-90	NJM4558V
C901	168-1042-78	16V 0.1uF K	C978	168-2242-58	0.22uF K	IC208	051-3034-90	NJM4558V
C902	168-1042-78	16V 0.1uF K	C979	165-2253-65	50V 2.2uF	IC301	051-6923-58	ADC121S021CIMFX
C903	168-2242-58	0.22uF K	C980	178-4745-56	0.47uF	IC302	051-3407-90	TA75S393F
C904	168-2242-58	0.22uF K	C981	166-2221-50	2200pF CH	IC303	051-7531-90	SN74LV4052APWR
C905	168-2242-58	0.22uF K	C982	043-0566-90	50V 2.2uF K	IC304	051-7245-08	TC7WH123FU-TE12L
C906	168-2242-58	0.22uF K	C983	043-0566-90	50V 2.2uF K	IC305	051-7281-38	TC7SH14FUTE85L,F
C907	043-0605-90	10V 2.2uF	CCT501	050-0145-52	1/16W 1k ohm x4	IC306	948-0683-11	EWTS86KA11
C908	043-0605-90	10V 2.2uF	CCT801	050-0140-54	1/32W 1k ohm x4J	IC307	060-8099-00	CCA-510NA
C909	042-1726-90	6.3V 100uF	D101	001-1324-90	MA2S111	IC401	052-7086-20	M30624FGPGP
C910	042-1726-90	6.3V 100uF	D102	001-1324-90	MA2S111	IC402	051-3054-90	HA17558ATEL
C911	046-1042-78	0.1uF	D290	001-0529-43	MA8082-L	IC403	051-5436-38	BD5233G-TR
C912	046-1042-78	0.1uF	D301	001-2412-90	RR264M-400	IC404	051-7272-08	TC7SZ125F
C913	046-1042-78	0.1uF	D302	001-2412-90	RR264M-400	IC405	051-7293-90	TC7SET125FU-TE85L
C914	168-1042-78	16V 0.1uF K	D304	001-2412-90	RR264M-400	IC406	051-4607-90	SAA6581T
C915	043-0603-90	16V 10uF	D306	060-8078-00	EZAEG3A50AV	IC407	051-3550-90	R1514S050B-E2-F
C916	168-1042-78	16V 0.1uF K	D307	001-1324-90	MA2S111	IC463	051-3034-90	NJM4558V
C917	046-1042-78	0.1uF	D308	001-4305-32	UDZSTE-17 18B	IC501	051-7539-80	TC7WZ34FU-TE12L
C918	166-1221-50	1200pF CH	D401	001-2412-90	RR264M-400	IC502	051-7539-80	TC7WZ34FU-TE12L
C919	166-2221-50	2200pF CH	D402	001-0529-16	MA8033-L	IC504	051-3571-90	R1514S033B-E2-F
C920	165-2253-65	50V 2.2uF	D403	001-1324-90	MA2S111	IC505	051-7272-08	TC7SZ125F
C921	166-6811-50	680pF CH	D404	001-1324-90	MA2S111	IC550	051-6600-90	LA2335M
C922	168-1032-55	0.01uF K	D465	001-9210-50	AVR- M1608C270MTAAD	IC601	051-7202-28	TC7SH32FU TE85L
C924	166-6811-50	680pF CH	D502	001-4910-91	DF5A5.6F	IC701	051-7260-08	TC7WT125FUTE12L
C925	166-2701-50	27pF CH	D503	001-0529-32	MA8056-M	IC702	051-7509-90	SN74LV123APWR
C926	166-2721-50	2700pFJ CH	D504	001-0529-32	MA8056-M	IC703	051-7539-80	TC7WZ34FU-TE12L
C927	168-1032-55	0.01uF K	D552	001-0529-36	MA8062-H	IC704	051-7294-90	TC7SET32FU-EL
C928	168-1042-78	16V 0.1uF K	D553	001-0529-36	MA8062-H	IC705	051-5306-90	MM1117XF
C929	166-3321-50	3300pFJ CH	D701	001-1324-90	MA2S111	IC706	051-7243-48	SN74AHCT1G08DCKR
C930	166-3321-50	3300pFJ CH				IC707	051-3395-90	NJU7780U1-15-TES

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
IC708	051-3366-00	NJM2396F08	L904	010-3511-90	1.5uH	R109	032-0221-61	1/16W 6.8k ohm F
IC709	051-7272-08	TC7SZ125F	L906	010-3104-53	220 ohm/100MHz	R110	033-4741-15	1/10W 470k ohm
IC901	051-2064-00	TB2926HQ	L908	010-3104-53	220 ohm/100MHz	R111	033-2221-15	1/10W 2.2k ohm
IC902	051-3380-90	TPS5120DBTRG4	L909	010-3414-90	6.8uH	R112	032-0150-54	1/16W 1k ohm F
IC903	051-3547-90	LM3475	L910	010-3104-53	220 ohm/100MHz	R113	033-1011-15	1/10W 100 ohm
IC904	051-3368-90	NJM2886DL3-05-TE1	L911	010-3104-53	220 ohm/100MHz	R114	033-1011-15	1/10W 100 ohm
IC905	051-3572-90	R1514S037B-E2-F	L912	010-8026-00	210uH	R115	033-4731-15	1/10W 47k ohm
J101	075-0339-00	MINI JACK	L913	010-2285-70	120 ohm/100MHz	R116	033-2221-15	1/10W 2.2k ohm
J301	074-4017-03	3P	L914	010-3105-62	1k ohm/100MHz	R117	032-0221-56	1/16W 22k ohm F
J501	074-2234-24	24P	P401	076-3027-06	6P	R118	033-1011-15	1/10W 100 ohm
J551	074-1194-00	13P CE-NET	P501	076-0714-10	10P	R119	033-1011-15	1/10W 100 ohm
J702	074-2225-90	40P	P601	076-3029-00	100P	R120	033-4721-15	1/10W 4.7k ohm
J703	074-2233-38	38P	P701	076-0484-52	2P	R121	033-4731-15	1/10W 47k ohm
J801	074-3040-00	100P	Q109	190-1576-00	2SA1576A	R122	033-4721-15	1/10W 4.7k ohm
J901	074-4026-24	24P	Q110	190-1576-00	2SA1576A	R123	032-0221-65	1/16W 68k ohm F
L101	010-2279-50	4.7uH	Q111	125-2026-95	UNR521NG	R124	033-0000-05	1/10W 0 ohm
L102	010-2279-50	4.7uH	Q203	125-0020-92	UNR5112	R125	033-4721-15	1/10W 4.7k ohm
L203	010-3104-53	220 ohm/100MHz	Q204	125-2026-95	UNR521NG	R126	033-4731-15	1/10W 47k ohm
L205	010-3104-53	220 ohm/100MHz	Q290	192-4081-00	2SC4081	R127	032-0150-50	1/10W 10k ohm F
L206	010-3104-53	220 ohm/100MHz	Q298	125-4001-90	XN1504	R128	032-0150-50	1/16W 10k ohm F
L301	010-2279-50	4.7uH	Q299	125-4001-90	XN1504	R129	033-4731-15	1/10W 47k ohm
L302	010-2285-70	120 ohm/100MHz	Q301	192-4081-00	2SC4081	R130	033-4721-15	1/10W 4.7k ohm
L303	010-3104-53	220 ohm/100MHz	Q302	125-0021-97	DTA113ZU	R131	033-4731-15	1/10W 47k ohm
L304	010-3104-53	220 ohm/100MHz	Q303	192-4081-00	2SC4081	R132	033-1011-15	1/10W 100 ohm
L305	010-3104-53	220 ohm/100MHz	Q304	190-1365-50	2SA1365 AF,AG	R133	032-0150-50	1/16W 10k ohm F
L306	010-3104-53	220 ohm/100MHz	Q305	125-2026-95	UNR521NG	R134	033-4731-15	1/10W 47k ohm
L401	010-3105-62	1k ohm/100MHz	Q306	190-1576-00	2SA1576A	R135	033-0000-05	1/10W 0 ohm
L402	010-3105-62	1k ohm/100MHz	Q307	125-2026-95	UNR521NG	R136	033-4731-15	1/10W 47k ohm
L403	010-3105-62	1k ohm/100MHz	Q401	125-9015-94	RN4904	R137	033-1011-15	1/10W 100 ohm
L404	010-3105-62	1k ohm/100MHz	Q402	125-2026-95	UNR521NG	R138	033-4721-15	1/10W 4.7k ohm
L405	010-3105-62	1k ohm/100MHz	Q403	125-2027-91	DTC114EUA	R139	033-0000-05	1/10W 0 ohm
L406	010-3104-53	220 ohm/100MHz	Q701	125-9017-93	UMD2N-TR	R140	032-0150-50	1/16W 10k ohm F
L462	010-3406-56	3.3uH J	Q702	190-2060-00	2SA2060	R141	033-6831-15	1/10W 68k ohm
L463	010-3104-53	220 ohm/100MHz	Q703	125-2026-95	UNR521NG	R142	033-4731-15	1/10W 47k ohm
L501	010-3104-53	220 ohm/100MHz	Q704	125-2026-95	UNR521NG	R143	033-4721-15	1/10W 4.7k ohm
L502	010-3105-62	1k ohm/100MHz	Q705	190-1736-00	2SA1736	R144	033-4731-15	1/10W 47k ohm
L503	010-3105-62	1k ohm/100MHz	Q706	125-2026-95	UNR521NG	R145	033-0000-05	1/10W 0 ohm
L504	010-3105-62	1k ohm/100MHz	Q707	125-9017-93	UMD2N-TR	R146	033-4731-15	1/10W 47k ohm
L505	010-3105-62	1k ohm/100MHz	Q708	125-2038-96	RN1906	R147	032-0221-56	1/16W 22k ohm F
L506	010-3104-53	220 ohm/100MHz	Q709	190-1576-00	2SA1576A	R148	033-1031-15	1/10W 10k ohm
L507	010-3105-62	1k ohm/100MHz	Q710	125-2026-95	UNR521NG	R149	032-0150-54	1/16W 1k ohm F
L508	010-3105-62	1k ohm/100MHz	Q715	060-4011-80	CPT-182S-C	R150	033-4731-15	1/10W 47k ohm
L509	010-3105-62	1k ohm/100MHz	Q799	125-2026-95	UNR521NG	R151	033-1011-15	1/10W 100 ohm
L550	010-3104-53	220 ohm/100MHz	Q801	102-3420-50	2SC3420 GR,BL	R153	033-4731-15	1/10W 47k ohm
L551	010-3104-53	220 ohm/100MHz	Q802	190-1576-00	2SA1576A	R154	033-4731-15	1/10W 47k ohm
L601	010-3104-53	220 ohm/100MHz	Q803	125-2026-95	UNR521NG	R155	032-0150-50	1/16W 10k ohm F
L602	010-3104-53	220 ohm/100MHz	Q901	125-8017-90	SP8K4-TB	R157	033-4731-15	1/10W 47k ohm
L603	010-3104-50	30 ohm/100MHz	Q902	125-8017-90	SP8K4-TB	R158	033-2231-15	1/10W 22k ohm
L604	010-3104-53	220 ohm/100MHz	Q903	192-4116-50	2SC4116 Y,G	R160	033-4731-15	1/10W 47k ohm
L701	010-2275-55	4.7uH	Q904	125-7007-90	Si5441BDC-TI-E3	R161	033-2731-15	1/10W 27k ohm
L702	010-3076-90	1.1uH	Q905	192-5886-00	2SC5886	R162	032-0150-50	1/16W 10k ohm F
L704	010-3104-53	220 ohm/100MHz	Q906	190-2060-00	2SA2060	R163	033-2731-15	1/10W 27k ohm
L705	010-3104-53	220 ohm/100MHz	Q907	125-7011-90	RSR025P03TL	R164	033-4731-15	1/10W 47k ohm
L706	010-3104-50	30 ohm/100MHz	Q909	125-7011-90	RSR025P03TL	R167	033-4731-15	1/10W 47k ohm
L707	010-3104-50	30 ohm/100MHz	Q910	125-2026-95	UNR521NG	R169	033-4731-15	1/10W 47k ohm
L708	010-3105-62	1k ohm/100MHz	Q911	192-4116-51	2SC4116 G,L	R170	033-4731-15	1/10W 47k ohm
L710	010-3104-50	30 ohm/100MHz	Q912	125-2026-95	UNR521NG	R171	032-0150-59	1/16W 100k ohm F
L712	010-3104-50	30 ohm/100MHz	Q913	192-4116-50	2SC4116 Y,G	R172	032-0150-59	1/16W 100k ohm F
L713	010-3104-50	30 ohm/100MHz	Q914	102-3420-50	2SC3420 GR,BL	R173	032-0150-59	1/16W 100k ohm F
L714	010-3104-50	30 ohm/100MHz	Q915	190-1576-00	2SA1576A	R174	033-4731-15	1/10W 47k ohm
L801	010-3104-53	220 ohm/100MHz	Q916	125-2026-95	UNR521NG	R175	119-4731-15	1/10W 47k ohm
L802	010-3104-53	220 ohm/100MHz	Q917	192-4081-00	2SC4081	R176	119-4731-15	1/10W 47k ohm
L803	010-3104-50	30 ohm/100MHz	Q918	192-4081-00	2SC4081	R178	119-4731-15	1/10W 47k ohm
L804	010-3104-53	220 ohm/100MHz	Q919	191-1197-50	2SB1197K Q,R	R179	033-4731-15	1/10W 47k ohm
L805	010-3104-53	220 ohm/100MHz	Q920	125-2026-95	UNR521NG	R180	119-0000-05	1/10W 0 ohm JW
L806	010-3105-62	1k ohm/100MHz	R100	033-4731-15	1/10W 47k ohm	R181	033-2231-15	1/10W 22k ohm
L807	010-3105-62	1k ohm/100MHz	R101	033-4731-15	1/10W 47k ohm	R183	033-4731-15	1/10W 47k ohm
L808	010-3105-62	1k ohm/100MHz	R102	033-4731-15	1/10W 47k ohm	R185	033-4731-15	1/10W 47k ohm
L809	010-3105-62	1k ohm/100MHz	R103	032-0150-59	1/16W 100k ohm F	R186	033-2231-15	1/10W 22k ohm
L810	010-3104-50	30 ohm/100MHz	R104	032-0150-59	1/16W 100k ohm F	R191	033-4731-15	1/10W 47k ohm
L811	010-3105-62	1k ohm/100MHz	R105	032-0221-56	1/16W 22k ohm F	R193	033-4731-15	1/10W 47k ohm
L901	010-2279-50	4.7uH	R106	033-4731-15	1/10W 47k ohm	R194	033-2231-15	1/10W 22k ohm
L902	010-3510-90	6.8uH	R107	033-4731-15	1/10W 47k ohm	R195	032-0150-50	1/16W 10k ohm F
L903	010-3510-90	6.8uH	R108	033-4731-15	1/10W 47k ohm	R196	032-0150-50	1/16W 10k ohm F

REF No.	PART No.	DESCRIPTION
R197	032-0150-50	1/16W 10k ohm F
R198	033-4731-15	1/10W 47k ohm
R199	033-4731-15	1/10W 47k ohm
R220	033-2231-15	1/10W 22k ohm
R221	033-1831-15	1/10W 18k ohm
R222	033-1231-15	1/10W 12k ohm
R223	032-0150-50	1/16W 10k ohm F
R234	033-5621-15	1/10W 5.6k ohm
R235	033-3341-15	1/10W 330k ohm
R236	033-3341-15	1/10W 330k ohm
R237	033-1831-15	1/10W 18k ohm
R238	033-2231-15	1/10W 22k ohm
R239	033-2231-15	1/10W 22k ohm
R240	032-0150-50	1/16W 10k ohm F
R241	033-6811-15	1/10W 680 ohm
R242	032-0150-50	1/16W 10k ohm F
R246	033-6811-15	1/10W 680 ohm
R247	033-2231-15	1/10W 22k ohm
R248	032-0150-50	1/16W 10k ohm F
R249	033-6811-15	1/10W 680 ohm
R250	033-3331-15	1/10W 33k ohm
R251	033-1831-15	1/10W 18k ohm
R253	033-3331-15	1/10W 33k ohm
R254	033-3331-15	1/10W 33k ohm
R255	033-2221-15	1/10W 2.2k ohm
R256	032-0150-50	1/16W 10k ohm F
R257	033-6811-15	1/10W 680 ohm
R258	033-1831-15	1/10W 18k ohm
R259	033-2221-15	1/10W 2.2k ohm
R264	033-1821-15	1/10W 1.8k ohm
R267	033-2221-15	1/10W 2.2k ohm
R268	033-2221-15	1/10W 2.2k ohm
R269	033-1821-15	1/10W 1.8k ohm
R275	033-3331-15	1/10W 33k ohm
R276	033-2221-15	1/10W 2.2k ohm
R277	119-1021-15	1/10W 1k ohm
R279	033-1531-15	1/10W 15k ohm
R282	032-0140-62	1/10W 1k ohm F
R283	032-0140-51	1/10W 15k ohm F
R284	116-4721-15	1/4W 4.7k ohm
R285	033-1531-15	1/10W 15k ohm
R286	033-2231-15	1/10W 22k ohm
R287	033-2231-15	1/10W 22k ohm
R288	033-2231-15	1/10W 22k ohm
R289	033-2231-15	1/10W 22k ohm
R297	033-2221-15	1/10W 2.2k ohm
R302	033-2211-15	1/10W 220 ohm
R305	032-0176-00	1/3W 1k ohm J
R306	032-0176-00	1/3W 1k ohm J
R307	032-0176-00	1/3W 1k ohm J
R308	032-0140-52	1/10W 33k ohm F
R309	032-0140-50	1/10W 10k ohm F
R310	032-0150-50	1/16W 10k ohm F
R311	032-0140-62	1/10W 1k ohm F
R312	119-5641-15	1/10W 560k ohm
R313	033-4721-15	1/10W 4.7k ohm
R318	032-0140-51	1/10W 15k ohm F
R319	032-0150-59	1/16W 100k ohm F
R320	033-1011-15	1/10W 100 ohm
R321	033-1011-15	1/10W 100 ohm
R322	119-2231-15	1/10W 22k ohm
R323	032-0140-67	1/10W 3.3k ohm F
R324	032-0140-51	1/10W 15k ohm F
R326	033-1031-15	1/10W 10k ohm
R327	033-3321-15	1/10W 3.3k ohm
R328	033-4701-15	1/10W 47 ohm
R329	033-0000-05	1/10W 0 ohm
R330	119-1821-15	1/10W 1.8k ohm
R331	033-1031-15	1/10W 10k ohm
R332	033-1531-15	1/10W 15k ohm
R333	033-6821-15	1/10W 6.8k ohm
R334	116-8291-15	1/4W 8.2 ohm
R335	033-1011-15	1/10W 100 ohm
R336	116-6891-15	1/4W 6.8 ohm

REF No.	PART No.	DESCRIPTION
R338	033-1011-15	1/10W 100 ohm
R339	033-1031-15	1/10W 10k ohm
R340	033-4721-15	1/10W 4.7k ohm
R341	033-0000-05	1/10W 0 ohm
R343	033-1021-15	1/10W 1k ohm
R344	033-1541-15	1/10W 150k ohm
R346	033-0000-05	1/10W 0 ohm
R401	033-1021-15	1/10W 1k ohm
R402	033-1021-15	1/10W 1k ohm
R403	119-1011-15	1/10W 100 ohm
R406	033-1021-15	1/10W 1k ohm
R407	033-0000-05	1/10W 0 ohm
R408	033-0000-05	1/10W 0 ohm
R409	033-6831-15	1/10W 68k ohm
R410	033-4731-15	1/10W 47k ohm
R411	033-2231-15	1/10W 22k ohm
R413	032-0150-54	1/16W 1k ohm F
R414	033-4731-15	1/10W 47k ohm
R415	033-4731-15	1/10W 47k ohm
R416	032-0150-54	1/16W 1k ohm F
R417	033-4731-15	1/10W 47k ohm
R418	032-0140-62	1/10W 1k ohm F
R419	033-1031-15	1/10W 10k ohm
R420	032-0150-59	1/16W 100k ohm F
R421	033-3331-15	1/10W 33k ohm
R422	033-3321-15	1/10W 3.3k ohm
R423	033-1011-15	1/10W 100 ohm
R424	033-1031-15	1/10W 10k ohm
R425	033-1231-15	1/10W 12k ohm
R426	033-2201-15	1/10W 22 ohm
R427	032-0150-55	1/16W 2.7k ohm F
R428	032-0150-59	1/16W 100k ohm F
R429	033-4701-15	1/10W 47 ohm
R430	033-2231-15	1/10W 22k ohm
R431	033-1011-15	1/10W 100 ohm
R432	033-4731-15	1/10W 47k ohm
R433	033-1021-15	1/10W 1k ohm
R434	033-1021-15	1/10W 1k ohm
R435	033-1011-15	1/10W 100 ohm
R441	033-4731-15	1/10W 47k ohm
R442	033-4731-15	1/10W 47k ohm
R443	033-4731-15	1/10W 47k ohm
R445	033-1011-15	1/10W 100 ohm
R446	119-0000-05	1/10W 0 ohm JW
R447	119-0000-05	1/10W 0 ohm JW
R485	033-4731-15	1/10W 47k ohm
R486	033-4721-15	1/10W 4.7k ohm
R487	032-0150-56	1/16W 27k ohm F
R489	119-1821-15	1/10W 1.8k ohm
R490	119-1011-15	1/10W 100 ohm
R502	033-4701-15	1/10W 47 ohm
R503	033-4701-15	1/10W 47 ohm
R504	033-0000-05	1/10W 0 ohm
R505	033-0000-05	1/10W 0 ohm
R506	033-4711-15	1/10W 470 ohm
R507	033-4731-15	1/10W 47k ohm
R510	033-1021-15	1/10W 1k ohm
R513	033-1031-15	1/10W 10k ohm
R514	033-1021-15	1/10W 1k ohm
R515	033-1031-15	1/10W 10k ohm
R554	116-6801-15	1/4W 68 ohm
R555	119-0000-05	1/10W 0 ohm JW
R556	119-0000-05	1/10W 0 ohm JW
R601	032-0150-54	1/16W 1k ohm F
R602	032-0150-54	1/16W 1k ohm F
R605	032-0150-50	1/16W 10k ohm F
R606	032-0150-50	1/16W 10k ohm F
R611	033-1011-15	1/10W 100 ohm
R612	033-0000-05	1/10W 0 ohm
R702	032-0150-50	1/16W 10k ohm F
R703	116-1521-15	1/4W 1.5k ohm
R704	119-4721-15	1/10W 4.7k ohm
R706	033-4731-15	1/10W 47k ohm
R707	033-4731-15	1/10W 47k ohm

REF No.	PART No.	DESCRIPTION
R708	033-1011-15	1/10W 100 ohm
R709	119-7501-15	1/10W 75 ohm
R710	033-4741-15	1/10W 470k ohm
R711	033-1011-15	1/10W 100 ohm
R712	032-0150-50	1/16W 10k ohm F
R713	033-1011-15	1/10W 100 ohm
R714	032-0163-94	1/2W 680 ohm
R715	033-4731-15	1/10W 47k ohm
R716	033-4721-15	1/10W 4.7k ohm
R717	033-1221-15	1/10W 1.2k ohm
R718	032-0140-66	1/10W 220 ohm F
R719	033-2231-15	1/10W 22k ohm
R720	033-1011-15	1/10W 100 ohm
R721	033-1011-15	1/10W 100 ohm
R722	032-0150-54	1/16W 1k ohm F
R723	032-0150-54	1/16W 1k ohm F
R724	032-0150-54	1/16W 1k ohm F
R725	033-3911-15	1/10W 390 ohm
R727	119-4721-15	1/10W 4.7k ohm
R729	032-0140-50	1/10W 10k ohm F
R730	033-0000-05	1/10W 0 ohm
R731	032-0140-62	1/10W 1k ohm F
R733	033-0000-05	1/10W 0 ohm
R734	032-0150-50	1/16W 10k ohm F
R735	032-0140-68	1/10W 680 ohm F
R736	033-4731-15	1/10W 47k ohm
R738	033-0000-05	1/10W 0 ohm
R801	116-2211-15	1/4W 220 ohm
R802	033-4721-15	1/10W 4.7k ohm
R803	033-1031-15	1/10W 10k ohm
R806	033-2201-15	1/10W 22 ohm
R807	033-2201-15	1/10W 22 ohm
R902	119-4721-15	1/10W 4.7k ohm
R903	119-4721-15	1/10W 4.7k ohm
R904	119-4721-15	1/10W 4.7k ohm
R905	119-4721-15	1/10W 4.7k ohm
R906	032-0150-50	1/16W 10k ohm F
R907	032-0150-51	1/16W 15k ohm F
R908	032-0140-62	1/10W 1k ohm F
R909	032-0140-79	1/10W 2.7k ohm F
R910	032-0140-62	1/10W 1k ohm F
R911	032-0140-79	1/10W 2.7k ohm F
R912	032-0140-52	1/10W 33k ohm F
R913	032-0140-52	1/10W 33k ohm F
R914	032-0140-67	1/10W 3.3k ohm F
R915	032-0140-50	1/10W 10k ohm F
R916	032-0140-98	1/10W 330 ohm F
R917	116-5611-15	1/4W 560 ohm
R918	033-2201-15	1/10W 22 ohm
R919	032-0140-72	1/10W 470 ohm F
R920	032-0140-15	1/10W 6.8k ohm F
R921	032-0140-56	1/10W 12k ohm F
R922	119-0000-05	1/10W 0 ohm JW
R923	032-0140-69	1/10W 16k ohm F
R924	032-0150-51	1/16W 15k ohm F
R925	117-0000-05	1/8W 0 ohm JW
R927	117-0000-05	1/8W 0 ohm JW
R929	116-3311-15	1/4W 330 ohm
R930	116-1531-15	1/4W 15k ohm
R932	032-0140-88	1/10W 100k ohm F
R933	119-0000-05	1/10W 0 ohm JW
R934	032-0150-50	1/16W 10k ohm F
R935	032-0209-50	1/4W 82 ohm D
R936	032-0140-80	1/10W 18k ohm F
R937	032-0140-56	1/10W 12k ohm F
R938	116-1521-15	1/4W 1.5k ohm
R939	032-0140-69	1/10W 16k ohm F
R940	032-0140-80	1/10W 18k ohm F
R941	032-0140-56	1/10W 12k ohm F
R942	119-0000-05	1/10W 0 ohm JW
R943	032-0140-52	1/10W 33k ohm F
R944	032-0221-53	1/16W 18k ohm F
R945	033-3321-15	1/10W 3.3k ohm
R947	033-1831-15	1/10W 18k ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R948	033-4721-15	1/10W 4.7k ohm	R963	033-4731-15	1/10W 47k ohm	R1009	032-0150-59	1/16W 100k ohm F
R949	116-2211-15	1/4W 220 ohm	R966	119-0000-05	1/10W 0 ohm JW	TH101	002-0315-00	TN10-3U153JT
R951	033-4721-15	1/10W 4.7k ohm	R967	032-0176-00	1/3W 1k ohm J	TH901	002-0328-90	miniSMDC050F-2
R952	033-1031-15	1/10W 10k ohm	R969	032-0140-72	1/10W 470 ohm F	TH902	002-0328-90	miniSMDC050F-2
R953	032-0176-00	1/3W 1k ohm J	R970	032-0140-62	1/10W 1k ohm F	TM401	073-0778-90	TERMINAL
R954	032-0150-50	1/16W 10k ohm F	R999	119-0000-05	1/10W 0 ohm JW	TM402	073-0778-90	TERMINAL
R955	033-4731-15	1/10W 47k ohm	R1001	032-0221-65	1/16W 68k ohm F	VR401	012-6023-09	47k ohm B VR
R956	119-4721-15	1/10W 4.7k ohm	R1002	032-0221-61	1/16W 6.8k ohm F	X101	060-1533-90	CSTCE10M0G52-RO
R957	116-4721-15	1/4W 4.7k ohm	R1003	032-0221-56	1/16W 22k ohm F	X801	061-3552-90	4.33MHz
R958	033-1831-15	1/10W 18k ohm	R1004	032-0221-60	1/16W 3.9k ohm F	X802	060-1533-90	CSTCE10M0G52-RO
R959	033-4721-15	1/10W 4.7k ohm	R1005	032-0150-59	1/16W 100k ohm F	PWB	039-3485-00	PWB(WITHOUT COMPONENTS)
R960	032-0140-50	1/10W 10k ohm F	R1006	032-0221-60	1/16W 3.9k ohm F			
R961	032-0140-79	1/10W 2.7k ohm F	R1007	032-0221-66	1/16W 270 ohm F			
R962	119-1511-15	1/10W 150 ohm	R1008	032-0221-61	1/16W 6.8k ohm F			

TUNER PWB(B3) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT202	092-2241-00	ANTENNA RECEPT	C161	042-6301-90	6.3V 47uF	C227	042-1764-90	16V 100uF M
BL201	880-2091S	TUNER	C162	046-1042-78	0.1uF	C228	168-1032-55	0.01uF K
C101	046-1022-58	1000pF B	C163	046-1042-78	0.1uF	C229	046-1022-58	1000pF B
C102	046-1022-58	1000pF B	C164	042-6301-90	6.3V 47uF	C230	046-2232-78	0.022uF B
C103	046-1022-58	1000pF B	C165	046-1042-78	0.1uF	C231	045-1011-50	100pF CH
C104	046-1022-58	1000pF B	C166	042-1726-90	6.3V 100uF	C232	046-1022-58	1000pF B
C105	046-1042-78	0.1uF	C167	045-3911-50	390pF CH	C236	043-0603-90	16V 10uF
C106	043-0540-00	6.3V 10uF	C168	045-3911-50	390pF CH	C237	046-1042-78	0.1uF
C107	046-1042-78	0.1uF	C169	042-1726-90	6.3V 100uF	C238	168-1052-78	16V 1uF K
C108	043-0540-00	6.3V 10uF	C170	046-5612-58	560pF B	C239	168-1052-78	16V 1uF K
C109	046-1022-58	1000pF B	C171	046-5612-58	560pF B	C241	046-1222-38	1200pF B
C110	043-0603-90	16V 10uF	C172	046-3322-58	3300pF B	C242	045-2201-50	22pF CH
C111	043-0603-90	16V 10uF	C173	045-3911-50	390pF CH	C243	046-1222-38	1200pF B
C112	168-3342-58	0.33uF K	C174	046-1042-78	0.1uF	C244	168-3932-78	0.039uF K
C113	046-1022-58	1000pF B	C175	046-5612-58	560pF B	C245	046-1042-78	0.1uF
C114	045-1011-50	100pF CH	C176	046-5612-58	560pF B	C246	046-1042-78	0.1uF
C115	046-1022-58	1000pF B	C177	046-1032-78	0.01uF B	C247	168-3342-58	0.33uF K
C116	042-6301-90	6.3V 47uF	C178	043-0603-90	16V 10uF	C248	165-1073-35	16V 100uF
C117	046-2232-78	0.022uF B	C179	043-0603-90	16V 10uF	C249	046-1042-78	0.1uF
C118	046-2232-78	0.022uF B	C180	043-0603-90	16V 10uF	C301	046-1042-78	0.1uF
C119	045-1011-50	100pF CH	C181	046-3322-58	3300pF B	C302	046-1042-78	0.1uF
C120	045-1011-50	100pF CH	C182	046-1042-78	0.1uF	C305	165-1073-35	16V 100uF
C121	046-2232-78	0.022uF B	C185	046-1042-78	0.1uF	C307	168-1042-78	16V 0.1uF K
C122	168-2242-58	0.22uF K	C186	045-2701-50	27pF CH	C310	046-1042-78	0.1uF
C124	045-4711-50	470pF	C187	045-3911-50	390pF CH	C311	168-1052-78	16V 1uF K
C125	045-1007-50	10pF CH	C188	045-2701-50	27pF CH	C312	168-1052-78	16V 1uF K
C126	045-1201-50	12pF CH	C189	046-1042-78	0.1uF	C313	046-1042-78	0.1uF
C127	046-2232-78	0.022uF B	C190	043-0603-90	16V 10uF	C316	168-1042-78	16V 0.1uF K
C129	046-1022-58	1000pF B	C191	045-3911-50	390pF CH	C317	046-1022-58	1000pF B
C130	046-3322-58	3300pF B	C192	166-3911-50	390pF CH	C318	168-1052-78	16V 1uF K
C131	046-3322-58	3300pF B	C193	043-0603-90	16V 10uF	C319	168-1052-78	16V 1uF K
C132	046-1022-58	1000pF B	C194	046-1042-78	0.1uF	C320	046-1042-78	0.1uF
C133	043-0559-90	6.3V 22uF	C195	046-1042-78	0.1uF	C324	042-1772-90	25V 68uF M
C134	046-1042-78	0.1uF	C200	045-1007-50	10pF CH	C325	168-1042-38	50V 0.1uF K
C135	042-6302-90	6.3V 10uF M	C201	166-2701-50	27pF CH	C326	046-1042-78	0.1uF
C136	046-1042-78	0.1uF	C202	045-1201-50	12pF CH	C327	165-1073-35	16V 100uF
C139	046-1022-58	1000pF B	C204	045-1511-50	150pF CH	C449	046-2222-58	2200pF B
C140	046-3322-58	3300pF B	C205	045-3301-50	33pF CH	C450	046-2222-58	2200pF B
C141	046-3322-58	3300pF B	C206	046-1022-58	1000pF B	C451	043-0603-90	16V 10uF
C142	046-1022-58	1000pF B	C207	045-2701-50	27pF CH	C452	043-0603-90	16V 10uF
C143	046-3332-78	0.033uF B	C208	045-6801-50	68pF CH	C453	043-0603-90	16V 10uF
C144	042-6302-90	6.3V 10uF M	C209	168-2232-55	0.022uF K	C454	045-2201-50	22pF CH
C145	046-1042-78	0.1uF	C210	046-1022-58	1000pF B	C455	045-2201-50	22pF CH
C147	046-1042-78	0.1uF	C211	045-2201-50	22pF CH	C456	046-1032-78	0.01uF B
C148	042-6302-90	6.3V 10uF M	C212	046-4732-78	0.047uF	C457	045-2201-50	22pF CH
C149	046-1042-78	0.1uF	C213	045-1007-50	10pF CH	C458	045-2201-50	22pF CH
C150	046-1042-78	0.1uF	C214	045-3096-50	3pF CH	C459	046-1042-78	0.1uF
C151	042-6302-90	6.3V 10uF M	C215	045-1201-50	12pF CH	C460	165-1073-35	16V 100uF
C153	042-1726-90	6.3V 100uF	C216	046-1042-78	0.1uF	C461	165-4763-15	6.3V 47uF
C154	168-1052-78	16V 1uF K	C217	045-4096-50	4pF CH	C464	165-4763-15	6.3V 47uF
C155	045-1011-50	100pF CH	C218	046-1022-58	1000pF B	C465	046-1032-78	0.01uF B
C157	168-4732-78	0.047uF K	C219	046-4732-78	0.047uF	D101	001-0529-21	MA8039-H
C158	046-1042-78	0.1uF	C220	045-8097-50	8pF CH	D200	001-9006-90	HVM189S
C159	043-0603-90	16V 10uF	C223	168-2232-55	0.022uF K	D201	001-0530-90	1SS271
C160	046-1042-78	0.1uF	C225	165-4763-15	6.3V 47uF	D202	001-1324-90	MA2S111

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D204	001-4310-00	RLZ TE-11 9.1B	Q111	192-2223-13	2SC2223-T1B	R209	033-1031-15	1/10W 10k ohm
D205	001-0516-90	MA111	Q200	192-4703-50	2SC4703 SF,SE	R210	033-2221-15	1/10W 2.2k ohm
D302	001-2412-90	RR264M-400	Q203	125-2041-96	RT1N436M	R215	119-1021-15	1/10W 1k ohm
D304	001-4321-50	MALS068XUL	Q204	190-1365-50	2SA1365 AF,AG	R216	033-5611-15	1/10W 560 ohm
D305	001-4321-50	MALS068XUL	Q205	192-5886-00	2SC5886	R217	033-1531-15	1/10W 15k ohm
D504	001-4321-50	MALS068XUL	Q206	125-9002-92	RN4602	R218	119-3911-15	1/10W 390 ohm
D505	001-0580-90	1SS352	R100	119-0000-05	1/10W 0 ohm JW	R219	033-0000-05	1/10W 0 ohm
D507	001-9213-50	EZJZ1V270EA	R101	033-1021-15	1/10W 1k ohm	R220	033-1011-15	1/10W 100 ohm
D509	001-4321-50	MALS068XUL	R102	033-8221-15	1/10W 8.2k ohm	R221	033-4721-15	1/10W 4.7k ohm
D600	001-2412-90	RR264M-400	R103	033-2711-15	1/10W 270 ohm	R222	119-3901-15	1/10W 39 ohm
FIL600	060-3117-51	CKD510JB1E223ST	R106	033-2711-15	1/10W 270 ohm	R223	119-4701-15	1/10W 47 ohm
FIL602	060-3117-51	CKD510JB1E223ST	R107	033-0000-05	1/10W 0 ohm	R224	033-6821-15	1/10W 6.8k ohm
IC101	051-6739-80	AK4388VT-E2	R108	033-2711-15	1/10W 270 ohm	R225	033-3331-15	1/10W 33k ohm
IC102	051-6739-80	AK4388VT-E2	R109	033-2711-15	1/10W 270 ohm	R226	119-1011-15	1/10W 100 ohm
IC103	051-3513-90	PQ070XH02ZPH	R110	033-1011-15	1/10W 100 ohm	R227	033-1531-15	1/10W 15k ohm
IC104	051-6706-60	SAF7730/N317 (impossible to exchange)	R111	032-0150-54	1/16W 1k ohm F	R228	119-3911-15	1/10W 390 ohm
IC105	125-7007-90	Si5441BDC-TI-E3	R112	032-0221-54	1/16W 150 ohm	R229	033-1041-15	1/10W 100k ohm
IC200	051-3519-90	NJU7771F05-TE2	R113	033-1011-15	1/10W 100 ohm	R230	119-1511-15	1/10W 150 ohm
IC203	051-6100-90	BD6221F-E2	R114	032-0221-55	1/10W 1.5k ohm	R231	033-4731-15	1/10W 47k ohm
IC300	051-3570-90	NJM2386ADL3-08TE1	R115	033-4721-15	1/10W 4.7k ohm	R232	033-5611-15	1/10W 560 ohm
IC301	051-3370-90	NJU7741F33-TE2	R116	033-1031-15	1/10W 10k ohm	R233	119-1511-15	1/10W 150 ohm
IC302	051-5352-90	AK4254	R117	033-1031-15	1/10W 10k ohm	R234	119-4701-15	1/10W 47 ohm
IC405	051-3034-90	NJM4558V	R118	033-1011-15	1/10W 100 ohm	R236	033-6821-15	1/10W 6.8k ohm
IC406	051-3034-90	NJM4558V	R119	033-1031-15	1/10W 10k ohm	R237	119-1011-15	1/10W 100 ohm
IC700	051-5806-01	GP1S93	R120	033-1031-15	1/10W 10k ohm	R238	033-3321-15	1/10W 3.3k ohm
IC701	051-5806-01	GP1S93	R121	033-1031-15	1/10W 10k ohm	R239	119-6811-15	1/10W 680 ohm
J200	074-3043-56	6P	R122	033-1011-15	1/10W 100 ohm	R240	119-6811-15	1/10W 680 ohm
J502	074-4017-07	7P	R123	033-1011-15	1/10W 100 ohm	R241	119-2221-15	1/10W 2.2k ohm
J700	074-3042-56	6P	R124	033-1031-15	1/10W 10k ohm	R242	033-2721-15	1/10W 2.7k ohm
L101	010-3103-64	1.5k ohm/100MHz	R125	033-1011-15	1/10W 100 ohm	R243	033-3941-15	1/10W 390k ohm
L102	010-3103-64	1.5k ohm/100MHz	R126	033-4721-15	1/10W 4.7k ohm	R244	119-4711-15	1/10W 470 ohm
L103	010-3103-64	1.5k ohm/100MHz	R127	033-1011-15	1/10W 100 ohm	R245	033-1021-15	1/10W 1k ohm
L104	010-3103-64	1.5k ohm/100MHz	R128	033-1021-15	1/10W 1k ohm	R246	033-4731-15	1/10W 47k ohm
L105	010-3105-62	1k ohm/100MHz	R131	033-1011-15	1/10W 100 ohm	R247	033-3921-15	1/10W 3.9k ohm
L106	010-3105-62	1k ohm/100MHz	R132	033-1011-15	1/10W 100 ohm	R248	033-5631-15	1/10W 56k ohm
L107	010-3104-53	220 ohm/100MHz	R135	033-0000-05	1/10W 0 ohm	R249	033-5631-15	1/10W 56k ohm
L109	010-3105-62	1k ohm/100MHz	R136	033-1011-15	1/10W 100 ohm	R301	032-0140-12	1/10W 75 ohm F
L111	010-3105-62	1k ohm/100MHz	R137	033-1001-15	1/10W 10 ohm	R302	033-0000-05	1/10W 0 ohm
L112	010-3105-62	1k ohm/100MHz	R141	032-0221-57	1/16W 13k ohm F	R303	033-4731-15	1/10W 47k ohm
L113	010-3105-62	1k ohm/100MHz	R142	032-0221-53	1/16W 18k ohm F	R304	033-0000-05	1/10W 0 ohm
L114	010-3105-62	1k ohm/100MHz	R143	032-0221-57	1/16W 13k ohm F	R305	033-0000-05	1/10W 0 ohm
L115	010-3105-62	1k ohm/100MHz	R144	032-0221-53	1/16W 18k ohm F	R456	033-4731-15	1/10W 47k ohm
L116	010-3109-63	1k ohm/100MHz	R145	032-0150-50	1/16W 10k ohm F	R457	033-4731-15	1/10W 47k ohm
L200	010-2198-50	0.15uH	R146	032-0150-56	1/16W 27k ohm F	R458	032-0221-53	1/16W 18k ohm F
L201	010-2198-62	0.27uH	R147	032-0150-50	1/16W 10k ohm F	R459	032-0221-53	1/16W 18k ohm F
L202	010-3417-92	4.7uH	R148	032-0150-56	1/16W 27k ohm F	R460	032-0221-53	1/16W 18k ohm F
L204	010-2279-50	4.7uH	R149	032-0150-56	1/16W 27k ohm F	R461	032-0221-53	1/16W 18k ohm F
L205	010-2279-50	4.7uH	R150	032-0140-50	1/10W 10k ohm F	R462	032-0221-53	1/16W 18k ohm F
L206	010-3409-57	10uH 450mA	R151	032-0150-56	1/16W 27k ohm F	R463	032-0221-53	1/16W 18k ohm F
L207	010-8037-00	0.525uH	R152	032-0150-50	1/16W 10k ohm F	R464	033-1011-15	1/10W 100 ohm
L208	010-2198-62	0.27uH	R153	032-0150-56	1/16W 27k ohm F	R465	032-0221-53	1/16W 18k ohm F
L209	010-6030-00	30uH	R154	032-0150-50	1/16W 10k ohm F	R466	032-0221-53	1/16W 18k ohm F
L210	010-8037-01	0.85uH	R155	032-0150-50	1/16W 10k ohm F	R467	032-0150-50	1/16W 10k ohm F
L211	010-2198-62	0.27uH	R156	032-0150-56	1/16W 27k ohm F	R475	033-0000-05	1/10W 0 ohm
L212	010-2198-65	0.1uH	R157	032-0221-53	1/16W 18k ohm F	R478	032-0221-63	1/16W 12k ohm F
L213	010-3406-29	0.018uH J	R158	032-0221-57	1/16W 13k ohm F	R502	032-0140-12	1/10W 75 ohm F
L214	010-2198-84	0.68uH	R159	032-0221-53	1/16W 18k ohm F	R505	032-0140-12	1/10W 75 ohm F
L215	010-2198-76	0.047uH	R160	032-0221-57	1/16W 13k ohm F	R506	119-4731-15	1/10W 47k ohm
L302	010-3417-90	10uH	R163	033-1011-15	1/10W 100 ohm	R510	032-0140-12	1/10W 75 ohm F
P201	076-3042-56	6P	R164	033-1011-15	1/10W 100 ohm	R557	033-0000-05	1/10W 0 ohm
P202	076-0478-52	2P	R165	033-0000-05	1/10W 0 ohm	R700	116-5611-15	1/4W 560 ohm
P501	076-0714-12	12P	R166	033-0000-05	1/10W 0 ohm	R701	116-5611-15	1/4W 560 ohm
P601	076-3040-00	100P	R167	033-0000-05	1/10W 0 ohm	SUP200	060-0122-91	ANT-SUP
Q101	126-0222-90	3SK222 V221,22	R168	033-0000-05	1/10W 0 ohm	TM201	073-0795-90	TERMINAL
Q102	192-4703-50	2SC4703 SF,SE	R199	119-0000-05	1/10W 0 ohm JW	TM203	073-0795-90	TERMINAL
Q103	190-1162-00	2SA1162	R201	119-3311-15	1/10W 330 ohm	TM204	073-0795-90	TERMINAL
Q104	125-2041-92	RT1N141M	R202	119-3321-15	1/10W 3.3k ohm	TM205	073-0795-90	TERMINAL
Q106	193-1306-00	2SD1306	R203	116-3311-15	1/4W 330 ohm	X101	061-3537-90	41.6MHz
Q107	193-1306-00	2SD1306	R204	116-8291-15	1/4W 8.2 ohm	PWB	039-3507-00	PWB(WITHOUT COMPONENTS)
Q110	192-2223-13	2SC2223-T1B	R205	033-4731-15	1/10W 47k ohm			
			R207	033-1031-15	1/10W 10k ohm			
			R208	033-2221-15	1/10W 2.2k ohm			

LCD PWB(B4) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C7	045-6097-50	6pF CH	C750	046-1032-78	0.01uF B	C926	042-1761-90	35V 22uF M
C500	168-1042-78	16V 0.1uF K	C751	178-1052-78	1uF	C927	042-1761-90	35V 22uF M
C602	042-1763-90	25V 47uF M	C752	178-1052-78	1uF	C928	042-1763-90	25V 47uF M
C604	168-1042-78	16V 0.1uF K	C754	168-1032-55	0.01uF K	C929	042-1764-90	16V 100uF M
C607	168-1042-78	16V 0.1uF K	C755	043-0603-90	16V 10uF	C930	042-1763-90	25V 47uF M
C608	042-1763-90	25V 47uF M	C756	046-1032-78	0.01uF B	C931	042-1761-90	35V 22uF M
C609	168-1042-78	16V 0.1uF K	C758	046-1032-78	0.01uF B	C932	042-1764-90	16V 100uF M
C610	178-1052-78	1uF	C759	043-0603-90	16V 10uF	C933	042-1764-90	16V 100uF M
C611	178-2242-78	0.22uF	C760	178-1055-79	1uF	C935	042-1763-90	25V 47uF M
C612	168-1032-55	0.01uF K	C761	042-1750-90	16V 100uF M	C953	178-1055-79	1uF
C613	166-1011-50	100pF CH	C764	046-1042-78	0.1uF	C954	178-1055-79	1uF
C614	178-1052-78	1uF	C765	046-1032-78	0.01uF B	C955	045-1801-50	18pF CH
C615	043-0554-90	25V 10uF	C766	043-0603-90	16V 10uF	C956	043-0603-90	16V 10uF
C616	168-6822-55	6800pF K	C767	046-1042-78	0.1uF	C957	046-1042-78	0.1uF
C617	168-1522-55	1500pF K	C770	168-1042-78	16V 0.1uF K	C959	046-1042-78	0.1uF
C618	043-0554-90	25V 10uF	C771	168-1042-78	16V 0.1uF K	C960	045-5601-50	56pF CH
C619	168-4732-78	0.047uF K	C774	046-1032-78	0.01uF B	C961	046-1032-78	0.01uF B
C620	043-0571-90	50V 150pF F	C775	046-1032-78	0.01uF B	CCT701	050-0145-60	1/16W 470 ohm x4
C621	168-4732-78	0.047uF K	C776	168-1032-55	0.01uF K	CCT703	050-0140-58	1/32W 470 ohm x4J
C624	043-0554-90	25V 10uF	C777	046-1032-78	0.01uF B	CCT704	050-0140-52	1/32W 100 ohm x4J
C625	168-1042-78	16V 0.1uF K	C778	046-1042-78	0.1uF	CCT705	050-0140-52	1/32W 100 ohm x4J
C634	177-2252-78	16V 2.2uF	C779	046-1042-78	0.1uF	CCT801	050-0145-52	1/16W 1k ohm x4
C635	168-1042-78	16V 0.1uF K	C780	043-0563-90	16V 47uF	CCT802	050-0145-52	1/16W 1k ohm x4
C636	168-1532-55	0.015uF K	C781	046-1032-78	0.01uF B	CCT803	050-0145-54	1/16W 47k ohm x4
C637	043-0549-50	3KV 10PF	C782	168-1042-78	16V 0.1uF K	CCT804	050-0145-60	1/16W 470 ohm x4
C638	042-1763-90	25V 47uF M	C783	043-0563-90	16V 47uF	CCT805	050-0145-54	1/16W 47k ohm x4
C639	166-5611-50	560pF CH	C784	046-1032-78	0.01uF B	D501	001-7131-90	SML312WBCW1
C700	042-1750-90	16V 100uF M	C785	046-1032-78	0.01uF B	D502	001-7131-90	SML312WBCW1
C701	168-1042-78	16V 0.1uF K	C786	168-1032-55	0.01uF K	D503	001-7131-90	SML312WBCW1
C702	178-1055-79	1uF	C787	178-1052-78	1uF	D504	001-7131-90	SML312WBCW1
C703	045-1201-50	12pF CH	C789	046-1032-78	0.01uF B	D505	001-7131-90	SML312WBCW1
C704	168-1042-78	16V 0.1uF K	C790	168-1042-78	16V 0.1uF K	D506	001-7131-90	SML312WBCW1
C705	042-1764-90	16V 100uF M	C791	166-6811-50	680pF CH	D507	001-7131-90	SML312WBCW1
C706	168-1045-56	25V 0.1uF Z	C792	046-1032-78	0.01uF B	D508	001-7131-90	SML312WBCW1
C707	178-1052-78	1uF	C793	046-1042-78	0.1uF	D509	001-7080-93	SML512BC5TT86
C708	166-2096-50	2pF CK	C794	046-1042-78	0.1uF	D510	001-7080-93	SML512BC5TT86
C709	043-0547-50	16V 3.3uF	C795	046-1042-78	0.1uF	D511	001-7080-93	SML512BC5TT86
C710	166-2096-50	2pF CK	C796	043-0563-90	16V 47uF	D512	001-7080-93	SML512BC5TT86
C711	168-2232-55	0.022uF K	C797	043-0603-90	16V 10uF	D513	001-7131-90	SML312WBCW1
C712	166-5601-50	56pF CH	C798	046-1042-78	0.1uF	D514	001-7131-90	SML312WBCW1
C713	042-1760-90	16V 10uF M	C799	178-2242-78	0.22uF	D515	001-7131-90	SML312WBCW1
C714	046-1032-78	0.01uF B	C800	046-1022-58	1000pF B	D517	001-7080-93	SML512BC5TT86
C715	045-1011-50	100pF CH	C801	166-1011-50	100pF CH	D518	001-7080-93	SML512BC5TT86
C716	045-1011-50	100pF CH	C802	178-2242-78	0.22uF	D519	001-7094-91	VFR1112H-TR
C717	043-0547-50	16V 3.3uF	C803	046-1042-78	0.1uF	D600	001-4305-20	UDZSTE-17 5.6B
C718	168-3332-78	0.033uF K	C804	166-5101-50	51pF CH	D604	001-4305-19	UDZSTE-17 5.1B
C719	168-3332-78	0.033uF K	C805	166-1021-50	1000pF CH	D606	001-0580-90	1SS352
C720	168-3332-78	0.033uF K	C806	166-1021-50	1000pF CH	D607	001-4305-19	UDZSTE-17 5.1B
C721	168-1032-55	0.01uF K	C807	166-1021-50	1000pF CH	D608	001-1315-90	HSM123TL-E
C722	046-1032-78	0.01uF B	C808	166-1021-50	1000pF CH	D609	001-1315-90	HSM123TL-E
C723	168-6812-55	680pF K	C809	045-4711-50	470P	D611	001-0580-90	1SS352
C724	046-1032-78	0.01uF B	C810	045-4711-50	470P	D613	001-0580-90	1SS352
C725	045-8201-50	82pF CH	C811	045-4711-50	470P	D614	001-0580-90	1SS352
C726	166-8211-50	820pF CH	C812	045-4711-50	470P	D701	001-0529-29	MA8051-M
C727	166-2201-50	22pF CH	C814	166-4711-50	470pF CH	D702	001-0580-90	1SS352
C729	045-1007-50	10pF CH	C816	046-1042-78	0.1uF	D703	001-0529-29	MA8051-M
C730	046-1042-78	0.1uF	C817	046-1042-78	0.1uF	D704	001-3218-90	1SV231
C731	046-1032-78	0.01uF B	C818	168-1042-78	16V 0.1uF K	D706	001-0535-90	MA729
C732	046-1042-78	0.1uF	C819	046-1042-78	0.1uF	D801	001-0524-90	HN2D01F
C734	046-4732-78	0.047uF	C820	042-1764-90	16V 100uF M	D802	001-0580-90	1SS352
C735	046-1032-78	0.01uF B	C821	046-1042-78	0.1uF	D810	001-0367-91	1SS226
C737	178-1052-78	1uF	C822	168-1042-78	16V 0.1uF K	D811	001-0367-91	1SS226
C739	046-1032-78	0.01uF B	C823	046-1042-78	0.1uF	D812	001-0367-91	1SS226
C740	046-1032-78	0.01uF B	C850	168-1042-78	16V 0.1uF K	D813	001-0367-91	1SS226
C741	178-1052-78	1uF	C873	042-1763-90	25V 47uF M	D818	001-4305-20	UDZSTE-17 5.6B
C742	046-1032-78	0.01uF B	C893	042-1750-90	16V 100uF M	D819	001-4305-20	UDZSTE-17 5.6B
C743	046-1032-78	0.01uF B	C902	042-1763-90	25V 47uF M	D820	001-4305-20	UDZSTE-17 5.6B
C744	178-1052-78	1uF	C904	168-1042-78	16V 0.1uF K	D821	001-4305-20	UDZSTE-17 5.6B
C745	178-1052-78	1uF	C906	042-1761-90	35V 22uF M	D822	001-4305-20	UDZSTE-17 5.6B
C746	178-1052-78	1uF	C907	042-1762-90	35V 4.7uF M	D823	001-4305-20	UDZSTE-17 5.6B
C747	042-1764-90	16V 100uF M	C909	168-1022-55	1000pF K	D824	001-4305-20	UDZSTE-17 5.6B
C748	178-1052-78	1uF	C917	168-2222-55	2200pF K	D825	001-4305-20	UDZSTE-17 5.6B
C749	168-4742-78	0.47uF K	C920	042-1761-90	35V 22uF M	D826	001-4305-20	UDZSTE-17 5.6B


REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D827	001-0580-90	1SS352	Q904	125-2026-91	UNR5211G	R731	033-2231-15	1/10W 22k ohm
D828	001-4305-20	UDZSTE-17 5.6B	R200	119-0000-05	1/10W 0 ohm JW	R732	033-4731-15	1/10W 47k ohm
D905	001-0580-90	1SS352	R202	119-0000-05	1/10W 0 ohm JW	R733	033-2231-15	1/10W 22k ohm
D906	001-0580-90	1SS352	R203	119-0000-05	1/10W 0 ohm JW	R734	033-1051-15	1/10W 1M ohm
D908	001-0580-90	1SS352	R501	119-1221-15	1/10W 1.2k ohm	R735	033-3931-15	1/10W 39k ohm
D909	001-0580-90	1SS352	R502	119-8211-15	1/10W 820 ohm	R736	032-0221-50	1/16W 43k ohm F
D910	001-2606-90	M1FS4	R503	119-1221-15	1/10W 1.2k ohm	R737	032-0140-99	1/10W 39k ohm F
D911	001-0580-90	1SS352	R504	119-8211-15	1/10W 820 ohm	R738	033-2231-15	1/10W 22k ohm
F600	060-8058-92	1.0A ERBSE1R00U	R505	119-1521-15	1/10W 1.5k ohm	R739	119-2221-15	1/10W 2.2k ohm
FIL901	060-3118-50	FK2125T25	R506	119-1521-15	1/10W 1.5k ohm	R740	032-0140-99	1/10W 39k ohm F
IC601	051-3926-90	OZ964ISN	R507	119-8211-15	1/10W 820 ohm	R741	032-0150-53	1/16W 33k ohm F
IC701	051-7294-90	TC7SET32FU-EL	R508	119-2721-15	1/10W 2.7k ohm	R742	119-1011-15	1/10W 100 ohm
IC702	051-7269-08	SN74AHC2G53HDCTR	R509	119-1521-15	1/10W 1.5k ohm	R743	119-1011-15	1/10W 100 ohm
IC703	051-5313-10	IR3Y29BM	R601	119-1021-15	1/10W 1k ohm	R744	119-1011-15	1/10W 100 ohm
IC704	051-1292-90	NJM4565M-D	R602	119-1021-15	1/10W 1k ohm	R745	119-3351-15	1/10W 3.3M ohm
IC705	051-7243-18	TC7SET08FU-TE85L,F	R603	119-1021-15	1/10W 1k ohm	R746	033-5621-15	1/10W 5.6k ohm
IC706	051-7293-90	TC7SET125FU-TE85L	R604	119-1021-15	1/10W 1k ohm	R747	119-0000-05	1/10W 0 ohm JW
IC707	051-7262-48	TC7WH14FU-TE12L,F	R608	032-0140-54	1/10W 22k ohm F	R748	033-8221-15	1/10W 8.2k ohm
IC708	051-6443-00	TC200G02AF-0104	R609	116-8211-15	1/4W 820 ohm	R749	119-3311-15	1/10W 330 ohm
IC709	051-3025-90	NJM2107F	R610	119-5131-15	1/10W 51k ohm	R750	032-0140-99	1/10W 39k ohm F
IC801	052-7066-01	M30102M2-561FP	R611	119-1031-15	1/10W 10k ohm	R751	119-5621-15	1/10W 5.6k ohm
IC854	051-3351-90	BA033CC0FP-E2	R614	119-2201-15	1/10W 22 ohm	R752	032-0150-50	1/16W 10k ohm F
IC902	051-3913-90	NJM2368E	R616	119-5131-15	1/10W 51k ohm	R753	033-5621-15	1/10W 5.6k ohm
J500	074-2212-62	12P	R617	032-0140-17	1/10W 270k ohm F	R754	032-0140-79	1/10W 2.7k ohm F
J501	074-2212-62	12P	R618	032-0140-00	1/10W 56k ohm F	R755	119-1521-15	1/10W 1.5k ohm
J701	074-2225-90	40P	R619	032-0140-19	1/10W 75k ohm F	R756	119-2221-15	1/10W 2.2k ohm
J702	074-2241-80	30P	R622	119-1051-15	1/10W 1M ohm	R757	119-1011-15	1/10W 100 ohm
J801	074-2225-62	12P	R623	119-2431-15	1/10W 24k ohm	R758	032-0140-54	1/10W 22k ohm F
J802	074-2225-62	12P	R624	119-1031-15	1/10W 10k ohm	R759	032-0140-89	1/10W 47k ohm F
J803	074-2219-54	4P	R625	119-1031-15	1/10W 10k ohm	R760	033-1031-15	1/10W 10k ohm
L600	010-3059-90	200 ohm FILTER	R626	119-1051-15	1/10W 1M ohm	R761	119-9111-15	1/10W 910 ohm
L701	010-3406-71	56uH J	R627	119-4711-15	1/10W 470 ohm	R762	033-5621-15	1/10W 5.6k ohm
L702	010-3406-66	22uH J	R628	119-1831-15	1/10W 18k ohm	R763	033-5621-15	1/10W 5.6k ohm
L703	010-3406-68	33uH J	R632	032-0140-50	1/10W 10k ohm F	R764	033-6821-15	1/10W 6.8k ohm
L704	010-3406-68	33uH J	R639	116-8211-15	1/4W 820 ohm	R765	033-1831-15	1/10W 18k ohm
L705	010-3407-68	33uH J	R640	119-2021-15	1/10W 2k ohm	R766	119-1011-15	1/10W 100 ohm
L706	010-3407-62	10uH J	R641	119-2711-15	1/10W 270 ohm	R768	119-1011-15	1/10W 100 ohm
L707	010-3407-62	10uH J	R642	119-4731-15	1/10W 47k ohm	R769	119-0000-05	1/10W 0 ohm JW
L708	010-3407-62	10uH J	R643	119-1031-15	1/10W 10k ohm	R771	032-0140-75	1/10W 1.5k ohm F
L709	010-3406-59	5.6uH J	R644	119-4731-15	1/10W 47k ohm	R774	119-6811-15	1/10W 680 ohm
L800	010-3406-59	5.6uH J	R645	119-1031-15	1/10W 10k ohm	R776	119-1011-15	1/10W 100 ohm
L902	010-3010-50	100uH	R646	119-5151-15	1/10W 5.1M ohm	R777	119-1011-15	1/10W 100 ohm
L903	010-3406-74	100uH J	R647	119-0000-05	1/10W 0 ohm JW	R778	119-1021-15	1/10W 1k ohm
L904	010-3406-74	100uH J	R648	119-0000-05	1/10W 0 ohm JW	R779	119-1021-15	1/10W 1k ohm
L905	010-3415-90	100uH M	R650	119-0000-05	1/10W 0 ohm JW	R780	119-1021-15	1/10W 1k ohm
L906	010-3406-74	100uH J	R701	119-6811-15	1/10W 680 ohm	R782	033-4721-15	1/10W 4.7k ohm
L907	010-3406-74	100uH J	R703	119-1021-15	1/10W 1k ohm	R784	119-0000-05	1/10W 0 ohm JW
L908	010-4051-90	19.8uH	R704	119-1021-15	1/10W 1k ohm	R785	032-0221-51	1/16W 4.7k ohm F
P901	076-0529-02	2P	R705	033-1031-15	1/10W 10k ohm	R786	032-0140-79	1/10W 2.7k ohm F
Q1	125-2026-91	UNR5211G	R706	033-3341-15	1/10W 330k ohm	R789	033-4731-15	1/10W 47k ohm
Q2	125-2026-91	UNR5211G	R707	033-5641-15	1/10W 560k ohm	R791	033-6831-15	1/10W 68k ohm
Q3	125-2026-91	UNR5211G	R708	119-2221-15	1/10W 2.2k ohm	R792	033-1531-15	1/10W 15k ohm
Q601	190-1162-00	2SA1162	R709	119-1011-15	1/10W 100 ohm	R793	119-3301-15	1/10W 33 ohm
Q602	125-9023-90	TPCF8402TE85L,F	R710	032-0150-50	1/16W 10k ohm F	R794	033-1051-15	1/10W 1M ohm
Q603	125-9023-90	TPCF8402TE85L,F	R711	119-2431-15	1/10W 24k ohm	R795	033-6831-15	1/10W 68k ohm
Q604	192-4081-00	2SC4081	R712	033-1031-15	1/10W 10k ohm	R796	032-0150-56	1/16W 27k ohm F
Q607	125-8016-90	RK7002	R713	119-1231-15	1/10W 12k ohm	R797	032-0140-89	1/10W 47k ohm F
Q608	125-8016-90	RK7002	R714	033-2231-15	1/10W 22k ohm	R798	032-0140-89	1/10W 47k ohm F
Q609	192-4081-00	2SC4081	R715	033-2231-15	1/10W 22k ohm	R799	033-1531-15	1/10W 15k ohm
Q610	192-4081-00	2SC4081	R716	033-2231-15	1/10W 22k ohm	R800	119-2211-15	1/10W 220 ohm
Q611	192-4081-00	2SC4081	R717	033-2731-15	1/10W 27k ohm	R801	119-3321-15	1/10W 3.3k ohm
Q705	192-4081-00	2SC4081	R718	119-4321-15	1/10W 4.3k ohm	R802	119-4711-15	1/10W 470 ohm
Q706	190-1738-00	2SA1738	R719	032-0140-12	1/10W 75 ohm F	R803	119-4711-15	1/10W 470 ohm
Q708	192-3265-00	2SC3265	R720	032-0140-12	1/10W 75 ohm F	R804	119-2211-15	1/10W 220 ohm
Q709	190-1298-00	2SA1298	R721	032-0140-80	1/10W 18k ohm F	R809	119-1051-15	1/10W 1M ohm
Q710	190-1298-00	2SA1298	R722	033-3341-15	1/10W 330k ohm	R810	119-3321-15	1/10W 3.3k ohm
Q711	192-3265-00	2SC3265	R723	032-0140-12	1/10W 75 ohm F	R811	033-4731-15	1/10W 47k ohm
Q715	192-4118-00	2SC4118	R724	119-1521-15	1/10W 1.5k ohm	R812	119-1021-15	1/10W 1k ohm
Q803	125-2027-94	DTC123JUA	R725	119-5611-15	1/10W 560 ohm	R814	119-5121-15	1/10W 5.1k ohm
Q804	125-0020-94	UNR511M	R726	119-1021-15	1/10W 1k ohm	R815	033-2231-15	1/10W 22k ohm
Q805	125-0020-94	UNR511M	R727	033-2221-15	1/10W 2.2k ohm	R816	033-2231-15	1/10W 22k ohm
Q806	125-2027-94	DTC123JUA	R728	033-3931-15	1/10W 39k ohm	R817	119-6811-15	1/10W 680 ohm
Q807	125-0025-93	RN2303	R729	033-2231-15	1/10W 22k ohm	R818	119-2211-15	1/10W 220 ohm
Q903	192-2873-00	2SC2873	R730	033-3931-15	1/10W 39k ohm	R819	119-2211-15	1/10W 220 ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R821	119-0000-05	1/10W 0 ohm JW	R942	119-1011-15	1/10W 100 ohm	T901	007-1168-90	TR11-A-S
R822	119-0000-05	1/10W 0 ohm JW	R943	119-3311-15	1/10W 330 ohm	VR701	012-6009-58	33k ohm B VR
R895	119-1811-15	1/10W 180 ohm	R945	119-0000-05	1/10W 0 ohm JW	VR703	012-6009-58	33k ohm B VR
R896	119-2231-15	1/10W 22k ohm	R947	119-2211-15	1/10W 220 ohm	VR704	012-6009-58	33k ohm B VR
R900	119-1031-15	1/10W 10k ohm	R949	119-0000-05	1/10W 0 ohm JW	VR705	012-6009-58	33k ohm B VR
R901	119-1001-15	1/10W 10 ohm	S501	013-6312-50	SKRP-ABE-010	VR706	012-6009-56	10k ohm B VR
R902	119-1841-15	1/10W 180k ohm	S502	013-6312-50	SKRP-ABE-010	VR707	012-6009-58	33k ohm B VR
R903	119-1031-15	1/10W 10k ohm	S503	013-6312-50	SKRP-ABE-010	VR709	012-6009-56	10k ohm B VR
R905	119-6841-15	1/10W 680k ohm	S504	013-6312-50	SKRP-ABE-010	VR710	012-6009-57	22k ohm B VR
R908	119-3931-15	1/10W 39k ohm	S505	013-6312-50	SKRP-ABE-010	VR711	012-6009-53	2.2k ohm B VR
R911	033-1031-15	1/10W 10k ohm	S506	013-6312-50	SKRP-ABE-010	VR901	012-6009-52	1k ohm B VR
R916	119-3311-15	1/10W 330 ohm	S507	013-6312-50	SKRP-ABE-010	X700	061-3524-90	4.433618MHz
R918	119-6841-15	1/10W 680k ohm	S508	013-6312-50	SKRP-ABE-010	X701	061-3520-95	3.57945MHz
R923	119-2431-15	1/10W 24k ohm	S509	013-6312-50	SKRP-ABE-010	X801	060-1531-90	4.91MHz
R924	119-2221-15	1/10W 2.2k ohm	S510	013-6312-50	SKRP-ABE-010	PWB	039-3497-00	PWB(WITHOUT COMPONENTS)
R938	119-3621-15	1/10W 3.6k ohm	S511	013-6312-50	SKRP-ABE-010			
R939	119-4711-15	1/10W 470 ohm	S512	013-6312-50	SKRP-ABE-010			
R940	033-1831-15	1/10W 18k ohm	S513	013-6312-50	SKRP-ABE-010			
R941	119-1821-15	1/10W 1.8k ohm	T601	007-1183-90	BLC4126			

CONNECTOR PWB(B5) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
J102	074-4042-00	4P	P101	076-3037-58	8P	PWB	039-3490-00	PWB(WITHOUT COMPONENTS)

EXPLODED VIEW/PARTS LIST

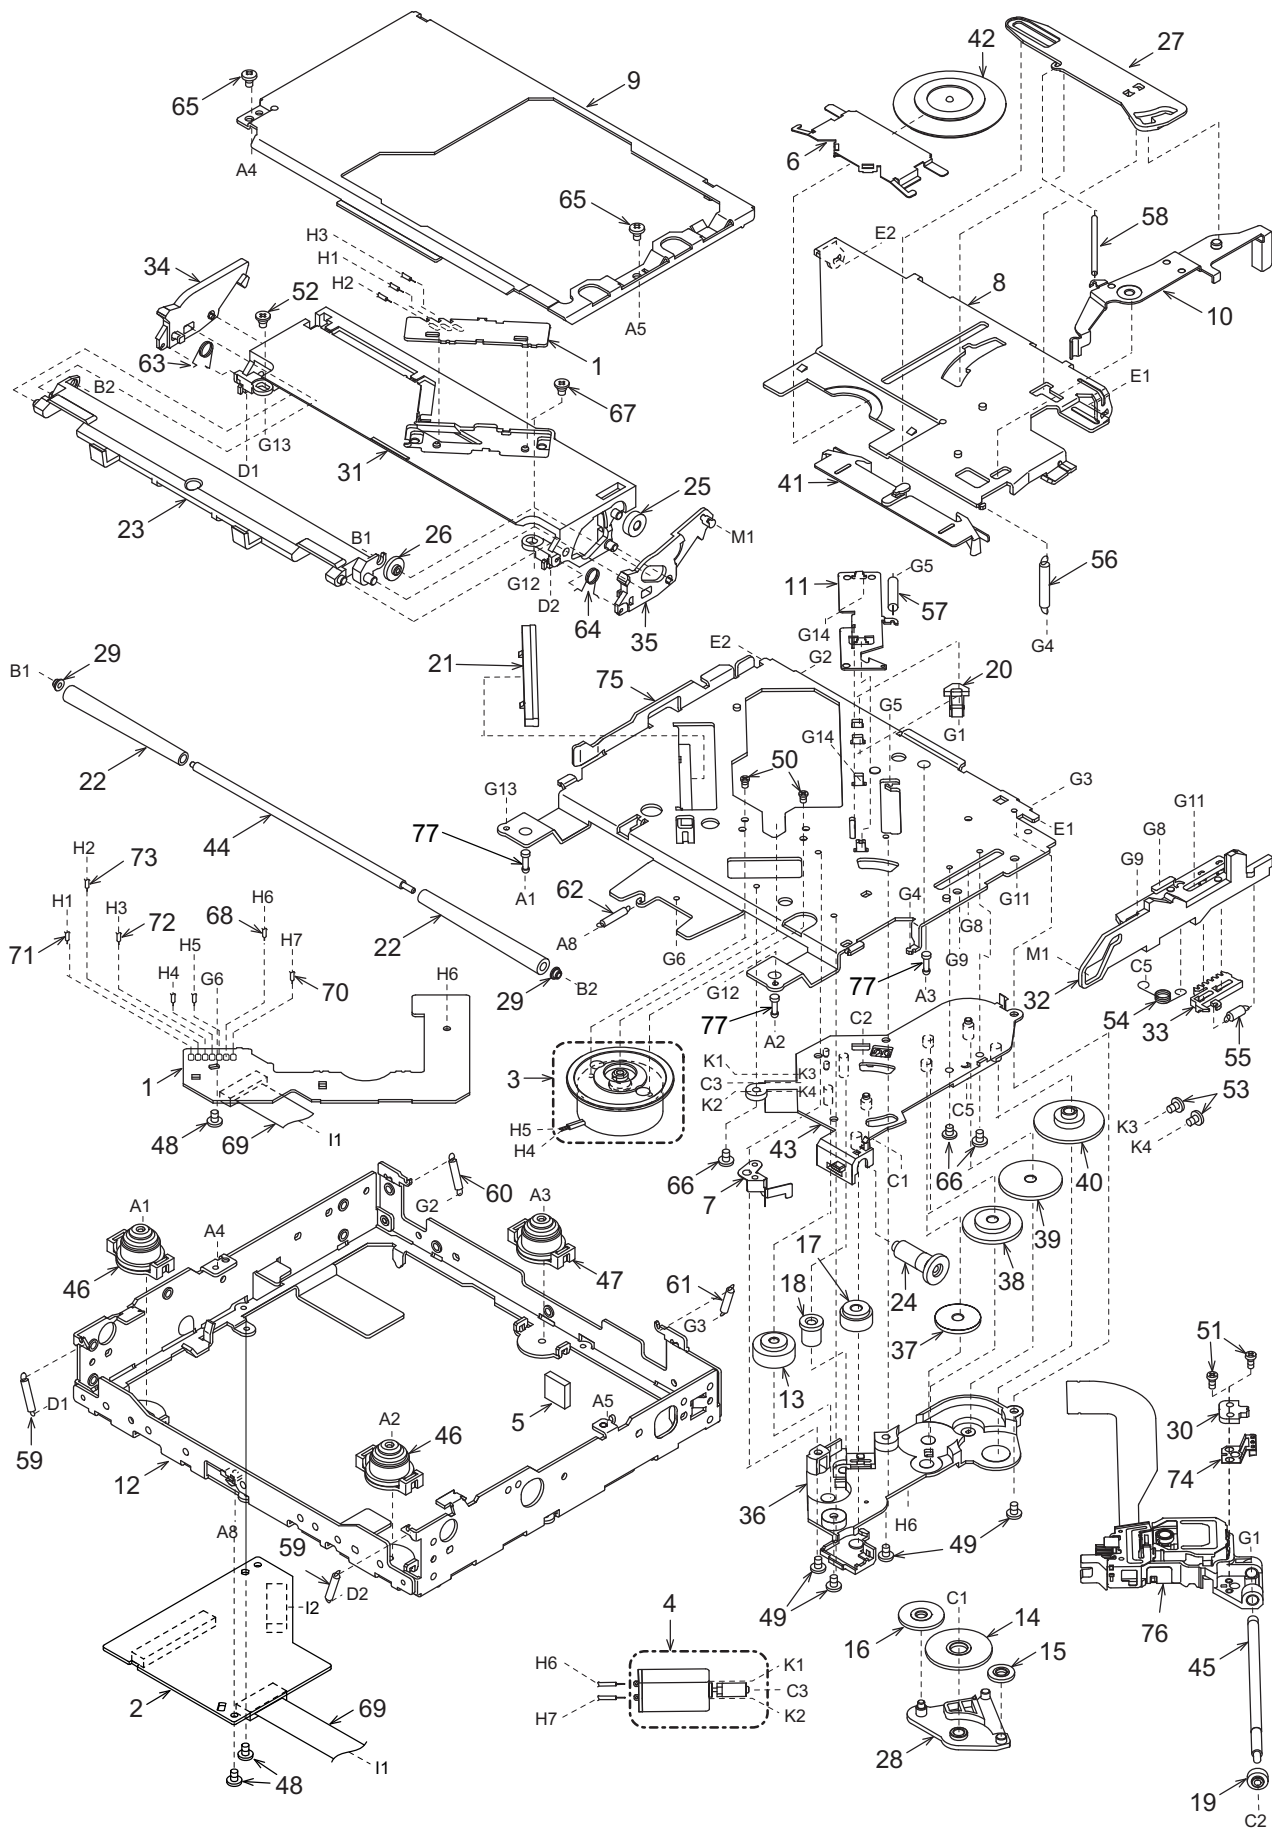

NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	SENSOR PWB	1
2	-----	CD PWB	1
3	SMA-182-100	SPINDLE MOTOR-ASSY	1
4	SMA-183-100	SLED MOTOR-ASSY	1
5	345-5476-20	CUSHION RUBBER	1
6	620-1023-23	CLAMPER PLATE	1
7	620-1026-21	SPRING PLATE	1
8	620-1596-23	CLAMPER LINK	1
9	620-1862-20	UPPER CHASSIS	1
10	620-1752-20	SENSOR ARM	1
11	620-1753-20	ID-LOCK PLATE	1
12	620-1868-20	LOWER CHASSIS	1
13	621-0608-21	SECOND GEAR	1
14	621-0609-20	BASE GEAR	1
15	621-0610-20	IDLE GEAR A	1
16	621-0611-20	IDLE GEAR B	1
17	621-0612-21	ROLLER GEAR A	1
18	621-0620-20	THREAD GEAR A	1
19	621-0621-20	THREAD GEAR B	1
20	621-0623-23	LS-HOLDER	1
21	621-0624-22	GUIDE RAIL	1
22	621-0711-21	LOADING ROLLER	2
23	621-0718-21	ROLLER GUIDE	1
24	621-0719-20	ROLLER GEAR B	1
25	621-0720-20	ROLLER GEAR C	1
26	621-0721-20	ROLLER GEAR D	1
27	621-0728-20	STOPPER LINK	1
28	621-1719-20	IDLE CASE	1
29	621-1726-20	ROLLER SLEEVE	2
30	621-1729-20	SH-BASE	1
31	621-1742-20	UPPER GUIDE	1
32	621-1743-20	SHIFT LEVER	1
33	621-1744-20	RACK	1
34	621-1745-20	LOCK ARM L	1
35	621-1746-20	LOCK ARM R	1
36	621-1747-20	GEAR COVER	1
37	621-1748-20	POWER GEAR A	1
38	621-1749-20	POWER GEAR B	1
39	621-1750-20	POWER GEAR C	1

NO.	PART NO.	DESCRIPTION	Q'TY
40	621-1751-20	POWER GEAR D	1
41	621-1752-20	DISC STOPPER	1
42	621-1753-20	CLAMPER RING	1
43	621-1754-20	GEAR BASE	1
44	622-1571-21	ROLLER SHAFT	1
45	624-0020-00	LEAD SCREW	1
46	629-0086-20	DAMPER F	2
47	629-0087-20	DAMPER R	1
48	716-1507-01	SCREW(M2x3)	3
49	716-1670-01	SCREW(M2x4)	4
50	716-1733-01	SCREW(M1.7x2.3)	2
51	716-3469-01	SCREW(1.7x4)	2
52	716-3473-01	SCREW(M2x3)	1
53	716-3551-00	SCREW(M1.4x2.5)	2
54	750-7865-20	SHIFT SPRING	1
55	750-7866-20	RACK SPRING	1
56	750-7867-20	CLAMPER SPRING	1
57	750-7868-20	ID-LOCK SPRING	1
58	750-7869-20	SENSOR SPRING	1
59	750-7870-20	DR-SPRING F	2
60	750-7871-20	DR-SPRING RA	1
61	750-7872-20	DR-SPRING RB	1
62	750-7873-20	DR-SPRING C	1
63	750-6797-20	ROLLER SPRING L	1
64	750-6798-20	ROLLER SPRING R	1
65	714-2003-8B	SCREW(M2x3)	2
66	780-2025-00	SCREW(M2x2.5)	3
67	781-1730-00	SCREW(M1.7x3)	1
68	803-4906-60	VINYL-COAT-WIRE(ORG)	1
69	816-2542-06	FLAT WIRE	1
70	816-2590-00	VINYL-COAT-WIRE(GRN)	1
71	816-2591-00	VINYL-COAT-WIRE(YEL)	1
72	816-2592-00	VINYL-COAT-WIRE(BLUE)	1
73	816-2593-00	VINYL-COAT-WIRE(PUR)	1
74	966-1722-20	SH-RACK-ASSY	1
75	620-1866-20	DRIVE-PLATE	1
76	969-0075-31	PICKUP-ASSY	1
77	622-1570-21	DAMPER PIN	3

ELECTRICAL PARTS LIST

CD PWB(BM1) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C2	178-1052-78	1uF	C60	168-1042-78	16V 0.1uF	R13	119-8231-15	1/10W 82k ohm
C3	042-0627-90	16V 100uF	C63	168-1042-78	16V 0.1uF	R14	119-1531-15	1/10W 15k ohm
C4	168-1042-78	16V 0.1uF	C64	042-1709-90	6.3V 47uF	R15	119-8231-15	1/10W 82k ohm
C6	178-1052-78	1uF	C66	168-1042-78	16V 0.1uF	R16	119-4731-15	1/10W 47k ohm
C7	042-0560-85	6.3V 100uF	C68	168-1042-78	16V 0.1uF	R17	119-0000-05	1/10W 0 ohm JW
C8	178-1052-78	1uF	C69	042-1710-90	6.3V 100uF	R19	119-0000-05	1/10W 0 ohm JW
C9	166-4711-50	470pF CH	C74	042-1709-90	6.3V 47uF	R20	119-0000-05	1/10W 0 ohm JW
C10	168-4732-78	0.047uF K	C75	168-1042-78	16V 0.1uF	R22	119-2231-15	1/10W 22k ohm
C11	166-4711-50	470pF CH	C77	168-1042-78	16V 0.1uF	R23	119-0000-05	1/10W 0 ohm JW
C12	168-4732-78	0.047uF K	C78	168-1022-55	1000pF K	R25	119-1041-15	1/10W 100k ohm
C14	168-1042-78	16V 0.1uF	C79	168-1022-55	1000pF K	R26	119-0000-05	1/10W 0 ohm JW
C15	166-1007-50	10pF CH	C80	042-0423-20	10V-10uF	R27	119-4731-15	1/10W 47k ohm
C16	166-1007-50	10pF CH	C81	168-1042-78	16V 0.1uF	R29	119-5621-15	1/10W 5.6k ohm
C17	168-1042-78	16V 0.1uF	D1	001-1305-90	DAN217UT106	R30	119-2231-15	1/10W 22k ohm
C18	168-2222-55	2200pF K	IC1	051-6733-00	TC94A73MFG-201	R31	119-4731-15	1/10W 47k ohm
C19	168-1042-78	16V 0.1uF	IC2	051-6079-80	BA5830FM-E2	R32	119-3341-15	1/10W 330k ohm
C20	168-1042-78	16V 0.1uF	IC3	051-3395-90	NJU7780U1-15-TES	R33	119-1041-15	1/10W 100k ohm
C22	168-6822-55	6800pF K	IC4	051-3396-90	NJM2386ADL3-33-TE1	R34	119-1041-15	1/10W 100k ohm
C24	168-3332-78	0.033uF K	J1	074-2215-65	SOCKET (15P)	R35	119-1041-15	1/10W 100k ohm
C25	168-3332-78	0.033uF K	J2	074-2215-60	SOCKET (10P)	R36	119-1011-15	1/10W 100 ohm
C26	043-0570-90	16V 2.2uF K	J3	074-2209-88	SOCKET (38P)	R38	119-1041-15	1/10W 100k ohm
C28	168-1042-78	16V 0.1uF	L1	119-0000-05	1/10 0ohm JW	R39	119-0000-05	1/10W 0 ohm JW
C29	168-1042-78	16V 0.1uF	L2	119-0000-05	1/10 0ohm JW	R41	119-4721-15	1/10W 4.7k ohm
C30	168-1042-78	16V 0.1uF	L3	119-0000-05	1/10 0ohm JW	R42	119-4721-15	1/10W 4.7k ohm
C31	168-1042-78	16V 0.1uF	L4	010-3104-50	30ohm/100MHz	R44	119-4731-15	1/10W 47k ohm
C33	168-1042-78	16V 0.1uF	L5	010-3406-66	22uH J	R45	119-1031-15	1/10W 1k ohm
C34	168-1042-78	16V 0.1uF	Q1	131-1188-50	2SB1188 Q,R	R48	119-1031-15	1/10W 10k ohm
C35	168-5622-55	5600pF K	Q2	198-3018-00	2SK3018	R49	119-1031-15	1/10W 10k ohm
C36	168-1042-78	16V 0.1uF	Q3	198-3018-00	2SK3018	R50	119-2211-15	1/10W 220 ohm
C37	168-5622-55	5600pF K	Q4	192-4155-51	2SC4155A S,T	R51	119-1031-15	1/10W 10k ohm
C38	166-6801-50	68pF	Q5	198-3018-00	2SK3018	R52	119-1031-15	1/10W 10k ohm
C39	168-1042-78	16V 0.1uF	Q6	192-4155-51	2SC4155A S,T	R53	119-2211-15	1/10W 220 ohm
C40	168-1532-55	0.015uF K	Q7	198-3018-00	2SK3018	R54	119-3331-15	1/10W 33k ohm
C41	168-1042-78	16V 0.1uF	Q8	198-3018-00	2SK3018	R56	119-3331-15	1/10W 33k ohm
C42	168-1032-55	0.01uF K	R1	119-2211-15	1/10W 220 ohm	R58	119-3331-15	1/10W 33k ohm
C43	168-1042-78	16V 0.1uF	R2	117-6811-15	1/8W 680 ohm	R60	119-3331-15	1/10W 33k ohm
C44	168-1042-78	16V 0.1uF	R3	117-0000-05	1/8W 0 ohm JW	R62	119-3331-15	1/10W 33k ohm
C46	168-1522-55	1500pF K	R4	119-1001-15	1/10W 10 ohm	R64	119-1051-15	1/10W 1M ohm
C47	168-3322-55	3300pF K	R5	119-2731-15	1/10W 27k ohm	R65	119-4701-15	1/10W 47 ohm
C48	168-1032-55	0.01uF K	R6	119-2731-15	1/10W 27k ohm	R66	119-1051-15	1/10W 1M ohm
C49	168-1042-78	16V 0.1uF	R7	119-2221-15	1/10W 2.2k ohm	R68	119-1031-15	1/10W 10k ohm
C54	168-1532-55	0.015uF K	R8	119-2731-15	1/10W 27k ohm	TM1	073-0768-90	TERMINAL
C55	168-1042-78	16V 0.1uF	R9	119-2731-15	1/10W 27k ohm	X1	061-3534-90	16.92MHz
C56	168-1042-78	16V 0.1uF	R10	119-1051-15	1/10W 1M ohm	PWB	039-3205-01	PWB(WITHOUT COMPONENTS)
C58	166-6097-50	6pF CH	R11	119-2211-15	1/10W 220 ohm			
C59	166-4701-50	47pF CH						

SENSOR PWB(BM2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D1	001-7058-90	AN1105W-RR	Q1	060-4015-91	PS1192HB-32-TR	S2	013-7413-50	LIMIT
D2	001-7058-90	AN1105W-RR	Q2	060-4015-91	PS1192HB-32-TR	PWB	039-2675-20	PWB(WITHOUT COMPONENTS)
J1	074-2215-60	SOCKET (10P)	S1	013-7414-50	CHUCKING			