
Pa700 **F**ull **V**iew

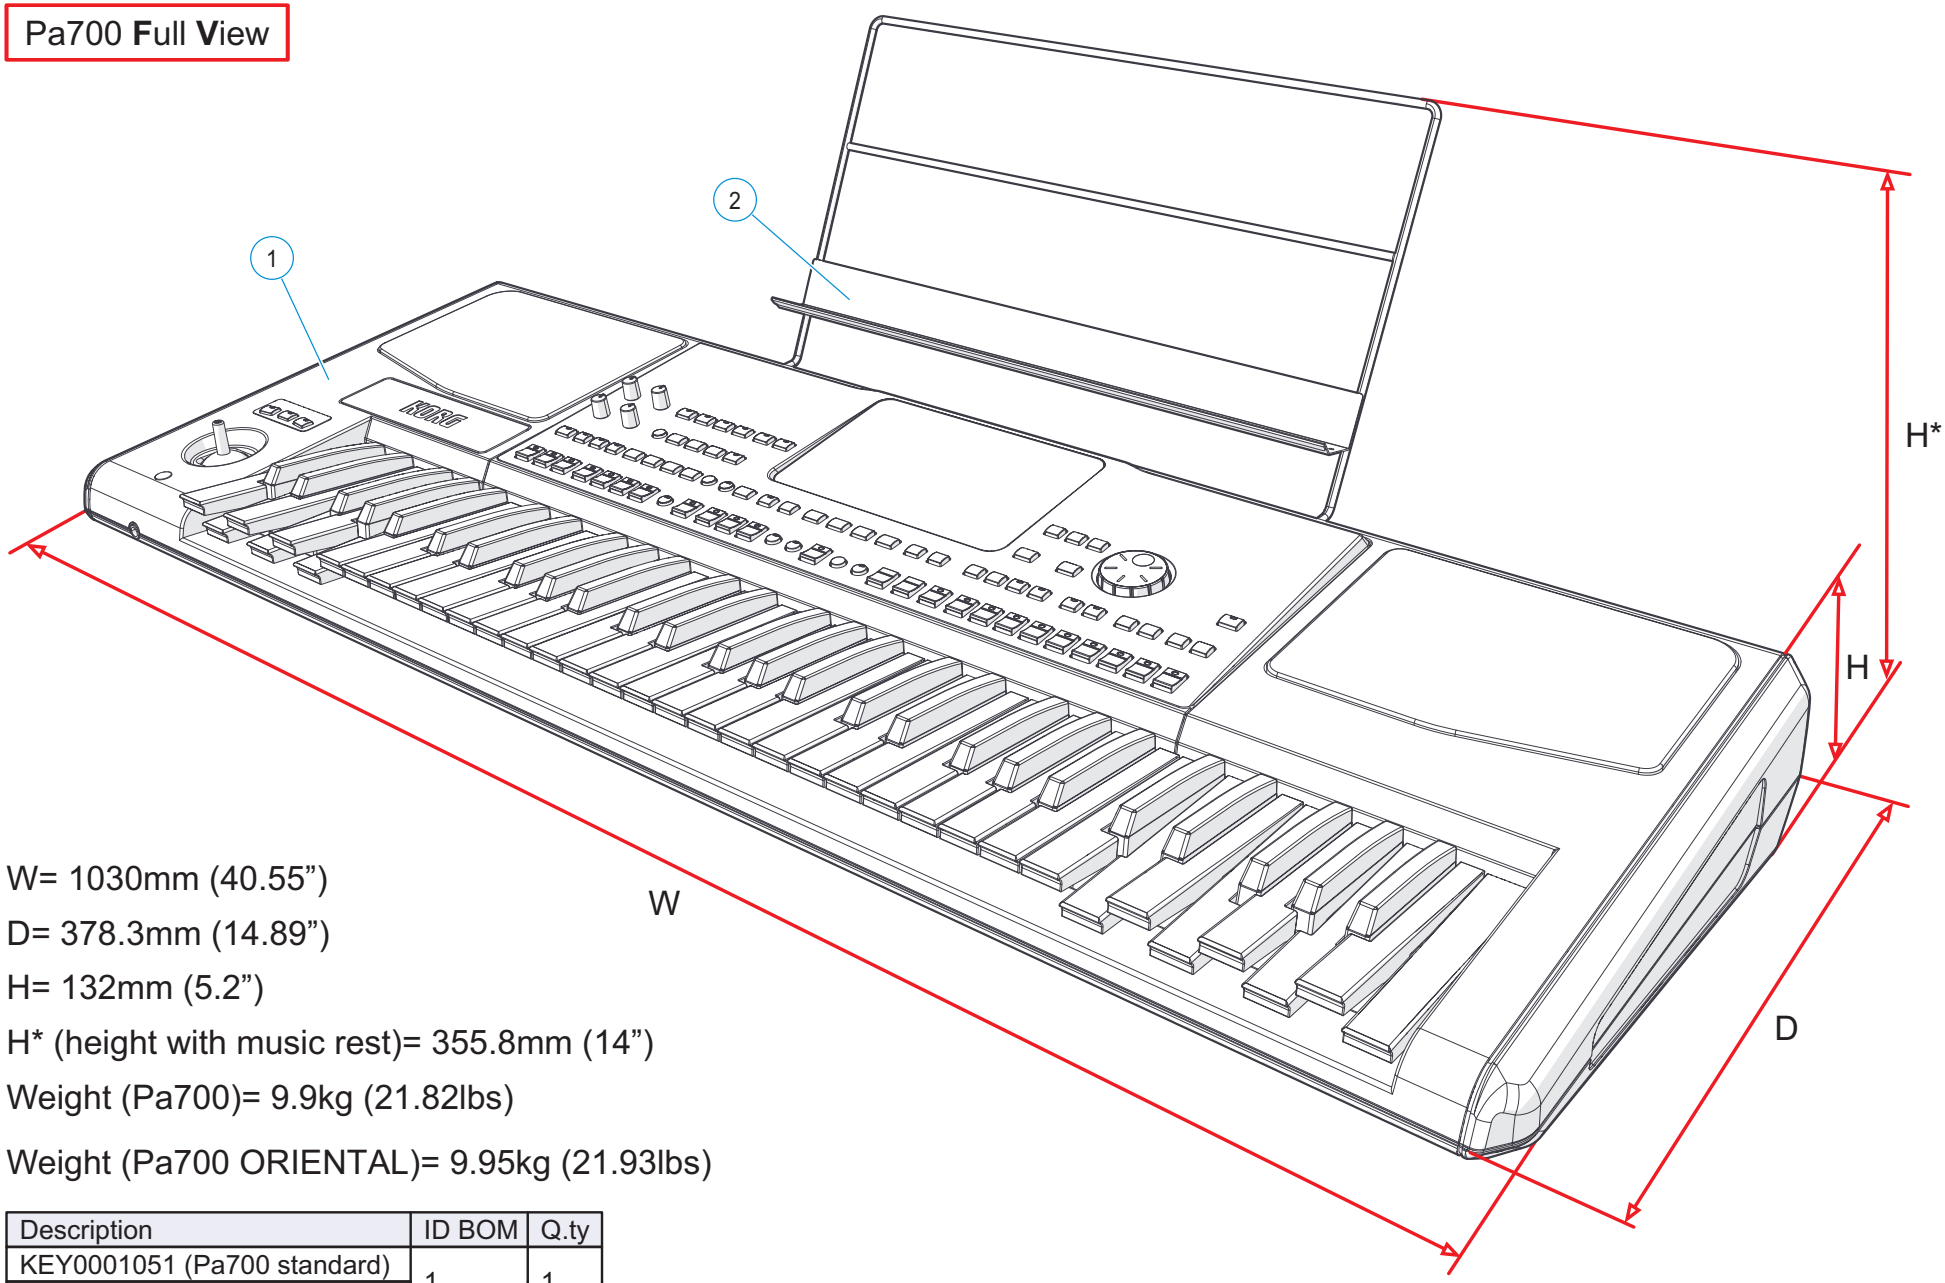

W= 1030mm (40.55”)

D= 378.3mm (14.89”)

H= 132mm (5.2”)


H* (height with music rest)= 355.8mm (14”)


Weight (Pa700)= 9.9kg (21.82lbs)


Weight (Pa700 ORIENTAL)= 9.95kg (21.93lbs)

Description	ID BOM	Q.ty
KEY0001051 (Pa700 standard)	1	1
KEY0001055 (Pa700 oriental)		
FER0010413	2	1

Pa700 **D**isassembly (up to s.n. 39999)

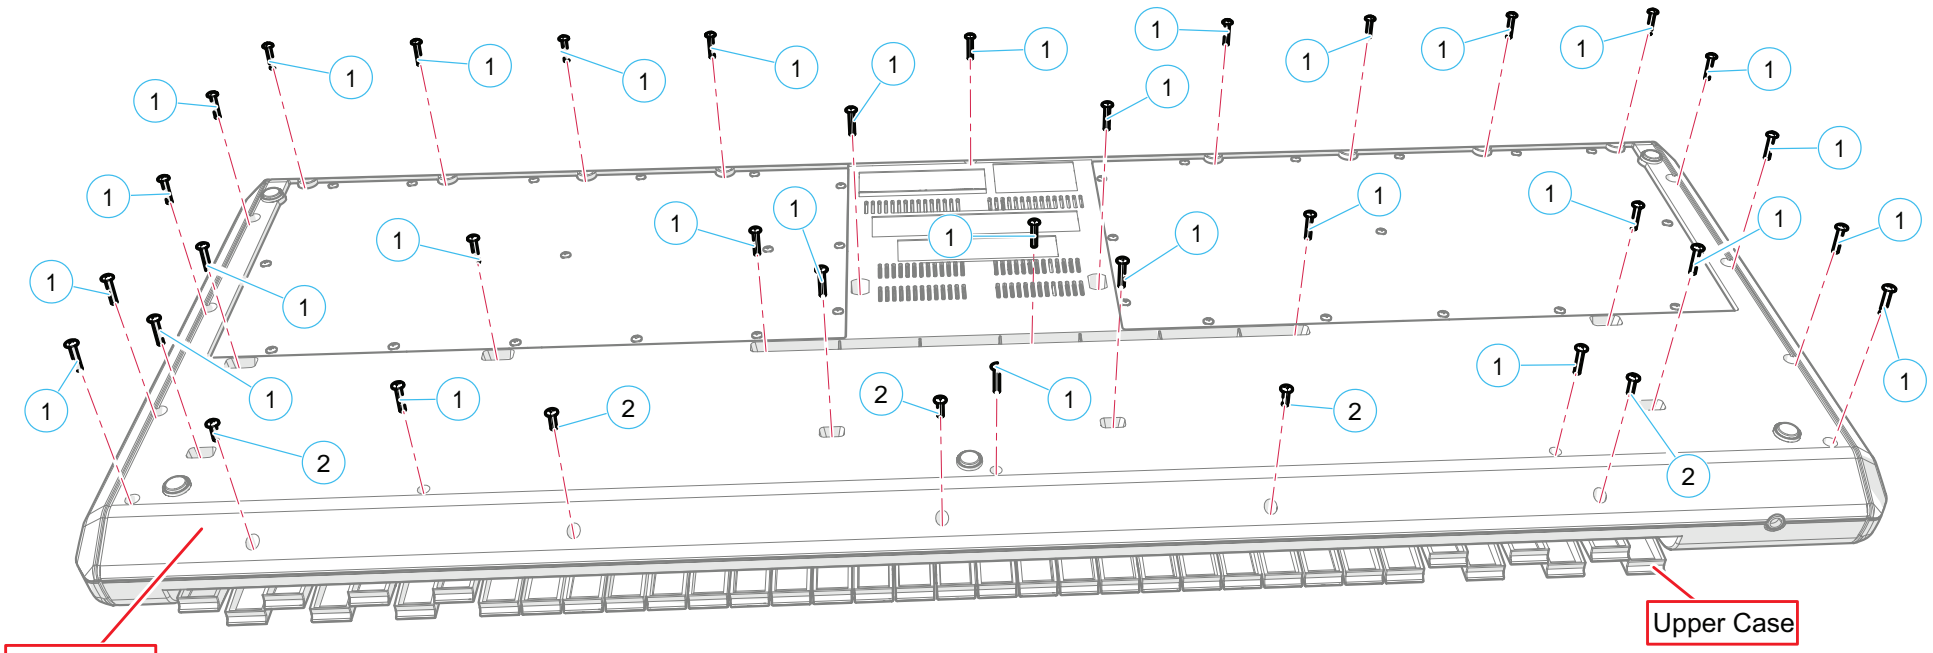


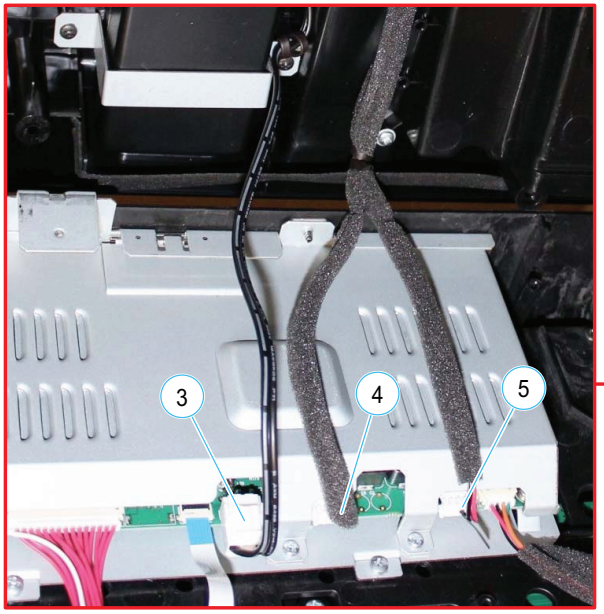


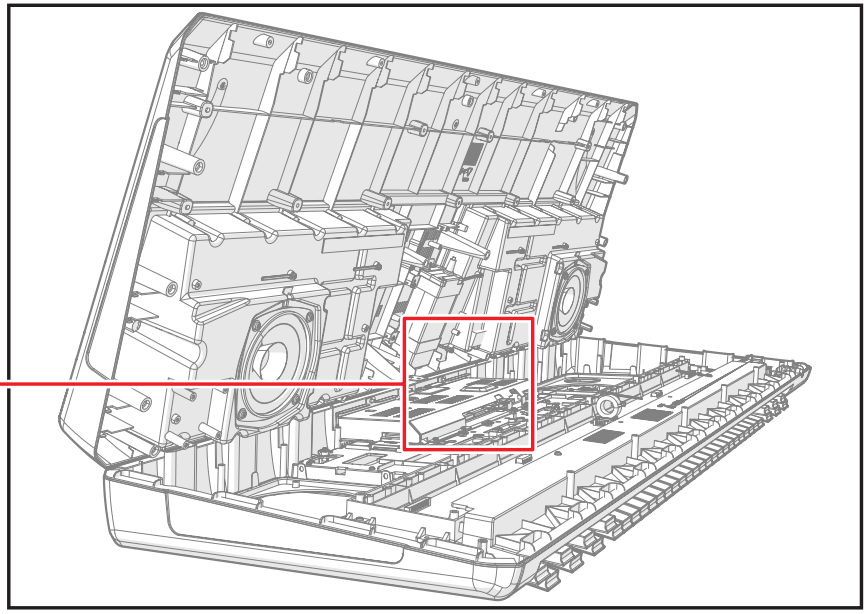


Description	ID BOM	Q.ty
VTA8010025	1	32
VTA8010026	2	5
KIT0001043	3	1
CAV0010223	4	1
CAV0010224	5	1

Pa700 **D**isassembly (from s.n. 40000)

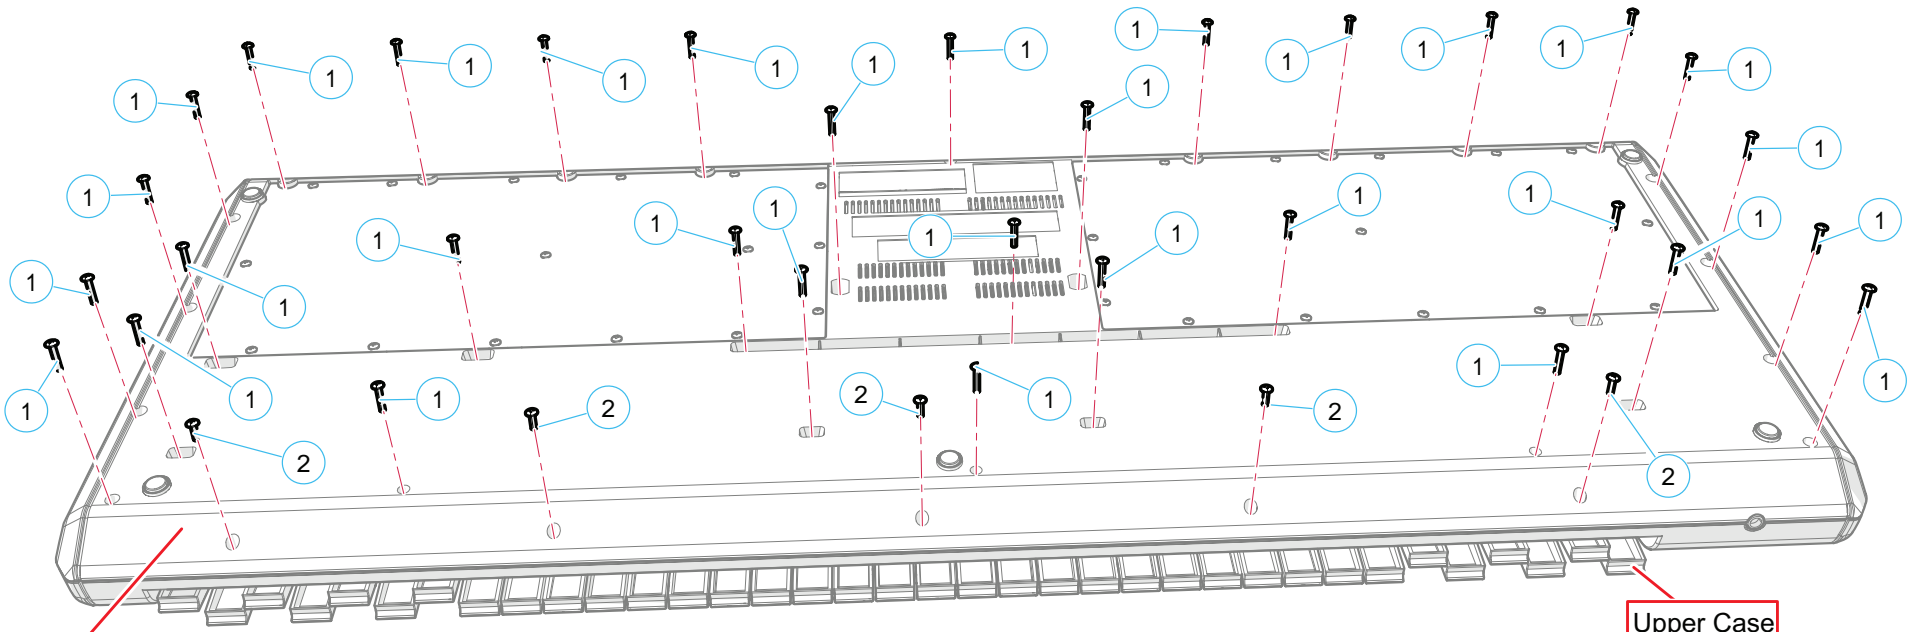


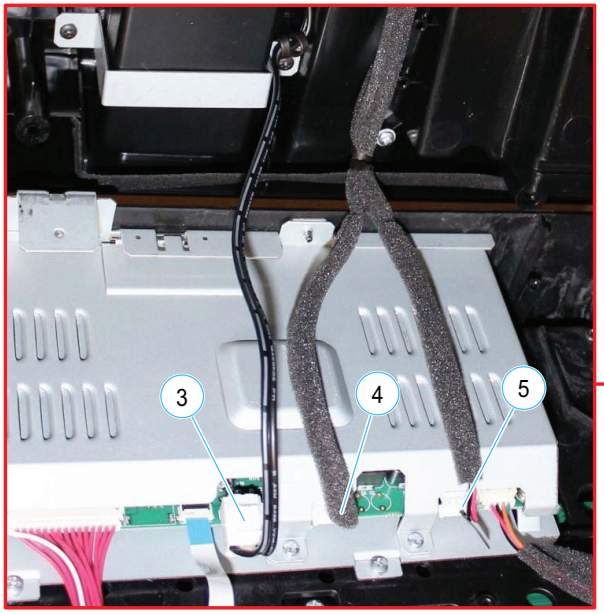


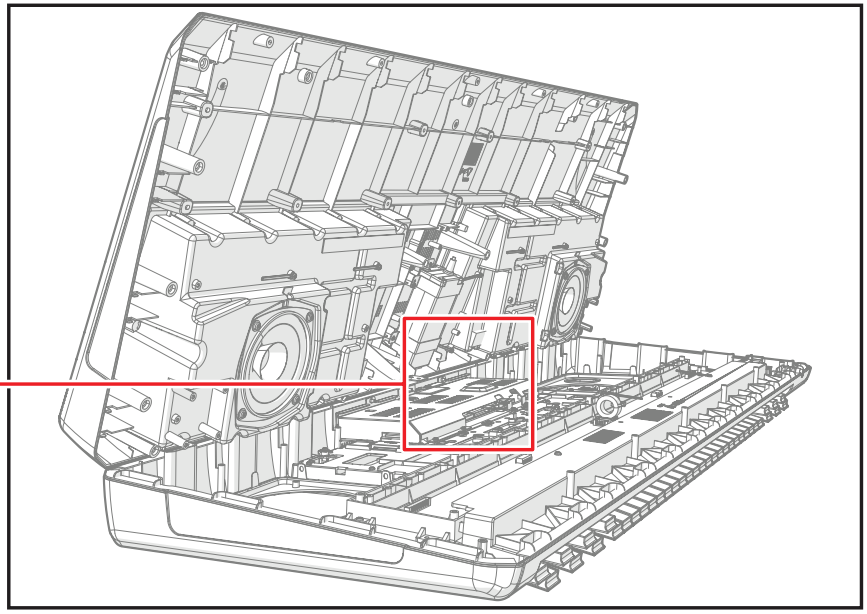


Description	ID BOM	Q.ty
VTA8010036	1	32
VTA8010026	2	5
KIT0001043	3	1
CAV0010223	4	1
CAV0010224	5	1


Lower Case Disassembly 1

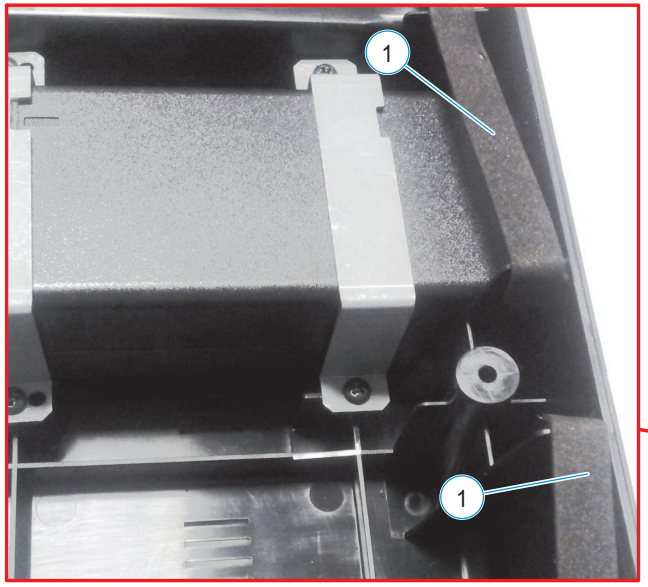

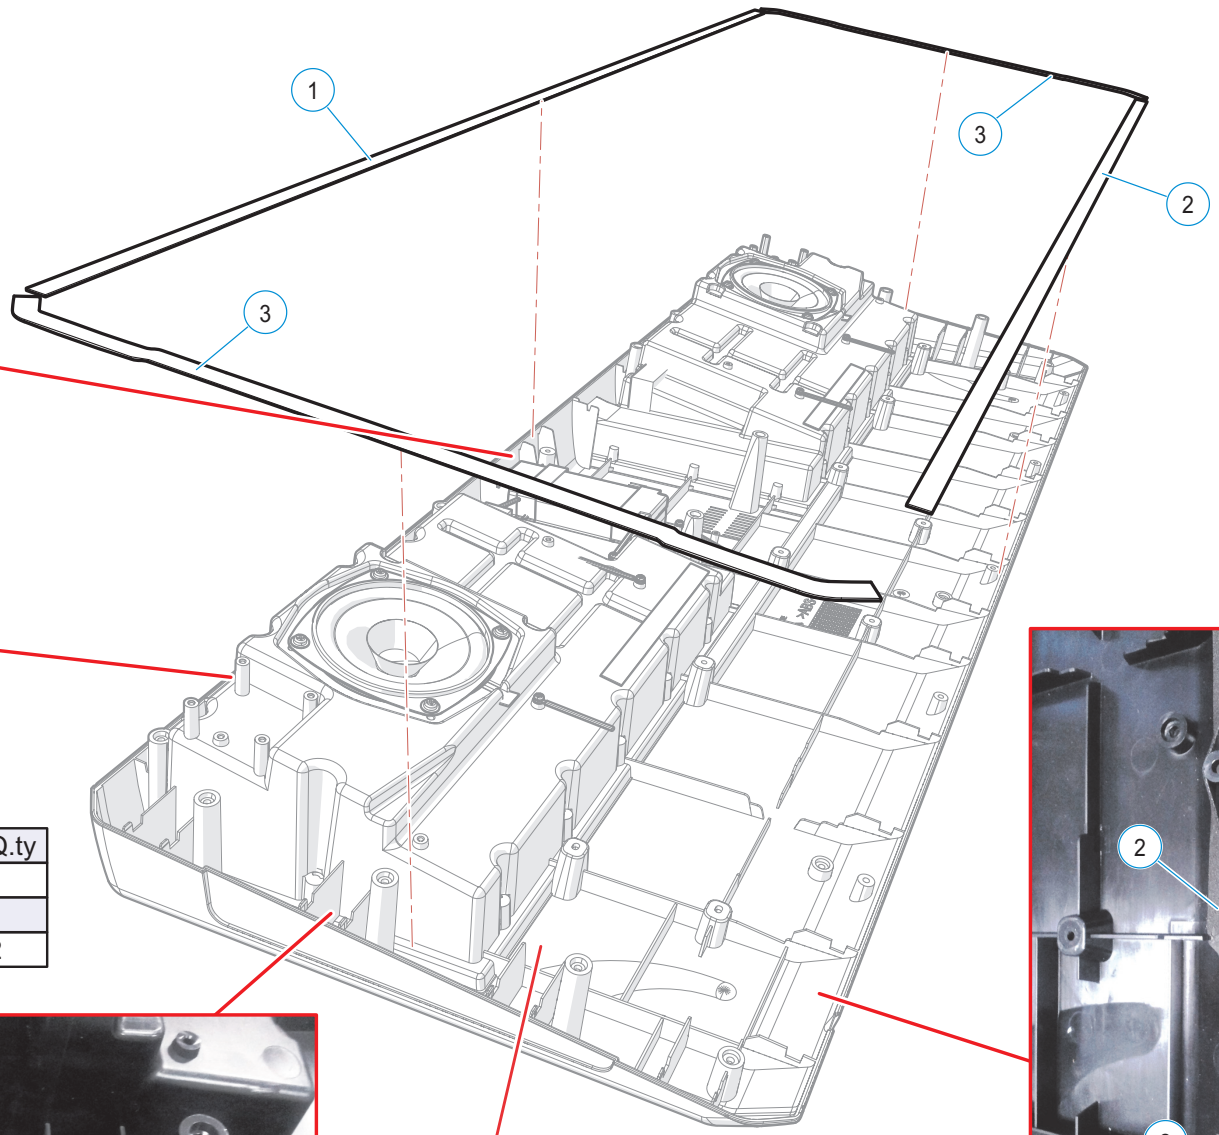

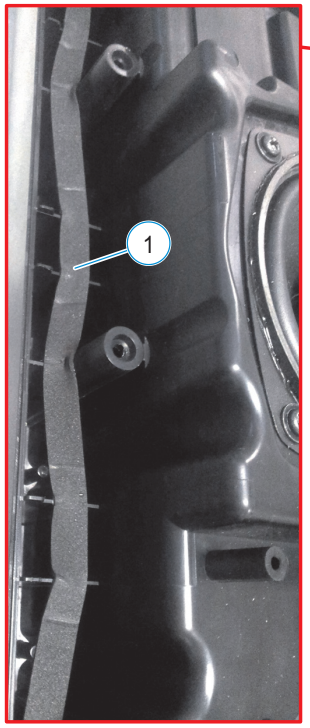

Description	ID BOM	Q.ty
FEL0010142	1	1
FEL0010143	2	1
FEL0010144	3	2

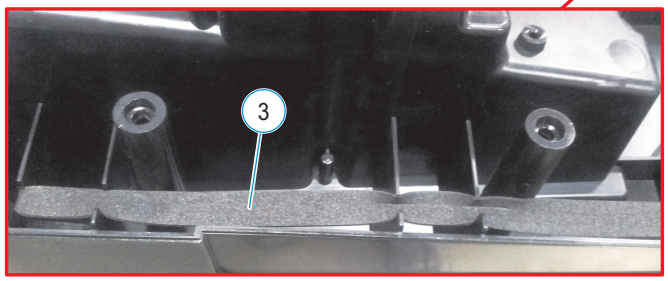

Lower Case Disassembly 2

Lower Case Disassembly 2


Descrption	ID BOM	Q.ty
KIT0001043	1	1
VTA8001094	2	4
PLA0001046	3	1
FER0010411	4	1
VTA8001049	5	1

Lower Case Disassembly 3

KIT0001043

Descrption	ID BOM	Q.ty
FER0010404	6	1
FER0010405	7	1
FEL0010133	8	2
FEL0010304	9	2
FEL0010158	10	2
TRA0010013	11	1

Lower Case Disassembly 3

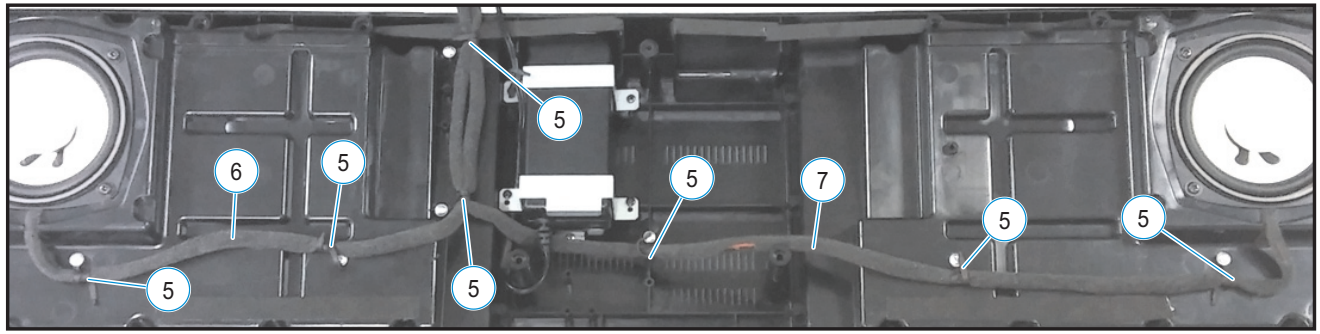



Description	ID BOM	Q.ty
ALT0001044	1	2
FEL0010161	2	2
VTA8001100	3	8
FEL0010153	4	2
PLA0001046	5	7
CAV0010223	6	1
CAV0010224	7	1

Lower Case Disassembly 4

Lower **C**ase Disassembly **4**

Description	ID BOM	Q.ty
VTA8001049	1	7
PLA0001046	2	7

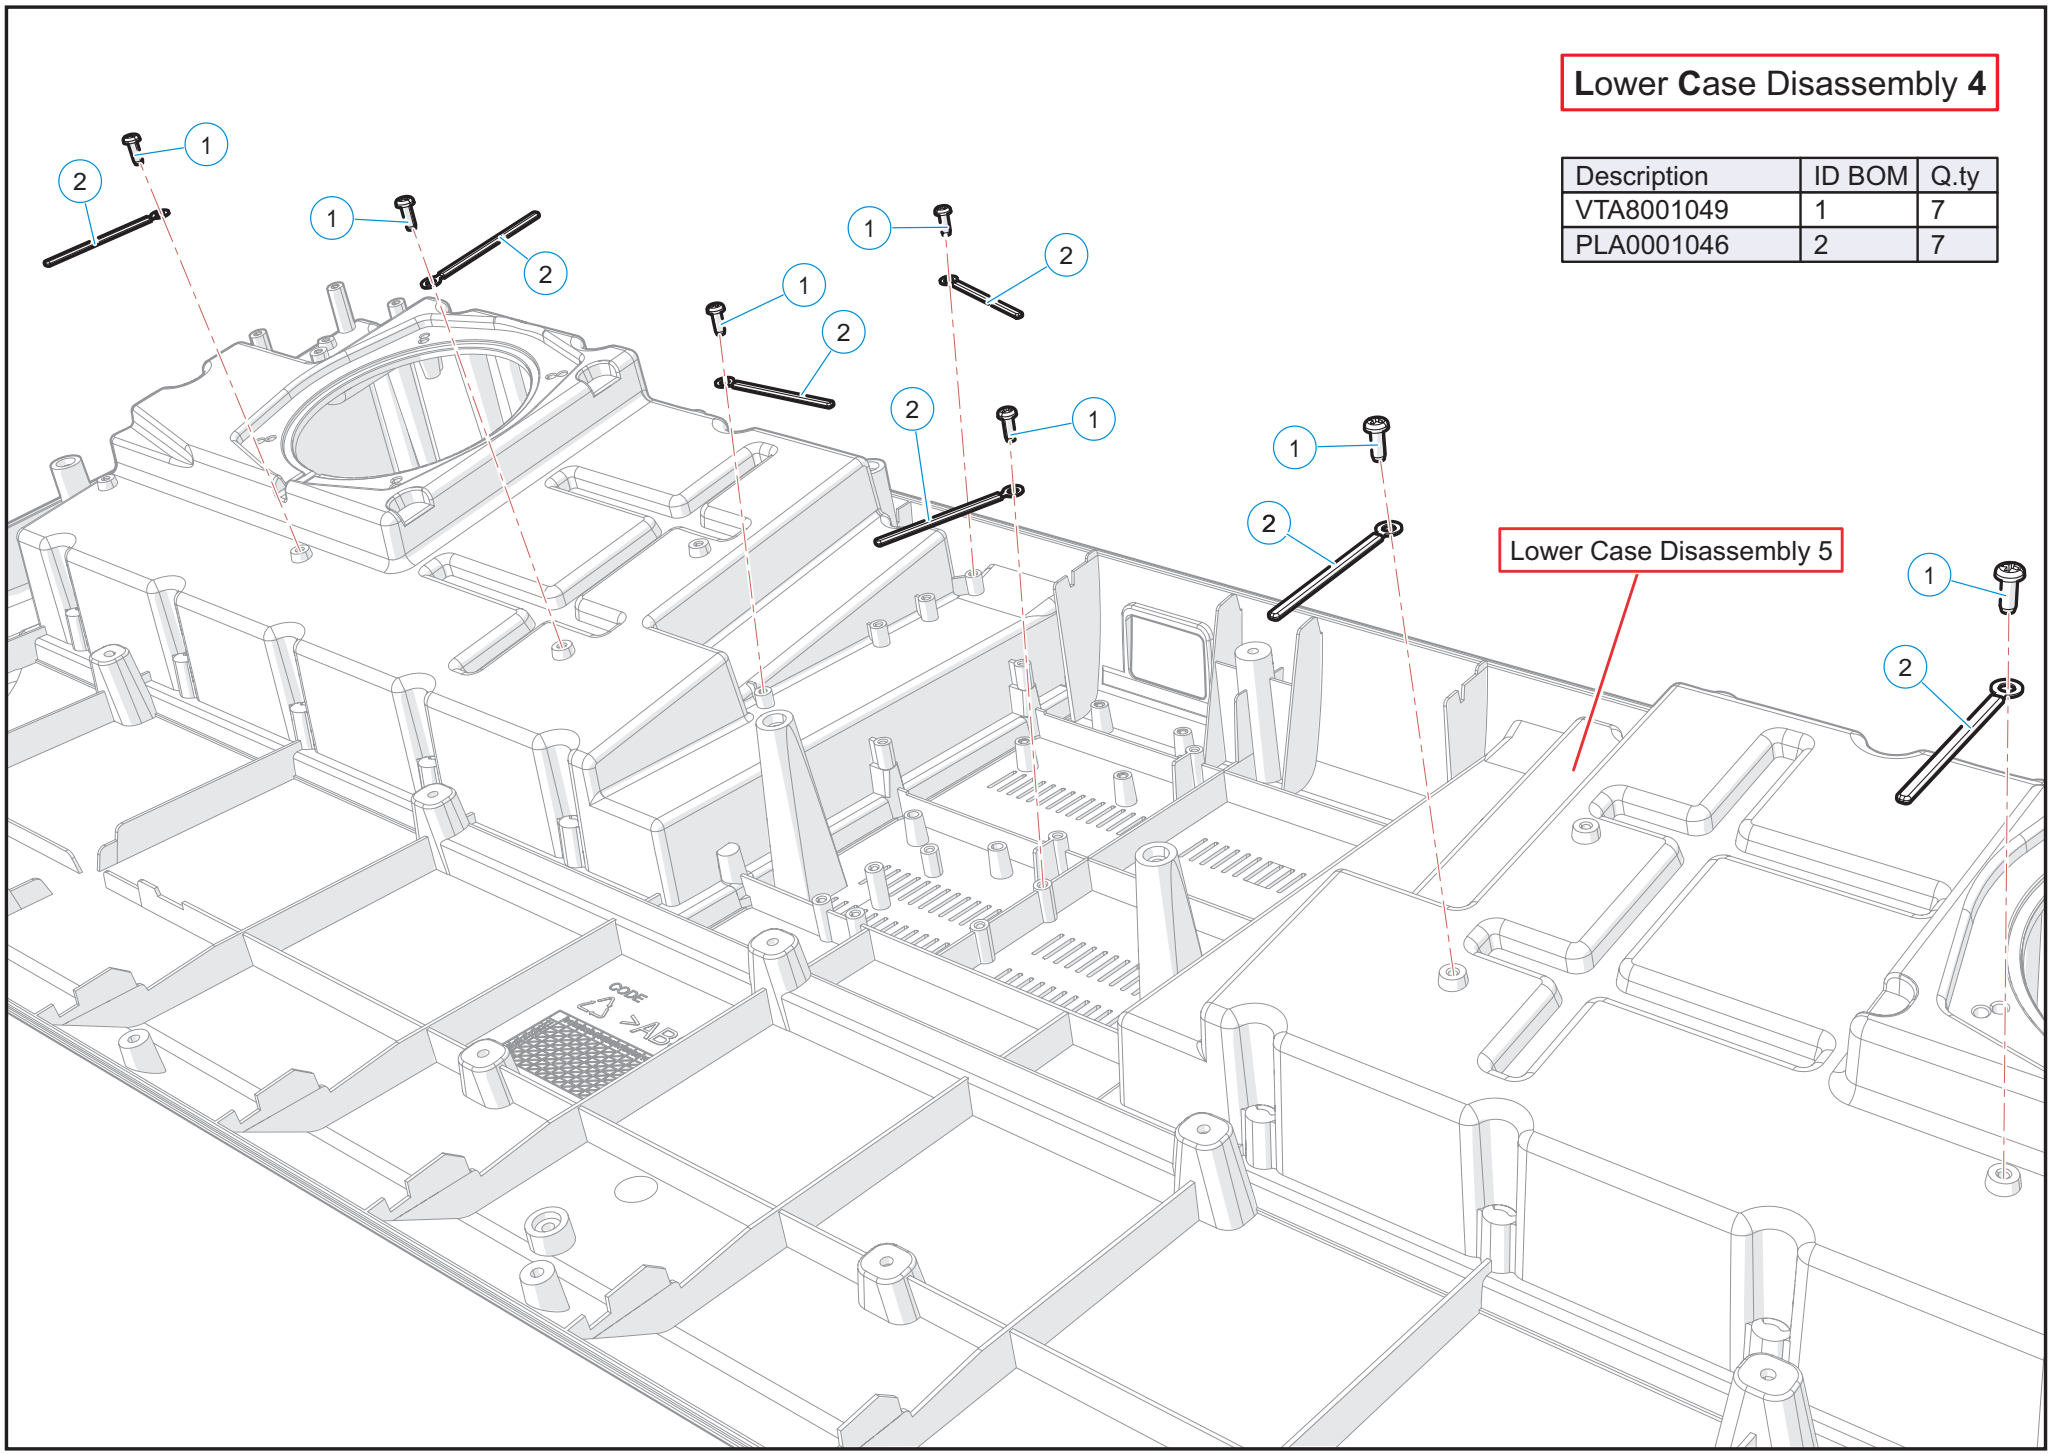

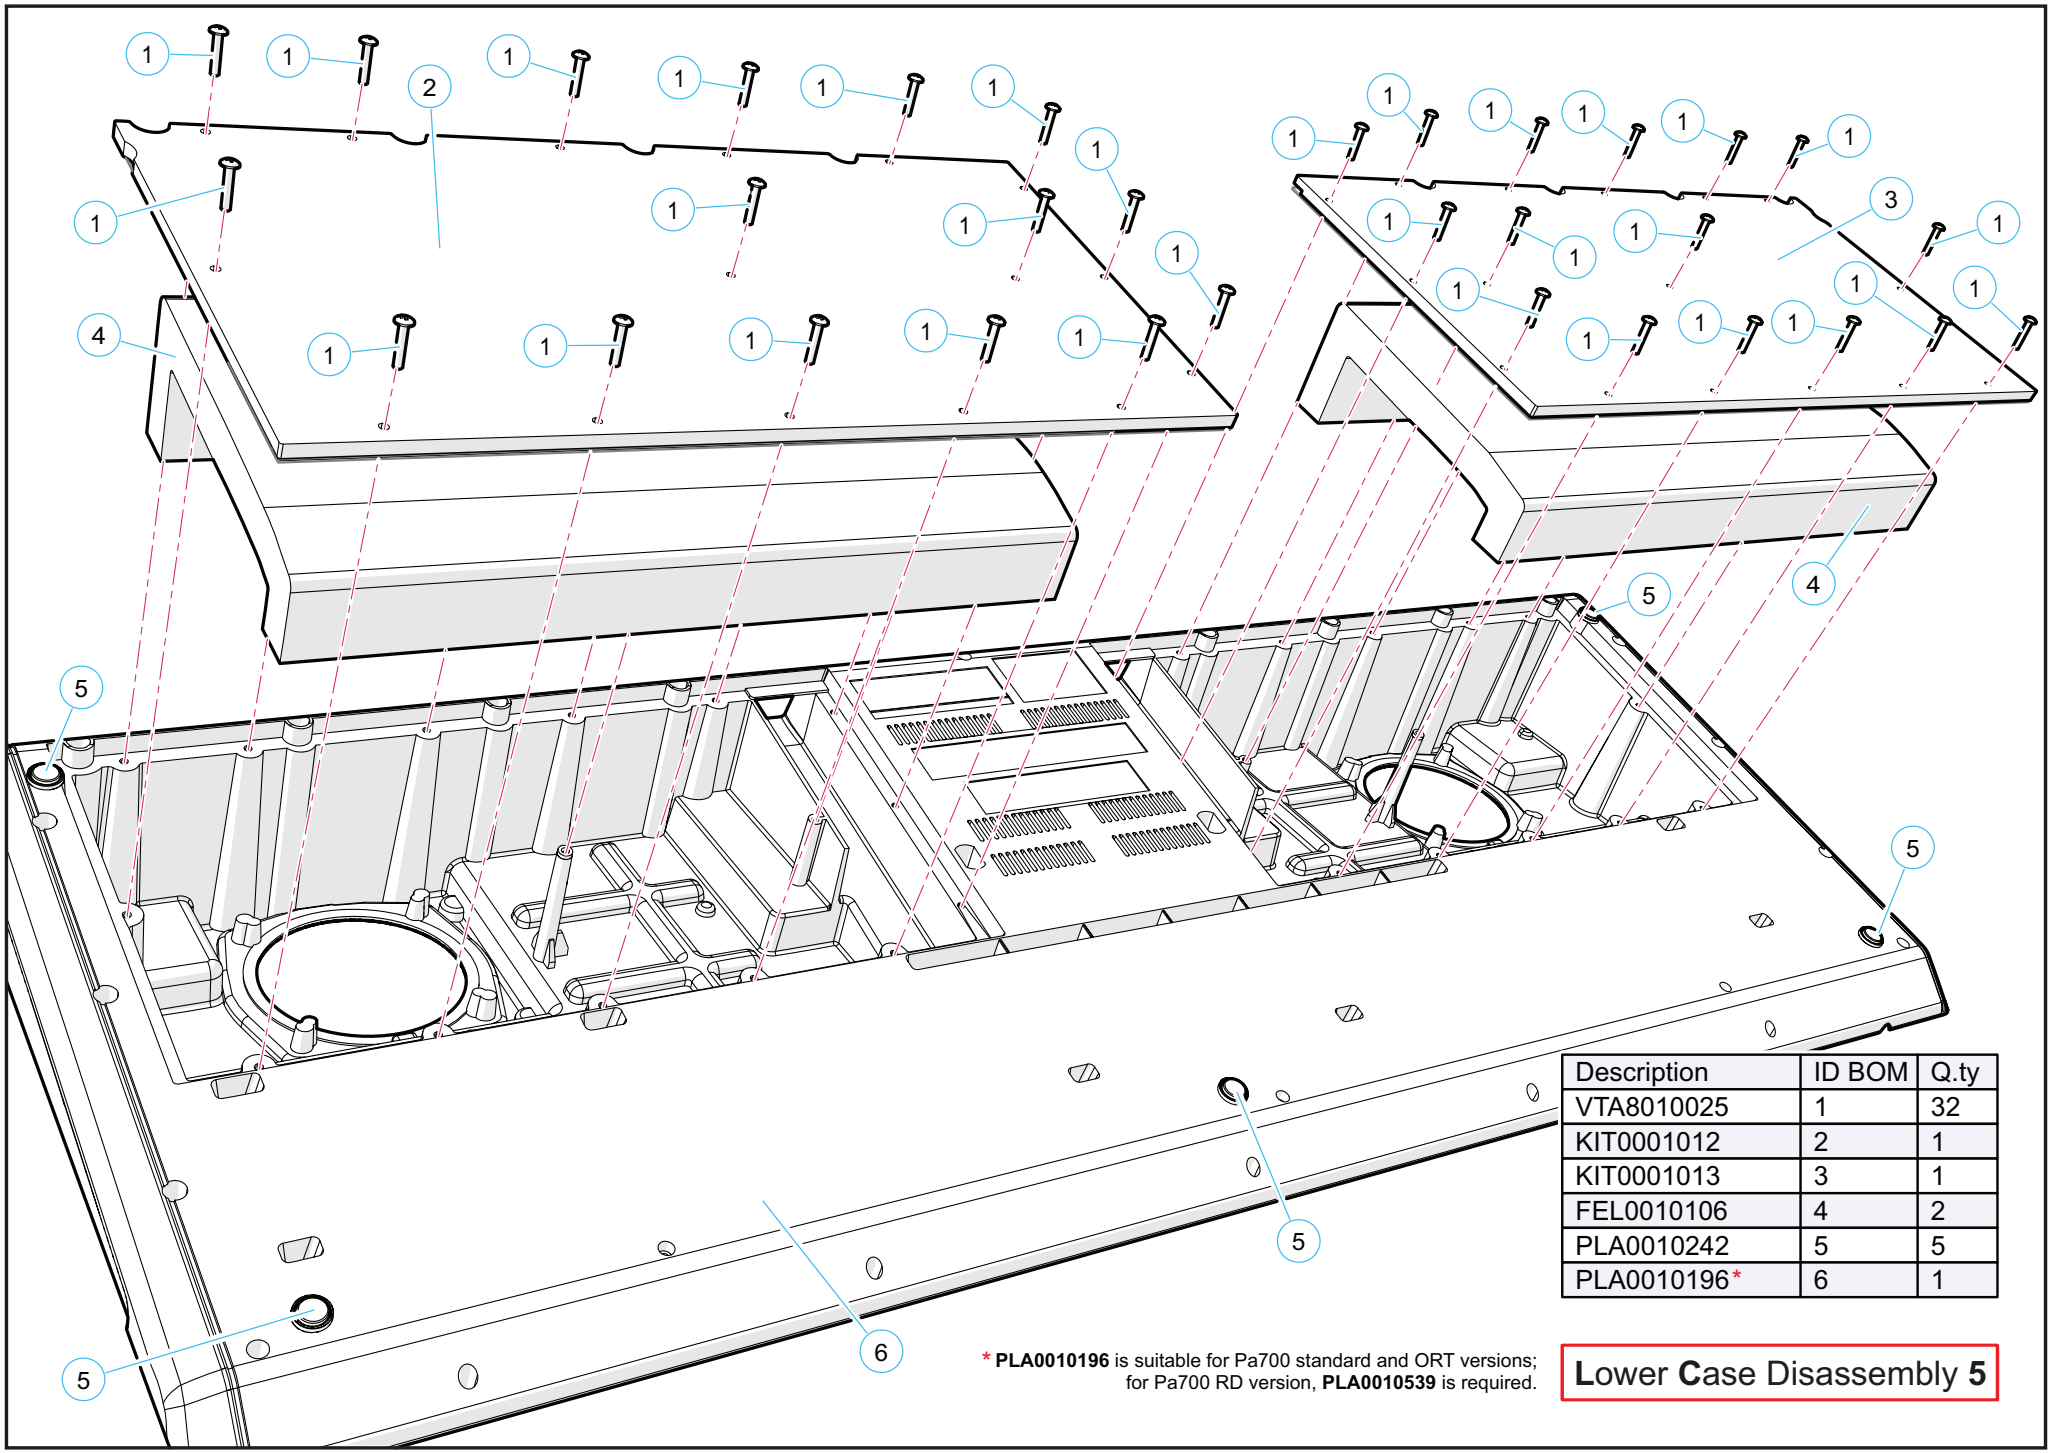

Description	ID BOM	Q.ty
VTA8010025	1	32
KIT0001012	2	1
KIT0001013	3	1
FEL0010106	4	2
PLA0010242	5	5
PLA0010196*	6	1


* **PLA0010196** is suitable for Pa700 standard and ORT versions; for Pa700 RD version, **PLA0010539** is required.


Lower **C**ase Disassembly **5**


Upper **C**ase Disassembly **1**


Description	ID BOM	Q.ty
GRA0002254	1	1
VTA8001049	2	8
JOY0001001	3	1
PLA0001046	4	3
PLA0001062	5	1
VTA8001094	6	4
GRA0002257*	7	1
PLA0010405	8	1
CAV0010226	9	1
CAV0010149	10	1
CAV0010228	11	1

* **GRA0002257** is available only as part of **GRM0001013** or **GRM0001015** (go to **spare part list** section)

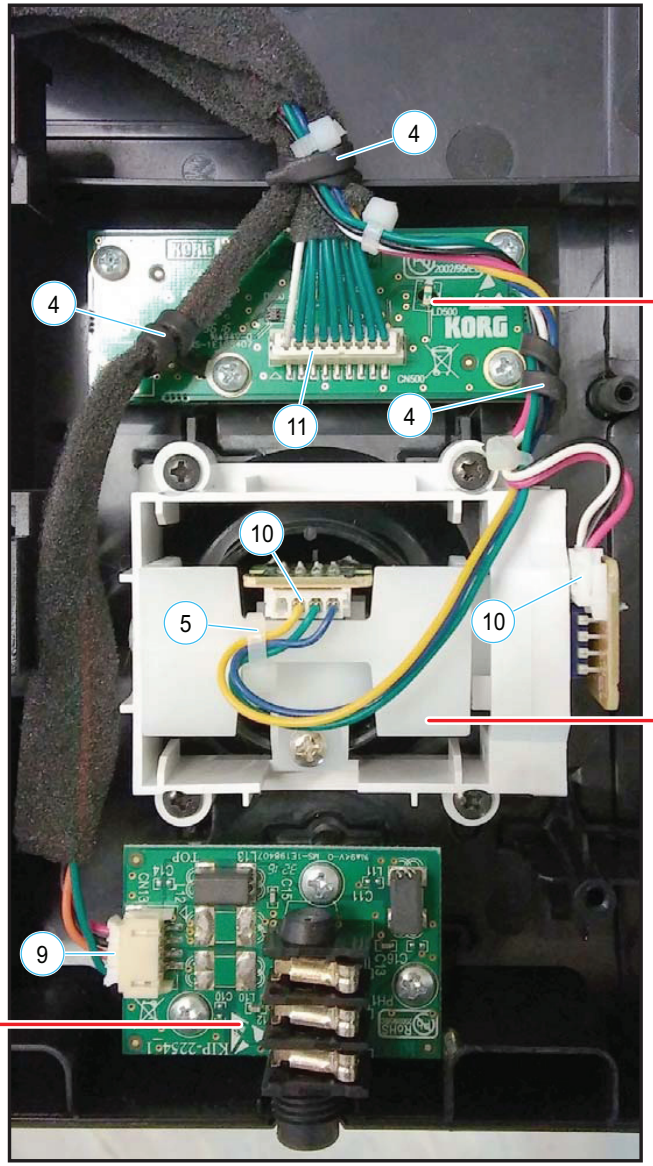

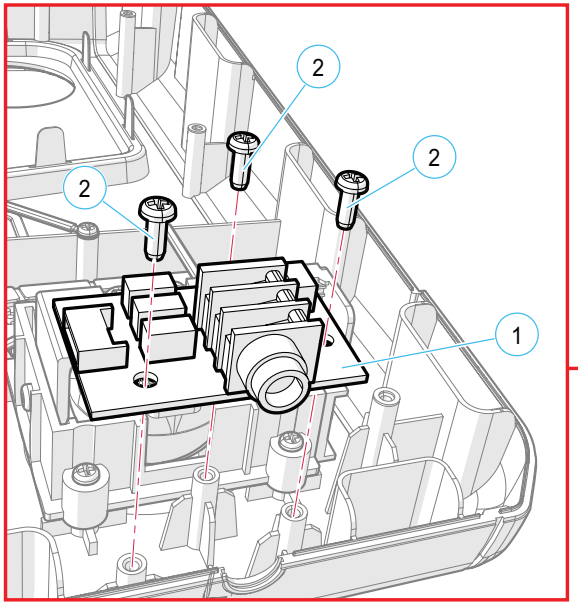

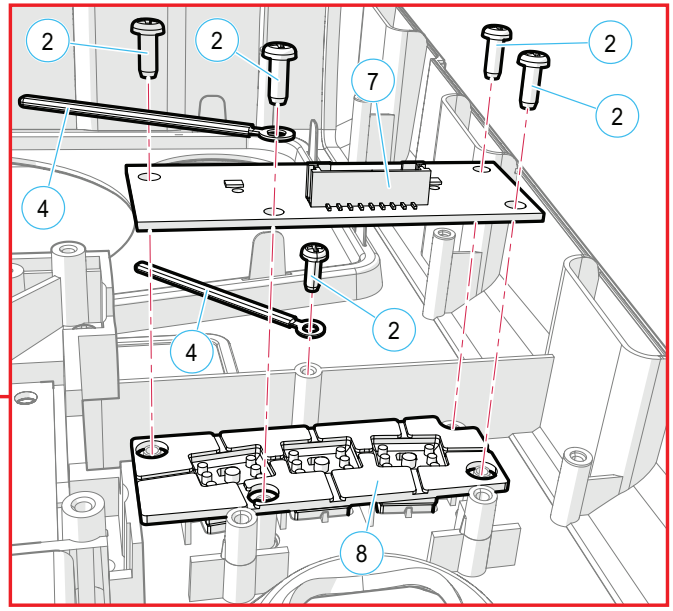

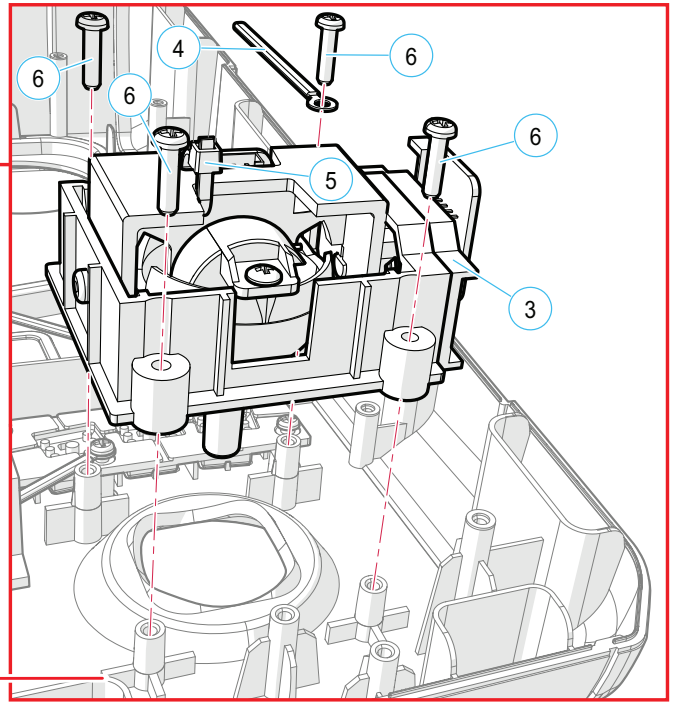



Upper Case Disassembly 2

Upper **C**ase Disassembly **2**

(up to s.n. 39999)


Description	ID BOM	Q.ty
PLA0001046	1	2
CAV0010226	2	1
CAV0010149	3	1
CAV0010228	4	1
FER0010399	5	1
VTA8001099	6	4
VTA8010026	7	3
FEL0010306	8	1
double-sided tape	9	15mm

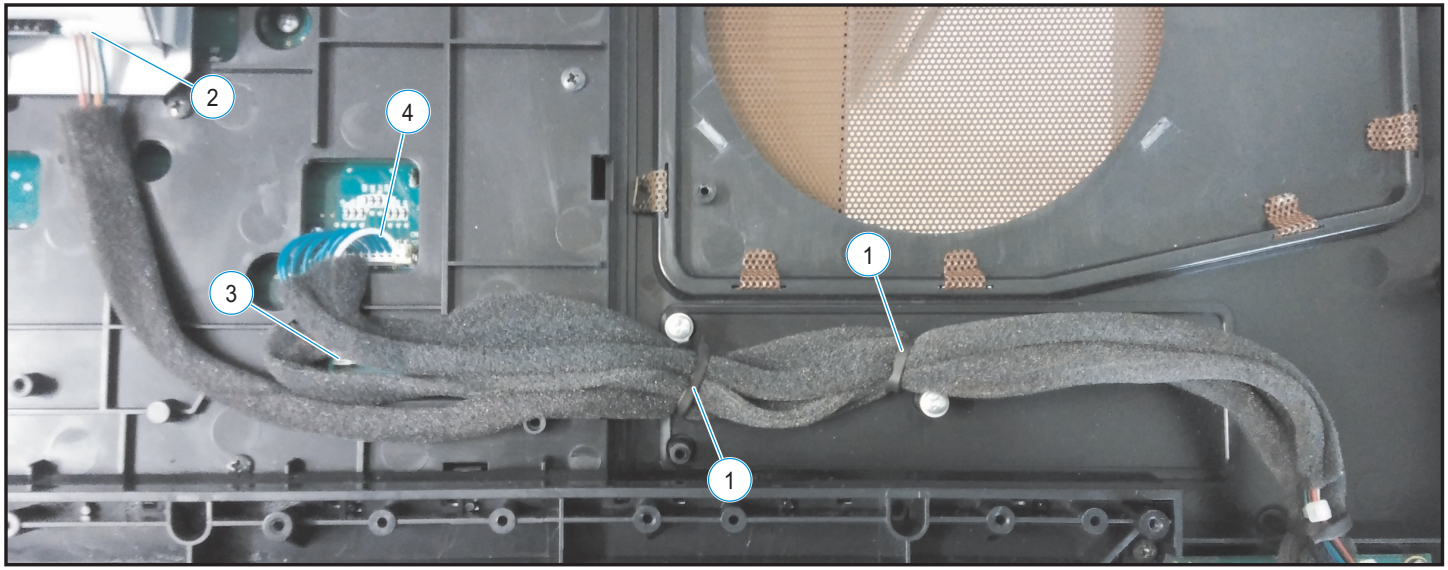


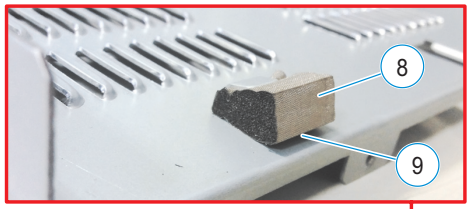

Upper **C**ase Disassembly **2**
(from s.n. 40000)


Description	ID BOM	Q.ty
PLA0001046	1	2
CAV0010226	2	1
CAV0010149	3	1
CAV0010228	4	1
FER0010399	5	1
VTA8001099	6	4
VTA8010026	7	3

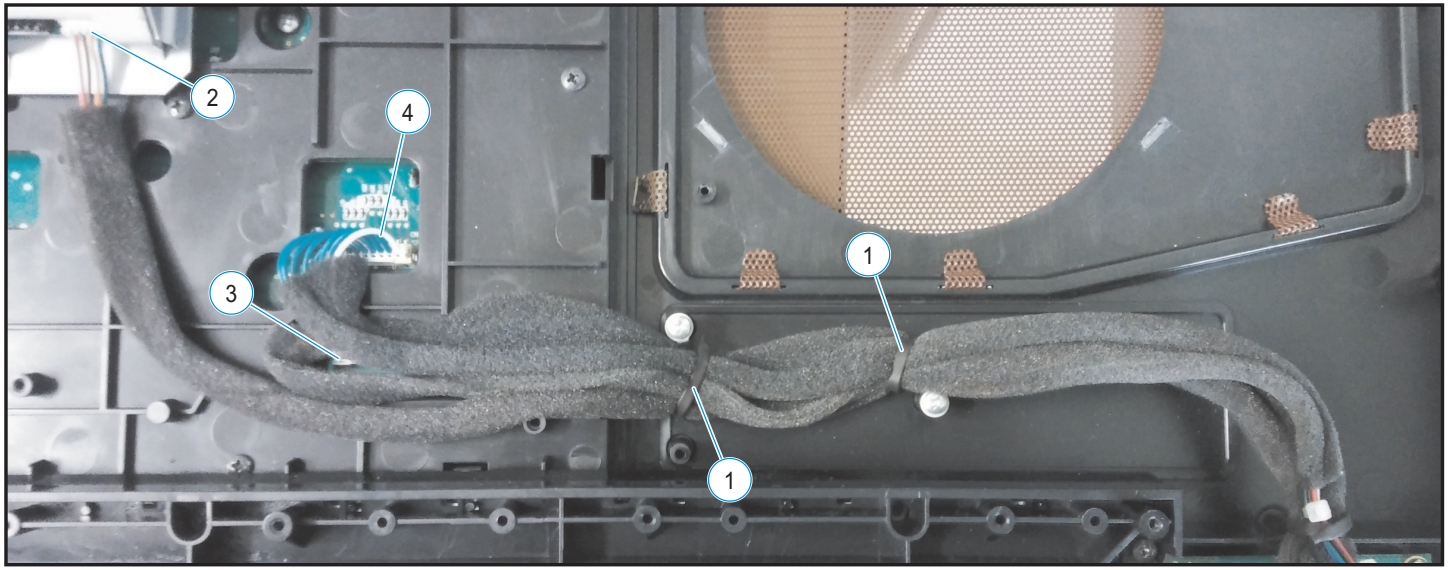

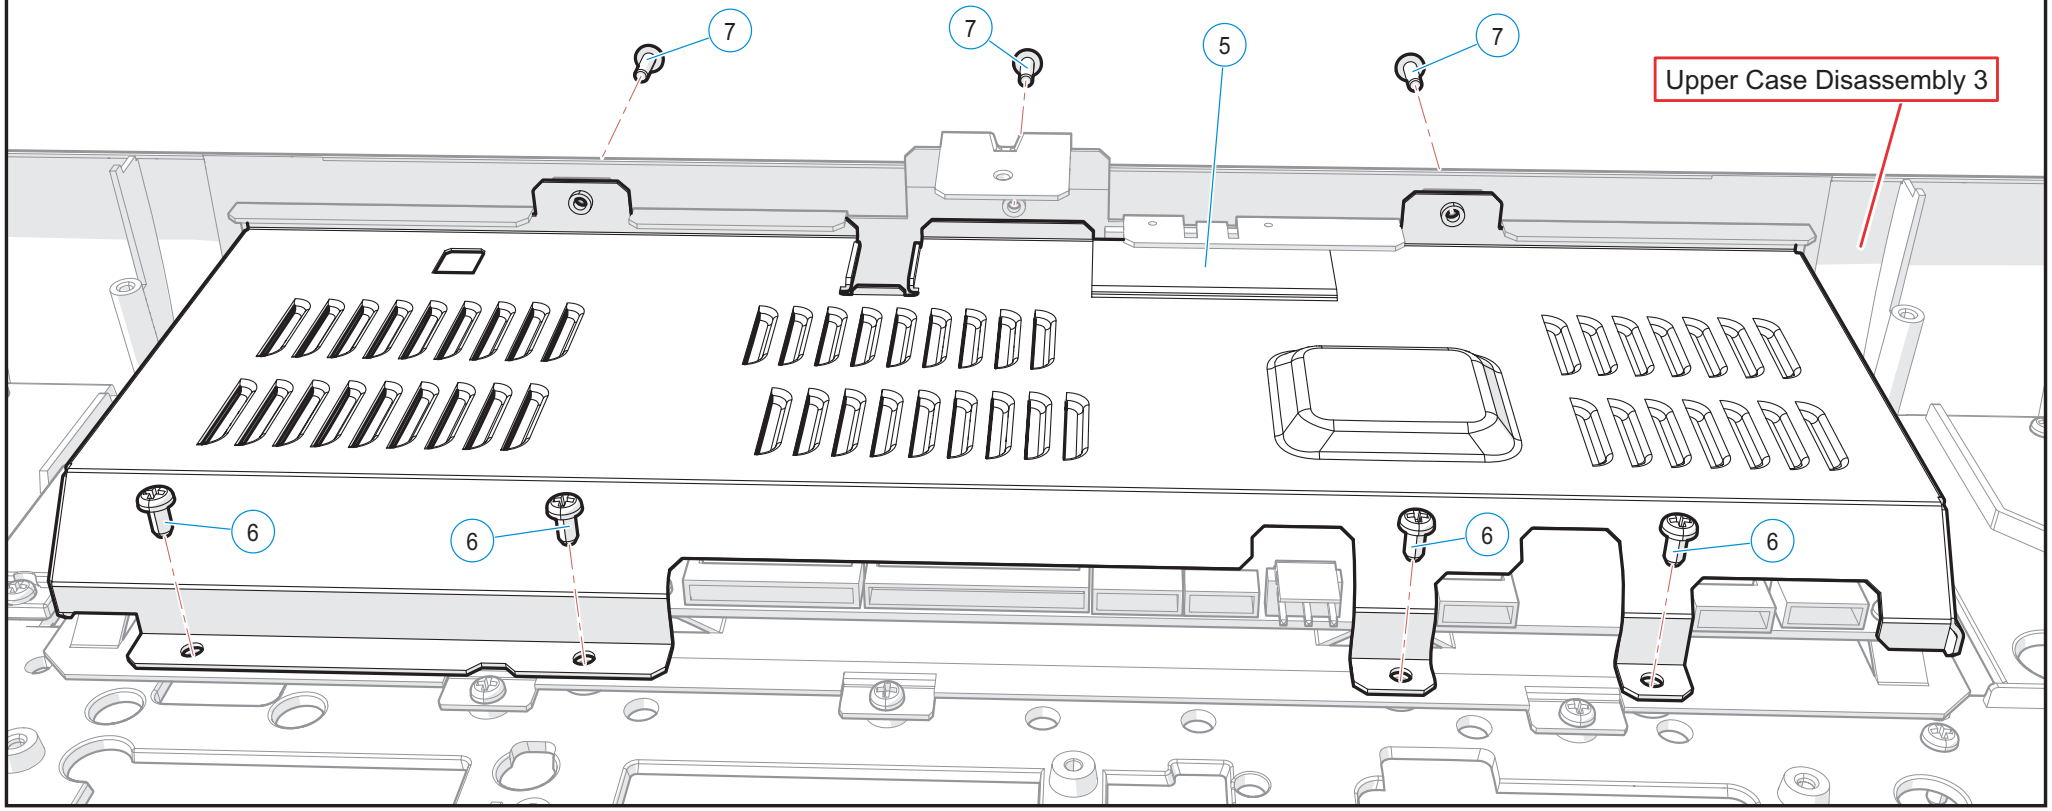


Upper **C**ase Disassembly **3**
(up to s.n. 39999)

Description	ID BOM	Q.ty
PLA0001046	1	1
CAV0010227	2	1
CAV0010225	3	1
adhesive tape (5mm)	4	40mm
Control panel group	5	1
Main board/CPU group	6	1
VTA8001049	7	3
KIT0001049	8	1

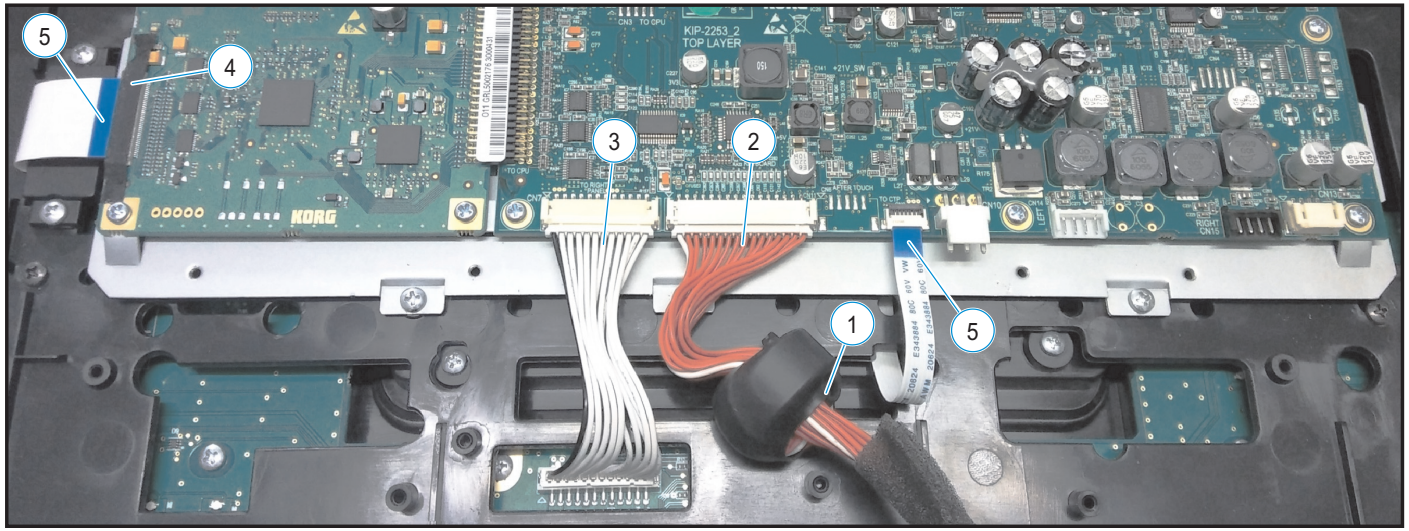

Upper Case Disassembly 4


LCD Disassembly

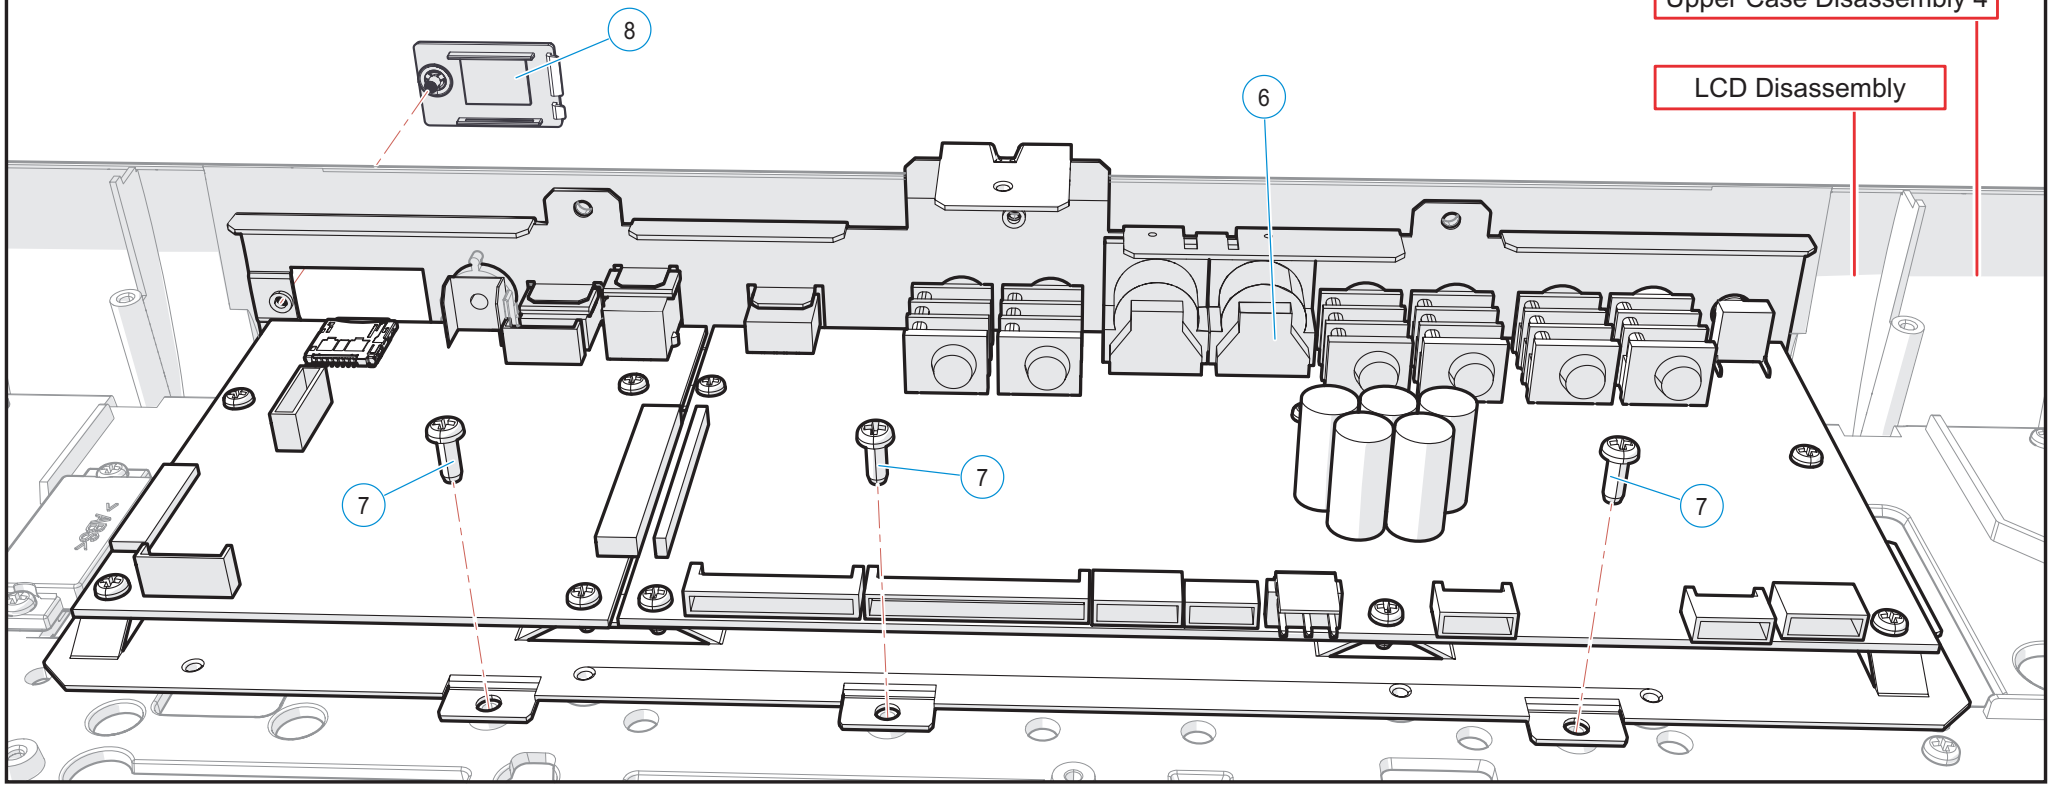


Upper **C**ase Disassembly **3**

(from s.n. 40000)


Description	ID BOM	Q.ty
PLA0001046	1	1
CAV0010227	2	1
CAV0010225	3	1
adhesive tape (5mm)	4	40mm
Control panel group	5	1
Main board/CPU group	6	1
VTA8001049	7	3
KIT0001054	8	1

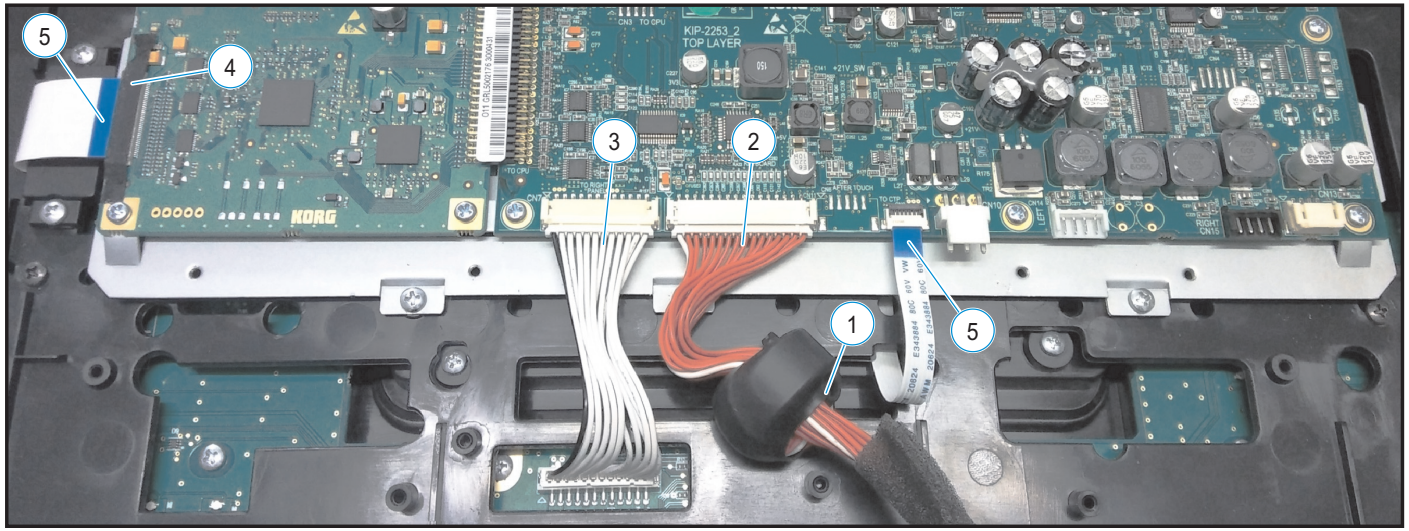


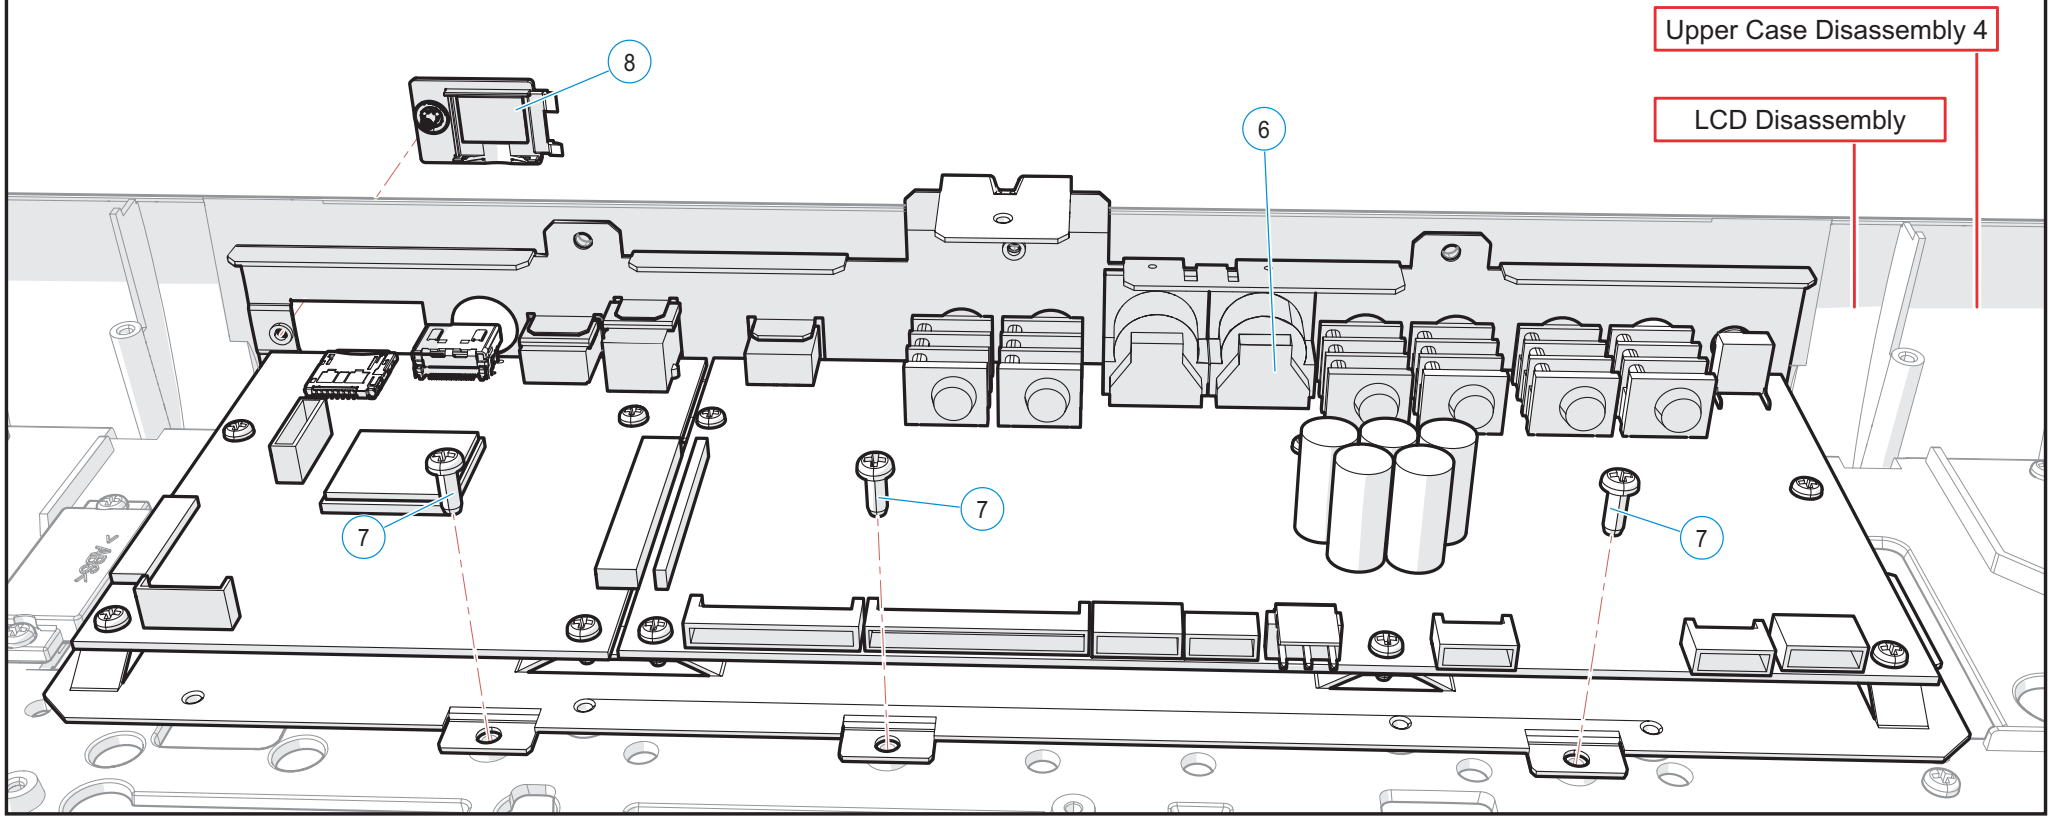

Upper **C**ase Disassembly **4**

Description	ID BOM	Q.ty
CAV0010227	1	1
GRF0001018	2	1
PLA0001046	3	5
VTA8001049	4	3
VTA8001094	5	4
VTA8001099	6	1
VTA8001102	7	2

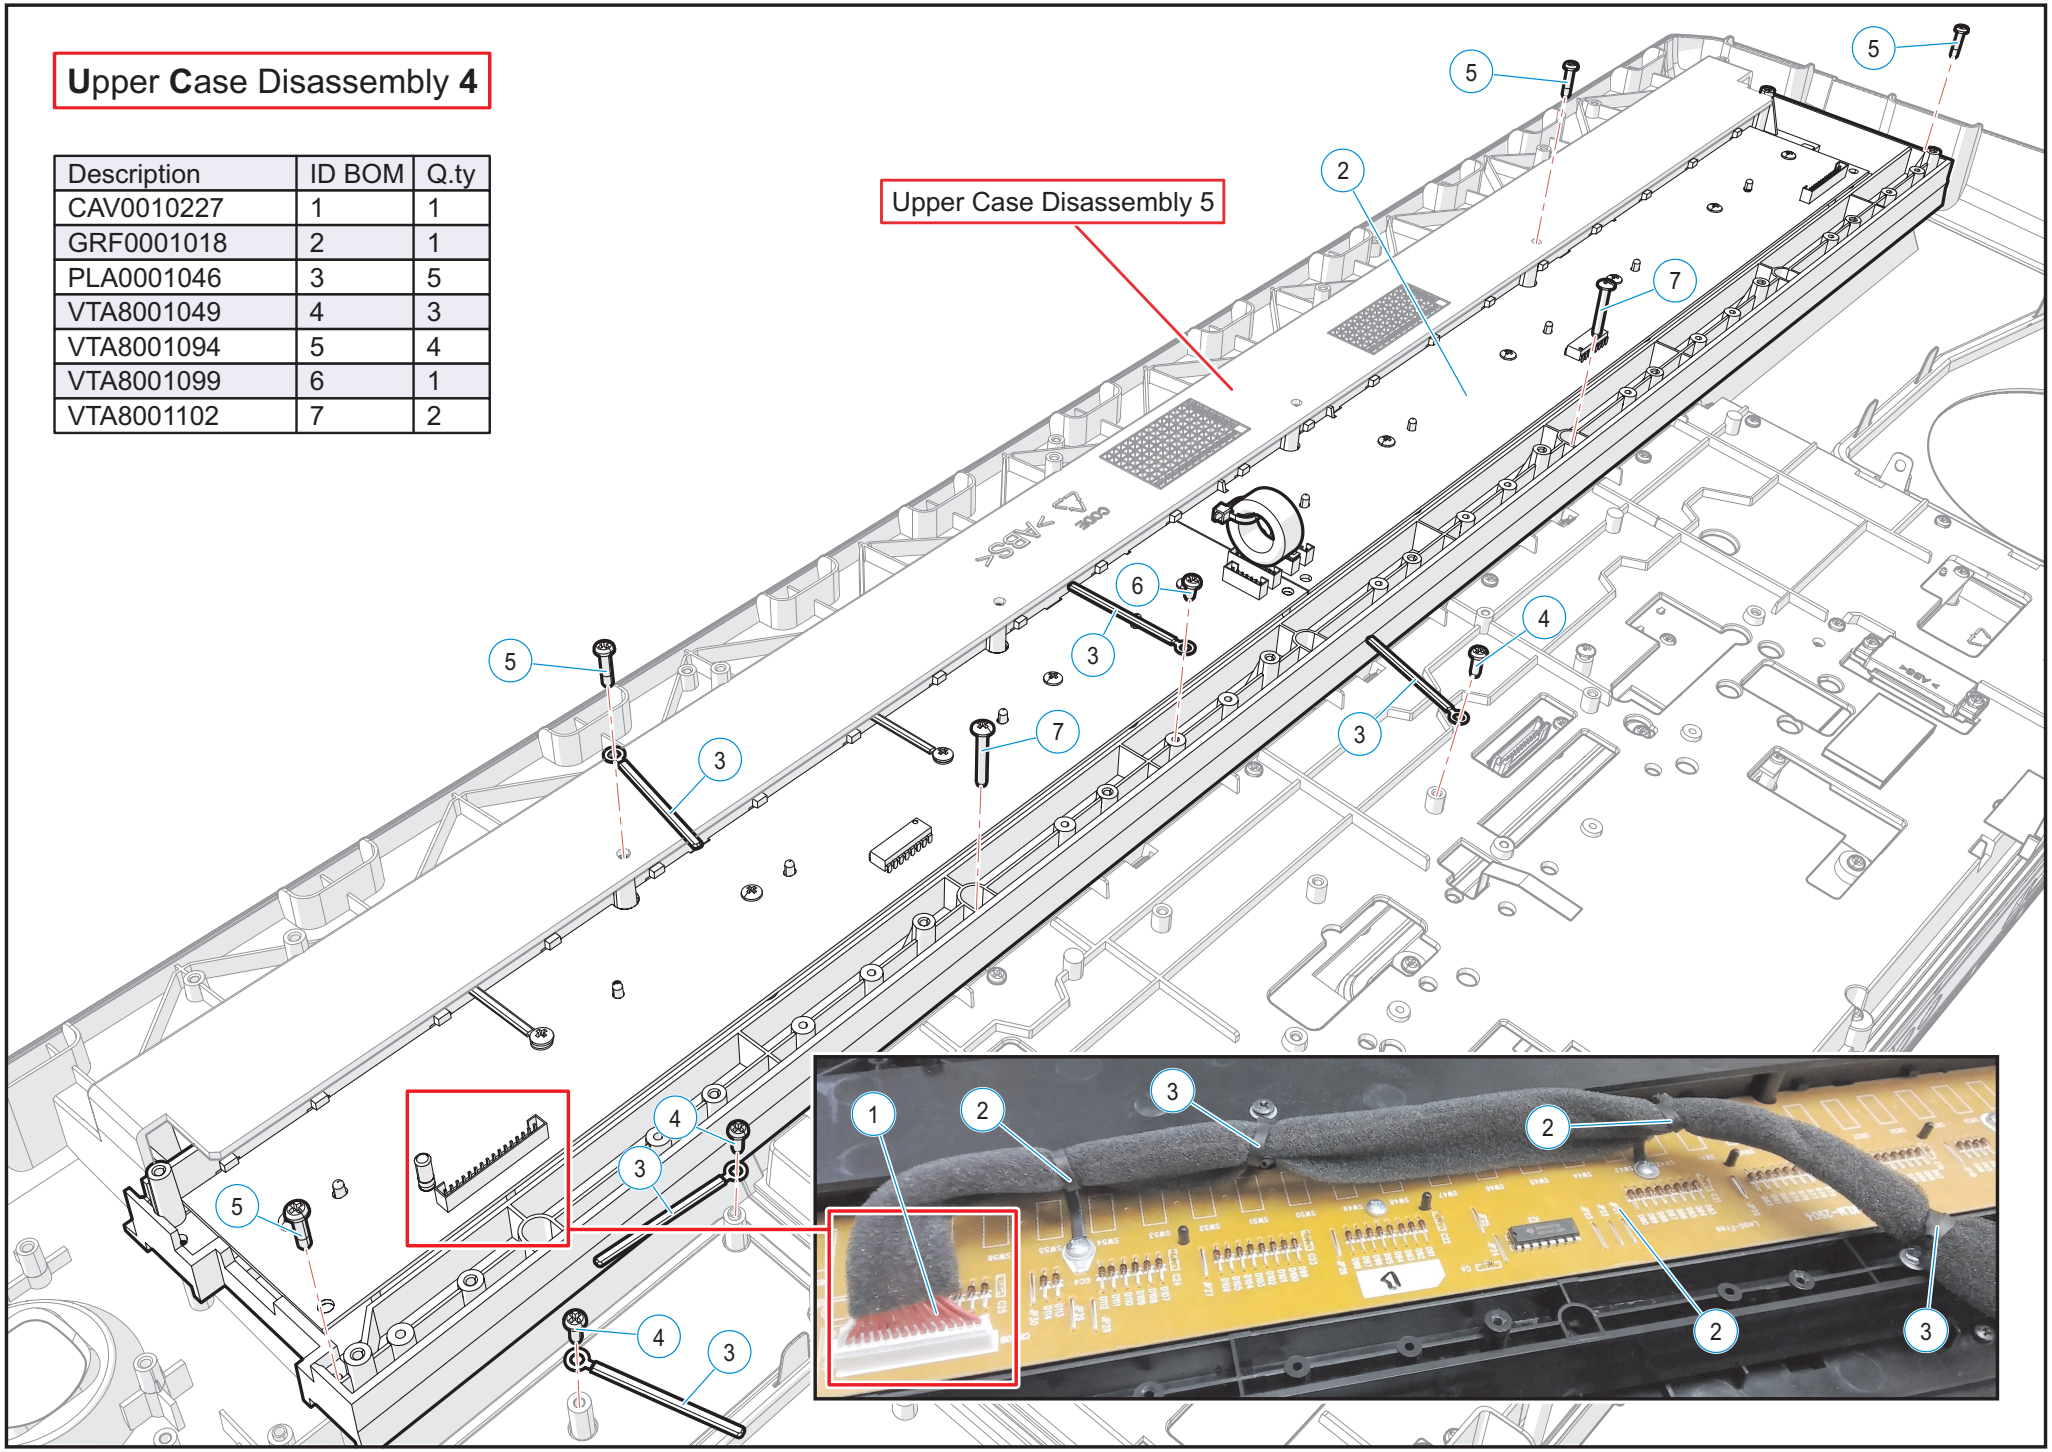


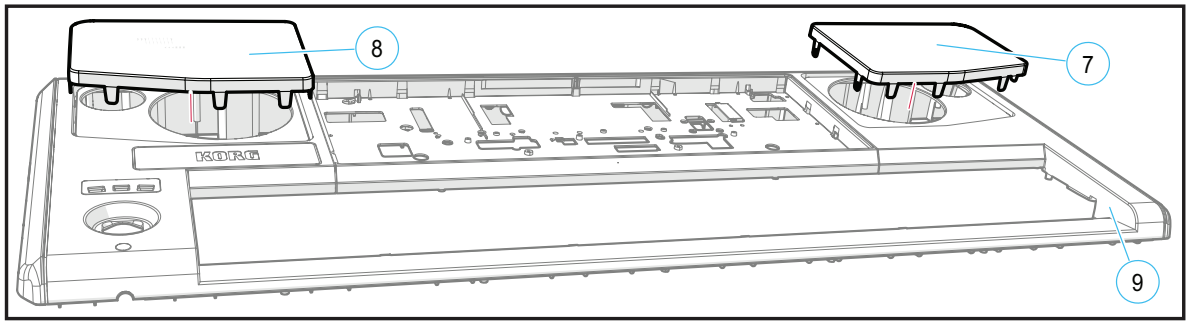

*PLA0010407 is used only in Pa700 standard version; for Pa700 ORT version, PLA0010408 is required.

Upper Case Disassembly 5
(up to s.n. 39999)

Description	ID BOM	Q.ty
PLA0010434	1	1
VTA8001049	2	2
BOB0001042	3	1
VTA8001094	4	17
FER0010226	5	2
VTA8001101	6	2
FER0010414	7	1
FER0010415	8	1
PLA0010407*	9	1

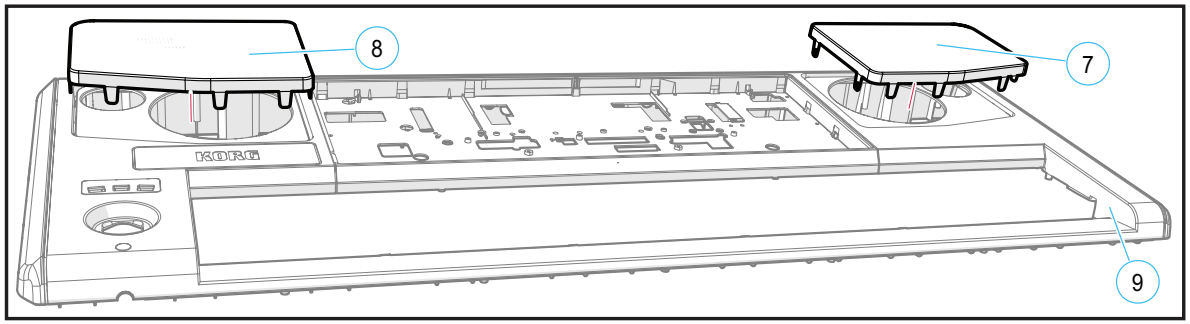

* **FER0010414** is suitable for Pa700 standard and ORT versions; for Pa700 RD version, **FER0010194** is required.

** **FER0010415** is suitable for Pa700 standard and ORT versions; for Pa700 RD version, **FER0010238** is required.


*** **PLA0010480** is suitable for Pa700 standard version; for Pa700 ORT version, **PLA0010481** is required; for Pa700 RD version, **PLA0010538** is required.

Upper **C**ase Disassembly **5**

(from s.n. 40000)

Description	ID BOM	Q.ty
PLA0010434	1	1
VTA8001049	2	2
BOB0001042	3	1
VTA8001094	4	17
FER0010226	5	2

Description	ID BOM	Q.ty
VTA8001101	6	2
FER0010414*	7	1
FER0010415**	8	1
PLA0010480***	9	1
FEL0010302	10	1

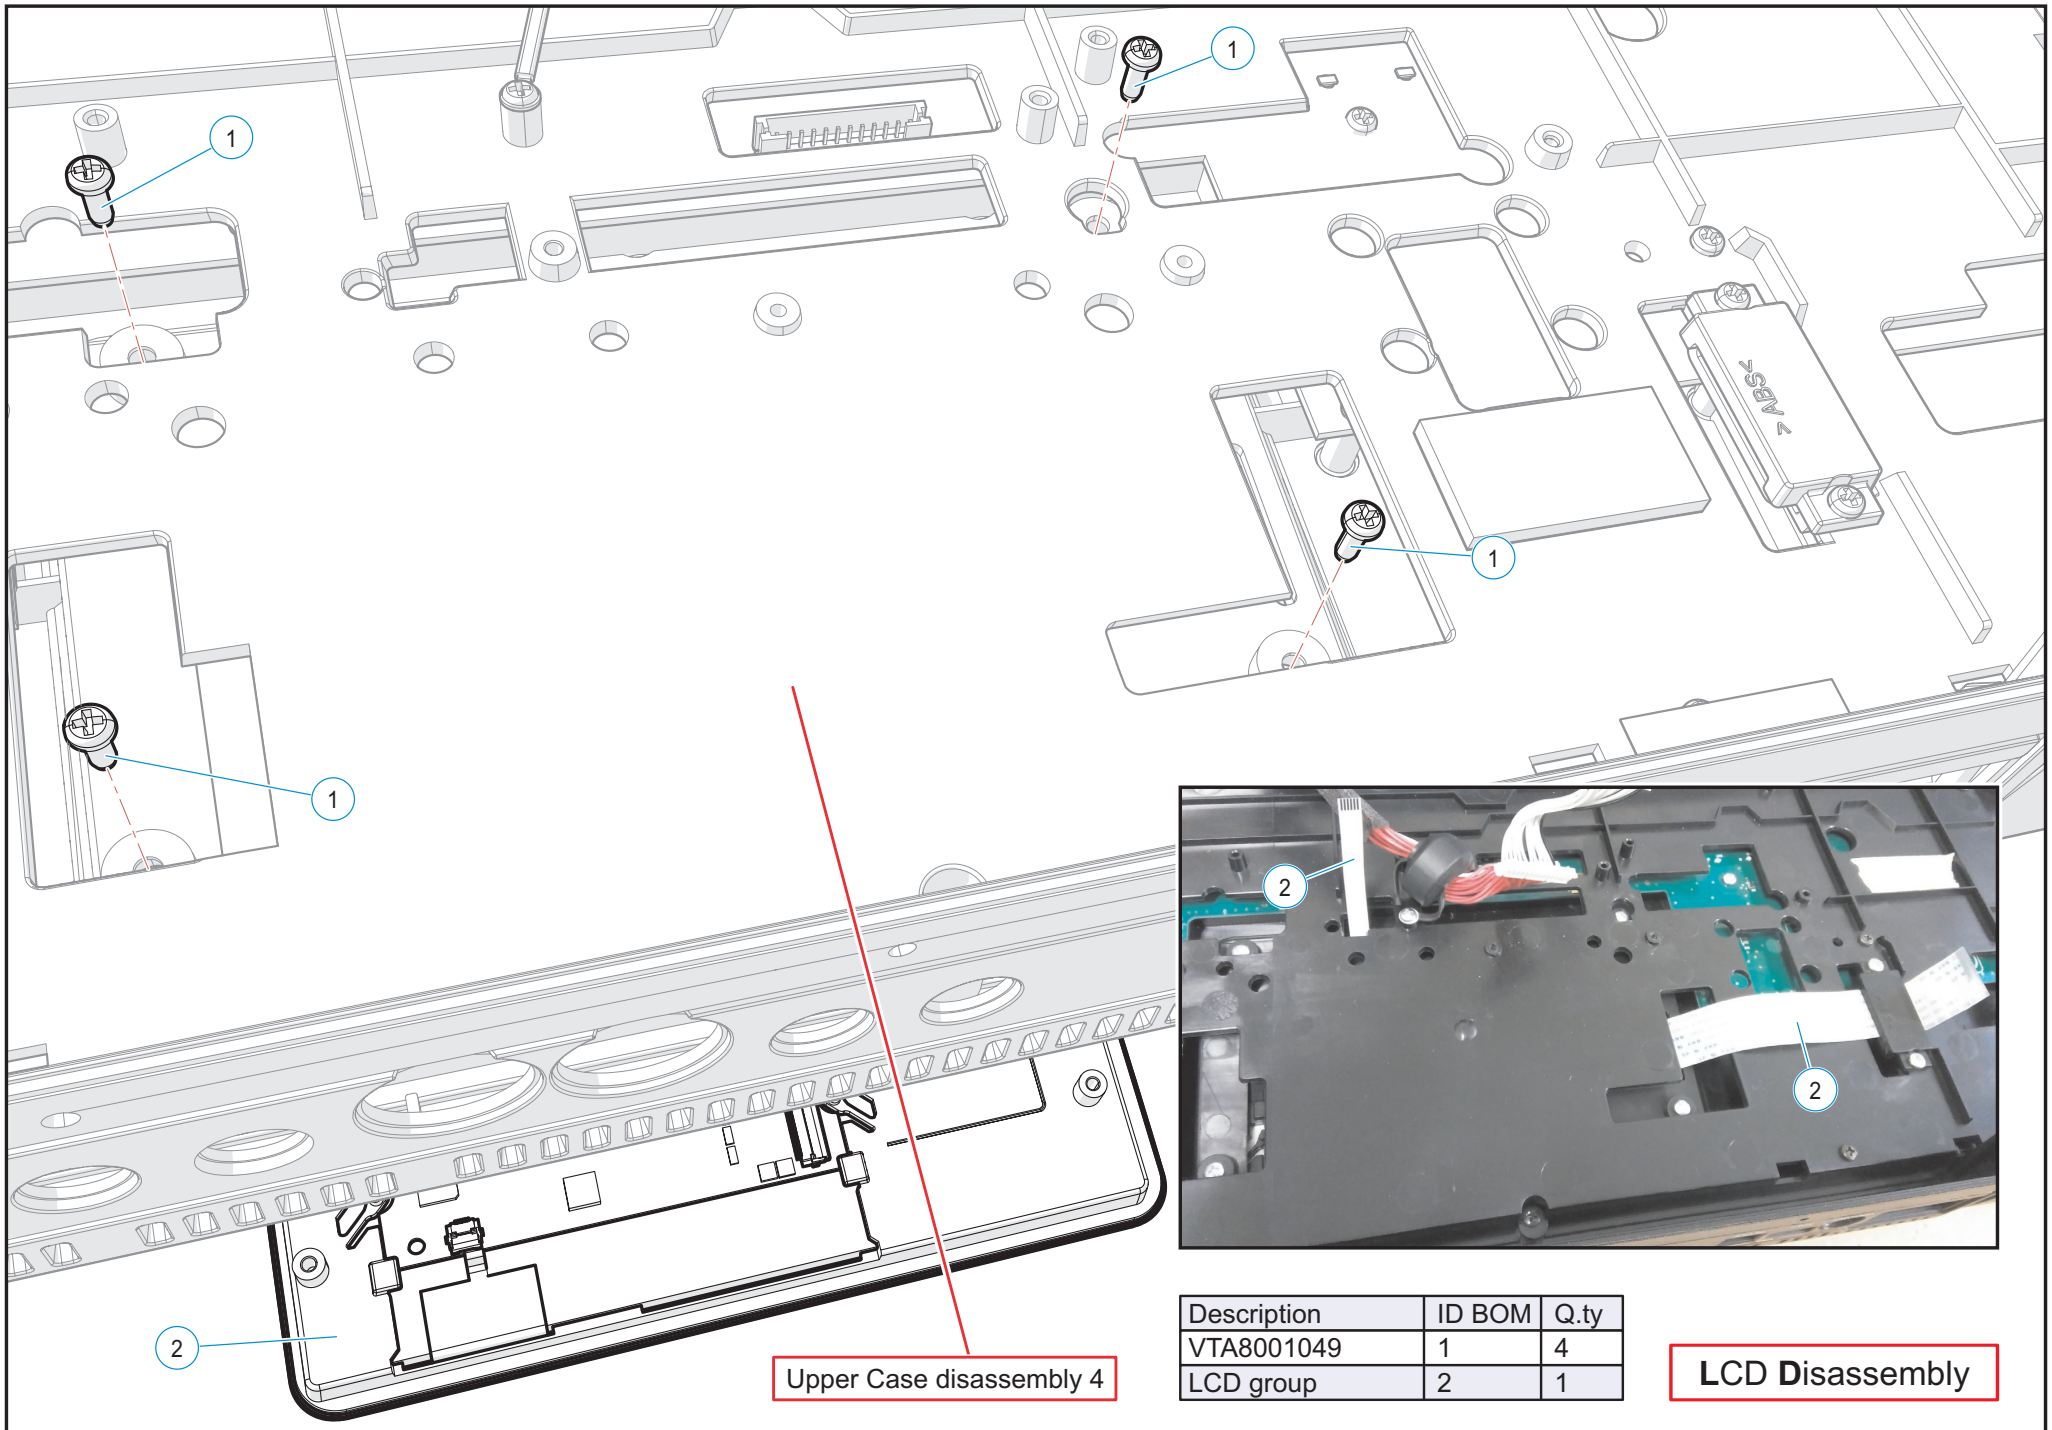


Description	ID BOM	Q.ty
VTA8001049	1	4
LCD group	2	1

LCD Disassembly


Control Panel group

* **GRA0002256** is available only as part of **GRM0001013** or **GRM0001015** (go to **spare part list** section)


* * **PLA0010401** is suitable for Pa700 standard and ORT versions; for Pa700 RD version, **PLA0010537** is required.

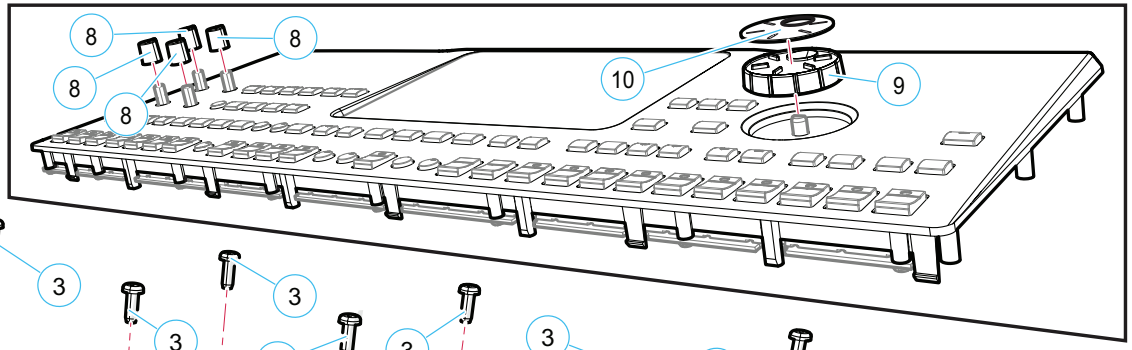

Description	ID BOM	Q.ty
LCD group	1	1
GRA0002256*	2	1
VTA8001049	3	27
PLA0010401**	4	1
PLA0010402	5	1
PLA0010403	6	1
PLA0010404	7	1
PLA0010413	8	4
PLA0010406	9	1
FER0010402	10	1

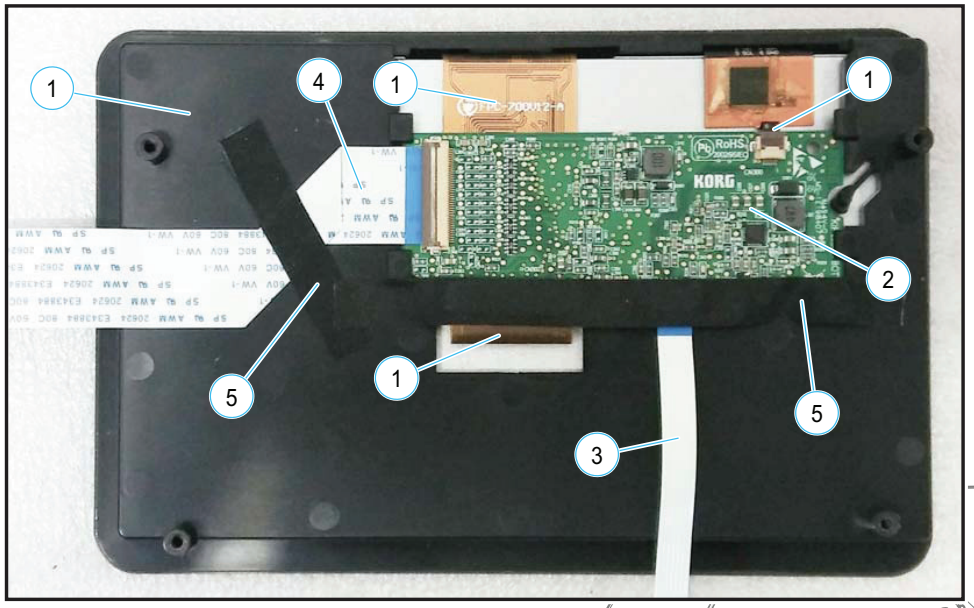


	Description	ID BOM	Q.ty
up to s.n. 39999	KIT0001042	1	1
from s.n. 40000 *	KIT0001053	1	1
	GRA0002255	2	1
	GRA1002255	2	1
	CAV0010230	3	1
	CAV0010231	4	1
	adhesive tape (7mm)	5	130mm

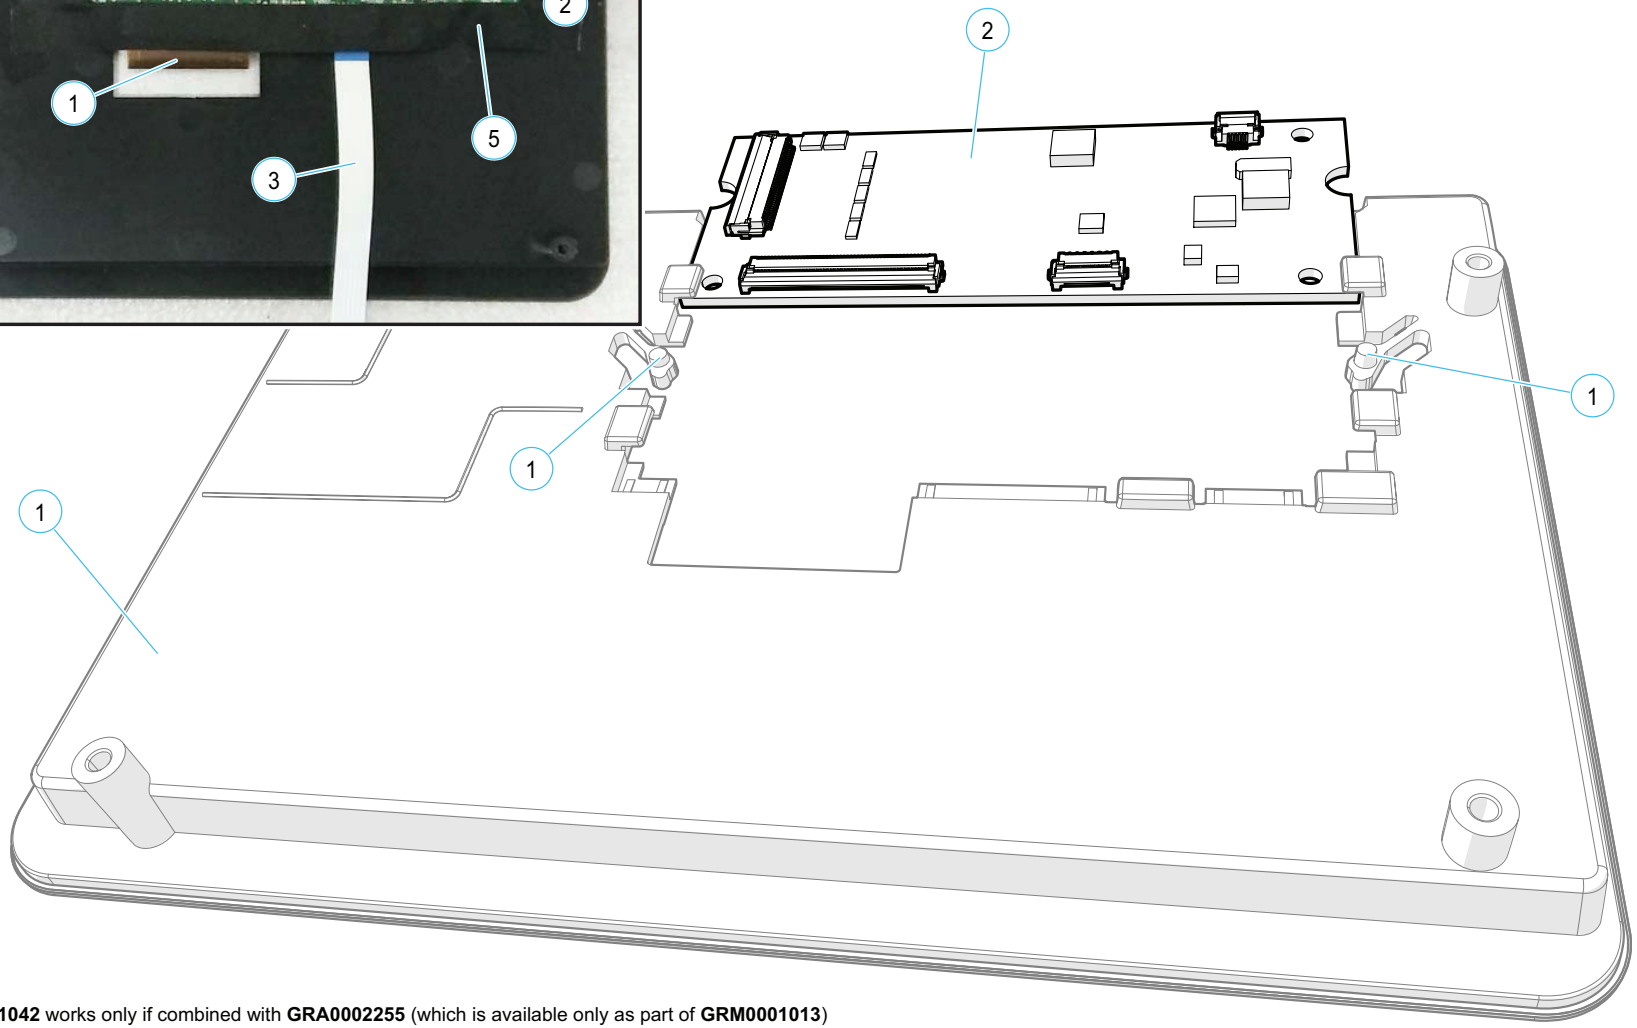

LCD group

KIT0001042 works only if combined with **GRA0002255** (which is available only as part of **GRM0001013**)
* **KIT0001053** works only if combined with **GRA1002255** (which is available only as part of **GRM0001015**)
each of these two combinations works in both the RCA and HDMI version


Main Board group (up to s.n. 39999)

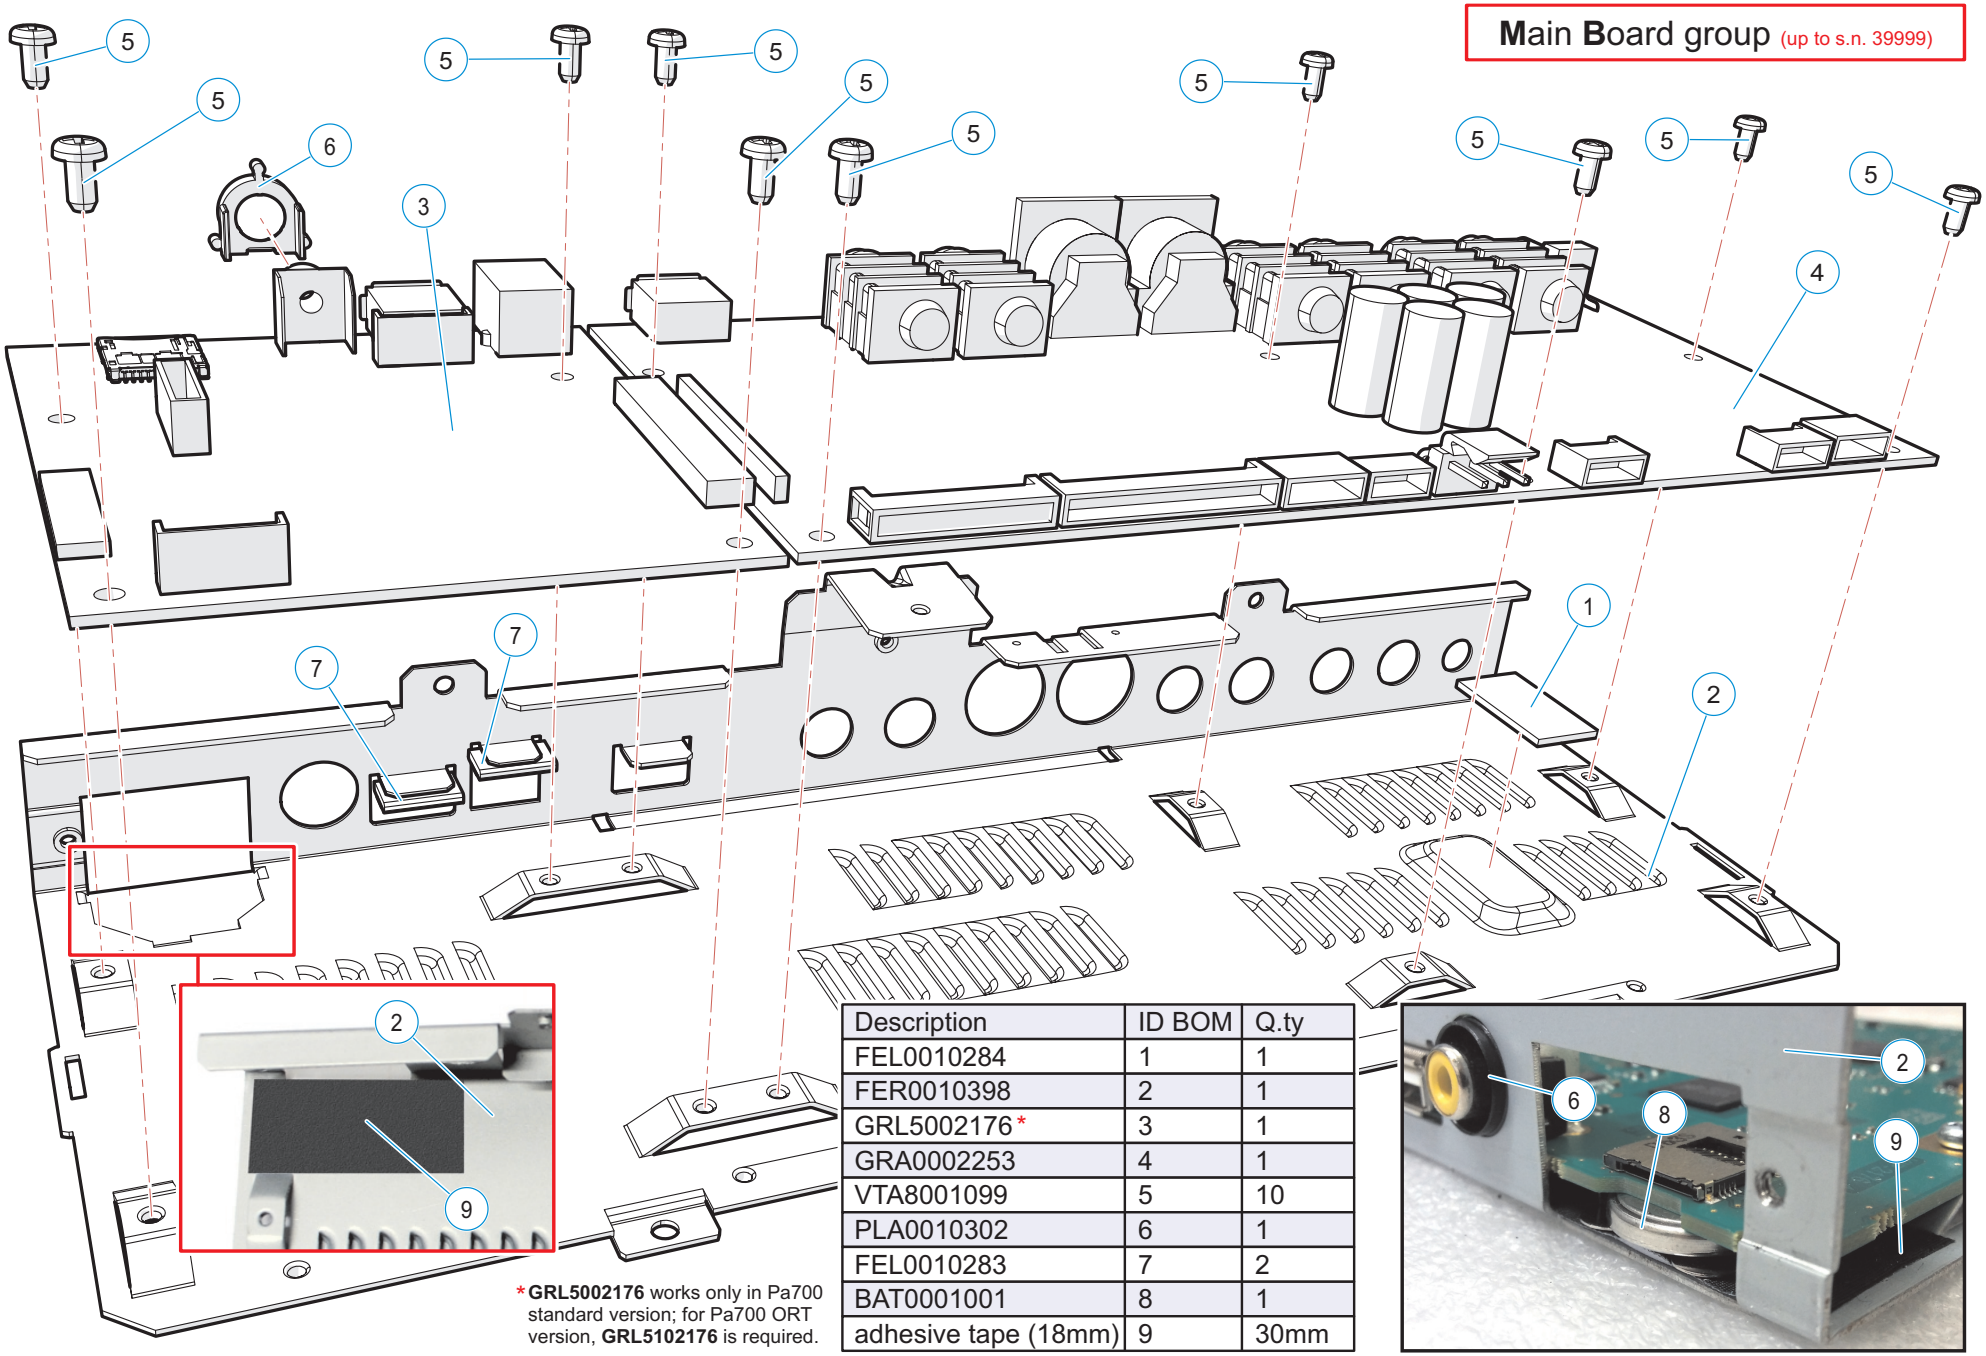

Description	ID BOM	Q.ty
FEL0010284	1	1
FER0010398	2	1
GRL5002176*	3	1
GRA0002253	4	1
VTA8001099	5	10
PLA0010302	6	1
FEL0010283	7	2
BAT0001001	8	1
adhesive tape (18mm)	9	30mm

*__GRL5002176__ works only in Pa700 standard version; for Pa700 ORT version, __GRL5102176__ is required.


Main **B**oard group (from s.n. 40000)

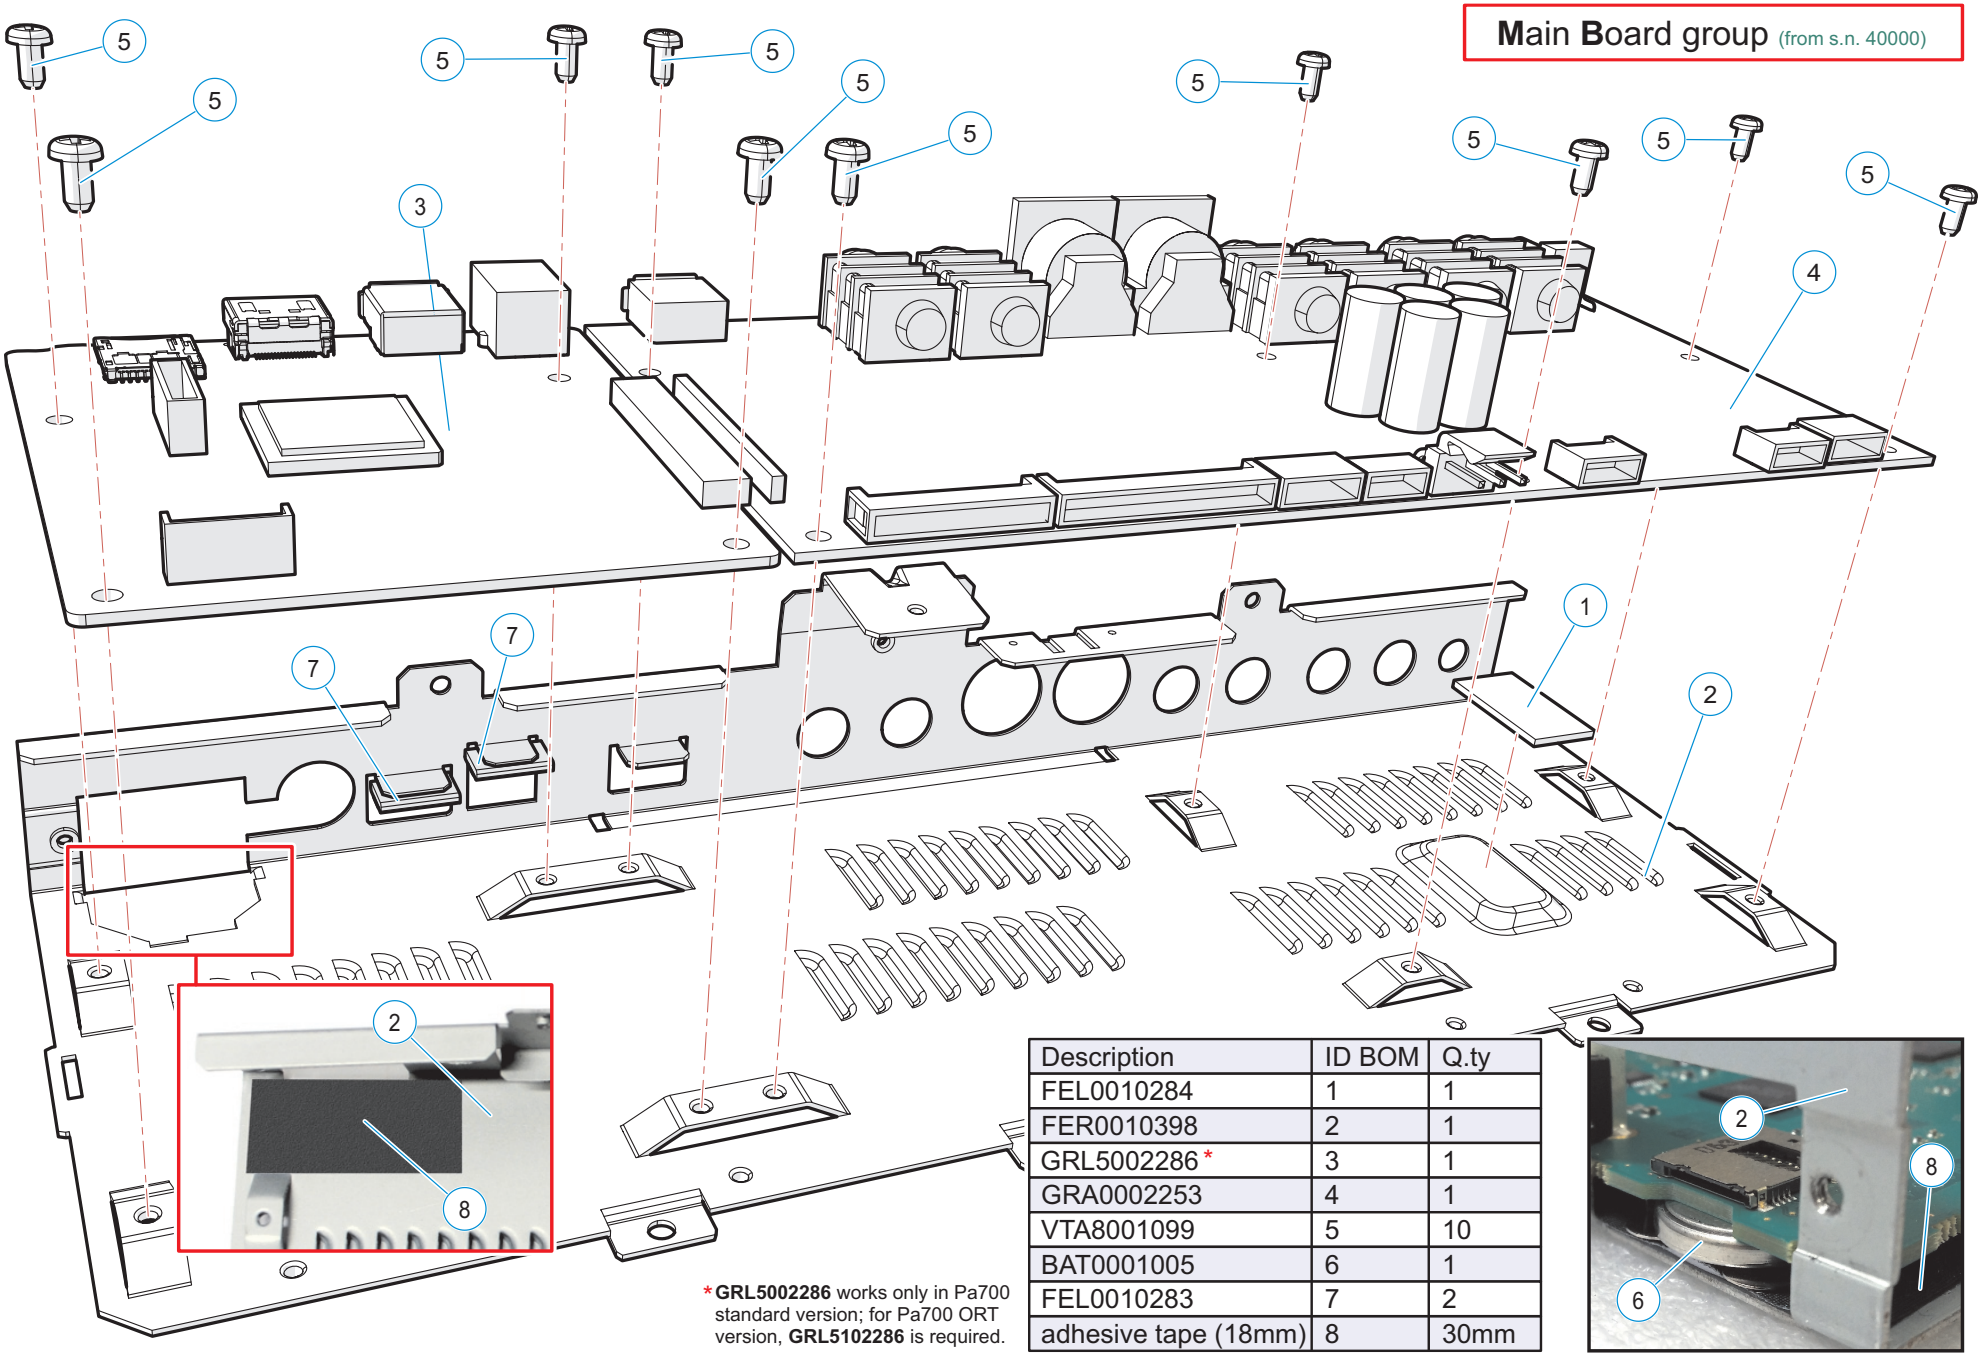

Description	ID BOM	Q.ty
FEL0010284	1	1
FER0010398	2	1
GRL5002286 *	3	1
GRA0002253	4	1
VTA8001099	5	10
BAT0001005	6	1
FEL0010283	7	2
adhesive tape (18mm)	8	30mm


* **GRL5002286** works only in Pa700 standard version; for Pa700 ORT version, **GRL5102286** is required.

GRF0001018

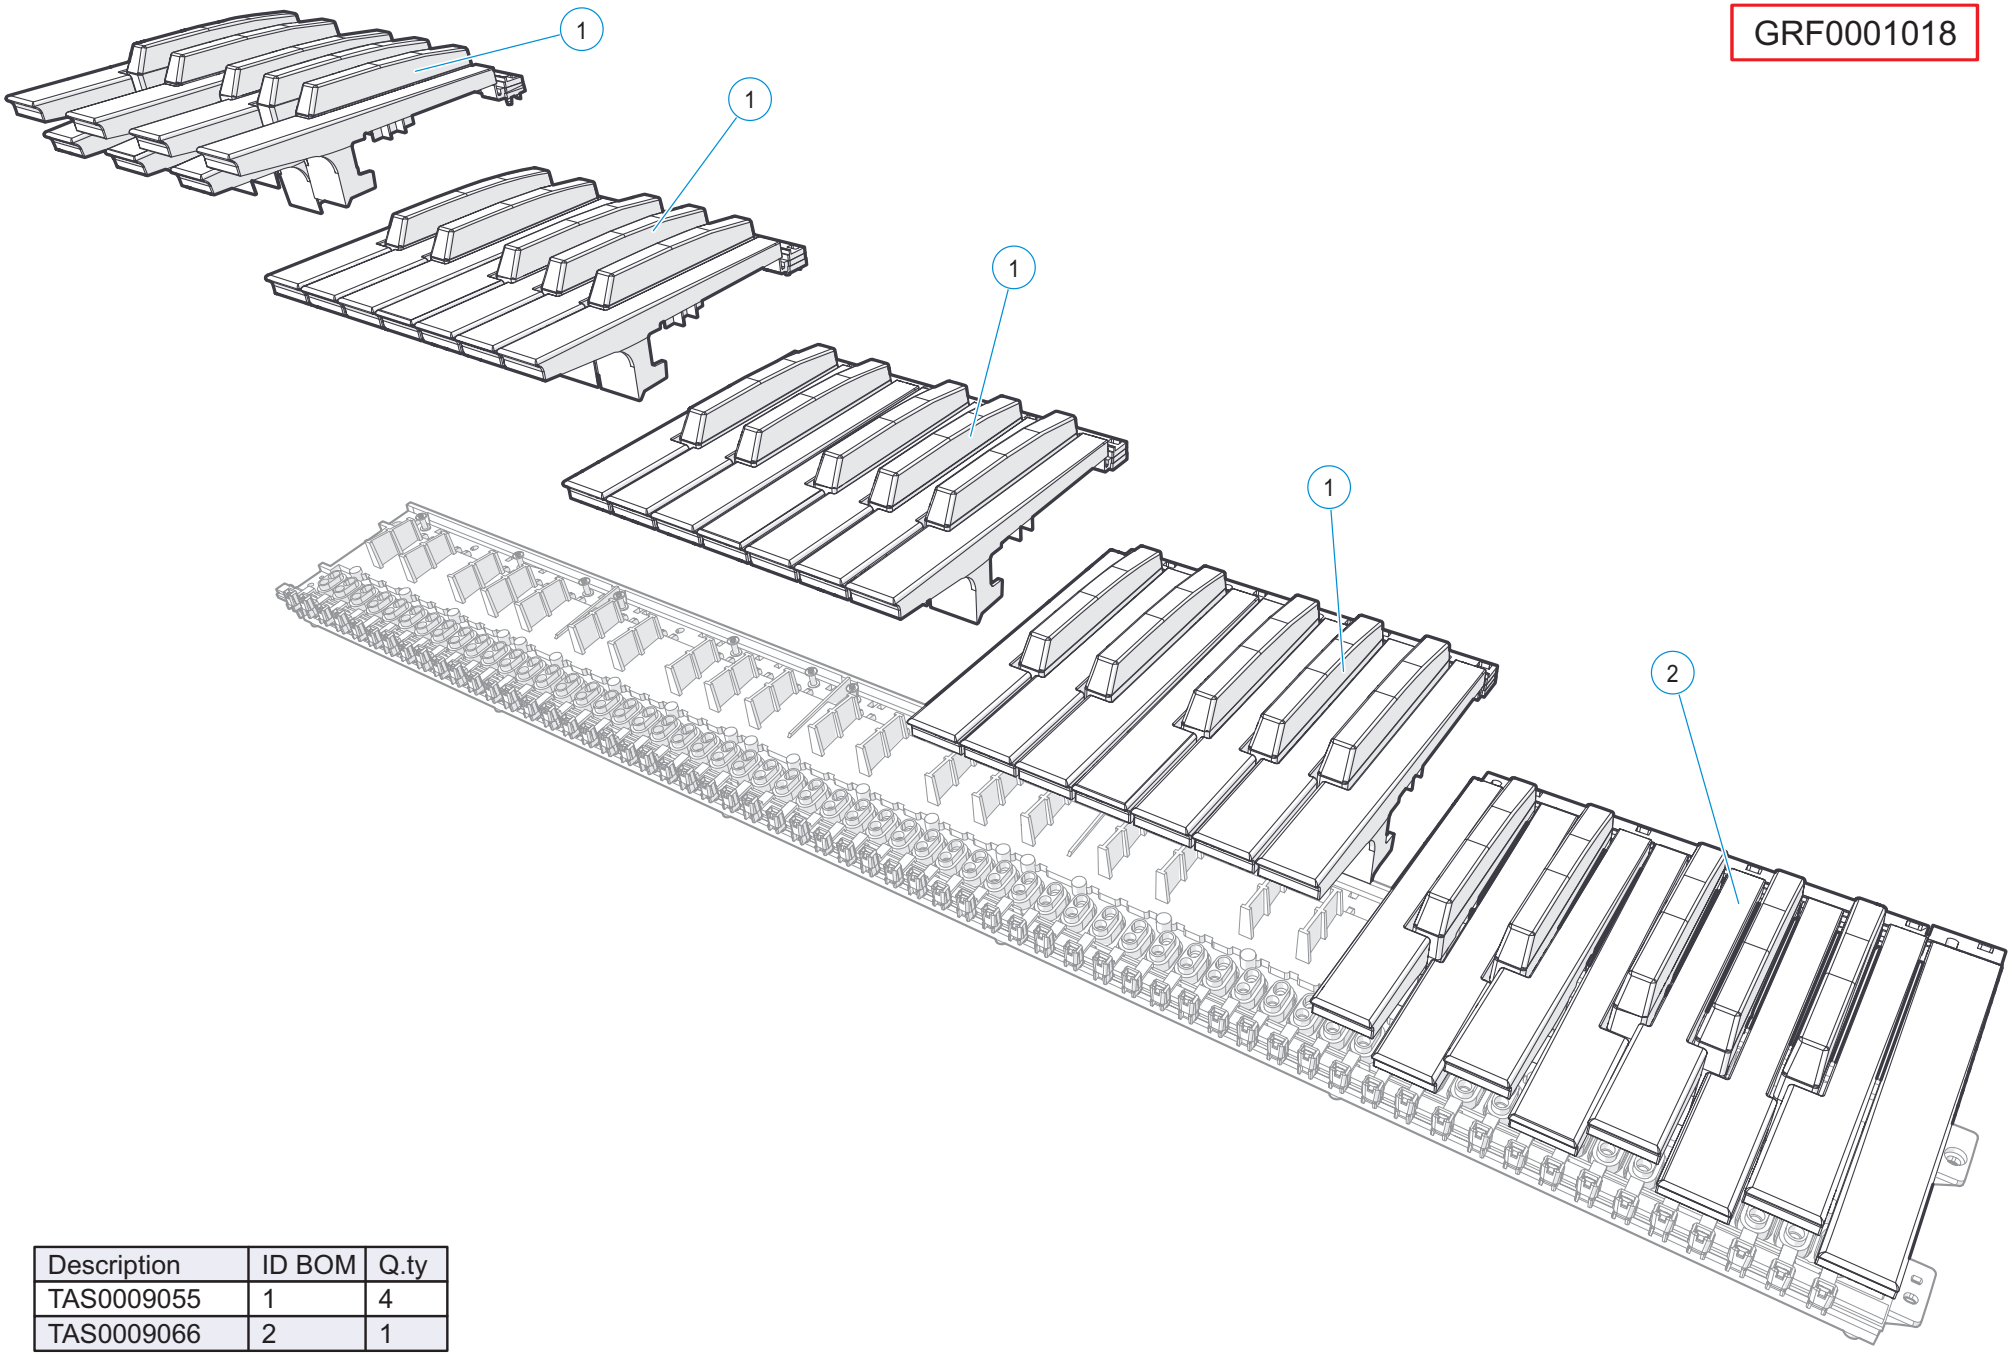

Description	ID BOM	Q.ty
TAS0009055	1	4
TAS0009066	2	1

ORIENTAL scale keypad

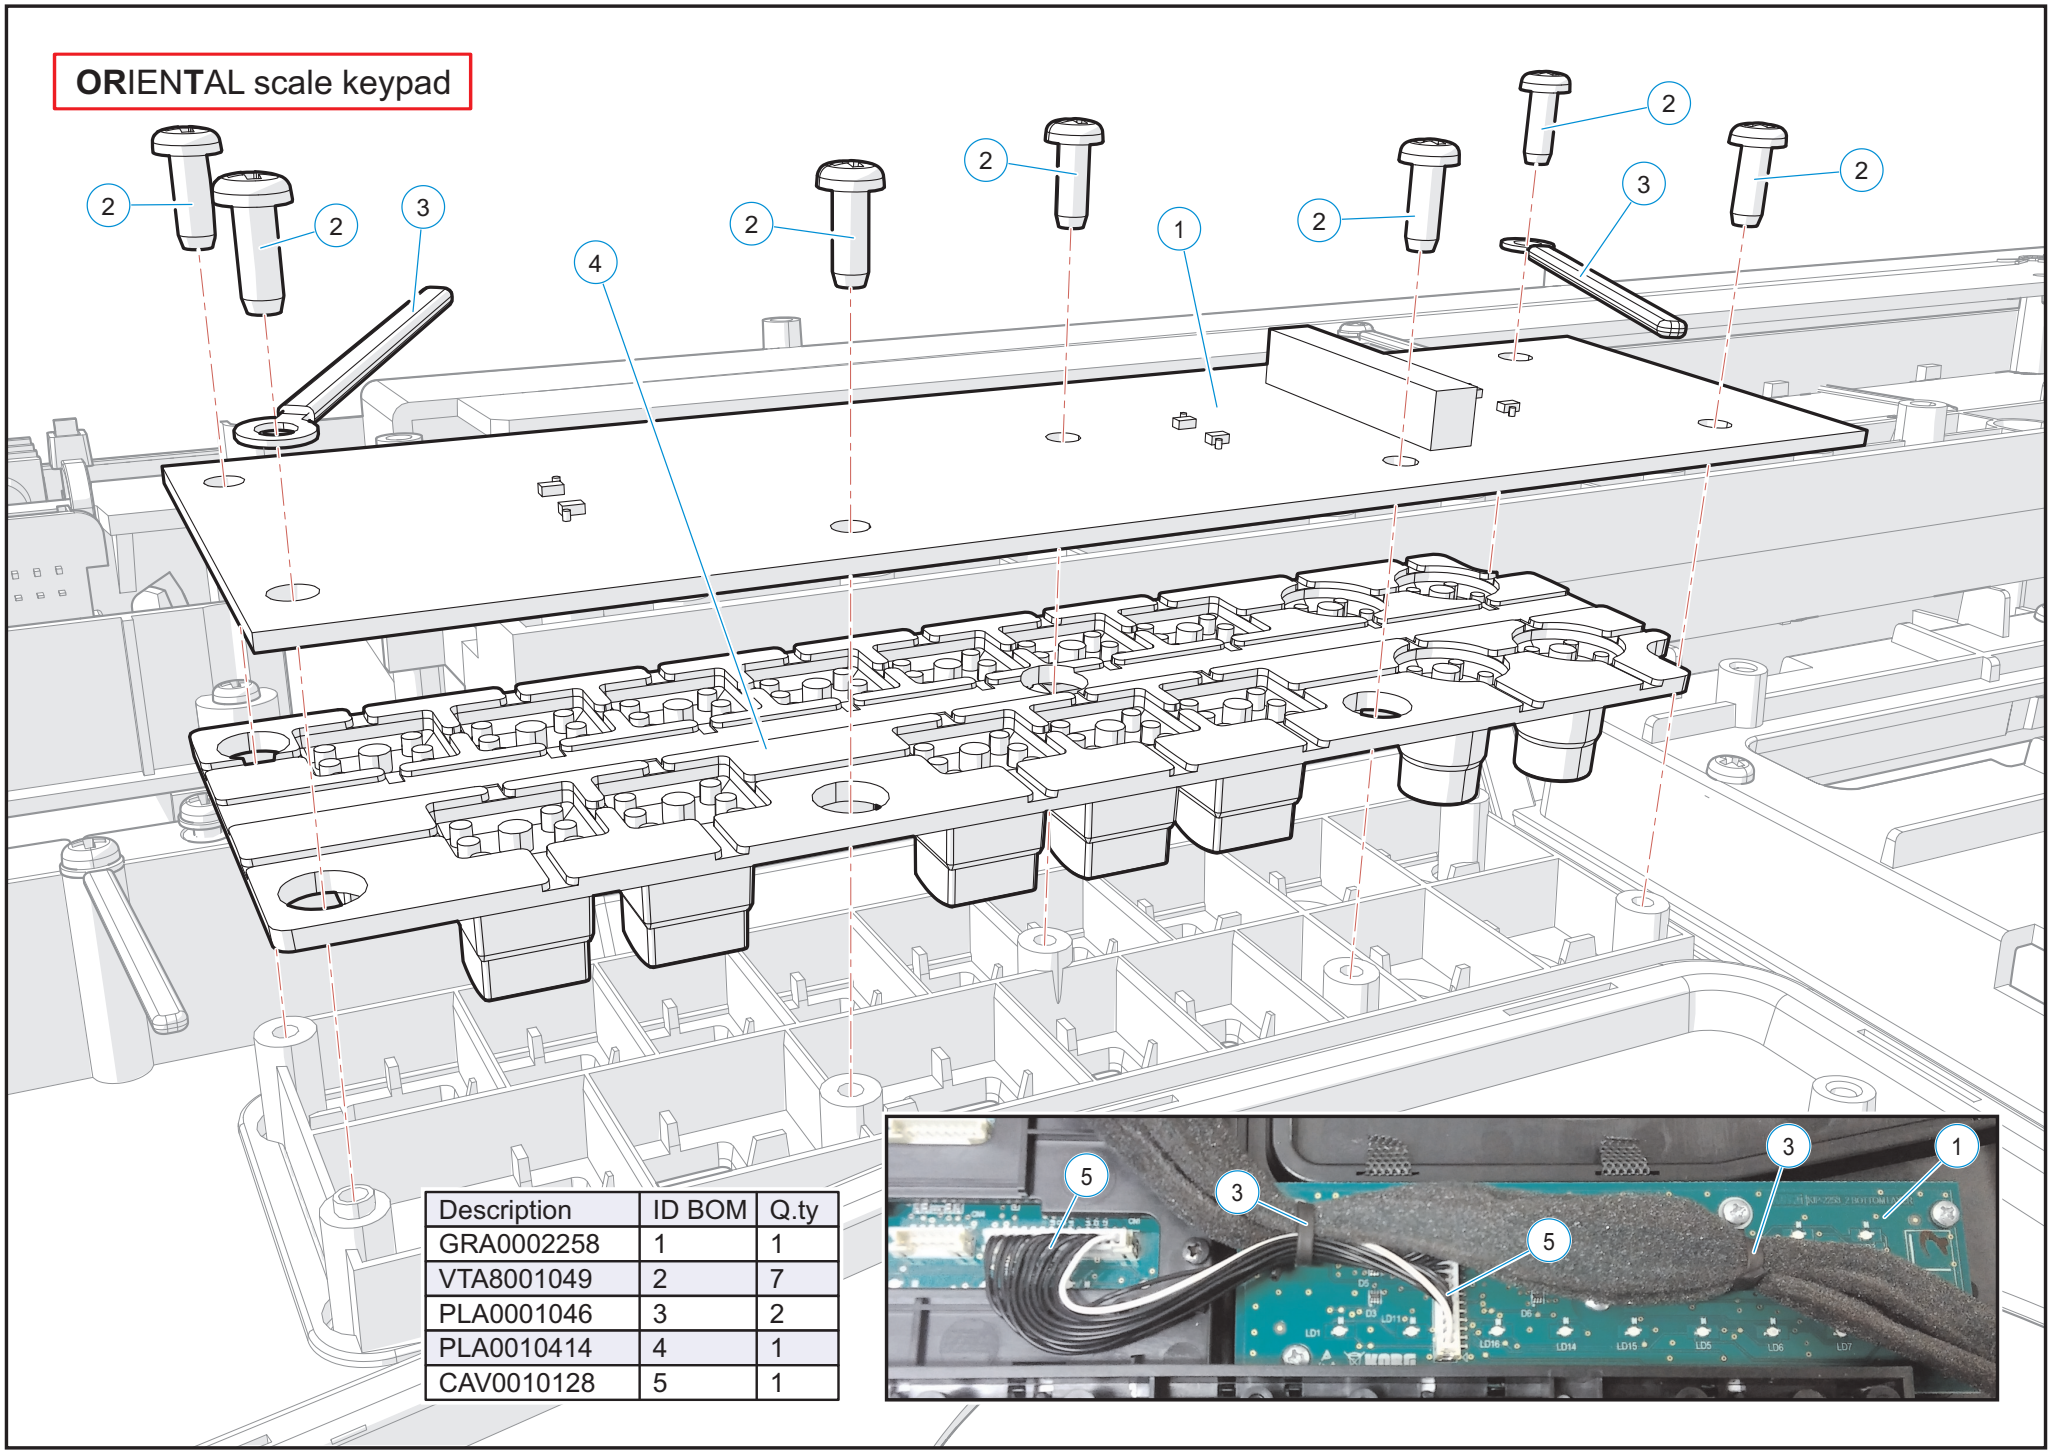

Description	ID BOM	Q.ty
GRA0002258	1	1
VTA8001049	2	7
PLA0001046	3	2
PLA0010414	4	1
CAV0010128	5	1