

pin113: Memo Data 6 :I/O: Parallel data input/output for Memory IC.
pin114: Memo Data 7 :I/O: Parallel data input/output for Memory IC.
pin115: Memo Data 8 :I/O: Parallel data input/output for Memory IC.
pin116: Memo Data 9 :I/O: Parallel data input/output for Memory IC.
pin117: Memo Data 10 :I/O: Parallel data input/output for Memory IC.
pin118: Memo Data 11 :I/O: Parallel data input/output for Memory IC.
pin119: Memo Data 12 :I/O: Parallel data input/output for Memory IC.
pin120: CN VCC :IN: Connect to VCC.
pin121: Memo Data 13 :I/O: Parallel data input/output for Memory IC.
pin122: Memo Data 14 :I/O: Parallel data input/output for Memory IC.
pin123: Memo Data 15 :I/O: Parallel data input/output for Memory IC.
pin124: SRQ :O: V BUS SRQ output.
pin125: VDD : - : Positive supply voltage.
pin126: VSS : - : Negative supply voltage.
pin127: NU :IN: Not in use.
pin128: VSS : - : Negative supply voltage.
pin129: NU :IN: Not in use.
pin130: VDD : - : Positive supply voltage.
pin131: Memo Addrss 0: O : Address output to Memory IC.
pin132: Memo Addrss 1: O : Address output to Memory IC.
pin133: Memo Addrss 2: O : Address output to Memory IC.
pin134: Memo Addrss 3: O : Address output to Memory IC.
pin135: SYS POWER :O: System power supply control signal output.

pin136: Memo Addrss 4: O : Address output to Memory IC.
pin137: Memo Addrss 5: O : Address output to Memory IC.
pin138: Memo Addrss 6: O : Address output to Memory IC.
pin139: Memo Addrss 7: O : Address output to Memory IC.
pin140: Memo Addrss 8: O : Address output to Memory IC.
pin141: Memo Addrss 9: O : Address output to Memory IC.
pin142: VDD : - : Positive supply voltage.
pin143: Memo Addrss 21: O : Control signal output for Memory IC.
pin144: VSS : - : Negative supply voltage.

051-5441-08 BD4828G-TR Precision Vlotage Detector 2.8V



Terminal description

pin 1: OUTPUT : N channel open drain output, positive logic.
pin 2: VDD : Positive supply voltage.
pin 3: GND : Ground.
pin 4: NC : Not in use.
pin 5: NC : Not in use.

ELECTRICAL PARTS LIST

Main PWB (B1) section

Note) Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT 1	092-4000-51	ANT-RECEPT	C 125	166-4711-50	470pF	C 313	163-1063-35	16V 10uF
BL 1	880-2090B	TUNER	C 126	166-4711-50	470pF	C 314	168-4732-78	0.047uF
C 1	168-2232-55	0.022uF	C 127	166-4711-50	470pF	C 315	168-4732-78	0.047uF
C 4	163-1053-65	50V 1uF	C 128	166-4711-50	470pF	C 316	163-2253-65	50V 2.2uF
C 5	168-2732-55	0.027uF	C 129	166-4711-50	470pF	C 317	163-2253-65	50V 2.2uF
C 6	168-2732-55	0.027uF	C 130	166-4711-50	470pF	C 318	168-3322-55	3300pF
C 7	188-4763-37	16V 47uF	C 131	166-4711-50	470pF	C 320	163-1063-35	16V 10uF
C 8	168-2232-55	0.022uF	C 132	166-4711-50	470pF	C 321	163-2253-65	50V 2.2uF
C 9	168-2232-55	0.022uF	C 134	166-2211-50	220pF	C 322	163-2253-65	50V 2.2uF
C 10	168-6822-55	6800pF	C 135	166-2211-50	220pF	C 323	168-3322-55	3300pF
C 11	042-1631-50	10V 100uF	C 136	166-2211-50	220pF	C 324	163-1063-35	16V 10uF
C 12	042-1631-50	10V 100uF	C 137	166-2211-50	220pF	C 325	168-1022-55	1000pF
C 16	168-1042-78	0.1uF	C 201	042-1545-00	16V 2200uF	C 326	168-6832-78	0.068uF
C 18	163-1053-65	50V 1uF	C 202	172-2231-15	0.022uF	C 327	168-6832-78	0.068uF
C 20	163-4763-15	6.3V 47uF	C 203	042-1669-00	16V 100uF	C 328	168-1042-78	0.1uF
C 22	166-1011-50	100pF	C 204	188-2263-37	16V 22uF	C 329	168-1022-55	1000pF
C 23	166-1011-50	100pF	C 205	168-4732-78	0.047uF	C 330	168-1022-55	1000pF
C 24	166-3311-50	330pF	C 210	163-2263-15	6.3V 22uF	C 332	163-1063-35	16V 10uF
C 25	166-1501-50	15pF CH	C 211	163-2263-35	16V 22uF	C 333	163-1063-35	16V 10uF
C 26	166-1501-50	15pF CH	C 216	187-1073-35	16V 100uF	C 334	163-1063-35	16V 10uF
C 28	168-1532-55	0.015uF	C 222	188-4763-37	16V 47uF	C 335	163-1063-35	16V 10uF
C 29	168-2232-55	0.022uF	C 223	168-2232-55	0.022uF	C 337	163-2253-65	50V 2.2uF
C 55	166-2201-50	22pF CH	C 224	172-4731-15	0.047uF	C 338	163-2253-65	50V 2.2uF
C 66	166-2201-50	22pF CH	C 230	042-1631-50	10V 100uF	C 340	163-2263-15	6.3V 22uF
C 67	168-1032-55	0.01uF	C 241	188-1063-37	16V 10uF	C 351	168-1042-78	0.1uF
C 68	168-2232-55	0.022uF	C 243	042-1631-50	10V 100uF	C 353	042-0398-53	16V 3.3uF TAN
C 101	178-2242-78	0.22uF	C 245	168-1042-78	0.1uF	C 354	168-1042-78	0.1uF
C 102	178-2242-78	0.22uF	C 279	188-1073-27	10V 100uF	C 356	168-1042-78	0.1uF
C 103	178-2242-78	0.22uF	C 280	042-0416-60	25V 10uF TAN	C 357	042-0423-97	16V 10uF TAN
C 104	178-2242-78	0.22uF	C 281	042-1452-81	10V 220uF	C 358	042-0423-97	16V 10uF TAN
C 106	042-0560-84	16V 47uF	C 282	042-1631-50	10V 100uF	C 359	168-1042-78	0.1uF
C 107	042-0560-56	50V 3.3uF	C 283	042-1631-50	10V 100uF	C 360	042-0397-50	16V 1uF TAN
C 108	042-0560-63	16V 22uF	C 284	168-2232-55	0.022uF	C 362	168-1042-78	0.1uF
C 109	043-0506-50	0.1uF	C 285	168-1042-78	0.1uF	C 363	166-1011-50	100pF
C 110	043-0506-50	0.1uF	C 286	166-2211-50	220pF	C 364	166-1011-50	100pF
C 111	043-0506-50	0.1uF	C 287	168-1042-78	0.1uF	C 366	168-1022-55	1000pF
C 112	043-0506-50	0.1uF	C 302	163-1063-35	16V 10uF	C 367	168-4732-78	0.047uF
C 113	043-0506-50	0.1uF	C 303	168-1032-55	0.01uF	C 368	168-6822-55	6800pF
C 114	043-0506-50	0.1uF	C 304	168-1032-55	0.01uF	C 370	168-2222-55	2200pF
C 115	043-0506-50	0.1uF	C 306	163-1063-35	16V 10uF	C 371	168-2222-55	2200pF
C 116	043-0506-50	0.1uF	C 307	168-3922-55	3900pF	C 372	168-2222-55	2200pF
C 121	163-1063-35	16V 10uF	C 308	168-3922-55	3900pF	C 373	168-2222-55	2200pF
C 122	163-1063-35	16V 10uF	C 310	163-1063-35	16V 10uF	C 374	163-2253-65	50V 2.2uF
C 123	163-1063-35	16V 10uF	C 311	163-1063-35	16V 10uF	C 375	163-2253-65	50V 2.2uF
C 124	163-1063-35	16V 10uF	C 312	163-1063-35	16V 10uF	C 376	168-1042-78	0.1uF

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C 377	163-1063-35	16V 10uF	C 910	166-1011-50	100pF	D 223	001-1310-00	KDS160
C 378	163-2253-65	50V 2.2uF	C 912	168-1022-55	1000pF	D 224	001-0466-91	S5688G
C 379	163-2253-65	50V 2.2uF	C 913	168-4722-55	4700pF	D 225	001-0466-91	S5688G
C 380	163-2253-65	50V 2.2uF	D 101	001-2403-90	MIF60	D 227	001-1310-00	KDS160
C 381	163-1063-35	16V 10uF	D 102	001-2403-90	MIF60	D 229	001-0466-90	S5688B
C 382	178-1052-78	1uF	D 103	001-2403-90	MIF60	D 230	001-0466-90	S5688B
C 383	163-1063-35	16V 10uF	D 104	001-2403-90	MIF60	D 231	001-0466-90	S5688B
C 384	163-1063-35	16V 10uF	D 105	001-2403-90	MIF60	D 241	001-0504-45	HZS9B1L
C 385	178-1052-78	1uF	D 106	001-2403-90	MIF60	D 242	001-0504-50	HZS11A2L
C 386	163-3353-65	50V 3.3uF	D 107	001-2403-90	MIF60	D 280	001-2606-90	MIFS4
C 387	178-3342-78	0.33uF	D 108	001-2403-90	MIF60	D 301	001-0529-34	MA8062L
C 388	178-1052-78	1uF	D 201	001-0592-00	RM4Z	D 401	001-1310-00	KDS160
C 389	163-3363-25	10V 33uF	D 203	001-0504-46	HZS9B2L	D 402	001-1310-00	KDS160
C 390	168-1042-78	0.1uF	D 211	001-1310-00	KDS160	D 403	001-0529-44	MA8082M
C 391	168-1042-78	0.1uF	D 212	001-1310-00	KDS160	D 404	001-1310-00	KDS160
C 392	168-1042-78	0.1uF	D 213	001-1310-00	KDS160	D 405	001-1310-00	KDS160
C 394	163-1063-35	16V 10uF	D 214	001-0466-91	S5688G	D 406	001-1310-00	KDS160
C 395	163-2253-65	50V 2.2uF	D 221	001-0466-90	S5688B	D 603	001-1310-00	KDS160
C 396	163-2253-65	50V 2.2uF	IC 1	051-6201-90	LC72146M	D 610	001-1310-00	KDS160
C 397	168-2222-55	2200pF	IC 101	051-2053-00	LA47508	D 651	001-7062-90	CL150FG
C 398	168-2222-55	2200pF	IC 220	051-3201-90	AN77L06	F 101	060-8023-58	CHIP FUSE
C 399	163-2253-65	50V 2.2uF	IC 230	051-1014-08	TA7291F	FIL 301	060-3110-90	CHIP FUSE
C 401	042-1669-00	16V 100uF	IC 280	051-3605-90	NJM2360A	L 403	010-3105-62	EMI COIL
C 402	166-1011-50	100pF	IC 301	051-5020-90	M61508FP	L 404	010-3105-62	EMI COIL
C 430	163-1063-35	16V 10uF	IC 302	051-3034-90	NJM4558V	L 405	010-3105-62	EMI COIL
C 439	168-2222-55	2200pF	IC 304	051-6702-08	LC89052T	L 601	010-3107-50	2.2uH
C 440	168-2222-55	2200pF	IC 305	051-6703-08	AK4384	L 602	010-3107-50	2.2uH
C 441	168-2222-55	2200pF	IC 306	051-5030-90	M61523FP	L 603	010-3107-50	2.2uH
C 442	168-2222-55	2200pF	IC 308	051-5835-90	SHAKIT	L 604	010-3107-50	2.2uH
C 443	168-2222-55	2200pF	IC 309	051-3263-90	NJU7200U3	P 500	074-1106-12	12P
C 444	168-2222-55	2200pF	IC 401	051-5834-90	uPD5701-028	P 501	074-1106-12	12P
C 445	168-1042-78	0.1uF	IC 406	051-3034-90	NJM4558V	Q 6	125-3004-90	KTA1504S
C 446	168-1042-78	0.1uF	IC 602	051-6600-58	HA12187FP	Q 7	125-3004-90	KTA1504S
C 447	168-1042-78	0.1uF	IC 604	052-3934-00	M30622MWP-128GP	Q 8	125-2199-93	KRC103S
C 448	168-1042-78	0.1uF	IC 605	051-5437-08	S-80821ANMP	Q 201	102-3420-00	2SC3420
C 449	168-1042-78	0.1uF	IC 606	051-0869-55	NJM2103M	Q 202	108-0241-50	2SK241
C 450	163-2273-25	10V 220uF	J 2	074-1138-70	20P	Q 210	125-3007-90	KTA1298
C 451	163-1073-15	6.3V 100uF	J 201	074-1214-00	16P	Q 211	125-2199-96	KRC106S
C 456	163-1063-35	16V 10uF	J 601	074-1194-00	13P	Q 212	125-3004-90	KTA1504S
C 457	163-1063-35	16V 10uF	J 602	074-1198-68	18P	Q 213	192-2712-00	2SC2712
C 605	042-1505-80	25V 1uF	J 604	076-0313-02	2P	Q 214	125-3007-90	KTA1298
C 606	168-4732-78	0.047uF	L 1	010-2275-53	220uH	Q 222	125-3004-90	KTA1504S
C 613	042-0576-00	5.5V 0.1F	L 2	010-2285-56	BLM21B222S	Q 223	125-2199-93	KRC103S
C 614	168-1032-55	0.01uF	L 3	010-2285-56	BLM21B222S	Q 224	101-0941-00	2SB941
C 615	042-1577-00	6.3V 100uF	L 52	010-4046-00	30uF	Q 225	125-3004-90	KTA1504S
C 616	163-1063-35	16V 10uF	L 101	010-8026-00	CHOKE	Q 226	192-2712-00	2SC2712
C 617	168-1022-55	1000pF	L 202	010-3406-54	2.2uH	Q 227	125-4014-90	KTC2020D
C 619	168-4732-78	0.047uF	L 211	010-3407-59	5.6uH	Q 228	125-2199-93	KRC103S
C 620	178-2242-78	0.22uF	L 280	010-3406-66	22uH	Q 229	190-1416-00	2SA1416
C 630	166-1011-50	100pF	L 281	010-3406-66	22uH	Q 230	125-3007-90	KTA1298
C 631	166-1011-50	100pF	L 282	010-6003-03	270uH	Q 231	190-1416-00	2SA1416
C 632	168-1032-55	0.01uF	L 283	010-2285-56	BLM21B222S	Q 232	125-0199-92	KRA102S
C 633	168-1032-55	0.01uF	L 301	010-2285-58	BLM21A102FPB	Q 233	125-2199-93	KRC103S
C 635	166-1011-50	100pF	L 302	010-2285-58	BLM21A102FPB	Q 235	125-2199-93	KRC103S
C 636	166-1011-50	100pF	L 303	010-2285-58	BLM21A102FPB	Q 236	125-3004-90	KTA1504S
C 637	166-1011-50	100pF	L 304	010-2285-58	BLM21A102FPB	Q 240	125-2199-93	KRC103S
C 638	166-1011-50	100pF	L 305	010-2285-58	BLM21A102FPB	Q 242	125-2199-93	KRC103S
C 640	166-1011-50	100pF	L 308	010-2285-58	BLM21A102FPB	Q 244	125-0199-92	KRA102S
C 641	166-1011-50	100pF	L 309	010-2285-58	BLM21A102FPB	Q 245	125-2199-96	KRC106S
C 642	166-1011-50	100pF	L 310	010-2285-58	BLM21A102FPB	Q 248	125-2199-93	KRC103S
C 643	166-1011-50	100pF	L 311	010-2285-58	BLM21A102FPB	Q 250	125-4015-90	KTC2026
C 645	166-1011-50	100pF	L 312	010-2285-58	BLM21A102FPB	Q 251	125-2199-93	KRC103S
C 691	163-2263-15	6.3V 22uF	L 313	010-2285-58	BLM21A102FPB	Q 252	125-2199-96	KRC106S
C 692	163-2263-15	6.3V 22uF	L 314	010-2285-58	BLM21A102FPB	Q 301	125-2199-93	KRC103S
C 693	166-1007-50	10pF	L 321	010-3406-66	22uH	Q 401	125-0199-92	KRA102S
C 694	166-1007-50	10pF	L 322	010-3406-66	22uH	Q 414	125-2199-96	KRC106S
C 695	166-4711-50	470pF	L 331	010-3105-62	EMI COIL	Q 415	192-2712-00	2SC2712
C 696	166-4711-50	470pF	L 332	010-3105-62	EMI COIL	Q 416	125-0199-96	KRA106S
C 904	168-1032-55	0.01uF	L 401	010-3406-66	22uH	Q 424	125-2199-96	KRC106S
C 905	168-1032-55	0.01uF	L 402	010-3105-62	EMI COIL	Q 425	125-2199-96	KRC106S
C 907	168-1032-55	0.01uF	D 222	001-0466-90	S5688B	Q 426	125-0199-96	KRA106S

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
Q 602	125-2199-93	KRC103S	R 244	116-1811-15	1/4WS 180ohm	R 401	119-4721-15	1/16W 4.7Kohm
Q 603	125-3004-90	KTA2504S	R 247	119-1011-15	1/16W 100ohm	R 408	119-3931-15	1/16W 39Kohm
Q 617	125-2199-93	KRC103S	R 248	119-1031-15	1/16W 10Kohm	R 409	119-1021-15	1/16W 1Kohm
Q 697	125-4012-90	KTD1304	R 249	116-1221-15	1/4WS 1.2Kohm	R 410	119-1021-15	1/16W 1Kohm
Q 698	125-4012-90	KTD1304	R 250	119-1031-15	1/16W 10Kohm	R 415	119-1021-15	1/16W 1Kohm
R 1	119-1021-15	1/16W 1Kohm	R 251	116-1221-15	1/4WS 1.2Kohm	R 416	119-1021-15	1/16W 1Kohm
R 7	119-1231-15	1/16W 12Kohm	R 252	116-1521-15	1/4WS 1.5Kohm	R 417	119-1021-15	1/16W 1Kohm
R 8	119-1031-15	1/16W 10Kohm	R 260	119-2221-15	1/16W 2.2Kohm	R 418	119-1021-15	1/16W 1Kohm
R 9	119-4741-15	1/16W 470Kohm	R 261	119-1031-15	1/16W 10Kohm	R 419	119-4721-15	1/16W 4.7Kohm
R 10	119-2221-15	1/16W 2.2Kohm	R 281	119-2291-15	1/16W 2.2ohm	R 474	119-0000-05	JW
R 14	119-5631-15	1/16W 56Kohm	R 282	119-2291-15	1/16W 2.2ohm	R 477	119-0000-05	JW
R 15	119-1031-15	1/16W 10Kohm	R 283	119-2721-15	1/16W 2.7Kohm	R 478	119-1041-15	1/16W 100Kohm
R 16	119-2221-15	1/16W 2.2Kohm	R 284	119-1531-15	1/16W 15Kohm	R 479	119-1241-15	1/16W 120Kohm
R 18	119-1031-15	1/16W 10Kohm	R 285	116-3911-15	1/4WS 390ohm	R 480	119-1021-15	1/16W 1Kohm
R 19	119-1031-15	1/16W 10Kohm	R 301	119-4711-15	1/16W 470ohm	R 481	119-1221-15	1/16W 1.2Kohm
R 21	119-1021-15	1/16W 1Kohm	R 302	119-4711-15	1/16W 470ohm	R 483	119-8221-15	1/16W 8.2Kohm
R 24	119-1521-15	1/16W 1.5Kohm	R 304	119-4731-15	1/16W 47Kohm	R 484	119-1021-15	1/16W 1Kohm
R 25	119-1521-15	1/16W 1.5Kohm	R 316	119-1021-15	1/16W 1Kohm	R 485	119-2231-15	1/16W 22Kohm
R 26	119-1031-15	1/16W 10Kohm	R 317	119-1021-15	1/16W 1Kohm	R 486	119-1021-15	1/16W 1Kohm
R 27	119-1021-15	1/16W 1Kohm	R 319	119-4721-15	1/16W 4.7Kohm	R 493	119-8221-15	1/16W 8.2Kohm
R 28	119-1021-15	1/16W 1Kohm	R 321	119-4721-15	1/16W 4.7Kohm	R 495	119-1021-15	1/16W 1Kohm
R 29	119-1021-15	1/16W 1Kohm	R 325	032-0140-64	1/10W 43Kohm	R 603	116-6801-15	1/4WS 68ohm
R 30	119-1041-15	1/16W 100Kohm	R 326	032-0140-64	1/10W 43Kohm	R 604	119-3321-15	1/16W 3.3Kohm
R 83	119-2221-15	1/16W 2.2Kohm	R 327	032-0140-64	1/10W 43Kohm	R 606	119-1041-15	1/16W 100Kohm
R 84	119-0000-05	JW	R 328	032-0140-64	1/10W 43Kohm	R 607	119-2231-15	1/16W 22Kohm
R 101	119-1231-15	1/16W 12Kohm	R 329	032-0140-89	1/10W 47Kohm	R 608	119-1031-15	1/16W 10Kohm
R 102	119-1031-15	1/16W 10Kohm	R 330	032-0140-89	1/10W 47Kohm	R 609	119-4731-15	1/16W 47Kohm
R 103	117-0000-05	JW	R 331	119-4721-15	1/16W 4.7Kohm	R 610	119-4721-15	1/16W 4.7Kohm
R 106	119-0000-05	JW	R 335	119-1031-15	1/16W 10Kohm	R 611	119-1031-15	1/16W 10Kohm
R 109	119-2291-15	1/16W 2.2ohm	R 338	119-4731-15	1/16W 47Kohm	R 612	119-0000-05	JW
R 110	119-2291-15	1/16W 2.2ohm	R 344	032-0140-89	1/10W 47Kohm	R 616	119-1021-15	1/16W 1Kohm
R 111	119-2291-15	1/16W 2.2ohm	R 345	119-1041-15	1/16W 100Kohm	R 617	119-1021-15	1/16W 1Kohm
R 112	119-2291-15	1/16W 2.2ohm	R 346	119-1041-15	1/16W 100Kohm	R 629	119-1831-15	1/16W 18Kohm
R 113	119-2291-15	1/16W 2.2ohm	R 347	032-0140-89	1/10W 47Kohm	R 630	119-1831-15	1/16W 18Kohm
R 114	119-2291-15	1/16W 2.2ohm	R 350	119-2711-15	1/16W 270ohm	R 637	119-1041-15	1/16W 100Kohm
R 115	119-2291-15	1/16W 2.2ohm	R 351	119-2711-15	1/16W 270ohm	R 638	119-4731-15	1/16W 47Kohm
R 116	119-2291-15	1/16W 2.2ohm	R 352	119-2711-15	1/16W 270ohm	R 639	119-4721-15	1/16W 4.7Kohm
R 121	119-4721-15	1/16W 4.7Kohm	R 353	119-4721-15	1/16W 4.7Kohm	R 640	119-3331-15	1/16W 33Kohm
R 122	119-4721-15	1/16W 4.7Kohm	R 354	119-4721-15	1/16W 4.7Kohm	R 641	119-1831-15	1/16W 18Kohm
R 123	119-4721-15	1/16W 4.7Kohm	R 359	119-2711-15	1/16W 270ohm	R 642	119-1031-15	1/16W 10Kohm
R 124	119-4721-15	1/16W 4.7Kohm	R 360	119-2711-15	1/16W 270ohm	R 643	119-5621-15	1/16W 5.6Kohm
R 209	119-1021-15	1/16W 1Kohm	R 361	119-2711-15	1/16W 270ohm	R 644	119-1541-15	1/16W 150Kohm
R 210	119-1031-15	1/16W 10Kohm	R 362	119-4701-15	1/16W 47ohm	R 645	119-8221-15	1/16W 8.2Kohm
R 211	119-4731-15	1/16W 47Kohm	R 363	032-0140-62	1/10W 1Kohm (F)	R 646	119-4321-15	1/16W 4.3Kohm
R 212	119-1531-15	1/16W 15Kohm	R 364	032-0140-62	1/10W 1Kohm (F)	R 651	119-1011-15	1/16W 100ohm
R 213	119-1031-15	1/16W 10Kohm	R 365	032-0140-62	1/10W 1Kohm (F)	R 652	119-1511-15	1/16W 150ohm
R 214	119-4731-15	1/16W 47Kohm	R 366	032-0140-62	1/10W 1Kohm (F)	R 653	119-1511-15	1/16W 150ohm
R 215	119-2221-15	1/16W 2.2Kohm	R 367	119-1031-15	1/16W 10Kohm	R 654	119-1511-15	1/16W 150ohm
R 216	119-2221-15	1/16W 2.2Kohm	R 368	119-1011-15	1/16W 100ohm	R 655	119-1011-15	1/16W 100ohm
R 219	119-1031-15	1/16W 10Kohm	R 369	119-1511-15	1/16W 150ohm	R 656	119-0000-05	JW
R 220	119-1031-15	1/16W 10Kohm	R 370	119-1021-15	1/16W 1Kohm	R 657	119-1511-15	1/16W 150ohm
R 221	119-3921-15	1/16W 3.9Kohm	R 371	119-1021-15	1/16W 1Kohm	R 658	119-1521-15	1/16W 1.5Kohm
R 222	119-1801-15	1/16W 18ohm	R 372	119-1021-15	1/16W 1Kohm	R 659	119-1011-15	1/16W 100ohm
R 223	119-1031-15	1/16W 10Kohm	R 373	119-1021-15	1/16W 1Kohm	R 660	119-4721-15	1/16W 4.7Kohm
R 224	116-1591-15	1/4WS 1.5ohm	R 374	119-1541-15	1/16W 150Kohm	R 661	119-4721-15	1/16W 4.7Kohm
R 225	116-1591-15	1/4WS 1.5ohm	R 375	119-1011-15	1/16W 100ohm	R 666	119-0000-05	JW
R 226	119-4731-15	1/16W 47Kohm	R 376	119-4741-15	1/16W 470Kohm	R 667	119-0000-05	JW
R 227	119-3321-15	1/16W 3.3Kohm	R 377	119-1041-15	1/16W 100Kohm	R 668	119-0000-05	JW
R 228	119-3321-15	1/16W 3.3Kohm	R 378	119-3341-15	1/16W 330Kohm	R 671	119-4731-15	1/16W 47Kohm
R 229	116-1591-15	1/4WS 1.5ohm	R 379	119-2741-15	1/16W 270Kohm	R 674	119-2711-15	1/16W 270ohm
R 230	119-2231-15	1/16W 22Kohm	R 380	119-1041-15	1/16W 100Kohm	R 677	119-1031-15	1/16W 10Kohm
R 231	116-1591-15	1/4WS 1.5ohm	R 381	119-1831-15	1/16W 18Kohm	R 678	119-1031-15	1/16W 10Kohm
R 233	119-1031-15	1/16W 10Kohm	R 385	119-1031-15	1/16W 10Kohm	R 680	119-0000-05	JW
R 234	119-5611-15	1/16W 560ohm	R 386	119-1031-15	1/16W 10Kohm	R 681	119-0000-05	JW
R 235	117-0000-05	JW	R 387	119-1031-15	1/16W 10Kohm	R 682	119-0000-05	JW
R 236	119-1031-15	1/16W 10Kohm	R 388	119-4731-15	1/16W 47Kohm	R 683	119-0000-05	JW
R 238	119-1031-15	1/16W 10Kohm	R 389	119-4721-15	1/16W 4.7Kohm	R 685	119-0000-05	JW(PE-2619B-A)
R 239	119-1221-15	1/16W 1.2Kohm	R 390	119-1021-15	1/16W 1Kohm	R 687	119-0000-05	JW(PE-2619K-A/B)
R 240	116-4711-15	1/4WS 470ohm	R 391	119-1021-15	1/16W 1Kohm	R 688	119-0000-05	JW
R 242	116-4711-15	1/4WS 470ohm	R 392	119-1021-15	1/16W 1Kohm	R 690	119-4721-15	1/16W 4.7Kohm
R 243	119-1031-15	1/16W 10Kohm	R 393	119-1021-15	1/16W 1Kohm	R 691	119-4721-15	1/16W 4.7Kohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R 692	119-0000-05	JW	R 699	119-2231-15	1/16W 22Kohm	SUP 51	060-0122-91	DSP-141N-S00B
R 694	119-0000-05	JW	R 905	119-0000-05	JW	X 1	061-9013-00	7.2MHZ
R 695	119-1031-15	1/16W 10Kohm	R 907	119-6821-15	1/16W 6.8Kohm	X 601	060-1505-50	10MHZ
R 696	119-2231-15	1/16W 22Kohm	S 601	013-6100-00	SWITCH	PWB	039-2460-00	MAIN(WITHOUT COMPONENT)
R 697	119-3311-15	1/16W 330ohm	S 602	013-7106-00	TKR00120670M			
R 698	119-3311-15	1/16W 330ohm	S 603	013-7206-50	SPPB530701			

Sub PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C 500	042-0397-54	10V 2.2uF	P 501	076-0659-12	12P	R 530	119-1231-15	1/16W 12Kohm
C 505	042-0397-54	10V 2.2uF	Q 501	193-1306-00	2SD1306	R 531	119-2231-15	1/16W 22Kohm
C 507	042-0397-54	10V 2.2uF	Q 502	193-1306-00	2SD1306	R 532	119-2231-15	1/16W 22Kohm
C 508	042-0397-54	10V 2.2uF	Q 503	193-1306-00	2SD1306	R 533	119-2231-15	1/16W 22Kohm
C 509	042-0416-56	10V 22uF	Q 504	193-1306-00	2SD1306	R 534	119-2231-15	1/16W 22Kohm
C 510	042-0416-56	10V 22uF	Q 505	193-1306-00	2SD1306	R 535	119-2231-15	1/16W 22Kohm
C 511	042-0416-56	10V 22uF	Q 506	193-1306-00	2SD1306	R 536	119-2231-15	1/16W 22Kohm
C 512	042-0416-56	10V 22uF	R 511	119-1231-15	1/16W 12Kohm	R 537	119-3311-15	1/16W 330ohm
C 513	042-0416-56	10V 22uF	R 512	119-1231-15	1/16W 12Kohm	R 538	119-3311-15	1/16W 330ohm
C 515	042-0416-56	10V 22uF	R 513	119-1031-15	1/16W 10Kohm	R 539	119-3311-15	1/16W 330ohm
C 530	042-0397-54	10V 2.2uF	R 514	119-1031-15	1/16W 10Kohm	R 540	119-3311-15	1/16W 330ohm
C 533	166-2201-50	22pF	R 519	119-1041-15	1/16W 100Kohm	R 541	119-3311-15	1/16W 330ohm
C 534	166-2201-50	22pF	R 520	119-1041-15	1/16W 100Kohm	R 542	119-3311-15	1/16W 330ohm
C 535	166-2201-50	22pF	R 521	119-1041-15	1/16W 100Kohm	R 543	119-1021-15	1/16W 1Kohm
C 536	166-2201-50	22pF	R 522	119-1041-15	1/16W 100Kohm	R 544	119-1021-15	1/16W 1Kohm
C 537	166-2201-50	22pF	R 523	119-1231-15	1/16W 12Kohm	R 545	119-1021-15	1/16W 1Kohm
C 538	166-2201-50	22pF	R 524	119-1031-15	1/16W 10Kohm	R 587	119-1041-15	1/16W 100Kohm
C 541	042-0397-54	10V 2.2uF	R 525	119-1031-15	1/16W 10Kohm	R 588	119-1041-15	1/16W 100Kohm
IC 501	051-3026-90	NJM4580V	R 526	119-1231-15	1/16W 12Kohm	R 596	119-1021-15	1/16W 1Kohm
IC 502	051-3026-90	NJM4580V	R 527	119-1031-15	1/16W 10Kohm	PWB	039-2306-00	PWB(WITHOUT COMPONENT)
IC 503	051-3026-90	NJM4580V	R 528	119-1031-15	1/16W 10Kohm			
P 500	076-0659-12	12P	R 529	119-1231-15	1/16W 12Kohm			

Switch PWB(B3) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C 701	168-1042-78	0.1uF	Q 701	125-3004-90	KTA1504S	R 737	119-2211-15	1/16W 220ohm
C 705	042-0423-97	16V 10ohm TAN	Q 702	192-2712-51	2SC2712GL	R 738	119-2211-15	1/16W 220ohm
C 706	168-1042-78	0.1uF	Q 705	192-2712-00	TRANSISTOR	R 739	119-2711-15	1/16W 270ohm
C 707	042-0423-97	16V 10ohm TAN	Q 706	192-2712-00	TRANSISTOR	R 740	119-2711-15	1/16W 270ohm
C 708	042-0671-00	16V 4.7ohm TAN	Q 707	192-2712-00	TRANSISTOR	R 741	119-1031-15	1/16W 10Kohm
C 710	168-1042-78	0.1uF	Q 708	125-2199-93	KRC103S	R 742	119-2221-15	1/16W 2.2Kohm
C 711	042-0671-00	16V 4.7ohm TAN	Q 709	125-3007-90	KTA1298	R 743	119-1031-15	1/16W 10Kohm
C 718	168-1022-55	50V 1000pF	Q 710	125-2017-96	RN1426	R 744	119-2221-15	1/16W 2.2Kohm
C 719	168-1022-55	50V 1000pF	Q 711	125-2017-96	RN1426	R 748	119-1011-15	1/16W 100ohm
C 720	168-1022-55	50V 1000pF	Q 712	125-2017-96	RN1426	R 749	119-1011-15	1/16W 100ohm
C 721	042-0398-53	16V 3.3ohm TAN	Q 713	125-2017-96	RN1426	R 750	032-0140-00	1/10W 56Kohm (F)
C 722	042-0398-53	16V 3.3ohm TAN	Q 714	125-2017-96	RN1426	R 751	032-0140-53	1/10W 2.2Kohm (F)
C 723	042-0398-53	16V 3.3ohm TAN	Q 715	125-2017-96	RN1426	R 752	032-0140-73	1/10W 820ohm (F)
C 725	166-1011-50	50V 100pF	Q 716	125-3007-90	KTA1298	R 753	119-4731-15	1/16W 47Kohm
C 726	166-1011-50	50V 100pF	Q 717	125-2199-93	KRC103S	R 754	119-4731-15	1/16W 47Kohm
C 728	042-0671-00	16V 4.7ohm TAN	R 714	119-4711-15	1/16W 470ohm	R 760	119-3921-15	1/16W 3.9Kohm
D 701	001-7072-91	FRGB1304B	R 715	119-2711-15	1/16W 270ohm	R 761	119-1041-15	1/16W 100Kohm
D 702	001-7072-91	FRGB1304B	R 716	119-2711-15	1/16W 270ohm	R 762	119-1011-15	1/16W 100ohm
D 703	001-7072-91	FRGB1304B	R 717	119-4711-15	1/16W 470ohm	R 763	119-1011-15	1/16W 100ohm
D 704	001-7072-91	FRGB1304B	R 718	119-2711-15	1/16W 270ohm	R 764	119-1011-15	1/16W 100ohm
D 705	001-7072-91	FRGB1304B	R 719	119-2711-15	1/16W 270ohm	R 771	119-1021-15	1/16W 1Kohm
D 706	001-0529-32	MA8056M	R 720	119-4711-15	1/16W 470ohm	R 772	119-1021-15	1/16W 1Kohm
D 709	001-0529-32	MA8056M	R 721	119-2711-15	1/16W 270ohm	R 773	119-1021-15	1/16W 1Kohm
D 710	001-0529-32	MA8056M	R 722	119-2711-15	1/16W 270ohm	R 774	119-1041-15	1/16W 100Kohm
D 711	001-0529-32	MA8056M	R 723	119-2211-15	1/16W 220ohm	R 775	119-1041-15	1/16W 100Kohm
D 712	001-0529-32	MA8056M	R 724	119-1811-15	1/16W 180ohm	R 776	119-1041-15	1/16W 100Kohm
D 713	001-0529-32	MA8056M	R 725	119-1811-15	1/16W 180ohm	R 780	119-3301-15	1/16W 33ohm
D 714	001-0529-32	MA8056M	R 726	119-2211-15	1/16W 220ohm	R 781	119-3301-15	1/16W 33ohm
D 715	001-0529-32	MA8056M	R 727	119-1811-15	1/16W 180ohm	R 782	119-3301-15	1/16W 33ohm
D 716	001-0529-32	MA8056M	R 728	119-1811-15	1/16W 180ohm	R 783	119-3301-15	1/16W 33ohm
D 717	001-0529-32	MA8056M	R 729	119-3911-15	1/16W 390ohm	R 784	119-0000-05	JW
D 718	001-0529-32	MA8056M	R 730	119-3911-15	1/16W 390ohm	R 786	002-0315-01	680ohm
D 719	001-0529-32	MA8056M	R 731	119-5111-15	1/16W 510ohm	S 701	013-6507-50	ILLUMI SWITCH
IC 701	051-6057-10	ML9090-02	R 732	119-5111-15	1/16W 510ohm	S 702	013-6507-50	ILLUMI SWITCH
IC 704	051-6636-18	M62334FP	R 733	119-5611-15	1/16W 560ohm	S 703	013-6507-50	ILLUMI SWITCH
IR 701	060-4017-90	RS-671	R 734	119-5611-15	1/16W 560ohm	S 704	013-6507-50	ILLUMI SWITCH
LCD 701	379-1298-81	INDICATOR(LCD)	R 735	119-2211-15	1/16W 220ohm	S 705	013-6507-50	ILLUMI SWITCH
P 701	076-0647-00	DCP CONECTOR	R 736	119-2211-15	1/16W 220ohm	S 706	013-6507-50	ILLUMI SWITCH

DXZ745MP/DXZ746MP

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
S 707	013-6507-50	ILLUMI SWITCH	S 713	013-6507-50	ILLUMI SWITCH	S 721	013-6507-50	ILLUMI SWITCH
S 708	013-6507-50	ILLUMI SWITCH	S 714	013-6507-50	ILLUMI SWITCH	S 722	013-6507-50	ILLUMI SWITCH
S 709	013-6507-50	ILLUMI SWITCH	S 715	013-6507-50	ILLUMI SWITCH	S 723	016-9900-85	ENCODER-SW
S 710	013-6507-50	ILLUMI SWITCH	S 718	013-6507-50	ILLUMI SWITCH	PWB	039-2440-00	PWB(WITHOUT COMPONENT)
S 711	013-6507-50	ILLUMI SWITCH	S 719	013-6507-50	ILLUMI SWITCH			
S 712	013-6507-50	ILLUMI SWITCH	S 720	013-6507-50	ILLUMI SWITCH			

CD PWB (B4) section: 929-0300-82


REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C 1	168-1042-78	16V 0.1uF	C 132	168-1042-78	16V 0.1uF	R 4	033-1031-15	1/16W 10k ohm
C 4	168-1042-78	16V 0.1uF	C 133	046-1532-78	0.015uF	R 5	033-2231-15	1/16W 22k ohm
C 5	046-1032-78	0.01uF	C 134	168-1042-78	16V 0.1uF	R 6	033-3911-15	1/16W 390 ohm
C 6	168-1042-78	16V 0.1uF	C 135	045-6801-50	50V 68pF	R 7	033-4731-15	1/16W 47k ohm
C 7	178-1052-78	1uF	C 136	178-1052-78	1uF	R 8	033-1051-15	1/16W 1M ohm
C 8	168-1042-78	16V 0.1uF	C 138	168-1042-78	16V 0.1uF	R 9	033-3311-15	1/16W 330 ohm
C 9	046-4722-58	4700pF	C 139	168-1042-78	16V 0.1uF	R 11	033-1011-15	1/16W 100 ohm
C 10	045-1011-50	100pF	C 140	046-6812-58	680pF	R 12	033-4731-15	1/16W 47k ohm
C 11	168-1042-78	16V 0.1uF	C 142	178-1052-78	1uF	R 13	033-1041-15	1/16W 100k ohm
C 13	168-1042-78	16V 0.1uF	C 144	042-0560-85	6.3V 100uF	R 14	033-4721-15	1/16W 4.7k ohm
C 16	168-1042-78	16V 0.1uF	C 145	168-1042-78	16V 0.1uF	R 15	033-4721-15	1/16W 4.7k ohm
C 17	046-1032-78	0.01uF	C 146	168-1042-78	16V 0.1uF	R 19	033-4731-15	1/16W 47k ohm
C 18	178-1052-78	1uF	C 147	178-1052-78	1uF	R 20	033-4731-15	1/16W 47k ohm
C 19	046-1032-78	0.01uF	C 148	042-0595-53	4V220uF	R 23	033-3311-15	1/16W 330 ohm
C 20	168-1042-78	16V 0.1uF	C 149	163-1073-35	16V100uF	R 24	033-4731-15	1/16W 47k ohm
C 21	042-0595-53	4V220uF	C 150	168-1042-78	16V 0.1uF	R 28	033-6841-15	1/16W 680k ohm
C 22	168-1042-78	16V 0.1uF	C 151	178-1052-78	1uF	R 29	033-6841-15	1/16W 680k ohm
C 23	168-1042-78	16V 0.1uF	C 200	178-1052-78	1uF	R 30	033-1041-15	1/16W 100k ohm
C 24	046-1032-78	0.01uF	CCT 1	050-0145-54	1/16W 47kohm x4	R 31	033-1031-15	1/16W 10k ohm
C 25	045-8097-50	8pF	CCT 2	050-0145-58	2.2kohm x 4	R 32	033-1031-15	1/16W 10k ohm
C 26	045-8097-50	8pF	CCT 3	050-0140-63	1/32W 47kohm x4J	R 33	033-1031-15	1/16W 10k ohm
C 27	042-0416-52	10V10uF TAN	CCT101	050-0140-68	1/32W 3.3kohm x4J	R 34	033-6831-15	1/16W 68k ohm
C 28	046-1032-78	0.01uF	D 1	001-2610-90	SQT343	R 35	033-6831-15	1/16W 68k ohm
C 29	168-1042-78	16V 0.1uF	D 2	001-2610-90	SQT343	R 36	033-0000-05	JW
C 30	045-1201-50	12pF	D 3	001-2610-90	SQT343	R 43	033-4731-15	1/16W 47k ohm
C 31	168-1042-78	16V 0.1uF	D 4	001-2610-90	SQT343	R 44	033-4731-15	1/16W 47k ohm
C 32	046-1032-78	0.01uF	D 5	001-2610-90	SQT343	R 45	033-4731-15	1/16W 47k ohm
C 33	046-1032-78	0.01uF	D 6	001-2610-90	SQT343	R 101	033-1231-15	1/16W 12k ohm
C 34	046-1032-78	0.01uF	D 7	001-2610-90	SQT343	R 102	033-3321-15	1/16W 3.3k ohm
C 35	046-1022-58	1000pF	D 101	001-0367-91	1SS226	R 103	033-3331-15	1/16W 33k ohm
C 102	163-1073-35	16V100uF	IC 1	051-7518-18	SN74LVC139APWR	R 104	033-4731-15	1/16W 47k ohm
C 103	046-4722-58	4700pF	IC 2	051-3315-90	TPS76316DBVR	R 105	033-4731-15	1/16W 47k ohm
C 104	046-1032-78	0.01uF	IC 3	051-7239-38	SN74AHCT08PWR	R 106	033-2211-15	1/16W 220 ohm
C 105	168-1042-78	16V 0.1uF	IC 4	051-7518-18	SN74LVC139APWR	R 107	033-2211-15	1/16W 220 ohm
C 106	168-1042-78	16V 0.1uF	IC 5	051-5441-08	BD4828G-TR	R 108	033-1021-15	1/16W 1k ohm
C 107	042-0416-52	10V10uF TAN	IC 6	051-6700-00	TMS320DA140	R 109	033-1021-15	1/16W 1k ohm
C 108	168-1042-78	16V 0.1uF	IC 7	051-7203-48	SN74LV74APW	R 110	033-4731-15	1/16W 47k ohm
C 109	168-1042-78	16V 0.1uF	IC 9	051-9330-00	K4S641632F-TC60	R 115	033-0000-05	JW
C 110	168-1042-78	16V 0.1uF	IC 10	052-5055-11	MBM29DL800B-A90PFTN	R 116	033-5621-15	1/16W 5.6k ohm
C 111	168-1042-78	16V 0.1uF				R 117	033-4731-15	1/16W 47k ohm
C 112	168-4732-78	0.047uF	IC 11	051-6919-08	NJU6391PE	R 118	033-3341-15	1/16W 330k ohm
C 113	168-4732-78	0.047uF	IC 12	051-7221-58	SN74AHC1G04HDCR	R 119	033-2231-15	1/16W 22k ohm
C 114	168-1042-78	16V 0.1uF	IC 13	051-7280-38	TC7SU04FU-TE85L	R 120	033-2231-15	1/16W 22k ohm
C 115	045-4701-50	47pF	IC 14	051-7280-38	TC7SU04FU-TE85L	R 121	117-1001-15	1/10W 10 ohm
C 116	046-4712-58	470pF	IC 101	051-6069-08	FAN8047G3	R 122	033-2211-15	1/16W 220 ohm
C 117	046-4712-58	470pF	IC 102	051-6399-00	TC94A15F	R 123	117-6811-15	1/10W 680 ohm
C 118	168-1042-78	16V 0.1uF	J 1	074-1138-65	15P	R 124	032-0162-50	0.51 ohm
C 119	168-1042-78	16V 0.1uF	J 2	074-1138-60	10P	R 126	033-1021-15	1/16W 1k ohm
C 120	046-1532-78	0.015uF	J 3	074-1237-70	20P	R 127	033-1021-15	1/16W 1k ohm
C 121	046-6822-58	6800pF	Q 1	131-1188-50	2SB1188PQR	R 130	033-1051-15	1/16W 1M ohm
C 122	168-1042-78	16V 0.1uF	Q 2	125-2004-92	RN1402	TM 101	073-0768-90	TERMINAL
C 123	046-1032-78	0.01uF	Q 101	131-1188-50	2SB1188PQR	X 1	061-3534-90	16.92MHz
C 126	046-3332-78	0.033uF	Q 102	131-1188-50	2SB1188PQR	PWB	039-2429-20	PWB(WITHOUT COMPONENT)
C 127	046-4722-58	4700pF	R 1	033-4721-15	1/16W 4.7k ohm			
C 130	168-1042-78	16V 0.1uF	R 2	033-1041-15	1/16W 100k ohm			
C 131	046-1522-58	1500pF	R 3	033-1041-15	1/16W 100k ohm			

LED PWB (B5) section: 929-0300-82

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D 11	001-7058-90	AN1105W-RR	Q 11	060-4015-90	PS1292H	S 2	013-7413-50	LIMIAT
D 12	001-7058-90	AN1105W-RR	Q 12	060-4015-90	PS1292H	PWB	039-1944-21	PWB(WITHOUT COMPONENT)
J 4	074-1138-60	10P	S 1	013-7414-50	CHUCKING			

EXPLODED VIEW • PARTS LIST


DCP section

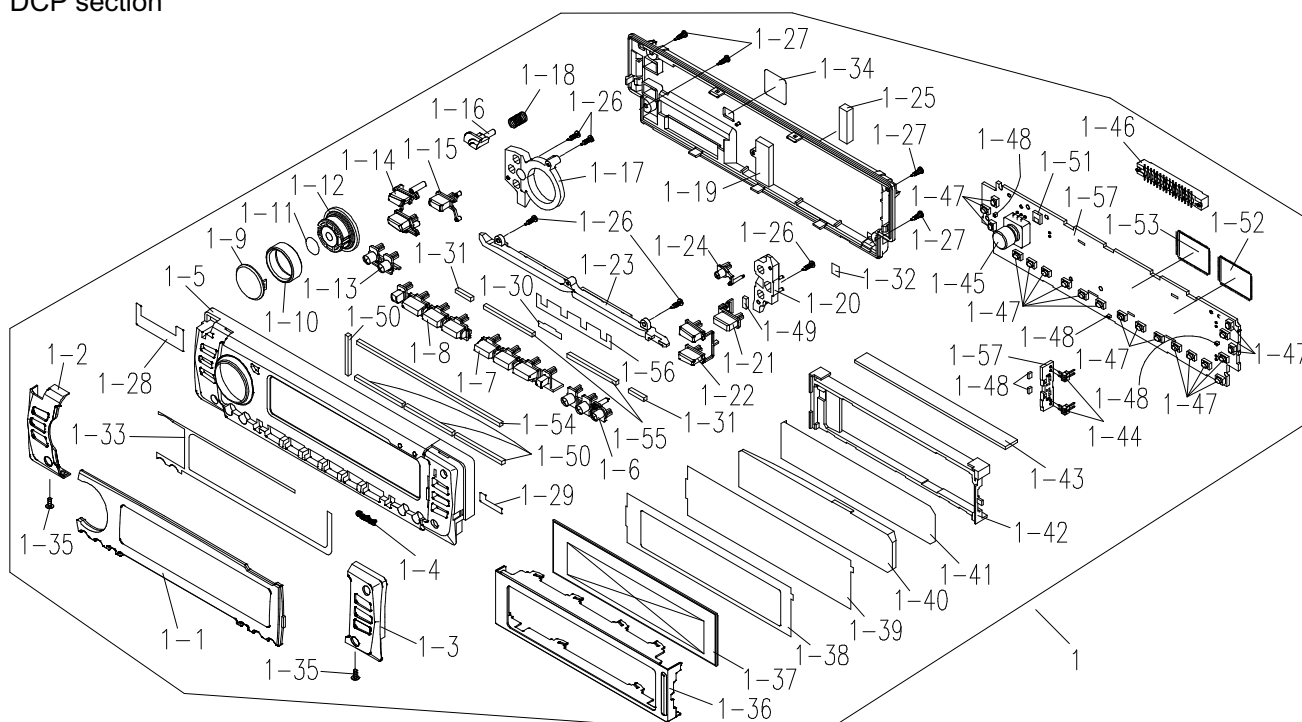

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	DCP-485-600	DCP ASSY(PE-2619B-A)	1	1-26	716-0872-01	PAD SCREW(M1.7x6)	5
	DCP-487-800	DCP ASSY(PE-2619K-A/B)	1	1-27	716-0872-12	PAD SCREW(M1.7x8)	4
1-1	373-1019-01	DIAL CVR(PE-2619B-A)	1	1-28	347-7165-00	SURGE FILM	1
	373-1019-06	DIAL CVR(PE-2619K-A/B)	1	1-29	347-7164-00	SURGE FILM	1
1-2	371-5776-01	FACE PANCEL(PE-2619B-A)	1	1-30	347-7162-00	SHADE	1
	371-5776-05	FACE PANCEL(PE-2619K-A/B)	1	1-31	347-7159-00	CUSHION	2
1-3	371-5775-01	FACE PANCEL(PE-2619B-A)	1	1-32	347-7161-00	SHADE	1
	371-5775-05	FACE PANCEL(PE-2619K-A/B)	1	1-33	347-7168-00	DOUBLE FACE	1
1-4	378-0537-00	BADGE	1	1-34	347-6977-00	COVER FILM	1
1-5	370-6079-01	ESCUTCHEON(PE-2619B-A)	1	1-35	778-6019-01	SCREW(1.7x6)(PE-2619B-A)	2
	370-6079-00	ESCUTCHEON(PE-2619K-A/B)	1		778-6019-00	SCREW(1.7x6)(PE-2619K-A/B)	2
1-6	382-6843-01	BUTTON	1	1-36	331-3689-00	LCD CVR	1
1-7	382-6842-01	BUTTON(PE-2619B-A)	1	1-37	379-1298-81	INDICATOR(LCD)	1
	382-6842-02	BUTTON(PE-2619K-A/B)	1	1-38	347-7252-00	FILM	1
1-8	382-6841-01	BUTTON(PE-2619B-A)	1	1-39	347-7157-00	FILM	1
	382-6841-00	BUTTON(PE-2619K-A/B)	1	1-40	335-7051-00	ILLUMI PLATE	1
1-9	380-5581-00	KNOB CVR	1	1-41	347-7158-00	REFLECTOR	1
1-10	345-5364-00	RUBBER RING	1	1-42	335-7052-00	LCD HOLDER	1
1-11	347-6988-00	DOUBLE FACE	1	1-43	345-5421-00	RUBBER CONNECTOR	1
1-12	380-5582-00	INNER KNOB	1	1-44	076-0708-02	PLUG	2
1-13	382-6840-00	BUTTON	1	1-45	016-9900-85	ENCODER-SW	1
1-14	382-6845-00	BUTTON	1	1-46	076-0647-00	PLUG	1
1-15	382-6846-00	BUTTON	1	1-47	013-6507-50	SWITCH	20
1-16	382-6844-01	BUTTON(PE-2619B-A)	1	1-48	001-7072-91	DIODE	5
	382-6844-00	BUTTON(PE-2619K-A/B)	1	1-49	345-5465-00	CUSHION	1
1-17	335-7088-00	ILLUMI PLATE	1	1-50	347-7167-00	SHADE	4
1-18	750-6750-00	SPRING	1	1-51	060-4017-90	IR-RECEIVE	1
1-19	335-6899-00	REAR CVR	1	1-52	051-6636-18	IC	1
1-20	335-7089-00	ILLUMI PLATE	1	1-53	051-6057-10	IC	1
1-21	382-6849-01	BUTTON	1	1-54	347-7037-00	CUSHION	1
1-22	382-6847-00	BUTTON	1	1-55	345-5307-00	CUSHION	2
1-23	335-7090-00	ILLUMI PLATE	1	1-56	347-7163-00	SHADE	1
1-24	382-6848-00	BUTTON	1	1-57	-----	SW-PWB	1
1-25	345-8647-00	CUSHION	1				

DXZ745MP/DXZ746MP

Inner-Escutcheon section

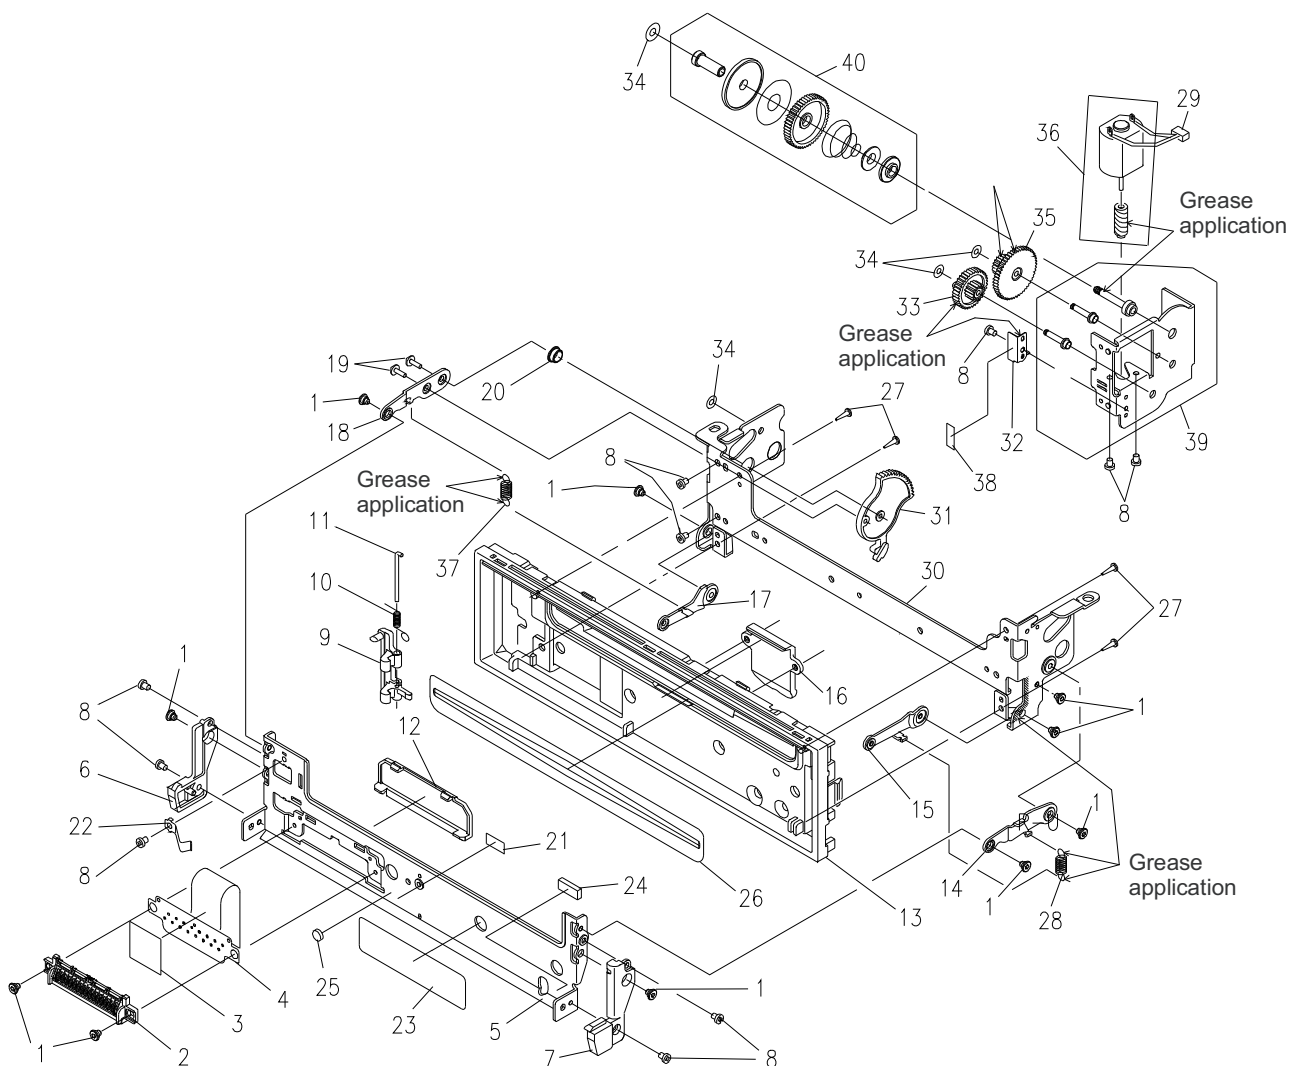


Note) Grease uses FLOIL G-31SB.


NO.	PART NO.	DESCRIPTION	Q'TY
1	716-1715-02	SCREW(M2)	10
2	074-1278-01	OUTLET SOCKET	1
3	347-6528-00	INSULATOR	1
4	039-2409-00	FPC PWB (WITHOUT COMPONENT)	1
5	331-3115-01	DCP HOLDER	1
6	335-6903-00	ARM COVER	1
7	335-6904-00	ARM COVER	1
8	716-1468-20	SCREW(M2x2.5)	10
9	335-7176-00	HOOK	1
10	750-3431-02	SPRING	1
11	341-1802-00	SHAFT	1
12	335-6499-00	CN-CVR	1
13	370-5935-07	INNER-ES	1
14	331-3117-01	LEVER-UP	1
15	331-3118-01	LEVER-LO	1
16	335-6505-00	ILLUMI PLATE	1
17	331-3119-00	LEVER-LO	1
18	331-3120-00	LEVER-UP	1
19	716-1758-00	PAD SCREW(2x5)	2
20	341-1740-00	ROLLER	1

NO.	PART NO.	DESCRIPTION	Q'TY
21	347-6527-00	CUSHION	1
22	750-3457-00	SPRING	1
23	291-0102-00	STICKER	1
24	345-8627-00	CUSHION	1
25	345-8265-00	CUSHION	1
26	346-0150-02	LEATHER SHEET	1
27	716-0872-00	PAD SCREW(M1.7x5)	4
28	750-3304-20	SPRING	1
29	854-4380-01	EX-LEAD	1
30	309-0772-02	FRONT PLATE	1
31	613-0719-00	ARM-GEAR	1
32	750-3432-00	SPRING	1
33	613-0720-00	HUS-GEAR	1
34	746-0768-20	WASHER(1.0x0.5)	1
35	613-0717-00	INPUT GEAR	1
36	634-0023-00	MOTOR ASSY	1
37	750-3303-20	SPRING	1
38	347-6275-00	FILM	1
39	946-0079-01	GEAR BOX ASSY	1
40	947-0513-02	T-LIM GEAR ASSY	1

Main section

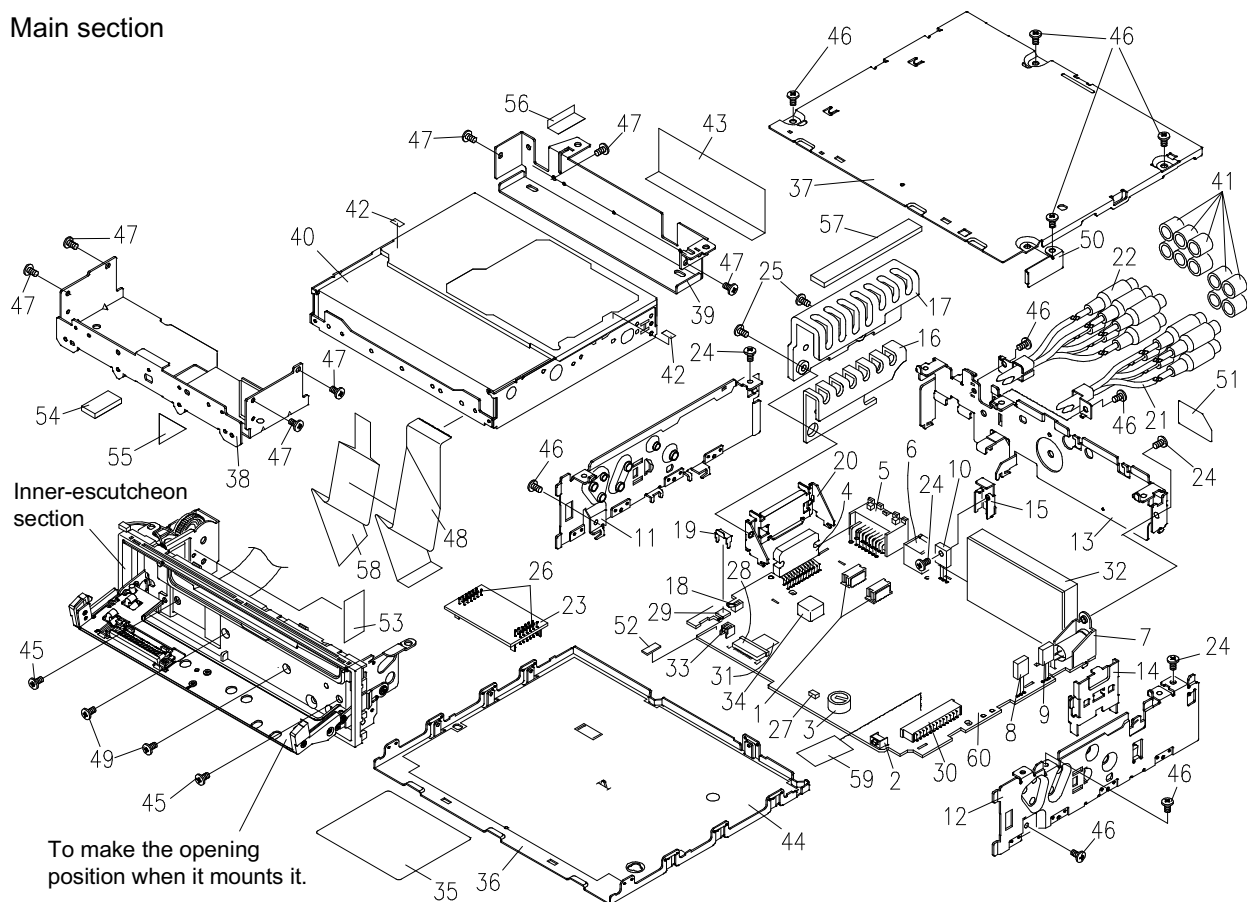

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	074-1106-12	OUTLET SOKET	2	32	880-2090B	TUNER	1
2	013-6100-00	SWITCH	1	33	076-0313-02	PLUG	1
3	042-0576-00	DOUBLE-LAYER-C	1	34	331-2869-00	SHIELD CASE	1
4	051-2053-00	IC	1	35	286-6375-00	SETPLATE(PE-2619B-A)	1
5	074-1214-00	OUTLET SOKET	1		286-6378-00	SETPLATE(PE2619K-A)	1
6	074-1194-00	OUTLET SOKET	1		286-6379-00	SETPLATE(PE2619K-B)	1
7	092-4000-51	ANT-RECEPT	1	36	304-0460-01	LOWER CVR	1
8	101-0941-00	TRANSISTOR	1	37	303-0472-06	UPPER CVR	1
9	125-4015-90	TRANSISTOR	1	38	331-3581-00	MECH-BRKT	1
10	102-3420-00	TRANSISTOR	1	39	331-3324-00	MECH-BRKT	1
11	305-0274-01	SIDE CVR	1	40	929-0300-82	CD-MECH-MODULE	1
12	305-0275-00	SIDE CVR	1	41	345-3799-20	RUBBER PART	10
13	307-0699-00	REAR CVR	1	42	347-6821-00	FILM	2
14	313-1651-21	HEAT SINK	1	43	347-6705-00	INSULATOR	1
15	313-1715-20	HEAT SINK	1	44	347-5918-00	INSULATOR	1
16	313-1845-00	HEAT SINK	1	45	716-0717-10	SCREW(M2.3x3)	2
17	313-1844-01	HEAT SINK	1	46	731-3006-80	TAPTIGHT(M3x6)	9
18	013-7106-00	DETECTOR SWITCH	1	47	714-2603-80	MACHINE SCREW(M2.6x3)	7
19	331-3378-00	SW-HOLDER	1	48	816-2626-50	FLAT CABLE	1
20	331-2255-20	IC-HOLDER	1	49	780-2005-00	SCREW(M2x5)	2
21	855-5488-50	PCA PIN CORD	1	50	331-2744-00	STOPPER	1
22	855-5424-50	PCA PIN CORD	1	51	347-6245-00	FILM	1
23	-----	SUB PWB	1	52	345-8701-00	CUSHION	1
24	714-3006-81	MACHINE SCREW(M3x6)	4	53	347-6536-00	PROTECT SHEET	1
25	731-3008-87	TAPTIGHT(M3x8)	2	54	345-5318-00	CUSHION	1
26	076-0659-12	PLUG	2	55	347-7017-00	DOUBLE FACE	1
27	001-7062-90	DIODE	1	56	347-7018-00	INSULATOR	1
28	074-1198-68	OUTLET SOKET	1	57	345-5441-00	HEAT RUBBER	1
29	013-7206-50	DETECTOR SWITCH	1	58	347-7248-00	E-SHEET	1
30	074-1138-70	OUTLET SOKET	1	59	347-7254-00	FILM	1
31	347-6215-00	FILM	1	60	-----	MAIN PWB	1

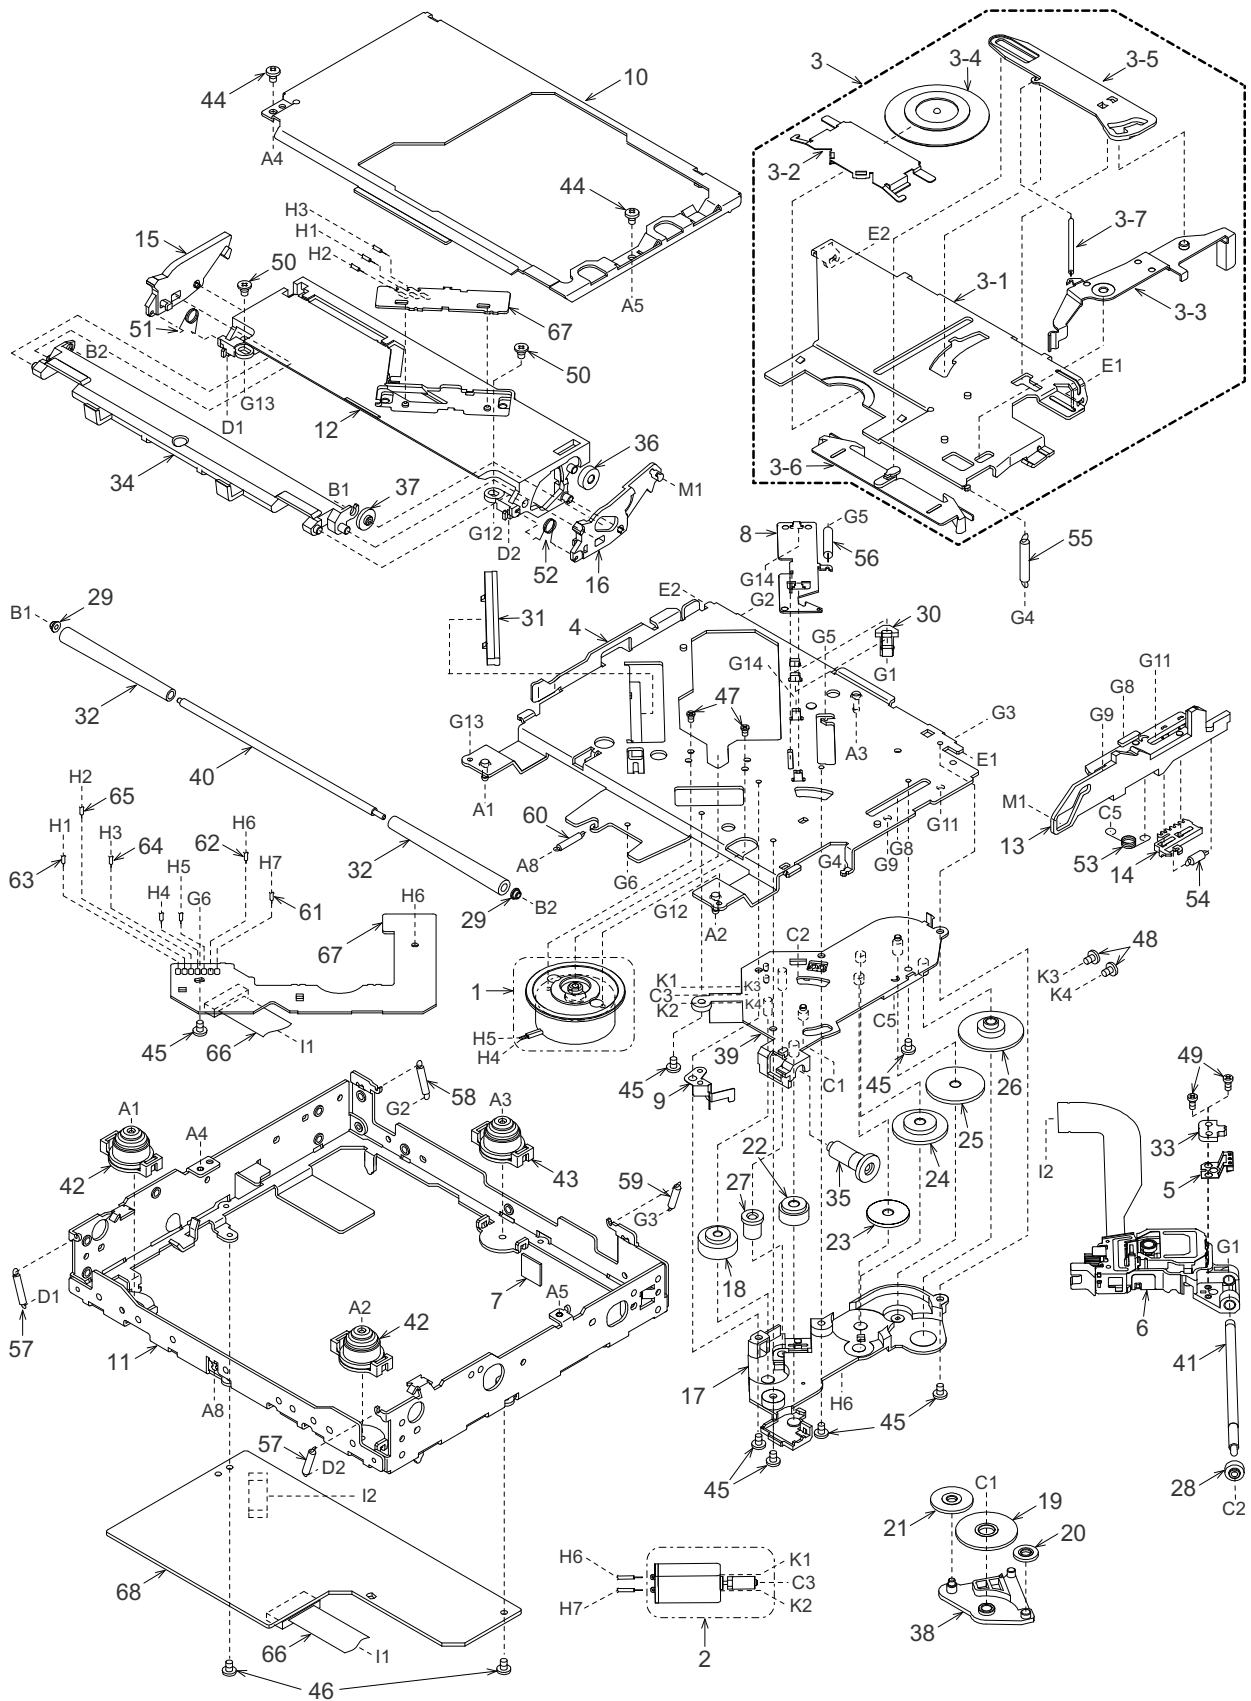

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	SMA-182-100	SPD-MOTOR-ASSY	1	32	621-0629-20	LOADING ROLLER	2
2	SMA-183-100	POW-MOTOR-ASSY	1	33	621-0709-20	SH-BASE	1
3	HBS-524-100	CLAMP-SUB-ASSY	1	34	621-0718-21	ROLLER GUIDE	1
3-1	620-1022-25	CLAMPER LINK	1	35	621-0719-20	ROLLER GEAR	1
3-2	620-1023-23	CLAMPER PLATE	1	36	621-0720-20	ROLLER GEAR C	1
3-3	620-1024-23	SENSOR ARM	1	37	621-0721-20	ROLLER GEAR D	1
3-4	621-0626-21	STOPPER LINK	1	38	621-0723-20	IDLE CASE	1
3-5	621-0627-21	DISC STOPPER	1	39	621-0724-21	GEAR BASE	1
3-6	621-0708-20	CLAMPER RING	1	40	622-1660-20	ROLLER SHAFT	1
3-7	750-3471-20	SENSOR SPRING	1	41	624-0018-01	LEAD SCREW	1
4	966-0595-25	DRIVE-PLT-ASSY	1	42	629-0086-20	DAMPER F	2
5	966-0638-20	SH-RACK-ASSY	1	43	629-0087-20	DAMPER R	1
6	969-0065-31	PICK UP-ASSY	1	44	714-2003-81	MACHINE SCREW(M2x3)	2
7	345-8704-20	CUSHION RUBBER	1	45	716-1507-00	SCREW(M2x3)	7
8	620-1025-22	ID-LOCK PLATE	1	46	716-1670-00	SCREW(M2x4)	2
9	620-1026-21	SPRING PLATE	1	47	716-1733-00	SCREW(M1.7x2.3)	2
10	620-1028-23	UPPER CHASSIS	1	48	716-3446-00	SCREW(M4.1x2.5)	2
11	620-1585-21	LOWER SHASSIS-W	1	49	716-3469-00	SCREW(1.7x4)	2
12	621-0598-27	UPPER GUIDE	1	50	716-3473-00	SCREW(M2x3)	2
13	621-0600-26	SHIFT LEVER	1	51	750-3465-21	ROLLER SPRING L	1
14	621-0601-21	RACK	1	52	750-3466-20	ROLLER SPRING R	1
15	621-0602-22	LOCK ARM L	1	53	750-3467-21	SHIFT SPRING	1
16	621-0603-25	LOCK ARM R	1	54	750-3468-20	RACK SPRING	1
17	621-0605-22	GEAR COVER	1	55	750-3469-20	CLAMPER SPRING	1
18	621-0608-21	SECOND GEAR	1	56	750-3470-20	ID-LOC K SPRING	1
19	621-0609-20	BASE GEAR	1	57	750-3472-21	DR-SPRING F	2
20	621-0610-20	IDLE GEAR A	1	58	750-3473-20	DR-SPRING RA	1
21	621-0611-20	IDLE GEAR B	1	59	750-3474-20	DR-SPRING RB	1
22	621-0612-21	ROLLER GEAR A	1	60	750-3475-21	DR-SPRING C	1
23	621-0616-20	POWER GEAR A	1	61	803-4906-60	VINYL-COAT-WIRE(ORANGE)	1
24	621-0617-20	POWER GEAR B	1	62	816-2590-00	EXTENSION LEAD(GREEN)	1
25	621-0618-20	POWER GEAR C	1	63	816-2591-00	EXTENSION LEAD(YELLOW)	1
26	621-0619-20	POWER GEAR D	1	64	816-2592-00	EXTENSION LEAD(BLUE)	1
27	621-0620-20	THREAD GEAR A	1	65	816-2593-00	EXTENSION LEAD(PURPLE)	1
28	621-0621-20	THREAD GEAR B	1	66	816-2624-50	FLAT WIRE	1
29	621-0622-21	ROLLER SLEEVE	2	67	-----	LED PWB	1
30	621-0623-23	LS-HOLDER	1	68	-----	CD PWB	1
31	621-0624-22	GUIDE RAIL	1				