
EXPLODED VIEW PARTS LIST

Main section

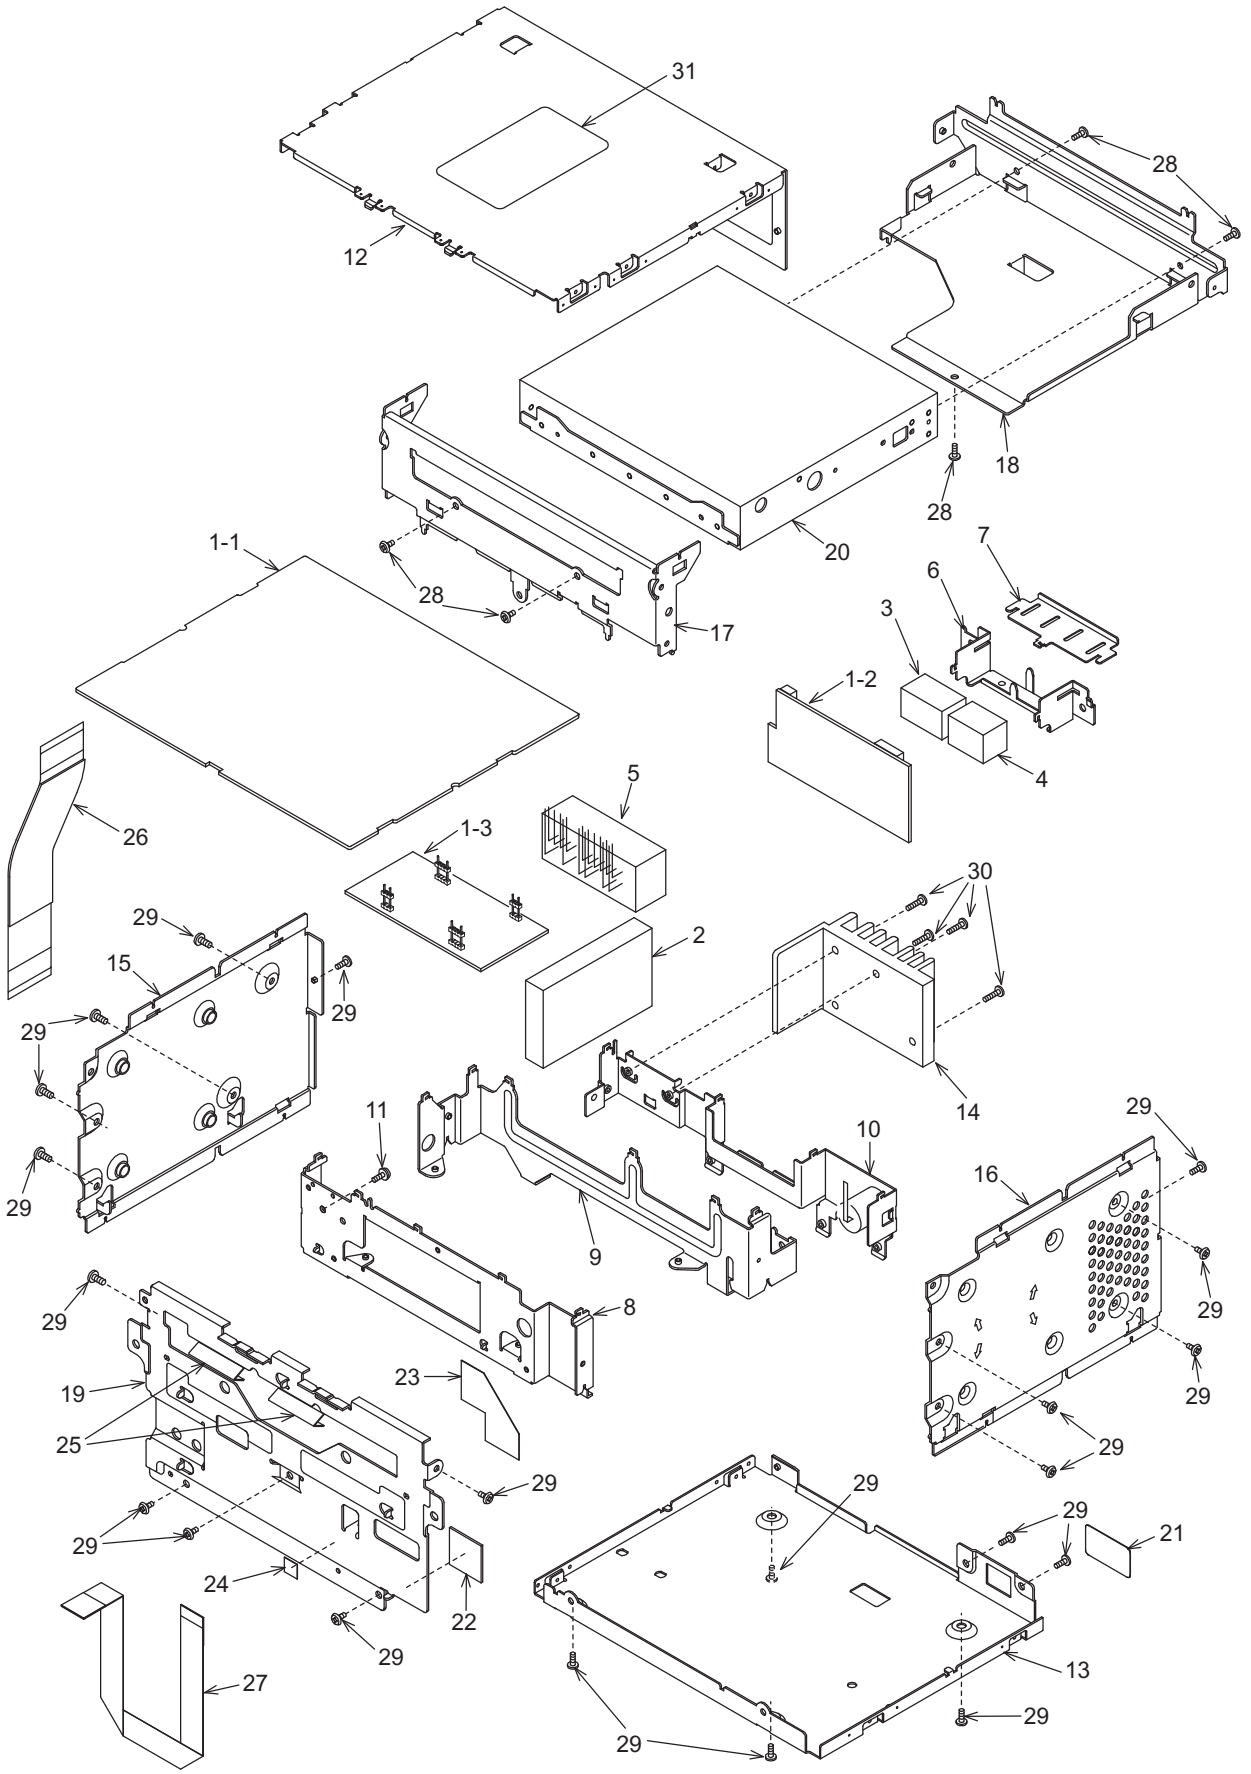

PN-2529H-A
PN-2607H-A

Note) Some parts depend on each model. The model name is specified in the description.

NO.	PART NO.	DESCRIPTION	Q'TY
1-1	039-2229-00	MAIN PWB(MAIN SECTION) (WITHOUT COMPONENT)	1
1-2	039-2229-00	MAIN PWB(SUB SECTION) (WITHOUT COMPONENT)	1
1-3	039-2229-00	MAIN PWB(EQ SECTION) (WITHOUT COMPONENT)	1
2	880-1917E	AM/FM TUNER	1
3	074-1013-30	OUTLET SOCKET(A-12)	1
4	074-1087-12	OUTLET SOCKET(A-16)	1
5	074-1141-00	OUTLET SOCKET(NS10+6)	1
6	331-2025-11	CONN-HOLDER(A)	1
7	331-3257-02	CONN-HOLDER(B)	1
8	331-3236-01	MECHA-BRKT(F)	1
9	331-3237-01	MECHA-BRKT(R)	1
10	331-3238-30	REAR PLATE	1
11	716-1494-00	IT SCREW(M2.6 x 6)	1
12	310-1740-01	UPPER CASE	1
13	311-1834-00	LOWER CASE	1
14	313-1828-01	HEAT SINK	1

NO.	PART NO.	DESCRIPTION	Q'TY
15	331-3260-00	SIDE PLATE(L)	1
16	331-3261-00	SIDE PLATE(R)	1
17	331-3262-01	MECHA-BRKT(F)	1
18	331-3263-00	MECHA-BRKT(R)	1
19	331-3519-10	ES-PLATE	1
20	929-0220-83	CD MECHANISM	1
21	347-6623-00	SPACER	1
22	347-6816-00	FILM(A)	1
23	347-6817-00	FILM(B)	1
24	347-6909-00	FILM(C)	1
25	347-6910-00	PROTECTOR	2
26	039-2026-00	FLAT WIRE	1
27	816-2611-00	FLAT WIRE	1
28	714-2603-81	MACHINE SCREW(M2.6 x 3)	5
29	714-2605-81	MACHINE SCREW(M2.6 x 5)	21
30	714-2612-81	MACHINE SCREW(M2.6 x 12)	4
31	286-9526-05 286-6216-00	SETPLATE(PN2529HA) SETPLATE(PN2607HA)	1

CD mechanism section : 929-0220-83


Exploded view on next page.

NO.	PART NO.	DESCRIPTION	Q'TY
1	966-0595-25	DRIVE PLATE ASSY	1
2	969-0060-30	PICK UP UNIT	1
3	039-1944-21	LED PWB (WITHOUT COMPONENT)	1
4	039-1945-20	CD PWB (WITHOUT COMPONENT)	1
5	SMA-182-100	MOTOR ASSY(SPINDLE)	1
6	SMA-183-100	MOTOR ASSY(SLED)	1
7	620-1022-25	CLAMPER LINK	1
8	803-4906-60	VINYL COAT WIRE(ORG)	1
9	816-2591-00	LEAD WIRE(YEL)	1
10	620-1025-22	ID-LOCK PLATE	1
11	620-1026-21	SPRING PLATE	1
12	620-1027-26	LOWER CHASSIS	1
13	620-1028-23	UPPER CHASSIS	1
14	966-0638-20	SH-RACK ASSY	1
15	621-0598-26	UPPER GUIDE	1
16	621-0718-20	ROLLER GUIDE	1
17	621-0600-26	SHIFT LEVER	1
18	621-0601-21	RACK	1
19	621-0602-22	LOCK ARM L	1
20	621-0603-25	LOCK ARM R	1
21	621-0724-20	GEAR BASE	1
22	621-0605-22	GEAR COVER	1
23	621-0606-21	IDLE CASE	1
24	816-2590-00	VINYL COAT WIRE(GRN)	1
25	621-0608-21	SECOND GEAR	1
26	621-0609-20	BASE GEAR	1
27	621-0610-20	IDLE GEAR A	1
28	621-0611-20	IDLE GEAR B	1
29	621-0612-21	ROLLER GEAR A	1

NO.	PART NO.	DESCRIPTION	Q'TY
30	621-0613-20	ROLLER GEAR B	1
31	621-0614-20	ROLLER GEAR C	1
32	621-0615-21	ROLLER GEAR D	1
33	621-0616-20	POWER GEAR A	1
34	621-0617-20	POWER GEAR B	1
35	621-0618-20	POWER GEAR C	1
36	621-0619-20	POWER GEAR D	1
37	621-0620-20	THREAD GEAR A	1
38	621-0621-20	THREAD GEAR B	1
39	621-0622-21	ROLLER SLEEVE	2
40	621-0623-22	LS-HOLDER	1
41	621-0624-22	GUIDE RAIL	1
42	816-2593-00	LEAD WIRE(PUR)	1
43	816-2542-01	FLAT WIRE(10P)	1
44	716-3473-00	SCREW(M2 x 1.6)	2
45	621-0709-20	SH-BASE	1
46	621-0629-20	LOADING ROLLER	2
47	345-8704-20	CUSHION RUBBER	1
48	622-1660-20	ROLLER SHAFT	1
49	624-0018-01	LEAD SCREW	1
50	629-0081-20	DAMPER F	2
51	629-0082-20	DAMPER R	1
52	714-2003-81	MACHINE SCREW	2
53	716-1507-00	SCREW(M2 x 3)	9
54	716-1733-00	SCREW(M1.7 x 2.3)	2
55	716-3469-00	SCREW(phi1.7 x 4)	2
56	716-3446-00	SCREW(M1.4 x 2.5)	2
57	750-3465-21	ROLLER SPRING L	1
58	750-3466-20	ROLLER SPRING R	1
59	750-3467-21	SHIFT SPRING	1

NO.	PART NO.	DESCRIPTION	Q'TY
60	750-3468-20	RACK SPRING	1
61	750-3469-20	CLAMPER SPRING	1
62	750-3470-20	ID-LOCK SPRING	1
63	816-2592-00	LEAD WIRE(BLU)	1
64	750-3472-21	DR-SPRING F	2
65	750-3473-20	DR-SPRING RA	1
66	750-3474-20	DR-SPRING RB	1

NO.	PART NO.	DESCRIPTION	Q'TY
67	750-3475-21	DR-SPRING C	1
68	620-1023-23	CLAMPER PLATE	1
69	620-1024-23	SENSOR ARM	1
70	621-0708-20	CLAMPER RING	1
71	621-0626-21	STOPPER LINK	1
72	621-0627-21	DISC STOPPER	1
73	750-3471-20	SENSOR SPRING	1

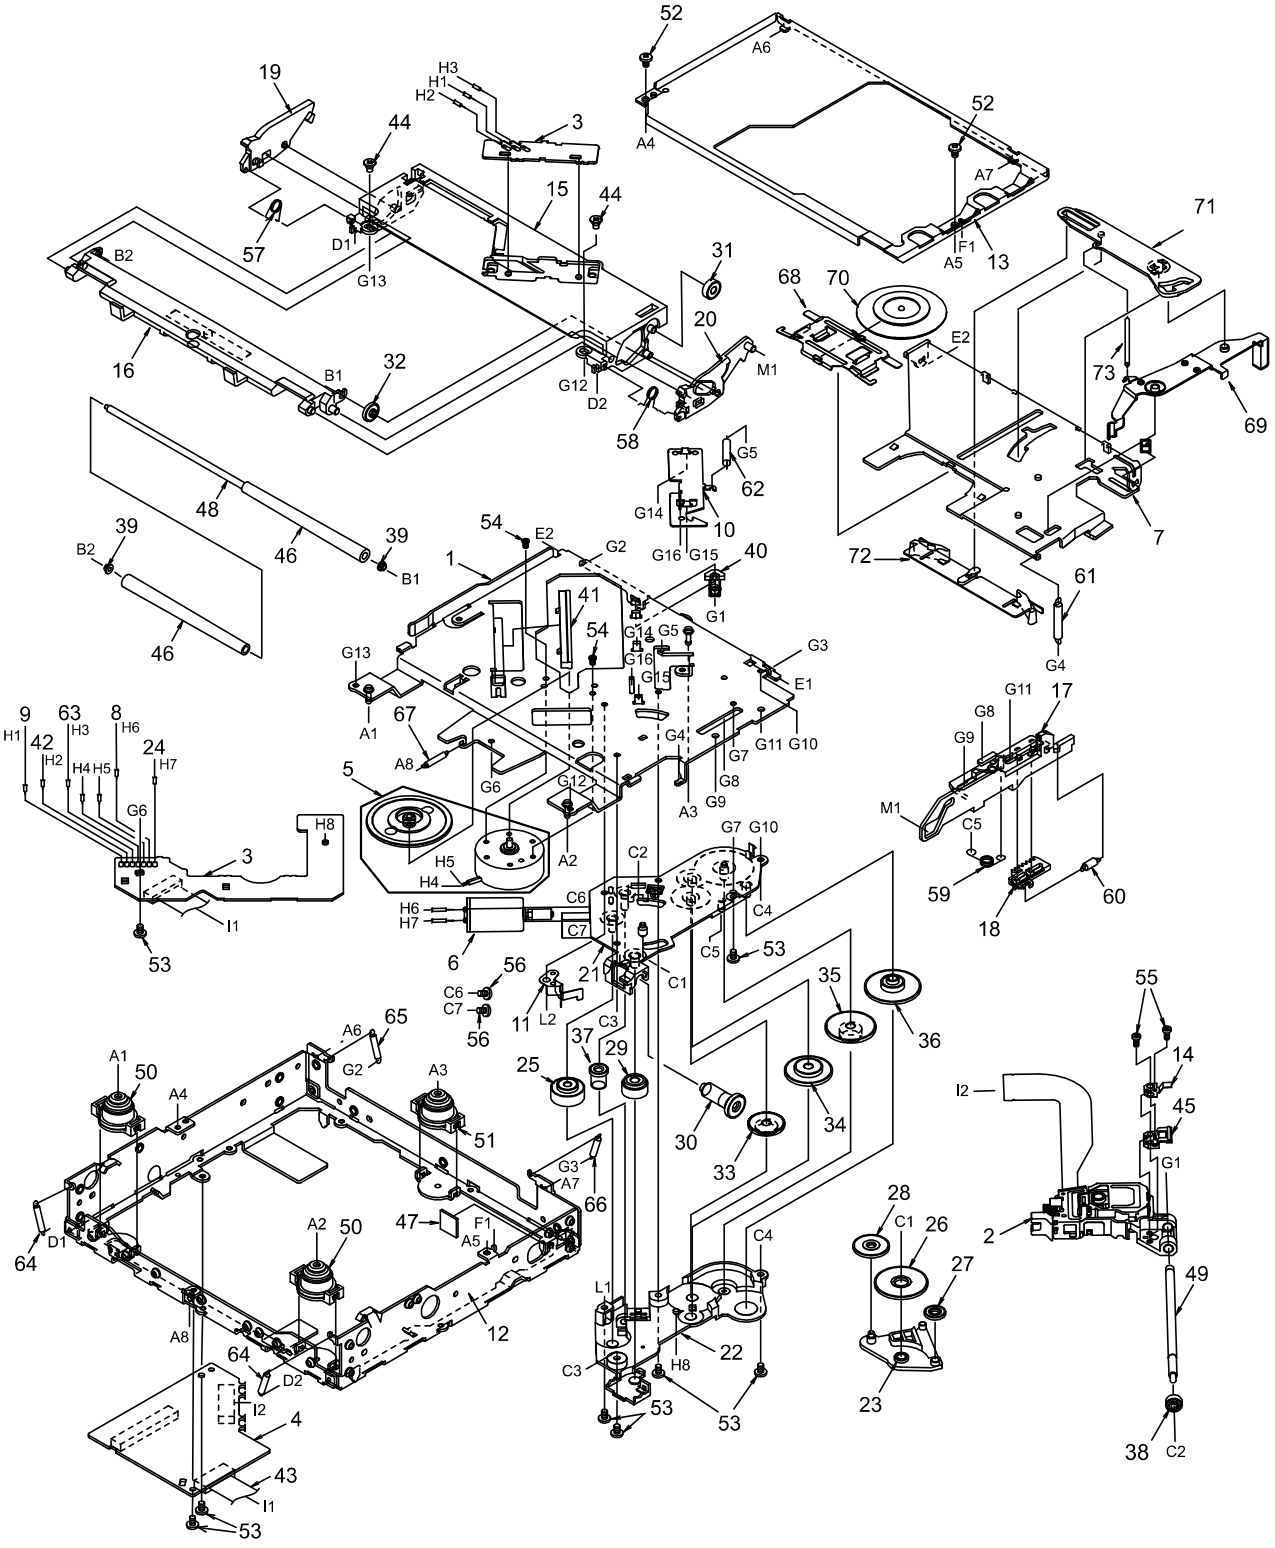

PN-2529H-A
PN-2607H-A

ELECTRICAL PARTS LIST

Note) Some parts depend on each model. The model is specified in the description.
Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

Main PWB(B1) section

REF No.	PART No.	DESCRIPTION
ANT101	(331-3238-30)	REAR PLATE
BL101	880-1917F	AM/FM TUNER
C101	166-1511-50	150pF CH
C115	166-1007-50	10pF CH
C121	183-1073-28	10V100uF
C122	043-0277-51	0.022uF
C124	168-1042-78	16V 0.1uF
C125	183-1073-28	10V100uF
C129	168-1042-78	16V 0.1uF
C130	183-1073-28	10V100uF
C132	178-1052-78	1uF
C133	168-1232-55	0.012uF
C134	042-0458-90	50V1uF
C135	183-4763-38	16V47uF
C136	043-0277-51	0.022uF
C138	168-1022-55	1000pF
C140	183-4763-38	16V47uF
C141	168-2232-55	0.022uF
C142	166-1011-50	100pF CH
C143	166-1011-50	100pF CH
C144	166-1011-50	100pF CH
C145	166-1011-50	100pF CH
C146	166-1801-50	18pF CH
C147	168-3932-78	0.039uF
C148	168-3932-78	0.039uF
C149	168-5632-78	16V 0.056uF
C150	168-5632-78	16V 0.056uF
C151	166-1801-50	18pF CH
C152	168-4722-55	4700pF
C153	166-1201-50	12pF CH
C155	166-2201-50	22pF CH
C156	166-2201-50	22pF CH
C158	166-2201-50	22pF CH
C305	042-0562-68	16V220uF
C307	042-0592-73	50V1uF
C312	042-0592-73	50V1uF
C313	178-4742-78	0.47uF
C314	178-4742-78	0.47uF
C315	168-1222-55	1200pF
C316	042-0592-73	50V1uF
C317	042-0592-73	50V1uF
C318	168-1222-55	1200pF
C323	178-1842-78	0.18uF
C324	178-1842-78	0.18uF
C325	178-1842-78	0.18uF
C326	178-1842-78	0.18uF
C327	168-8212-55	820pF
C328	168-8212-55	820pF
C329	168-8212-55	820pF
C330	168-8212-55	820pF
C331	042-0592-58	16V10uF
C332	042-0592-58	16V10uF
C333	168-1832-55	0.018uF
C408	168-2222-55	2200pF
C410	168-1042-78	16V 0.1uF
		(PN2529HA)
	NO USED	(PN2607HA)
C412	166-1011-50	100pF CH
		(PN2529HA)
	NO USED	(PN2607HA)
C414	166-1011-50	100pF CH
		(PN2529HA)
	NO USED	(PN2607HA)
C416	166-1011-50	100pF CH
C417	166-1011-50	100pF CH
C420	163-4763-15	6.3V47uF
C421	168-1042-78	16V 0.1uF
C422	168-1022-55	1000pF
C423	168-1042-78	16V 0.1uF
C424	168-1032-55	0.01uF
C430	168-3922-55	3900pF
C431	168-3922-55	3900pF
C443	042-0403-55	16V33uF
C444	166-1011-50	100pF CH
C445	166-1011-50	100pF CH
C446	166-1011-50	100pF CH
C447	168-1022-55	1000pF
C504	042-0548-53	16V100uF
C505	168-1042-78	16V 0.1uF
C506	163-1073-35	16V100uF
C507	163-1073-35	16V100uF
C508	163-1073-35	16V100uF
C509	042-0423-94	10V 4.7uF
C510	168-1042-78	16V 0.1uF
C511	042-0592-58	16V10uF
C515	163-4763-35	16V47uF
C551	042-0548-53	16V100uF
C552	168-1042-78	16V 0.1uF
C553	042-0548-53	16V100uF
C554	183-1063-38	16V10uF
C555	168-2232-55	0.022uF
C601	168-2232-55	0.022uF
C602	168-2222-55	2200pF
C603	168-2222-55	2200pF
C604	168-2222-55	2200pF
C605	168-2222-55	2200pF
C606	168-2222-55	2200pF
C607	168-2222-55	2200pF
C608	168-2222-55	2200pF
C609	168-2222-55	2200pF
C610	168-2222-55	2200pF
C611	172-1041-15	0.1uF
C612	184-3383-32	16V3300uF
C613	183-1053-68	50V1uF
C801	042-0592-58	16V10uF
C802	042-0592-58	16V10uF
C803	042-0592-58	16V10uF
C804	042-0592-58	16V10uF
C809	166-2201-50	22pF CH
C810	166-2201-50	22pF CH
C811	166-2201-50	22pF CH
C812	166-2201-50	22pF CH
C815	168-3922-55	3900pF
C816	168-3922-55	3900pF
C817	166-2201-50	22pF CH
C818	166-2201-50	22pF CH
C819	166-2201-50	22pF CH
C820	166-2201-50	22pF CH
C823	178-6822-78	6800pF
C824	178-6822-78	6800pF
C825	178-5632-78	0.056uF
C826	178-5632-78	0.056uF
C827	166-2201-50	22pF CH
C828	166-2201-50	22pF CH
C829	166-2201-50	22pF CH
C830	166-2201-50	22pF CH
C831	178-5632-78	0.056uF
C832	178-5632-78	0.056uF
C835	178-2232-78	0.022uF
C836	178-2232-78	0.022uF
C837	178-2242-78	0.22uF
C838	178-2742-78	0.27uF
C839	178-2742-78	0.27uF
C840	178-2242-78	0.22uF
C841	178-1242-78	0.12uF
C842	178-5632-78	0.056uF
C843	178-5632-78	0.056uF
C844	178-1242-78	0.12uF
C845	166-2201-50	22pF CH
C846	166-2201-50	22pF CH
C847	166-2201-50	22pF CH
C848	166-2201-50	22pF CH
C849	166-2201-50	22pF CH
C850	166-2201-50	22pF CH
C851	166-2201-50	22pF CH
C852	166-2201-50	22pF CH
C853	168-5622-55	5600pF
C854	168-4732-78	0.047uF
C855	168-4732-78	0.047uF
C856	168-5622-55	5600pF
C857	178-2222-78	2200pF
C858	168-1032-55	0.01uF
C859	168-1032-55	0.01uF
C860	178-2222-78	2200pF
C863	042-0592-58	16V10uF
C864	163-2273-25	10V 220uF
C865	166-2201-50	22pF CH
C868	168-5632-78	16V 0.056uF
C869	168-5632-78	16V 0.056uF
C870	168-6832-78	0.068uF
C871	168-6832-78	0.068uF
C873	168-5632-78	16V 0.056uF
C874	168-6832-78	0.068uF
C875	166-2201-50	22pF CH
C876	166-2201-50	22pF CH
C879	166-2201-50	22pF CH
C880	166-2201-50	22pF CH
C881	168-5632-78	16V 0.056uF
C882	168-6832-78	0.068uF
C883	042-0592-73	50V1uF
C884	172-3931-15	0.039uF
C885	172-3931-15	0.039uF
C886	172-3931-15	0.039uF
C887	172-3931-15	0.039uF
C888	183-1063-38	16V10uF
C889	168-1022-55	1000pF
C890	183-1053-68	50V1uF
C891	168-4745-79	0.47uF
C892	168-1822-55	1800pF(PN2529HA)
	NO USED	(PN2607HA)
C893	168-1822-55	1800pF(PN2529HA)
	NO USED	(PN2607HA)
C894	178-1052-78	1uF
C895	178-1052-78	1uF
C896	178-1052-78	1uF
C897	178-1052-78	1uF
C898	163-4753-55	35V4.7uF
C899	163-4753-55	35V4.7uF
C1001	042-0562-67	16V10uF
C1002	042-0562-67	16V10uF
C1003	042-0562-67	16V10uF
C1004	042-0562-67	16V10uF
C1005	168-1022-55	1000pF
C1006	168-1022-55	1000pF
C1007	168-2232-55	0.022uF
C1008	168-2222-55	2200pF
C1009	168-2222-55	2200pF
C1010	168-1022-55	1000pF
C1011	168-1022-55	1000pF
C1012	183-1066-38	16V10uF NP
		(PN2529HA)
	NO USED	(PN2607HA)
C1013	183-1066-38	16V10uF NP
		(PN2529HA)
	NO USED	(PN2607HA)
C1017	168-1022-55	1000pF
C1018	168-1022-55	1000pF
CCT402	050-0140-54	1/32W 1k ohm x4J
CCT403	050-0140-54	1/32W 1k ohm x4J
CCT406	050-0140-54	1/32W 1k ohm x4J

REF No.	PART No.	DESCRIPTION
CCT408	050-0140-54	1/32W 1k ohm x4J
CCT409	050-0140-54	1/32W 1k ohm x4J
CCT411	050-0140-54	1/32W 1k ohm x4J
CCT412	050-0140-54	1/32W 1k ohm x4J
CCT414	050-0140-54	1/32W 1k ohm x4J
CCT415	050-0140-54	1/32W 1k ohm x4J
CCT417	050-0140-54	1/32W 1k ohm x4J
CCT418	050-0140-54	1/32W 1k ohm x4J
CCT419	050-0140-54	1/32W 1k ohm x4J
CCT420	050-0140-54	1/32W 1k ohm x4J
D401	001-0347-47	MA4091M
D502	001-0504-48	HZS9C2L
D503	001-0466-90	S5688B
D504	001-0466-90	S5688B
D551	001-0504-31	HZS6 A2L
D552	001-0504-45	HZS9B1L
D602	001-0529-34	MA8062-L
	001-4301-34	HZU6.2B1
D605	001-0466-90	S5688B
D606	001-0516-90	MA111
	001-0517-90	1SS355
D607	001-2015-00	RL253
D608	001-0466-90	S5688B
D1001	001-0589-91	1SS145
D1002	001-0422-38	MTZJ36
D1003	001-0529-44	MA8082-M
	001-4301-44	HXU8.2B2
D1004	001-0584-35	MA8240
	001-4302-35	UDZTE-17 24B
D1005	001-0584-35	MA8240
	001-4302-35	UDZTE-17 24B
D1006	001-0589-91	1SS145
D1007	001-0589-91	1SS145
D1009	001-0584-35	MA8240
	001-4302-35	UDZTE-17 24B
D1010	001-0516-90	MA111
	001-0517-90	1SS355
IC104	051-6212-08	LC72191JM-TLM
IC302	051-5027-00	LC75412WH
IC403	051-3034-90	NJM4558V(PN2529HA)
	NO USED	(PN2607HA)
IC404	052-3177-01	M30624MGA-E179GP
IC405	051-5436-08	S-80933ANMP-DDX
IC501	051-1834-00	LM2936
IC601	051-5418-08	S-80827ANMP-EDQ
IC801	051-3019-90	NJM2060V
IC802	051-3019-90	NJM2060V
IC803	051-3019-90	NJM2060V
IC804	051-3019-90	NJM2060V
IC805	051-3020-90	NJM4565V
IC806	051-3019-90	NJM2060V
IC808	051-2042-00	TA8275H
J402	074-1192-26	26P
J403	074-0834-10	10P
J601	074-1141-00	NS10+6
J1001	074-1087-12	A16 MW
J1002	074-1013-30	A12 MW
L104	010-2003-04	COIL
L106	010-6009-76	22uH
L401	010-2199-78	22uH J
L601	010-8021-00	COIL
P201	076-0368-18	18P
P202	076-0368-06	6P
P401	076-0478-55	5P
P801	076-0655-04	4P
P802	076-0655-03	3P
P803	076-0655-03	3P
P804	076-0655-04	4P
P1001	074-0898-18	18P
P1002	074-0898-06	6P
Q105	192-2712-51	2SC2712G,L
Q106	125-2005-91	UN2211
	125-2004-92	RN1402

REF No.	PART No.	DESCRIPTION
	125-2020-92	DTC143EKA
Q107	192-2712-51	2SC2712G,L
Q109	190-1298-00	2SA1298
Q111	190-1298-00	2SA1298
Q403	193-0601-00	2SD601A
	192-2712-00	2SC2712
Q404	125-2005-91	UN2211(PN2529HA)
	125-2004-92	RN1402
	125-2020-92	DTC143EKA
	NO USED	(PN2607HA)
Q405	191-0709-00	2SB709A-Q.R.S
		(PN2529HA)
	190-1037-00	2SA1037AKT
	NO USED	(PN2607HA)
Q502	193-2118-00	2SD2118
Q503	193-1858-00	2SD1858
Q504	125-9003-92	IMD3
	125-9002-92	RN4602
Q505	125-2005-91	UN2211
	125-2004-92	RN1402
	125-2020-92	DTC143EKA
Q506	190-1048-00	2SA1048
Q507	191-1205-60	2SB1205RST
Q551	193-1664-00	2SD1664P,Q,R
Q552	125-9003-92	IMD3
	125-9002-92	RN4602
Q553	103-2012-00	2SD2012
Q554	125-9003-92	IMD3
	125-9002-92	RN4602
Q603	193-0601-00	2SD601A
	192-2712-00	2SC2712
Q607	125-2005-91	UN2211
	125-2004-92	RN1402
	125-2020-92	DTC143EKA
Q608	191-0709-00	2SB709A-Q.R.S
	190-1037-00	2SA1037AKT
Q609	100-1359-00	2SA1359
Q801	125-2005-91	UN2211
	125-2004-92	RN1402
	125-2020-92	DTC143EKA
Q804	125-4001-90	XN1504
Q805	125-4001-90	XN1504
Q806	125-0006-90	UN2110
	125-0019-93	DTA144TKA
Q807	125-0006-90	UN2110
	125-0019-93	DTA144TKA
Q808	125-9003-92	IMD3
	125-9002-92	RN4602
Q809	125-9003-92	IMD3
	125-9002-92	RN4602
Q1001	125-0001-91	UN2111
	125-0002-92	RN2402
	125-0014-92	DTA114EKA
Q1002	193-0601-00	2SD601A
	192-2712-00	2SC2712
Q1003	193-0601-00	2SD601A
	192-2712-00	2SC2712
Q1004	125-9003-92	IMD3
	125-9002-92	RN4602
Q1005	125-9003-92	IMD3
	125-9002-92	RN4602
Q1006	125-2005-91	UN2211
	125-2004-92	RN1402
	125-2020-92	DTC143EKA
Q1007	125-9006-90	IMX1
	125-9007-90	HN1C01F
Q1008	125-0001-91	UN2111
	125-0002-92	RN2402
	125-0014-92	DTA114EKA
Q1009	193-0601-00	2SD601A
	192-2712-00	2SC2712
Q1010	125-2005-91	UN2211
	125-2004-92	RN1402
	125-2020-92	DTC143EKA

REF No.	PART No.	DESCRIPTION
Q1011	193-0601-00	2SD601A
	192-2712-00	2SC2712
R113	119-2221-15	1/16W 2.2k ohm
R117	119-4721-15	1/16W 4.7k ohm
R119	119-1021-15	1/16W 1k ohm
R120	119-2221-15	1/16W 2.2k ohm
R121	119-4721-15	1/16W 4.7k ohm
R122	119-8201-15	1/16W 82 ohm
R123	119-4741-15	1/16W 470k ohm
R124	119-3321-15	1/16W 3.3k ohm
R126	116-1001-15	1/8W 10 ohm
R127	116-1001-15	1/8W 10 ohm
R128	119-2221-15	1/16W 2.2k ohm
R129	119-2221-15	1/16W 2.2k ohm
R130	119-1031-15	1/16W 10k ohm
R131	119-1031-15	1/16W 10k ohm
R132	119-4721-15	1/16W 4.7k ohm
R133	119-1021-15	1/16W 1k ohm
R134	119-2221-15	1/16W 2.2k ohm
R135	119-1021-15	1/16W 1k ohm
R136	119-1021-15	1/16W 1k ohm
R137	116-1001-15	1/8W 10 ohm
R140	119-4721-15	1/16W 4.7k ohm
R141	119-4731-15	1/16W 47k ohm
R152	119-0000-05	1/16W 0 ohm JW
R216	119-1021-15	1/16W 1k ohm
R310	032-0106-52	1/10W 27k ohm D
R311	032-0106-52	1/10W 27k ohm D
R312	032-0106-52	1/10W 27k ohm D
R313	032-0106-52	1/10W 27k ohm D
R314	119-1821-15	1/16W 1.8k ohm
R315	119-1821-15	1/16W 1.8k ohm
R316	119-3931-15	1/16W 39k ohm
R317	119-3931-15	1/16W 39k ohm
R322	119-4721-15	1/16W 4.7k ohm
R323	119-4721-15	1/16W 4.7k ohm
R324	119-4721-15	1/16W 4.7k ohm
R325	119-4721-15	1/16W 4.7k ohm
R411	119-1041-15	1/16W 100k ohm
R412	119-1041-15	1/16W 100k ohm
R413	119-4731-15	1/16W 47k ohm
R414	119-4731-15	1/16W 47k ohm
R417	119-1021-15	1/16W 1k ohm
R419	119-4731-15	1/16W 47k ohm
R421	119-4731-15	1/16W 47k ohm
R423	119-4731-15	1/16W 47k ohm
R425	119-4731-15	1/16W 47k ohm
R427	119-4731-15	1/16W 47k ohm
R428	119-4731-15	1/16W 47k ohm
R429	119-1021-15	1/16W 1k ohm
		(PN2529HA)
	NO USED	(PN2607HA)
R431	119-4731-15	1/16W 47k ohm
R433	119-4731-15	1/16W 47k ohm
R434	119-2231-15	1/16W 22k ohm
		(PN2529HA)
	NO USED	(PN2607HA)
R435	119-4731-15	1/16W 47k ohm
R437	032-0140-89	1/4W 47k ohm F
		(PN2529HA)
	NO USED	(PN2607HA)
R438	119-4731-15	1/16W 47k ohm
R440	119-4731-15	1/16W 47k ohm
R441	119-1021-15	1/16W 1k ohm
R442	119-1021-15	1/16W 1k ohm
R444	119-4731-15	1/16W 47k ohm
R445	032-0140-89	1/4W 47k ohm F
		(PN2529HA)
	NO USED	(PN2607HA)
R447	119-4731-15	1/16W 47k ohm
R448	032-0140-88	1/16W 100k ohm F
		(PN2529HA)
	NO USED	(PN2607HA)
R449	032-0140-88	1/16W 100k ohm F

REF No.	PART No.	DESCRIPTION
		(PN2529HA)
	NO USED	(PN2607HA)
R452	119-1031-15	1/16W 10k ohm
R453	119-4731-15	1/16W 47k ohm
R454	119-4731-15	1/16W 47k ohm
		(PN2529HA)
	NO USED	(PN2607HA)
R455	119-4731-15	1/16W 47k ohm
		(PN2607HA)
	NO USED	(PN2529HA)
R457	119-4731-15	1/16W 47k ohm
R458	119-4731-15	1/16W 47k ohm
R459	119-4731-15	1/16W 47k ohm
R460	119-1041-15	1/16W 100k ohm
R463	119-4731-15	1/16W 47k ohm
R469	119-4731-15	1/16W 47k ohm
R472	119-1041-15	1/16W 100k ohm
R474	119-4741-15	1/16W 470k ohm
R475	119-4741-15	1/16W 470k ohm
R477	119-4731-15	1/16W 47k ohm
R480	119-1021-15	1/16W 1k ohm
R483	119-1021-15	1/16W 1k ohm
R485	119-1231-15	1/16W 12k ohm
R486	119-1021-15	1/16W 1k ohm
R488	119-1021-15	1/16W 1k ohm
R490	119-1031-15	1/16W 10k ohm
R493	119-4731-15	1/16W 47k ohm
R502	116-3911-15	1/8W 390 ohm
R503	119-1031-15	1/16W 10k ohm
R504	116-1011-15	1/8W 100 ohm
R505	119-4721-15	1/16W 4.7k ohm
R506	119-1021-15	1/16W 1k ohm
R507	119-1031-15	1/16W 10k ohm
R508	116-7501-15	1/8W 75 ohm
R509	116-2201-15	1/8W 22 ohm
R510	116-2201-15	1/8W 22 ohm
R551	119-2211-15	1/16W 220 ohm
R552	111-3311-98	1/4W 330 ohm
R553	119-1041-15	1/16W 100k ohm
R554	119-1041-15	1/16W 100k ohm
R601	119-4731-15	1/16W 47k ohm
R602	119-2731-15	1/16W 27k ohm
R605	119-1031-15	1/16W 10k ohm
R606	119-5611-15	1/16W 560 ohm
R611	116-1221-15	1/8W 1.2k ohm
R612	119-4721-15	1/16W 4.7k ohm
R613	116-1221-15	1/8W 1.2k ohm
R614	111-5691-98	1/4W 5.6 ohm
R615	111-5691-98	1/4W 5.6 ohm
R616	116-1531-15	1/8W 15k ohm
R801	119-3331-15	1/16W 33k ohm
R802	119-3331-15	1/16W 33k ohm
R803	119-3331-15	1/16W 33k ohm
R804	119-3331-15	1/16W 33k ohm
R805	119-2231-15	1/16W 22k ohm
R806	119-2231-15	1/16W 22k ohm
R807	119-2231-15	1/16W 22k ohm
R808	119-2231-15	1/16W 22k ohm
R813	119-1031-15	1/16W 10k ohm
R814	119-1031-15	1/16W 10k ohm
R815	119-4721-15	1/16W 4.7k ohm
R816	119-4721-15	1/16W 4.7k ohm
R819	119-8221-15	1/16W 8.2k ohm
R820	119-8221-15	1/16W 8.2k ohm
R821	119-4721-15	1/16W 4.7k ohm

REF No.	PART No.	DESCRIPTION
R822	119-4721-15	1/16W 4.7k ohm
R823	119-1031-15	1/16W 10k ohm
R824	119-1031-15	1/16W 10k ohm
R825	119-2221-15	1/16W 2.2k ohm
R828	119-2221-15	1/16W 2.2k ohm
R829	119-2221-15	1/16W 2.2k ohm
R832	119-2221-15	1/16W 2.2k ohm
R835	119-8221-15	1/16W 8.2k ohm
R836	119-8221-15	1/16W 8.2k ohm
R837	119-5611-15	1/16W 560 ohm
R838	119-5611-15	1/16W 560 ohm
R839	119-4731-15	1/16W 47k ohm
R840	119-4731-15	1/16W 47k ohm
R841	119-4731-15	1/16W 47k ohm
R842	119-4731-15	1/16W 47k ohm
R843	119-5611-15	1/16W 560 ohm
R844	119-5611-15	1/16W 560 ohm
R847	119-5621-15	1/16W 5.6k ohm
R848	119-5621-15	1/16W 5.6k ohm
R849	119-4721-15	1/16W 4.7k ohm
R850	119-1821-15	1/16W 1.8k ohm
R851	119-1821-15	1/16W 1.8k ohm
R852	119-4721-15	1/16W 4.7k ohm
R853	119-1511-15	1/16W 150 ohm
R854	119-1511-15	1/16W 150 ohm
R855	119-1511-15	1/16W 150 ohm
R856	119-1511-15	1/16W 150 ohm
R857	119-1541-15	1/16W 150k ohm
R858	119-1541-15	1/16W 150k ohm
R859	119-1541-15	1/16W 150k ohm
R860	119-1541-15	1/16W 150k ohm
R861	119-1541-15	1/16W 150k ohm
R862	119-1541-15	1/16W 150k ohm
R863	119-1541-15	1/16W 150k ohm
R864	119-1541-15	1/16W 150k ohm
R865	119-1511-15	1/16W 150 ohm
R866	119-1511-15	1/16W 150 ohm
R867	119-1511-15	1/16W 150 ohm
R868	119-1511-15	1/16W 150 ohm
R869	119-3921-15	1/16W 3.9k ohm
R870	119-4721-15	1/16W 4.7k ohm
R871	119-4721-15	1/16W 4.7k ohm
R872	119-3921-15	1/16W 3.9k ohm
R873	119-4731-15	1/16W 47k ohm
R874	119-4731-15	1/16W 47k ohm
R876	119-4731-15	1/16W 47k ohm
R877	119-4731-15	1/16W 47k ohm
R879	119-8221-15	1/16W 8.2k ohm
R880	119-8221-15	1/16W 8.2k ohm
R881	119-1031-15	1/16W 10k ohm
R882	119-1031-15	1/16W 10k ohm
R883	119-5131-15	1/16W 51k ohm
R884	119-5131-15	1/16W 51k ohm
R885	119-2221-15	1/16W 2.2k ohm
R887	119-5131-15	1/16W 51k ohm
R888	119-5131-15	1/16W 51k ohm
R889	119-1031-15	1/16W 10k ohm
R890	119-1031-15	1/16W 10k ohm
R891	119-8221-15	1/16W 8.2k ohm
R892	119-8221-15	1/16W 8.2k ohm
R894	119-4731-15	1/16W 47k ohm
R895	119-4731-15	1/16W 47k ohm
R896	119-1031-15	1/16W 10k ohm
R897	119-1031-15	1/16W 10k ohm
R898	119-1031-15	1/16W 10k ohm

REF No.	PART No.	DESCRIPTION
R899	119-1031-15	1/16W 10k ohm
R900	119-3331-15	1/16W 33k ohm
		(PN2529HA)
	119-1831-15	1/16W 18k ohm
		(PN2607HA)
R901	119-1831-15	1/16W 18k ohm
R902	119-1831-15	1/16W 18k ohm
R903	119-3331-15	1/16W 33k ohm
		(PN2529HA)
	119-1831-15	1/16W 18k ohm
		(PN2607HA)
R904	119-1031-15	1/16W 10k ohm
R905	119-1021-15	1/16W 1k ohm
R906	119-1021-15	1/16W 1k ohm
R913	119-2231-15	1/16W 22k ohm
R914	119-2231-15	1/16W 22k ohm
R915	119-2231-15	1/16W 22k ohm
R916	119-2231-15	1/16W 22k ohm
R917	032-0140-10	390k ohm F
		(PN2529HA)
	NO USED	(PN2607HA)
R918	032-0140-10	390k ohm F
		(PN2529HA)
	NO USED	(PN2607HA)
R919	119-1021-15	1/16W 1k ohm
R920	119-1021-15	1/16W 1k ohm
R921	119-1031-15	1/16W 10k ohm
R922	119-1031-15	1/16W 10k ohm
R923	119-4721-15	1/16W 4.7k ohm
R924	119-4721-15	1/16W 4.7k ohm
R1001	119-4731-15	1/16W 47k ohm
R1002	119-3011-15	1/16W 300 ohm
R1003	119-3011-15	1/16W 300 ohm
R1004	119-1031-15	1/16W 10k ohm
R1005	119-5631-15	1/16W 56k ohm
R1006	119-1021-15	1/16W 1k ohm
R1007	119-1031-15	1/16W 10k ohm
R1008	119-5631-15	1/16W 56k ohm
R1009	119-5621-15	1/16W 5.6k ohm
R1010	119-2231-15	1/16W 22k ohm
R1011	111-8211-98	1/4W 820 ohm
R1012	111-8211-98	1/4W 820 ohm
R1013	111-8211-98	1/4W 820 ohm
R1014	111-8211-98	1/4W 820 ohm
R1015	119-4731-15	1/16W 47k ohm
R1016	119-1031-15	1/16W 10k ohm
R1017	119-1031-15	1/16W 10k ohm
R1018	119-5631-15	1/16W 56k ohm
R1019	119-5631-15	1/16W 56k ohm
R1020	119-5621-15	1/16W 5.6k ohm
R1021	119-5621-15	1/16W 5.6k ohm
R1022	119-3011-15	1/16W 300 ohm
		(PN2529HA)
	NO USED	(PN2607HA)
R1040	119-1031-15	1/16W 10k ohm
R1041	119-5631-15	1/16W 56k ohm
R1042	119-1031-15	1/16W 10k ohm
R1043	119-4721-15	1/16W 4.7k ohm
R1044	119-1531-15	1/16W 15k ohm
R1045	119-3321-15	1/16W 3.3k ohm
SUP102	060-0122-91	DSP-141N-S00B
VR102	012-5203-56	10k ohm
X102	061-1066-80	7.2MHz
X401	060-1505-50	10MHz

CD PWB(B2) section : CD mechanism


REF No.	PART No.	DESCRIPTION
C101	168-1042-78	0.1uF
C102	045-4701-50	47pF
C103	046-4722-58	4700pF
C104	168-1042-78	0.1uF
C105	046-1532-78	0.015uF
C106	046-1032-78	0.01uF
C107	046-1032-78	0.01uF
C108	046-4722-58	4700pF
C109	046-1522-58	1500pF
C110	046-3332-78	0.033uF
C111	168-1042-78	0.1uF
C112	046-3332-78	0.033uF
C113	168-1042-78	0.1uF
C114	168-1042-78	0.1uF
C115	046-4712-58	470pF
C116	046-4712-58	470pF
C117	043-0533-50	0.047uF
C118	043-0533-50	0.047uF
C119	045-2701-50	27pF
C120	045-1801-50	18pF
C121	163-1063-35	16V10uF
C122	178-1052-78	1uF
C123	046-1032-78	0.01uF
C124	163-1073-05	4V100uF
C125	168-1042-78	0.1uF
C126	168-1042-78	0.1uF
C129	178-1052-78	1uF
C201	163-3363-05	4V33uF
C202	168-1042-78	0.1uF
C203	178-1052-78	1uF
C204	163-1073-05	4V100uF
C205	163-3363-05	4V33uF
C206	168-1042-78	0.1uF

REF No.	PART No.	DESCRIPTION
C207	043-0533-50	0.047uF
C208	046-6822-58	6800pF
C209	168-1042-78	0.1uF
C210	043-0533-50	0.047uF
C211	168-1042-78	0.1uF
C212	168-1042-78	0.1uF
C213	045-5096-50	5pF
C214	045-5601-50	56pF
C215	043-0533-50	0.047uF
C216	178-1052-78	1uF
C217	045-1011-50	100pF
C301	163-1073-35	16V100uF
C302	168-1042-78	0.1uF
C303	043-0533-50	0.047uF
D201	001-0516-90	MA111
IC101	051-6376-00	TC94A14FA
IC102	051-3279-90	BA033LBSG
IC201	051-5710-90	TA2157F
IC301	051-6049-08	BA5983FP-E2
J101	074-1228-76	26P
J201	074-1138-65	15P
J301	074-1138-60	10P
L101	010-2285-57	BLM21B102SPT
L102	010-2285-57	BLM21B102SPT
L103	010-2285-57	BLM21B102SPT
L104	010-2285-57	BLM21B102SPT
L105	010-2285-57	BLM21B102SPT
L401	010-3050-93	10uH
Q201	131-1188-50	2SB1188
R102	033-5621-15	1/16W 5.6k ohm
R104	033-4731-15	1/16W 47k ohm
R105	033-1041-15	1/16W 100k ohm
R108	033-1531-15	1/16W 15k ohm

REF No.	PART No.	DESCRIPTION
R109	033-1031-15	1/16W 10k ohm
R110	033-1051-15	1/16W 1M ohm
R111	033-3321-15	1/16W 3.3k ohm
R114	033-2211-15	1/16W 220 ohm
R115	033-2211-15	1/16W 220 ohm
R116	033-1031-15	1/16W 10k ohm
R117	033-1021-15	1/16W 1k ohm
R131	033-4711-15	1/16W 470 ohm
R132	033-2211-15	1/16W 220 ohm
R201	117-2201-15	1/10W 22 ohm
R202	117-2201-15	1/10W 22 ohm
R203	033-1041-15	1/16W 100k ohm
R204	033-1041-15	1/16W 100k ohm
R205	033-1041-15	1/16W 100k ohm
R206	033-1041-15	1/16W 100k ohm
R207	033-1041-15	1/16W 100k ohm
R208	033-8231-15	1/16W 82k ohm
R209	033-6811-15	1/16W 680 ohm
R210	033-6831-15	1/16W 68k ohm
R211	033-1831-15	1/16W 18k ohm
R212	033-2721-15	1/16W 2.7k ohm
R213	033-1011-15	1/16W 100 ohm
R214	033-1021-15	1/16W 1k ohm
R215	033-1031-15	1/16W 10k ohm
R217	033-1041-15	1/16W 100k ohm
R218	033-2211-15	1/16W 220 ohm
R301	117-6811-15	1/16W 680 ohm
R304	033-3921-15	1/16W 3.9k ohm
R305	033-3921-15	1/16W 3.9k ohm
R306	033-1041-15	1/16W 100k ohm
R307	033-2211-15	1/16W 220 ohm
X102	060-1528-90	16.934M


LED PWB(B3) section : CD mechanism

REF No.	PART No.	DESCRIPTION
D1	001-7058-90	AN1105W-RR
D2	001-7058-90	AN1105W-RR
J1	074-1138-60	10P
Q1	060-4015-90	PS1192H
Q2	060-4015-90	PS1192H
S1	013-7414-50	CHUCKING
S2	013-7413-50	LIMIT



J601 NS10 MW

1	FRONT LEFT (-)
2	FRONT LEFT (+)
3	FRONT RIGHT (-)
4	FRONT RIGHT (+)
5	REAR LEFT(-)
6	REAR LEFT (+)
7	REAR RIGHT (-)
8	REAR RIGHT (+)
9	GND
10	N.C



J601 NS06 MW

11	GND
12	N.C
13	REAR LEFT(-)
14	REAR LEFT (+)
15	REAR RIGHT (-)
16	REAR RIGHT (+)