Accessories


Audio Cable
(VDE1064) L=1.5m




Control Cord
(XDE3063) L=1 m



Power Cord
(ADG7021 : KUCXJ)
(ADG7097 : RLFXJ)



(ADG1154 : WYXJ,RLFXJ)




Forced Fject Pin
(housed in a groove in
the bottom panel)
(DEX1008)



2. EXPLODED VIEWS AND PARTS LIST

NOTES:
- *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
- *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
- *Screws adjacent to ▼ mark on product are used for disassembly.*
- *For the applying amount of lubricants or glue, follow the instructions in this manual. (In the case of no amount instructions, apply as you think it appropriate.)*

2.1 PACKING

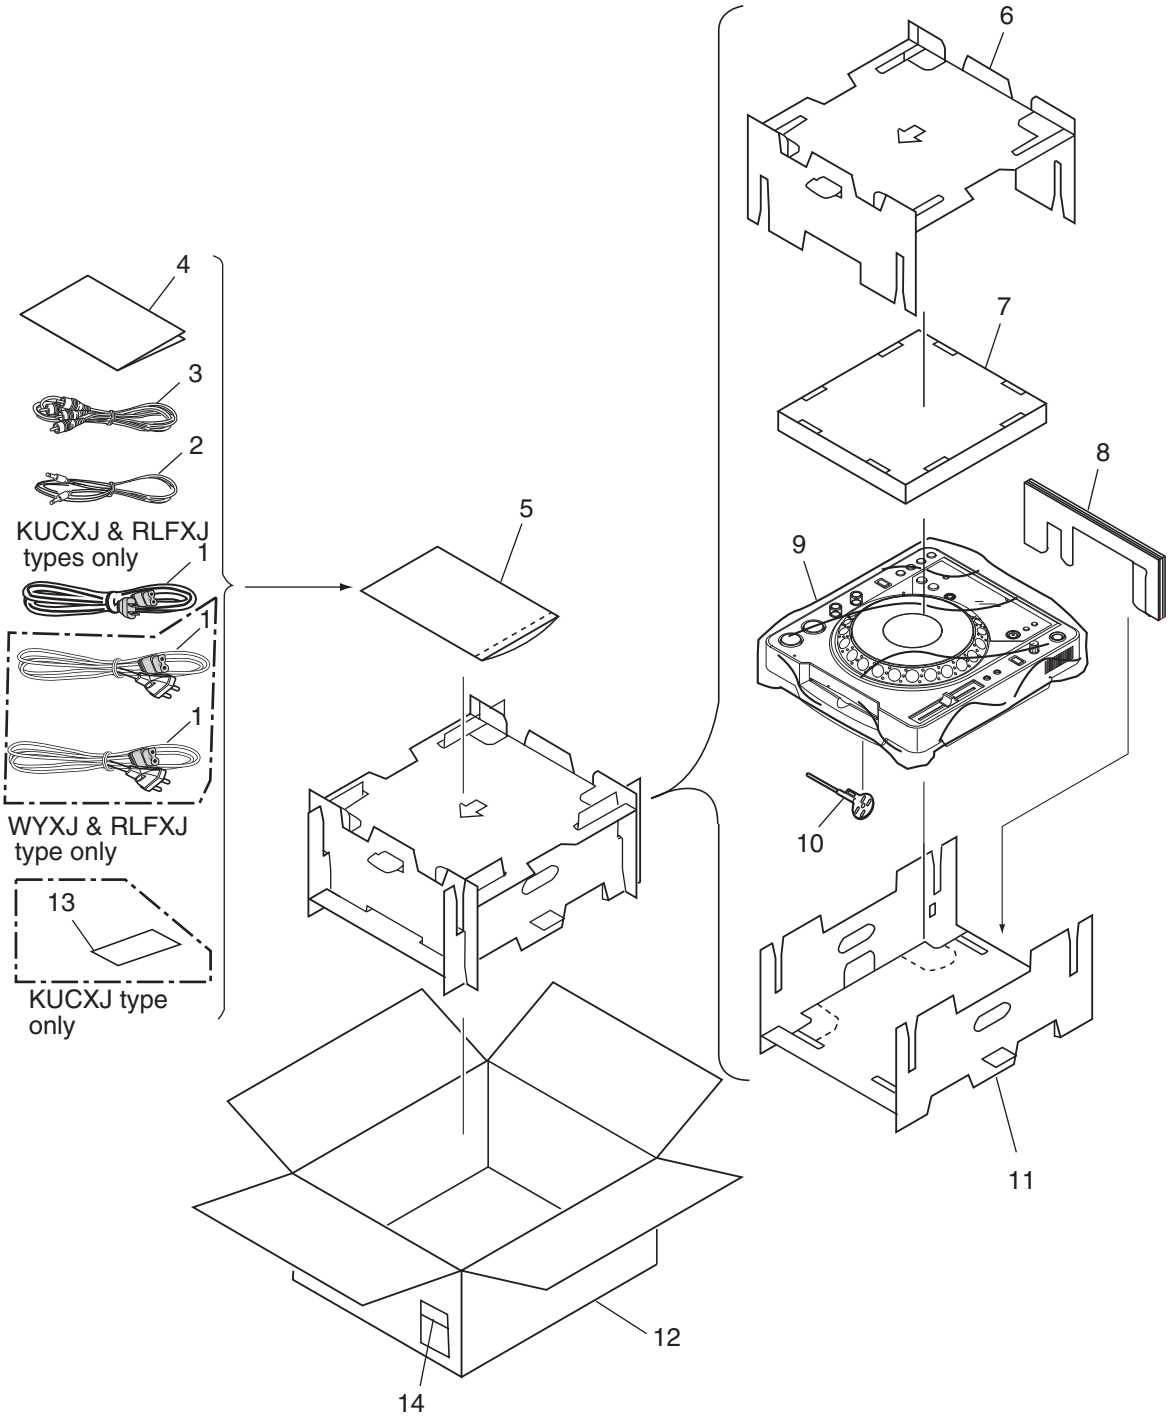

PACKING parts List


Mark	No.	Description	Part No.
⚠	1	AC Power Cord	See Contrast table(2)
	2	Control Cord	XDE3063
	3	Audio Cord	VDE1064
	4	Operating Instructions	See Contrast table(2)
NSP	5	Polyethylene Bag	AHG7117
	6	Pad B	DHA1556
	7	Pad C	DHA1557
	8	Pad D	DHA1558
	9	Sheet	RHX1006
	10	Push Rod	DEX1008
	11	Pad A	DHA1555
	12	Packing Case	See Contrast table(2)
NSP	13	Warranty Card	See Contrast table(2)
NSP	14	Label	See Contrast table(2)

(2) CONTRAST TABLE

CDJ-800MK2/KUCXJ, /WYXJ5 and RLFXJ types are constructed the same except for the following:

Mark	No.	Symbol and Description	CDJ-800MK2/ KUCXJ	CDJ-800MK2/ WYXJ5	CDJ-800MK2/ RLFXJ
⚠	1	AC Power Cord	ADG7021	ADG1154	ADG1154
⚠	1	AC Power Cord	Not used	Not used	ADG7097
	4	Operating Instructions (English)(KUCXJ)	DRB1401	Not used	Not used
	4	Operating Instructions (WYXJ5)(English, French, German, Italian, Dutch, Spanish)	Not used	DRB1400	Not used
	4	Operating Instructions (RLFXJ) (English, Spanish, Chinese)	Not used	Not used	DRB1402
	12	Packing Case	DHG2595	DHG2594	DHG2596
NSP	13	Warranty Card	ARY7043	Not used	Not used
NSP	14	Label	DRW2311	VRW1629	VRW1629

2.2 EXTERIOR SECTION

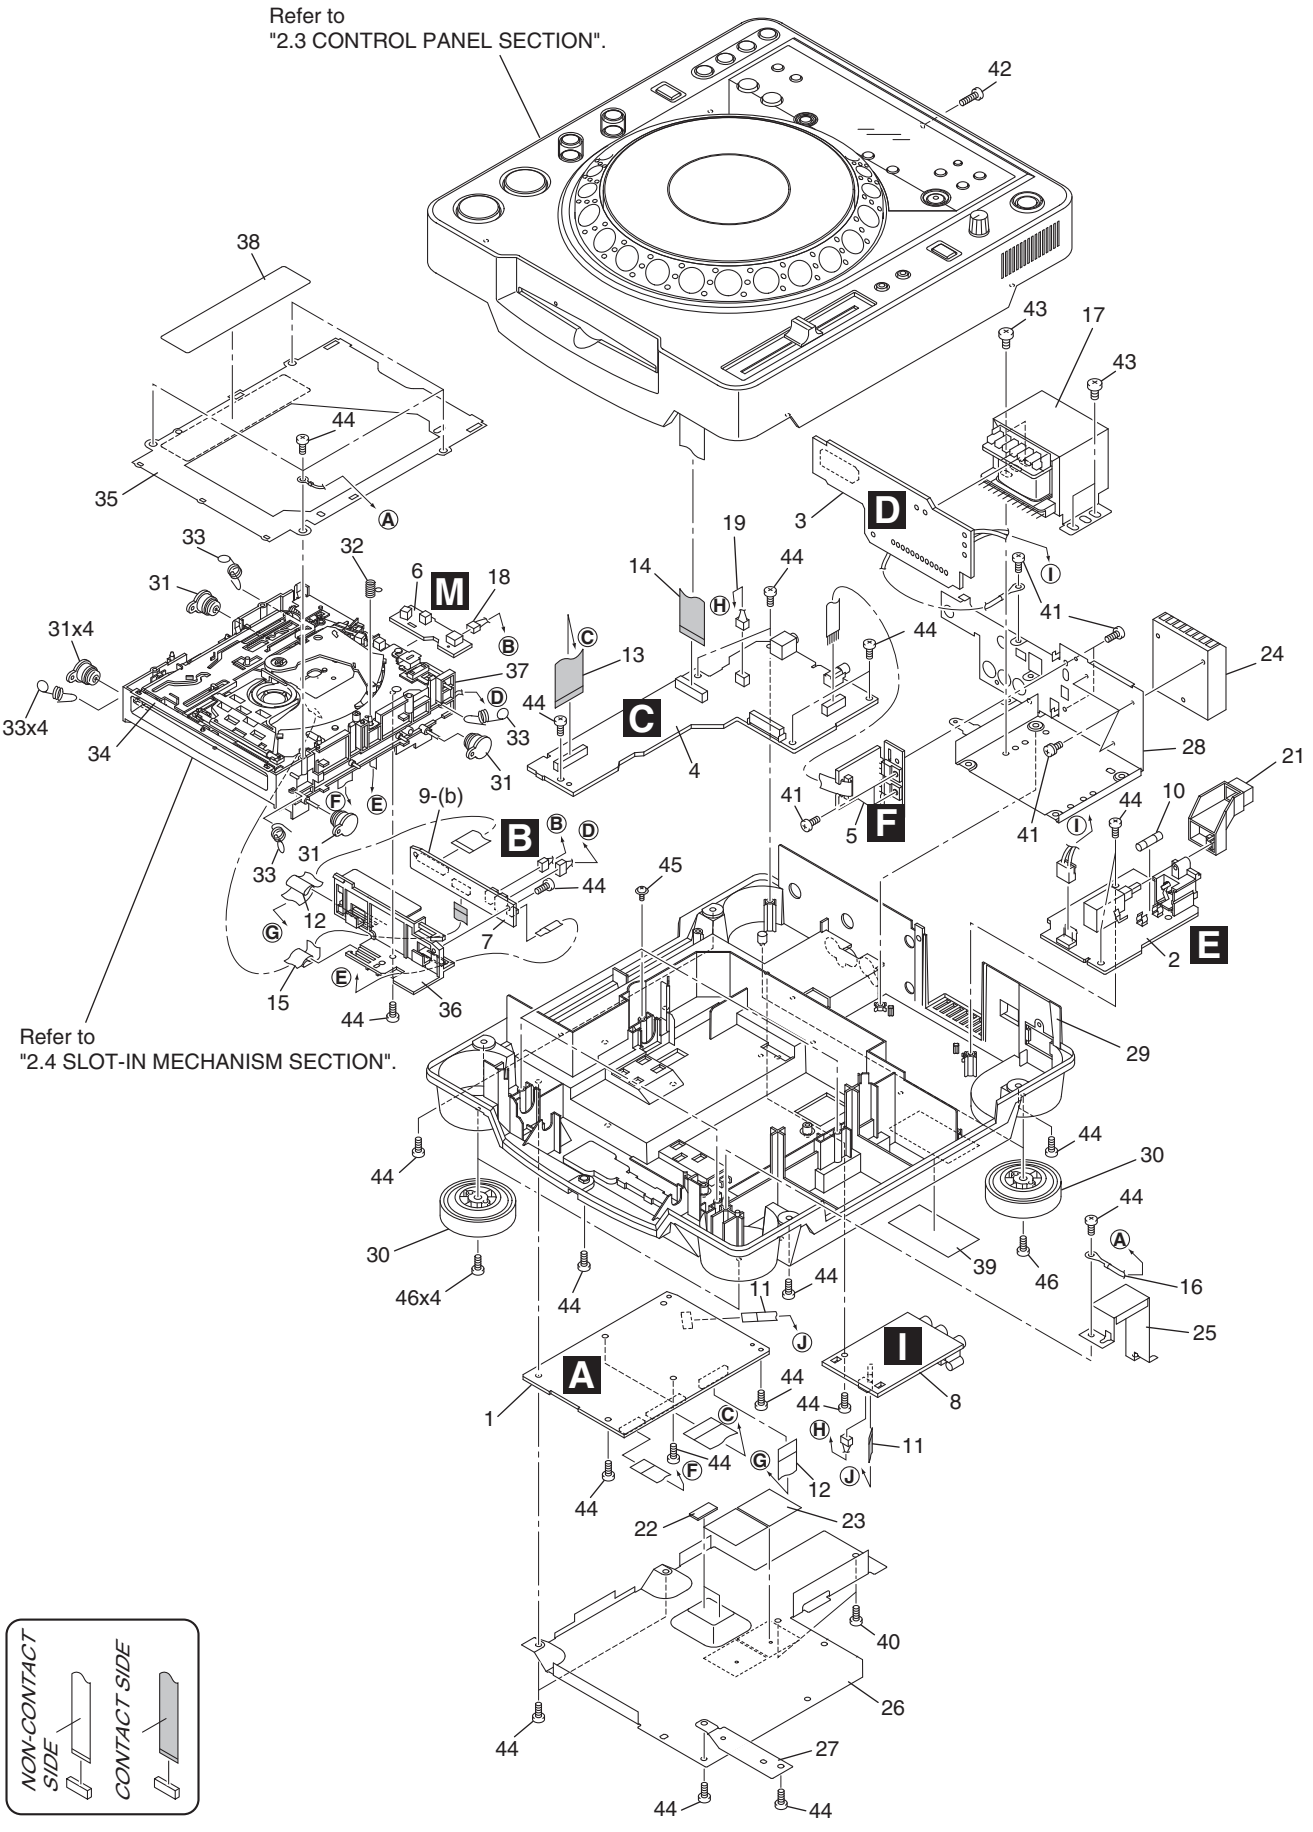

EXTERIOR SECTION parts List


Mark	No.	Description	Part No.
	1	MAIN Assy	DWG1622
⚠	2	AC IN Assy	See Contrast table(2)
⚠	3	TRNS Assy	See Contrast table(2)
	4	SECB Assy	DWR1309
	5	REGB Assy	DWR1310
	6	SLMB Assy	DWS1388
	7	RLYB Assy	DWX2602
	8	JACK Assy	DWG1626
	9	• • • •	
⚠	10	Fuse	See Contrast table(2)
	11	FFC (9p)	DDD1311
	12	FFC (32p)	DDD1312
	13	FFC (25p)	DDD1313
	14	FFC (17p)	DDD1314
	15	FFC (24p)	DDD1315
NSP	16	Earth Lead	DE010VF0
⚠	17	Power Transfomer	See Contrast table(2)
	18	Connector Assy	PF03PP-B05
	19	Connector Assy	PF03PP-C12
	20	• • • •	
	21	Power Knob	DAC2073
NSP	22	Silicon Lubber D5 L	DEB1456
	23	Bottom Cushion S4	DEC2506
	24	Heat Sink	DNG1102
	25	Earth Plate	DNH2532
	26	Bottom Plate	See Contrast table(2)
	27	Bottom Earth Plate	DNH2694
	28	Trans Plate	DNH2733
NSP	29	Chassis	See Contrast table(2)
	30	Insulator Assembly	DXA2069
	31	Damper	CNV6011
	32	Earth Spring	DBH1398
	33	Float Spring (G5)	DBH1494
	34	Front Sheet	DED1132
	35	Mecha Plate	DNH2642
	36	PCB Holder	DNK4524
	37	Float Base 04 Assy	DXB1838
	38	Laser Caution	See Contrast table(2)
NSP	39	Serial Label (UPC)	See Contrast table(2)
	40	Screw	BBT30P060FCC
	41	Screw	BBZ30P060FTC
	42	Screw	BBZ30P100FTC
	43	Screw	BBZ40P060FTC
	44	Screw	BPZ30P080FTB
	45	DM Screw (FTC)	DBA1260
	46	Screw	IPZ30P100FTC

(2) CONTRAST TABLE

CDJ-800MK2/KUCXJ, /WYXJ5 and RLFXJ types are constructed the same except for the following:

Mark	No.	Symbol and Description	CDJ-800MK2/ KUCXJ	CDJ-800MK2/ WYXJ5	CDJ-800MK2/ RLFXJ
⚠	2	AC IN ASSY	DWR1430	DWR1429	DWR1432
⚠	3	TRANS ASSY	DWR1371	DWR1371	DWR1428
⚠	10	Fuse (T1.6A)	AEK7075	Not used	Not used
⚠	10	Fuse (800MA)	Not used	REK1021	REK1021
⚠	17	Power Transfomer	DTT1204	DTT1203	DTT1203
	26	Bottom Plate	DNK2689	DNK2689	DNK2691
	29	Chassis	DNK4518	DNK4517	DNK4519
	38	Laser Caution	DRW2308	DRW2308	DRW2248
NSP	39	Serial Label	DRW2311	VRW1629	VRW1629


2.3 CONTROL PANEL SECTION

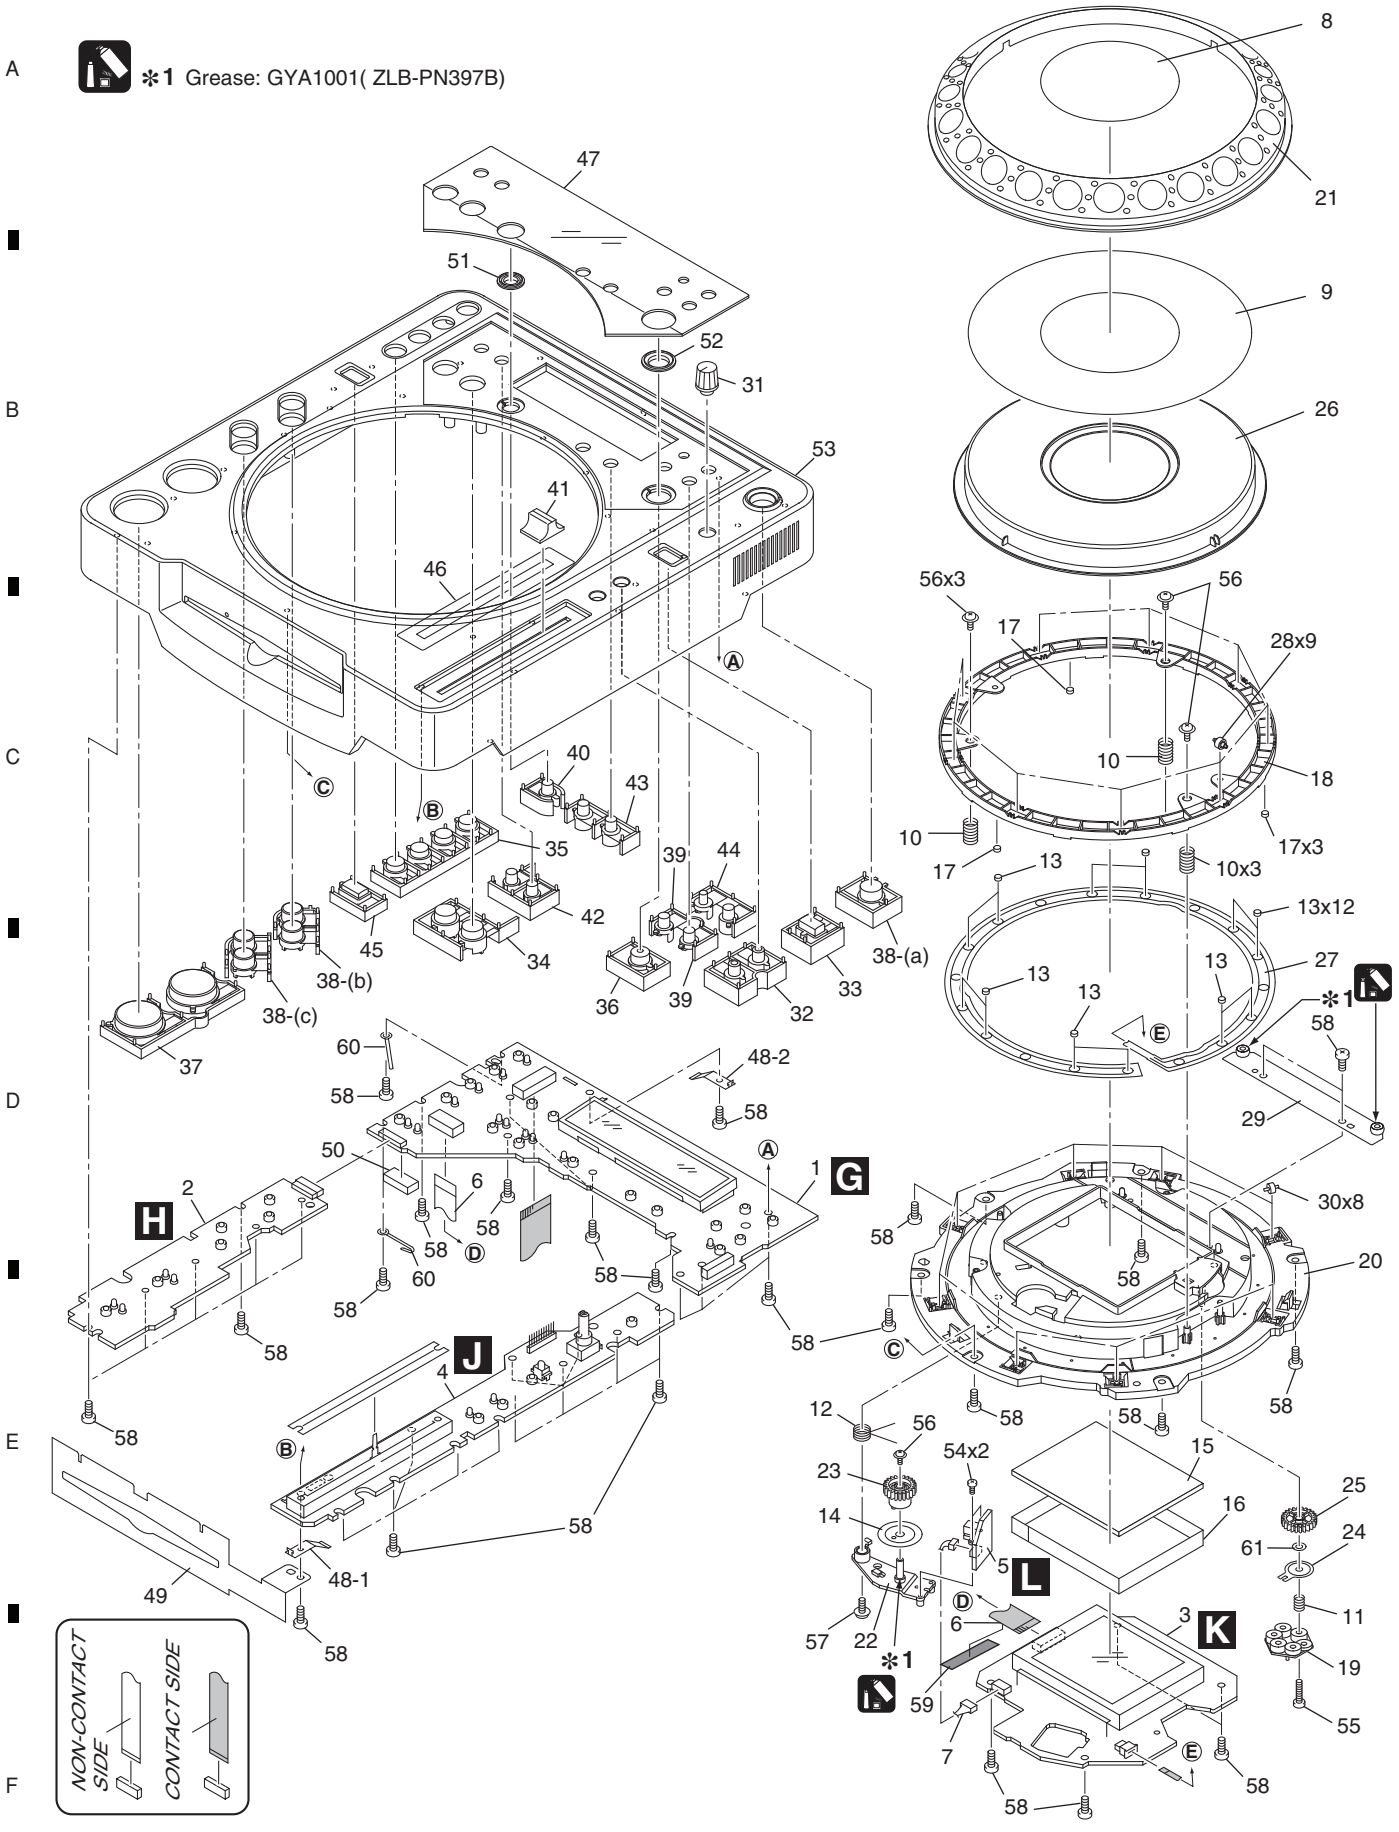

CONTROL PANEL SECTION parts List

Mark	No.	Description	Part No.
	1	DFLB Assy	DWG1623
	2	KSWB Assy	DWS1386
	3	JFLB Assy	DWG1624
	4	SLDB Assy	DWS1387
	5	JOGB Assy	DWG1625
	6	FFC	DDD1220
	7	Connector Assy	PF04PP-B07
	8	Jog Panel (PMMA)	DAH2182
	9	Jog Plate	DAH2438
	10	SW spring 25	DBH1514
	11	Gear spring 200	DBH1525
	12	ARM Sprimg	DBH1566
	13	SW Cushion HH48/2	DEC2538
	14	Encorder Plate	DEC2889
	15	Protector Sheet	DEC2945
	16	FL Sheet	DEC2946
	17	Ring Cushion L24/2.0	DEC2958
	18	SW Ring	DNK4070
	19	Adjust Plate	DNK4178
	20	Jog Holder	DNK4545
	21	Jog B	DNK4557
	22	Gear ARM	DNK4559
	23	Gear	DNK4560
	24	Smoother	DNK4561
	25	Load Gear A	DNK4562
	26	Jog A	DNK4586
	27	Sheet SW	DSX1065
	28	Roller A Assy	DXB1825
	29	Jog Stay Assy	DXB1876
	30	Roller B Assy	DXB1877
	31	Rotary Knob C	DAA1194
	32	TEMPO Knob	DAC2061
	33	VINYL Knob	DAC2063
	34	LOOP Knob	DAC2066
	35	Auto Beat Loop Knob	DAC2069
	36	Quick Return Knob	DAC2070
	37	PLAY Knob	DAC2286
	38	Set Knob (Eject)	DAC2287
	39	CALL Knob	DAC2289
	40	RELOOP Knob	DAC2291
	41	Slide Knob	DAC2292
	42	TEXT/A.CUE Knob	DAC2294
	43	Folder Search Knob	DAC2298
	44	DEL/MEMO Knob	DAC2299
	45	Reverse Knob	DAC2364
	46	Slide Sheet (gray)	DAH2374
	47	Display Panel	DAH2418
	48	Earth Plate (CU)	DBK1224
	49	Vessel Sheet	DEC2495
	50	FFC Guard	DEC2586
	51	Reloop Guard	DNK4057
	52	Q R Guard	DNK4058
	53	Control Panel	DNK4525
	54	Screw	BPZ20P060FTC
	55	Screw	BPZ20P100FTC
	56	Screw (FE)	DBA1265
	57	Screw	IPZ30P100FTC
	58	Screw	BPZ30P080FTB
	59	Ecsane Tape (10x50)	DEC2988
	60	Cord Clamper	RNH-184-0
	61	Washer	WA42D080D050

2.4 SLOT-IN MECHANISM SECTION

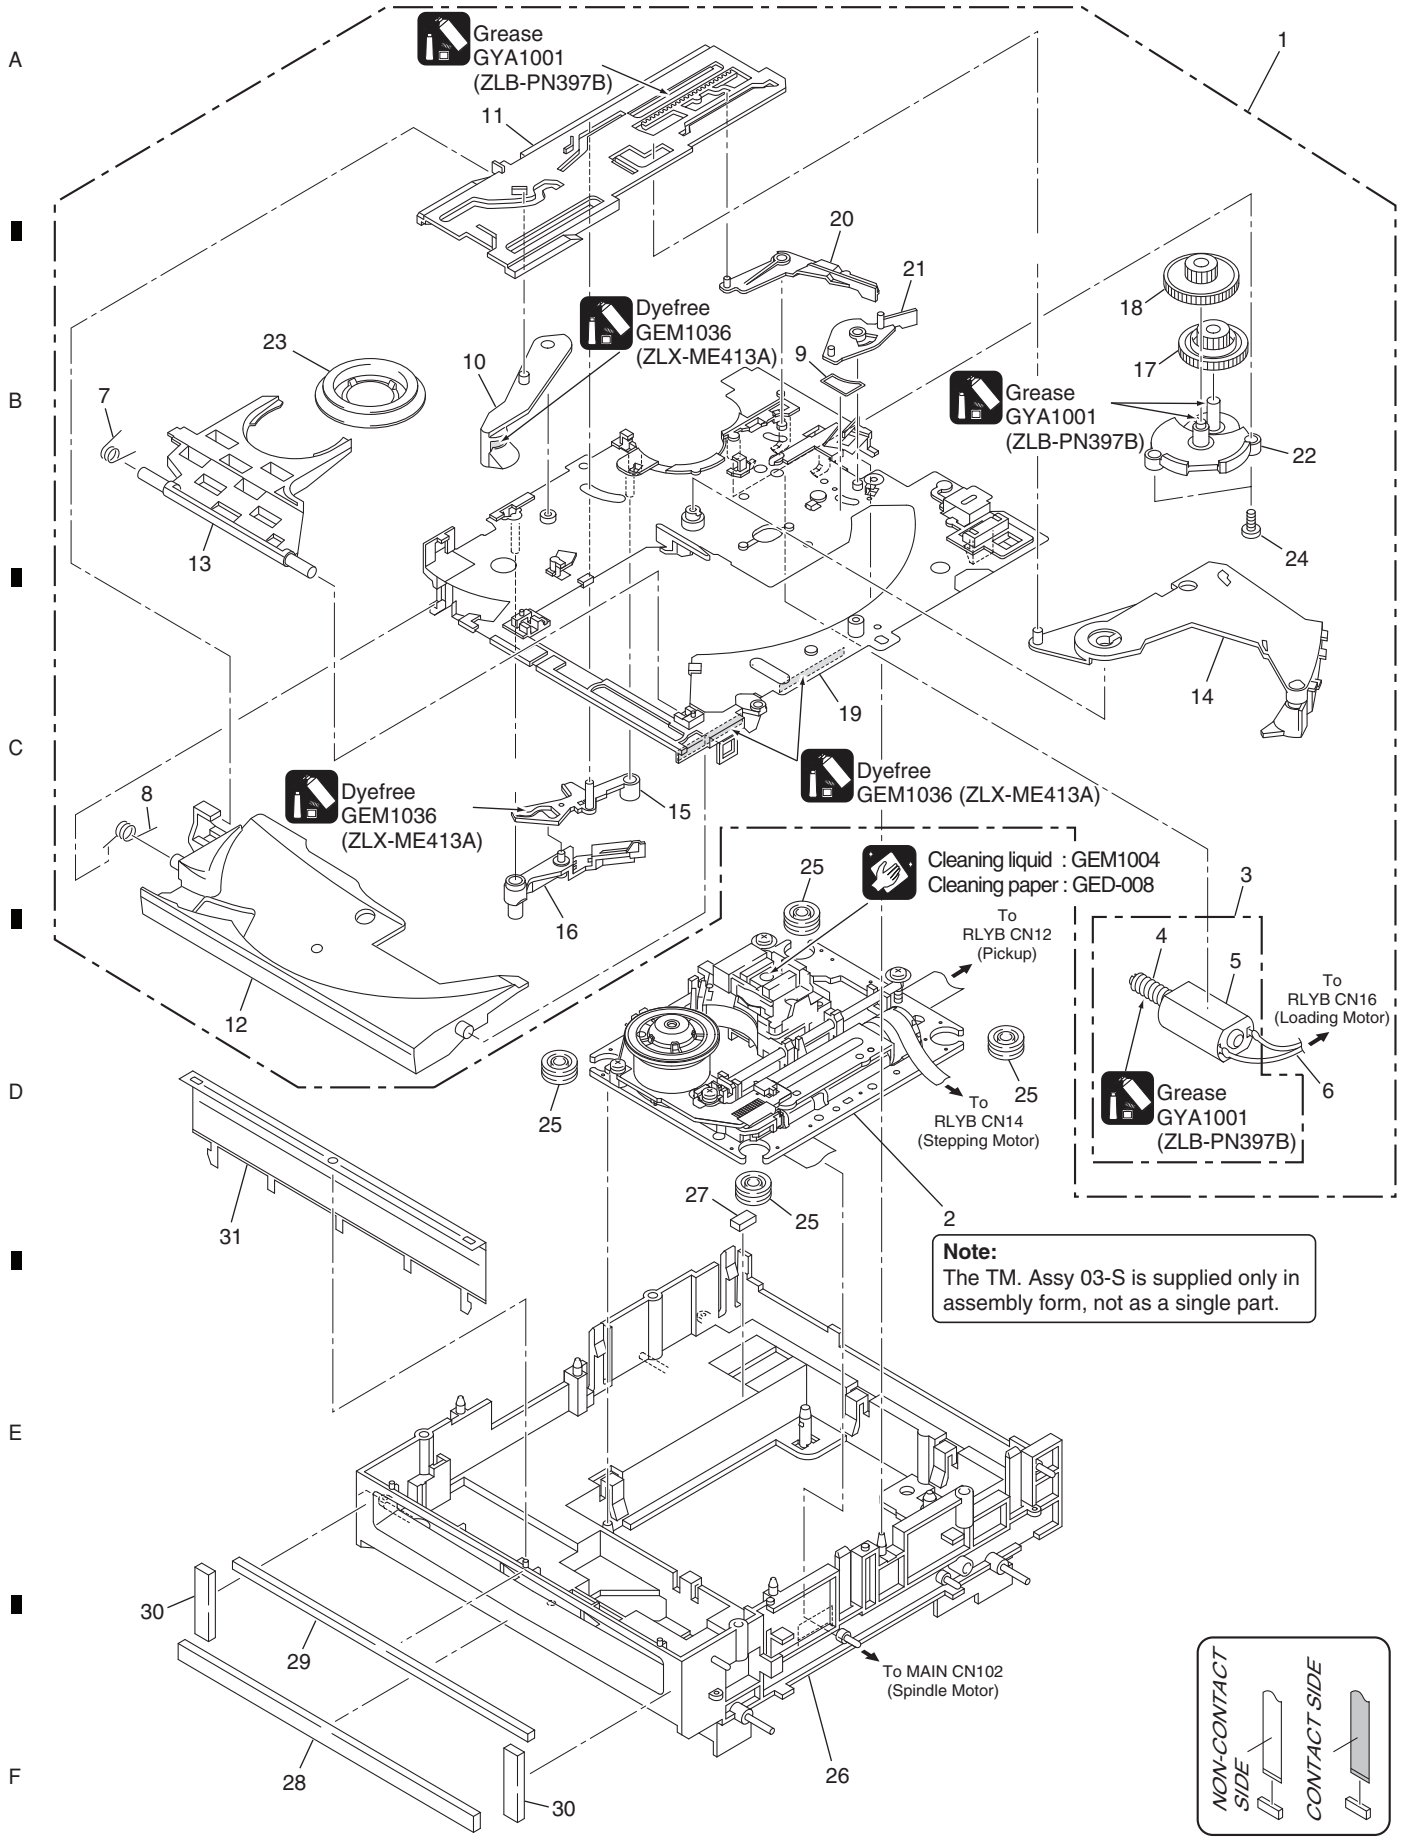

Note:
The TM. Assy 03-S is supplied only in assembly form, not as a single part.

SLOT-IN MECHANISM SECTION parts List

Mark	No.	Description	Part No.
NSP	1	Slot-in Mecha SV Assy	DXA2005
	2	TM. Assy 03-S	VXX3125
	3	Loading Motor Assy-S	DXX2510
NSP	4	Worm Gear	DNK3910
NSP	5	DC Motor S (ROHS)	DXM1230
	6	Connector Assy	PF02PY-B22
	7	Clamp Spring	DBH1374
	8	Guide Spring	DBH1375
	9	SW Lever Spacer SV	DEC2831
	10	Loading Lever	DNK3406
	11	Main Cam	DNK3407
	12	Disc Guide	DNK3478
	13	Clamp Arm	DNK3576
	14	Eject Lever	DNK3684
	15	Lever AP	DNK3835
	16	Lever BP	DNK3836
	17	Loading Gear	DNK3911
	18	Drive Gear	DNK3912
	19	Loading Base SV	DNK4369
	20	SW Lever SV1	DNK4370
	21	SW Lever SV2	DNK4371
	22	Gear Holder SV	DNK4372
	23	Clamper 04 Assy	DXB1859
	24	Screw	BPZ20P060FTC
	25	Floating Rubber (SI)	VEB1351
	26	Float Base 04 Assy	DXB1838
	27	Spacer POR (T3)	DEB1566
	28	Vessel Cushion A	DEC2852
	29	Vessel Cushion B	DEC2853
	30	Vessel Cushion C	DEC2854
	31	Front Sheet	DED1132

5. PCB PARTS LIST

NOTES:
- *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
- *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
- *When ordering resistors, first convert resistance values into code form as shown in the following examples.*

Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47k ohm (tolerance is shown by J=5%, and K=10%).

560 Ω → 56 x 10^1 → 561 ..... RD1/4PU[5][6][1]J
47k Ω → 47 x 10^3 → 473 ..... RD1/4PU[4][7][3]J
0.5 Ω → R50 ..... RN2H[R][5][0]K
1 Ω → 1R0 ..... RS1P[1][R][0]K

Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).

5.62k Ω → 562 x 10^1 → 5621 ..... RN1/4PC[5][6][2][1]F

■ LIST OF HOLE PCB ASSEMBLIES

Mark	Symbol and Description	CDJ-800MK2/ KUCXJ	CDJ-200MK2/ WYXJ5	CDJ-800MK2/ RLFXJ
NSP	1..MOTHER ASSY	DWM2232	DWM2232	DWM2232
	2..MAIN ASSY	DWG1622	DWG1622	DWG1622
	2..RLYB ASSY	DWX2602	DWX2602	DWX2602
NSP	1..DISP ASSY	DWM2234	DWM2233	DWM2236
	2..DFLB ASSY	DWG1623	DWG1623	DWG1623
	2..JACK ASSY	DWG1626	DWG1626	DWG1626
	2..SECB ASSY	DWR1309	DWR1309	DWR1309
	2..REGB ASSY	DWR1310	DWR1310	DWR1310
	2..TRNS ASSY	DWR1371	DWR1371	DWR1428
	2..ACIN ASSY	DWR1430	DWR1429	DWR1432
	2..KSWB ASSY	DWS1386	DWS1386	DWS1386
NSP	1..SUB ASSY	DWM2237	DWM2237	DWM2237
	2..JFLB ASSY	DWG1624	DWG1624	DWG1624
	2..JOGB ASSY	DWG1625	DWG1625	DWG1625
	2..SLDB ASSY	DWS1387	DWS1387	DWS1387
	2..SLMB ASSY	DWS1388	DWS1388	DWS1388

■ CONTRAST OF PCB ASSEMBLIES

E ACIN ASSY

DWR1430, DWR1429 and DWR1432 are constructed the same except for the following :

Mark	Symbol and Description	DWR1430	DWR1429	DWR1432
⚠	AN1 1P AC INLET	XKP3042	XKP3041	XKP3041
⚠	CN1 2P VH CONNECTOR	B2P3-VH	B2P3-VH	B2P3-VH
⚠	CN1 3P VH CONNECTOR	Not used	Not used	B3P5-VH
⚠	S2 VOLTAGE SELECTOR	Not used	Not used	DSA1026

D TRNS ASSY

DWR1371 and DWR1428 are constructed the same except for the following :

Mark	Symbol and Description	DWR1371	DWR1428
⚠	J2 CONNECTOR ASSY	DKP3621	Not used
⚠	J3 CONNECTOR ASSY	Not used	DKP3720

■ PCB PARTS LIST FOR CDJ-800MK2 UNLESS OTHER WISE NOTED

Mark	No.	Description	Part No.

A MAIN ASSY

SEMICONDUCTORS

⚠	IC307, IC703	BD00KA5WFP
	IC304	BU4230G
	IC701	DSPC56371AF180
	IC300	DYW1753
	IC303	K4S641632K-UC75
	IC102	M63018FP
⚠	IC305	MM1561JF
⚠	IC306	MM1562FF
⚠	IC704	NJM2880U1-05
⚠	IC100	NJM2885DL1-33
	IC104	NJM2903M
	IC103	NJU7013F
	IC702	PE8001A
	IC301	SCF5249VM140
	IC308	TC74VHC08FTS1
	IC309	TC7SET08FUS1
	IC311, IC312	TC7SH08FUS1
	IC105	TC7W04FU
	IC106	TC7W08FU
	IC310	TC7WU04FU
	IC101	TC94A15FG
	IC302	XC3S50-4VQG100C
	Q101	2SA1036K
	Q707	2SC2412K
	Q302, Q303	2SC4081
	Q705	DTA124EUA
	Q304	DTA143EUA
	Q301, Q305, Q706	DTC124EUA
	D101–D104	1SS355

COILS AND FILTERS

	X301 (16.9 MHz)	VSS1084

CAPACITORS

	C160, C338	CCSRCH101J50
	C315, C316	CCSRCH150J50
	C146	CCSRCH221J50
	C142, C143	CCSRCH391J50
	C126, C153, C313, C317, C321	CCSRCH470J50
	C118, C337, C357	CCSRCH471J50
	C122, C154	CCSRCH680J50
	C135	CCSRCH681J50
	C100, C101, C700, C702	CEHVW101M10
	C105, C106, C301	CEHVW101M6R3
	C302, C304, C306, C712	CEHVW220M6R3
	C701, C703–C706	CEHVW470M16
	C102–C104	CEHVW470M6R3
	C132, C718	CKSRYB102K50
	C111, C129, C136, C141	CKSRYB103K50
	C156–C158, C165–C168, C303	CKSRYB103K50
	C305, C731–C734, C743	CKSRYB103K50
	C107–C110, C112–C117, C119	CKSRYB104K16
	C121, C124, C134, C137–C140	CKSRYB104K16
	C144, C149–C151, C159	CKSRYB104K16
	C161–C164, C307, C309, C312	CKSRYB104K16
	C314, C318, C319, C322–C335	CKSRYB104K16
	C339–C348, C350–C355	CKSRYB104K16
	C358, C359, C361, C363, C366	CKSRYB104K16
	C368, C370, C372, C373, C725	CKSRYB104K16
	C728–C730, C746–C758	CKSRYB104K16
	C145, C147, C148	CKSRYB105K10
	C320, C356, C360	CKSRYB105K6R3
	C152	CKSRYB152K50
	C120, C128	CKSRYB153K50
	C130, C131, C155	CKSRYB223K50
	C123, C127	CKSRYB333K25

RESISTORS

	R300, R747	RAB4C103J
	R154, R155, R170, R171	RS1/16S1002F
	R733	RS1/16S1801F
	R132, R133, R743	RS1/16S2202F
	R168, R321, R742	RS1/16S3302F
	R734	RS1/16S3901F
	R322	RS1/16S5602F
	R131	RS1/16S8201F
	R392	RS1/16SS000J
	Other Resistors	RS1/16S###J

OTHERS

	CN701 CONNECTOR	CKS4176
	CN102 CONNECTOR 13P	CKS4179
	CN301 CONNECTOR	CKS4192
	CN101 32P FFC CONNECTOR	DKN1447
	KN301 EARTH METAL FITTING	VNF1109

B RLYB ASSY

SWITCHES AND RELAYS

	S1101	VSH1018

CAPACITORS

	C1108	CEVW220M6R3
	C1105, C1107	CKSRYB103K50
	C1104, C1109	CKSRYB104K16

OTHERS

	CN1106 PH CONNECTOR 2P(SMT)	AKM1273
	CN1105 PH CONNECTOR 3P(SMT)	AKM1274
	CN1102 24P FFC CONNECTOR	DKN1445
	CN1101 32P FFC CONNECTOR	DKN1447
	CN1104 4P FFC CONNECTOR	VKN1409

C SECB ASSY

SEMICONDUCTORS

⚠	IC53, IC61	AEK7008
⚠	IC58–IC60	AEK7023
⚠	IC54	AEK7065
	IC50	BA00BC0WCP-V5
⚠	IC57	BA50BC0WFP
⚠	IC51	NJM2374AM
	IC52	TC7S04FU

Mark	No.	Description	Part No.
	Q51		2SB1238X
	Q52, Q54		2SD1859X
⚠	Q53		2SD2012
	D55		1SS355
	D51, D58, D59		EP05Q04
	D56, D57		NNCD6.2MF
	D53		UDZS30(B)
	D52		UDZS5R1(B)

COILS AND FILTERS

	L56	CTF1386
	L51	DTL1083
	L61	LRCA180J

CAPACITORS

	C59	CCSRCH181J50
	C58	CCSRCH220J50
	C50, C60, C64	CEHAT101M10
	C57	CEHAT1R0M50
	C54	CEHAT221M2A
	C61, C65, C66, C72	CEHAT330M25
	C56, C71	CKSRYB103K50
	C55, C63, C67, C76, C77	CKSRYB104K16
	C62	DCH1200
	C52, C53	DCH1223
	C51	DCH1224

RESISTORS

	R41	RD1/2VM102J
	R74	RD1/2VM271J
	R70	RD1/2VM330J
	R73	RD1/2VM471J
	R62	RD1/2VM562J
	R81	RS1/16S1203F
	R51, R82	RS1/16S2202F
	R52	RS1/16S4701F
	R53	RS1/4SA4R7J
	Other Resistors	RS1/16S###J

OTHERS

	CN52 6P JUMPER CONNECTOR	52147-0610
	JA52 MINI JACK	AKN7003
	CN50 FFC BOTTOM CONNECTOR	B3B-PH-K
	CN56 FFC CONNECTOR 17P	HLEM17S-1
	CN51 11P SOCKET	KP250NA11
	JA51 JACK	RKN1004
	PCB BINDER	VEF1040
	CN53 25P FFC CONNECTOR	VKN1256
	KN51 WRAPPING TERMINAL	VNF1084
	HEAT SINK	VNH1074

D TRNS ASSY (DWR1371)

SEMICONDUCTORS

⚠	IC25 (630 mA)	AEK7006
⚠	IC23, IC24 (3.5 A)	AEK7017
⚠	IC21, IC22 (5.0 A)	AEK7019
⚠	D25–D28	1SR154-400
⚠	D21–D24	RB060L-40
	C21–C31	CKSRYB473K50

OTHERS

⚠	J2	DKP3621
	CN22 11P CONNECTOR	S11B-XH-A-1
	PCB BINDER	VEF1040

D TRNS ASSY (DWR1428)

SEMICONDUCTORS

⚠	IC25	AEK7006
⚠	IC23, IC24	AEK7017
⚠	IC21, IC22	AEK7019
⚠	D25–D28	1SR154-400
⚠	D21–D24	RB060L-40

CAPACITORS

	C21–C31	CKSRYB473K50

OTHERS

⚠	J3 CONNECTOR ASSY	DKP3620
	CN22 11P CONNECTOR	S11B-XH-A-1
	PCB BINDER	VEF1040

E ACIN ASSY (DWR1429)

COILS AND FILTERS

⚠	L1	VTL-004

SWITCHES AND RELAYS

⚠	S1	RSA1001

CAPACITORS

⚠	C2, C3	ACE7027
⚠	C1	ACG7033

OTHERS

	H1, H2 FUSE CLIP	AKR1004
⚠	CN1 2P-VH CONNECTOR	B2P3-VH
⚠	AN1 AC INLET 1P	XKP3041

E ACIN ASSY (DWR1430)

COILS AND FILTERS

⚠	L1	VTL-004

SWITCHES AND RELAYS

⚠	S1	RSA1001

CAPACITORS

⚠	C2, C3	ACE7027
⚠	C1	ACG7033

OTHERS

	H1, H2 FUSE CLIP	AKR1004
⚠	CN1 2P-VH CONNECTOR	B2P3-VH
⚠	AN1 AS INLET 1P	XKP3042

Mark	No.	Description	Part No.

E ACIN ASSY (DWR1432)

COILS AND FILTERS

⚠	L1	VTL-004

SWITCHES AND RELAYS

⚠	S2	DSA1026
⚠	S1	RSA1001

CAPACITORS

⚠	C2, C3	ACE7027
⚠	C1	ACG7033

F REGB ASSY

SEMICONDUCTORS

⚠	IC91, IC92	BA00BC0WCP-V5

CAPACITORS

	C93, C96	CEHAR101M10
	C91, C92, C94, C95	CKSRYB103K50

RESISTORS

	R93	RS1/16S1002F
	R94, R95	RS1/16S1202F
	R91	RS1/16S3902F
	R92	RS1/16S8201F

OTHERS

	6P CABLE HOLDER	51048-0600
J91	JUMPER WIRE	D20PDY0610E
	REGULATOR PLAT	DNH2707

G DFLB ASSY

SEMICONDUCTORS

	IC502	BU4242G
	IC501	PEG237B
	IC503	TC7SET08FUS1
	Q501	2SB1237X
	Q502–Q513	2SC4081
	D515	1SS355
	D510, D511	SLI-343URCW(RST)
	D501–D508, D512	SLI-343YCW(RST)
	D509	TLGE68TG(NP)
	D514	UDZS6R2(B)

COILS AND FILTERS

	X501 (16.0 MHz)	DSS1149

SWITCHES AND RELAYS

	S501–S504, S511–S514	DSG1079
	S505–S510, S515–S517	VSG1024

CAPACITORS

	C532, C533, C538	CCSRCH120J50
	C534	CCSRCH121J50
	C535–C537	CCSRCH330J50
	C531	CEHAR100M16
	C506	CEHAR101M10
	C502	CEHAR220M35
	C505	CEHAR330M10
	C511–C520, C523–C525	CKSRYB102K50
	C501, C507, C526–C529	CKSRYB103K50
	C504, C508	CKSRYB104K16
	C521, C522	CKSRYB105K6R3
	C503	CKSRYF104Z50

RESISTORS

	Other Resistors	RS1/16S###J

OTHERS

CN500	FFC BOTTOM CONNECTOR	13P52492-1320
CN501	FFC BOTTOM VONNEVTOR	17P52492-1720
V501	VFD	DEL1059
	FL HOLDER	DNF1736
CN502	8P SOCKET	KP200IB8L
CN503	B TO B CONNECTOR 11P	VKN1363

H KSWB ASSY

SEMICONDUCTORS

	Q1501, Q1502	2SC4081
	D1501, D1502	SLI-343YCW(RST)
	D1503, D1504	TLGE68TG(NP)

SWITCHES AND RELAYS

	S1501, S1502	DSG1079
	S1503-S1506	VSG1024

RESISTORS

	Other Resistors	RS1/16S###J

OTHERS

CN1502	8P PLUG	AKM7032

I JACK ASSY

SEMICONDUCTORS

	IC801	NJM4558DX
	Q801, Q802, Q831, Q832	2SD2114K
	D801, D831	1SS355

CAPACITORS

	C803, C805, C807, C833	CEHAT101M16
	C802, C809, C832	CKSRYB104K16
	C801, C804, C831, C834	CQMBA102J50
	C806, C808, C836, C838	CQMBA152J50

RESISTORS

	R806, R836	RN1/16SE1102D
	Other Resistors	RS1/16S###J

Mark	No.	Description	Part No.
		OTHERS	
	CN802	KR CONNECTOR 3P	B3B-PH-K
A	JA801	2P JACK	DKB1053
	JA802	1P JACK	PKB1033
		PCB BINDER	VEF1040
	CN801	9P FFC CONNECTOR	VKN1240

J SLDB ASSY

	SEMICONDUCTORS	
	D1554–D1557	1SS355
	D1551	E1L4E-9B1A(PQ)
	D1553	SLI-343URCW(RST)
B	D1552	SLI-343YCW(RST)
	SWITCHES AND RELAYS	
	S1551–S1554	VSG1024
	CAPACITORS	
	C1551	CEHAR100M16
	C1552, C1553	CKSRYB102K50
	C1558–C1561	CKSRYB103K50
C	**RESISTORS**	
	R1563, R1564	RS1/16S2201F
	VR1552	DCS1062
	VR1551	DCV1009
	Other Resistors	RS1/16S###J
	OTHERS	
	CN1503 B–B CONNECTOR	DKN1289

K JFLB ASSY

D	**SEMICONDUCTORS**	
	⚠IC603	AEK7057
	Q601	2SB1237X
	Q602, Q603	2SC1815
	Q604	2SD1858X
	D603	1SS355
	D604	UDZS13(B)
	D605	UDZS15(B)
	D601	UDZS8R2(B)
E	**CAPACITORS**	
	C611–C614	CCSRCH221J50
	C601	CEHAR100M16
	C600, C602	CEHAR101M10
	C606	CEHAR220M35
	C608	CEHAR330M10
	C607	CKSRYB102K50
	C603, C605, C609	CKSRYB103K50
	C604	CKSRYF104Z50
F	**RESISTORS**	
	R600	RD1/2VM680J
	Other Resistors	RS1/16S###J

Mark	No.	Description	Part No.
		OTHERS	
	CN602	CONNECTOR	CKS1072
	V601	FL INDICATOR	DEL1058
		FL HOLDER	DNF1735
	CN600	FFC CONNECTOR 13P	HLEM13R-1
	CN601	KR CONNECTOR	S4B-PH-K

L JOGB ASSY

	SEMICONDUCTORS	
	D1601	GP1A038RBK
	CAPACITORS	
	C1601, C1602	CKSRYB103K50
	RESISTORS	
	Other Resistors	RS1/16S###J
	OTHERS	
	CN1601 KR CONNECTOR	B4B-PH-K

M SLMB ASSY

	SWITCHES AND RELAYS	
	S1901, S1902	DSG1017
	OTHERS	
	CN1901 KR CONNECTOR	S3B-PH-K