
2. EXPLODED VIEWS AND PARTS LIST

NOTES : • *Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.*
• *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
• *Screw adjacent to▽ mark on the product are used for disassembly.*
• *For the applying amount of lubricants or glue, follow the instructions in this manual. (In the case of no amount instructions,apply as you think it appropriate.)*


2.1 PACKING

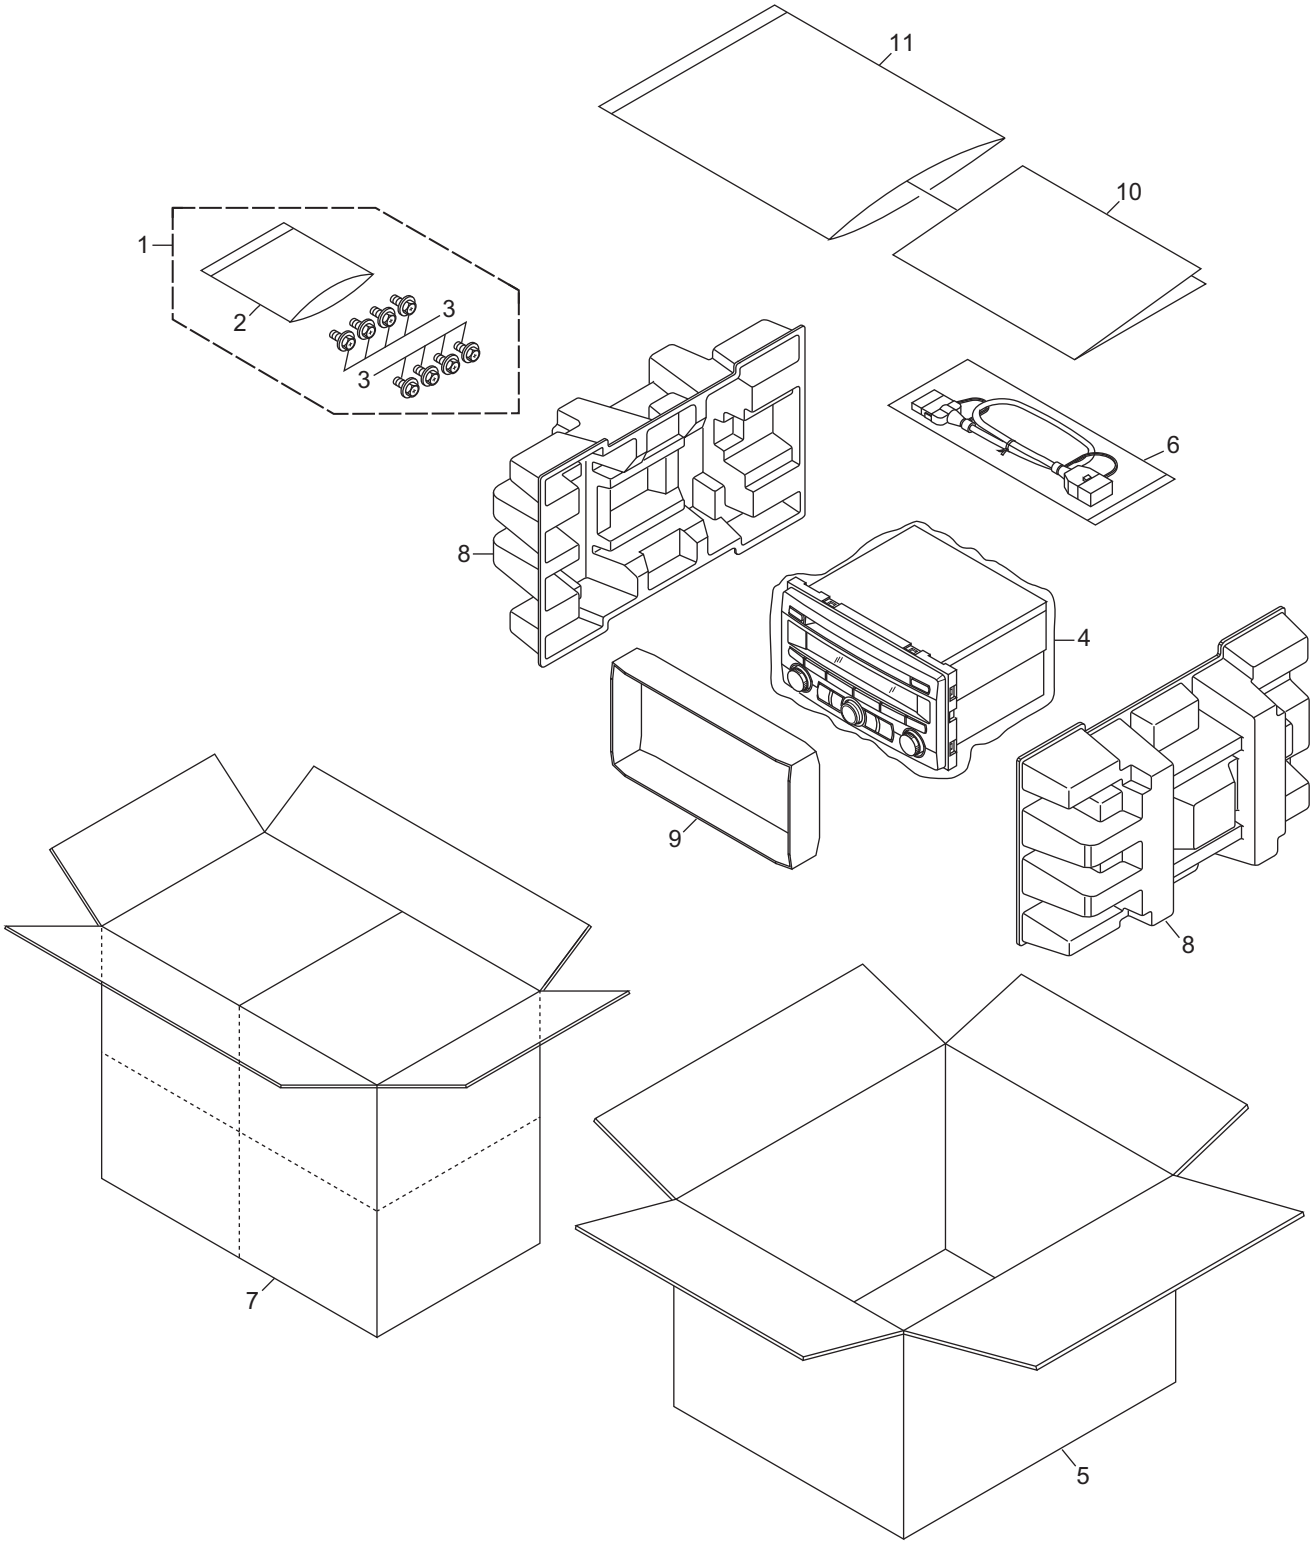

PACKING SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Screw Assy	CEA3954
*	2	Polyethylene Bag	CEG-127
	3	Screw	HMF50P080FTC
*	4	Polyethylene Bag	CEG1322
	5	Unit Box	CHA3312
*	6	Cord Assy	CXC5579
	7	Contain Box (DEH-M8027ZT)	YHL5161
		Contain Box (DEH-M8027ZT91)	YHL5164
	8	Protector	YHP5022
	9	Protector	YHP5034
	10	Owner's Manual (English)	YRB5043
	11	Polyethylene Bag	CEG1116


2.2 EXTERIOR(1)

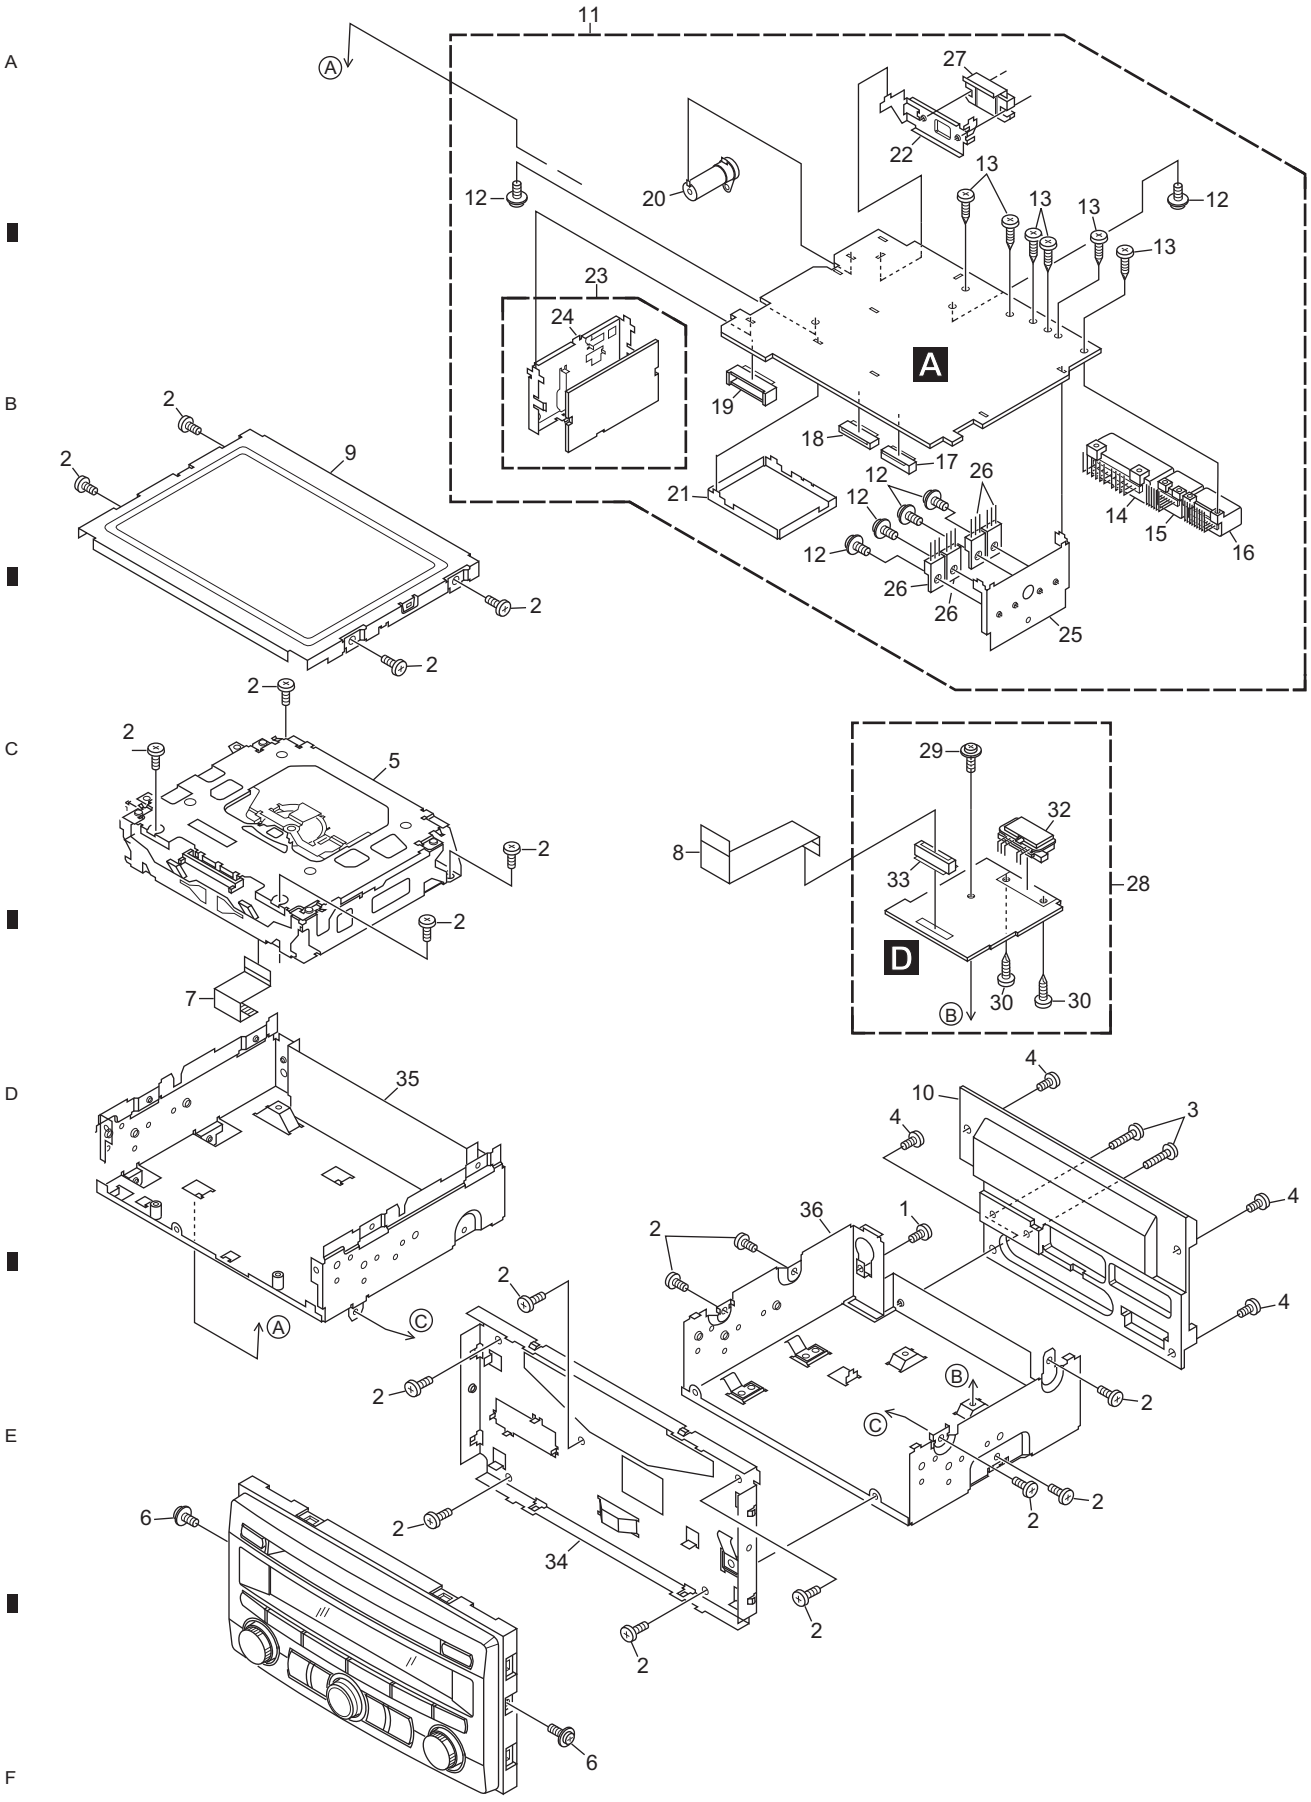

EXTERIOR(1) SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Screw	BMZ30P060FTB
	2	Screw	BSZ26P040FTC
	3	Screw	BSZ26P160FTC
	4	Screw	BSZ30P060FTC
	5	CD Mechanism Module(S10.5)	CXK5780
	6	Screw	ISS26P055FTC
	7	Connector	YDE5023
	8	Connector	YDE5024
	9	Case	YNB5015
	10	Heat Sink	YNR5034
	11	Main Unit	YWM5126
	12	Screw	ASZ26P060FTC
	13	Screw(M3 x 6)	CBA1393
	14	Connector(CN471)	CKM1458
	15	Connector(CN473)	CKM1466
	16	Connector(CN472)	CKM1467
	17	Connector(CN605)	CKS3859
	18	Connector(CN602)	CKS3886
	19	Connector(CN601)	CKS4267
	20	86146-48030(CN501)	CKX1057
	21	Shield	CND2489
	22	Holder	CND2492
	23	FM/AM Tuner Unit	CWE1831
	24	Holder	CND2144
	25	Holder	YND5007
	26	Transistor(Q431,441,851,881)	2SB1185
	27	IC(IC801)	TDA7386
	28	Sub Unit	YWM5157
	29	Screw	ASZ26P060FTC
	30	Screw(M3 x 6)	CBA1393
	31	•••••	
	32	Connector(CN2001)	CKM1468
	33	Connector(CN2003)	CKS5005
	34	Frame Unit	YXC5038
	35	Chassis Unit	YXC5039
	36	Chassis Unit	YXC5040


2.3 EXTERIOR(2)

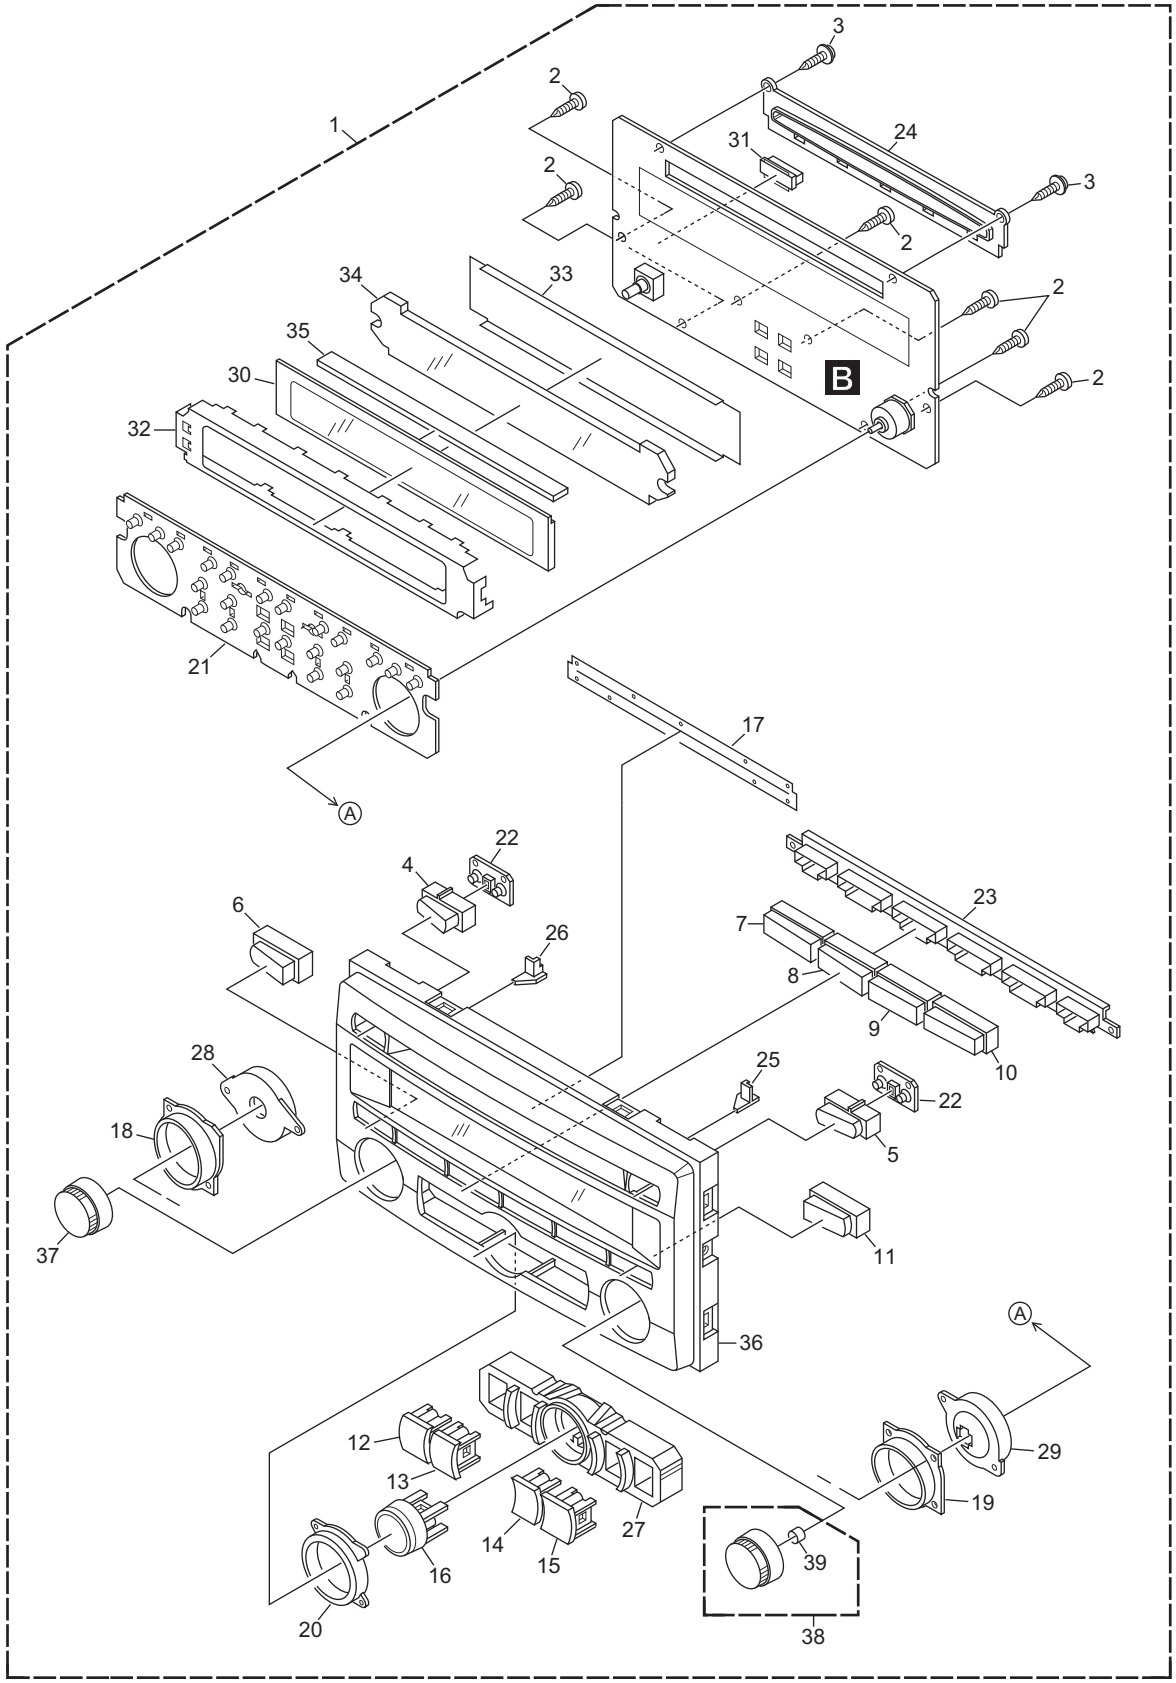

EXTERIOR(2) SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Grille Assy	YXC5034
	2	Screw	BPZ20P080FTC
	3	Screw	IPS20P100FTC
	4	Button(EJECT)	YAC5163
	5	Button(PWR)	YAC5164
	6	Button(AUDIO CONT)	YAC5165
	7	Button(1,2)	YAC5166
	8	Button(3,4)	YAC5167
	9	Button(5,6)	YAC5168
	10	Button(SCAN,TEXT)	YAC5169
	11	Button(MUTE)	YAC5170
	12	Button(FM1/2)	YAC5171
	13	Button(AM SAT)	YAC5172
	14	Button(DISC)	YAC5173
	15	Button(AUX,iPod)	YAC5174
	16	Button(SSP)	YAC5175
	17	Cover	YNM5060
	18	Plate	YNS5166
	19	Plate	YNS5167
	20	Plate	YNS5168
	21	Rubber	YNV5070
	22	Rubber	YNV5071
	23	Holder	YNV5073
	24	Holder	YNV5074
	25	Lighting Conductor	YNV5075
	26	Lighting Conductor	YNV5076
	27	Lighting Conductor	YNV5077
	28	Lighting Conductor	YNV5078
	29	Lighting Conductor	YNV5079
	30	LCD	CAW1864
	33	Sheet	YNM5059
	34	Lighting Conductor	YNV5080
	35	Connector	YNV5081
	36	Grille Unit	YXC5035
	37	Knob Unit	YXC5036
	38	Knob Unit	YXC5037
	39	Spring	CBL1764

2.4 CD MECHANISM MODULE

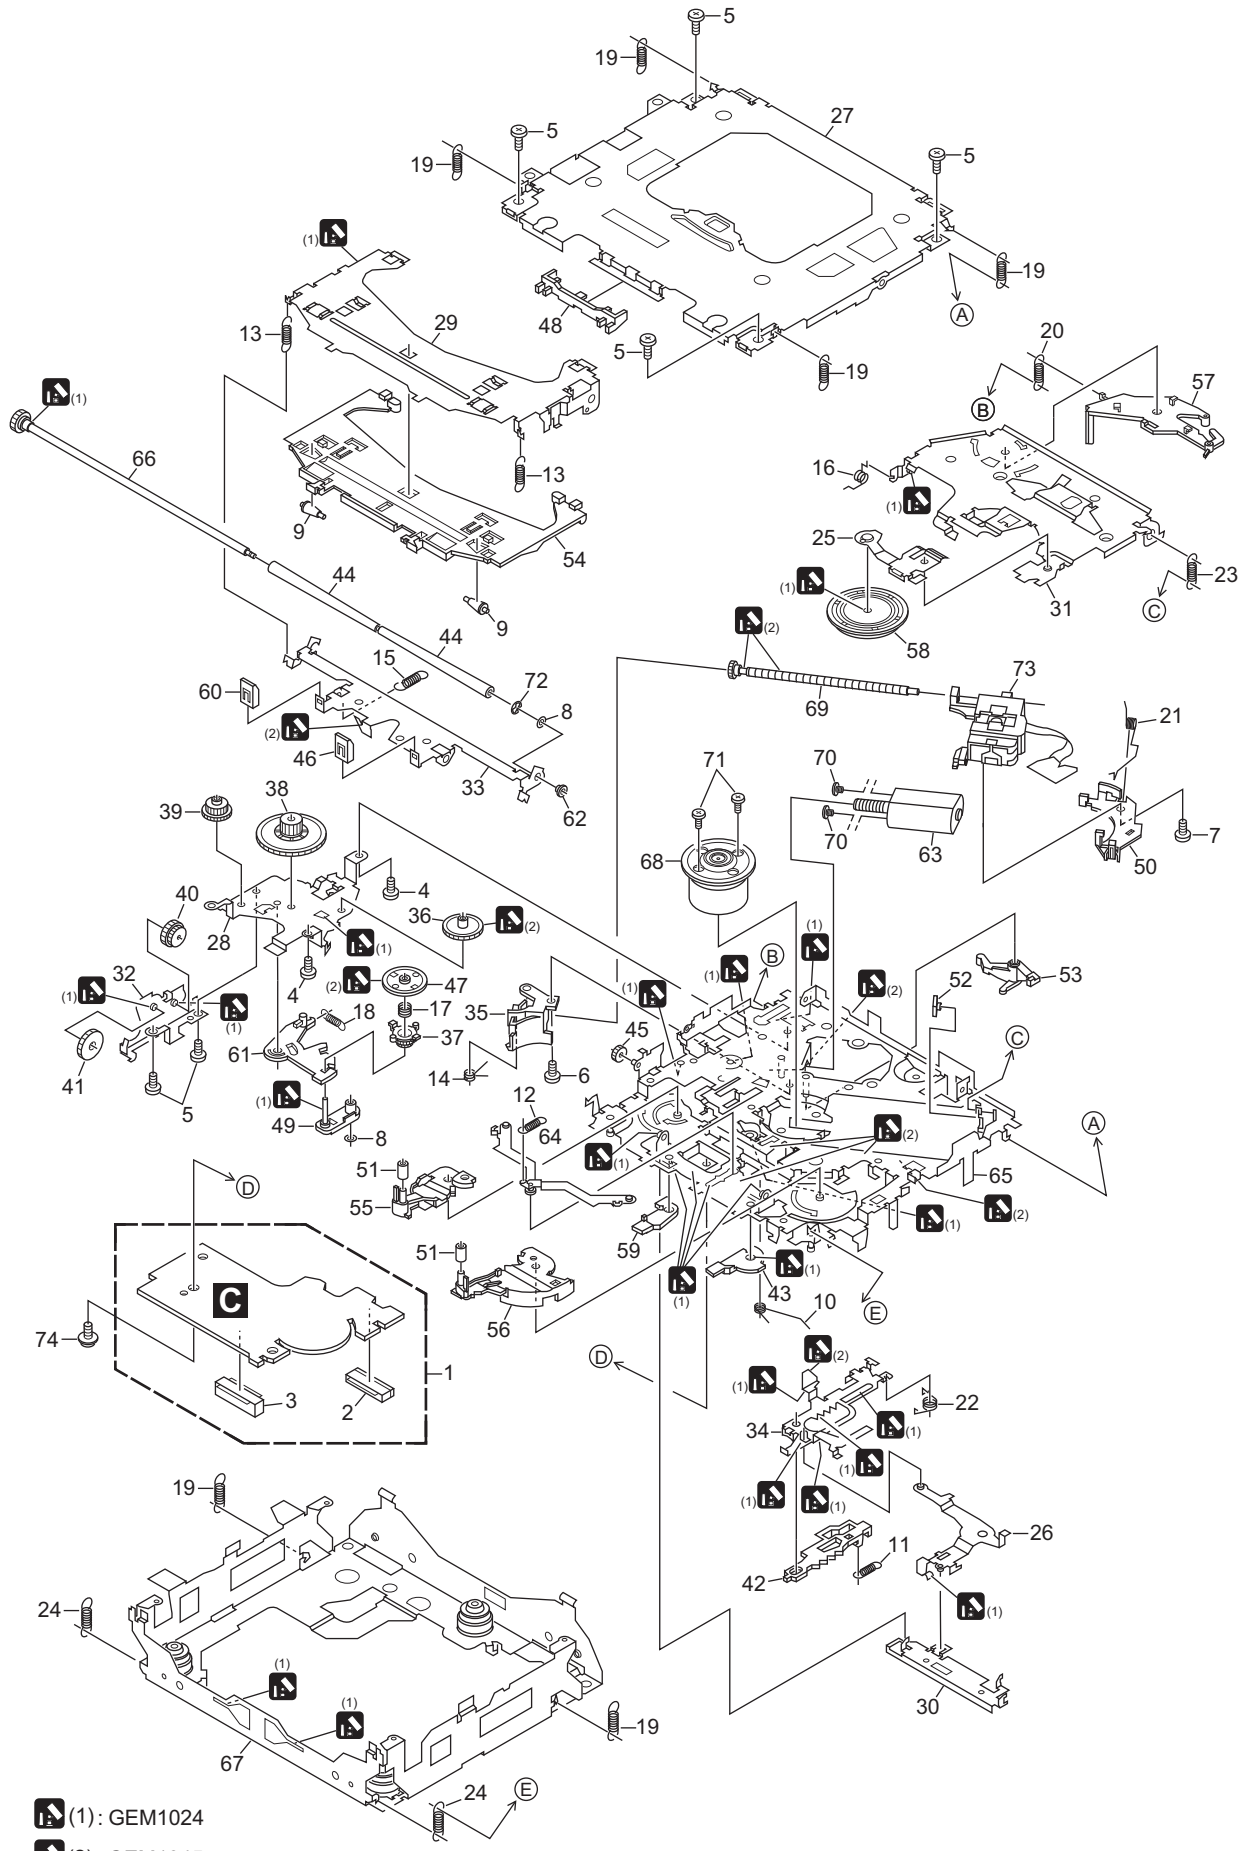

CD MECHANISM MODULE SECTION PARTS LIST

Mark No.	Description	Part No.
1	CD Core Unit(S10.5SCION)	CWX3418
2	Connector(CN101)	CKS4808
3	Connector(CN701)	CKS5005
4	Screw	BMZ20P025FTC
5	Screw	BSZ20P040FTC
6	Screw(M2 x 3)	CBA1511
7	Screw(M2 x 4)	CBA1835
8	Washer	CBF1038
9	Roller	CNV9499
10	Spring	CBH2609
11	Spring	CBH2612
12	Spring	CBH2614
13	Spring	CBH2616
14	Spring	CBH2617
15	Spring	CBH2620
16	Spring	CBH2855
17	Spring	CBH2937
18	Spring	CBH2735
19	Spring	CBH2854
20	Spring	CBH2642
21	Spring	CBH2856
22	Spring	CBH2857
23	Spring	CBH2860
24	Spring	CBH2861
25	Spring	CBL1686
26	Arm	CND1909
27	Frame	CND2582
28	Bracket	CND2583
29	Arm	CND3831
30	Lever	CND2585
31	Arm	CND2586
32	Bracket	CND2587
33	Arm	CND2588
34	Lever	CND2589
35	Holder	CNV9522
36	Gear	CNV7207
37	Gear	CNV9513
38	Gear	CNV7209
39	Gear	CNV9514
40	Gear	CNV9515
41	Gear	CNV9516
42	Rack	CNV9517
43	Arm	CNV7216
44	Roller	CNV8189
45	Gear	CNV9518
46	Guide	CNV9519
47	Gear	CNV7595
48	Guide	CNV9520
49	Arm	CNV7805
50	Rack	CNV8342
51	Roller	CNV8343
52	Holder	CNV8344
53	Arm	CNV8345
54	Guide	CNV9498
55	Arm	CNV8348
56	Arm	CNV8349
57	Arm	CNV8350
58	Clamper	CNV8365
59	Arm	CNV8386
60	Guide	CNV8396
61	Arm	CNV9521
62	Collar	CNV8447
63	Motor Unit(M2)	CXC4026
64	Arm Unit	CXC4027
65	Chassis Unit	CXC4028
66	Gear Unit	CXC4029
67	Frame Unit	CXC4031
68	Motor Unit(M1)	CXC7134
69	Screw Unit	CXC6359
70	Screw	JFZ20P025FTC
71	Screw	JGZ17P022FTC
72	Washer	YE20FTC
73	Pickup Unit(P10.5)(Service)	CXX1942
74	Screw	IMS26P030FTC

5. ELECTRICAL PARTS LIST

NOTE:

- *Parts whose parts numbers are omitted are subject to being not supplied.*
- *The part numbers shown below indicate chip components.*

  Chip Resistor

  RS1/◯S◯◯◯J,RS1/◯◯S◯◯◯J

  Chip Capacitor (except for CQS.....)

  CKS....., CCS....., CSZS.....
- *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
- *Meaning of the figures and others in the parentheses in the parts list.*

Example) IC 301 is on the point (face A, 91 of x-axis, and 111 of y-axis) of the corresponding PC board.

IC 301 (A, 91, 111) IC NJM2068V

Unit Number : YWM5126
Unit Name : Main Unit
Unit Number :
Unit Name : Keyboard Unit
Unit Number : CWX3418
Unit Name : CD Core Unit
Unit Number : YWM5157
Unit Name : Sub Unit

A

Unit Number : YWM5126
Unit Name : Main Unit

MISCELLANEOUS

Circuit Symbol and No.		Part No.
IC 202	(A,84,50) IC	NJM4558MD
IC 203	(A,70,96) IC	NJM4558MD
IC 205	(A,86,68) IC	NJM4558MD
IC 351	(A,104,57) IC	PM2013A
IC 421	(A,40,91) IC	S-812C56AUA-C3K
IC 501	(A,143,36) IC	BA3257HFP
IC 601	(A,92,20) IC	TK11233CUC
IC 701	(A,49,43) IC	PEG295A
IC 781	(A,50,71) IC	HA12240FP
IC 782	(A,52,64) IC	S-80835CNNB-B8U
IC 801	(A,122,132) IC	TDA7386
Q 351	(A,109,91) Transistor	2SD1767
Q 401	(A,49,112) Transistor	2SC4081
Q 402	(B,54,111) Transistor	2SC4081
Q 403	(A,77,103) Transistor	2SC4081
Q 404	(A,52,106) Transistor	2SC4081
Q 421	(A,48,91) Transistor	2SD1760F5
Q 422	(B,46,83) Transistor	2SA1162
Q 424	(A,42,85) Transistor	2SB1260
Q 425	(A,37,86) Transistor	2SC4081
Q 426	(A,38,68) Transistor	IMD3A
Q 431	(A,10,59) Transistor	2SB1185
Q 432	(A,16,39) Transistor	IMX1
Q 441	(A,10,89) Transistor	2SB1185
Q 442	(B,12,77) Transistor	IMX1
Q 451	(A,62,105) Transistor	2SB1260
Q 452	(A,65,103) Transistor	DTC124EUA
Q 453	(A,85,101) Transistor	2SC4081
Q 454	(A,85,108) Transistor	2SB1260
Q 511	(B,159,74) Transistor	DTC114EUA
Q 512	(A,146,58) Transistor	2SB1260
Q 513	(A,140,59) Transistor	DTC114EUA
Q 671	(A,156,24) Transistor	2SA1576A
Q 672	(A,157,19) Transistor	2SA1576A
Q 682	(A,141,19) Transistor	IMH4A
Q 702	(B,38,110) Transistor	2SA1576A
Q 703	(B,19,105) Transistor	2SA1576A
Q 801	(A,106,104) Transistor	DTC143EUA
Q 802	(A,107,110) Transistor	2SD1781K
Q 803	(A,107,114) Transistor	2SC4081
Q 804	(A,111,107) Transistor	DTC143EUA
Q 805	(A,112,114) Transistor	2SA1576A
Q 806	(B,62,108) Transistor	2SA1576A
Q 807	(A,128,91) Transistor	2SC4081
Q 808	(A,123,94) Transistor	2SC4081
Q 851	(A,10,101) Transistor	2SB1185
Q 852	(B,11,93) Transistor	IMX1
Q 853	(A,24,41) Transistor	2SB1184F5
Q 855	(A,27,50) Transistor	IMX1
Q 871	(A,76,116) Transistor	2SA1576A
Q 881	(A,10,71) Transistor	2SB1185
Q 883	(B,15,68) Transistor	IMX1
D 351	(A,103,83) Diode	HZU3R9(B2)
D 402	(A,56,119) Diode	HZU8R2(B1)
D 403	(A,79,107) Diode	HZU8R2(B1)
D 411	(B,55,107) Diode	RD8R2SL(N1)
D 412	(A,50,118) Diode	1SS355
D 413	(A,56,106) Diode	1SS355
D 421	(A,36,91) Diode	UDZS16(B)
D 422	(A,38,100) Diode	RR264M-400
D 423	(A,40,98) Diode	RR264M-400
D 431	(B,12,54) Diode	HZU6R8(B3)
D 432	(B,15,37) Diode	1SS355

Circuit Symbol and No.		Part No.
D 441	(B,13,88) Diode	HZU7R5(B3)
D 442	(B,23,76) Diode	1SS355
D 451	(A,80,100) Diode	DAN202K
D 452	(A,84,113) Diode	1SS355
D 455	(A,87,91) Diode	HZU4R7(B3)
D 471	(A,152,107) Diode	P300JL-6059
D 472	(A,82,118) Diode	RR264M-400
D 473	(A,87,118) Diode	RR264M-400
D 474	(B,24,115) Diode	1SS355
D 475	(B,41,98) Diode	1SS355
D 476	(B,20,115) Diode	1SS355
D 702	(B,48,112) Diode	1SS355
D 703	(A,34,109) Diode	1SS355
D 781	(A,43,117) Diode	UDZS18(B)
D 782	(A,44,117) Diode	UDZS18(B)
D 802	(A,105,118) Diode	HZU8R2(B3)
D 804	(B,62,113) Diode	1SS355
D 876	(A,68,118) Diode	UDZS5R6(B)
D 881	(A,9,80) Diode	MPG06G-6415G50
D 882	(B,18,72) Diode	1SS355
D 883	(B,18,63) Diode	HZU7R5(B3)
L 351	(B,107,41) Inductor	CTF1379
L 352	(A,116,50) Inductor	CTF1379
L 353	(B,107,53) Inductor	CTF1379
L 354	(B,107,59) Inductor	CTF1379
L 355	(B,108,65) Inductor	CTF1379
L 356	(A,107,72) Inductor	CTF1379
L 357	(A,121,38) Inductor	LCTAW2R2J2520
L 358	(A,119,74) Inductor	LCTAW2R2J2520
L 359	(A,105,72) Inductor	CTF1379
L 360	(B,100,50) Inductor	CTF1379
L 362	(A,127,49) Inductor	LCTAW2R2J2520
L 370	(A,93,45) Inductor	CTF1379
L 371	(A,90,38) Inductor	CTF1379
L 372	(A,86,38) Inductor	CTF1379
L 373	(A,90,39) Inductor	CTF1379
L 374	(A,86,40) Inductor	CTF1379
L 376	(A,86,42) Inductor	CTF1379
L 377	(A,90,43) Inductor	CTF1379
L 378	(A,86,44) Inductor	CTF1379
L 471	(A,143,123) Choke Coil 600 µH	CTH1221
L 504	(A,149,64) Inductor	CTF1295
L 505	(A,157,96) Inductor	LAU330J
L 507	(A,147,54) Chip Coil	LCTAW4R7J2520
L 508	(A,152,34) Inductor	CTF1295
L 601	(B,85,18) Inductor	CTF1295
L 701	(A,43,63) Inductor	LCTAW150J2520
X 351	(A,120,46) Radiator 33.868 8 MHz	CSS1600
X 701	(A,50,55) Radiator 10.0 MHz	CSS1577
⚠FU471	(A,57,112) Fuse 8 A	CEK1263
AR501	(A,160,102) Surge Protector	IMSA-6801-01Y901

RESISTORS

R 101	(A,83,61)	RS1/16S103J
R 102	(A,84,73)	RS1/16S103J
R 115	(A,87,63)	RS1/16S103J
R 116	(A,87,75)	RS1/16S103J
R 117	(A,65,69)	RS1/16S103J
R 118	(A,60,69)	RS1/16S103J
R 119	(A,64,69)	RS1/16S103J
R 120	(A,62,69)	RS1/16S103J
R 205	(A,78,53)	RS1/16S273J
R 206	(A,83,56)	RS1/16S273J
R 207	(A,79,51)	RS1/16S223J
R 208	(A,89,52)	RS1/16S273J
R 209	(A,77,47)	RS1/16S273J
R 210	(A,77,44)	RS1/16S223J
R 211	(A,82,56)	RS1/16S223J
R 212	(A,77,48)	RS1/16S223J
R 213	(A,63,97)	RS1/16S473J
R 214	(A,63,93)	RS1/16S473J
R 215	(A,63,99)	RS1/16S473J
R 216	(A,63,95)	RS1/16S473J
R 217	(A,70,102)	RS1/16S183J
R 218	(A,69,90)	RS1/16S183J
R 219	(A,74,98)	RS1/16S183J
R 220	(A,74,95)	RS1/16S183J
R 221	(A,89,62)	RS1/16S392J
R 222	(A,90,62)	RS1/16S392J
R 301	(A,132,65)	RS1/16S102J
R 302	(A,132,70)	RS1/16S102J
R 309	(A,135,65)	RS1/16S102J
R 310	(A,135,69)	RS1/16S102J
R 315	(A,133,72)	RS1/16S102J
R 316	(A,133,77)	RS1/16S102J
R 323	(A,135,74)	RS1/16S102J
R 324	(A,135,78)	RS1/16S102J
R 328	(B,68,92)	RS1/16S472J
R 329	(B,74,91)	RS1/16S472J
R 351	(A,84,37)	RS1/16SS221J
R 352	(A,84,45)	RS1/16SS221J
R 353	(A,84,44)	RS1/16SS221J
R 354	(A,84,42)	RS1/16SS221J
R 356	(A,84,40)	RS1/16SS221J
R 357	(A,84,41)	RS1/16SS221J
R 358	(A,84,39)	RS1/16SS221J
R 359	(B,94,42)	RS1/16S1R0J
R 360	(A,96,41)	RS1/16S1R0J
R 361	(A,116,47)	RS1/16S105J
R 362	(A,116,48)	RS1/16S331J
R 363	(B,96,42)	RS1/16S1R0J
R 364	(A,98,41)	RS1/16S1R0J
R 365	(B,98,42)	RS1/16S1R0J
R 366	(A,99,41)	RS1/16S1R0J
R 370	(A,105,92)	RS1/16S102J
R 371	(B,100,42)	RS1/16S1R0J
R 372	(A,101,41)	RS1/16S1R0J
R 373	(A,93,41)	RS1/16S1R0J
R 374	(A,102,41)	RS1/16S1R0J
R 403	(A,55,116)	RS1/16S153J
R 404	(A,55,118)	RS1/16S473J
R 405	(B,104,118)	RS1/10S472J
R 406	(A,60,122)	RS1/4S182J
R 407	(A,80,105)	RS1/16S153J
R 408	(A,75,105)	RS1/16S473J
R 409	(B,109,131)	RS1/10S472J
R 410	(A,80,113)	RS1/4S182J
R 412	(A,52,110)	RS1/16S104J
R 414	(A,55,109)	RS1/16S224J

Circuit Symbol and No.		Part No.
R 415	(A,51,115)	RS1/16S104J
R 416	(A,49,114)	RS1/16S104J
R 421	(A,37,84)	RS1/16S182J
R 422	(B,48,80)	RS1/16S182J
R 423	(B,45,78)	RS1/16S103J
R 424	(A,35,88)	RS1/16S562J
R 425	(A,37,96)	RS1/16S471J
R 426	(A,35,71)	RS1/16S102J
R 432	(A,16,36)	RS1/10S221J
R 434	(A,13,42)	RS1/16S221J
R 436	(A,13,39)	RS1/16S471J
R 437	(A,16,43)	RS1/16S331J
R 438	(B,14,52)	RS1/16S101J
R 439	(B,7,56)	RS1/16S223J
R 440	(A,17,34)	RS1/16S472J
R 441	(B,20,75)	RS1/16S331J
R 443	(B,13,81)	RS1/16S471J
R 444	(B,14,86)	RS1/16S221J
R 445	(B,15,84)	RS1/10S271J
R 447	(B,8,82)	RS1/16S223J
R 448	(B,20,77)	RS1/16S472J
R 451	(A,65,106)	RS1/16S472J
R 452	(A,62,109)	RS1/16S223J
R 455	(A,83,98)	RS1/16S102J
R 456	(A,86,103)	RS1/16S223J
R 457	(A,88,95)	RS1/10S331J
R 458	(A,83,115)	RS1/16S913J
R 459	(A,82,105)	RS1/16S100J
R 471	(A,61,112)	RS1/4S101J
R 472	(A,39,128)	RS1PMF680J
R 473	(B,18,115)	RS1/16S102J
R 474	(B,22,132)	RS1/16S1R0J
R 484	(A,32,119)	RS1/10S102J
R 515	(B,157,55)	RS1/16S681J
R 516	(B,159,67)	RS1/16S681J
R 517	(B,159,69)	RS1/16S681J
R 518	(B,159,71)	RS1/16S681J
R 519	(B,159,77)	RS1/16S681J
R 520	(B,159,79)	RS1/16S681J
R 526	(A,155,29)	RS1/16S471J
R 529	(B,160,84)	RS1/10S1R0J
R 530	(A,142,56)	RS1/16S223J
R 531	(A,140,57)	RS1/16S222J
R 602	(B,157,18)	RS1/16S472J
R 603	(B,160,18)	RS1/16S472J
R 604	(B,166,18)	RS1/16S472J
R 605	(B,164,18)	RS1/16S472J
R 632	(A,69,27)	RS1/16S1R0J
R 653	(A,17,111)	RS1/16S473J
R 655	(B,43,110)	RS1/16S472J
R 656	(B,41,114)	RS1/16S473J
R 657	(B,45,112)	RS1/16S103J
R 660	(B,33,30)	RS1/16S473J
R 671	(A,153,20)	RS1/16S272J
R 672	(A,153,18)	RS1/16S272J
R 673	(A,154,21)	RS1/16S472J
R 674	(A,152,17)	RS1/16S472J
R 675	(A,147,21)	RS1/16S681J
R 676	(A,150,18)	RS1/16S681J
R 701	(A,64,53)	RS1/16SS102J

Circuit Symbol and No.		Part No.
R 702	(A,67,54)	RS1/16SS102J
R 703	(A,60,55)	RS1/16SS102J
R 704	(A,58,55)	RS1/16SS102J
R 705	(A,62,56)	RS1/16SS102J
R 706	(A,64,57)	RS1/16SS102J
R 707	(A,67,57)	RS1/16SS102J
R 709	(A,46,54)	RS1/16SS473J
R 712	(B,158,13)	RS1/16S472J
R 713	(A,44,67)	RS1/16S102J
R 714	(A,69,31)	RS1/16S102J
R 715	(A,55,30)	RS1/16S102J
R 716	(A,69,29)	RS1/16S102J
R 718	(B,32,20)	RS1/16S221J
R 719	(A,75,23)	RS1/16S221J
R 720	(B,36,21)	RS1/16S101J
R 721	(A,40,54)	RS1/16S1R0J
R 722	(B,32,22)	RS1/16S101J
R 723	(B,36,22)	RS1/16S101J
R 725	(B,40,42)	RS1/16S1R0J
R 726	(A,38,31)	RS1/16S102J
R 727	(A,37,28)	RS1/16S102J
R 728	(A,39,30)	RS1/16S1R0J
R 732	(A,44,31)	RS1/16S102J
R 733	(A,52,28)	RS1/16S473J
R 735	(A,44,28)	RS1/16S102J
R 736	(A,50,31)	RS1/16S102J
R 737	(A,47,28)	RS1/16S473J
R 738	(A,58,32)	RS1/16S102J
R 739	(A,66,49)	RS1/16SS102J
R 740	(B,52,31)	RS1/16S473J
R 741	(B,53,34)	RS1/16S473J
R 742	(B,52,33)	RS1/16S104J
R 746	(A,67,37)	RS1/16SS1R0J
R 747	(A,65,38)	RS1/16SS1R0J
R 748	(A,67,38)	RS1/16SS1R0J
R 749	(A,65,39)	RS1/16SS1R0J
R 750	(A,67,40)	RS1/16SS471J
R 751	(A,63,41)	RS1/16SS473J
R 752	(A,67,41)	RS1/16SS102J
R 753	(A,65,42)	RS1/16SS332J
R 759	(A,63,44)	RS1/16SS102J
R 760	(A,65,45)	RS1/16SS102J
R 762	(A,63,49)	RS1/16SS102J
R 763	(A,80,23)	RS1/16S472J
R 764	(A,80,24)	RS1/16S682J
R 765	(A,86,36)	RS1/16SS103J
R 767	(A,71,38)	RS1/16SS472J
R 768	(A,71,39)	RS1/16SS472J
R 769	(A,71,41)	RS1/16SS472J
R 771	(A,71,45)	RS1/16SS152J
R 772	(A,68,45)	RS1/16SS152J
R 773	(B,47,87)	RS1/16S103J
R 774	(B,16,111)	RS1/16S432J
R 775	(B,16,109)	RS1/16S152J
R 779	(A,35,39)	RS1/16S102J
R 782	(A,38,64)	RS1/16S104J
R 783	(A,37,111)	RS1/4S101J
R 784	(A,40,111)	RS1/4S101J
R 788	(A,35,51)	RS1/16S101J
R 789	(A,35,49)	RS1/16S101J

Circuit Symbol and No.		Part No.
R 791	(A,58,23)	RS1/16S473J
R 795	(A,53,32)	RS1/16SS102J
R 796	(A,55,28)	RS1/16SS273J
R 801	(A,150,133)	RS1/16S103J
R 802	(A,109,114)	RS1/16S103J
R 803	(A,109,111)	RS1/16S331J
R 804	(A,109,105)	RS1/16S103J
R 805	(A,109,116)	RS1/16S222J
R 806	(A,104,111)	RS1/16S103J
R 807	(A,133,64)	RS1/16S125J
R 808	(A,132,67)	RS1/16S125J
R 809	(A,105,116)	RS1/16S223J
R 810	(A,104,114)	RS1/16S104J
R 811	(A,112,110)	RS1/16S103J
R 812	(A,112,111)	RS1/16S223J
R 813	(B,62,111)	RS1/16S472J
R 814	(B,59,111)	RS1/16S103J
R 815	(A,133,92)	RS1/10S681J
R 816	(A,125,89)	RS1/16S473J
R 817	(B,65,107)	RS1/16S473J
R 818	(A,123,98)	RS1/16S473J
R 819	(A,125,98)	RS1/16S473J
R 833	(A,111,99)	RS1/16S1R0J
R 834	(A,126,94)	RS1/16S1R0J
R 841	(A,147,128)	RS1/16S184J
R 851	(B,16,90)	RS1/16S102J
R 853	(B,16,94)	RS1/16S471J
R 854	(B,13,99)	RS1/16S222J
R 856	(B,16,96)	RS1/16S242J
R 857	(A,30,51)	RS1/16S182J
R 858	(A,28,55)	RS1/16S471J
R 859	(A,31,55)	RS1/16S102J
R 860	(A,30,55)	RS1/16S222J
R 870	(B,77,129)	RS1/10S472J
R 871	(A,76,119)	RS1/8S222J
R 872	(A,73,116)	RS1/16S103J
R 873	(A,77,113)	RS1/16S123J
R 874	(A,75,114)	RS1/16S103J
R 875	(A,69,113)	RS1/16S103J
R 876	(A,72,117)	RS1/16S103J
R 880	(B,12,72)	RS1/16S390J
R 881	(B,17,65)	RS1/16S362J
R 882	(A,15,69)	RS1/10S330J
R 883	(A,15,67)	RS1/10S330J
R 884	(A,15,65)	RS1/10S330J
R 885	(B,13,63)	RS1/16S471J
R 886	(B,15,61)	RS1/16S221J
R 887	(B,8,69)	RS1/16S223J
R 888	(B,19,68)	RS1/16S331J
R 889	(B,13,72)	RS1/16S390J
R 890	(B,25,67)	RS1/16S473J
R 891	(B,25,65)	RS1/16S223J
R 1701	(A,65,46)	RS1/16SS473J
R 1703	(B,15,105)	RS1/16S473J
R 1704	(A,59,57)	RS1/16S1R0J
R 1705	(A,67,59)	RS1/16SS1R0J
R 1707	(A,83,23)	RS1/16S682J
R 1708	(A,72,22)	RS1/16S473J
R 1709	(A,80,26)	RS1/16S472J
R 1710	(A,46,68)	RS1/16S472J
R 1711	(A,46,66)	RS1/16S472J

CAPACITORS

Circuit Symbol and No.		Part No.
C 113	(A,87,61)	CCSRCH101J50
C 114	(A,87,73)	CCSRCH101J50
C 115	(A,63,74)	CKSQYB474K25
C 116	(A,60,74)	CKSQYB474K25
C 117	(A,65,73)	CKSQYB474K25
C 118	(A,58,72)	CKSQYB474K25
C 119	(A,79,75)	CKSRYB473K50
C 121	(A,83,63)	CCSRCH101J50
C 122	(A,84,75)	CCSRCH101J50
C 205	(A,85,57)	CSZS1R0M16
C 206	(A,88,57)	CSZS1R0M16
C 207	(A,77,51)	CCSRCH150J50
C 208	(A,77,45)	CCSRCH150J50
C 209	(A,87,46)	CKSRYB473K50
C 213	(A,58,97)	CSZS3R3M16
C 214	(A,58,93)	CSZS3R3M16
C 215	(A,58,99)	CSZS3R3M16
C 216	(A,58,95)	CSZS3R3M16
C 217	(A,70,103)	CCSRCH150J50
C 218	(A,69,89)	CCSRCH150J50
C 219	(A,66,98)	CKSRYB473K50
C 307	(A,135,63)	CKSRYB222K50
C 308	(A,134,67)	CKSRYB222K50
C 309	(A,136,63)	CKSRYB222K50
C 310	(A,136,67)	CKSRYB222K50
C 321	(A,134,72)	CKSRYB222K50
C 322	(A,134,76)	CKSRYB222K50
C 323	(A,136,72)	CKSRYB222K50
C 324	(A,136,76)	CKSRYB222K50
C 327	(A,122,68)	CSZSR220M10
C 328	(A,115,71)	CSZSR220M10
C 329	(B,76,91)	CKSRYB104K50
C 330	(A,120,56)	CSZSR220M10
C 331	(B,100,39)	CKSRYB105K10
C 332	(A,101,38)	CKSRYB105K10
C 333	(A,93,38)	CKSRYB105K10
C 334	(A,102,38)	CKSRYB105K10
C 337	(A,77,90)	CEVLW470M6R3
C 339	(A,109,39)	CSZSR220M10
C 340	(A,109,74)	CKSRYB104K50
C 345	(B,108,48)	CKSRYB222K50
C 353	(B,96,39)	CKSRYB105K10
C 354	(A,98,38)	CKSRYB105K10
C 355	(B,98,39)	CKSRYB105K10
C 356	(A,99,38)	CKSRYB105K10
C 358	(B,104,46)	CKSRYB102K50
C 359	(B,104,48)	CKSRYB222K50
C 360	(A,105,40)	CSZSR220M10
C 362	(B,108,46)	CKSRYB102K50
C 363	(A,114,41)	CSZSR220M10
C 364	(A,116,45)	CCSRCH100D50
C 365	(A,123,47)	CCSRCH100D50
C 366	(B,112,48)	CKSRYB103K50
C 368	(A,123,50)	CKSRYB104K50
C 371	(B,112,54)	CKSRYB104K50
C 372	(A,127,53)	CKSQYB475K6R3

Circuit Symbol and No.		Part No.
C 373	(B,109,54)	CKSRYB104K50
C 374	(A,128,56)	CKSQYB475K6R3
C 375	(B,113,59)	CKSRYB104K50
C 376	(A,125,62)	CKSQYB475K6R3
C 377	(A,122,65)	CSZSC101M10
C 380	(B,109,60)	CKSRYB104K50
C 381	(A,127,71)	CKSQYB475K6R3
C 384	(B,112,63)	CKSRYB104K50
C 385	(B,115,62)	CKSRYB222K50
C 386	(A,104,85)	CKSRYB105K10
C 387	(B,109,83)	CKSRYB103K50
C 388	(A,110,85)	CEVLW470M6R3
C 393	(B,102,53)	CKSRYB105K10
C 395	(B,99,53)	CKSRYB105K10
C 397	(A,92,48)	CKSRYB104K50
C 398	(A,94,48)	CKSRYB222K50
C 399	(B,115,68)	CKSRYB222K50
C 401	(B,61,120)	CKSRYB103K50
C 402	(A,59,118)	CEAL2R2M50
C 403	(A,81,109)	CKSRYB103K50
C 404	(A,75,109)	CEVLW2R2M50
C 408	(B,61,123)	CKSQYB103K50
C 409	(A,53,118)	CKSRYB103K50
C 420	(A,32,74) 470 µF/16 V	CCH1459(P35)
C 421	(A,31,87)	CEAL220M16
C 422	(B,30,72)	CKSRYB103K50
C 423	(B,41,81)	CKSRYB103K50
C 424	(A,42,79)	CEJQ101M10
C 425	(B,40,84)	CKSRYB103K50
C 428	(A,37,94)	CKSRYB104K50
C 432	(B,25,62)	CKSRYB473K50
C 433	(A,22,60)	CEHAZA101M16
C 434	(A,18,43)	CKSRYB103K50
C 442	(B,22,85)	CKSRYB473K50
C 443	(A,24,85)	CEHAZA101M16
C 444	(B,19,78)	CKSRYB103K50
C 461	(A,85,94)	CKSRYB103K50
C 462	(B,23,132)	CKSQYB102K50
C 463	(B,28,132)	CKSQYB102K50
C 466	(B,26,132)	CKSQYB102K50
C 469	(B,30,121)	CKSQYB221K50
C 470	(B,28,121)	CKSQYB221K50
C 471	(A,121,123) 3 300 µF/16 V	CCH1486(P45)
C 472	(B,92,129)	CKSQYB183K50
C 473	(B,84,129)	CKSQYB183K50
C 474	(B,82,129)	CKSQYB183K50
C 475	(B,63,129)	CKSQYB183K50
C 476	(B,90,129)	CKSQYB183K50
C 477	(B,87,129)	CKSQYB183K50
C 478	(B,80,129)	CKSQYB183K50
C 479	(B,63,126)	CKSQYB183K50
C 480	(A,87,115)	CKSQYB102K50
C 481	(A,65,111)	CKSQYB393K50
C 482	(A,22,119)	CCSQCH101J50
C 483	(A,24,119)	CCSQCH101J50
C 484	(B,33,121)	CKSQYB221K50
C 485	(B,35,121)	CKSQYB221K50
C 486	(B,44,120)	CKSQYB222K50
C 487	(B,46,120)	CKSQYB222K50
C 488	(B,49,120)	CKSQYB222K50
C 489	(B,53,120)	CKSQYB222K50
C 490	(B,53,116)	CKSQYB473K50
C 491	(A,20,116)	CKSQYB103K50
C 496	(A,29,119)	CKSQYB102K50
C 497	(B,73,134)	CKSQYB104K50
C 507	(A,150,70)	CEJQ101M10
C 509	(B,166,81)	CKSRYB103K50
C 519	(A,172,53)	CEJQ470M10
C 520	(B,163,55)	CKSRYB103K50
C 521	(A,172,45)	CEJQ470M10
C 522	(B,166,43)	CKSRYB103K50
C 523	(A,147,25)	CEJQ101M10
C 524	(B,151,27)	CKSRYB103K50
C 525	(A,149,31)	CKSRYB105K10
C 526	(A,135,39)	CKSYB475K10
C 527	(A,147,62)	CKSRYB103K50
C 613	(A,51,19)	CKSRYB105K10
C 631	(A,91,15)	CKSRYB104K50
C 632	(A,94,15)	CKSRYB104K50
C 671	(A,155,26)	CKSRYB332K50
C 672	(A,157,17)	CKSRYB332K50
C 683	(A,151,21)	CKSRYB105K10
C 684	(A,150,20)	CKSRYB105K10
C 685	(A,138,20)	CKSRYB103K50
C 686	(A,145,17)	CKSRYB103K50
C 687	(A,138,18)	CKSRYB563K16
C 688	(A,147,18)	CKSRYB563K16
C 689	(A,135,18)	CKSRYB474K10
C 690	(A,138,17)	CKSRYB474K10
C 707	(B,16,107)	CKSRYB224K16
C 713	(A,48,64)	CSZS100M16
C 714	(A,48,62)	CKSRYB103K50
C 730	(A,60,28)	CKSRYB102K50
C 781	(A,47,72)	CKSRYB104K50
C 782	(A,54,62)	CKSRYB223K50
C 783	(A,38,66)	CKSRYB105K10
C 801	(A,139,64)	CFTNA224J50
C 802	(A,139,68)	CFTNA224J50
C 803	(A,139,73)	CFTNA224J50
C 804	(A,139,78)	CFTNA224J50
C 805	(B,149,134)	CKSQYB104K50
C 806	(A,141,101)	CFTNA105J50
C 807	(A,133,95)	CEVLW100M16
C 808	(A,153,130)	CEHAT1R0M50
C 809	(A,133,101)	CEVLW330M10
C 812	(B,119,85)	CKSRYB473K50
C 851	(B,16,92)	CKSRYB103K50
C 853	(B,25,96)	CKSRYB103K50
C 854	(A,12,98)	CKSRYB102K50
C 855	(A,26,55)	CKSRYB103K50
C 856	(A,22,52)	CEAT470M16
C 857	(B,24,55)	CKSRYB103K50
C 870	(A,66,115)	CKSRYB105K10
C 871	(A,69,109)	CKSRYB105K10
C 877	(A,69,116)	CKSRYB102K50
C 881	(A,17,75) 1 000 µF/16 V	CCH1428
C 881	(B,17,75) 1 000 µF/16 V	CCH1428
C 881	(B,17,80) 1 000 µF/16 V	CCH1428
C 881	(B,9,75) 1 000 µF/16 V	CCH1428
C 881	(B,9,80) 1 000 µF/16 V	CCH1428
C 882	(A,22,68)	CEHAZA101M16

Circuit Symbol and No.		Part No.
C 883	(B,25,70)	CKSRYB473K50
C 884	(B,14,65)	CKSRYB103K50
C 1400	(B,147,75)	CKSRYB471K50

B

Unit Number :

Unit Name : Keyboard Unit

MISCELLANEOUS

IC 901	(B,40,132)	IC	LC75810TS-8725
IC 902	(B,38,32)	IC	LC75700TS
D 901	(B,72,41)	Diode	HZU6R2(B2)
D 902	(B,69,58)	Diode	HZU5R1(B3)
D 903	(B,49,33)	Diode	RB715Z
D 904	(B,43,58)	Diode	MA111
D 905	(B,37,171)	Diode	MA111
D 906	(A,55,42)	LED	SML-311DT(HJ)
D 907	(A,55,25)	LED	SML-311DT(HJ)
D 908	(A,55,17)	LED	SML-311DT(HJ)
D 909	(A,55,89)	LED	SML-311DT(HJ)
D 910	(A,55,73)	LED	SML-311DT(HJ)
D 911	(A,55,57)	LED	SML-311DT(HJ)
D 912	(A,55,137)	LED	SML-311DT(HJ)
D 913	(A,55,121)	LED	SML-311DT(HJ)
D 914	(A,55,105)	LED	SML-311DT(HJ)
D 916	(A,55,173)	LED	SML-311DT(HJ)
D 917	(A,55,153)	LED	SML-311DT(HJ)
D 918	(A,79,71)	LED	SML-311DT(HJ)
D 919	(A,79,54)	LED	SML-311DT(HJ)
D 923	(A,79,97)	LED	SML-311DT(HJ)
D 924	(A,79,140)	LED	SML-311DT(HJ)
D 925	(A,79,123)	LED	SML-311DT(HJ)
D 930	(A,94,107)	LED	SML-311DT(HJ)
D 931	(A,64,107)	LED	SML-311DT(HJ)
D 933	(A,94,87)	LED	SML-311DT(HJ)
D 934	(A,64,87)	LED	SML-311DT(HJ)
D 935	(A,15,178)	LED	SML-311DT(HJ)
D 936	(A,11,163)	LED	SML-311DT(HJ)
D 937	(A,11,31)	LED	SML-311DT(HJ)
D 938	(A,15,16)	LED	SML-311DT(HJ)
D 939	(A,70,34)	LED	SML-311DT(HJ)
D 940	(A,88,34)	LED	SML-311DT(HJ)
D 941	(A,70,17)	LED	SML-311DT(HJ)
D 942	(A,88,17)	LED	SML-311DT(HJ)
D 943	(A,91,169)	LED	SML-311DT(HJ)
D 944	(A,79,156)	LED	SML-311DT(HJ)
D 945	(A,79,181)	LED	SML-311DT(HJ)
D 946	(A,67,169)	LED	SML-311DT(HJ)
D 950	(B,65,164)	Diode	MA111
IL 901	(B,36,180)	Lamp 85 mA,8 V	YEL5002
IL 902	(B,36,14)	Lamp 85 mA,8 V	YEL5002
S 926	(A,87,22)	Switch(VOL)	YSD5012
S 932	(A,80,170)	Switch(MULTI SEL)	CSX1123
	LCD		CAW1864

RESISTORS

R 901	(B,69,43)	RS1/16S331J
R 902	(B,39,151)	RS1/16S472J
R 903	(B,42,151)	RS1/16S472J
R 904	(B,45,151)	RS1/16S472J
R 905	(B,48,151)	RS1/16S472J
R 906	(B,47,145)	RS1/16S103J
R 907	(B,52,143)	RS1/16S681J
R 908	(B,52,141)	RS1/16S681J
R 909	(B,52,140)	RS1/16S681J
R 910	(B,52,138)	RS1/16S681J
R 911	(B,35,40)	RS1/16S102J
R 912	(B,37,40)	RS1/16S102J
R 913	(B,38,40)	RS1/16S102J
R 914	(B,40,40)	RS1/16S102J
R 915	(B,41,40)	RS1/16S102J
R 916	(B,43,25)	RS1/16S393J
R 917	(B,38,25)	RS1/16S681J
R 918	(B,37,25)	RS1/16S681J
R 919	(B,35,25)	RS1/16S681J
R 920	(B,33,25)	RS1/16S681J
R 921	(B,32,25)	RS1/16S681J
R 922	(B,34,40)	RS1/16S681J
R 929	(B,69,44)	RS1/16S681J
R 930	(B,41,174)	RS1/10S120J
R 931	(B,41,170)	RS1/10S120J
R 932	(B,43,16)	RS1/10S120J
R 933	(B,45,16)	RS1/10S120J
R 934	(B,54,17)	RS1/16S821J
R 935	(B,54,15)	RS1/16S821J
R 936	(B,55,64)	RS1/16S471J
R 937	(B,58,64)	RS1/16S471J
R 938	(B,55,66)	RS1/16S471J
R 939	(B,58,66)	RS1/16S471J
R 940	(B,71,143)	RS1/16S561J
R 941	(B,73,143)	RS1/16S471J
R 942	(B,80,49)	RS1/16S561J
R 943	(B,82,49)	RS1/16S561J
R 944	(B,78,49)	RS1/16S561J
R 946	(B,87,97)	RS1/16S561J
R 947	(B,89,97)	RS1/16S561J
R 949	(B,80,112)	RS1/16S122J
R 950	(B,82,112)	RS1/16S122J
R 951	(B,84,112)	RS1/16S122J
R 952	(B,80,72)	RS1/16S122J
R 953	(B,82,72)	RS1/16S122J
R 954	(B,84,72)	RS1/16S122J
R 955	(B,28,185)	RS1/16S561J
R 956	(B,32,185)	RS1/16S561J
R 957	(B,35,185)	RS1/16S561J
R 958	(B,20,14)	RS1/16S561J
R 959	(B,22,14)	RS1/16S561J
R 960	(B,23,14)	RS1/16S561J
R 961	(B,86,37)	RS1/16S122J
R 962	(B,83,38)	RS1/16S122J
R 963	(B,79,38)	RS1/16S122J
R 964	(B,78,11)	RS1/16S122J
R 965	(B,74,11)	RS1/16S122J
R 966	(B,71,11)	RS1/16S122J
R 967	(B,71,151)	RS1/16S122J
R 968	(B,73,151)	RS1/16S122J
R 969	(B,75,151)	RS1/16S122J
R 970	(B,62,170)	RS1/16S122J
R 971	(B,60,172)	RS1/16S122J

Circuit Symbol and No.		Part No.
R 972	(B,58,172)	RS1/16S122J
R 973	(B,54,19)	RS1/16S821J

CAPACITORS

C 901	(B,42,147)	10 µF	CCG1143
C 902	(B,38,151)		CKSRYB473K50
C 903	(B,41,151)		CKSRYB104K16
C 904	(B,44,151)		CKSRYB104K16
C 905	(B,47,151)		CKSRYB104K16
C 906	(B,47,144)		CCSRCH471J50
C 907	(B,55,143)		CCSRCH102J50
C 908	(B,55,141)		CCSRCH102J50
C 909	(B,69,61)		CKSRYB103K50
C 911	(B,42,25)		CCSRCH102J50
C 912	(B,40,25)		CKSRYB105K10
C 913	(B,41,21)		CCSRCH102J50
C 914	(B,41,20)		CCSRCH102J50

C

Unit Number : CWX3418
Unit Name : CD Core Unit(S10.5SCION)

MISCELLANEOUS

IC 201	(A,36,62)	IC	PE5583A
IC 203	(B,22,35)	IC	NJM2886DL3-33
IC 204	(B,36,66)	IC	MSM56V16160J8T3
IC 301	(A,26,14)	IC	BA5839FP
Q 101	(B,58,88)	Transistor	2SA1577
Q 201	(B,23,65)	Transistor	UN2111
D 101	(A,51,86)	Diode	1SS355
TH201	(A,54,60)	Thermistor	CCX1063
X 201	(A,22,53)	Ceramic Resonator 16.934 MHz	CSS1603
S 901	(A,54,53)	Switch(HOME)	CSN1067
S 903	(B,21,74)	Switch(DSCSNS)	CSN1067
S 904	(B,40,83)	Switch(12EJ)	CSN1068
S 905	(B,26,84)	Switch(8EJ)	CSN1068

RESISTORS

R 101	(B,61,89)	RS1/10SR2R4J
R 102	(B,61,87)	RS1/10SR2R4J
R 103	(B,62,87)	RS1/10SR2R7J
R 104	(B,54,85)	RS1/16SS222J
R 107	(B,45,76)	RS1/16SS105J
R 108	(B,46,75)	RS1/16SS0R0J
R 202	(B,32,81)	RS1/16SS473J
R 203	(A,51,59)	RS1/16S473J
R 204	(A,24,76)	RS1/16SS221J
R 206	(B,28,66)	RS1/16SS104J
R 210	(A,17,35)	RS1/16SS102J
R 214	(B,50,65)	RS1/16SS472J
R 216	(B,49,64)	RS1/16SS472J
R 218	(A,25,71)	RS1/16SS0R0J
R 220	(B,23,69)	RS1/16SS0R0J
R 221	(A,51,64)	RS1/16SS103J
R 222	(A,51,62)	RS1/16SS103J
R 225	(A,51,65)	RS1/16SS103J
R 226	(A,51,66)	RS1/16SS393J
R 227	(B,48,67)	RS1/16SS562J

Circuit Symbol and No.		Part No.
R 228	(B,45,67)	RS1/16SS122J
R 229	(B,47,69)	RS1/16SS472J
R 232	(B,46,67)	RS1/16SS122J
R 233	(B,26,70)	RS1/16SS103J
R 234	(B,32,83)	RS1/16SS473J
R 235	(A,25,80)	RS1/16SS473J
R 238	(B,14,32)	RS1/16SS222J
R 239	(B,21,64)	RS1/16SS473J
R 240	(B,11,39)	RS1/16SS473J
R 241	(B,10,39)	RS1/16SS103J
R 250	(A,28,80)	RS1/16SS104J
R 252	(A,28,78)	RS1/16SS104J
R 253	(A,28,76)	RS1/16SS104J
R 261	(A,28,79)	RS1/16SS104J
R 270	(A,35,46)	RS1/16SS121J
R 307	(A,16,16)	RS1/16SS183J
R 308	(A,14,16)	RS1/16SS183J
R 309	(A,16,14)	RS1/16SS183J
R 310	(A,14,12)	RS1/16SS183J
R 601	(B,40,42)	RS1/16SS101J
R 602	(B,36,34)	RS1/16SS101J
R 603	(B,40,40)	RS1/16SS223J
R 604	(B,33,34)	RS1/16SS223J
R 606	(B,29,37)	RS1/16S0R0J
R 701	(B,19,64)	RS1/16SS221J
R 702	(A,21,71)	RS1/16SS221J
R 704	(B,16,68)	RS1/16SS221J
R 705	(B,19,67)	RS1/16SS221J
R 706	(A,18,67)	RS1/16SS221J
R 710	(B,24,69)	RS1/16SS0R0J
R 712	(B,13,37)	RS1/16SS0R0J
R 716	(B,12,58)	RS1/16S0R0J

CAPACITORS

C 106	(B,58,85)	CKSQYB475K6R3
C 202	(A,28,73)	CKSSYB104K10
C 203	(A,53,60)	CKSSYB103K16
C 204	(A,24,80)	CKSSYB103K16
C 205	(B,23,58)	CKSQYB475K6R3
C 206	(A,22,56)	CKSSYB104K10
C 207	(A,25,52)	CKSRYB104K16
C 209	(B,35,49)	CEVW220M6R3
C 210	(B,30,51)	CKSSYB104K10
C 211	(A,28,50)	CKSSYB104K10
C 212	(A,27,45)	CKSRYB104K16
C 213	(A,45,53)	CKSSYB104K10
C 214	(A,29,48)	CKSSYB104K10
C 216	(A,51,68)	CKSSYB332K50
C 217	(A,48,67)	CKSSYB104K10
C 218	(A,50,68)	CKSSYB473K10
C 219	(A,47,69)	CKSSYB104K10
C 220	(A,48,69)	CKSSYB182K50
C 221	(A,46,69)	CKSSYB104K10
C 222	(B,46,69)	CCSSCH560J50
C 223	(B,48,69)	CCSSCH4R0C50
C 224	(A,45,71)	CKSSYB104K10
C 226	(A,42,74)	CCSSCH680J50
C 227	(A,42,76)	CCSSCH470J50
C 228	(A,41,78)	CKSSYB103K16

Circuit Symbol and No.		Part No.
C 229	(B,50,75)	CKSSYB104K10
C 232	(B,17,40)	CKSRYB105K10
C 236	(A,44,77)	CKSSYB104K10
C 239	(B,47,67)	CCSSCH220J50
C 240	(A,37,77)	CKSSYB104K10
C 250	(A,52,64)	CKSSYB102K50
C 251	(A,52,62)	CKSSYB102K50
C 270	(B,33,53)	CKSSYB104K10
C 271	(B,29,59)	CKSSYB104K10
C 272	(B,29,64)	CKSSYB104K10
C 273	(B,33,78)	CKSSYB104K10
C 274	(B,44,64)	CKSSYB104K10
C 275	(B,44,60)	CKSSYB104K10
C 303	(A,15,16)	CKSSYB472K25
C 304	(A,14,13)	CKSSYB223K16
C 307	(B,32,13)	CKSRYB104K16
C 308	(B,11,34)	CKSRYB105K10
C 601	(B,40,41)	CKSSYB102K50
C 602	(B,34,34)	CKSSYB102K50
C 603	(B,35,44)	CEVW4R7M25
C 604	(B,35,39)	CEVW4R7M25
C 703	(B,11,45)	CCSSCH101J50
C 704	(B,10,55)	CKSSYB102K50

D

Unit Number : YWM5157
Unit Name : Sub Unit

MISCELLANEOUS

IC 2001	(A,25,33)	IC	TC7SET08FUS1
IC 2002	(A,20,35)	IC	TC7SH08FUS1
IC 2003	(A,47,32)	IC	BA3121F
Q 2001	(A,29,35)	Transistor	DTC124TU
Q 2002	(A,21,28)	Transistor	2SC4081
Q 2003	(A,25,24)	Transistor	DTA114EUA
D 2004	(A,10,52)	Diode	RR264M-400
D 2005	(A,16,27)	Diode	HZU3R9(B1)
D 2006	(A,25,18)	Diode	1SS355
D 2007	(A,22,22)	Diode	1SS355
D 2008	(A,55,46)	Diode	1SS355

RESISTORS

R 2001	(A,29,31)	RS1/16S472J
R 2003	(A,22,59)	RS1/10S102J
R 2004	(A,28,44)	RS1/10S102J
R 2005	(A,27,29)	RS1/16S102J
R 2006	(A,18,35)	RS1/16S102J
R 2007	(A,27,40)	RS1/16S102J
R 2008	(A,19,25)	RS1/16S471J
R 2009	(A,31,46)	RS1/16S514J
R 2011	(A,31,42)	RS1/16S393J
R 2012	(A,41,48)	RS1/16S102J
R 2013	(A,48,49)	RS1/16S102J
R 2014	(A,39,48)	RS1/16S473J
R 2015	(A,50,49)	RS1/16S473J
R 2016	(A,50,16)	RS1/16S102J
R 2017	(A,33,22)	RS1/16S102J
R 2018	(A,48,16)	RS1/16S473J
R 2019	(A,40,18)	RS1/16S473J
R 2020	(A,59,43)	RS1/10S102J
R 2021	(A,29,24)	RS1/16S184J
R 2022	(A,29,27)	RS1/16S274J

CAPACITORS

C 2001	(A,57,60)	CKSQYB102K50
C 2002	(A,39,51)	CKSQYB102K50
C 2003	(A,55,53)	CKSQYB102K50
C 2004	(A,22,56)	CKSQYB102K50
C 2005	(A,27,31)	CKSRYB103K50
C 2006	(A,14,32)	CEVW470M6R3
C 2007	(A,13,36)	CKSRYB103K50
C 2008	(A,16,25)	CKSRYB103K50
C 2009	(A,40,42)	CEVW100M25
C 2010	(A,49,43)	CEVW100M25
C 2011	(A,37,48)	CKSRYB102K50
C 2012	(A,53,48)	CKSRYB102K50
C 2013	(A,35,40)	CKSQYB103K50
C 2014	(A,55,36)	CEVW100M25
C 2015	(A,36,35)	CEVW100M25
C 2016	(A,42,24)	CEVW220M16
C 2018	(A,40,20)	CKSRYB103K50
C 2019	(A,54,20)	CEVW100M25
C 2020	(A,34,27)	CEVW100M25
C 2021	(A,18,59)	CKSQYB102K50
C 2022	(A,21,50)	CKSQYB221K50
C 2023	(A,18,56)	CKSQYB221K50
C 2024	(A,15,57)	CKSQYB102K50
C 2025	(A,21,52)	CKSQYB102K50
C 2026	(A,12,22)	CKSQYB103K50
C 2027	(A,18,23)	CKSRYB104K50
C 2028	(A,10,50)	CCSRCH101J50
C 2031	(A,57,43)	CKSQYB102K50
C 2033	(A,55,50)	CKSQYB102K50
C 2035	(A,39,17)	CCSRCH101J50
C 2036	(A,31,16)	CCSRCH101J50
C 2037	(A,19,13)	CCSRCH101J50

MISCELLANEOUS

	Pickup Unit(P10.5)(Service)	CXX1942
M 1	Motor Unit(SPINDLE)	CXC7134
M 2	Motor Unit(LOADING/CARRIAGE)	CXC4026