
■ EXPLODED VIEW • PARTS LIST

Main section

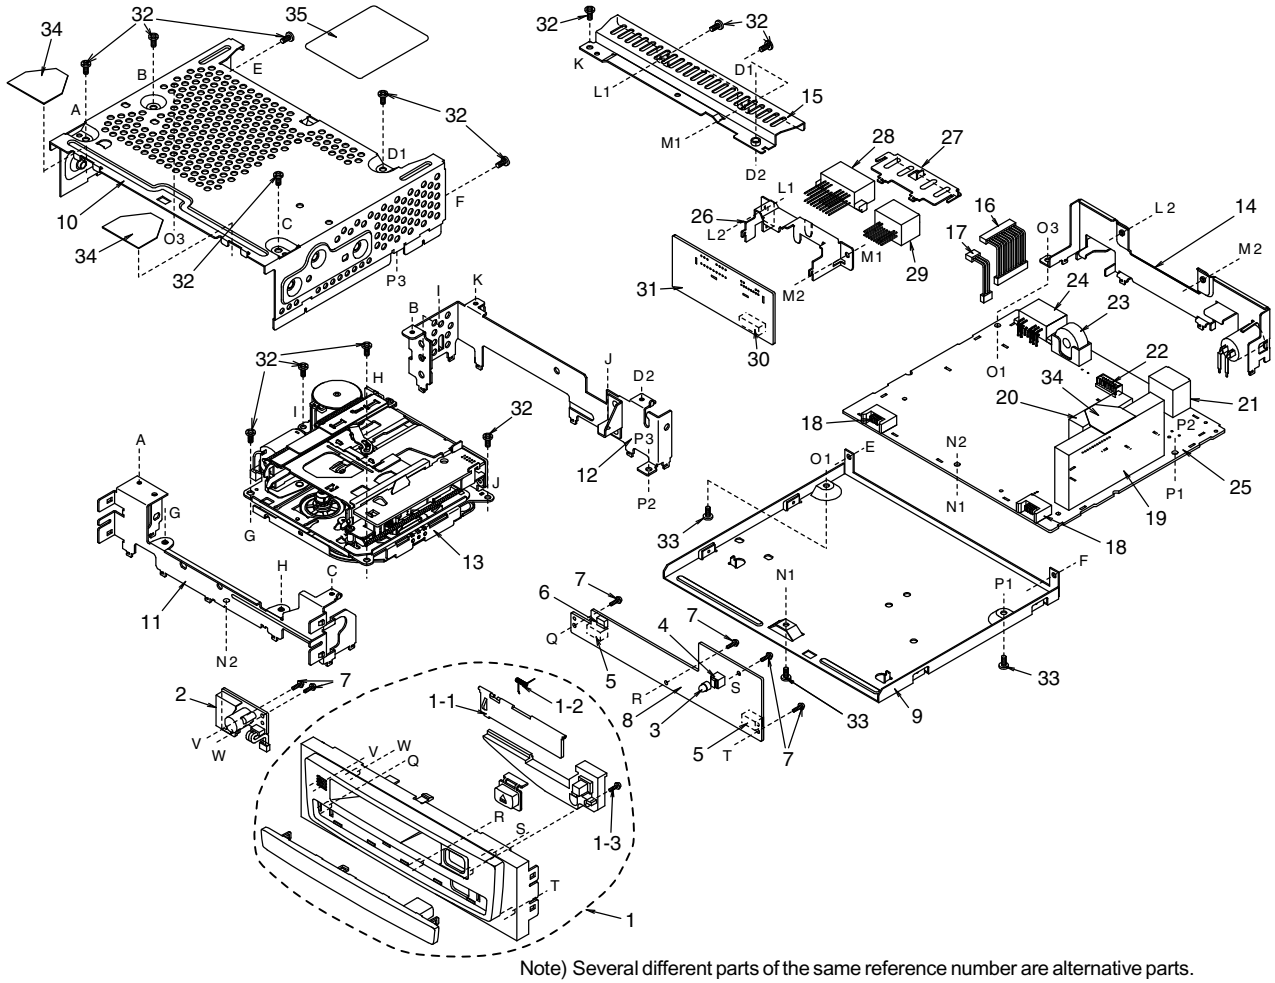


Note) Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.
Some parts depend on each model. The model name is specified in the description.

NO.	PART NO.	DESCRIPTION	Q'TY
1	940-7944-12 940-7944-32	ESCUTCHEON ASSY(1702K) ESCUTCHEON ASSY(1709K)	1
1-1	320-0457-45 320-0457-47	DUSTPROOF COVER(1702K) DUSTPROOF COVER(1709K)	1
1-2	750-2626-00	SPRING	1
1-3	716-0778-00	WAVE SCREW(φ2×6)	1
2	948-0602-00	MIC ASSY	1
3	017-0420-31	PILOTLAMP(14V40mA)	1
4	013-3934-02	SWITCH	1
5	074-1151-06	OUTLET SOCKET(6P)	2
6	076-0526-03	PLUG(3P)	1
7	716-0778-00	WAVE SCREW(φ2×6)	6
8	039-1826-00	SWITCH PWB (WITHOUT COMPONENT)	1
9	311-1758-02	LOWER CASE	1
10	310-1663-01	UPPER CASE	1
11	309-0732-01	FRONT PLATE	1
12	331-2471-20	MECHANISM BRACKET	1
13	930-0797-81	TAPE MECHANISM 930-0797-01	1
14	331-3040-00	REAR PLATE	1
15	307-0672-00	REAR COVER	1
16	854-4457-01	EXTENSION LEAD(12P)	1

NO.	PART NO.	DESCRIPTION	Q'TY
17	854-4458-00	EXTENSION LEAD(3P)	1
18	076-0540-06	PLUG(6P)	2
19	880-1728F	TUNER PACK(FM)	1
20	880-1518J	TUNER PACK(AM)	1
21	074-0850-08	OUTLET SOCKET(DIN 8P)	1
22	076-0368-14	PLUG(14P)	1
23	010-8028-00	COIL	1
24	074-1284-00	OUTLET SOCKET	1
25	039-1904-00	MAIN PWB (WITHOUT COMPONENT)	1
26	331-3041-00	OUTLET HOLDER A	1
27	331-3042-00	OUTLET HOLDER B	1
28	074-1268-10	OUTLET SOCKET	1
29	074-1013-30	OUTLET SOCKET	1
30	074-0898-14	OUTLET SOCKET(14P)	1
31	039-1903-00	SUB PWB (WITHOUT COMPONENT)	1
32	714-2606-81	MACHINE SCREW(M2.6×6)	13
33	716-1494-00	IT SCREW(M2.6×6)	3
34	347-6521-00	SHIELD PART	3
35	286-9233-29 286-9607-00	SETPLATE(1702K) SETPLATE(1709K)	1

Tape mechanism section

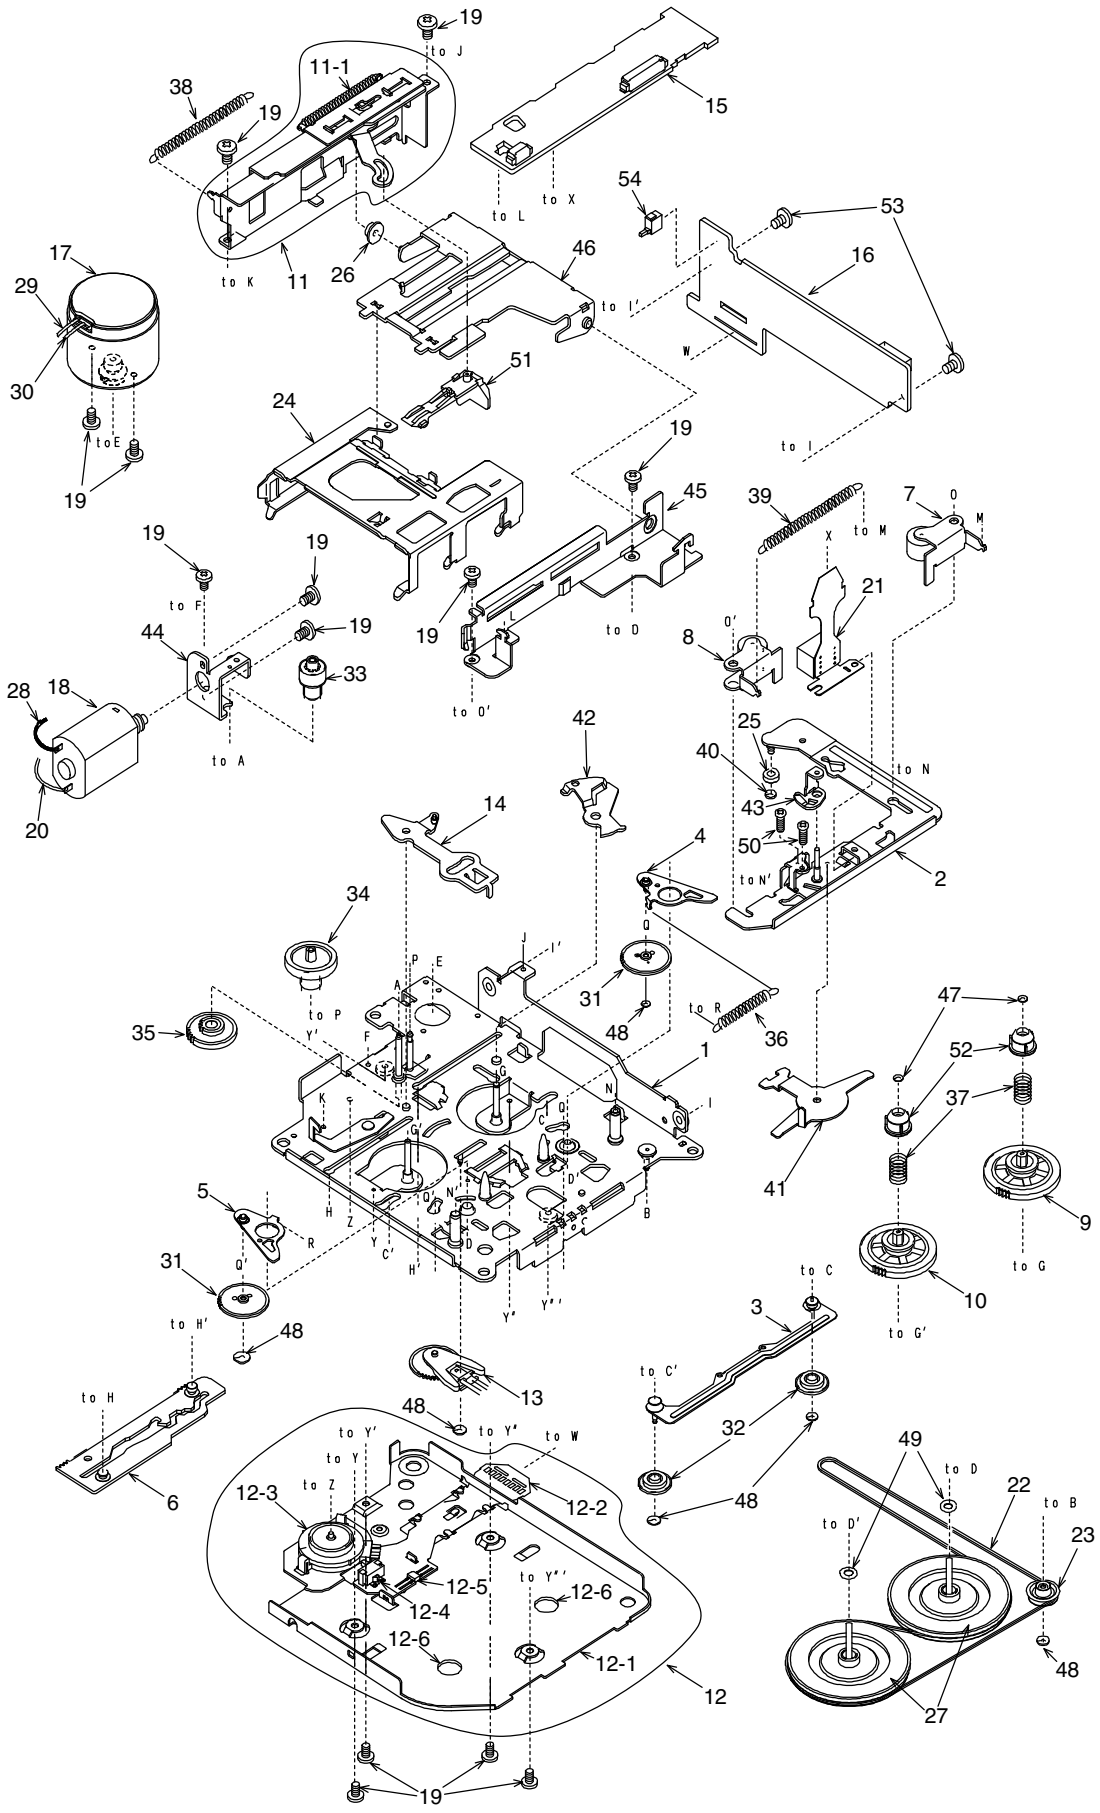

NO.	PART NO.	DESCRIPTION	Q'TY
1	960-4294-22	DECK PLATE ASSY	1
2	960-4261-20	HEAD PLATE ASSY	1
3	960-4262-03	FF/REW-P-ASSY	1
4	960-4263-03	IDLER-P-ASSY F	1
5	960-4264-03	IDLER-P-ASSY R	1
6	960-4266-05	MODE PLATE ASSY	1
7	960-4269-05	ROLLER ASSY F	1
8	960-4270-05	ROLLER ASSY R	1
9	960-4348-03	REEL ASSY F	1
10	960-4349-03	REEL ASSY R	1
11	960-4389-03	EJECT SUB ASSY	1
11-1	750-3020-01	SWITCH PLATE SPRING	1
12	960-4338-09	BOTTOM SUB ASSY	1
12-1	960-4295-02	BOTTOM-P-ASSY	1
12-2	099-9926-01	FLEXIBLE PWB (WITHOUT COMPONENT)	1
12-3	013-3951-32	SWITCH(MODE)	1
12-4	013-3953-01	SWITCH(METAL)	1
12-5	051-1776-00	IC	1
12-6	746-0767-00	WASHER	2
13	960-4282-06	DETECT SUB ASSY	1
14	960-4301-02	PLAY LINK ASSY	1
15	039-1365-00	SIDE PWB (WITHOUT COMPONENT)	1
16	990-0698-00	REAR PWB ASSY (WITH COMPONENT)	1
17	SMA-178-100	MAIN MOTOR ASSY	1
18	SMA-177-100	POWER MOTOR ASSY	1
19	716-0484-00	SCREW(M2×2.5)	13
20	809-4914-60	WIRE(WHT)	1
21	011-0328-01	HEAD	1
22	602-0118-00	BELT	1
23	604-0046-00	TENSION PULLEY	1

NO.	PART NO.	DESCRIPTION	Q'TY
24	606-0093-06	PACK GUIDE	1
25	610-0342-01	HEAD-P-ROLLER	1
26	610-0343-00	GUIDE-A-ROLLER	1
27	611-0091-02	FLYWHEEL	2
28	806-4914-60	WIRE(BLU)	1
29	802-4911-60	WIRE(RED)	1
30	800-4911-60	WIRE(BLK)	1
31	613-0662-00	IDLER GEAR	2
32	613-0286-03	FF/REW GEAR	2
33	613-0288-01	HELICAL GEAR	1
34	613-0289-01	GEAR A	1
35	613-0337-00	POWER GEAR	1
36	750-3017-02	IDLER-P-SPRING	1
37	750-2949-00	SLIDE SPRING	2
38	750-2947-02	EJECT-P-SPRING	1
39	750-2946-02	PINCH SPRING	1
40	746-0762-00	WASHER	1
41	630-2597-01	CHANGE LINK	1
42	630-2598-05	EJECT LINK	1
43	630-2600-01	ADJUST LINK	1
44	630-2601-02	MOTOR PLATE	1
45	630-2626-06	PWB FRAME	1
46	630-2642-01	GUIDE ARM	1
47	746-0761-00	WASHER	2
48	746-0724-00	WASHER	6
49	746-0624-00	WASHER	2
50	716-0833-10	SCREW(M2×5.6)	2
51	631-1992-02	PACK STOPPER	1
52	631-1993-01	SLIDE BUSH	2
53	716-1676-00	PWB SCREW(M2.6×6)	2
54	013-3906-00	SWITCH(SPPB51)	1

■ELECTRICAL PARTS LIST

Note) Several different parts of the same reference number are alternative parts. One of those parts is used in the set.
Some parts depend on each model. The model name is specified in the description.

Sub PWB section(B1)

REF No.	PART No.	DESCRIPTION
C801	166-5096-00	5pF CH
C803	166-5096-00	5pF CH
C805	166-2201-00	22pF CH
C806	166-2201-00	22pF CH
C807	166-5096-00	5pF CH
C808	166-5096-00	5pF CH
C809	042-0562-17	16V10μF
C810	042-0562-17	16V10μF
C811	042-0562-17	16V10μF
C812	042-0562-17	16V10μF

REF No.	PART No.	DESCRIPTION
C813	168-2222-05	2200pF
IC801	051-3020-90	NJM4565V
J801	074-0898-14	14P
J802	074-1268-10	16P
J803	074-1013-30	OUTLET SOCKET(A12MW)
R801	032-0106-64	1/10W 56kΩ±0.5%
R802	032-0106-64	1/10W 56kΩ±0.5%
R803	032-0106-64	1/10W 56kΩ±0.5%
R804	032-0106-64	1/10W 56kΩ±0.5%

REF No.	PART No.	DESCRIPTION
R805	032-0106-65	1/10W 100kΩ± 0.5%
R806	032-0106-65	1/10W 100kΩ± 0.5%
R807	032-0106-65	1/10W 100kΩ± 0.5%
R808	032-0106-65	1/10W 100kΩ± 0.5%
R809	119-3011-15	1/16W 300Ω
R810	119-3011-15	1/16W 300Ω

Main PWB section(B2)

REF No.	PART No.	DESCRIPTION
C102	043-0277-01	0.022μF
C103	168-1042-78	16V 0.1μF
C104	183-4763-32	16V47μF
C105	168-5632-78	16V 0.056μF
C106	168-5632-78	16V 0.056μF
C107	183-4763-32	16V47μF
C108	183-3363-22	10V33μF
C109	168-1042-78	16V 0.1μF
C111	168-3322-05	3300pF

REF No.	PART No.	DESCRIPTION
C112	166-1011-00	100pF CH
C201	166-1511-00	150pF CH
C202	166-1007-00	10pF CH
C203	183-4763-32	16V47μF
C204	168-1042-78	16V 0.1μF
C226	168-4732-78	0.047μF
C227	168-1042-78	16V 0.1μF
C229	168-8232-78	0.082μF
C301	168-1042-78	16V 0.1μF

REF No.	PART No.	DESCRIPTION
C302	178-1542-78	0.15μF
C303	178-1542-78	0.15μF
C401	183-2263-32	16V22μF
C402	043-0277-01	0.022μF
C403	042-0458-00	50V1μF
C404	166-1801-00	18pF CH
C405	168-1022-05	1000pF
C406	166-1801-00	18pF CH
C407	166-1011-00	100pF CH

REF No.	PART No.	DESCRIPTION
C408	168-1022-05	1000pF
C409	166-1011-00	100pF CH
C410	166-1011-00	100pF CH
C411	168-2232-05	0.022μF
C412	166-1011-00	100pF CH
C413	183-4763-12	6.3V47μF
C414	166-1501-00	15pF CH
C415	166-1801-00	18pF CH
C501	183-4763-12	6.3V47μF(1702K)
C502	168-1042-78	16V 0.1μF(1702K)
C503	168-5612-05	560pF(1702K)
C504	168-1022-05	1000pF(1702K)
C506	166-4701-00	47pF CH(1702K)
C507	168-3312-05	330pF(1702K)
C508	166-8201-50	82pF CH(1702K)
C509	183-2253-62	50V2.2μF(1702K)
C510	168-1042-78	16V 0.1μF(1702K)
C601	168-1022-05	1000pF
C602	168-2232-05	0.022μF
C603	168-1022-05	1000pF
C604	168-1022-05	1000pF
C605	168-1022-05	1000pF
C606	168-1042-78	16V 0.1μF
C607	168-1042-78	16V 0.1μF
C608	168-1022-05	1000pF
C609	168-1022-05	1000pF
C610	168-1042-78	16V 0.1μF
C611	168-1022-05	1000pF
C612	168-1022-05	1000pF
C613	166-2201-00	22pF CH
C614	168-1042-78	16V 0.1μF
C615	183-1073-12	6.3V100μF
C616	168-1022-05	1000pF
C617	166-1511-00	150pF CH
C618	166-1801-00	18pF CH
C619	168-1022-05	1000pF
C620	183-1053-62	50V1μF
C621	166-1511-00	150pF CH
C622	168-1042-78	16V 0.1μF
C623	183-1063-32	16V10μF
C624	168-1022-05	1000pF
C626	168-1022-05	1000pF
C627	168-4712-05	470pF
C631	168-4712-05	470pF
C632	168-4712-05	470pF
C701	166-5096-00	5pF CH
C702	166-2201-00	22pF CH
C703	166-5096-00	5pF CH
C704	166-2201-00	22pF CH
C705	166-5096-00	5pF CH
C706	166-5096-00	5pF CH
C709	042-0562-17	16V10μF
C710	042-0562-17	16V10μF
C711	042-0562-17	16V10μF
C712	042-0562-17	16V10μF
C713	042-0562-20	16V47μF
C714	042-0562-20	16V47μF
C715	042-0548-02	10V220μF
C716	042-0548-03	16V100μF
C717	168-1042-78	16V 0.1μF
C718	166-2201-00	22pF CH
C719	166-2201-00	22pF CH
C720	042-0548-03	16V100μF
C721	042-0562-20	16V47μF
C722	042-0562-20	16V47μF
C723	042-0562-17	16V10μF
C724	042-0562-17	16V10μF
C725	183-1053-62	50V1μF
C727	042-0563-15	10V220μF
C728	166-5601-00	56pF CH
C729	166-2201-00	22pF CH
C731	183-4753-52	35V4.7μF
C732	166-2201-00	22pF CH
C733	166-5601-00	56pF CH

REF No.	PART No.	DESCRIPTION
C734	042-0562-20	16V47μF
C735	166-5601-00	56pF CH
C736	166-2201-00	22pF CH
C737	166-2201-00	22pF CH
C738	166-5601-00	56pF CH
C739	168-2222-05	2200pF
C740	168-2222-05	2200pF
C741	168-2222-05	2200pF
C742	168-2222-05	2200pF
C743	042-0563-15	10V220μF
C744	042-0563-15	10V220μF
C745	042-0563-15	10V220μF
C746	042-0563-15	10V220μF
C747	168-2222-05	2200pF
C748	172-1041-11	0.1μF
C749	042-0551-02	16V1000μF
C750	183-1063-32	16V10μF
C751	183-1053-62	50V1μF
C752	172-1041-11	0.1μF
C753	172-1041-11	0.1μF
C754	168-1022-05	1000pF
C755	168-1042-78	16V 0.1μF(1702K)
C757	042-0562-36	50V1μF
C758	042-0562-36	50V1μF
C759	168-1022-05	1000pF
C760	168-2222-05	2200pF
C762	168-2222-05	2200pF
D601	001-0421-38	MTZJ36
D602	001-0528-44	MA8082-M
D603	001-0589-00	1SS145
D604	001-0589-00	1SS145
D606	001-0528-36	MA8062-H
D607	001-0528-36	MA8062-H
D701	001-0528-48	MA8091-H
D702	001-0356-00	1SS184
D705	001-0626-00	1A2
D706	001-0516-00	MA111
D707	001-2015-00	RL253
D708	001-0626-00	1A2
D709	001-0503-31	HZS6 A2L
D710	001-0330-00	1SS119
D711	001-0330-00	1SS119
FIL601	060-3113-93	22μH
FIL602	060-3113-93	22μH
IC401	051-6201-00	LC72146M
IC501	051-1819-00	SAA6579T(1702K)
IC601	051-7201-28	TC7W00FK
IC602	051-7203-48	SN74LV74APW
IC603	052-3160-01	MB90583CPFV-G-117
IC604	051-0869-55	NJM2103M
IC605	051-6604-18	MSM6636BGS-AKR1
IC701	051-3020-90	NJM4565V
IC702	051-7704-08	LC7821M-TLM
IC703	051-3020-90	NJM4565V
IC704	051-3020-90	NJM4565V
IC705	051-1407-00	NJM4556AL
IC707	051-1292-00	NJM4565M-D
IC708	051-1407-00	NJM4556AL
J702	074-1284-00	12P
J703	074-0850-08	8P
L101	010-2230-76	22μH
L102	010-2230-76	22μH
L103	010-2230-64	2.2μH
L201	010-2003-04	COIL
L202	010-2230-76	22μH
L401	010-2230-88	220μH
L501	010-2230-88	220μH(1702K)
L602	010-2230-76	22μH
L701	010-8028-00	520μH
P403	076-0368-14	14P
P701	076-0540-06	6P
P702	076-0540-06	6P

REF No.	PART No.	DESCRIPTION
Q101	125-9003-02	IMD3
Q102	125-2005-01	UN2211
Q103	125-2005-01	UN2211
Q104	100-1298-00	2SA1298
Q105	125-2005-01	UN2211
Q106	100-1298-00	2SA1298
Q401	102-2712-51	2SC2712G,L
Q402	102-2712-51	2SC2712G,L
Q501	102-2712-00	2SC2712(1702K)
Q601	125-2005-01	UN2211
Q602	102-2712-00	2SC2712
Q603	125-2005-01	UN2211
Q604	125-0001-01	UN2111
Q605	125-9006-00	IMX1
Q606	102-2712-00	2SC2712
Q607	125-0006-00	UN2110(1702K)
Q608	125-2005-01	UN2211(1702K)
Q609	190-1052-03	2SA1052-C-TL
Q610	192-2462-03	2SC2462-C-TL
Q701	125-2005-01	UN2211
Q702	103-2118-00	2SD2118
Q703	103-1858-00	2SD1858
Q704	125-9003-02	IMD3
Q705	102-2712-00	2SC2712
Q706	125-2005-01	UN2211
Q707	100-1048-00	2SA1048
Q708	125-0001-01	UN2111
Q709	101-0709-00	2SB709A-Q.R.S
Q710	101-0709-00	2SB709A-Q.R.S
Q711	103-1858-00	2SD1858
Q714	101-0709-00	2SB709A-Q.R.S
Q715	125-2005-01	UN2211
Q716	100-1359-00	2SA1359
Q717	125-2005-01	UN2211
Q718	125-9003-02	IMD3
Q719	125-9003-02	IMD3
R101	119-2221-10	1/16W 2.2kΩ
R102	119-4731-10	1/16W 47kΩ
R103	119-3321-10	1/16W 3.3kΩ
R105	119-1021-10	1/16W 1kΩ
R106	119-1021-10	1/16W 1kΩ
R107	119-2221-10	1/16W 2.2kΩ
R108	119-2221-10	1/16W 2.2kΩ
R109	119-1031-10	1/16W 10kΩ
R110	119-1031-10	1/16W 10kΩ
R111	119-2221-10	1/16W 2.2kΩ
R112	119-1041-10	1/16W 100kΩ
R113	119-3311-10	1/16W 330Ω
R201	119-1031-10	1/16W 10kΩ
R210	119-2221-10	1/16W 2.2kΩ
R211	119-2221-10	1/16W 2.2kΩ
R401	119-2221-10	1/16W 2.2kΩ
R402	119-4721-10	1/16W 4.7kΩ
R403	119-2721-10	1/16W 2.7kΩ
R404	119-2221-10	1/16W 2.2kΩ
R406	119-3321-10	1/16W 3.3kΩ
R407	119-3321-10	1/16W 3.3kΩ
R408	119-4731-10	1/16W 47kΩ
R409	119-1031-10	1/16W 10kΩ
R501	119-2221-10	1/16W 2.2kΩ (1702K)
R502	119-1021-10	1/16W 1kΩ(1702K)
R503	119-1021-10	1/16W 1kΩ(1702K)
R505	119-1031-10	1/16W 10kΩ(1702K)
R506	119-1031-10	1/16W 10kΩ(1702K)
R601	119-4721-10	1/16W 4.7kΩ
R602	119-5621-10	1/16W 5.6kΩ
R603	119-5621-10	1/16W 5.6kΩ
R604	119-2231-10	1/16W 22kΩ
R605	119-5631-10	1/16W 56kΩ
R606	119-5631-10	1/16W 56kΩ
R607	119-4731-10	1/16W 47kΩ
R608	119-1031-10	1/16W 10kΩ
R609	119-1031-10	1/16W 10kΩ

REF No.	PART No.	DESCRIPTION
R610	119-1021-10	1/16W 1kΩ
R611	119-4721-10	1/16W 4.7kΩ
R612	119-5631-10	1/16W 56kΩ
R613	119-1031-10	1/16W 10kΩ
R614	119-1031-10	1/16W 10kΩ
R615	119-1031-10	1/16W 10kΩ
R616	119-1031-10	1/16W 10kΩ
R617	119-1031-10	1/16W 10kΩ
R618	119-4731-10	1/16W 47kΩ
R619	119-6821-15	1/16W 6.8kΩ (1702K)
R620	119-4731-10	1/16W 47kΩ
R621	119-4731-10	1/16W 47kΩ
R622	050-0140-54	1/32W 1kΩ×4J
R623	119-4731-10	1/16W 47kΩ
R626	050-0140-54	1/32W 1kΩ×4J
R630	050-0140-54	1/32W 1kΩ×4J
R633	119-3301-10	1/16W 33Ω
R634	119-4731-10	1/16W 47kΩ
R635	050-0140-54	1/32W 1kΩ×4J
R636	050-0140-54	1/32W 1kΩ×4J
R637	119-4721-10	1/16W 4.7kΩ
R644	050-0140-54	1/32W 1kΩ×4J
R649	050-0140-54	1/32W 1kΩ×4J
R650	119-1021-10	1/16W 1kΩ
R651	050-0140-59	1/32W 33Ω×4J
R655	050-0140-54	1/32W 1kΩ×4J
R660	119-3301-10	1/16W 33Ω
R661	119-1021-10	1/16W 1kΩ
R663	119-4731-10	1/16W 47kΩ
R664	119-4731-10	1/16W 47kΩ
R666	050-0140-54	1/32W 1kΩ×4J
R668	119-4731-10	1/16W 47kΩ
R670	119-4731-10	1/16W 47kΩ(1709K)
R671	119-4731-10	1/16W 47kΩ(1702K)
R673	050-0140-59	1/32W 33Ω×4J
R678	119-1041-10	1/16W 100kΩ
R680	050-0140-59	1/32W 33Ω×4J
R681	119-1041-10	1/16W 100kΩ
R683	119-2231-10	1/16W 22kΩ
R684	119-1001-10	1/16W 10Ω
R685	119-1031-10	1/16W 10kΩ
R686	111-3321-91	1/4WS 3.3kΩ
R687	032-0092-90	1/10W 10kΩ±1%
R688	111-3321-91	1/4WS 3.3kΩ
R689	119-1031-10	1/16W 10kΩ
R690	032-0092-01	1/10W 33kΩ±1%
R691	032-0092-28	1/10W 62kΩ±1%
R692	111-1001-91	1/4WS 10Ω
R693	111-1001-91	1/4WS 10Ω
R694	032-0092-79	1/10W 5.6kΩ±1%

REF No.	PART No.	DESCRIPTION
R695	119-2231-10	1/16W 22kΩ
R696	119-1001-10	1/16W 10Ω
R697	119-1041-10	1/16W 100kΩ
R701	032-0106-64	1/10W 56kΩ±0.5%
R702	032-0106-64	1/10W 56kΩ±0.5%
R703	032-0106-64	1/10W 56kΩ±0.5%
R704	032-0106-64	1/10W 56kΩ±0.5%
R705	119-3931-10	1/16W 39kΩ
R706	119-1831-10	1/16W 18kΩ
R707	119-1241-10	1/16W 120kΩ
R708	119-1241-10	1/16W 120kΩ
R709	119-1241-10	1/16W 120kΩ
R710	119-1241-10	1/16W 120kΩ
R711	119-1831-10	1/16W 18kΩ
R712	119-3931-10	1/16W 39kΩ
R713	032-0106-65	1/10W 100kΩ± 0.5%
R714	032-0106-65	1/10W 100kΩ± 0.5%
R715	032-0106-65	1/10W 100kΩ± 0.5%
R716	032-0106-65	1/10W 100kΩ± 0.5%
R717	119-3011-15	1/16W 300Ω
R718	119-3011-15	1/16W 300Ω
R721	119-1041-10	1/16W 100kΩ
R722	119-1041-10	1/16W 100kΩ
R725	119-1041-10	1/16W 100kΩ
R726	119-1041-10	1/16W 100kΩ
R727	119-1041-10	1/16W 100kΩ
R728	119-1041-10	1/16W 100kΩ
R729	119-4731-10	1/16W 47kΩ
R730	119-4731-10	1/16W 47k
R731	119-1041-10	1/16W 100kΩ
R732	119-1041-10	1/16W 100kΩ
R733	119-2231-10	1/16W 22kΩ
R736	119-8231-10	1/16W 82kΩ
R737	119-8231-10	1/16W 82kΩ
R738	111-3311-91	1/4WS 330Ω
R739	119-1031-10	1/16W 10kΩ
R740	119-4721-10	1/16W 4.7kΩ
R741	111-3301-91	1/4WS 33Ω
R742	119-5621-10	1/16W 5.6kΩ
R743	119-5621-10	1/16W 5.6kΩ
R744	119-1031-10	1/16W 10kΩ
R745	119-3321-10	1/16W 3.3kΩ
R746	119-4731-10	1/16W 47kΩ
R747	119-1031-10	1/16W 10kΩ
R748	119-4731-10	1/16W 47kΩ
R749	119-3331-10	1/16W 33kΩ
R750	119-1021-10	1/16W 1kΩ

REF No.	PART No.	DESCRIPTION
R751	119-1021-10	1/16W 1kΩ
R752	119-3331-10	1/16W 33kΩ
R753	119-1001-10	1/16W 10Ω
R754	119-2231-10	1/16W 22kΩ
R755	119-2231-10	1/16W 22kΩ
R756	119-1831-10	1/16W 18kΩ
R757	119-1041-10	1/16W 100kΩ
R760	119-2231-10	1/16W 22kΩ
R761	119-1001-10	1/16W 10Ω
R765	119-4731-10	1/16W 47kΩ
R766	119-4731-10	1/16W 47kΩ
R767	119-1001-10	1/16W 10Ω
R768	119-2231-10	1/16W 22kΩ
R769	119-2231-10	1/16W 22kΩ
R770	119-1831-10	1/16W 18kΩ
R771	119-1041-10	1/16W 100kΩ
R772	119-4721-10	1/16W 4.7kΩ
R773	119-2231-10	1/16W 22kΩ
R774	119-1001-10	1/16W 10Ω
R775	111-5691-91	1/4WS 5.6Ω
R776	111-5691-91	1/4WS 5.6Ω
R777	111-1221-91	1/4WS 1.2kΩ
R778	111-1221-91	1/4WS 1.2kΩ
R779	111-4721-91	1/4WS 4.7kΩ
R780	111-1531-91	1/4WS 15kΩ
R781	111-6801-91	1/4WS 68Ω
R782	119-1031-10	1/16W 10kΩ(1702K)
R783	111-1531-91	1/4WS 15kΩ
R784	119-4731-10	1/16W 47kΩ
R785	111-8211-91	1/4WS 820Ω
R786	111-8211-91	1/4WS 820Ω
R787	111-8211-91	1/4WS 820Ω
R788	111-8211-91	1/4WS 820Ω
R789	119-0000-00	1/16W 0Ω JW(1709K)
R790	119-5621-10	1/16W 5.6kΩ
R791	119-5621-10	1/16W 5.6kΩ
R792	111-1021-91	1/4WS 1kΩ
R793	119-0000-00	1/16W 0Ω JW(1702K)
SUP101	060-0122-20	DSP-141N-S00B
SUP102	060-0122-20	DSP-141N-S00B
VR101	012-5203-59	47kΩ
VR102	012-5203-56	10kΩ
VR103	012-5203-59	47kΩ
X401	061-1066-00	7.2MHz
X501	061-3013-00	4.33MHz(1702K)
X601	060-1025-90	8.0MHz
X602	060-1506-50	CSTCC4.00MG0H6
X603	061-3506-90	10MHz

Switch PWB section(B3)

REF No.	PART No.	DESCRIPTION
J901	074-1151-06	6P
J902	074-1151-06	6P

REF No.	PART No.	DESCRIPTION
P901	076-0526-03	3P
PL901	017-0420-31	14V 40mA

REF No.	PART No.	DESCRIPTION
S901	013-3934-02	

Side PWB section(B4) : Tape mechanism

REF No.	PART No.	DESCRIPTION
C1	166-3311-09	330pF
C2	166-3311-09	330pF
C3	178-1232-78	0.012μF
C4	176-3311-59	330pF
C5	178-1232-78	0.012μF
C6	176-3311-59	330pF
C7	178-4732-78	0.047μF
C8	178-4732-78	0.047μF
C9	163-1053-60	50V1μF
C10	166-5611-09	560pF
C11	166-5611-09	560pF
C12	178-1042-78	0.1μF
C13	163-1073-31	16V100μF

REF No.	PART No.	DESCRIPTION
C14	178-1042-78	0.1μF
C15	178-1042-78	0.1μF
C16	163-1063-30	16V10μF
C17	168-4722-05	4700pF
C18	168-1032-05	0.01μF
C19	163-2253-60	50V2.2μF
C20	178-1042-78	0.1μF
C21	163-2263-30	16V22μF
C22	178-1032-78	0.01μF
C23	163-1063-30	16V10μF
C24	163-3363-21	10V33μF
C25	178-1042-78	0.1μF
CN2	074-1225-14	14P

REF No.	PART No.	DESCRIPTION
CN3	076-0478-53	3P
CN4	076-0478-12	12P
D1	001-0528-43	MA8082-L
D2	001-0419-25	MA3100
D3	001-0419-24	MA3091
D4	001-0517-00	1SS355
IC1	051-1919-00	HA12166F
IC2	051-1014-05	TA7291F
IC3	052-4010-00	μPD75006GB-748-3B4
L1	010-2174-28	220μH
Q1	100-1213-00	2SA1213
Q2	125-2027-05	DTC143ZU

REF No.	PART No.	DESCRIPTION
Q3	192-3072-00	2SC3072(B)-A,B,C
Q4	102-2859-15	2SC2859O
Q5	125-2027-01	DTC114EU
Q6	125-0021-91	DTA114EU
Q7	190-1242-00	2SA1242O,Y
Q8	125-2027-05	DTC143ZU
R1	119-1241-10	1/16W 120kΩ
R2	119-1241-10	1/16W 120kΩ
R3	117-1811-10	1/10W 180Ω
R4	117-1131-10	1/10W 11kΩ
R5	117-1031-10	1/10W 10kΩ
R6	117-1241-10	1/10W 120kΩ
R7	119-3341-10	1/16W 330kΩ
R8	117-1811-10	1/10W 180Ω
R9	119-1131-15	1/16W 11kΩ
R10	032-0104-03	1/4W 1kΩ
R11	119-1531-10	1/16W 15kΩ
R12	032-0104-67	1/4W 1.2kΩ
R13	032-0104-67	1/4W 1.2kΩ
R14	117-1241-10	1/10W 120kΩ

REF No.	PART No.	DESCRIPTION
R15	119-3341-10	1/16W 330kΩ
R16	119-1531-10	1/16W 15kΩ
R17	117-0000-00	1/10W 0Ω JW
R18	117-1031-10	1/10W 10kΩ
R19	116-1031-10	1/8W 10kΩ
R20	117-1031-10	1/10W 10kΩ
R21	117-1031-10	1/10W 10kΩ
R22	032-0092-23	1/10W 18kΩ±1%
R23	119-1831-10	1/16W 18kΩ
R24	117-2231-10	1/10W 22kΩ
R25	117-3331-10	1/10W 33kΩ
R26	117-4731-10	1/10W 47kΩ
R27	032-0104-55	1/4W 10Ω
R28	032-0104-55	1/4W 10Ω
R29	032-0104-55	1/4W 10Ω
R30	032-0104-55	1/4W 10Ω
R31	032-0104-76	1/4W 620Ω
R32	119-2231-10	1/16W 22kΩ
R33	117-2231-10	1/10W 22kΩ
R34	119-2231-10	1/16W 22kΩ

REF No.	PART No.	DESCRIPTION
R35	119-2231-10	1/16W 22kΩ
R36	119-1841-10	1/16W 180kΩ
R37	117-1241-10	1/10W 120kΩ
R38	032-0104-72	1/4W 33Ω
R39	117-5611-10	1/10W 560Ω
R40	117-4731-10	1/10W 47kΩ
R41	116-4711-10	1/8W 470Ω
R42	119-2211-10	1/16W 220Ω
R43	119-1021-10	1/16W 1kΩ
R44	119-1051-10	1/16W 1MΩ
R45	032-0104-75	1/4W 4.7Ω
R46	032-0104-75	1/4W 4.7Ω
R47	032-0104-69	1/4W 1.5kΩ
R48	117-1031-10	1/10W 10kΩ
R49	117-1031-10	1/10W 10kΩ
VR1	012-5123-06	10kΩ
VR2	012-5123-06	10kΩ
X1	060-0322-00	4.0MHz

Bottom PWB section(B5) : Tape mechanism

REF No.	PART No.	DESCRIPTION
IC2	051-1776-00	NJL5801K

REF No.	PART No.	DESCRIPTION
SW2	013-3953-01	CRO2

REF No.	PART No.	DESCRIPTION
SW3	013-3951-11	MODE

Rear PWB section(B6) : Tape mechanism

REF No.	PART No.	DESCRIPTION
SW1	013-3906-00	TAPE-DETECT