Pioneer sound.vision.soul

Service Manual

ORDER NO.
CRT3090

DVD NAVIGATION UNIT

AVIC-80DVD UC

DVD ROM™ COMPACT disc DIGITAL AUDIO

● **This service manual should be used together with the manual(s) listed below.**
For the parts numbers, adjustments, etc. which are not shown in this manual, refer to the following manual(s).

Model No.	Order No.	Mech. Module	Remarks
AVIC-90DVD/UC	CRT2890		
CX-954	CRT2670	MS2	DVD Mech. Module:Circuit Description, Mech.Description, Disassembly

PIONEER CORPORATION 4-1, Meguro 1-Chome, Meguro-ku, Tokyo 153-8654, Japan
PIONEER ELECTRONICS (USA) INC. P.O.Box 1760, Long Beach, CA 90801-1760 U.S.A.
PIONEER EUROPE NV Haven 1087 Keetberglaan 1, 9120 Melsele, Belgium
PIONEER ELECTRONICS ASIACENTRE PTE.LTD. 253 Alexandra Road, #04-01, Singapore 159936

© PIONEER CORPORATION 2003

K-ZZY. APR. 2003 Printed in Japan


EXPLODED VIEWS AND PARTS LIST

PACKING(Page 6)

● PACKING SECTION PARTS LIST

* : Non spare part


Mark No.	Symbol and Description	Part No. AVIC-90DVD/UC	Part No. AVIC-80DVD/UC
	1-1 Owner's Manual	CRB1798	CRB1871
	1-2 Owner's Manual/PA/FRE	CRB1783	CRB1872
	1-3 Owner's Manual	CRB1796	CRB1873
	1-4 Owner's Manual/PA/FRE	CRB1797	CRB1874
	1-5 Installation Manual	CRD3650	CRD3801
	1-6 Owner's Manual	CRD3661	CRD3802
	1-10 Owner's Manual	Not used	CRB1869
	1-11 Owner's Manual/PA/ENG	Not used	CRB1870
	8 Accessory Assy	CEA2536	Not used
	9 Polyethylene Bag	CEG1011	Not used
	10 Battery	CEX1021	Not used
	11 Connector	CKX1049	Not used
	12 Sheet	CNM6370	Not used
	13 Holder	CNS5606	Not used
	23 Carton	CHG4738	CHG5106
	25 Contain Box	CHL4738	CHL5106
	31 Remote Control Assy	CXB9118	Not used
	34 DVD-ROM	CPJ1143	CPJ1152
	38 Remote Control Assy	Not used	CXC2027
	39 Screw Assy	Not used	CZE3169
*	40 Polyethylene Bag	Not used	CEG-127
*	41 Hexagonal Wrench	Not used	CZE3176
*	42 Screw	Not used	RMZ30H060FBK
	43 Belt	Not used	CZN7661
	44 Holder Assy	Not used	CZX3172
	45 Holder Assy	Not used	CZX3173
	46 Remote Control Unit	Not used	CZX3263
*	47 Battery	Not used	CEX1030

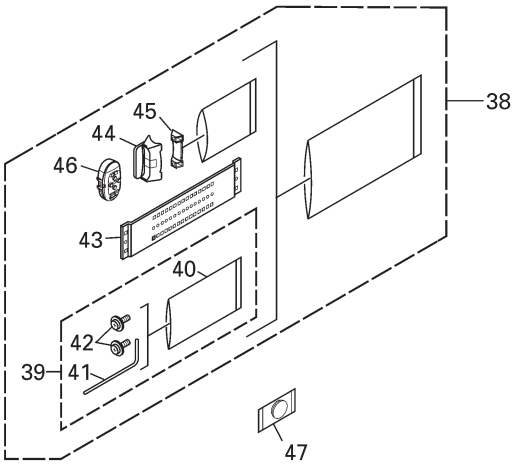

EXTERIOR(Page 12)

● EXTERIOR SECTION PARTS LIST


Mark No.	Symbol and Description	Part No. AVIC-90DVD/UC	Part No. AVIC-80DVD/UC
1	Screw	BMZ20P025FMC	BMZ20P025FTC
2	Screw	BMZ26P040FMC	BMZ26P040FTC
23	CC Unit	CWM8391	CWM9059
36	Screw	IMS26P030FMC	IMS26P030FTC
37	Main Unit	CWM8484	CWM9062
73	GPS Unit	CWX2591	CWX2925
79	Screw	BPZ20P050FMC	BPZ20P050FTC
83	Grille Assy	CXB9890	CXC1997(Grille Uint)
90	Door Unit	CXB7566	CXC1996
83	DVD Mechanism Module(MS2)	CXK6160	CXK6121
103	Grille Unit	GXX1229	GXX1227
104	Door Unit	GXX1223	GXX1224

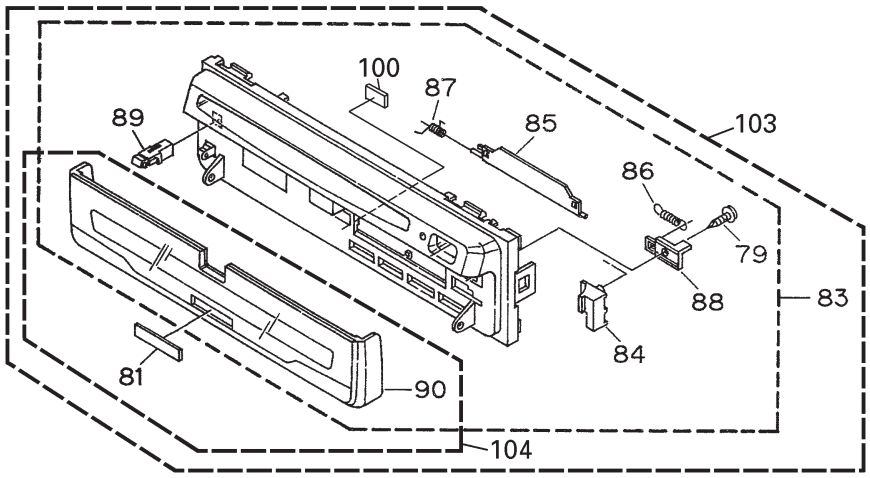

REMOTE CONTROL ASSY(Page 16)

● REMOTE CONTROL ASSY SECTION PARTS LIST


Mark No.	Symbol and Description	Part No. AVIC-90DVD/UC	Part No. AVIC-80DVD/UC
1	Remote Control Assy	CXB9118	Not used
2	Cover	CZN5432	Not used
3	Scroll Stick	CZA5047	Not used
4	3D View Stick	CZA5085	Not used
5	Remote Control Unit	Not used	CZX3263
6	Cover	Not used	CZN7655



ELECTRICAL PARTS LIST(Page 110)

MAIN UNIT

Symbol and Description		Part No.	
		AVIC-90DVD/UC	AVIC-80DVD/UC
IC 571	IC	S-81250SGUP	S-812C50AUA-C3E
IC 631	IC	S-8423AFS	S-8424AABFT
FU 1801	Fuse	CEK1190	CEK1257
FU 1802,1804	Fuse	CEK1199	CEK1260
FU 1850,3251	Fuse	CEK1191	CEK1254
R 607	Resistor	RS1/16S104J	Not used
R 608	Resistor	Not used	RS1/16S104J

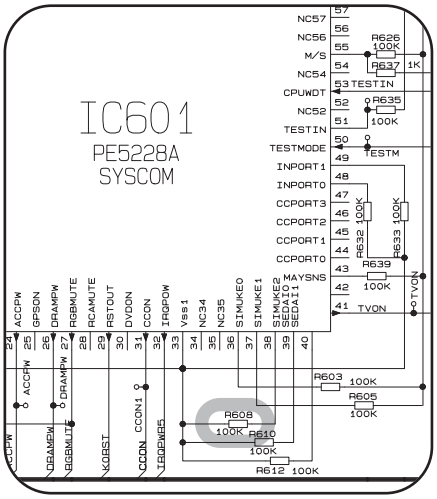

CC UNIT

Symbol and Description		Part No.	
		AVIC-90DVD/UC	AVIC-80DVD/UC
IC 110	IC	PD6403B	PD6444A
IC 111	IC	PD6404B	PD6445A
FU 801	Fuse 4A	CEK1199	CEK1260
FU 802,803	Fuse 2.5A	CEK1209	CEK1258

GPS UNIT

Symbol and Description		Part No.	
		AVIC-90DVD/UC	AVIC-80DVD/UC
IC 502	IC	PD6362B	PD6452A


ADJUSTMENT

USING THE TEST DISC(Page 166)

	Part No.	
	AVIC-90DVD/UC	AVIC-80DVD/UC
TEST DISC	GGV1059(CNDK-LT0102)	GGV1132(S-57364)

EXPLODED VIEWS AND PARTS LIST

DVD MECHANISM MODULE

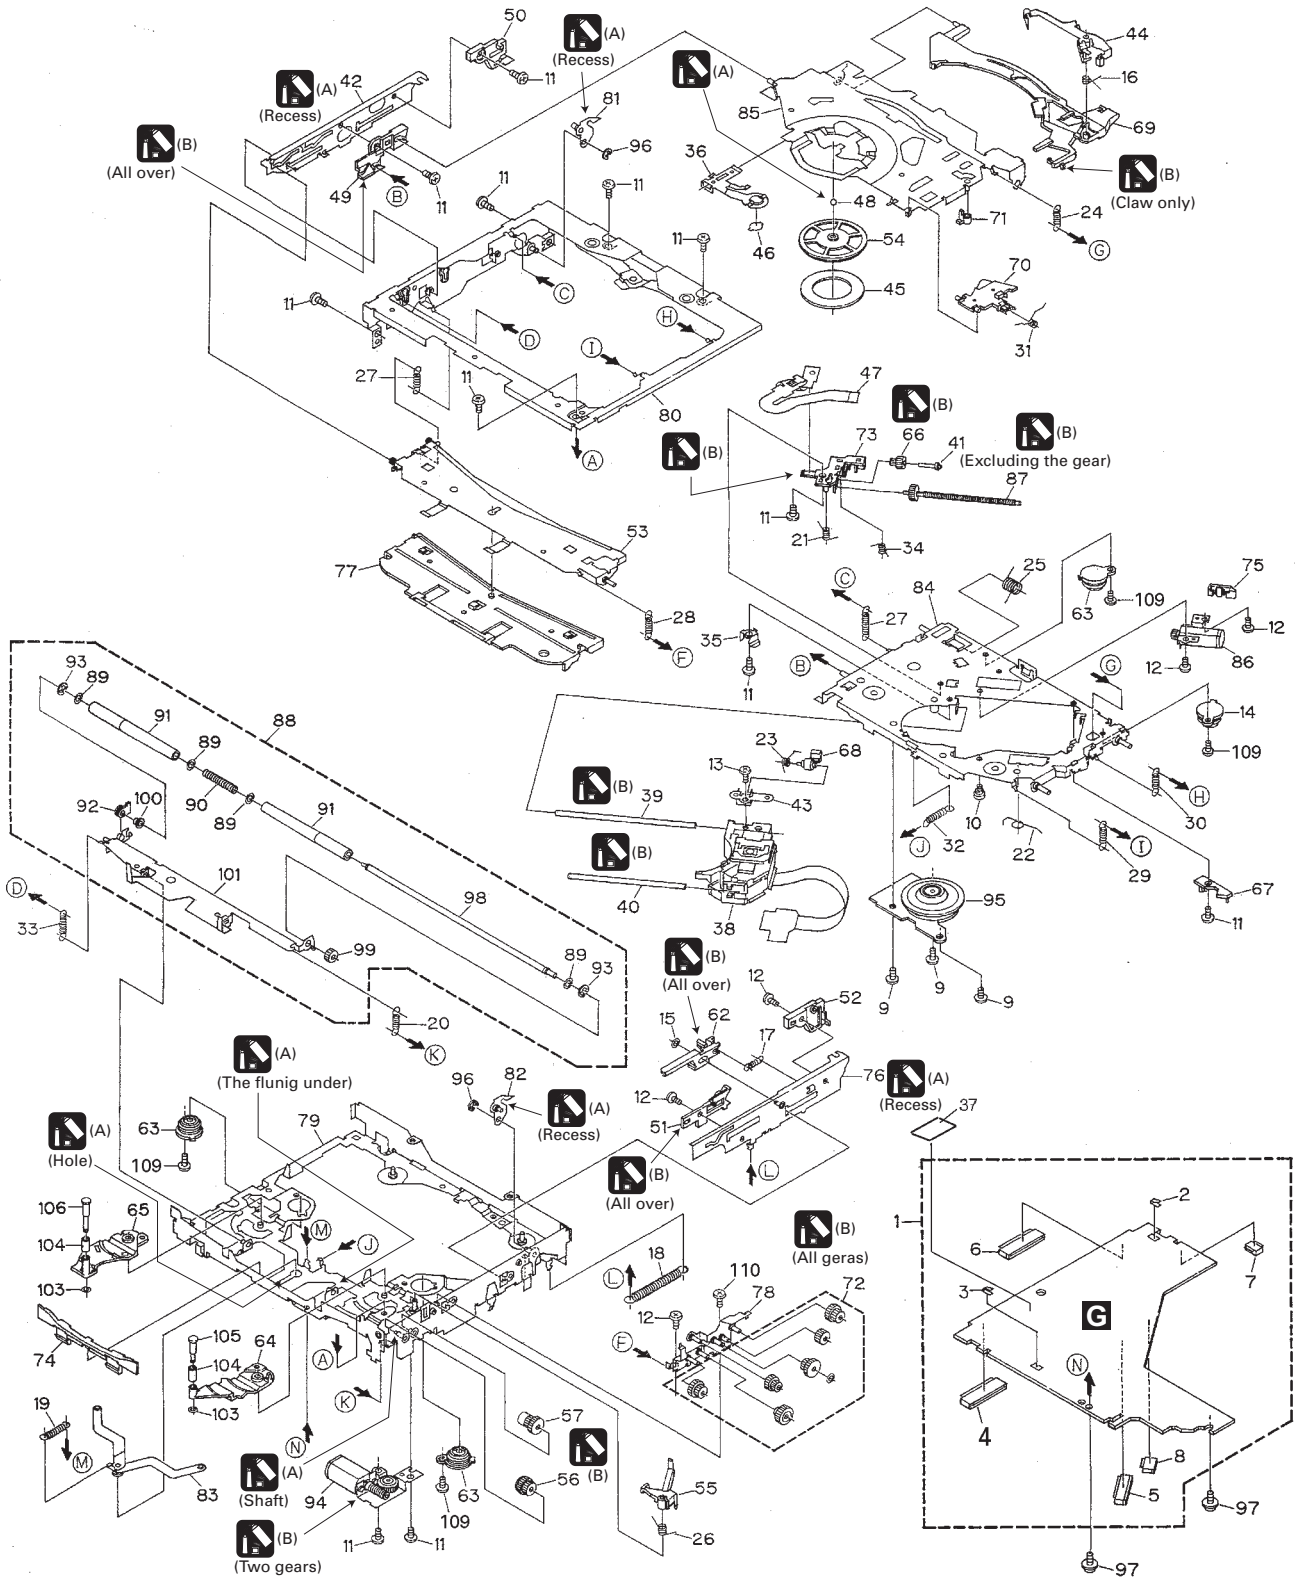

● DVD MECHANISM MODULE SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	DVD Core Unit R	CWX2576
	2	Terminal(CN1703)	CKF1065
	3	Terminal(CN1705)	CKF1065
	4	Connector(CN1401)	CKS4052
	5	Connector(CN1100)	CKS3749
	6	Connector(CN1701)	CKS4052
	7	Connector(CN1700)	CKS4374
	8	Connector(CN1300)	CKS4507
	9	Screw(M2x3)	CBA1486
	10	Screw	CBA1535
	11	Screw(M2x2.2)	CBA1547
	12	Screw(M2x2.2)	CBA1548
	13	Screw(M1.4x2)	CBA1549
	14	Damper	CNV6927
	15	Washer	CBF1038
	16	Spring	CBH2394
	17	Spring	CBH2395
	18	Spring	CBH2396
	19	Spring	CBH2397
	20	Spring	CBH2622
	21	Spring	CBH2399
	22	Spring	CBH2400
	23	Spring	CBH2401
	24	Spring	CBH2402
	25	Spring	CBH2403
	26	Spring	CBH2404
	27	Spring	CBH2405
	28	Spring	CBH2406
	29	Spring	CBH2407
	30	Spring	CBH2408
	31	Spring	CBH2410
	32	Spring	CBH2411
	33	Spring	CBH2413
	34	Spring	CBH2414
	35	Spring	CBL1499
	36	Spring	CBL1500
	37	Sheet	CNM7590
	38	Pickup Unit(Service)(DP4)	CXX1530
	39	Shaft	CLA3878
	40	Shaft	CLA3879
	41	Shaft	CLA3881
	42	Lever	CNC8988
	43	Bracket	CNC8992
	44	Arm	CNC8994
	45	Sheet	CNM6883
	46	Sheet	CNM6884
	47	PCB	CNP5971
	48	Ball	CNR1189
	49	Guide	CNV6352
	50	Guide	CNV6353
	51	Guide	CNV6354
	52	Guide	CNV6355
	53	Guide	CNV6356
	54	Clamper	CNV6357
	55	Arm	CNV6358
	56	Gear	CNV6361
	57	Gear	CNV6362
	58-61	•••••	
	62	Rack	CNV6367
	63	Damper	CNV6368
	64	Arm	CNV6369
	65	Arm	CNV6370
	66	Gear	CNV6372
	67	Holder	CNV6374
	68	Rack	CNV6376
	69	Arm	CNV6377
	70	Arm	CNV6378
	71	Arm	CNV6379
	72	Gear Unit	CXB5959
	73	Holder	CNV6383
	74	Guide	CNV6384
	75	Holder	CNV6385
	76	Lever Unit	CXB5943
	77	Holder Unit	CXB5944
*	78	Holder Unit	CXB5947
	79	Frame Unit	CXB5948
	80	Frame Unit	CXB5949
	81	Arm Unit	CXB5950
	82	Arm Unit	CXB5951
	83	Arm Unit	CXB5952
	84	Chassis Unit	CXB5953
	85	Arm Unit	CXB5954
	86	Motor Unit(CRG)	CXB5955
	87	Screw Unit	CXB5957
	88	Roller Unit	CXB5958
	89	Washer	CBF1060
	90	Spring	CBH2170
	91	Roller	CNV6068
	92	Holder	CNV6210
	93	Washer	YE20FUC
	94	Motor Unit(LOAD)	CXC1187
	95	Motor Unit(SPDL)	CXB6218
	96	Washer	YE15FUC
	97	Screw	IMS20P030FMC
*	98	Shaft	CLA3877
*	99	Gear	CNV6359
*	100	Caller	CNV6382
*	101	Arm Unit	CXB5945
	102	•••••	
	103	Washer	CBF1087
	104	Roller	CNV6928
	105	Shaft	CLA4180
	106	Shaft	CLA4181
	107,108	•••••	
	109	Screw (M2x3.5)	CBA1560
	110	Screw (M2x2.2)	CBA1419

ELECTRICAL PARTS LIST

NOTES:

- Parts whose parts numbers are omitted are subject to being not supplied.
- The part numbers shown below indicate chip components.

Chip Resistor

RS1/○S○○○J,RS1/○○S○○○J

Chip Capacitor (except for CQS.....)

CKS....., CCS....., CSZS.....

GF Unit Number : CWX2576
Unit Name : DVD Core Unit R

MISCELLANEOUS

=====Circuit Symbol and No.		===Part Name	Part No.
IC	1100	IC	AN8702FH
IC	1101	IC	NJM2904M
IC	1200	IC	MN677061ZYUB
IC	1300	IC	BA5985FM
IC	1400	IC	MNZS25BDAUB
IC	1700	IC	PE5324C
IC	1701	IC	M5M5V216ATP-70HI
IC	1702	IC	PD6378D
IC	1703	IC	TC7SH04FU
IC	1704	IC	TC7SH08FU
IC	1705	IC	TC7SH32FU
IC	1801	IC	BA05SFP
IC	1802	IC	BA033SFP
IC	1804	IC	BA00BC0WFP
Q	1102	Transistor	2SD601A
Q	1104	Transistor	2SB1260
Q	1105	Transistor	2SB709A
Q	1107	Transistor	UN2211
Q	1108	Transistor	2SB1260
Q	1109	Chip Transistor	2SC2712
Q	1110	Chip Transistor	2SC2712
Q	1111	Chip Transistor	2SC2712
Q	1700	Transistor	DTA123JK
D	1100	Diode	1SS355
D	1101	Diode	1SS355
D	1401	Diode	UDZ2R7(B)
D	1800	Diode	S2G-6600
D	1801	Diode	S2G-6600
D	1802	Diode	S2G-6600
D	1803	Diode	S2G-6600
L	1201	Inductor	CTF1295
L	1202	Inductor	CTF1295
L	1401	Inductor	CTF1399
L	1402	Inductor	CTF1399
L	1403	Inductor	CTF1395
L	1404	Inductor	CTF1410
L	1406	Inductor	CTF1410
L	1407	Inductor	CTF1410
L	1700	Inductor	CTF1395
L	1701	Inductor	CTF1399
L	1702	Inductor	CTF1473
L	1704	Inductor	CTF1410
L	1705	Inductor	CTF1470
L	1706	Inductor	CTF1470
L	1707	Inductor	CTF1470
L	1708	Inductor	CTF1470
L	1709	Inductor	CTF1470
L	1710	Inductor	CTF1470
L	1711	Inductor	CTF1470
L	1712	Inductor	CTF1470
L	1713	Inductor	CTF1470
L	1714	Inductor	CTF1470
L	1715	Inductor	CTF1470
L	1720	Inductor	CTF1410
X	1500	Radiator 33.8688MHz	CSS1548
X	1700	Ceramic Resonator 4.97MHz	CSS1547
S	1301	Spring Switch(CLAMP)	CSN1051
S	1302	Spring Switch(L/E ON/OFF)	CSN1051
S	1303	Spring Switch(8cm DETECT)	CSN1051
S	1304	Spring Switch(12cm DETECT)	CSN1051

RESISTORS

R	1102		RS1/16SS3R9J
R	1104		RS1/16SS3R9J
R	1105		RS1/16SS122J
R	1106		RS1/16SS472J
R	1107		RS1/16S6201D
R	1108		RS1/16SS3R9J
R	1109		RS1/16SS3R9J
R	1110		RS1/16S1002D
R	1113		RS1/16S2402D
R	1114		RS1/16SS823J
R	1115		RS1/16SS682J
R	1116		RS1/16SS3R9J
R	1117		RS1/16SS3R9J
R	1118		RS1/16SS223J
R	1119		RS1/16SS202J
R	1120		RS1/16SS105J
R	1121		RS1/16SS105J
R	1122		RS1/16SS103J
R	1123		RS1/16SS103J
R	1124		RS1/16SS103J
R	1125		RS1/16SS103J
R	1126		RS1/16SS103J
R	1127		RS1/16SS103J
R	1128		RS1/16SS3R9J
R	1129		RS1/16SS3R9J
R	1130		RS1/16SS102J
R	1131		RS1/16SS102J
R	1132		RS1/16SS102J
R	1133		RS1/16SS102J
R	1134		RS1/16SS102J
R	1135		RAB4CQ0R0J
R	1136		RS1/16SS133J
R	1137		RS1/16SS133J
R	1138		RS1/16SS0R0J
R	1139		RS1/16SS0R0J

=====Circuit Symbol and No.	===Part Name	Part No.
R 1140		RS1/16SS0R0J
R 1141		RS1/16SS0R0J
R 1142		RS1/16SS183J
R 1143		RS1/16SS273J
R 1144		RS1/16SS273J
R 1145		RS1/16SS0R0J
R 1146		RS1/16SS0R0J
R 1147		RS1/16SS0R0J
R 1148		RS1/16SS0R0J
R 1149		RS1/16SS102J
R 1150		RS1/16SS102J
R 1151		RS1/16SS102J
R 1152		RS1/16SS154J
R 1153		RS1/16SS154J
R 1154		RS1/16SS154J
R 1156		RS1/16SS224J
R 1157		RS1/16SS0R0J
R 1158		RS1/16SS330J
R 1159		RS1/16SS330J
R 1201		RS1/16SS203J
R 1202		RS1/16SS102J
R 1203		RS1/16SS471J
R 1204		RS1/16S0R0J
R 1205		RS1/16SS222J
R 1206		RS1/16SS473J
R 1207		RS1/16SS101J
R 1208		RS1/16SS101J
R 1209		RS1/16SS473J
R 1212		RS1/16SS473J
R 1213		RS1/16SS101J
R 1215		RS1/16SS123J
R 1216		RS1/16SS473J
R 1219		RS1/16SS123J
R 1220		RS1/16SS105J
R 1221		RS1/16SS562J
R 1222		RS1/16SS273J
R 1223		RS1/16SS273J
R 1226		RS1/16SS153J
R 1227		RS1/16SS123J
R 1228		RS1/16SS472J
R 1229		RS1/16SS472J
R 1230		RS1/16SS472J
R 1231		RS1/16SS273J
R 1232		RS1/16S6801D
R 1233		RS1/16SS273J
R 1234		RS1/16SS183J
R 1235		RS1/16SS102J
R 1242		RAB4CQ221J
R 1243		RAB4CQ221J
R 1245		RS1/16SS562J
R 1246		RS1/16SS242J
R 1251		RS1/16SS473J
R 1255		RS1/16SS0R0J
R 1257		RS1/16S221J
R 1258		RAB4CQ221J
R 1262		RS1/16SS273J
R 1263		RS1/16SS273J
R 1264		RS1/16SS104J
R 1301		RS1/16S3902D
R 1302		RS1/16S3902D
R 1303		RS1/16S3002D
R 1304		RS1/16S3902D
R 1305		RS1/16SS221J
R 1306		RS1/16SS0R0J
R 1307		RS1/16SS221J

=====Circuit Symbol and No.	===Part Name	Part No.
R 1308		RS1/16S3002D
R 1310		RS1/16SS102J
R 1311		RS1/16S3902D
R 1312		RS1/16S0R0J
R 1314		RS1/16SS221J
R 1321		RS1/16SS221J
R 1323		RS1/16SS104J
R 1324		RS1/16SS473J
R 1325		RS1/16SS273J
R 1402		RAB4CQ103J
R 1403		RS1/16SS222J
R 1404		RAB4CQ820J
R 1407		RAB4CQ220J
R 1408		RAB4CQ220J
R 1410		RAB4CQ220J
R 1411		RAB4CQ220J
R 1412		RAB4CQ0R0J
R 1414		RS1/16SS820J
R 1415		RS1/16SS100J
R 1419		RS1/16SS103J
R 1420		RS1/16SS103J
R 1421		RS1/16SS820J
R 1422		RS1/16SS820J
R 1423		RS1/16SS103J
R 1424		RS1/16SS220J
R 1429		RS1/16S470J
R 1430		RS1/16SS101J
R 1431		RS1/16SS103J
R 1436		RS1/16SS103J
R 1437		RS1/16SS103J
R 1438		RS1/16SS221J
R 1439		RAB4CQ0R0J
R 1440		RAB4CQ0R0J
R 1441		RS1/16SS0R0J
R 1442		RS1/16SS221J
R 1443		RS1/16SS221J
R 1446		RS1/16SS104J
R 1447		RS1/16SS104J
R 1451		RS1/16S0R0J
R 1452		RS1/16SS0R0J
R 1501		RS1/16SS105J
R 1701		RN1/16SE1502D
R 1702		RS1/16SS0R0J
R 1703		RS1/16SS221J
R 1704		RS1/16SS104J
R 1705		RS1/16SS103J
R 1706		RS1/16SS103J
R 1707		RS1/16SS104J
R 1708		RS1/16SS0R0J
R 1709		RS1/16SS104J
R 1710		RS1/16SS473J
R 1711		RS1/16SS221J
R 1712		RS1/16SS104J
R 1713		RS1/16SS104J
R 1714		RS1/16SS104J
R 1715		RS1/16SS472J
R 1716		RS1/16SS104J
R 1717		RS1/16SS473J
R 1718		RS1/16SS104J
R 1719		RS1/16SS104J
R 1720		RS1/16SS473J
R 1721		RS1/16SS104J
R 1722		RS1/16SS104J
R 1723		RS1/16SS473J
R 1724		RS1/16SS221J

=====Circuit Symbol and No.	===Part Name	Part No.
R	1726	RS1/16SS104J
R	1727	RS1/16SS103J
R	1728	RS1/16SS104J
R	1729	RS1/16SS104J
R	1730	RS1/16SS473J
R	1731	RS1/16SS221J
R	1732	RS1/16SS221J
R	1733	RS1/16SS104J
R	1734	RS1/16SS104J
R	1735	RS1/16SS222J
R	1736	RS1/16SS221J
R	1737	RS1/16SS221J
R	1738	RS1/16SS104J
R	1739	RS1/16SS103J
R	1740	RS1/16SS103J
R	1742	RS1/16SS104J
R	1747	RS1/16SS222J
R	1748	RS1/16SS473J
R	1749	RS1/16SS104J
R	1750	RS1/16SS472J
R	1751	RS1/16SS103J
R	1752	RS1/16SS104J
R	1756	RS1/16SS473J
R	1757	RS1/16SS472J
R	1762	RS1/16SS104J
R	1763	RS1/16SS104J
R	1764	RS1/16SS104J
R	1766	RS1/16SS104J
R	1771	RS1/16SS104J
R	1772	RS1/16SS104J
R	1773	RS1/16SS104J
R	1774	RS1/16SS473J
R	1775	RS1/16SS221J
R	1776	RS1/16SS104J
R	1777	RS1/16SS104J
R	1801	RS1/16S3902D
R	1802	RS1/16S3302D
R	1808	RS1/16SS102J
R	1809	RS1/16SS102J
R	1810	RS1/16S0R0J

CAPACITORS

=====Circuit Symbol and No.	===Part Name	Part No.
C	1100	CKSRYB105K10
C	1101	CKSRYB473K25
C	1102	CKSSYB103K16
C	1103	CSZSR101M6R3
C	1104	CKSSYB104K10
C	1105	CKSSYB104K10
C	1106	CKSRYB473K25
C	1107	CKSSYB103K16
C	1108	CSZSR101M6R3
C	1109	CKSSYB104K10
C	1110	CKSRYB154K10
C	1111	CCSSCH221J25
C	1114	CCSSCH330J50
C	1115	CKSSYB104K10
C	1116	CCSSCH221J25
C	1117	CKSRYB105K10
C	1118	CKSSYB104K10
C	1119	CKSSYB104K10
C	1120	CKSSYB104K10
C	1121	CKSSYB104K10
C	1122	CSZSC470M16
C	1123	CKSRYB273K25
C	1124	CKSSYB104K10
C	1125	CKSSYB104K10
C	1126	CKSSYB473K10
C	1127	CCSRCH561J50
C	1128	CKSSYB104K10
C	1129	CKSSYB104K10
C	1130	CCSRCH102J50
C	1131	CCSSCH120J50
C	1133	CCSRCH561J50
C	1134	CKSSYB104K10
C	1136	CCSSCH101J50
C	1137	CCSSCH101J50
C	1138	CCSSCH101J50
C	1139	CKSSYB104K10
C	1140	CKSSYB103K16
C	1141	CKSSYB104K10
C	1142	CKSSYB104K10
C	1143	CKSSYB473K10
C	1144	CKSSYB473K10
C	1145	CKSSYB103K16
C	1146	CKSSYB473K10
C	1148	CKSSYB103K16
C	1201	CKSRYB105K10
C	1202	CCSSCH101J50
C	1203	CKSRYB474K10
C	1204	CCSRCH561J50
C	1205	CCSRCH331J50
C	1206	CKSRYB105K10
C	1207	CKSSYB104K10
C	1208	CCSRCH471J50
C	1209	CCSRCH391J50
C	1210	CKSRYB105K10
C	1211	CCSSCH101J50
C	1212	CKSSYB104K10
C	1213	CKSRYB474K10
C	1214	CCSRCH102J50
C	1215	CCSRCH102J50
C	1216	CKSSYB562K25
C	1217	CCSRCH102J50
C	1218	CKSSYB104K10
C	1219	CKSSYB104K10
C	1220	CKSRYB474K10
C	1221	CCSSCH470J50
C	1222	CKSRYB183K25
C	1223	CCSRCH102J50
C	1224	CKSSYB104K10
C	1225	CKSSYB104K10
C	1227	CKSSYB103K16
C	1228	CKSSYB104K10
C	1229	CCSRCH102J50
C	1230	CKSSYB103K16
C	1231	CKSSYB104K10
C	1232	CKSRYB154K10
C	1233	CKSSYB104K10
C	1234	CKSSYB104K10
C	1235	CKSSYB104K10
C	1236	CKSSYB471K50
C	1241	CKSSYB103K16
C	1242	CKSSYB103K16
C	1243	CKSSYB104K10
C	1300	CKSSYB103K16
C	1301	CKSSYB103K16
C	1304	CKSRYB104K16
C	1305	CEV101M16
C	1308	CKSSYB104K10
C	1400	CKSSYB104K10
C	1401	CKSSYB104K10
C	1402	CKSSYB104K10

=====Circuit Symbol and No.		===Part Name	Part No.
C	1403		CKSSYB104K10
C	1404		CKSSYB104K10
C	1405		CKSSYB104K10
C	1406		CKSSYB104K10
C	1407		CKSSYB104K10
C	1408		CKSSYB104K10
C	1409		CKSSYB104K10
C	1410		CKSSYB104K10
C	1411		CKSSYB104K10
C	1412		CKSSYB104K10
C	1413		CKSSYB104K10
C	1414		CKSRYB105K10
C	1415		CKSSYB104K10
C	1416		CKSSYB104K10
C	1417		CCSSCH181J25
C	1418		CKSSYB471K50
C	1419		CCSSCH221J25
C	1534		CCSSCH5R0C50
C	1537		CCSSCH5R0C50
C	1700		CKSSYB104K10
C	1701		CKSSYB104K10
C	1702		CKSSYB104K10
C	1703		CKSSYB104K10
C	1704		CKSSYB104K10
C	1705		CKSSYB104K10
C	1706		CKSSYB104K10
C	1707		CKSRYB105K10
C	1708		CKSSYB104K10
C	1709		CKSSYB104K10
C	1710		CKSSYB104K10
C	1711		CKSSYB104K10
C	1712		CKSSYB103K16
C	1714		CKSYB106K6R3
C	1715		CKSSYB104K10
C	1719		CKSSYB471K50
C	1720		CKSSYB103K16
C	1721		CKSSYB104K10
C	1722		CKSSYB103K16
C	1728		CKSSYB104K10
C	1729		CKSSYB104K10
C	1730		CKSSYB104K10
C	1753		CKSRYB104K16
C	1801		CKSRYB474K10
C	1802		CKSRYB474K10
C	1803		CKSRYB474K10
C	1804	22µF/6.3V	CCH1300
C	1805	22µF/6.3V	CCH1300
C	1808		CSZSC101M10
C	1810		CCSRCH102J50
C	1812		CSZSC101M10

Miscellaneous Parts List

		Pickup Unit(Service)(DP4)	CXX1530
M	1	Motor Unit(LOADING)	CXC1187
M	2	Motor Unit(CARRIAGE)	CXB5955
M	3	Motor(SPINDLE)	CXB6218
		Fan Motor	CXM1192